Report No: CCISE190906306V01

FCC REPORT

Applicant: Wiko SAS

Address of Applicant: 1, rue Capitaine Dessemond – 13007 Marseille – France.

Equipment Under Test (EUT)

Product Name: Mobile Phone

Model No.: W-V800

Trade mark: WIKO

FCC ID: 2AM86W-V800

Applicable standards: FCC CFR Title 47 Part 15 Subpart B

Date of sample receipt: 17 Sep., 2019

Date of Test: 18 Sep., to 14 Oct., 2019

Date of report issued: 31 Oct., 2019

Test Result: PASS *

Authorized Signature:



Bruce Zhang Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

^{*} In the configuration tested, the EUT complied with the standards specified above.





2 Version

| Version No. | on No. Date Description | |
|-------------|-------------------------|---------------|
| 00 | 15 Oct., 2019 | Original |
| 01 | 31 Oct., 2019 | Update Page 6 |
| | | |
| | | |
| | | |

Tested by: Date: 31 Oct., 2019

Test Engineer

Reviewed by: Date: 31 Oct., 2019

Shenzhen Zhongjian Nanfang Testing Co., Ltd.

No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,

Project No.: CCISE1909063

Bao'an District, Shenzhen, Guangdong, China Telephone: +86 (0) 755 2311 8282 Fax: +86 (0) 755 2311 6366



3 Contents

| | | | Page |
|---|------|---|------|
| 1 | C | OVER PAGE | 1 |
| 2 | VI | ERSION | 2 |
| 3 | C | ONTENTS | 3 |
| 4 | TI | EST SUMMARY | 4 |
| 5 | G | ENERAL INFORMATION | 5 |
| | 5.1 | CLIENT INFORMATION | 5 |
| | 5.2 | GENERAL DESCRIPTION OF E.U.T. | 5 |
| | 5.3 | TEST MODE | 5 |
| | 5.4 | MEASUREMENT UNCERTAINTY | 5 |
| | 5.5 | DESCRIPTION OF SUPPORT UNITS | 6 |
| | 5.6 | RELATED SUBMITTAL(S) / GRANT (S) | 6 |
| | 5.7 | DESCRIPTION OF CABLE USED | 6 |
| | 5.8 | ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD | 6 |
| | 5.9 | LABORATORY FACILITY | 6 |
| | 5.10 | LABORATORY LOCATION | 6 |
| | 5.11 | TEST INSTRUMENTS LIST | 7 |
| 6 | TI | EST RESULTS AND MEASUREMENT DATA | 8 |
| | 6.1 | CONDUCTED EMISSION | 8 |
| | 6.2 | RADIATED EMISSION | 11 |
| 7 | TI | EST SETUP PHOTO | 17 |
| ጸ | FI | LIT CONSTRUCTIONAL DETAILS | 18 |





4 Test Summary

| Test Item | Section in CFR 47 | Result |
|--------------------|-------------------|--------|
| Conducted Emission | Part 15.107 | Pass |
| Radiated Emission | Part 15.109 | Pass |

Remark:

- 1. Pass: The EUT complies with the essential requirements in the standard.
- 2. N/A: The EUT not applicable of the test item.

Test Method: ANSI C63.4:2014



5 General Information

5.1 Client Information

| Applicant: | Wiko SAS | |
|-----------------------|--|--|
| Address: | 1, rue Capitaine Dessemond – 13007 Marseille – France. | |
| Manufacturer/Factory: | Shenzhen Tinno Mobile Technology Corp. | |
| Address: | 4/F, H-3 Building, OCT Eastern Industrial Park. NO.1 XiangShan East Road, Nan Shan District, Shenzhen, P.R. China. | |

5.2 General Description of E.U.T.

| Product Name: | Mobile Phone |
|------------------------|---|
| Model No.: | W-V800 |
| Hardware version: | V1.0 |
| Software version: | W-V800-CA-V01.07-20-9.0-GBL |
| Power supply: | Rechargeable Li-ion Battery DC3.85V-3900mAh |
| AC adapter : | Input: AC100-240V, 50/60Hz, 250mA Output: DC 5.0V, 1.55A |
| Test Sample Condition: | The test samples were provided in good working order with no visible defects. |

5.3 Test Mode

| Operating mode | Detail description | |
|-------------------------|--|--|
| PC mode | Keep the EUT in Downloading mode(Worst case) | |
| Charging+Recording mode | Keep the EUT in Charging+Recording mode | |
| Charging+Playing mode | Keep the EUT in Charging+Playing mode | |
| FM mode | Keep the EUT in FM receiver mode | |
| GPS mode | Keep the EUT in GPS receiver mode | |

The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

5.4 Measurement Uncertainty

| Parameters | Expanded Uncertainty |
|-------------------------------------|----------------------|
| Conducted Emission (9kHz ~ 30MHz) | ±1.60 dB (k=2) |
| Radiated Emission (9kHz ~ 30MHz) | ±3.12 dB (k=2) |
| Radiated Emission (30MHz ~ 1000MHz) | ±4.32 dB (k=2) |
| Radiated Emission (1GHz ~ 18GHz) | ±5.38 dB (k=2) |
| Radiated Emission (18GHz ~ 40GHz) | ±3.36 dB (k=2) |

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road, Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 2311 8282 Fax: +86 (0) 755 2311 6366



5.5 Description of Support Units

| Manufacturer | Description | Model | Serial Number | FCC ID/DoC |
|--------------|-------------|-------------------|---------------|------------|
| DELL | PC | OPTIPLEX745 | N/A | DoC |
| DELL | MONITOR | E178FPC | N/A | DoC |
| DELL | KEYBOARD | SK-8115 | N/A | DoC |
| DELL | MOUSE | MOC5UO | N/A | DoC |
| LENOVO | Laptop | SL510 | 2847A65 | DoC |
| HP | Printer | HP LaserJet P1007 | N/A | DoC |

5.6 Related Submittal(s) / Grant (s)

This is an original grant, no related submittals and grants.

5.7 Description of Cable Used

| Cable Type | Description | Length | From | То |
|------------------------|-------------|--------|------|------------|
| Detached USB Cable | Shielding | 1.0m | EUT | PC/Adapter |
| Detached headset cable | Unshielded | 1.2m | EUT | Headset |

5.8 Additions to, deviations, or exclusions from the method

No

5.9 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● FCC - Designation No.: CN1211

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● ISED - CAB identifier.: CN0021

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● CNAS - Registration No.: CNAS L6048

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

A2LA - Registration No.: 4346.01

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: https://portal.a2la.org/scopepdf/4346-01.pdf

5.10 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.

Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,

Bao'an District, Shenzhen, Guangdong, China Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info@ccis-cb.com, Website: http://www.ccis-cb.com

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 2311 8282 Fax: +86 (0) 755 2311 6366

Page 6 of 18



5.11 Test Instruments list

| Radiated Emission: | | | | | |
|--------------------|-----------------|---------------|--------------------|-------------------------|-----------------------------|
| Test Equipment | Manufacturer | Model No. | Serial No. | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| 3m SAC | SAEMC | 9m*6m*6m | 966 | 07-22-2017 | 07-21-2020 |
| Loop Antenna | SCHWARZBECK | FMZB1519B | 00044 | 03-18-2019 | 03-17-2020 |
| BiConiLog Antenna | SCHWARZBECK | VULB9163 | 497 | 03-18-2019 | 03-17-2020 |
| Horn Antenna | SCHWARZBECK | BBHA9120D | 916 | 03-18-2019 | 03-17-2020 |
| Horn Antenna | SCHWARZBECK | BBHA9120D | 1805 | 06-22-2017 | 06-21-2020 |
| Horn Antenna | SCHWARZBECK | BBHA 9170 | BBHA9170582 | 11-21-2018 | 11-20-2019 |
| EMI Test Software | AUDIX | E3 | Version: 6.110919b | | b |
| Pre-amplifier | HP | 8447D | 2944A09358 | 03-18-2019 | 03-17-2020 |
| Pre-amplifier | CD | PAP-1G18 | 11804 | 03-18-2019 | 03-17-2020 |
| Spectrum analyzer | Rohde & Schwarz | FSP30 | 101454 | 03-18-2019 | 03-17-2020 |
| Spectrum analyzer | Rohde & Schwarz | FSP40 | 100363 | 11-21-2018 | 11-20-2019 |
| EMI Test Receiver | Rohde & Schwarz | ESRP7 | 101070 | 03-18-2019 | 03-17-2020 |
| Cable | ZDECL | Z108-NJ-NJ-81 | 1608458 | 03-18-2019 | 03-17-2020 |
| Cable | MICRO-COAX | MFR64639 | K10742-5 | 03-18-2019 | 03-17-2020 |
| Cable | SUHNER | SUCOFLEX100 | 58193/4PE | 03-18-2019 | 03-17-2020 |

| Conducted Emission: | | | | | | |
|---------------------|-----------------|------------|-------------|-------------------------|-----------------------------|--|
| Test Equipment | Manufacturer | Model No. | Serial No. | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) | |
| EMI Test Receiver | Rohde & Schwarz | ESCI | 101189 | 03-18-2019 | 03-17-2020 | |
| Pulse Limiter | SCHWARZBECK | OSRAM 2306 | 9731 | 03-18-2019 | 03-17-2020 | |
| LISN | CHASE | MN2050D | 1447 | 03-18-2019 | 03-17-2020 | |
| LISN | Rohde & Schwarz | ESH3-Z5 | 8438621/010 | 07-21-2018 | 07-20-2021 | |
| Cable | HP | 10503A | N/A | 03-18-2019 | 03-17-2020 | |
| EMI Test Software | AUDIX | E3 | \ | Version: 6.110919 | b | |



6 Test results and Measurement Data


6.1 Conducted Emission

| Test Requirement: | FCC Part 15 B Section 15.10 |)7 | | |
|-----------------------|---|---------------------|-----------|--|
| Test Frequency Range: | 150kHz to 30MHz | | | |
| Class / Severity: | Class B | | | |
| Receiver setup: | RBW=9kHz, VBW=30kHz | | | |
| Limit: | · | Limit | (dBµV) | |
| | Frequency range (MHz) | Quasi-peak | Average | |
| | 0.15-0.5 | 66 to 56* | 56 to 46* | |
| | 0.5-5 | 56 | 46 | |
| | 0.5-30 | 60 | 50 | |
| | * Decreases with the logarith | m of the frequency. | | |
| Test setup: | Reference Plan LISN 40cm 80ci 40cm 80ci E.U.T Test table/Insulation plane Remark E.U.T. Equipment Under Test LISN Line Impedence Stabilization Network Test table height=0.8m | Filter — AC po | | |
| Test procedure | The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement. | | | |
| Test Instruments: | Refer to section 5.11 for details | | | |
| Test mode: | Refer to section 5.3 for details | | | |
| Test results: | Pass | | | |



Measurement data:

| Product name: | Mobile Phone | Product model: | W-V800 |
|-----------------|------------------|----------------|------------------------|
| Test by: | Yaro | Test mode: | PC mode |
| Test frequency: | 150 kHz ~ 30 MHz | Phase: | Line |
| Test voltage: | AC 120 V/60 Hz | Environment: | Temp: 22.5°C Huni: 55% |

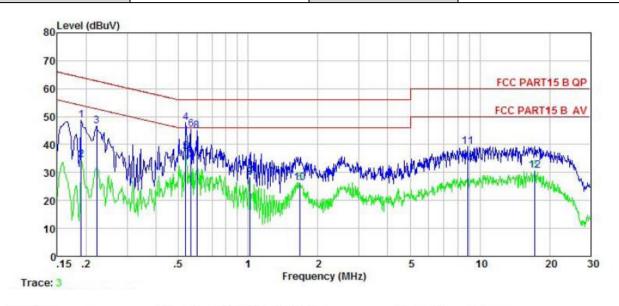


| | Freq | Read Level | LISN Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|--------------------------------------|--------|---------------|----------------|---------------|-------|---------------|---------------|---------|
| | MHz | dBu∀ | <u>dB</u> | ₫B | dBu∛ | dBu∜ | <u>d</u> B | |
| 1 | 0.190 | 38.33 | -0.42 | 10.76 | 48.67 | 64.02 | -15.35 | QP |
| 2 | 0.190 | 24.21 | -0.42 | 10.76 | 34.55 | 54.02 | -19.47 | Average |
| 3 | 0.222 | 36.18 | -0.40 | 10.76 | 46.54 | 62.74 | -16.20 | QP |
| 1 2 3 4 5 6 7 8 | 0.538 | 37.39 | -0.39 | 10.76 | 47.76 | 56.00 | -8.24 | QP |
| 5 | 0.538 | 27.12 | -0.39 | 10.76 | 37.49 | 46.00 | -8.51 | Average |
| 6 | 0.567 | 35.16 | -0.39 | 10.76 | 45.53 | 56.00 | -10.47 | QP |
| 7 | 0.567 | 24.14 | -0.39 | 10.76 | 34.51 | 46.00 | -11.49 | Average |
| 8 | 0.601 | 34.48 | -0.38 | 10.77 | 44.87 | 56.00 | -11.13 | QP |
| 9 | 1.016 | 17.98 | -0.38 | 10.87 | 28.47 | 46.00 | -17.53 | Average |
| 10 | 1.671 | 15.82 | -0.40 | 10.94 | 26.36 | 46.00 | -19.64 | Average |
| 11 | 8.822 | 28.90 | -0.58 | 10.89 | 39.21 | 60.00 | -20.79 | QP |
| 12 | 17.291 | 20.49 | -0.82 | 10.91 | 30.58 | 50.00 | -19.42 | Average |

Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss.



| Product name: | Mobile Phone | Product model: | W-V800 |
|-----------------|------------------|----------------|-----------------------|
| Test by: | Yaro | Test mode: | PC mode |
| Test frequency: | 150 kHz ~ 30 MHz | Phase: | Neutral |
| Test voltage: | AC 120 V/60 Hz | Environment: | Temp: 22.5℃ Huni: 55% |

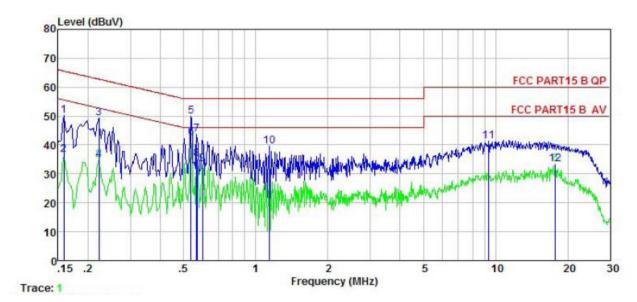

| | Freq | Read Level | LISN Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|---|--------|---------------|----------------|---------------|-------|---------------|---------------|---------|
| | MHz | dBu∀ | ₫B | ₫B | dBu₹ | dBu∀ | <u>d</u> B | |
| 1 | 0.158 | 40.05 | -0.68 | 10.77 | 50.14 | 65.56 | -15.42 | QP |
| 2 | 0.158 | 26.45 | -0.68 | 10.77 | 36.54 | 55.56 | -19.02 | Average |
| 3 | 0.222 | 39.20 | -0.67 | 10.76 | 49.29 | 62.74 | -13.45 | QP |
| 1 2 3 4 5 6 7 8 9 | 0.222 | 24.71 | -0.67 | 10.76 | 34.80 | 52.74 | -17.94 | Average |
| 5 | 0.538 | 39.66 | -0.65 | 10.76 | 49.77 | 56.00 | | |
| 6 | 0.538 | 32.48 | -0.65 | 10.76 | 42.59 | 46.00 | -3.41 | Average |
| 7 | 0.567 | 33.61 | -0.65 | 10.76 | 43.72 | 56.00 | -12.28 | QP |
| 8 | 0.570 | 24.91 | -0.65 | 10.76 | 35.02 | 46.00 | -10.98 | Average |
| 9 | 0.601 | 23.28 | -0.64 | 10.77 | 33.41 | 46.00 | -12.59 | Average |
| 10 | 1.135 | 29.36 | -0.64 | 10.89 | 39.61 | 56.00 | -16.39 | QP |
| 11 | 9.352 | 31.22 | -0.78 | 10.91 | 41.35 | 60.00 | -18.65 | QP |
| 12 | 17.755 | 23.70 | -1.16 | 10.92 | 33.46 | 50.00 | -16.54 | Average |

Notes

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss.



6.2 Radiated Emission

| 0.2 Kau | diated Emission | 1 | | | | | _ | | |
|---------|--------------------|---|--|------------|-------------------------------|------------------|--|--|--|
| Tes | t Requirement: | FCC Part 15 B Section 15.109 | | | | | | | |
| Tes | t Frequency Range: | 30MHz to 6000M | 30MHz to 6000MHz | | | | | | |
| Tes | t site: | Measurement Dis | Measurement Distance: 3m (Semi-Anechoic Chamber) | | | | | | |
| Rec | eiver setup: | Frequency | Detecto | | RBW | VBW | Remark | | |
| 1100 | ortor ootap. | ' ' | | 120kHz | 300kHz | Quasi-peak Value | | | |
| | | Above 1GHz | Peak 1MHz | | 3MHz | Peak Value | | | |
| | | Above 1GHZ | RMS | | 1MHz | 3MHz | Average Value | | |
| Limi | it: | Frequenc | | Lim | nit (dBuV/m | @3m) | Remark | | |
| | | 30MHz-88N | | | 40.0 | | Quasi-peak Value | | |
| | | 88MHz-216l | | | 43.5 | | Quasi-peak Value | | |
| | | 216MHz-960 960MHz-10 | | | 46.0 54.0 | | Quasi-peak Value Quasi-peak Value | | |
| | | 900101112-10 | JI 1Z | | 54.0 | | Average Value | | |
| | | Above 1G | Hz | | 74.0 | | Peak Value | | |
| Tes | t setup: | Below 1GHz | | | 7 110 | | r oak valdo | | |
| | | Antenna Tower Search Antenna RF Test Receiver Ground Plane Above 1GHz | | | | | | | |
| | | AE (Turn | EUT Grantable) Grantable) Test Received | THE STREET | Horn Antenna Pre- Amplifier | Antenna Tow | er War and the second of the s | | |
| Tes | t Procedure: | The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. | | | | | | | |






| | 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. |
|-------------------|--|
| | The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. |
| | 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. |
| Test Instruments: | Refer to section 5.11 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |
| Remark: | All of the observed value above 6GHz ware the niose floor , which were no recorded |



Measurement Data:

Below 1GHz:

| Product Name: | Mobile Phone | Product Model: | W-V800 |
|-----------------|----------------|----------------|---------------------|
| Test By: | Yaro | Test mode: | PC mode |
| Test Frequency: | 30 MHz ~ 1 GHz | Polarization: | Vertical |
| Test Voltage: | AC 120/60Hz | Environment: | Temp: 24℃ Huni: 57% |

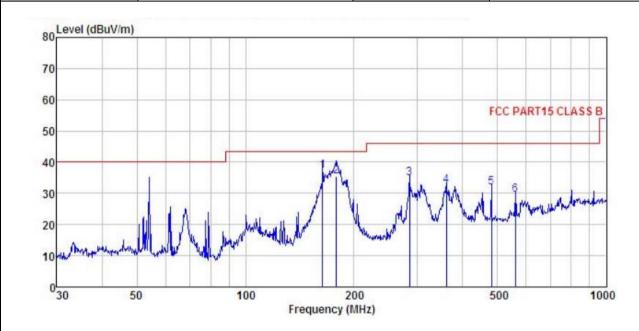

| | Freq | | Antenna Factor | | | | | | |
|-----------------------|---------|-------|-------------------|------|-------|--------|--------|--------|----|
| | MHz | dBu₹ | ─dB/m | | | dBuV/m | dBuV/m | dB | |
| 1 | 163.755 | 54.26 | 9.42 | 2.62 | 29.10 | 37.20 | 43.50 | -6.30 | QP |
| 2 | 178.758 | 51.90 | 9.93 | 2.72 | 28.98 | 35.57 | 43.50 | -7.93 | QP |
| 1 2 3 4 5 | 284.977 | 47.03 | 13.35 | 2.90 | 28.48 | 34.80 | 46.00 | -11.20 | QP |
| 4 | 360.448 | 43.14 | 14.75 | 3.10 | 28.61 | 32.38 | 46.00 | -13.62 | QP |
| 5 | 480.528 | 39.93 | 17.52 | 3.46 | 28.92 | 31.99 | 46.00 | -14.01 | QP |
| 6 | 560.693 | 36.18 | 18.62 | 3.90 | 29.07 | 29.63 | 46.00 | -16.37 | QP |

Remark:

- 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor.
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.



| Product Name: | Mobile Phone | | Product Model: | W-V800 | | | |
|----------------------|---|------------------------|----------------|-------------------------------------|-----------|--|--|
| Гest By: | Yaro | | Test mode: | PC mode | PC mode | | |
| Test Frequency: | Frequency: 30 MHz ~ 1 GHz Polarization: | | Horizontal | Horizontal | | | |
| Гest Voltage: | AC 120/60Hz | | Environment: | Temp: 24°C | Huni: 57% | | |
| 1 1 /dD-A// | -1 | | | · | | | |
| 80 Level (dBuV/i | m) | | | | | | |
| 70 | | | | | | | |
| 60 | | | | | | | |
| | | | | FCC PART15 CLA | SSB | | |
| 50 | | | | | | | |
| 40 | | M | 2 Am 4 | | | | |
| 30 | | | MILA | 5 1 | | | |
| | | / / / | V // W/V | had before the second second second | Honorara | | |
| 20 | | Mary J. Mary | CM | 201 Mar | | | |
| 10 Kith wymanicon | white the property was | Adon. | | | | | |
| 0 | | | | | | | |
| 030 | 50 100 | Frequency (f | 00 //Hz) | 500 | 1000 | | |
| | Paadintanna | Cable Pream | o Lim | it Over | | | |
| Fr | | | | | k | | |
| <u>M</u> | Hz dBuV dB/m | dBd | B dBuV/m dBuV, | 7mdB | | | |
| 1 178.13 2 268.43 | | 2.71 28.9 2.86 28.5 | | | | | |
| 2 268.49 3 285.9 | | 2.90 28.4 | | | | | |

28.61

28.92

28.52

36.28

31.47

32.65

46.00 -9.72 QP

46.00 -14.53 QP

46.00 -13.35 QP

Remark:

56

361.714

480.528

739.661

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor.

14.78

17.52

20.56

47.01

39.41

36.29

2. The emission levels of other frequencies are very lower than the limit and not show in test report.


3.10

3.46



Above 1GHz:

| Product Name: | Mobile Phone | Product Model: | W-V800 |
|-----------------|---------------|----------------|---------------------|
| Test By: | Yaro | Test mode: | PC mode |
| Test Frequency: | 1 GHz ~ 6 GHz | Polarization: | Vertical |
| Test Voltage: | AC 120/60Hz | Environment: | Temp: 24℃ Huni: 57% |

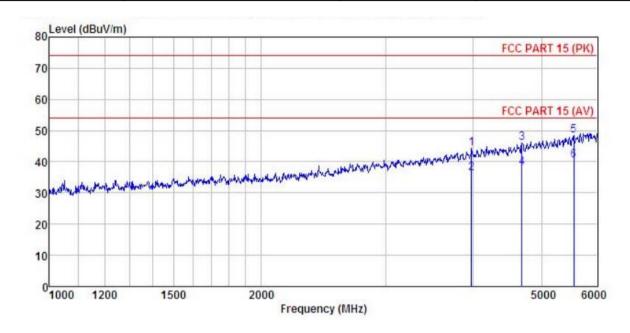


| | Freq | | Antenna Factor | | | | Limit Line | Over Limit | Remark |
|---|----------|-------|-------------------|------|-----------|--------|---------------|---------------|---------|
| | MHz | dBu∜ | | dB | <u>dB</u> | dBuV/m | dBuV/m | <u>dB</u> | |
| 1 | 3973.530 | 47.52 | 30.19 | 6.11 | 41.81 | 44.21 | 74.00 | -29.79 | Peak |
| 2 | 3973.530 | 39.52 | 30.19 | 6.11 | 41.81 | 36.21 | 54.00 | -17.79 | Average |
| 3 | 4685.613 | 48.08 | 30.78 | 6.86 | 42.01 | 46.12 | 74.00 | -27.88 | Peak |
| 4 | 4685.613 | 40.03 | 30.78 | 6.86 | 42.01 | 38.07 | | | Average |
| 5 | 5555.085 | 47.76 | 32.61 | 7.26 | 41.81 | 48.48 | | -25.52 | |
| 6 | 5555.085 | 39.75 | 32.61 | 7.26 | 41.81 | 40.47 | | | Average |
| | | | | | | | | | |

Remark:

- 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor.
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.



| Product Name: | Mobile Phone | Product Model: | W-V800 |
|-----------------|---------------|----------------|----------------------|
| Test By: | Yaro | Test mode: | PC mode |
| Test Frequency: | 1 GHz ~ 6 GHz | Polarization: | Horizontal |
| Test Voltage: | AC 120/60Hz | Environment: | Temp: 24°C Huni: 57% |
| | | | |

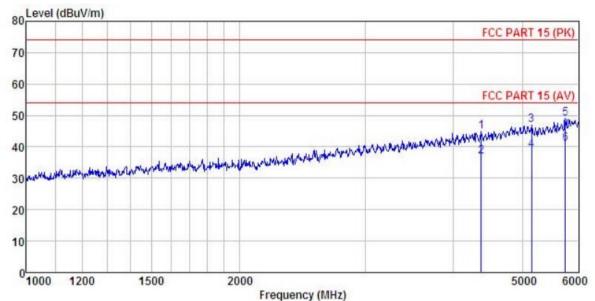

| | Freq | ReadAntenna Level Factor | | | | | Limit Line | Over Limit | Remark |
|---|----------|-----------------------------|-------|------|-------|--------|---------------|---------------|---------|
| | MHz | dBu∀ | dB/m | d₿ | dB | dBu√/m | dBuV/m | dB | |
| 1 | 4377.203 | 47.43 | 30.38 | 6.67 | 41.95 | 44.85 | 74.00 | -29.15 | Peak |
| 2 | 4377.203 | 39.42 | 30.38 | 6.67 | 41.95 | 36.84 | 54.00 | -17.16 | Average |
| 2 | 5152.386 | 47.45 | 31.78 | 7.05 | 41.93 | 46.89 | | -27.11 | |
| 4 | 5152.386 | 39.45 | 31.78 | 7.05 | 41.93 | 38.89 | 54.00 | -15.11 | Average |
| 5 | 5747.456 | 47.80 | 32.65 | 7.74 | 41.96 | 48.96 | 74.00 | -25.04 | Peak |
| 6 | 5747.456 | 39.81 | 32.65 | 7.74 | 41.96 | 40.97 | 54.00 | -13.03 | Average |


Remark:


- 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor.
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.






7 Test Setup Photo

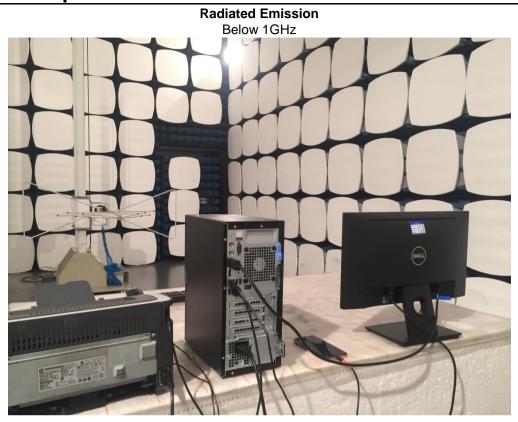

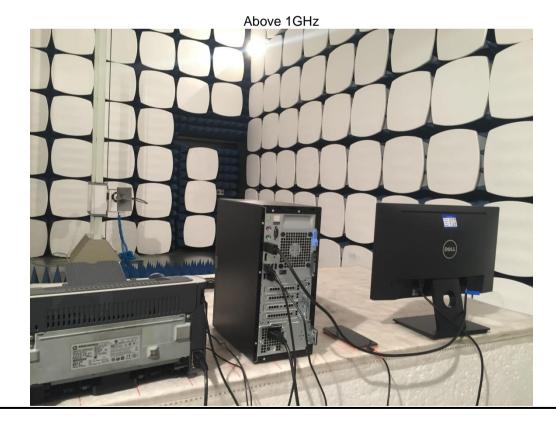



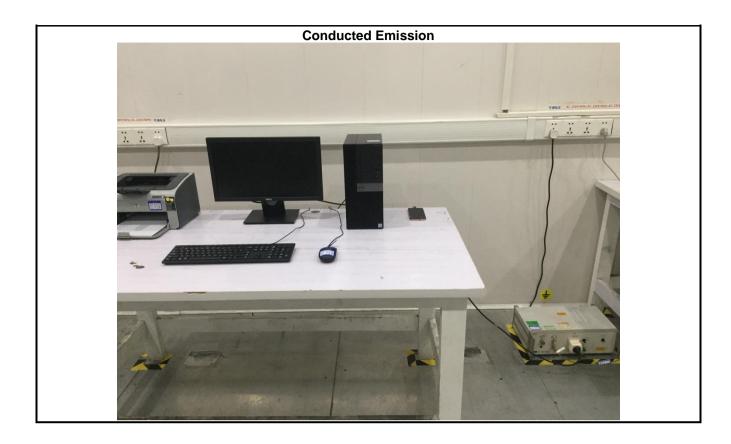

8 EUT Constructional Details

Reference to the test report No.: CCISE190906301

-----End of report-----