

SAR TEST REPORT

For

Guangzhou Lie Dun Electronics Technology CO.,Ltd

RUGGEDIZED TABLET

Test Model: 8-DUAL

List Model No.: 8-DUAL, 8-MICRO, 8-SINGLE, 8-SINGLE+, 8-SLAP

Prepared for : Guangzhou Lie Dun Electronics Technology CO.,Ltd
Address : No.4 plant of No.43 South International Trade Avenue,Hualong
Town,Panyu District,Guangzhou,Guangdong,China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an
Avenue, Bao'an District, Shenzhen, Guangdong, China

Tel : (86)755-82591330
Fax : (86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : April 22, 2019
Number of tested samples : 1
Serial number : Prototype
Date of Test : April 22, 2019~May 08, 2019
Date of Report : June 27, 2019

SAR TEST REPORT**Report Reference No. :** LCS190422068AE

Date Of Issue : June 27, 2019

Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, ChinaTesting Location/ Procedure..... : Full application of Harmonised standards
Partial application of Harmonised standards
Other standard testing method **Applicant's Name..... :** Guangzhou Lie Dun Electronics Technology CO.,LtdAddress : No.4 plant of No.43 South International Trade Avenue,Hualong
Town,Panyu District,Guangzhou,Guangdong,China**Test Specification:**

Standard : IEEE Std C95.1, 2005/IEEE Std 1528™-2013/ FCC Part 2.1093

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2014-09

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : RUGGEDIZED TABLET

Trade Mark : CHAMELEON

Test Model : 8-DUAL

Operation Frequency : WCDMA Band II/ V,LTE Band 2,4,5,7,12,13,25,26


Modulation Type : Refer to page 7

DC 7.6V by Lithium Ion battery(7600mAh)

Ratings : Maximum Charging Voltage: DC 7.8V

Input: 100-240V-50/60Hz


Output:12V/3A

Result : Positive**Compiled by:**


Vera Deng/ File administrators

Supervised by:


Aking Jin/ Technique principal

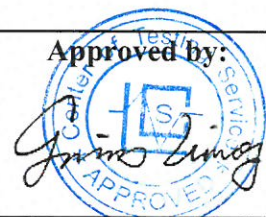Approved by:


Gavin Liang/ Manager

SAR -- TEST REPORT

| | |
|---|--------------------------------|
| Test Report No. : LCS190422068AE | June 27, 2019 Date of issue |
|---|--------------------------------|

| | |
|--------------------------|---|
| Test Model..... | : 8-DUAL |
| EUT..... | : RUGGEDIZED TABLET |
| Applicant..... | : Guangzhou Lie Dun Electronics Technology CO.,Ltd |
| Address..... | : No.4 plant of No.43 South International Trade Avenue,Hualong Town,Panyu District,Guangzhou,Guangdong,China |
| Telephone..... | : / |
| Fax..... | : / |
| Manufacturer..... | : Guangzhou Lie Dun Electronics Technology CO.,Ltd |
| Address..... | : No.4 plant of No.43 South International Trade Avenue,Hualong Town,Panyu District,Guangzhou,Guangdong,China |
| Telephone..... | : / |
| Fax..... | : / |
| Factory..... | : / |
| Address..... | : / |
| Telephone..... | : / |
| Fax..... | : / |

| | |
|--------------------|-----------------|
| Test Result | Positive |
|--------------------|-----------------|

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

| Revision | Issue Date | Revisions | Revised By |
|----------|---------------|---------------|-------------|
| 000 | June 27, 2019 | Initial Issue | Gavin Liang |
| | | | |
| | | | |

TABLE OF CONTENTS

| | |
|--|------------|
| 1. TEST STANDARDS AND TEST DESCRIPTION..... | 6 |
| 1.1. TEST STANDARDS | 6 |
| 1.2. TEST DESCRIPTION..... | 6 |
| 1.3. GENERAL REMARKS | 6 |
| 1.4. PRODUCT DESCRIPTION | 6 |
| 1.5. STATEMENT OF COMPLIANCE | 9 |
| 2. TEST ENVIRONMENT | 10 |
| 2.1. TEST FACILITY..... | 10 |
| 2.2. ENVIRONMENTAL CONDITIONS | 10 |
| 2.3. SAR LIMITS..... | 10 |
| 2.4. EQUIPMENTS USED DURING THE TEST | 11 |
| 3. SAR MEASUREMENTS SYSTEM CONFIGURATION | 12 |
| 3.1. SAR MEASUREMENT SET-UP..... | 12 |
| 3.2. OPENSAR E-FIELD PROBE SYSTEM..... | 13 |
| 3.3. PHANTOMS..... | 14 |
| 3.4. DEVICE HOLDER | 14 |
| 3.5. SCANNING PROCEDURE | 15 |
| 3.6. DATA STORAGE AND EVALUATION..... | 16 |
| 3.7. POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM..... | 17 |
| 3.8. TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS | 19 |
| 3.9. TISSUE EQUIVALENT LIQUID PROPERTIES | 19 |
| 3.10. SYSTEM CHECK | 20 |
| 3.11. SAR MEASUREMENT PROCEDURE | 22 |
| 3.12. POWER REDUCTION | 27 |
| 3.13. POWER DRIFT | 27 |
| 4. TEST CONDITIONS AND RESULTS..... | 28 |
| 4.1. CONDUCTED POWER RESULTS | 28 |
| 4.2. MANUFACTURING TOLERANCE | 44 |
| 4.3. TRANSMIT ANTENNAS AND SAR MEASUREMENT POSITION..... | 56 |
| 4.4. SAR MEASUREMENT RESULTS | 57 |
| 4.5. SIMULTANEOUS TX SAR CONSIDERATIONS | 62 |
| 4.6. SAR MEASUREMENT VARIABILITY | 64 |
| 4.7. GENERAL DESCRIPTION OF TEST PROCEDURES | 64 |
| 4.8. MEASUREMENT UNCERTAINTY (450MHZ-6GHZ)..... | 65 |
| 4.9. SYSTEM CHECK RESULTS | 66 |
| 4.10 SAR TEST GRAPH RESULTS | 71 |
| 5. CALIBRATION CERTIFICATES | 81 |
| 5.1 PROBE-EPGO324 CALIBRATION CERTIFICATE..... | 81 |
| 5.2 SID750DIPOLE CALIBRATION CERITICATE..... | 91 |
| 5.3 SID835DIPOLE CALIBRATION CERITICATE..... | 102 |
| 5.3 SID1800 DIPOLE CALIBRATION CERTIFICATE | 113 |
| 5.4 SID1900 DIPOLE CALIBRATION CERTIFICATE | 124 |
| 5.5 SID2600 DIPOLE CALIBRATION CERITICATE..... | 135 |
| 6. EUT TEST PHOTOGRAPHS | 147 |
| 6.1 PHOTOGRAPH OF LIQUID DEPTH..... | 147 |
| 6.2 PHOTOGRAPH OF THE TEST | 150 |
| 7. EUT PHOTOGRAPHS | 152 |

1. TEST STANDARDS AND TEST DESCRIPTION

1.1. Test Standards

[IEEE Std C95.1, 2005](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 KHz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

[IEEE Std 1528™-2013](#): IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

[FCC Part 2.1093](#): Radiofrequency Radiation Exposure Evaluation: Portable Devices

[KDB447498 D01 General RF Exposure Guidance v06](#): Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

[KDB648474 D04 Handset SAR v01r03](#): SAR Evaluation Considerations for Wireless Handsets

[KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04](#): SAR Measurement Requirements for 100 MHz to 6 GHz

[KDB865664 D02 RF Exposure Reporting v01r02](#): RF Exposure Compliance Reporting and Documentation Considerations

[KDB248227 D01 802.11 Wi-Fi SAR v02r02](#): SAR Guidance For IEEE 802.11 (Wi-Fi) Transmitters

[KDB941225 D01 3G SAR Procedures v03r01](#): 3G SAR Measurement Procedures

[KDB 941225 D06 Hotspot Mode v02r01](#): SAR Evaluation Procedures For Portable Devices With Wireless Router Capabilities

[KDB 941225 D05 SAR for LTE Devices v02r05](#): SAR Evaluation Considerations For LTE Devices

[KDB 616217 D04 SAR for laptop and tablets v01r02](#): SAR Evaluation procedures for umpc mini-tablet devices

1.2. Test Description

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power. And Test device is identical prototype.

1.3. General Remarks

| | | |
|--------------------------------|---|----------------|
| Date of receipt of test sample | : | April 22, 2019 |
| Testing commenced on | : | April 22, 2019 |
| Testing concluded on | : | May 08, 2019 |

1.4. Product Description

The **Guangzhou Lie Dun Electronics Technology CO.,Ltd.** Model: **8-DUAL** or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

| General Description | |
|---|--|
| Product Name: | RUGGEDIZED TABLET |
| Model/Type reference: | 8-DUAL |
| List Model No.: | 8-DUAL, 8-MICRO, 8-SINGLE, 8-SINGLE+, 8-SLAP |
| Model Declaration: | All these models are identical in the same PCB, layout and electrical circuit, the only difference is model name for commercial. |
| Modulation Type: | QPSK for UMTS; QPSK, 16QAM for LTE |
| Device category: | Table Device |
| Exposure category: | General population/uncontrolled environment |
| EUT Type: | Production Unit |
| Hardware Version | V12 |
| Software Version: | Windows Pro |
| Power supply: | DC 7.6V by Lithium Ion battery(7600mAh) Maximum Charging Voltage: DC 7.8V Input: 100-240V-50/60Hz Output:12V/3A |
| Hotspot: | Supported, power not reduced when Hotspot open |
| VoIP | Not Supported |
| <i>The EUT is WCDMA,LTE, Table. It is equipped with WCDMA Band II, Band V,LTE Band 2,4,5,7,12,13.25.26 WiFi2.4G and WiFi5.2G camera functions. For more information see the following datasheet</i> | |

| Technical Characteristics | |
|---------------------------|---|
| UMTS | |
| Support Networks | WCDMA RMC12.2K,HSDPA,HSUPA |
| Operation Band: | UMTS FDD Band II/V |
| Frequency Range | WCDMA Band II: 1852.4 ~ 1907.6MHz WCDMA Band V: 826.4 ~ 846.6MHz |
| Modulation Type: | QPSK for WCDMA/HSUPA/HSDPA |
| Power Class: | Class 3 |
| WCDMA Release Version: | R9 |
| DC-HSUPA Release Version: | Not Supported |
| Antenna Information: | FPC antenna 1.5dBi(Max.) for WCDMA 850 Band; 1.5dBi(Max.) for WCDMA 900 Band; 1.5 dBi(Max.) for WCDMA 1900 Band; 1.5 dBi(Max.) for WCDMA 2100 Band; |
| LTE | |
| Support Band: | LTE FDD band 2/4/5/7/12/13/25/26 |
| Frequency Range: | LTE Band 2: 1850.7 MHz ~ 1909.3 MHz; LTE Band 4: 1710.7 MHz ~ 1754.3 MHz; LTE Band 5: 824.7 MHz ~ 848.3 MHz; LTE Band 7: 2502.5MHz-2567.5MHz; LTE Band 12: 699.7MHz ~ 715.3MHz; LTE Band 13: 779.5MHz ~ 784.5MHz.; LTE Band 25: 1850.7MHz ~ 1914.3MHz.; LTE Band 26: 814.7MHz ~ 848.3MHz.. |
| Power Class: | Class 3 |
| Modulation Type: | QPSK/16QAM |
| LTE Release Version: | R9 |
| VoLTE | Not Support |
| Antenna Information: | FPC antenna for LTE as below: 1.5dBi(Max.) For LTE Band 2; 1.5dBi(Max.) For LTE Band 4; 1.5dBi(Max.) For LTE Band 5; 1.5dBi(Max.) For LTE Band 7; 1.5dBi(Max.) For LTE Band 12; 1.5dBi(Max.) For LTE Band 13; 1.5dBi(Max.) For LTE Band 25; 1.5dBi(Max.) For LTE Band 26. |
| WIFI 2.4G | |
| Supported Standards: | IEEE 802.11b/802.11g/802.11n(HT20 and HT40) |
| Operation frequency: | 2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40) |
| Type of Modulation: | CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM |
| Data Rate: | 1-11Mbps, 6-54Mbps, up to 150Mbps |
| Channel number: | IEEE 802.11b/802.11g/802.11n(HT20): 11; 802.11n(HT40): 7 |
| Channel separation: | 5MHz |
| WIFI(5G U-NI-1) | |
| Frequency Range: | 5180-5240MHz |
| Channel Number: | 4 channels for 20MHz bandwidth(5180-5240MHz) 2 channels for 40MHz bandwidth(5190~5230MHz) 1 channels for 80MHz bandwidth (5210MHz) |
| Modulation Type: | IEEE 802.11a/n: OFDM(64QAM, 16QAM, QPSK, BPSK) |
| WIFI(5G U-NI-3) | |
| Frequency Range: | 5745MHz-5825MHz |
| Channel Number: | 5 channels for 20MHz bandwidth (5745-5825MHz) 2 channels for 40MHz bandwidth (5755~5795MHz) 1 channels for 80MHz bandwidth (5775MHz) |
| Modulation Type: | IEEE 802.11a/n/ac: OFDM(64QAM, 16QAM, QPSK, BPSK) |
| Bluetooth | |

| | |
|----------------------|-------------------------------------|
| Bluetooth Version: | V4.0 |
| Modulation: | GFSK for Bluetooth V4.0(DTS) |
| Operation frequency: | 2402MHz~2480MHz |
| Channel number: | 40 |
| Channel separation: | 2MHz |
| Antenna Description: | FPC antenna: 2 dBi for BT and WIFI. |

1.5. Statement of Compliance

The maximum of results of SAR found during testing for 8-DUAL are follows:

<Highest Reported standalone SAR Summary>

| Classment Class | Frequency Band | Hotspot (Report SAR _{1-g} (W/kg)) | Body-worn (Report SAR _{1-g} (W/kg)) |
|-----------------|----------------|--|--|
| PCT | WCDMA Band V | 0.718 | 0.718 |
| | WCDMA Band II | 1.131 | 1.131 |
| | LTE Band 2 | 1.054 | 1.054 |
| | LTE Band 4 | 0.777 | 0.777 |
| | LTE Band 5 | 0.786 | 0.786 |
| | LTE Band 7 | 0.986 | 0.986 |
| | LTE Band 12 | 0.702 | 0.702 |
| | LTE Band 13 | 0.784 | 0.784 |
| | LTE Band 25 | 1.213 | 1.213 |
| | LTE Band 26 | 0.983 | 0.983 |

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.

<Highest Reported simultaneous SAR Summary>

| Exposure Position | Frequency Band | Reported SAR _{1-g} (W/kg) | Classment Class | Highest Reported Simultaneous Transmission SAR _{1-g} (W/kg) |
|-------------------|----------------|------------------------------------|-----------------|--|
| Hotspot | LTE Band 25 | 1.213 | PCT | 1.545 |
| | 2.4GWLAN | 0.332 | DTS | |

2. TEST ENVIRONMENT

2.1. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Site Description
EMC Lab. : FCC Registration Number is 254912.
Industry Canada Registration Number is 9642A-1.
EMSD Registration Number is ARCB0108.
UL Registration Number is 100571-492.
TUV SUD Registration Number is SCN1081.
TUV RH Registration Number is UA 50296516-001.
NVLAP Accreditation Code is 600167-0.
FCC Designation Number is CN5024.
CAB identifier: CN0071

2.2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

| | |
|-----------------------|--------------|
| Temperature: | 18-25 ° C |
| Humidity: | 40-65 % |
| Atmospheric pressure: | 950-1050mbar |

2.3. SAR Limits

| EXPOSURE LIMITS | FCC Limit (1g Tissue) | |
|--|--|--|
| | SAR (W/kg) | |
| | (General Population / Uncontrolled Exposure Environment) | (Occupational / Controlled Exposure Environment) |
| Spatial Average(averaged over the whole body) | 0.08 | 0.4 |
| Spatial Peak(averaged over any 1 g of tissue) | 1.6 | 8.0 |
| Spatial Peak(hands/wrists/ feet/anklesaveraged over 10 g) | 4.0 | 20.0 |

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

2.4. Equipments Used during the Test

| Test Equipment | Manufacturer | Type/Model | Serial Number | Calibration | |
|-------------------------------------|--------------|-----------------|---------------------------|------------------|-----------------|
| | | | | Calibration Date | Calibration Due |
| PC | Lenovo | G5005 | MY42081102 | N/A | N/A |
| SAR Measurement system | SATIMO | 4014_01 | SAR_4014_01 | N/A | N/A |
| Signal Generator | Agilent | E4438C | MY42081396 | 06/16/2018 | 06/15/2019 |
| Multimeter | Keithley | MultiMeter 2000 | 4059164 | 06/16/2018 | 06/15/2019 |
| S-parameter Network Analyzer | Agilent | 8753ES | US38432944 | 11/15/2018 | 11/14/2019 |
| Wideband Radia Communication Tester | R&S | CMW500 | 1201.0002K50 | 11/15/2018 | 11/14/2019 |
| E-Field PROBE | SATIMO | SSE2 | SN 31/17 EPGO324 | 10/08/2018 | 10/07/2019 |
| DIPOLE 750 | SATIMO | SID 750 | SN 30/14 DIP 0G750-302 | 10/01/2018 | 09/30/2019 |
| DIPOLE 835 | SATIMO | SID 835 | SN 07/14 DIP 0G835-303 | 10/01/2018 | 09/30/2021 |
| DIPOLE 1800 | SATIMO | SID 1800 | SN 07/14 DIP 1G800-301 | 10/01/2018 | 09/30/2021 |
| DIPOLE 1900 | SATIMO | SID 1900 | SN 38/18 DIP 1G900-466 | 09/24/2018 | 09/23/2021 |
| DIPOLE 2600 | SATIMO | SID 2600 | SN 38/18 DIP 2G600-468 | 09/24/2018 | 09/23/2021 |
| Power meter | Agilent | E4419B | MY45104493 | 06/16/2018 | 06/15/2019 |
| Power meter | Agilent | E4418B | GB4331256 | 06/16/2018 | 06/15/2019 |
| Power sensor | Agilent | E9301H | MY41497725 | 06/16/2018 | 06/15/2019 |
| Power sensor | Agilent | E9301H | MY41495234 | 06/16/2018 | 06/15/2019 |
| Directional Coupler | MCLI/USA | 4426-20 | 0D2L51502 | 06/16/2018 | 06/15/2019 |
| EUT POSITIONING DEVICE | SATIMO | MSH98 | SN 40/14 MSH98 | N/A | N/A |
| SAM PHANTOM | SATIMO | SAM117 | SN 40/14 SAM117 | N/A | N/A |
| COMOSAR OPEN Coaxial Probe | SATIMO | OCPG 68 | SN 40/14 OCPG68 | N/A | N/A |
| Liquid measurement Kit | HP | 85033D | 3423A03482 | N/A | N/A |

Note:

- 1) Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three year extended calibration interval. Each measured dipole is expected to evaluate with following criteria at least on annual interval.
 - a) There is no physical damage on the dipole;
 - b) System check with specific dipole is within 10% of calibrated values;
 - c) The most recent return-loss results, measured at least annually, deviates by no more than 20% from the previous measurement;
 - d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.
- 2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

3.SAR MEASUREMENTS SYSTEM CONFIGURATION

3.1. SAR Measurement Set-up

The OPENSAR system for performing compliance tests consist of the following items:

A standard high precision 6-axis robot (KUKA) with controller and software.

KUKA Control Panel (KCP)

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with a Video Positioning System(VPS).

The stress sensor is composed with mechanical and electronic when the electronic part detects a change on the electro-mechanical switch,It sends an "Emergency signal" to the robot controller that to stop robot's moves

A computer operating Windows XP.

OPENSAR software


Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.

The SAM phantom enabling testing left-hand right-hand and body usage.

The Position device for handheld EUT

Tissue simulating liquid mixed according to the given recipes .

System validation dipoles to validate the proper functioning of the system.

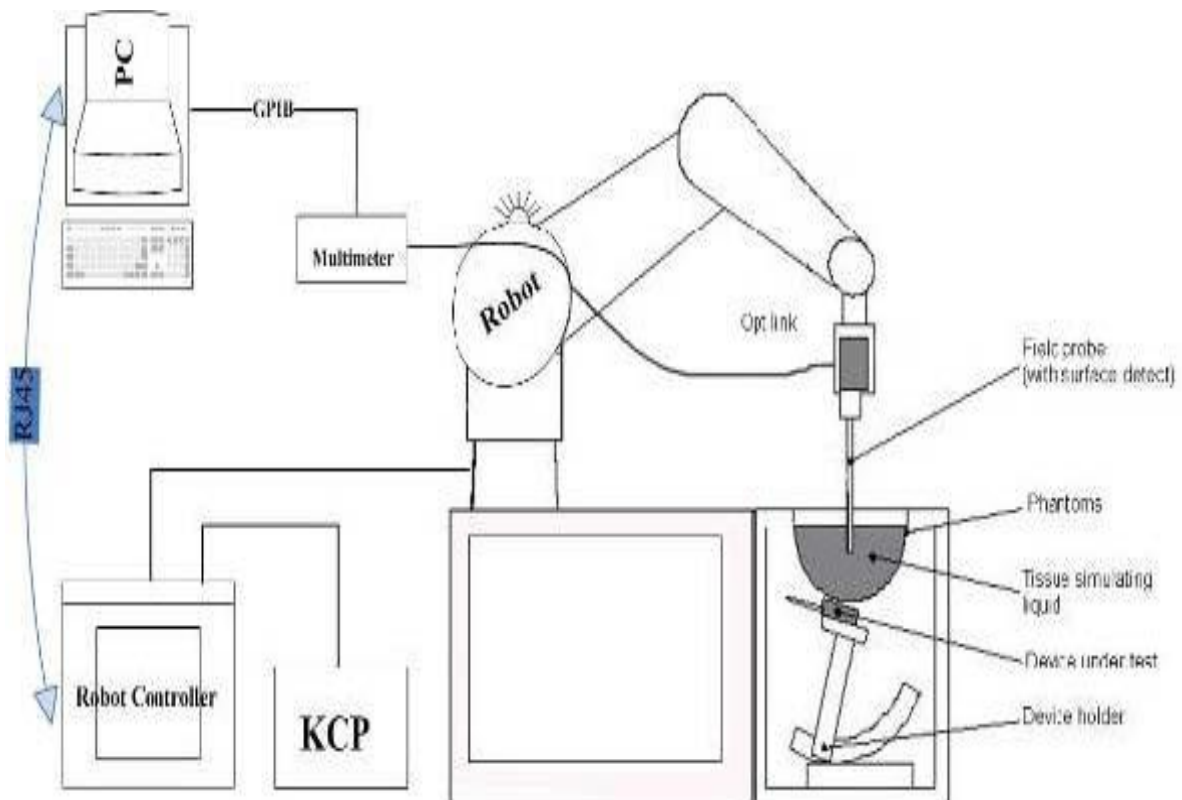

3.2. OPENSAR E-field Probe System

The SAR measurements were conducted with the dosimetric probe EPGO324 (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

Probe Specification

Construction Symmetrical design with triangular core
 Interleaved sensors
 Built-in shielding against static charges
 PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Calibration ISO/IEC 17025 calibration service available.


| | |
|---------------|--|
| Frequency | 450MHz to 6 GHz; Linearity:0.25dB(450MHz to 6GHz) |
| Directivity | 0.25 dB in HSL (rotation around probe axis) 0.5 dB in tissue material (rotation normal to probe axis) |
| Dynamic Range | 0.01W/kg to > 100 W/kg; Linearity: 0.25 dB |
| Dimensions | Overall length: 330 mm (Tip: 16mm) Tip diameter: 5 mm (Body: 8 mm) Distance from probe tip to sensor centers: 2.5 mm |
| Application | General dosimetry up to 6 GHz Dosimetry in strong gradient fields Compliance tests of Mobile Phones |



Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.


The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

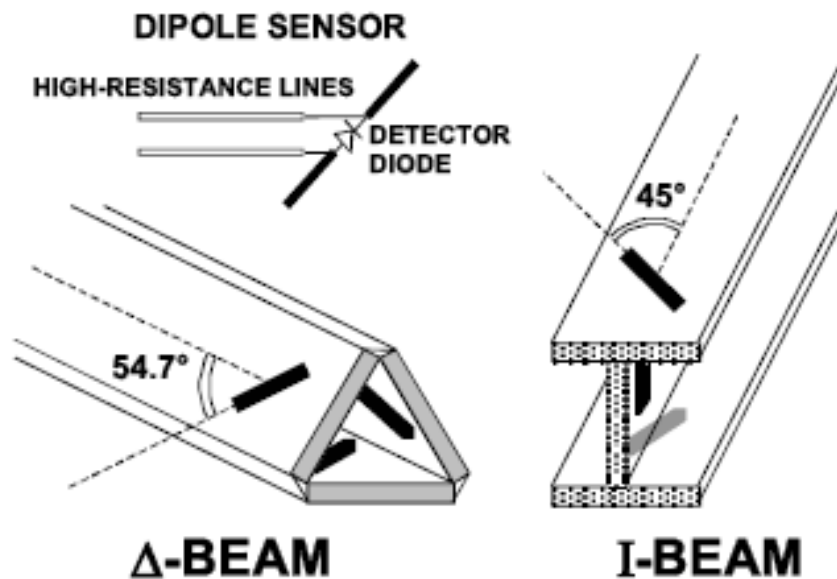

3.3. Phantoms

The SAM Phantom SAM117 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is in compliance with the specification set in IEEE 1528-2013 and CENELEC EN62209-1, EN62209-2:2010. The phantom enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

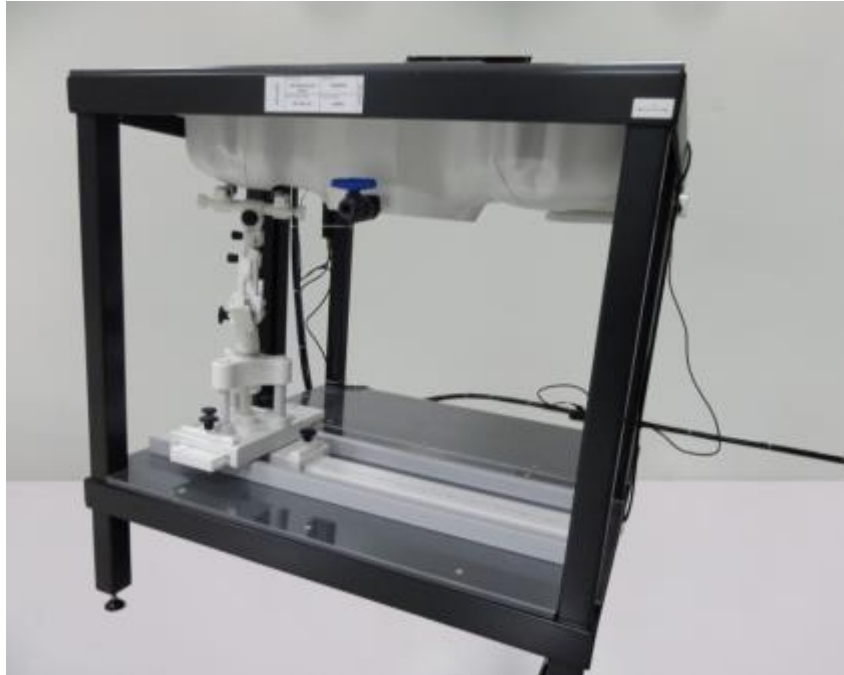

SAM Twin Phantom

3.4. Device Holder

In combination with the Generic Twin Phantom SAM117, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Device holder supplied by SATIMO

3.5. Scanning Procedure

The procedure for assessing the peak spatial-average SAR value consists of the following steps

Power Reference Measurement

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged. After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

| | ≤ 3 GHz | > 3 GHz |
|--|---|---|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | 5 mm ± 1 mm | $\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm ± 0.5 mm |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location | 30° ± 1° | 20° ± 1° |
| Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area} | ≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm | 3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm |
| | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device. | |

Zoom Scan

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

| Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom} | | ≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm* | 3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm* | |
|---|------------------------------------|--|--|---|
| Maximum zoom scan spatial resolution, normal to phantom surface | uniform grid: $\Delta z_{Zoom}(n)$ | ≤ 5 mm | 3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm | |
| | graded grid | $\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface | ≤ 4 mm | 3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm |
| | | $\Delta z_{Zoom}(n>1)$: between subsequent points | ≤ 1.5 · $\Delta z_{Zoom}(n-1)$ mm | |
| Minimum zoom scan volume | x, y, z | ≥ 30 mm | 3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm | |
| Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details. | | | | |
| * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. | | | | |

Power Drift measurement

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have OPENSAR software stop the measurements if this limit is exceeded.

3.6. Data Storage and Evaluation

Data Storage

The OPENSAR software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The OPENSAR software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

| | | |
|--------------------|---------------------------|----------------------|
| Probe parameters: | - Sensitivity | Normi, ai0, ai1, ai2 |
| | - Conversion factor | ConvFi |
| | - Diode compression point | Dcpi |
| Device parameters: | - Frequency | f |
| | - Crest factor | cf |
| Media parameters: | - Conductivity | σ |
| | - Density | ρ |

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the OPENSAR components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

With V_i = compensated signal of channel i ($i = x, y, z$)
 U_i = input signal of channel i ($i = x, y, z$)
 cf = crest factor of exciting field
 dcp_i = diode compression point

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes} : E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$H - \text{fieldprobes} : H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

With V_i = compensated signal of channel i ($i = x, y, z$)
 $Norm_i$ = sensor sensitivity of channel i ($i = x, y, z$)
 [mV/(V/m)²] for E-field Probes
 $ConvF$ = sensitivity enhancement in solution

- aij = sensor sensitivity factors for H-field probes
- f = carrier frequency [GHz]
- Ei = electric field strength of channel i in V/m
- Hi = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

- with SAR = local specific absorption rate in mW/g
- Etot = total field strength in V/m
- σ = conductivity in [mho/m] or [Siemens/m]
- ρ = equivalent tissue density in g/cm3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

3.7. Position of the wireless device in relation to the phantom

General considerations

This standard specifies two handset test positions against the head phantom – the “cheek” position and the “tilt” position.


The power flow density is calculated assuming the excitation field as a free space field

$$P_{(pwe)} = \frac{E_{tot}^2}{3770} \text{ or } P_{(pwe)} = H_{tot}^2 \cdot 37.7$$

Where P_{pwe}=Equivalent power density of a plane wave in mW/cm2

E_{tot}=total electric field strength in V/m

H_{tot}=total magnetic field strength in A/m

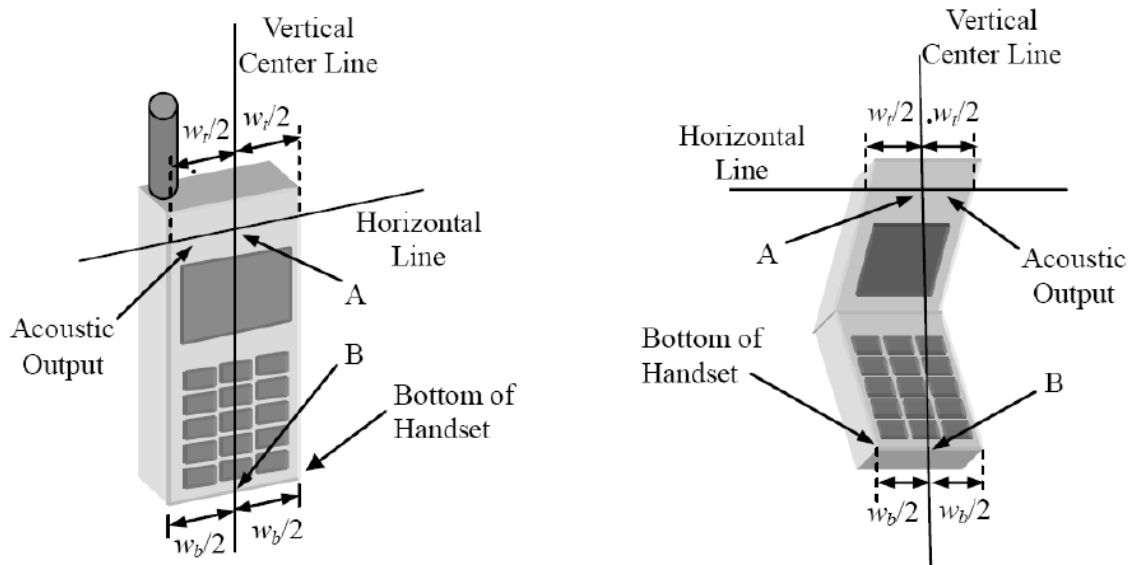


W_r Width of the handset at the level of the acoustic

W_b Width of the bottom of the handset


A Midpoint of the width w_r of the handset at the level of the acoustic output

B Midpoint of the width w_b of the bottom of the handset

Picture 1-a Typical “fixed” case handset Picture 1-b Typical “clam-shell” case handset

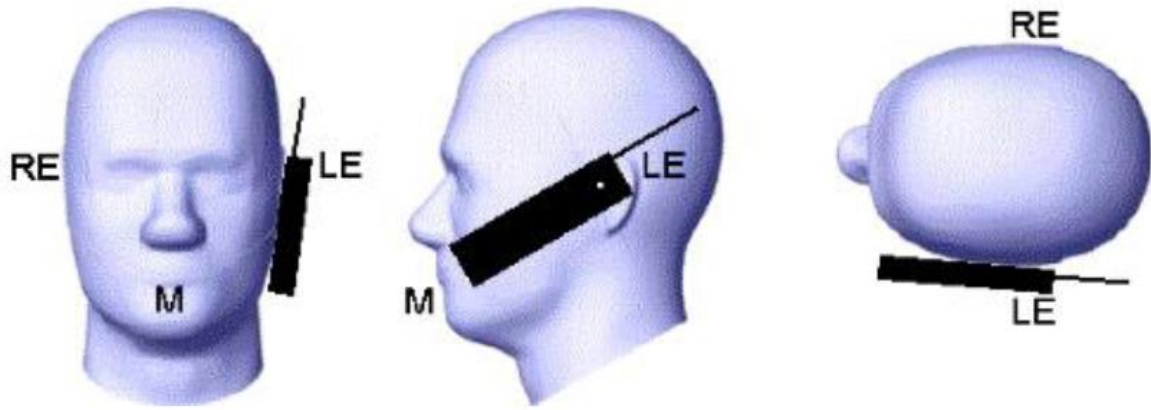

Picture 2 Cheek position of the wireless device on the left side of SAM

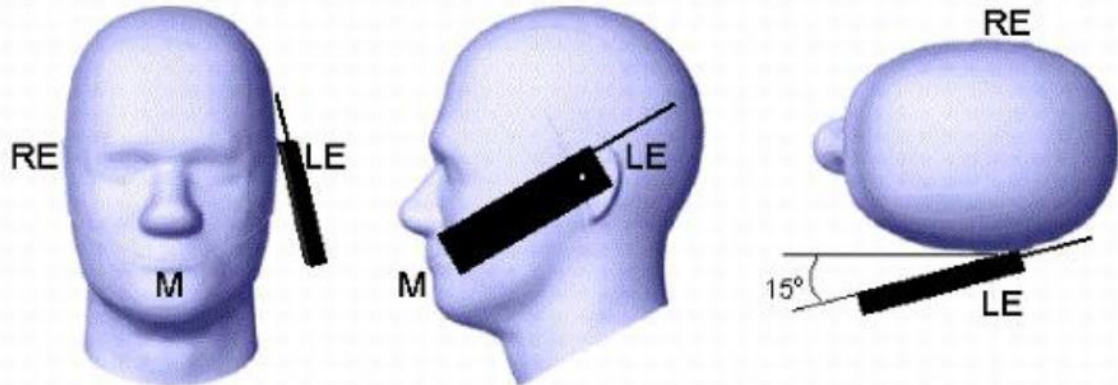

Picture 3 Tilt position of the wireless device on the left side of SAM

For body SAR test we applied to FCC KDB941225, KDB447498, KDB248227, KDB648654;

3.8. Tissue Dielectric Parameters for Head and Body Phantoms

The liquid is consisted of water,salt,Glycol,Sugar,Preventol and Cellulose.The liquid has previously been proven to be suited for worst-case.It's satisfying the latest tissue dielectric parameters requirements proposed by the KDB865664.

The composition of the tissue simulating liquid

| Ingredient (% Weight) | 750MHz | | 835MHz | | 1800 MHz | | 1900 MHz | | 2450MHz | | 2600MHz | | 5000MHz | |
|-----------------------------|--------|------|--------|------|----------|-------|----------|-------|---------|-------|---------|-------|---------|------|
| | Head | Body | Head | Body | Head | Body | Head | Body | Head | Body | Head | Body | Head | Body |
| Water | 39.28 | 51.3 | 41.45 | 52.5 | 54.5 | 40.2 | 54.9 | 40.4 | 62.7 | 73.2 | 60.3 | 71.4 | 65.5 | 78.6 |
| Preventol | 0.10 | 0.10 | 0.10 | 0.10 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| HEC | 1.00 | 1.00 | 1.00 | 1.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| DGBE | 0.00 | 0.00 | 0.00 | 0.00 | 45.33 | 59.31 | 44.92 | 59.10 | 36.80 | 26.70 | 39.10 | 28.40 | 0.00 | 0.00 |
| Triton X-100 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 17.2 | 10.7 |

| Target Frequency (MHz) | Head | | Body | |
|---------------------------|--------------|----------------|--------------|----------------|
| | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) |
| 150 | 52.3 | 0.76 | 61.9 | 0.80 |
| 300 | 45.3 | 0.87 | 58.2 | 0.92 |
| 450 | 43.5 | 0.87 | 56.7 | 0.94 |
| 835 | 41.5 | 0.90 | 55.2 | 0.97 |
| 900 | 41.5 | 0.97 | 55.0 | 1.05 |
| 915 | 41.5 | 0.98 | 55.0 | 1.06 |
| 1450 | 40.5 | 1.20 | 54.0 | 1.30 |
| 1610 | 40.3 | 1.29 | 53.8 | 1.40 |
| 1800-2000 | 40.0 | 1.40 | 53.3 | 1.52 |
| 2450 | 39.2 | 1.80 | 52.7 | 1.95 |
| 3000 | 38.5 | 2.40 | 52.0 | 2.73 |
| 5800 | 35.3 | 5.27 | 48.2 | 6.00 |

3.9. Tissue equivalent liquid properties


Dielectric Performance of Head and Body Tissue Simulating Liquid

| Test Engineer: Vera Deng | | | | | | | | | |
|--------------------------|--------------------------|---------------|--------------|-----------------|--------|--------------|--------|--------------|------------|
| Tissue Type | Measured Frequency (MHz) | Target Tissue | | Measured Tissue | | | | Liquid Temp. | Test Data |
| | | σ | ϵ_r | σ | Dev. | ϵ_r | Dev. | | |
| 750B | 750 | 0.99 | 56.57 | 0.97 | -2.02% | 57.24 | 1.18% | 20.4 | 04/22/2019 |
| 835B | 835 | 0.97 | 55.20 | 0.99 | 2.06% | 53.54 | -3.01% | 22.7 | 04/23/2019 |
| 1800B | 1800 | 1.52 | 53.30 | 1.50 | -1.32% | 52.11 | -2.23% | 21.6 | 04/25/2019 |
| 1900B | 1900 | 1.52 | 53.30 | 1.55 | 1.97% | 52.97 | -0.62% | 22.9 | 04/26/2019 |
| 2600B | 2600 | 2.16 | 52.50 | 2.20 | 1.85% | 50.85 | -3.14% | 21.5 | 05/08/2019 |

3.10. System Check

The purpose of the system check is to verify that the system operates within its specifications at the device test frequency. The system check is simple check of repeatability to make sure that the system works correctly at the time of the compliance test;

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

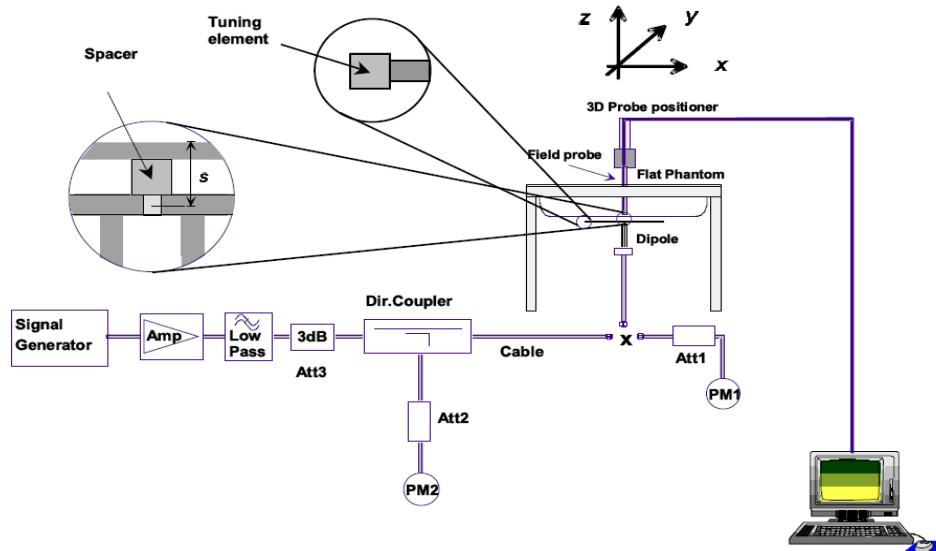

The output power on dipole port must be calibrated to 20 dBm (100mW) before dipole is connected.



Photo of Dipole Setup

Justification for Extended SAR Dipole Calibrations

Referring to KDB 865664D01V01r04, if dipoles are verified in return loss (<-20dB, within 20% of prior calibration), and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended. While calibration intervals not exceed 3 years.

SID750 SN 07/14 DIP 0G750-302 Extend Dipole Calibrations

| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) |
|---------------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|
| 2018-10-01 | -34.80 | | 50.7 | | 1.6 | |

SID835 SN 07/14 DIP 0G835-303 Extend Dipole Calibrations

| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) |
|---------------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|
| 2018-10-01 | -24.49 | | 54.9 | | 2.8 | |

SID1800 SN 30/14 DIP 1G800-301 Extend Dipole Calibrations

| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) |
|---------------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|
| 2018-10-01 | -20.26 | | 43.1 | | 6.9 | |

SID1900 SN 38/18 DIP 1G900-466 Extend Dipole Calibrations

| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) |
|---------------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|
| 2018-09-24 | -20.28 | | 50.5 | | 4.7 | |

SID2450 SN 07/14 DIP 2G450-306 Extend Dipole Calibrations

| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) |
|---------------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|
| 2018-10-01 | -25.59 | | 44.7 | | -1.1 | |

SID2600 SN 38/18 DIP 2G600-468 Extend Dipole Calibrations

| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) |
|---------------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|
| 2018-09-24 | -29.17 | | 49.2 | | 3.4 | |

| Mixture Type | Frequency (MHz) | Power | SAR _{1g} (W/kg) | SAR _{10g} (W/kg) | Drift (%) | 1W Target | | Difference percentage | | Liquid Temp | Date |
|--------------|-----------------|---------------------|--------------------------|---------------------------|-----------|--------------------------|---------------------------|-----------------------|--------|-------------|------------|
| | | | | | | SAR _{1g} (W/kg) | SAR _{10g} (W/kg) | 1g | 10g | | |
| Body | 750 | 100 mW | 0.870 | 0.562 | -1.44 | 8.77 | 5.78 | -0.80% | -2.77% | 20.4 | 04/22/2019 |
| | | Normalize to 1 Watt | 8.70 | 5.62 | | | | | | | |
| Body | 835 | 100 mW | 0.952 | 0.649 | -3.11 | 9.90 | 6.39 | -3.84% | 1.56% | 22.7 | 04/23/2019 |
| | | Normalize to 1 Watt | 9.52 | 6.49 | | | | | | | |
| Body | 1800 | 100 mW | 3.853 | 2.055 | 1.62 | 39.03 | 20.65 | -1.28% | -0.48% | 21.6 | 04/25/2019 |
| | | Normalize to 1 Watt | 38.53 | 20.55 | | | | | | | |
| Body | 1900 | 100 mW | 4.267 | 2.129 | -0.01 | 43.33 | 21.59 | 4.30% | -0.28% | 22.9 | 04/26/2019 |
| | | Normalize to 1 Watt | 42.67 | 21.34 | | | | | | | |
| Body | 2600 | 100 mW | 5.515 | 2.426 | -1.44 | 54.16 | 24.13 | -0.27% | -1.38% | 21.5 | 05/08/2019 |
| | | Normalize to 1 Watt | 55.15 | 24.26 | | | | | | | |

3.11. SAR measurement procedure

The measurement procedures are as follows:

3.11.1 Conducted power measurement

- a. For WWAN power measurement, use base station simulator connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- b. Read the WWAN RF power level from the base station simulator.
- c. For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously Transmission, at maximum RF power in each supported wireless interface and frequency band.
- d. Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power.

3.11.2 GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a System Simulator (SS) by air link. Using CMU200 the power level is set to "5" for GSM 850, set to "0" for GSM 1900. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 5. the EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 5.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. GSM voice and GPRS data use GMSK, which is a constant amplitude modulation with minimal peak to average power difference within the time-slot burst. For EDGE, GMSK is used for MCS 1 – MCS 4 and 8-PSK is used for MCS 5 – MCS 9; where 8-PSK has an inherently higher peak-to-average power ratio. The GMSK and 8-PSK EDGE configurations are considered separately for SAR compliance. The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance. The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode.

3.11.3 UMTS Test Configuration

3G SAR Test Reduction Procedure

In the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as "otherwise" in the applicable procedures; SAR measurement is required for the secondary mode.

Output power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1's" for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

1) Body-Worn Accessory SAR

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

2) Handsets with Release 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the "Release 5 HSDPA Data Devices" section of this document, for the highest reported SAR body-worn accessory exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set

Table 2: Subtests for UMTS Release 5 HSDPA

| Sub-set | β_c | β_d | β_d (SF) | β_c/β_d | β_{hs} (note 1, note 2) | CM(dB) (note 3) | MPR(dB) |
|---------|-------------------|-------------------|-------------------|-------------------|----------------------------------|--------------------|---------|
| 1 | 2/15 | 15/15 | 64 | 2/15 | 4/15 | 0.0 | 0.0 |
| 2 | 12/15 (note 4) | 15/15 (note 4) | 64 | 12/15 (note 4) | 24/15 | 1.0 | 0.0 |
| 3 | 15/15 | 8/15 | 64 | 15/8 | 30/15 | 1.5 | 0.5 |
| 4 | 15/15 | 4/15 | 64 | 15/4 | 30/15 | 1.5 | 0.5 |

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.
Note3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1,TF1) to $\beta_c=11/15$ and $\beta_d=15/15$.

HSUPA Test Configuration

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the "Release 6 HSPA Data Devices" section of this document, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn accessory measurements is tested for next to the ear head exposure.

Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the β values indicated in Table 2 and other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of this document

Table 3: Sub-Test 5 Setup for Release 6 HSUPA

| Sub-set | β_c | β_d | β_d (SF) | β_c/β_d | $\beta_{hs}^{(1)}$ | β_{ec} | β_{ed} | β_{ed} (SF) | β_{ed} (codes) | CM ⁽²⁾ (dB) | MPR (dB) | AG ⁽⁴⁾ Index | E- TFCI |
|---------|----------------------|----------------------|-------------------|----------------------|--------------------|--------------|--|----------------------|-------------------------|---------------------------|-------------|----------------------------|------------|
| 1 | 11/15 ⁽³⁾ | 15/15 ⁽³⁾ | 64 | 11/15 ⁽³⁾ | 22/15 | 209/225 | 1039/225 | 4 | 1 | 1.0 | 0.0 | 20 | 75 |
| 2 | 6/15 | 15/15 | 64 | 6/15 | 12/15 | 12/15 | 94/75 | 4 | 1 | 3.0 | 2.0 | 12 | 67 |
| 3 | 15/15 | 9/15 | 64 | 15/9 | 30/15 | 30/15 | $\beta_{ed1} 47/15$ $\beta_{ed2} 47/15$ | 4 | 2 | 2.0 | 1.0 | 15 | 92 |
| 4 | 2/15 | 15/15 | 64 | 2/15 | 4/15 | 2/15 | 56/75 | 4 | 1 | 3.0 | 2.0 | 17 | 71 |
| 5 | 15/15 ⁽⁴⁾ | 15/15 ⁽⁴⁾ | 64 | 15/15 ⁽⁴⁾ | 30/15 | 24/15 | 134/15 | 4 | 1 | 1.0 | 0.0 | 21 | 81 |

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6: β_d can not be set directly; it is set by Absolute Grant Value.

3.11.4 LTE Test Configuration

QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.8 When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

QPSK with 50% RB allocation

The procedures required for 1 RB allocation in section 4.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.9

QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in sections 4.2.1 and 4.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

3.11.5 WIFI Test Configuration

The SAR measurement and test reduction procedures are structured according to either the DSSS or OFDM transmission mode configurations used in each standalone frequency band and aggregated band. For devices that operate in exposure configurations that require multiple test positions, additional SAR test reduction may be applied. The maximum output power specified for production units, including tune-up tolerance, are used to determine initial SAR test requirements for the 802.11 transmission modes in a frequency band. SAR is measured using the highest measured maximum output power channel for the initial test configuration. SAR measurement and test reduction for the remaining 802.11 modes and test channels are determined according to measured or specified maximum output power and reported SAR of the initial measurements. The general test reduction and SAR measurement approaches are summarized in the following:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.
2. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, an "initial test configuration" is first determined for each standalone and aggregated frequency band according to the maximum output power and tune-up tolerance specified for production units.
 - a. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.
 - b. SAR is measured for OFDM configurations using the initial test configuration procedures. Additional frequency band specific SAR test reduction may be considered for individual frequency bands
 - c. Depending on the reported SAR of the highest maximum output power channel tested in the initial test configuration, SAR test reduction may apply to subsequent highest output channels in the initial test configuration to reduce the number of SAR measurements.
3. The Initial test configuration does not apply to DSSS. The 2.4 GHz band SAR test requirements and 802.11b DSSS procedures are used to establish the transmission configurations required for SAR measurement.
4. An "initial test position" is applied to further reduce the number of SAR tests for devices operating in next to the ear, UMPC mini-tablet or hotspot mode exposure configurations that require multiple test positions .

- a. SAR is measured for 802.11b according to the 2.4 GHz DSSS procedure using the exposure condition established by the initial test position.
- b. SAR is measured for 2.4 GHz and 5 GHz OFDM configurations using the initial test configuration. 802.11b/g/n operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g/n modes are tested on the maximum average output channel.
5. The Initial test position does not apply to devices that require a fixed exposure test position. SAR is measured in a fixed exposure test position for these devices in 802.11b according to the 2.4 GHz DSSS procedure or in 2.4 GHz and 5 GHz OFDM configurations using the initial test configuration procedures.
6. The "subsequent test configuration" procedures are applied to determine if additional SAR measurements are required for the remaining OFDM transmission modes that have not been tested in the initial test configuration. SAR test exclusion is determined according to reported SAR in the initial test configuration and maximum output power specified or measured for these other OFDM configurations.

2.4 GHz and 5GHz SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in section 5.2.2.

1. 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- a. When the reported SAR of the highest measured maximum output power channel (section 3.1) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- b. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

1. 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3). SAR is not required for the following 2.4 GHz OFDM conditions.

- a. When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration
- b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

2. SAR Test Requirements for OFDM Configurations

When SAR measurement is required for 802.11 a/g/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements.²⁰ In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

3. OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures (section 4). When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- a. The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- b. If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- c. If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- d. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.

- a. Channels with measured maximum output power within $\frac{1}{4}$ dB of each other are considered to have the same maximum output.
- b. When there are multiple test channels with the same measured maximum output power, the channel closest to mid-band frequency is selected for SAR measurement.
- c. When there are multiple test channels with the same measured maximum output power and equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2). SAR test reduction of subsequent highest output test channels is based on the reported SAR of the initial test configuration. For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode.²³ For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

4. Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, the procedures in section 5.3.2 are applied to determine the test configuration. Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- a. When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
- b. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
- c. The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
 - 1). SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
 - 2). SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested.
 - a) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
 - d. SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:

- 1) replace “subsequent test configuration” with “next subsequent test configuration” (i.e., subsequent next highest specified maximum output power configuration)
- 2) replace “initial test configuration” with “all tested higher output power configurations.

3.12. Power Reduction

The product without any power reduction.

3.13. Power Drift

To control the output power stability during the SAR test, SAR system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. This ensures that the power drift during one measurement is within 5%.

4. TEST CONDITIONS AND RESULTS

4.1. Conducted Power Results

According KDB 447498 D01 General RF Exposure Guidance v06 Section 4.1 2) states that “Unless it is specified differently in the published RF exposure KDB procedures, these requirements also apply to test reduction and test exclusion considerations. Time-averaged maximum conducted output power applies to SAR and, as required by § 2.1091(c), time-averaged ERP applies to MPE. When an antenna port is not available on the device to support conducted power measurement, such as FRS and certain Part 15 transmitters with built-in integral antennas, the maximum output power allowed for production units should be used to determine RF exposure test exclusion and compliance.”

<UMTS Conducted Power>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

| Sub-test | β_c | β_d | β_d (SF) | β_c/β_d | β_{HS} (Note 1, Note 2) | CM (dB) (Note 3) | MPR (dB) (Note 3) |
|----------|-------------------|-------------------|-------------------|-------------------|-------------------------------------|---------------------|----------------------|
| 1 | 2/15 | 15/15 | 64 | 2/15 | 4/15 | 0.0 | 0.0 |
| 2 | 12/15 (Note 4) | 15/15 (Note 4) | 64 | 12/15 (Note 4) | 24/15 | 1.0 | 0.0 |
| 3 | 15/15 | 8/15 | 64 | 15/8 | 30/15 | 1.5 | 0.5 |
| 4 | 15/15 | 4/15 | 64 | 15/4 | 30/15 | 1.5 | 0.5 |

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station R&S CMU200 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK

- ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

| Sub-test | β_c | β_d | β_d (SF) | β_c/β_d | β_{HS} (Note 1) | β_{ec} | β_{ed} (Note 5) (Note 6) | β_{ed} (SF) | β_{ed} (Codes) | CM (dB) (Note 2) | MPR (dB) (Note 2) | AG Index (Note 6) | E- TFCI |
|----------|-------------------|-------------------|-------------------|-------------------|--------------------------|--------------|--|----------------------|-------------------------|------------------------|-------------------------|-------------------------|------------|
| 1 | 11/15 (Note 3) | 15/15 (Note 3) | 64 | 11/15 (Note 3) | 22/15 | 209/25 | 1309/225 | 4 | 1 | 1.0 | 0.0 | 20 | 75 |
| 2 | 6/15 | 15/15 | 64 | 6/15 | 12/15 | 12/15 | 94/75 | 4 | 1 | 3.0 | 2.0 | 12 | 67 |
| 3 | 15/15 | 9/15 | 64 | 15/9 | 30/15 | 30/15 | β_{ed1} : 47/15 β_{ed2} : 47/15 | 4 4 | 2 | 2.0 | 1.0 | 15 | 92 |
| 4 | 2/15 | 15/15 | 64 | 2/15 | 4/15 | 2/15 | 56/75 | 4 | 1 | 3.0 | 2.0 | 17 | 71 |
| 5 | 15/15 (Note 4) | 15/15 (Note 4) | 64 | 15/15 (Note 4) | 30/15 | 24/15 | 134/15 | 4 | 1 | 1.0 | 0.0 | 21 | 81 |

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

General Note

1. Per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2kbps can be excluded.
2. By design, AMR and HSDPA/HSUPA RF power will not be larger than RMC 12.2kbps, detailed information is included in Tune-up Procure exhibit.
3. It is expected by the manufacturer that MPR for some HSDPA/HSUPA subtests may differ from the specification of 3GPP, according to the chipset implementation in this model. The implementation and expected deviation are detailed in tune-up procedure exhibit.

Conducted Power Measurement Results(WCDMA Band II/V)

| Item | band | WCDMA Band II result (dBm) | | | WCDMA Band V result (dBm) | | |
|-------|-----------|----------------------------|---------------|-----------------|---------------------------|----------------|----------------|
| | | Channel/Frequency(MHz) | | | Channel/Frequency(MHz) | | |
| | sub-test | 9262/ 1852.4 | 9400/ 1880 | 9538/ 1907.6 | 4132/ 826.4 | 4183/ 836.6 | 4233/ 846.6 |
| RMC | 12.2kbps | 22.89 | 22.76 | 22.64 | 23.53 | 23.21 | 23.44 |
| | 64kbps | 22.85 | 22.65 | 22.44 | 23.48 | 23.21 | 23.21 |
| | 144kbps | 22.77 | 22.61 | 22.17 | 23.29 | 23.05 | 23.17 |
| | 384kbps | 22.70 | 22.47 | 21.93 | 22.94 | 22.79 | 23.10 |
| HSDPA | Subtest 1 | 21.85 | 21.96 | 21.97 | 22.16 | 22.00 | 21.87 |
| | Subtest 2 | 21.24 | 21.17 | 21.25 | 21.23 | 21.16 | 21.09 |
| | Subtest 3 | 20.69 | 20.77 | 20.85 | 20.56 | 20.65 | 20.72 |
| | Subtest 4 | 20.16 | 20.33 | 20.41 | 20.15 | 20.23 | 20.08 |
| HSUPA | Subtest 1 | 21.31 | 21.40 | 21.46 | 22.55 | 22.45 | 22.42 |
| | Subtest 2 | 21.05 | 21.16 | 21.08 | 21.84 | 21.76 | 21.87 |
| | Subtest 3 | 20.96 | 20.84 | 20.72 | 21.06 | 21.11 | 21.29 |
| | Subtest 4 | 20.16 | 20.08 | 20.15 | 20.85 | 20.95 | 20.87 |
| | Subtest 5 | 19.98 | 19.74 | 19.84 | 20.24 | 20.14 | 20.54 |

Note: When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/2$ dB higher than the primary mode (RMC12.2kbps) or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

LTE Band2

| BW (MHz) | Frequency (MHz) | RB Configuration | | Average Power [dBm] | |
|----------|-----------------|------------------|--------|---------------------|-------|
| | | Size | Offset | QPSK | 16QAM |
| 1.4 | 1850.7 | 1 | 0 | 23.33 | 21.99 |
| | | 1 | 3 | 23.29 | 22.22 |
| | | 1 | 5 | 23.16 | 22.02 |
| | | 3 | 0 | 23.08 | 22.10 |
| | | 3 | 2 | 23.19 | 22.17 |
| | | 3 | 3 | 23.11 | 22.03 |
| | | 6 | 0 | 22.03 | 21.15 |
| | 1880.0 | 1 | 0 | 23.23 | 22.39 |
| | | 1 | 3 | 23.16 | 22.36 |
| | | 1 | 5 | 23.20 | 22.34 |
| | | 3 | 0 | 23.12 | 22.08 |
| | | 3 | 2 | 23.14 | 22.09 |
| | | 3 | 3 | 23.11 | 22.08 |
| | | 6 | 0 | 22.11 | 21.19 |
| | 1909.3 | 1 | 0 | 23.02 | 22.34 |
| | | 1 | 3 | 23.13 | 22.41 |
| | | 1 | 5 | 23.14 | 22.41 |
| | | 3 | 0 | 23.09 | 21.98 |
| | | 3 | 2 | 23.10 | 21.96 |
| | | 3 | 3 | 23.12 | 22.06 |
| | | 6 | 0 | 21.98 | 21.05 |
| 3 | 1851.5 | 1 | 0 | 23.28 | 22.44 |
| | | 1 | 7 | 23.32 | 22.34 |
| | | 1 | 14 | 23.21 | 22.37 |
| | | 8 | 0 | 22.09 | 21.31 |
| | | 8 | 4 | 22.19 | 21.35 |
| | | 8 | 7 | 22.20 | 21.34 |
| | | 15 | 0 | 22.18 | 21.15 |
| | 1880.0 | 1 | 0 | 23.27 | 22.43 |
| | | 1 | 7 | 23.19 | 22.62 |
| | | 1 | 14 | 23.28 | 22.37 |
| | | 8 | 0 | 22.17 | 21.29 |
| | | 8 | 4 | 22.19 | 21.33 |
| | | 8 | 7 | 22.12 | 21.28 |
| | | 15 | 0 | 22.17 | 21.22 |
| | 1908.5 | 1 | 0 | 23.11 | 22.26 |
| | | 1 | 7 | 23.64 | 22.31 |
| | | 1 | 14 | 23.18 | 22.51 |
| | | 8 | 0 | 22.07 | 21.12 |
| | | 8 | 4 | 22.12 | 21.15 |
| | | 8 | 7 | 22.07 | 21.20 |
| | | 15 | 0 | 22.12 | 21.15 |
| 5 | 1852.5 | 1 | 0 | 23.27 | 22.35 |
| | | 1 | 12 | 23.14 | 22.26 |
| | | 1 | 24 | 23.19 | 22.26 |
| | | 12 | 0 | 22.17 | 21.22 |
| | | 12 | 6 | 22.19 | 21.22 |
| | | 12 | 13 | 22.25 | 21.35 |
| | | 25 | 0 | 22.19 | 21.21 |
| | 1880.0 | 1 | 0 | 23.37 | 22.29 |
| | | 1 | 12 | 23.27 | 22.53 |
| | | 1 | 24 | 23.41 | 22.41 |
| | | 12 | 0 | 22.22 | 21.34 |
| | | 12 | 6 | 22.17 | 21.36 |
| | | 12 | 13 | 22.16 | 21.29 |
| | | 25 | 0 | 22.13 | 21.12 |
| | 1907.5 | 1 | 0 | 23.28 | 22.54 |

| | | | | | |
|----|--------|-----|----|-------|-------|
| | | 1 | 12 | 23.19 | 22.42 |
| | | 1 | 24 | 23.20 | 22.44 |
| | | 12 | 0 | 22.09 | 20.98 |
| | | 12 | 6 | 22.10 | 21.00 |
| | | 12 | 13 | 22.09 | 20.98 |
| | | 25 | 0 | 22.01 | 21.04 |
| 10 | 1855.0 | 1 | 0 | 23.26 | 22.42 |
| | | 1 | 24 | 23.39 | 22.40 |
| | | 1 | 49 | 23.26 | 22.46 |
| | | 25 | 0 | 22.12 | 21.18 |
| | | 25 | 12 | 22.22 | 21.29 |
| | | 25 | 25 | 22.22 | 21.26 |
| | 1880.0 | 50 | 0 | 22.18 | 21.15 |
| | | 1 | 0 | 23.28 | 22.36 |
| | | 1 | 24 | 23.19 | 22.41 |
| | | 1 | 49 | 23.19 | 22.29 |
| | | 25 | 0 | 22.21 | 21.21 |
| | | 25 | 12 | 22.16 | 21.28 |
| | 1905.0 | 25 | 25 | 22.25 | 21.25 |
| | | 50 | 0 | 22.15 | 21.16 |
| | | 1 | 0 | 23.07 | 22.52 |
| | | 1 | 24 | 23.23 | 22.42 |
| | | 1 | 49 | 23.26 | 22.54 |
| | | 25 | 0 | 22.05 | 21.06 |
| 15 | 1857.5 | 25 | 12 | 22.09 | 21.16 |
| | | 25 | 25 | 22.11 | 21.22 |
| | | 50 | 0 | 22.12 | 21.07 |
| | | 1 | 0 | 22.99 | 22.30 |
| | | 1 | 37 | 23.01 | 22.16 |
| | | 1 | 74 | 22.92 | 22.21 |
| | 1880.0 | 37 | 0 | 22.04 | 21.14 |
| | | 37 | 18 | 22.07 | 21.11 |
| | | 37 | 38 | 21.98 | 21.02 |
| | | 75 | 0 | 21.99 | 20.98 |
| | | 1 | 0 | 23.14 | 22.24 |
| | | 1 | 37 | 23.27 | 22.18 |
| | 1902.5 | 1 | 74 | 22.91 | 22.10 |
| | | 37 | 0 | 22.17 | 21.16 |
| | | 37 | 18 | 22.06 | 21.08 |
| | | 37 | 38 | 21.98 | 21.02 |
| | | 75 | 0 | 22.11 | 21.13 |
| | | 1 | 0 | 22.99 | 21.95 |
| 20 | 1860.0 | 1 | 37 | 22.89 | 21.94 |
| | | 1 | 74 | 22.88 | 21.86 |
| | | 37 | 0 | 21.88 | 20.90 |
| | | 37 | 18 | 21.93 | 20.90 |
| | | 37 | 38 | 21.83 | 20.87 |
| | | 75 | 0 | 21.87 | 20.80 |
| | 1880.0 | 1 | 0 | 23.03 | 22.09 |
| | | 1 | 49 | 23.05 | 22.01 |
| | | 1 | 99 | 22.92 | 21.87 |
| | | 50 | 0 | 22.11 | 21.14 |
| | | 50 | 25 | 22.12 | 21.12 |
| | | 50 | 50 | 22.00 | 21.01 |
| | 1900.0 | 100 | 0 | 22.11 | 21.09 |
| | | 1 | 0 | 23.09 | 22.59 |
| | | 1 | 49 | 23.13 | 22.58 |
| | | 1 | 99 | 22.84 | 22.15 |
| | | 50 | 0 | 22.13 | 21.10 |
| | | 50 | 25 | 22.10 | 21.11 |
| 20 | 1880.0 | 50 | 50 | 21.96 | 20.95 |
| | | 100 | 0 | 22.04 | 20.97 |
| | | 1 | 0 | 22.94 | 22.60 |
| | | 1 | 49 | 23.02 | 22.55 |
| | | 1 | 99 | 22.67 | 22.31 |
| | | 50 | 0 | 21.94 | 22.26 |
| 20 | 1900.0 | 50 | 25 | 22.04 | 20.98 |

| | | | | | |
|--|--|-----|----|-------|-------|
| | | 50 | 50 | 21.96 | 20.92 |
| | | 100 | 0 | 22.01 | 21.06 |

LTE Band4

| BW (MHz) | Frequency (MHz) | RB Configuration | | Average Power [dBm] | |
|----------|-----------------|------------------|--------|---------------------|-------|
| | | Size | Offset | QPSK | 16QAM |
| 1.4 | 1710.7 | 1 | 0 | 23.26 | 22.14 |
| | | 1 | 3 | 23.33 | 22.40 |
| | | 1 | 5 | 23.28 | 22.18 |
| | | 3 | 0 | 23.24 | 22.37 |
| | | 3 | 2 | 23.19 | 22.34 |
| | | 3 | 3 | 23.20 | 22.23 |
| | 1732.5 | 6 | 0 | 22.17 | 21.24 |
| | | 1 | 0 | 23.04 | 22.28 |
| | | 1 | 3 | 23.20 | 22.20 |
| | | 1 | 5 | 23.18 | 22.32 |
| | | 3 | 0 | 23.15 | 22.05 |
| | | 3 | 2 | 23.25 | 22.14 |
| | | 3 | 3 | 23.15 | 22.04 |
| | | 6 | 0 | 22.09 | 20.97 |
| | | 1754.3 | 1 | 0 | 23.17 |
| | 1 | | 3 | 23.19 | 22.46 |
| | 1 | | 5 | 23.12 | 22.54 |
| | 3 | | 0 | 23.21 | 22.19 |
| 3 | 2 | | 23.26 | 22.12 | |
| 3 | 3 | | 23.23 | 22.12 | |
| 3 | 1711.5 | 6 | 0 | 22.08 | 21.21 |
| | | 1 | 0 | 23.35 | 22.57 |
| | | 1 | 7 | 23.46 | 22.64 |
| | | 1 | 14 | 23.35 | 22.59 |
| | | 8 | 0 | 22.33 | 21.47 |
| | | 8 | 4 | 22.35 | 21.52 |
| | 1732.5 | 8 | 7 | 22.28 | 21.43 |
| | | 15 | 0 | 22.32 | 21.32 |
| | | 1 | 0 | 23.19 | 22.33 |
| | | 1 | 7 | 23.07 | 22.50 |
| | | 1 | 14 | 23.14 | 22.26 |
| | | 8 | 0 | 22.15 | 21.27 |
| | | 8 | 4 | 22.11 | 21.20 |
| | | 8 | 7 | 22.07 | 21.15 |
| | | 15 | 0 | 22.05 | 21.07 |
| | 1753.5 | 1 | 0 | 23.37 | 22.49 |
| | | 1 | 7 | 23.79 | 22.54 |
| | | 1 | 14 | 23.25 | 22.56 |
| 8 | | 0 | 22.15 | 21.17 | |
| 8 | | 4 | 22.27 | 21.32 | |
| 8 | | 7 | 22.18 | 21.31 | |
| 5 | 1712.5 | 15 | 0 | 22.26 | 21.28 |
| | | 1 | 0 | 23.47 | 22.41 |
| | | 1 | 12 | 23.36 | 22.45 |
| | | 1 | 24 | 23.49 | 22.44 |
| | | 12 | 0 | 22.35 | 21.37 |
| | | 12 | 6 | 22.39 | 21.39 |
| | 1732.5 | 12 | 13 | 22.36 | 21.41 |
| | | 25 | 0 | 22.29 | 21.34 |
| | | 1 | 0 | 23.29 | 22.34 |
| | | 1 | 12 | 23.08 | 22.28 |
| | | 1 | 24 | 23.45 | 22.19 |
| | | 12 | 0 | 22.09 | 21.15 |
| | | 12 | 6 | 22.07 | 21.18 |
| | | 12 | 13 | 22.15 | 21.22 |
| | | 25 | 0 | 22.05 | 21.04 |
| | 1752.5 | 1 | 0 | 23.43 | 22.73 |
| | | 1 | 12 | 23.27 | 22.73 |
| | | 1 | 24 | 23.47 | 22.73 |

| | | | | | |
|-----|--------|-----|-------|-------|-------|
| | | 12 | 0 | 22.36 | 21.23 |
| | | 12 | 6 | 22.32 | 21.20 |
| | | 12 | 13 | 22.31 | 21.22 |
| | | 25 | 0 | 22.24 | 21.26 |
| 10 | 1715.0 | 1 | 0 | 23.49 | 22.62 |
| | | 1 | 24 | 23.46 | 22.64 |
| | | 1 | 49 | 23.30 | 22.65 |
| | | 25 | 0 | 22.34 | 21.38 |
| | | 25 | 12 | 22.37 | 21.44 |
| | | 25 | 25 | 22.32 | 21.36 |
| | | 50 | 0 | 22.33 | 21.35 |
| | | 50 | 0 | 22.33 | 21.35 |
| | 1732.5 | 1 | 0 | 23.18 | 22.38 |
| | | 1 | 24 | 23.09 | 22.38 |
| | | 1 | 49 | 23.05 | 22.30 |
| | | 25 | 0 | 22.10 | 21.18 |
| | | 25 | 12 | 22.16 | 21.23 |
| | | 25 | 25 | 22.10 | 21.06 |
| | | 50 | 0 | 22.18 | 21.10 |
| | | 50 | 0 | 22.18 | 21.10 |
| | 1750.0 | 1 | 0 | 23.34 | 22.71 |
| | | 1 | 24 | 23.37 | 22.59 |
| 1 | | 49 | 23.25 | 22.72 | |
| 25 | | 0 | 22.12 | 21.19 | |
| 25 | | 12 | 22.23 | 21.33 | |
| 25 | | 25 | 22.20 | 21.27 | |
| 50 | | 0 | 22.22 | 21.18 | |
| 50 | | 0 | 22.22 | 21.18 | |
| 15 | 1717.5 | 1 | 0 | 23.24 | 22.80 |
| | | 1 | 37 | 23.32 | 22.38 |
| | | 1 | 74 | 23.05 | 22.58 |
| | | 37 | 0 | 22.33 | 21.39 |
| | | 37 | 18 | 22.28 | 21.33 |
| | | 37 | 38 | 22.25 | 21.27 |
| | | 75 | 0 | 22.26 | 21.27 |
| | | 75 | 0 | 22.26 | 21.27 |
| | 1732.5 | 1 | 0 | 23.12 | 22.39 |
| | | 1 | 37 | 23.19 | 22.37 |
| | | 1 | 74 | 23.04 | 22.27 |
| | | 37 | 0 | 22.18 | 21.17 |
| | | 37 | 18 | 22.19 | 21.14 |
| | | 37 | 38 | 22.15 | 21.18 |
| | | 75 | 0 | 22.19 | 21.14 |
| | | 75 | 0 | 22.19 | 21.14 |
| | 1747.5 | 1 | 0 | 21.18 | 22.13 |
| | | 1 | 37 | 21.14 | 22.20 |
| 1 | | 74 | 23.16 | 22.15 | |
| 37 | | 0 | 23.15 | 22.12 | |
| 37 | | 18 | 23.21 | 22.13 | |
| 37 | | 38 | 22.15 | 21.19 | |
| 75 | | 0 | 22.26 | 21.22 | |
| 75 | | 0 | 22.26 | 21.22 | |
| 20 | 1720.0 | 1 | 0 | 23.33 | 22.31 |
| | | 1 | 49 | 23.21 | 22.34 |
| | | 1 | 99 | 23.04 | 22.44 |
| | | 50 | 0 | 22.27 | 21.36 |
| | | 50 | 25 | 22.25 | 21.34 |
| | | 50 | 50 | 22.24 | 21.26 |
| | | 100 | 0 | 22.25 | 21.32 |
| | | 100 | 0 | 22.25 | 21.32 |
| | 1732.5 | 1 | 0 | 23.06 | 22.95 |
| | | 1 | 49 | 23.26 | 22.64 |
| | | 1 | 99 | 23.01 | 22.39 |
| | | 50 | 0 | 22.14 | 21.10 |
| | | 50 | 25 | 22.22 | 21.16 |
| | | 50 | 50 | 22.21 | 21.17 |
| | | 100 | 0 | 22.20 | 21.19 |
| | | 100 | 0 | 22.20 | 21.19 |
| | 1745.0 | 1 | 0 | 23.15 | 22.75 |
| | | 1 | 49 | 23.13 | 22.73 |
| 1 | | 99 | 23.03 | 22.69 | |
| 50 | | 0 | 22.17 | 21.69 | |
| 50 | | 25 | 22.17 | 21.12 | |
| 50 | | 50 | 22.15 | 21.09 | |
| 100 | | 0 | 22.13 | 21.16 | |
| 100 | | 0 | 22.13 | 21.16 | |

LTE Band5

| BW (MHz) | Frequency (MHz) | RB Configuration | | Average Power [dBm] | |
|----------|-----------------|------------------|--------|---------------------|-------|
| | | Size | Offset | QPSK | 16QAM |
| 1.4 | 824.7 | 1 | 0 | 22.96 | 22.03 |
| | | 1 | 3 | 23.02 | 22.17 |
| | | 1 | 5 | 23.01 | 21.99 |
| | | 3 | 0 | 22.97 | 21.99 |
| | | 3 | 2 | 22.90 | 21.96 |
| | | 3 | 3 | 22.76 | 21.99 |
| | | 6 | 0 | 21.86 | 21.94 |
| | 836.5 | 1 | 0 | 23.04 | 22.23 |
| | | 1 | 3 | 23.14 | 22.16 |
| | | 1 | 5 | 23.08 | 22.17 |
| | | 3 | 0 | 22.85 | 21.91 |
| | | 3 | 2 | 22.97 | 22.08 |
| | | 3 | 3 | 22.86 | 21.98 |
| | | 6 | 0 | 21.87 | 20.96 |
| | 848.3 | 1 | 0 | 23.08 | 22.29 |
| | | 1 | 3 | 23.25 | 22.23 |
| | | 1 | 5 | 23.02 | 22.25 |
| | | 3 | 0 | 23.01 | 22.15 |
| | | 3 | 2 | 23.06 | 22.09 |
| | | 3 | 3 | 23.00 | 21.08 |
| | | 6 | 0 | 21.99 | 22.85 |
| 3 | 825.5 | 1 | 0 | 22.85 | 22.14 |
| | | 1 | 7 | 22.89 | 22.20 |
| | | 1 | 14 | 22.83 | 22.13 |
| | | 8 | 0 | 21.87 | 21.05 |
| | | 8 | 4 | 21.95 | 21.07 |
| | | 8 | 7 | 21.91 | 21.06 |
| | | 15 | 0 | 21.90 | 20.91 |
| | 836.5 | 1 | 0 | 23.06 | 22.19 |
| | | 1 | 7 | 22.87 | 22.32 |
| | | 1 | 14 | 22.97 | 22.09 |
| | | 8 | 0 | 22.00 | 21.23 |
| | | 8 | 4 | 21.98 | 21.19 |
| | | 8 | 7 | 21.98 | 21.14 |
| | | 15 | 0 | 21.97 | 21.03 |
| | 847.5 | 1 | 0 | 23.27 | 22.28 |
| | | 1 | 7 | 23.21 | 22.31 |
| | | 1 | 14 | 23.12 | 22.24 |
| | | 8 | 0 | 22.14 | 21.08 |
| | | 8 | 4 | 22.16 | 21.11 |
| | | 8 | 7 | 22.09 | 21.09 |
| | | 15 | 0 | 22.16 | 21.05 |
| 5 | 826.5 | 1 | 0 | 22.96 | 21.95 |
| | | 1 | 12 | 23.06 | 22.06 |
| | | 1 | 24 | 23.03 | 22.04 |
| | | 12 | 0 | 21.95 | 20.96 |
| | | 12 | 6 | 21.97 | 20.99 |
| | | 12 | 13 | 21.91 | 20.99 |
| | | 25 | 0 | 21.81 | 20.81 |
| | 836.5 | 1 | 0 | 23.36 | 22.03 |
| | | 1 | 12 | 23.05 | 22.02 |
| | | 1 | 24 | 23.31 | 22.18 |
| | | 12 | 0 | 22.00 | 21.12 |
| | | 12 | 6 | 22.00 | 21.13 |
| | | 12 | 13 | 21.94 | 21.13 |
| | | 25 | 0 | 22.10 | 21.07 |
| | 846.5 | 1 | 0 | 23.15 | 22.48 |
| | | 1 | 12 | 23.01 | 22.42 |
| | | 1 | 24 | 22.99 | 22.50 |
| | | 12 | 0 | 22.04 | 20.89 |
| | | 12 | 6 | 22.02 | 20.92 |
| | | 12 | 13 | 21.99 | 20.88 |
| | | 25 | 0 | 21.97 | 20.98 |

| | | | | | |
|----|-------|----|----|-------|-------|
| 10 | 829.0 | 1 | 0 | 22.79 | 22.28 |
| | | 1 | 24 | 22.95 | 22.23 |
| | | 1 | 49 | 22.80 | 22.13 |
| | | 25 | 0 | 21.90 | 20.93 |
| | | 25 | 12 | 21.91 | 21.01 |
| | | 25 | 25 | 21.82 | 20.85 |
| | 836.5 | 50 | 0 | 21.84 | 20.83 |
| | | 1 | 0 | 22.93 | 22.13 |
| | | 1 | 24 | 23.07 | 22.23 |
| | | 1 | 49 | 22.99 | 22.19 |
| | | 25 | 0 | 22.05 | 21.10 |
| | | 25 | 12 | 22.10 | 21.20 |
| | 844.0 | 25 | 25 | 22.02 | 21.07 |
| | | 50 | 0 | 22.10 | 21.03 |
| | | 1 | 0 | 23.36 | 22.59 |
| | | 1 | 24 | 23.39 | 22.30 |
| | | 1 | 49 | 23.03 | 22.45 |
| | | 25 | 0 | 22.17 | 21.28 |
| | | 25 | 12 | 22.11 | 21.22 |
| | | 25 | 25 | 22.11 | 21.20 |
| | | 50 | 0 | 22.19 | 21.23 |

LTE Band7

| BW (MHz) | Frequency (MHz) | RB Configuration | | Average Power [dBm] | |
|----------|-----------------|------------------|--------|---------------------|-------|
| | | Size | Offset | QPSK | 16QAM |
| 5 | 2502.5 | 1 | 0 | 21.53 | 20.61 |
| | | 1 | 12 | 21.46 | 20.61 |
| | | 1 | 24 | 21.52 | 20.62 |
| | | 12 | 0 | 20.52 | 19.57 |
| | | 12 | 6 | 20.46 | 19.49 |
| | | 12 | 13 | 20.48 | 19.58 |
| | 2535.0 | 25 | 0 | 20.50 | 19.53 |
| | | 1 | 0 | 21.34 | 20.34 |
| | | 1 | 12 | 21.41 | 20.33 |
| | | 1 | 24 | 21.39 | 20.32 |
| | | 12 | 0 | 20.26 | 19.38 |
| | | 12 | 6 | 20.27 | 19.38 |
| | 2567.5 | 12 | 13 | 20.23 | 19.35 |
| | | 25 | 0 | 20.21 | 19.37 |
| | | 1 | 0 | 20.94 | 20.11 |
| | | 1 | 12 | 20.83 | 20.23 |
| | | 1 | 24 | 20.98 | 20.16 |
| | | 12 | 0 | 19.82 | 19.67 |
| 10 | 2505.0 | 12 | 6 | 19.82 | 19.76 |
| | | 12 | 13 | 19.82 | 19.69 |
| | | 25 | 0 | 19.78 | 19.80 |
| | | 1 | 0 | 21.57 | 20.81 |
| | | 1 | 24 | 21.60 | 20.78 |
| | | 1 | 49 | 21.44 | 20.76 |
| | 2535.0 | 25 | 0 | 20.56 | 19.63 |
| | | 25 | 12 | 20.52 | 19.62 |
| | | 25 | 25 | 20.40 | 19.49 |
| | | 50 | 0 | 20.50 | 19.51 |
| | | 1 | 0 | 21.31 | 20.44 |
| | | 1 | 24 | 21.33 | 20.47 |
| | 2565.0 | 1 | 49 | 21.06 | 20.26 |
| | | 25 | 0 | 20.26 | 19.32 |
| | | 25 | 12 | 20.25 | 19.39 |
| | | 25 | 25 | 20.26 | 19.28 |
| | | 50 | 0 | 20.23 | 19.23 |
| | | 1 | 0 | 21.04 | 20.21 |
| | | 1 | 24 | 21.10 | 20.19 |
| | | 1 | 49 | 20.99 | 20.30 |
| | | 25 | 0 | 19.83 | 19.93 |
| | | 25 | 12 | 19.84 | 19.00 |

| | | | | | | |
|--------|--------|--------|-------|-------|-------|-------|
| 15 | 2507.5 | 25 | 25 | 19.85 | 19.97 | |
| | | 50 | 0 | 19.80 | 19.85 | |
| | | 1 | 0 | 21.39 | 20.76 | |
| | | 1 | 37 | 21.67 | 20.37 | |
| | | 1 | 74 | 21.34 | 20.47 | |
| | | 37 | 0 | 20.54 | 19.55 | |
| | | 37 | 18 | 20.60 | 19.57 | |
| | | 37 | 38 | 20.42 | 19.45 | |
| | | 75 | 0 | 20.44 | 19.45 | |
| | 2535.0 | 1 | 0 | 21.20 | 20.37 | |
| | | 1 | 37 | 21.19 | 20.41 | |
| | | 1 | 74 | 20.81 | 20.04 | |
| | | 37 | 0 | 20.22 | 19.23 | |
| | | 37 | 18 | 20.26 | 19.28 | |
| | | 37 | 38 | 19.95 | 19.04 | |
| | 2562.5 | 75 | 0 | 20.18 | 19.24 | |
| | | 1 | 0 | 20.78 | 19.76 | |
| | | 1 | 37 | 20.64 | 19.76 | |
| | | 1 | 74 | 20.75 | 19.79 | |
| | | 37 | 0 | 19.72 | 19.84 | |
| | | 37 | 18 | 19.84 | 19.87 | |
| | | 37 | 38 | 19.75 | 19.74 | |
| | 20 | 2510.0 | 75 | 0 | 19.76 | 19.61 |
| | | | 1 | 0 | 21.41 | 20.55 |
| 1 | | | 49 | 21.40 | 20.48 | |
| 1 | | | 99 | 21.14 | 20.10 | |
| 50 | | | 0 | 20.41 | 19.53 | |
| 50 | | | 25 | 20.41 | 19.48 | |
| 50 | | | 50 | 20.36 | 19.44 | |
| 2535.0 | | 100 | 0 | 20.43 | 19.45 | |
| | | 1 | 0 | 21.18 | 20.69 | |
| | | 1 | 49 | 21.25 | 20.29 | |
| | | 1 | 99 | 20.80 | 19.52 | |
| | | 50 | 0 | 20.23 | 19.27 | |
| | | 50 | 25 | 20.26 | 19.37 | |
| 2560 | | 50 | 50 | 20.09 | 19.48 | |
| | | 100 | 0 | 20.71 | 20.71 | |
| | | 1 | 0 | 20.72 | 19.80 | |
| | | 1 | 49 | 20.63 | 19.84 | |
| | | 1 | 99 | 19.84 | 19.36 | |
| | 50 | 0 | 19.83 | 19.68 | | |
| | 50 | 25 | 19.80 | 19.86 | | |
| 20 | 2560 | 50 | 50 | 19.83 | 19.67 | |
| | | 100 | 0 | 20.26 | 19.85 | |

LTE Band 12

| BW (MHz) | Frequency (MHz) | RB Configuration | | Average Power [dBm] | |
|----------|-----------------|------------------|--------|---------------------|-------|
| | | Size | Offset | QPSK | 16QAM |
| 1.4 | 699.7 | 1 | 0 | 24.24 | 22.81 |
| | | 1 | 3 | 24.14 | 23.12 |
| | | 1 | 5 | 24.22 | 22.92 |
| | | 3 | 0 | 23.94 | 22.82 |
| | | 3 | 2 | 23.89 | 22.81 |
| | | 3 | 3 | 23.88 | 22.82 |
| | 707.5 | 6 | 0 | 22.84 | 21.96 |
| | | 1 | 0 | 23.85 | 23.25 |
| | | 1 | 3 | 23.90 | 23.12 |
| | | 1 | 5 | 23.80 | 23.10 |
| | | 3 | 0 | 23.74 | 22.69 |
| | | 3 | 2 | 23.75 | 22.71 |
| | 715.3 | 3 | 3 | 23.77 | 22.63 |
| | | 6 | 0 | 22.67 | 21.80 |
| | | 1 | 0 | 23.86 | 23.11 |
| | | 1 | 3 | 23.85 | 23.10 |
| | | 1 | 5 | 23.76 | 22.99 |
| | | 3 | 0 | 23.85 | 22.74 |

| | | | | | |
|----|-------|----|-------|-------|-------|
| | | 3 | 2 | 23.83 | 22.75 |
| | | 3 | 3 | 23.79 | 22.79 |
| | | 6 | 0 | 22.73 | 21.79 |
| 3 | 700.5 | 1 | 0 | 24.00 | 23.20 |
| | | 1 | 7 | 24.08 | 23.11 |
| | | 1 | 14 | 23.88 | 23.04 |
| | | 8 | 0 | 22.94 | 22.12 |
| | | 8 | 4 | 23.01 | 22.11 |
| | | 8 | 7 | 22.79 | 21.98 |
| | | 15 | 0 | 22.93 | 21.96 |
| | | 1 | 0 | 23.85 | 23.05 |
| | 707.5 | 1 | 7 | 23.84 | 23.12 |
| | | 1 | 14 | 23.79 | 23.03 |
| | | 8 | 0 | 22.85 | 21.99 |
| | | 8 | 4 | 22.85 | 22.00 |
| | | 8 | 7 | 22.73 | 21.85 |
| | | 15 | 0 | 22.83 | 21.88 |
| | 714.5 | 1 | 0 | 23.88 | 23.15 |
| | | 1 | 7 | 24.22 | 23.16 |
| | | 1 | 14 | 23.75 | 22.97 |
| | | 8 | 0 | 22.82 | 21.88 |
| 8 | | 4 | 22.90 | 21.90 | |
| 8 | | 7 | 22.91 | 21.91 | |
| 15 | | 0 | 22.83 | 21.93 | |
| 5 | 701.5 | 1 | 0 | 23.95 | 23.06 |
| | | 1 | 12 | 23.72 | 22.92 |
| | | 1 | 24 | 23.89 | 22.96 |
| | | 12 | 0 | 22.88 | 21.95 |
| | | 12 | 6 | 22.80 | 21.86 |
| | | 12 | 13 | 22.83 | 21.89 |
| | | 25 | 0 | 22.85 | 21.90 |
| | 707.5 | 1 | 0 | 24.03 | 22.92 |
| | | 1 | 12 | 23.76 | 22.83 |
| | | 1 | 24 | 24.07 | 22.79 |
| | | 12 | 0 | 22.78 | 21.90 |
| | | 12 | 6 | 22.83 | 21.97 |
| | | 12 | 13 | 22.75 | 21.85 |
| | | 25 | 0 | 22.80 | 21.81 |
| | 713.5 | 1 | 0 | 23.86 | 23.33 |
| | | 1 | 12 | 23.84 | 23.13 |
| | | 1 | 24 | 23.83 | 23.34 |
| | | 12 | 0 | 22.73 | 21.65 |
| 12 | | 6 | 22.79 | 21.75 | |
| 12 | | 13 | 22.79 | 21.70 | |
| 25 | | 0 | 22.74 | 21.82 | |
| 10 | 704 | 1 | 0 | 23.96 | 23.37 |
| | | 1 | 24 | 23.94 | 23.23 |
| | | 1 | 49 | 23.81 | 23.10 |
| | | 25 | 0 | 22.86 | 21.91 |
| | | 25 | 12 | 22.89 | 21.96 |
| | | 25 | 25 | 22.85 | 21.88 |
| | | 50 | 0 | 22.82 | 21.81 |
| | 707.5 | 1 | 0 | 23.85 | 23.09 |
| | | 1 | 24 | 23.90 | 23.12 |
| | | 1 | 49 | 23.84 | 22.97 |
| | | 25 | 0 | 22.91 | 21.95 |
| | | 25 | 12 | 22.85 | 21.94 |
| | | 25 | 25 | 22.77 | 21.82 |
| | | 50 | 0 | 22.83 | 21.80 |
| | 711.0 | 1 | 0 | 24.03 | 23.33 |
| | | 1 | 24 | 24.06 | 23.26 |
| | | 1 | 49 | 24.04 | 23.19 |
| | | 25 | 0 | 22.79 | 21.19 |
| 25 | | 12 | 22.79 | 21.97 | |
| 25 | | 25 | 22.74 | 21.85 | |
| 50 | | 0 | 22.85 | 21.85 | |

LTE Band13

| BW (MHz) | Frequency (MHz) | RB Configuration | | Average Power [dBm] | |
|-------------|--------------------|------------------|--------|---------------------|-------|
| | | Size | Offset | QPSK | 16QAM |
| 5 | 779.5 | 1 | 0 | 23.57 | 22.70 |
| | | 1 | 12 | 23.33 | 22.55 |
| | | 1 | 24 | 23.42 | 22.51 |
| | | 12 | 0 | 22.39 | 21.57 |
| | | 12 | 6 | 22.47 | 21.52 |
| | | 12 | 13 | 22.40 | 21.48 |
| | | 25 | 0 | 22.37 | 21.53 |
| | 782 | 1 | 0 | 23.58 | 22.57 |
| | | 1 | 12 | 23.47 | 22.75 |
| | | 1 | 24 | 23.60 | 22.40 |
| | | 12 | 0 | 22.44 | 21.61 |
| | | 12 | 6 | 22.52 | 21.61 |
| | | 12 | 13 | 22.42 | 21.51 |
| | | 25 | 0 | 22.46 | 21.52 |
| | 784.5 | 1 | 0 | 23.55 | 23.16 |
| | | 1 | 12 | 23.58 | 22.84 |
| | | 1 | 24 | 23.51 | 23.04 |
| | | 12 | 0 | 22.44 | 21.38 |
| | | 12 | 6 | 22.47 | 21.37 |
| | | 12 | 13 | 22.43 | 21.32 |
| | | 25 | 0 | 22.35 | 21.43 |
| 10 | 782 | 1 | 0 | 23.51 | 22.90 |
| | | 1 | 24 | 23.53 | 22.89 |
| | | 1 | 49 | 23.43 | 22.79 |
| | | 25 | 0 | 22.51 | 21.60 |
| | | 25 | 12 | 22.52 | 21.60 |
| | | 25 | 25 | 22.40 | 21.48 |
| | | 50 | 0 | 22.57 | 21.40 |

LTE Band 25

| BW (MHz) | Frequency (MHz) | RB Configuration | | Average Power [dBm] | |
|-------------|--------------------|------------------|--------|---------------------|-------|
| | | Size | Offset | QPSK | 16QAM |
| 1.4 | 1890.7 | 1 | 0 | 23.06 | 21.79 |
| | | 1 | 3 | 22.98 | 22.12 |
| | | 1 | 5 | 22.84 | 21.97 |
| | | 3 | 0 | 22.87 | 21.90 |
| | | 3 | 2 | 23.00 | 22.04 |
| | | 3 | 3 | 22.86 | 21.85 |
| | | 6 | 0 | 21.74 | 20.80 |
| | 1882.5 | 1 | 0 | 23.07 | 22.03 |
| | | 1 | 3 | 22.97 | 22.05 |
| | | 1 | 5 | 22.90 | 21.98 |
| | | 3 | 0 | 22.92 | 21.80 |
| | | 3 | 2 | 23.01 | 21.98 |
| | | 3 | 3 | 22.97 | 21.85 |
| | | 6 | 0 | 21.90 | 20.89 |
| | 1914.3 | 1 | 0 | 22.87 | 22.14 |
| | | 1 | 3 | 23.00 | 22.13 |
| | | 1 | 5 | 22.83 | 22.07 |
| | | 3 | 0 | 22.79 | 21.79 |
| | | 3 | 2 | 22.81 | 21.80 |
| | | 3 | 3 | 22.89 | 21.86 |
| | | 6 | 0 | 21.72 | 20.90 |
| 3 | 1851.5 | 1 | 0 | 22.94 | 22.06 |
| | | 1 | 7 | 23.10 | 22.02 |
| | | 1 | 14 | 23.00 | 22.02 |
| | | 8 | 0 | 21.96 | 21.10 |
| | | 8 | 4 | 21.94 | 21.12 |
| | | 8 | 7 | 21.92 | 21.14 |
| | | 15 | 0 | 21.87 | 20.91 |
| | 1882.5 | 1 | 0 | 23.00 | 22.15 |
| | | 1 | 7 | 23.06 | 22.35 |
| | | 1 | 14 | 23.60 | 22.26 |

| | | | | | | |
|--------|--------|--------|-------|-------|-------|-------|
| | | 8 | 0 | 22.04 | 21.23 | |
| | | 8 | 4 | 22.00 | 21.20 | |
| | | 8 | 7 | 22.00 | 21.13 | |
| | | 15 | 0 | 21.98 | 21.06 | |
| | | 1 | 0 | 22.99 | 22.06 | |
| | | 1 | 7 | 23.43 | 22.18 | |
| | | 1 | 14 | 22.86 | 22.15 | |
| | | 8 | 0 | 21.84 | 20.97 | |
| | | 8 | 4 | 21.90 | 20.98 | |
| | 8 | 7 | 21.89 | 21.02 | | |
| | 15 | 0 | 21.94 | 20.96 | | |
| | 5 | 1852.5 | 1 | 0 | 23.06 | 22.18 |
| | | | 1 | 12 | 23.19 | 22.03 |
| | | | 1 | 24 | 22.97 | 22.11 |
| | | | 12 | 0 | 21.95 | 21.01 |
| 12 | | | 6 | 21.98 | 21.06 | |
| 12 | | | 13 | 21.89 | 20.98 | |
| 25 | | | 0 | 21.93 | 20.86 | |
| 1 | | | 0 | 23.41 | 22.24 | |
| 1882.5 | | 1 | 12 | 23.17 | 22.27 | |
| | | 1 | 24 | 23.35 | 22.17 | |
| | | 12 | 0 | 22.01 | 21.15 | |
| | | 12 | 6 | 22.06 | 21.20 | |
| | | 12 | 13 | 22.05 | 21.21 | |
| | | 25 | 0 | 21.98 | 21.03 | |
| | | 1 | 0 | 23.14 | 22.36 | |
| 1912.5 | | 1 | 12 | 23.03 | 22.25 | |
| | | 1 | 24 | 23.09 | 22.41 | |
| | | 12 | 0 | 21.99 | 20.85 | |
| | | 12 | 6 | 22.05 | 20.95 | |
| | | 12 | 13 | 22.05 | 20.96 | |
| | | 25 | 0 | 21.96 | 20.99 | |
| | 1 | 0 | 23.15 | 22.31 | | |
| 10 | 1855.0 | 1 | 24 | 23.05 | 22.04 | |
| | | 1 | 49 | 22.94 | 22.19 | |
| | | 25 | 0 | 22.02 | 21.06 | |
| | | 25 | 12 | 21.94 | 21.04 | |
| | | 25 | 25 | 22.03 | 21.07 | |
| | | 50 | 0 | 22.01 | 21.02 | |
| | | 1 | 0 | 23.12 | 22.21 | |
| | 1882.5 | 1 | 24 | 23.03 | 22.33 | |
| | | 1 | 49 | 22.81 | 22.07 | |
| | | 25 | 0 | 22.08 | 21.09 | |
| | | 25 | 12 | 22.08 | 21.14 | |
| | | 25 | 25 | 22.04 | 21.05 | |
| | | 50 | 0 | 22.05 | 21.06 | |
| | | 1 | 0 | 22.91 | 22.06 | |
| | 1910.0 | 1 | 24 | 23.02 | 22.13 | |
| | | 1 | 49 | 23.12 | 22.33 | |
| | | 25 | 0 | 21.84 | 20.94 | |
| | | 25 | 12 | 21.88 | 21.00 | |
| | | 25 | 25 | 21.82 | 20.92 | |
| | | 50 | 0 | 21.90 | 20.88 | |
| | | 1 | 0 | 22.93 | 22.23 | |
| 15 | 1857.5 | 1 | 37 | 23.02 | 22.31 | |
| | | 1 | 74 | 22.81 | 22.07 | |
| | | 37 | 0 | 21.95 | 21.07 | |
| | | 37 | 18 | 22.03 | 21.12 | |
| | | 37 | 38 | 22.09 | 21.13 | |
| | | 75 | 0 | 21.95 | 21.01 | |
| | | 1 | 0 | 22.99 | 22.17 | |
| | 1882.5 | 1 | 37 | 23.13 | 22.15 | |
| | | 1 | 74 | 22.80 | 21.94 | |
| | | 37 | 0 | 22.08 | 21.20 | |
| | | 37 | 18 | 22.16 | 21.15 | |
| | | 37 | 38 | 22.02 | 21.03 | |
| | | 75 | 0 | 22.02 | 21.06 | |

| | | | | | |
|----|--------|-----|----|-------|-------|
| | 1907.5 | 1 | 0 | 22.78 | 21.65 |
| | | 1 | 37 | 22.96 | 21.86 |
| | | 1 | 74 | 22.93 | 21.84 |
| | | 37 | 0 | 21.84 | 20.88 |
| | | 37 | 18 | 22.01 | 21.00 |
| | | 37 | 38 | 21.87 | 20.90 |
| | | 75 | 0 | 22.02 | 20.93 |
| 20 | 1860.0 | 1 | 0 | 23.08 | 22.19 |
| | | 1 | 49 | 23.17 | 22.11 |
| | | 1 | 99 | 22.86 | 21.91 |
| | | 50 | 0 | 22.02 | 21.11 |
| | | 50 | 25 | 22.12 | 21.19 |
| | | 50 | 50 | 21.98 | 21.01 |
| | | 100 | 0 | 22.04 | 21.06 |
| | 1882.5 | 1 | 0 | 23.12 | 22.89 |
| | | 1 | 49 | 23.09 | 22.59 |
| | | 1 | 99 | 22.78 | 22.31 |
| | | 50 | 0 | 22.05 | 20.96 |
| | | 50 | 25 | 22.08 | 20.98 |
| | | 50 | 50 | 22.04 | 22.90 |
| | | 100 | 0 | 22.08 | 22.93 |
| | 1905.0 | 1 | 0 | 22.77 | 22.41 |
| | | 1 | 49 | 21.87 | 20.95 |
| | | 1 | 99 | 21.95 | 21.05 |
| | | 50 | 0 | 21.99 | 20.92 |
| | | 50 | 25 | 22.01 | 20.98 |
| | | 50 | 50 | 22.46 | 20.92 |
| | | 100 | 0 | 22.40 | 21.36 |

LTE Band 26

| BW (MHz) | Frequency (MHz) | RB Configuration | | Average Power [dBm] | |
|----------|-----------------|------------------|--------|---------------------|-------|
| | | Size | Offset | QPSK | 16QAM |
| 1.4 | 814.7 | 1 | 0 | 23.47 | 22.24 |
| | | 1 | 3 | 23.23 | 22.34 |
| | | 1 | 5 | 23.27 | 22.20 |
| | | 3 | 0 | 23.21 | 22.40 |
| | | 3 | 2 | 23.31 | 22.51 |
| | | 3 | 3 | 23.23 | 22.22 |
| | | 6 | 0 | 22.27 | 21.37 |
| | 831.5 | 1 | 0 | 23.13 | 22.43 |
| | | 1 | 3 | 23.13 | 22.35 |
| | | 1 | 5 | 23.13 | 22.41 |
| | | 3 | 0 | 23.09 | 22.08 |
| | | 3 | 2 | 23.09 | 22.12 |
| | | 3 | 3 | 23.05 | 22.09 |
| | | 6 | 0 | 22.06 | 21.05 |
| | 848.3 | 1 | 0 | 23.43 | 23.28 |
| | | 1 | 3 | 23.43 | 22.26 |
| | | 1 | 5 | 23.39 | 22.60 |
| | | 3 | 0 | 23.28 | 22.63 |
| | | 3 | 2 | 23.36 | 22.53 |
| | | 3 | 3 | 23.28 | 22.37 |
| | | 6 | 0 | 23.36 | 22.41 |
| 3 | 815.5 | 1 | 0 | 23.34 | 22.74 |
| | | 1 | 7 | 23.49 | 22.59 |
| | | 1 | 14 | 23.36 | 22.48 |
| | | 8 | 0 | 22.33 | 21.49 |
| | | 8 | 4 | 22.38 | 21.50 |
| | | 8 | 7 | 22.33 | 21.44 |
| | | 15 | 0 | 22.33 | 21.30 |
| | 831.5 | 1 | 0 | 23.18 | 22.37 |
| | | 1 | 7 | 23.12 | 22.54 |
| | | 1 | 14 | 23.14 | 22.34 |
| | | 8 | 0 | 22.14 | 21.27 |
| | | 8 | 4 | 22.14 | 21.27 |
| | | 8 | 7 | 22.18 | 21.32 |