


3.6. Number of Hopping Channel

Limit

Section	Test Item	Limit
15.247	Number of Hopping Channel	>15

Test Configuration

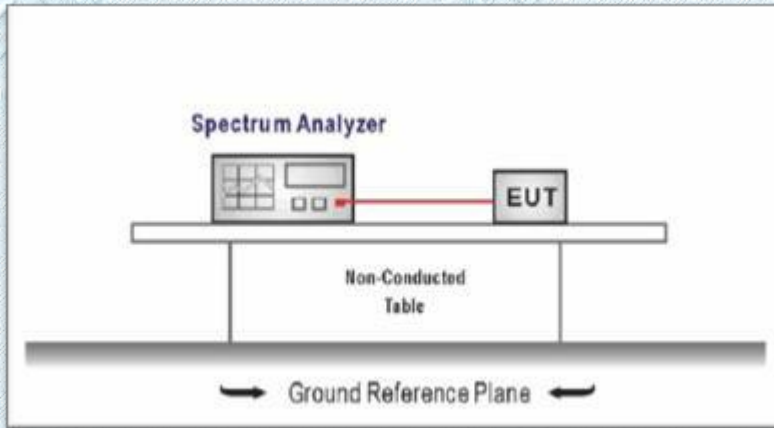



Test Procedure


1. The Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
2. Spectrum Setting:
 - (1) Peak Detector: RBW=100 kHz, VBW \geq RBW, Sweep time= Auto.

Test Mode

Please refer to the clause 2.3.

Test Result

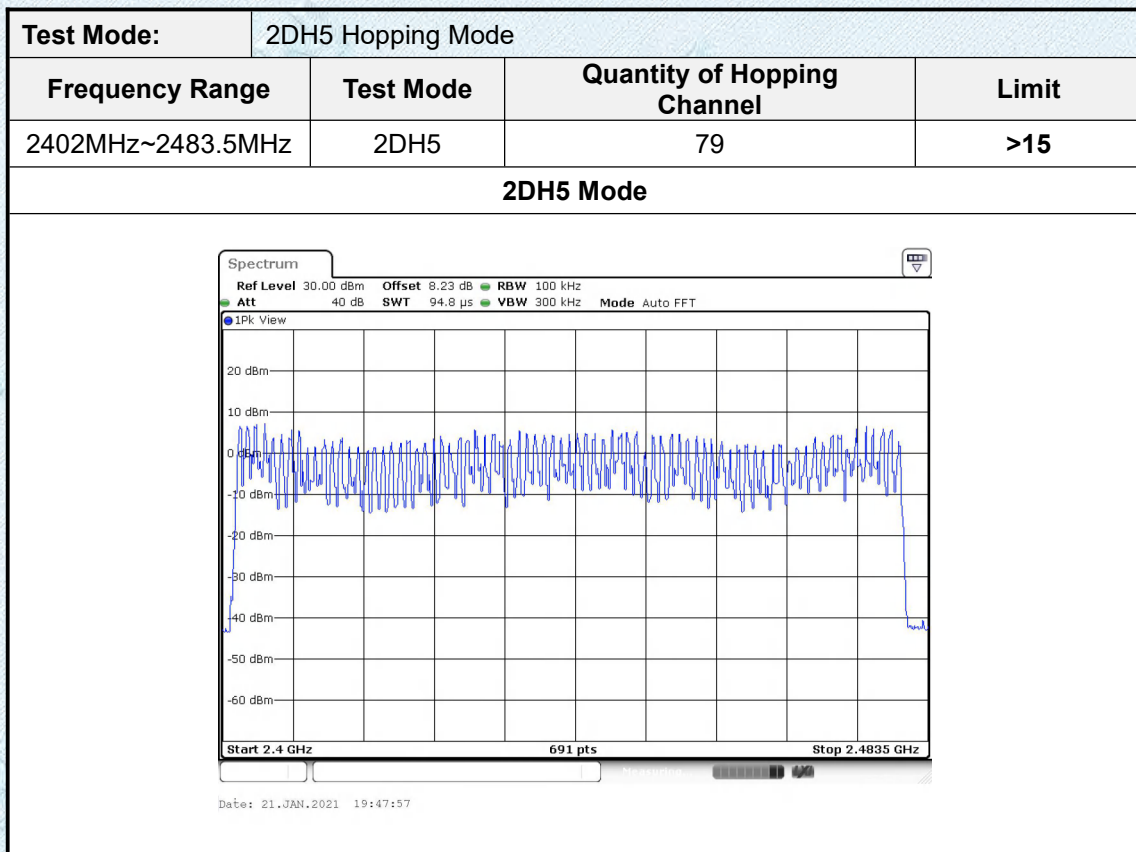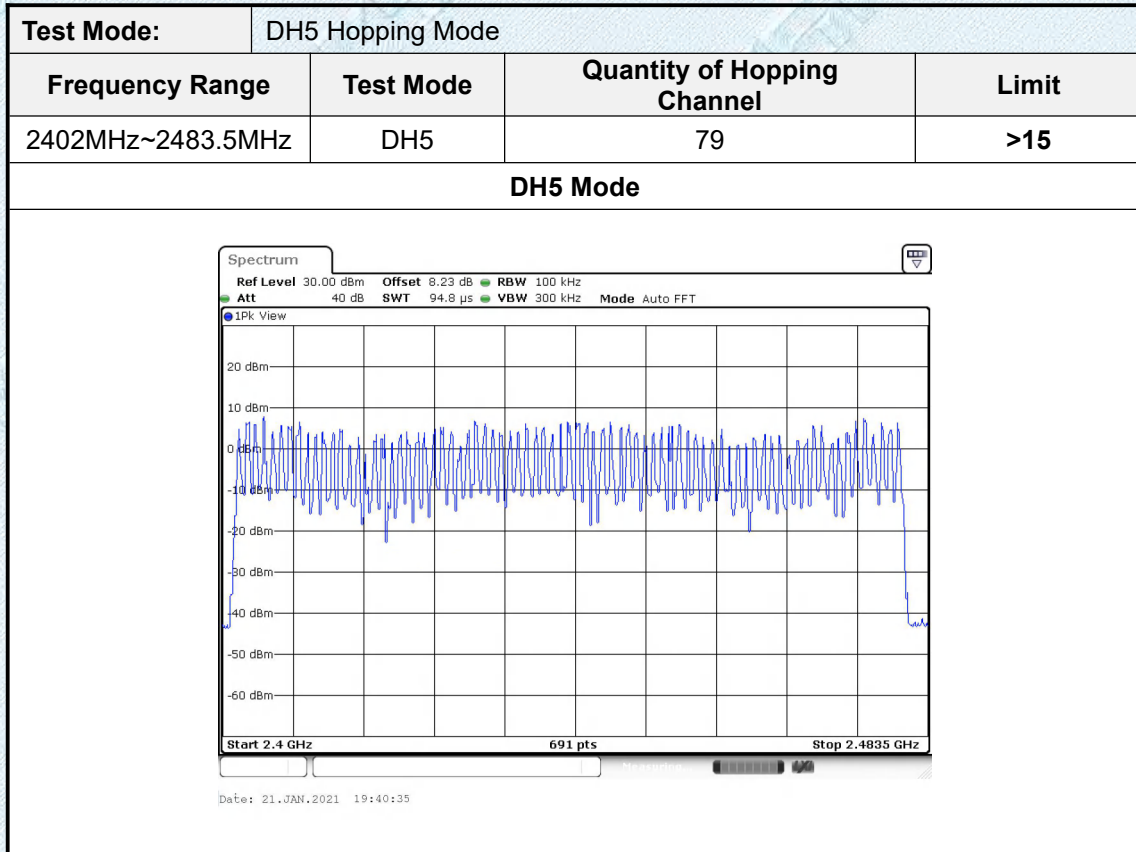

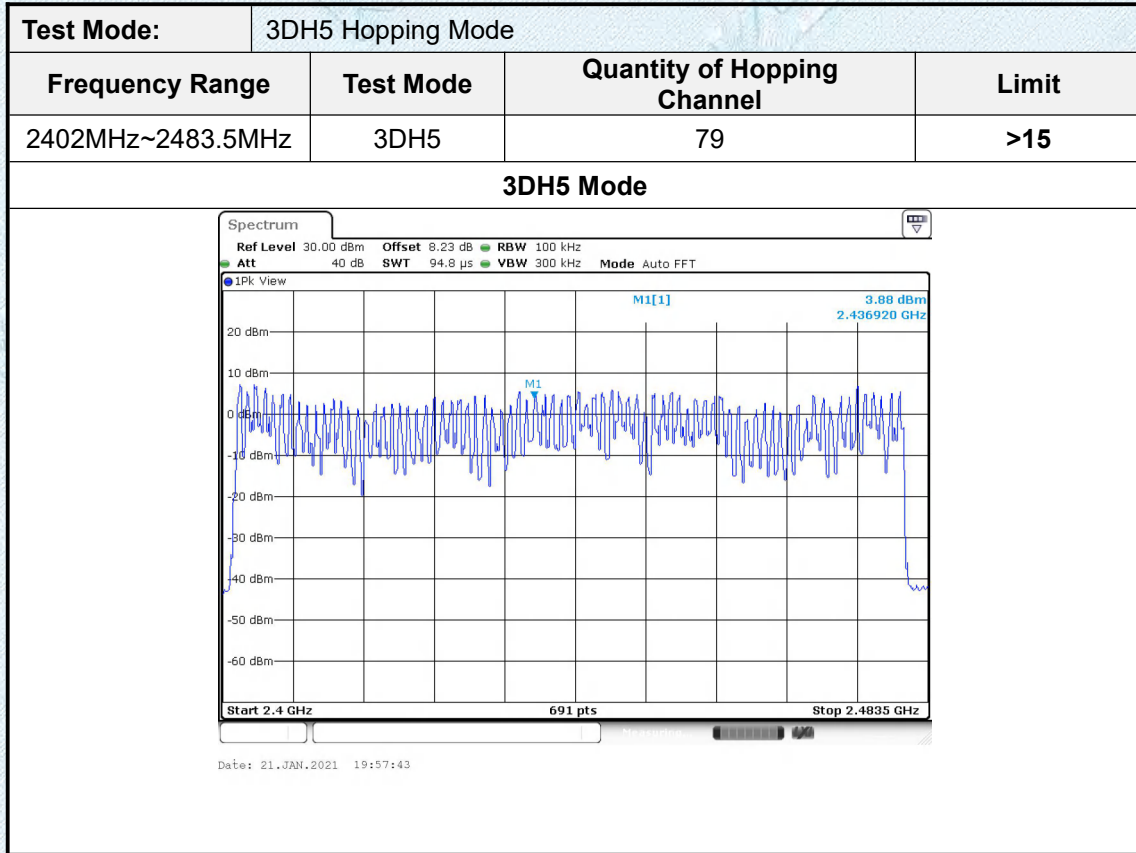


3.7. Dwell Time

Limit

Section	Test Item	Limit
15.247(a)(1)	Average Time of Occupancy	0.4 sec

Test Configuration

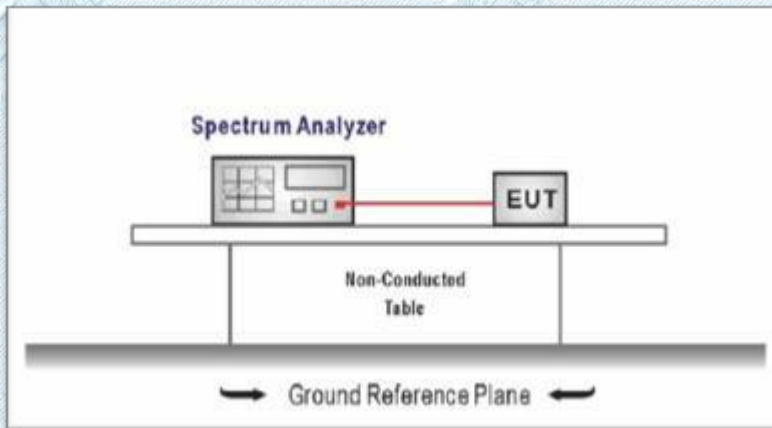

Test Procedure

1. The Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
2. Spectrum Setting:
 - (1) Spectrum Setting: RBW=1MHz, VBW ≥ RBW.
 - (2) Use video trigger with the trigger level set to enable triggering only on full pulses.
 - (3) Sweep Time is more than once pulse time.
 - (4) Set the center frequency on any frequency would be measure and set the frequency span to zero.
 - (5) Measure the maximum time duration of one single pulse.
 - (6) Set the EUT for packet transmitting.

Test Mode

Please refer to the clause 2.3

Test Result

Note:

1. We have tested all mode at high, middle and low channel, and recorded worst case at middle channel.

2. Dwell time = Pulse time (ms) × (1600 ÷ 2 ÷ 79) × 31.6 Second for DH1, 2DH1, 3DH1

Dwell time = Pulse time (ms) × (1600 ÷ 4 ÷ 79) × 31.6 Second for DH3, 2DH3, 3DH3


Dwell time = Pulse time (ms) × (1600 ÷ 6 ÷ 79) × 31.6 Second for DH5, 2DH5, 3DH5

Test Mode:		DH5 Hopping Mode				
Test Mode	Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
DH5	2441	0.17	18.133	31.60	400	PASS


1DH5 Total of Dwell= Pulse time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second

DH5 Hopping Mode

2441 MHz

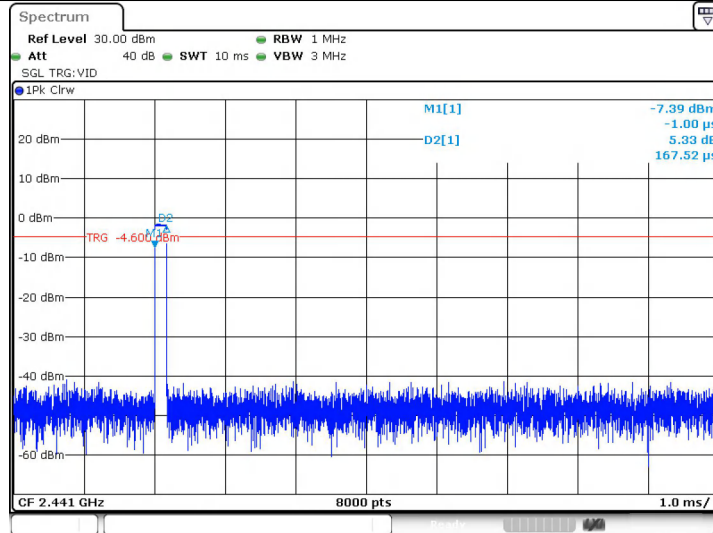

Date: 21.JAN.2021 19:40:49

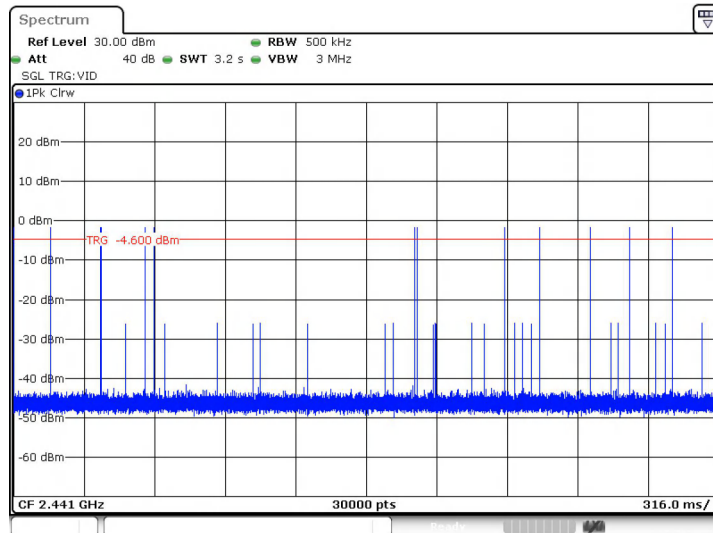


Date: 21.JAN.2021 19:40:56

Test Mode:		2DH5 Hopping Mode				
Test Mode	Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2DH5	2441	0.17	18.133	31.60	400	PASS


2DH5 Total of Dwell= Pulse time (ms) × (1600 ÷ 6 ÷ 79) × 31.6 Second

2DH5 Hopping Mode

2441 MHz

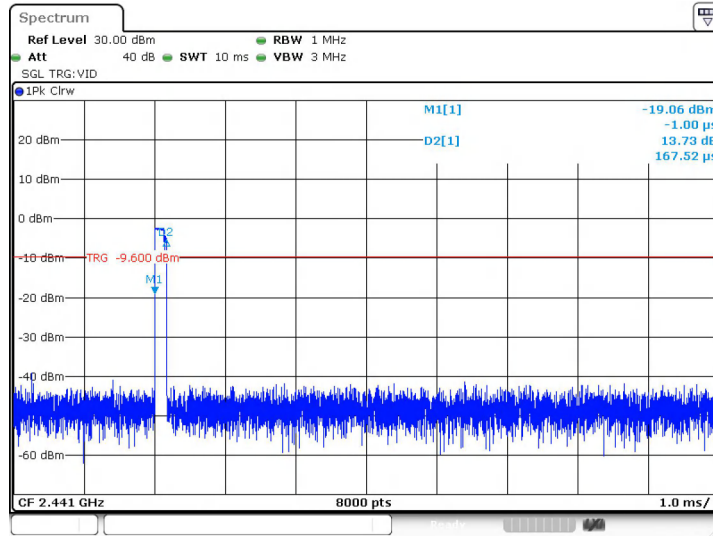

Date: 21.JAN.2021 19:49:54

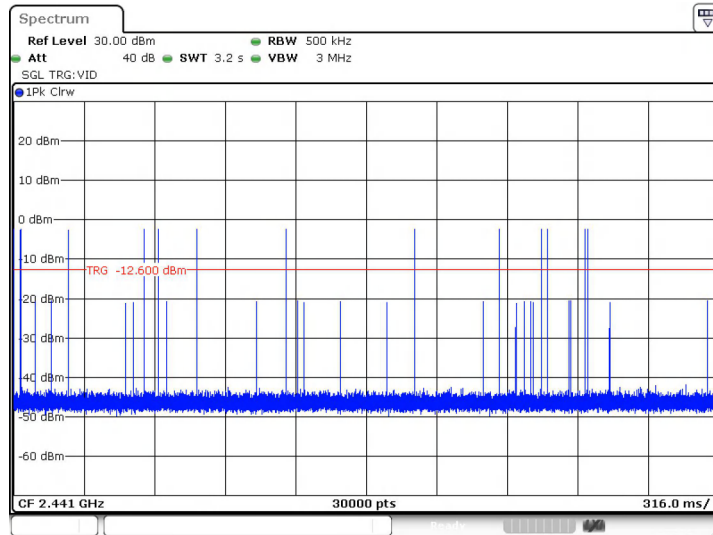


Date: 21.JAN.2021 19:50:02

Test Mode:		3DH5 Hopping Mode				
Test Mode	Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
3DH5	2441	0.16	17.066	31.60	400	PASS


2DH5 Total of Dwell= Pulse time (ms) × (1600 ÷ 6 ÷ 79) × 31.6 Second

3DH5 Hopping Mode

2441 MHz

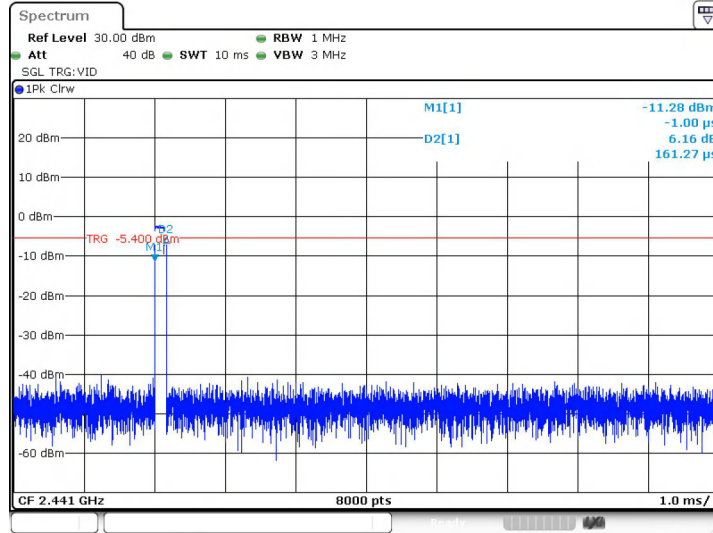

Date: 21.JAN.2021 19:57:57

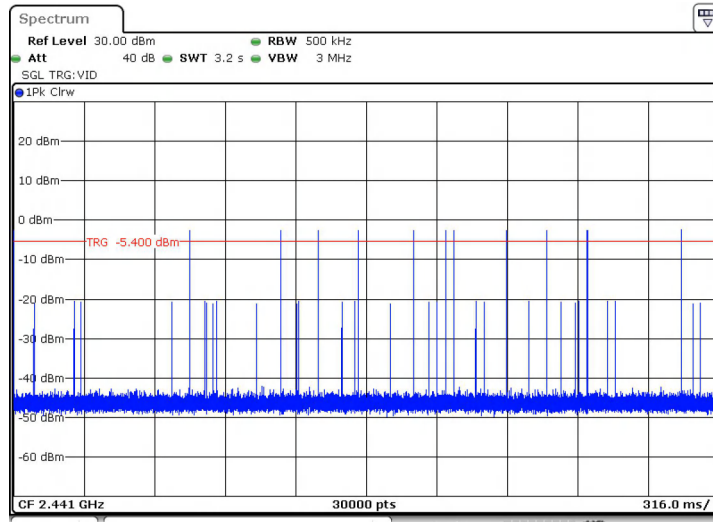

Date: 21.JAN.2021 19:58:04


3.8. Band Edge and Spurious Emission (Conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

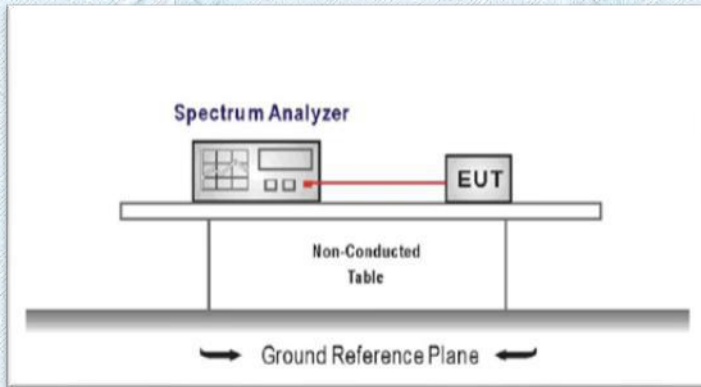

TEST PROCEDURE

1. The Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 - RBW= 100 KHz, VBW≥RBW
 - Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.


TEST MODE:

Please refer to the clause 2.3.

TEST RESULTS


DH5

CH00-Bandedge

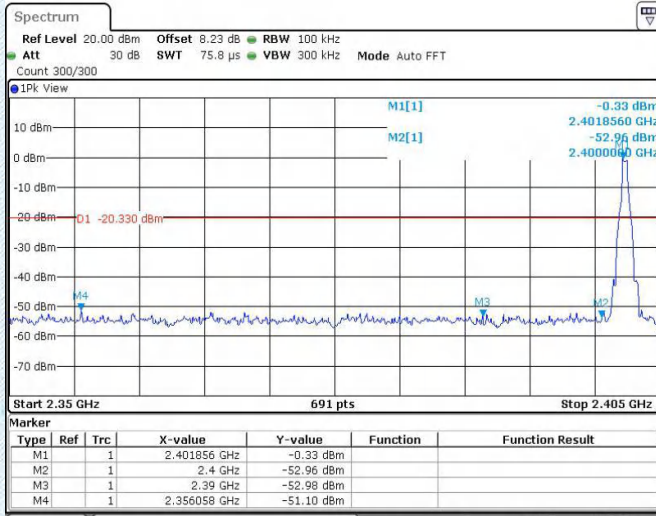


Date: 10.JUN.2021 12:21:01

CH78-Bandedge

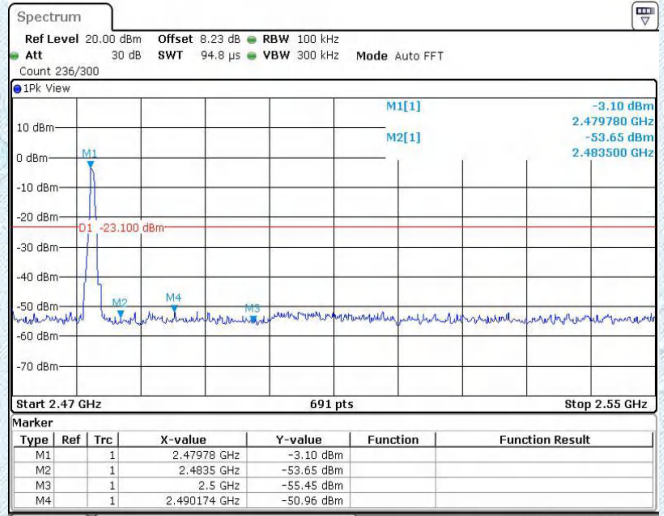


Date: 10.JUN.2021 12:36:46

Non-Hopping

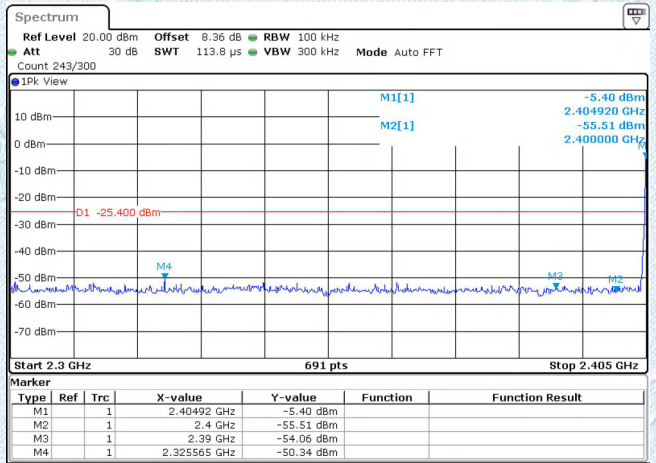

Date: 10.JUN.2021 20:01:47

Non-Hopping

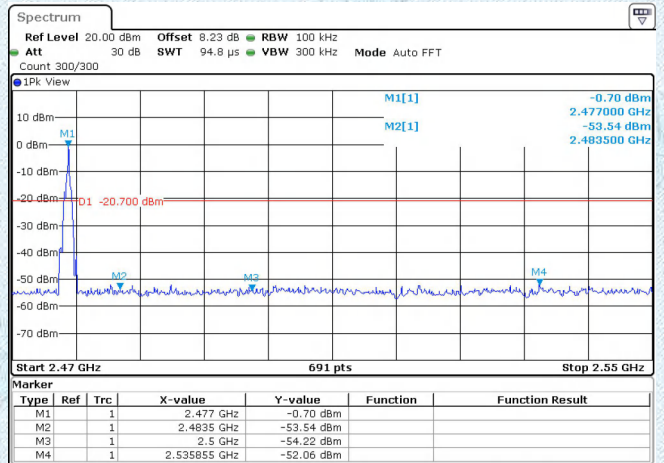


Date: 10.JUN.2021 10:04:52

Hopping


Hopping

DH5

CH00-SE

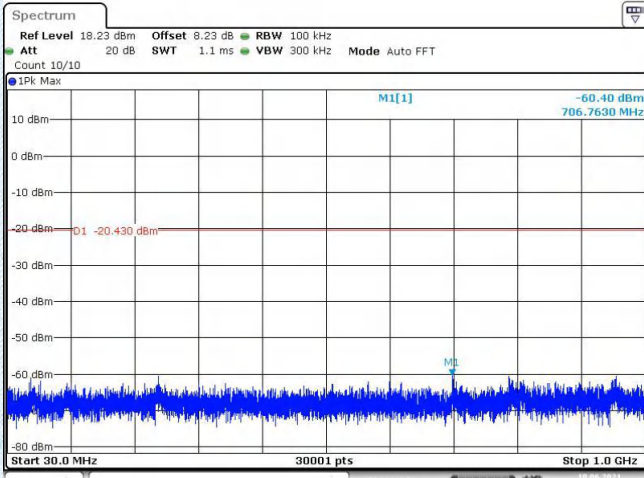


Date: 10.JUN.2021 12:21:35

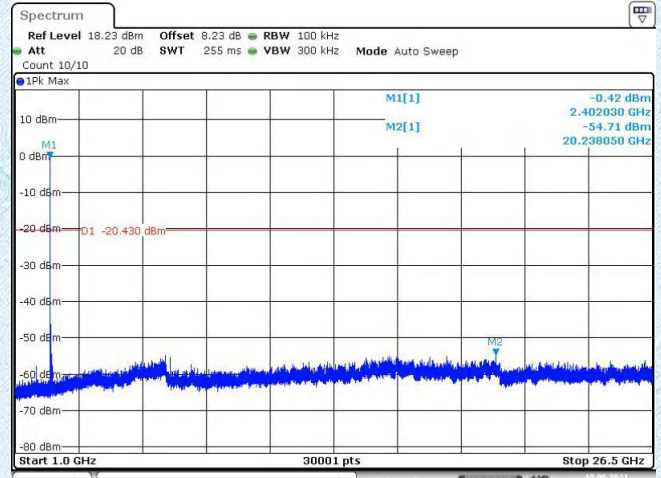


Date: 10.JUN.2021 12:21:58

CH39-SE

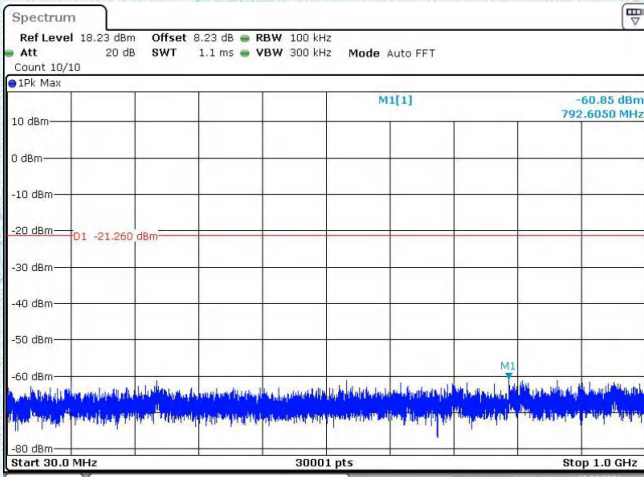


Date: 10.JUN.2021 12:34:43

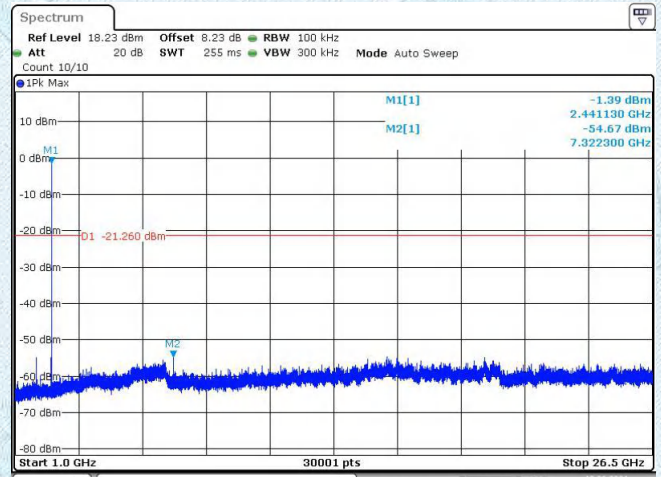


Date: 10.JUN.2021 12:35:06

CH78-SE

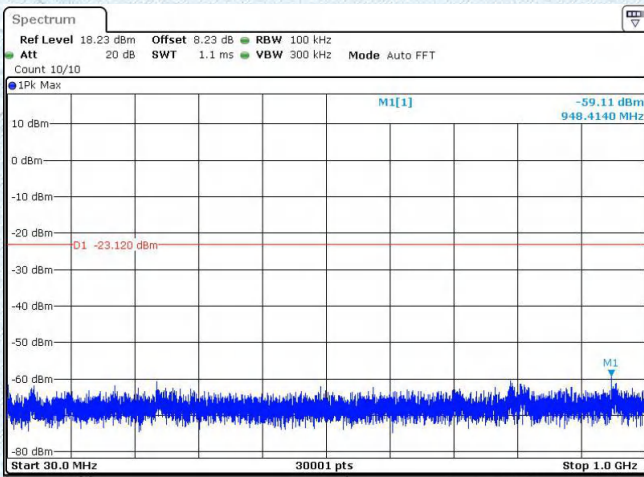


Date: 10.JUN.2021 12:37:50

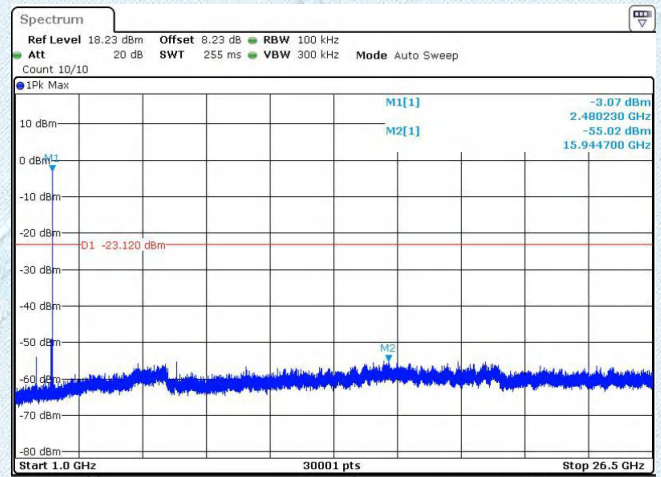

Date: 10.JUN.2021 12:38:12


2DH5

CH00-Bandedge

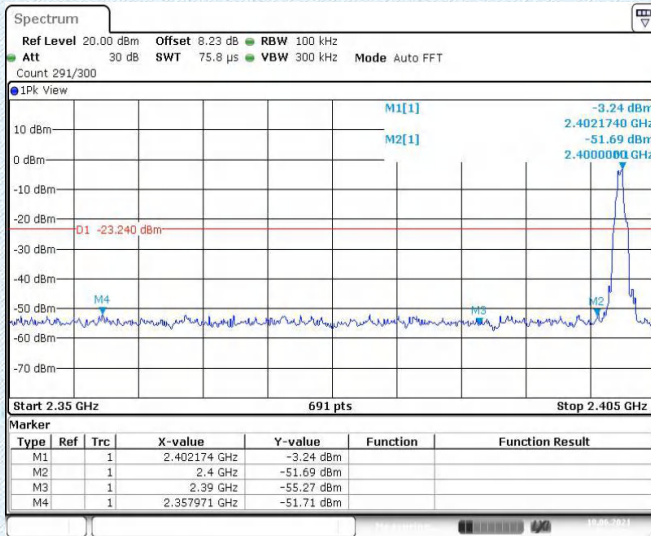


Date: 10.JUN.2021 12:39:55

CH78-Bandedge

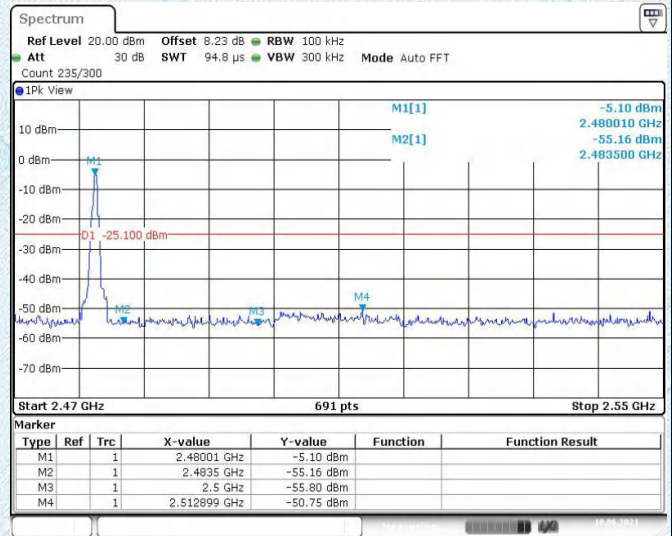


Date: 10.JUN.2021 12:45:28

Non-Hopping

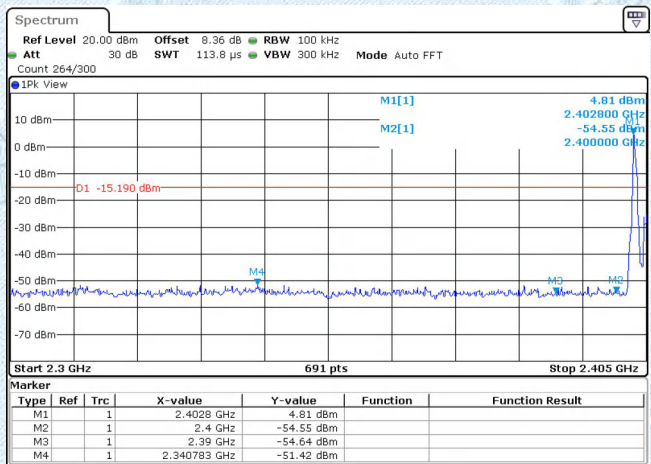

Date: 10.JUN.2021 19:41:16

Non-Hopping

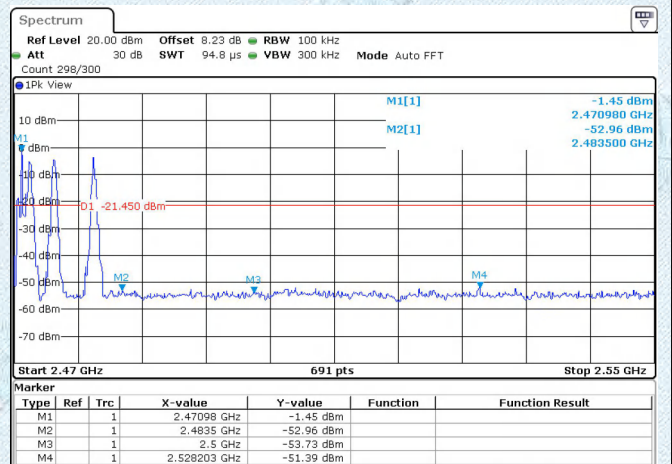



Date: 10.JUN.2021 10:15:52

Hopping



Hopping

2DH5



CH00-SE

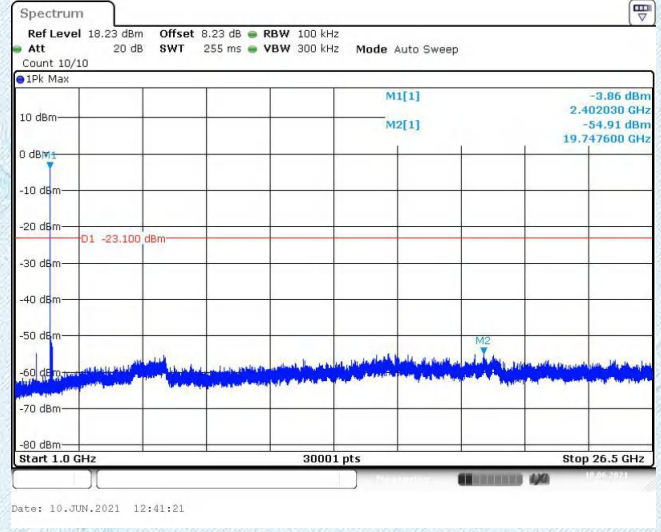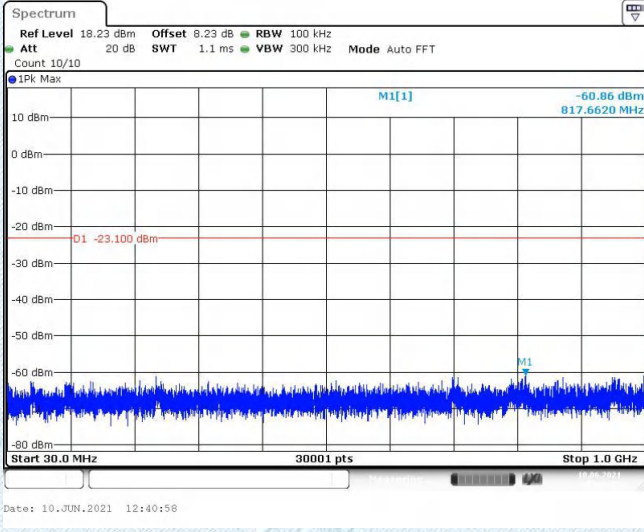

CH39-SE

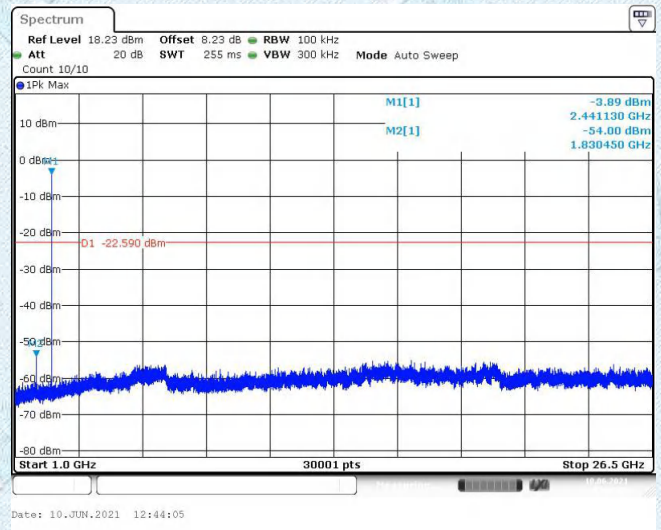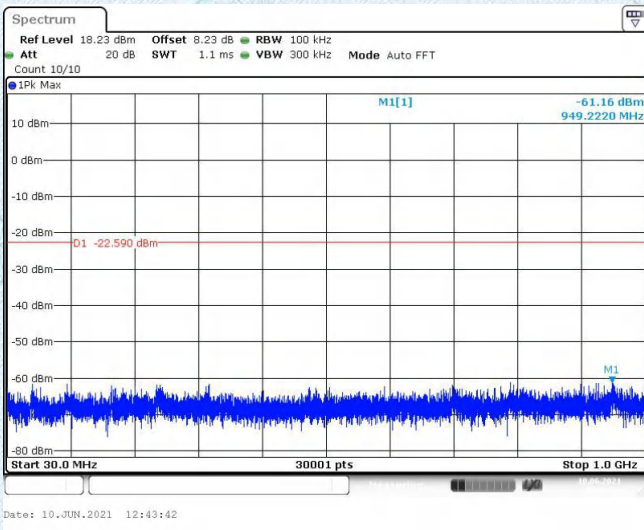


CH78-SE

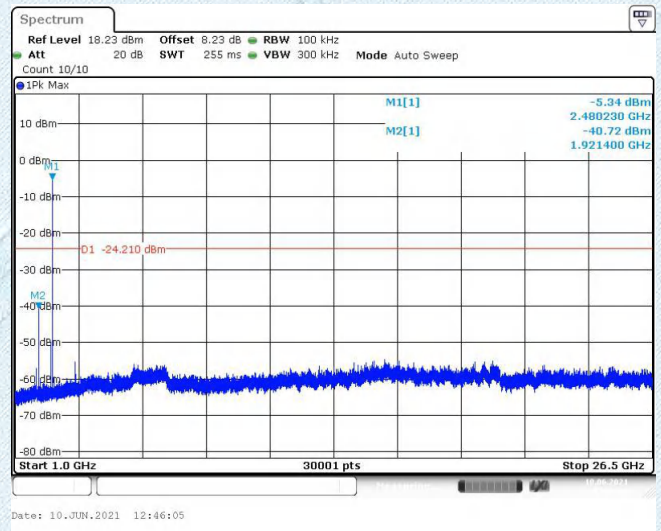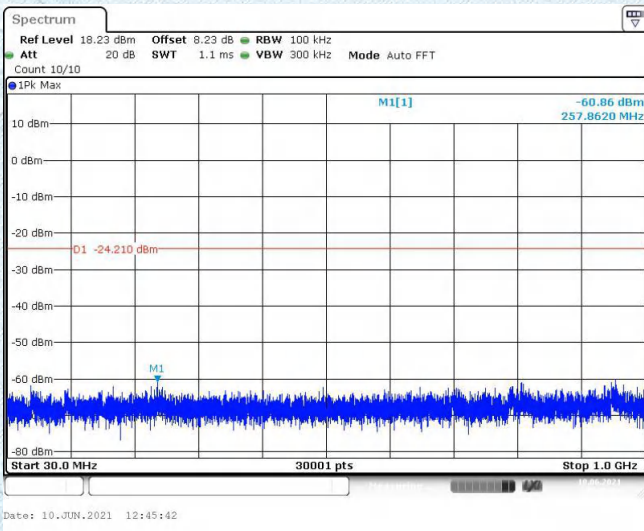


3DH5

CH00-Bandedge

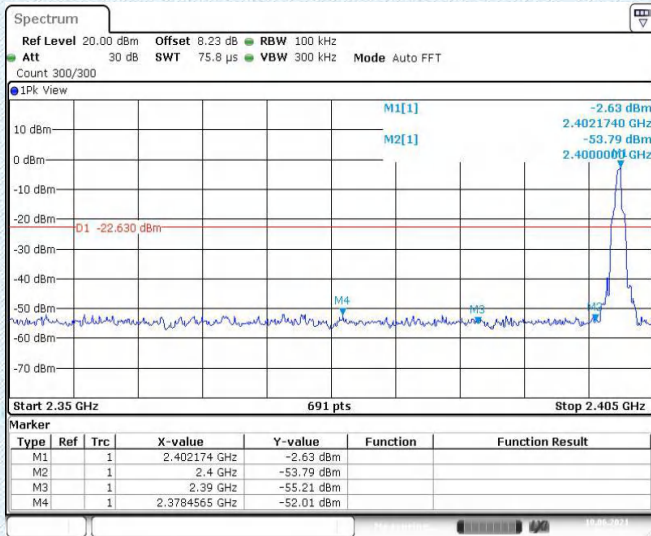


Date: 10.JUN.2021 12:47:43

CH78-Bandedge

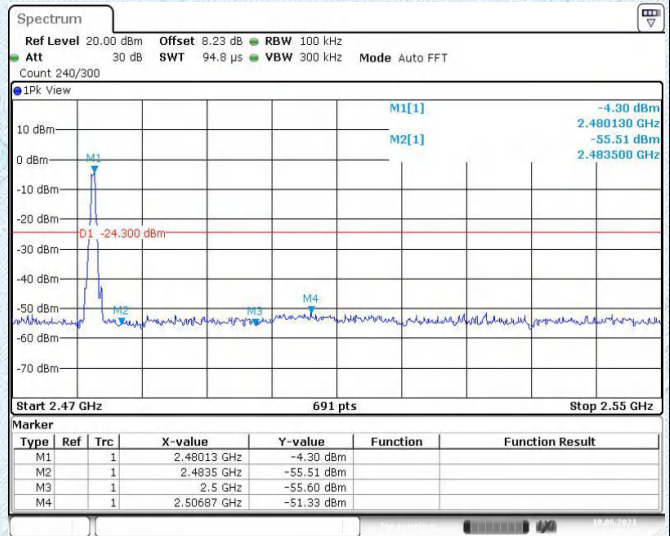


Date: 10.JUN.2021 12:52:22

Non-Hopping

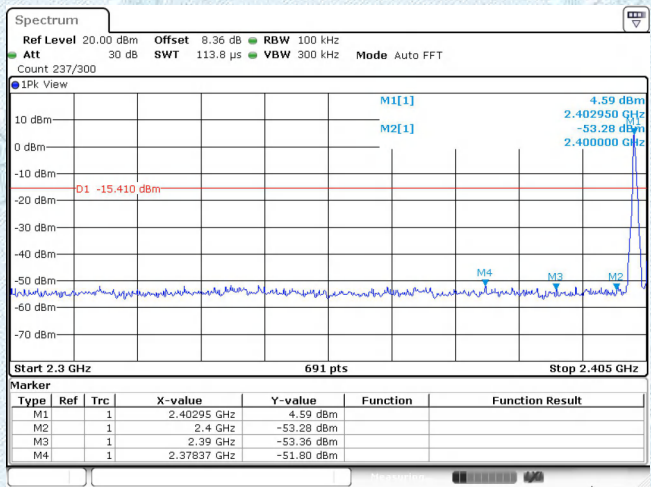

Date: 10.JUN.2021 19:50:20

Non-Hopping

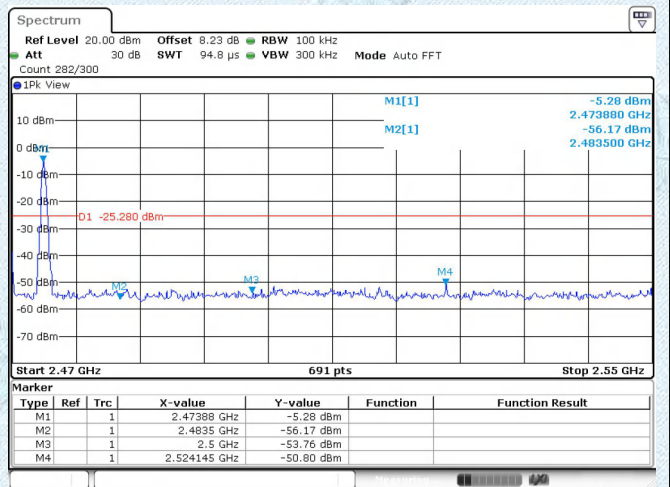



Date: 10.JUN.2021 10:11:14

Hopping



Hopping

3DH5



CH00-SE

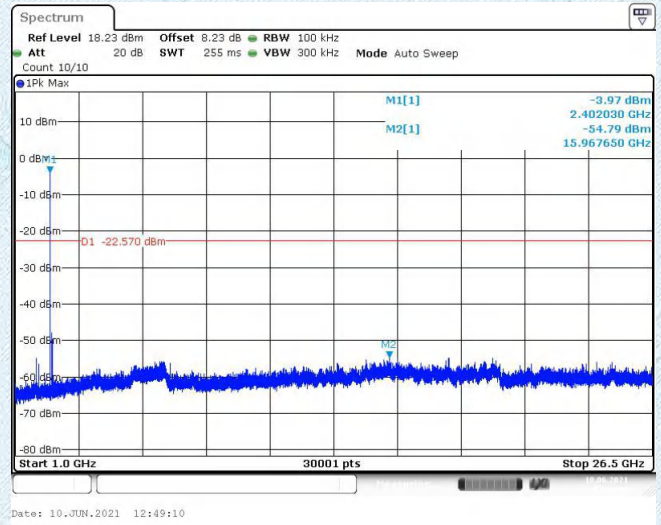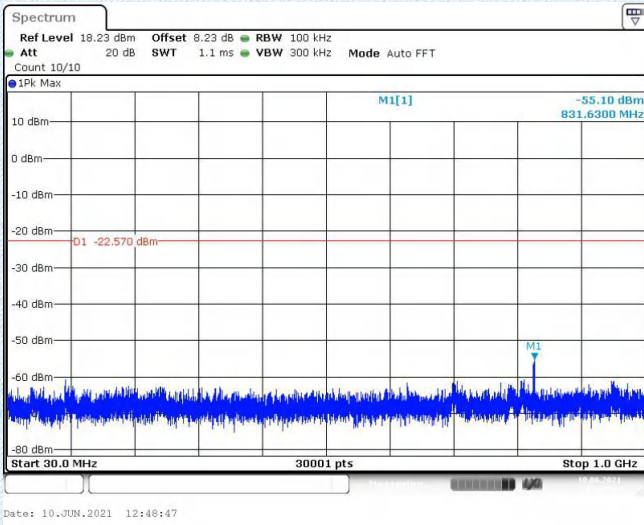

CH39-SE

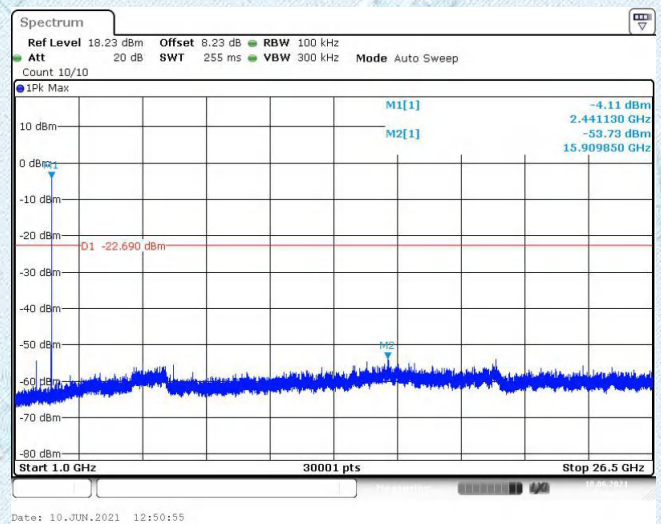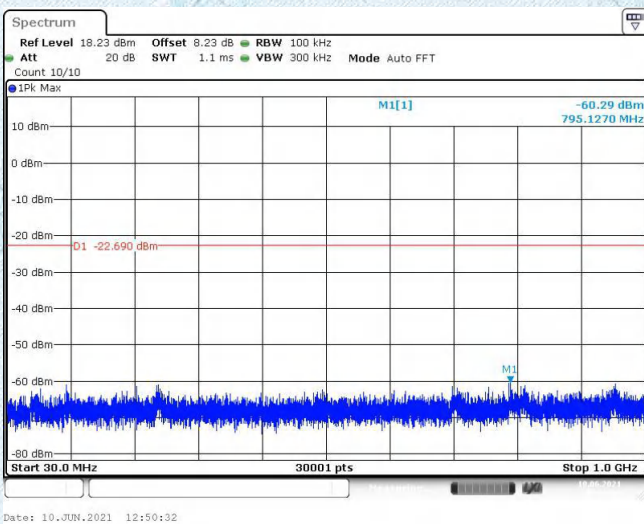

CH78-SE

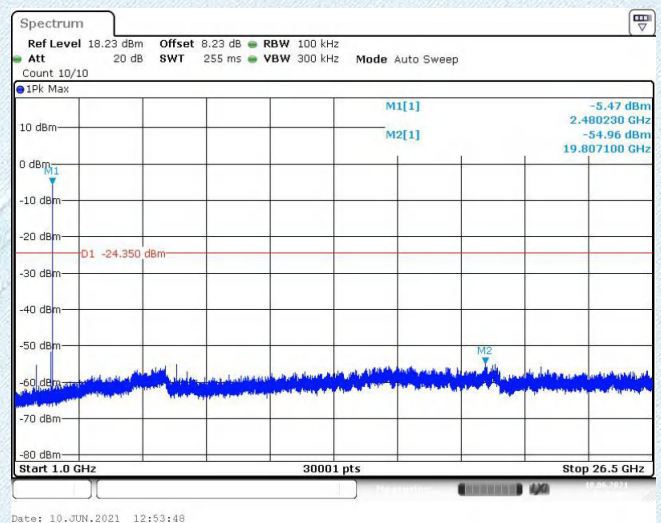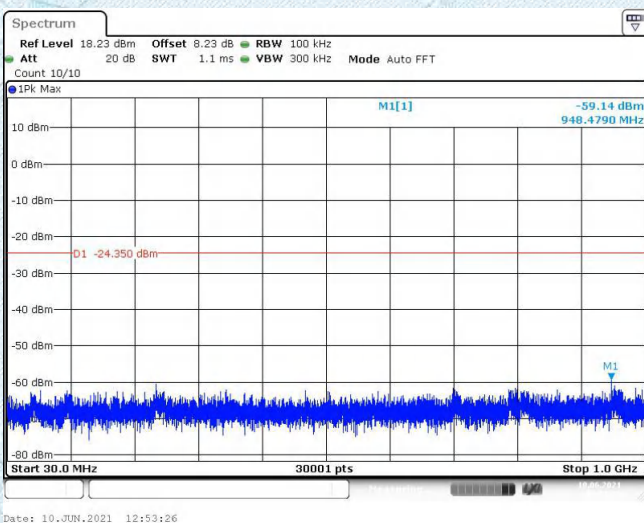


3.9. Band Edge Emissions(Radiated)

Limit

Restricted Frequency Band (MHz)	(dBuV/m)(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

Note: All restriction bands have been tested, only the worst case is reported.

Test Configuration

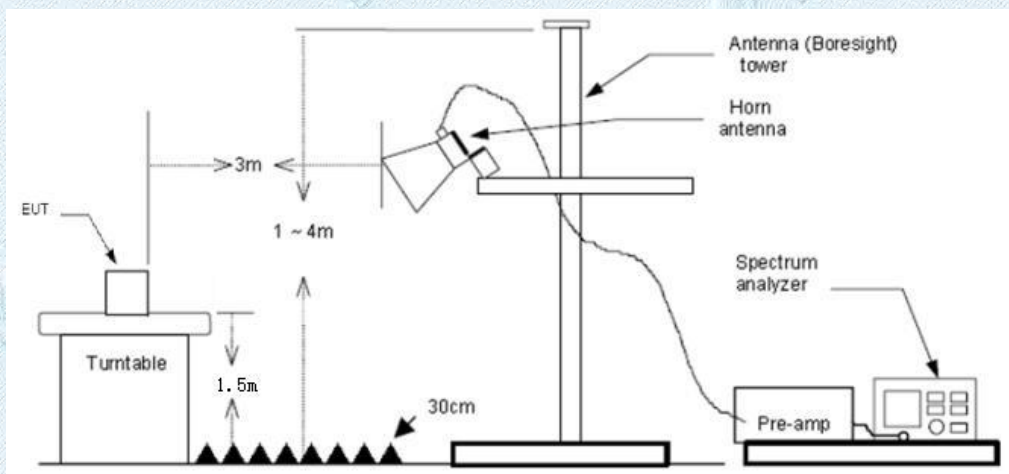

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
 RBW=1MHz, VBW=3MHz PEAK detector for Peak value.
 RBW=1MHz, VBW=10Hz with Average Detector for Average Value.


Test Mode

Please refer to the clause 2.3.


Test Results

Note:

- 1.Measurement = Reading level + Correct Factor
 Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor
- 2.Pre-scan DH5, 2DH5 , 3DH5 modulation, and found the DH5 modulation which it is worse case, so only show the test data for worse case.

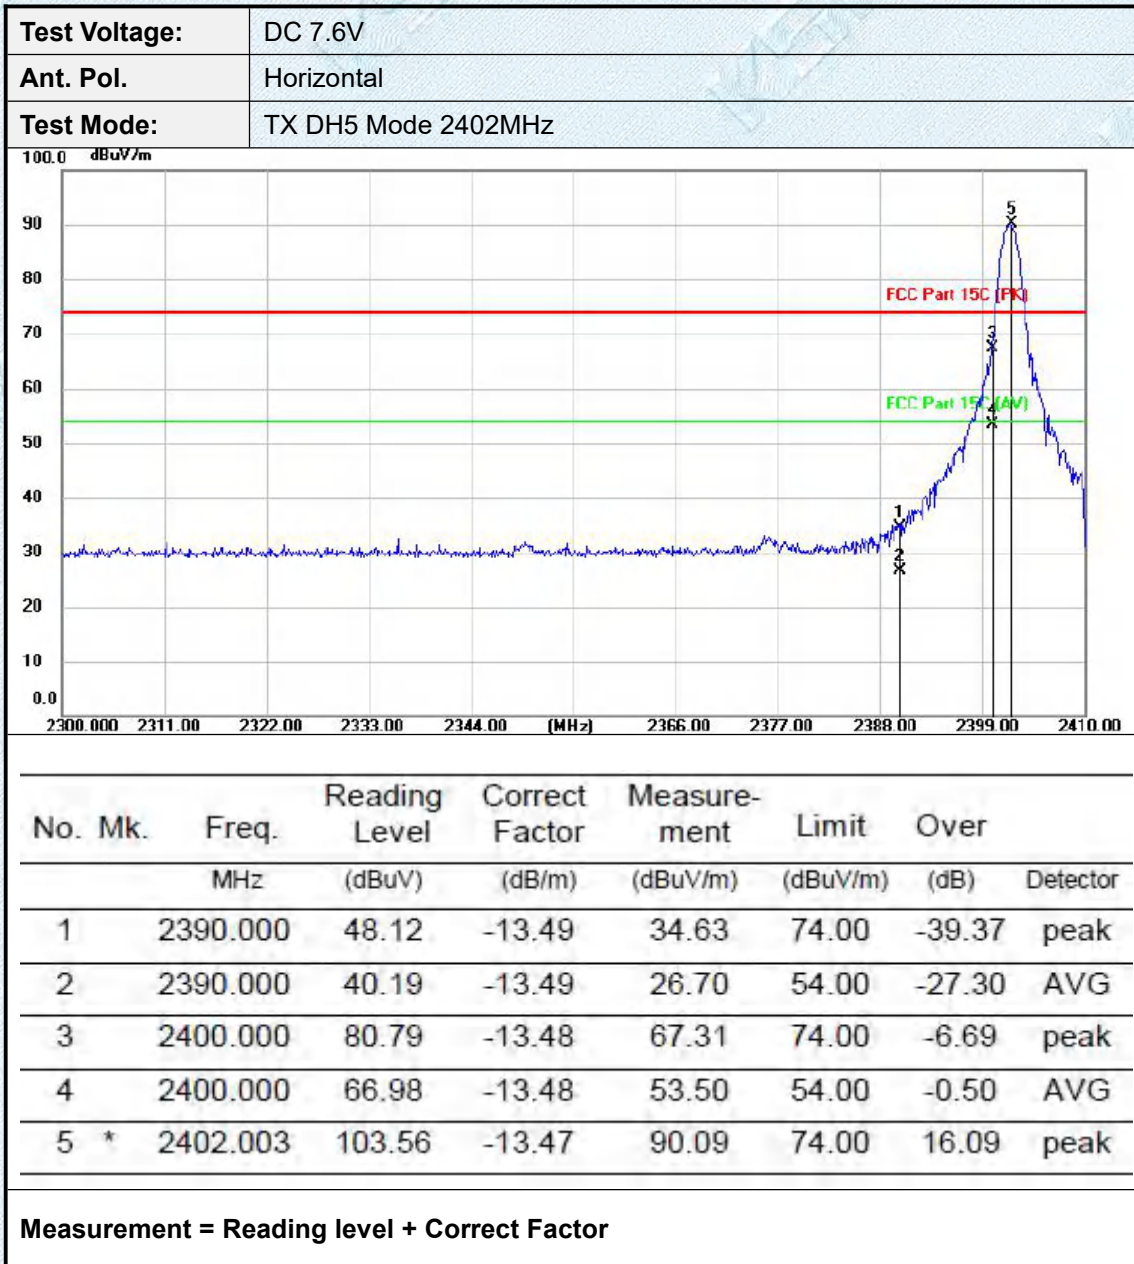

Test Voltage:	DC 7.6V
Ant. Pol.	Vertical
Test Mode:	TX DH5 Mode 2402 MHz

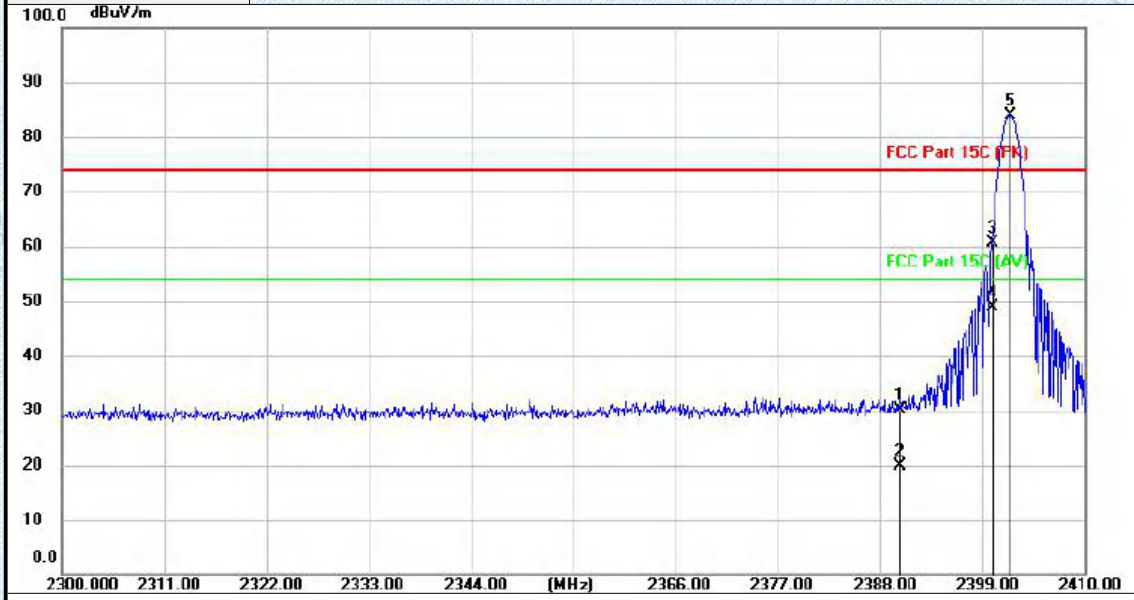

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		2390.000	43.57	-13.49	30.08	74.00	-43.92	peak
2		2390.000	33.26	-13.49	19.77	54.00	-34.23	AVG
3		2400.000	74.12	-13.48	60.64	74.00	-13.36	peak
4		2400.000	62.29	-13.48	48.81	54.00	-5.19	AVG
5	*	2401.904	97.45	-13.47	83.98	74.00	9.98	peak

Measurement = Reading level + Correct Factor


Test Voltage:	DC 7.6V
Ant. Pol.	Horizontal
Test Mode:	TX DH5 Mode 2480MHz



No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1	*	2480.000	102.07	-13.36	88.71	74.00	14.71	peak
2		2483.500	66.74	-13.35	53.39	74.00	-20.61	peak
3		2483.500	53.45	-13.35	40.10	54.00	-13.90	AVG

Measurement = Reading level + Correct Factor

Test Voltage:	DC 7.6V
Ant. Pol.	Vertical
Test Mode:	TX DH5 Mode 2480 MHz

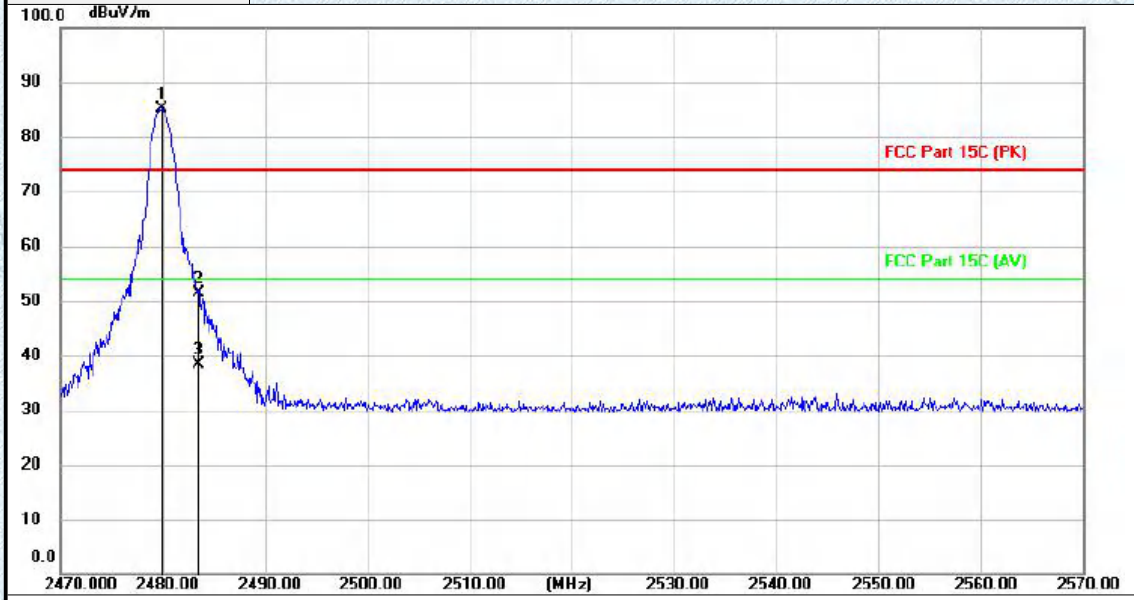

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1	*	2479.900	98.44	-13.36	85.08	74.00	11.08	peak
2		2483.500	64.62	-13.35	51.27	74.00	-22.73	peak
3		2483.500	51.81	-13.35	38.46	54.00	-15.54	AVG

Measurement = Reading level + Correct Factor

3.10. Radiated Spurious Emissions

Limit

Radiated Emission Limits (9 kHz~1000 MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Distance Meters(at 3m)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).


Test Configuration

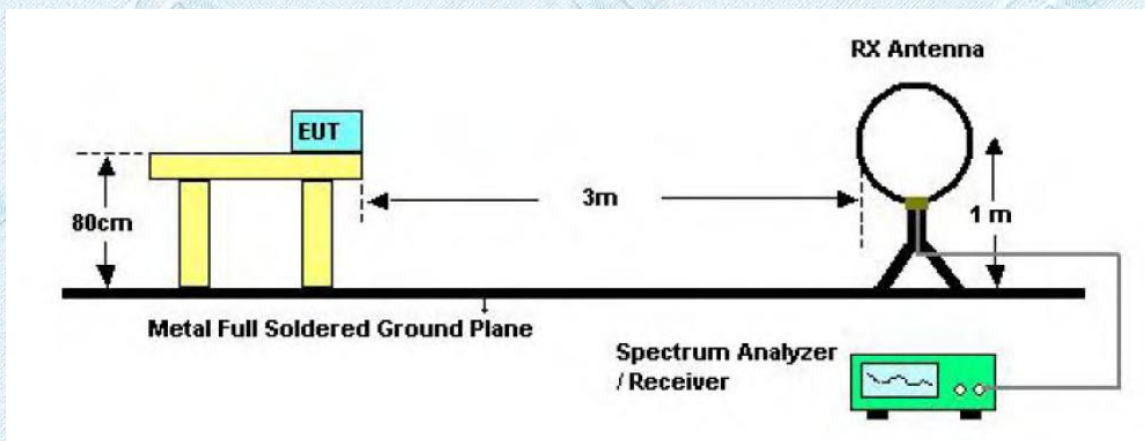

Below 30MHz Test Setup

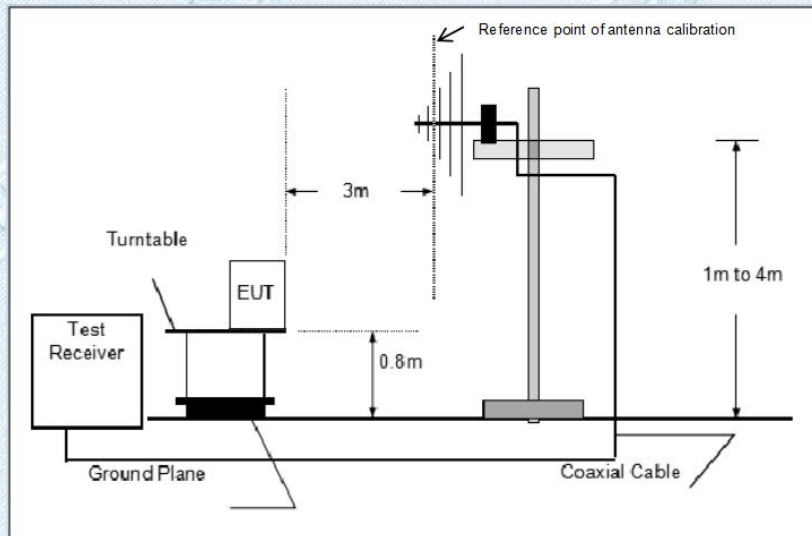

Below 1000MHz Test Setup

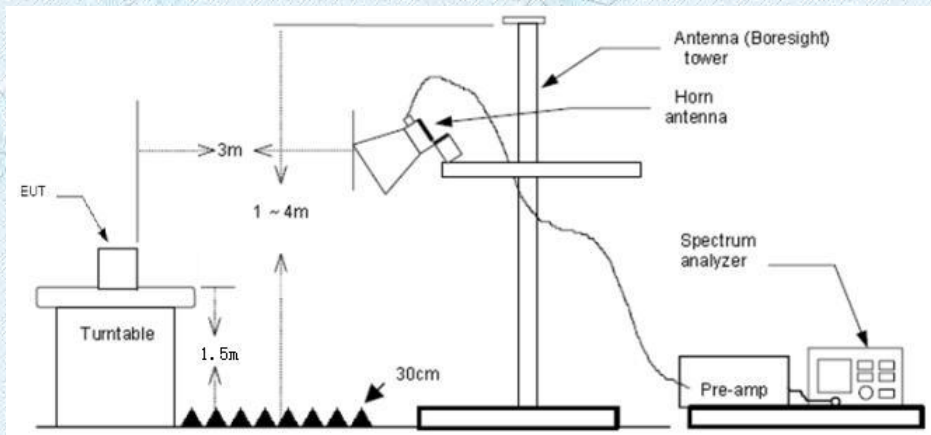

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
 RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
 If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
 RBW=1MHz, VBW=3MHz Peak detector for Peak value.
 RBW=1MHz, VBW=10Hz RMS detector for Average value.

Test Mode

Please refer to the clause 2.3.


Test Result**9 KHz~30 MHz and 18GHz~25GHz**

From 9 KHz~30 MHz and 18GHz~25GHz: Conclusion: PASS

Note:

- 1) Measurement = Reading level + Correct Factor
Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor
- 2) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
- 3) The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4) The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 5) Pre-scan DH5, 2DH5, 3DH5 modulation, and found the DH5 modulation 2402MHz which it is worse case for 30MHz-1GHz , so only show the test data for worse case.
- 6) Pre-scan DH5, 2DH5, 3DH5 modulation, and found the DH5 modulation which it is worse case for above 1GHz, so only show the test data for worse case.

30MHz-1GHz

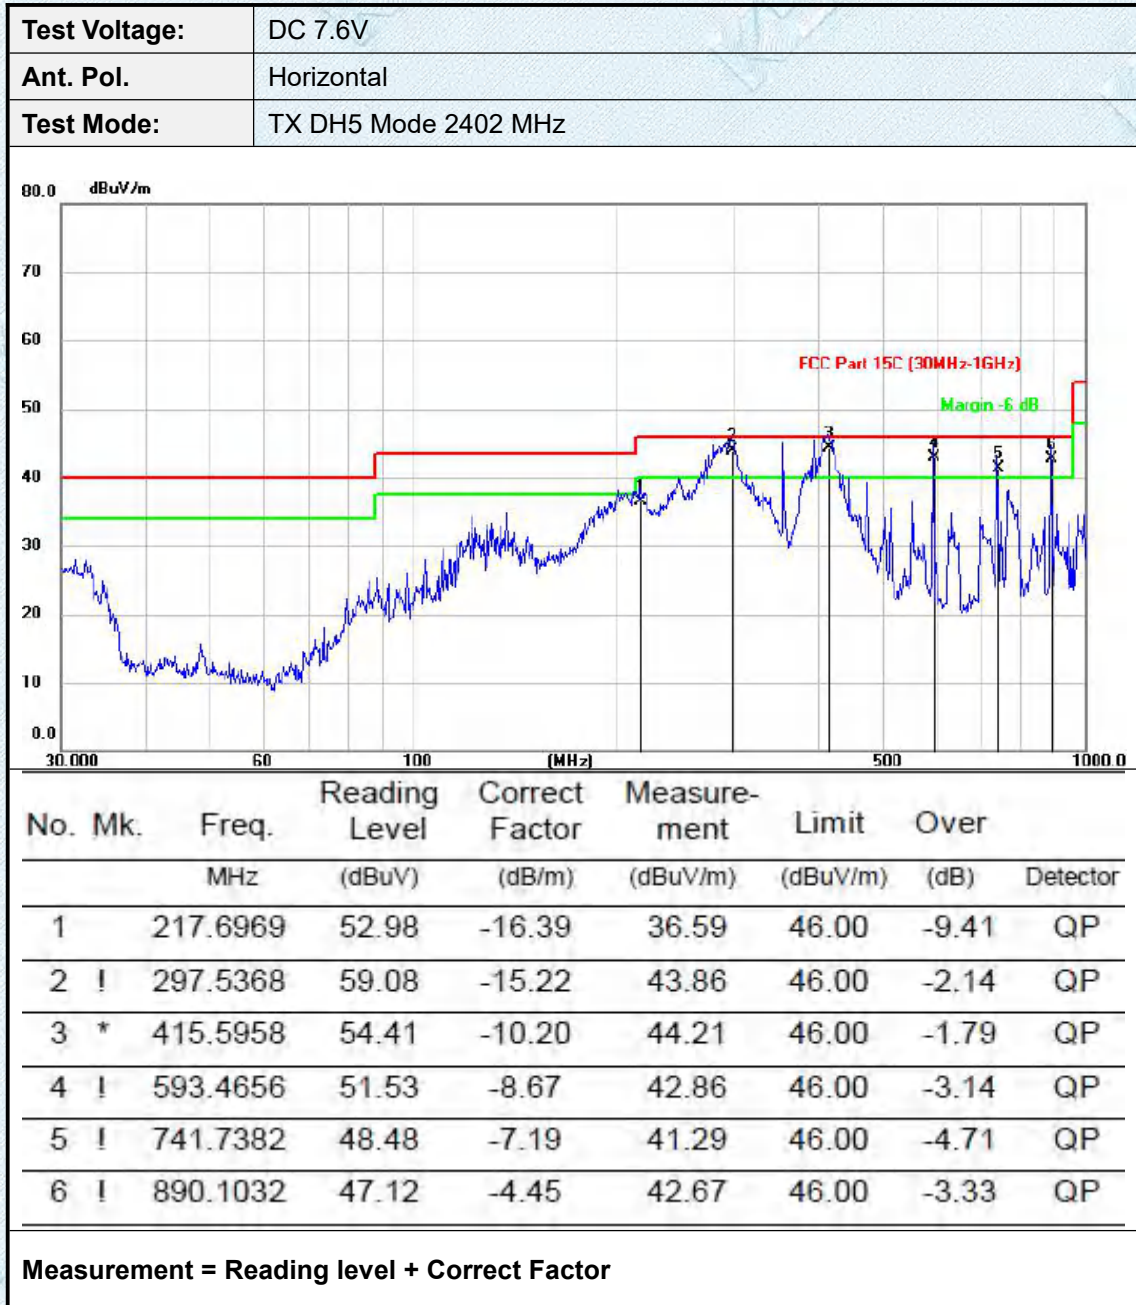

Test Voltage:	DC 7.6V
Ant. Pol.	Vertical
Test Mode:	TX DH5 Mode 2402 MHz




No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1	*	30.8535	55.75	-16.83	38.92	40.00	-1.08	QP
2		129.0144	52.66	-18.89	33.77	43.50	-9.73	QP
3		200.0557	51.74	-16.66	35.08	43.50	-8.42	QP
4	!	414.7223	50.77	-10.20	40.57	46.00	-5.43	QP
5		741.7382	46.87	-7.19	39.68	46.00	-6.32	QP
6	!	890.1032	45.32	-4.45	40.87	46.00	-5.13	QP

Measurement = Reading level + Correct Factor

Adobe 1GHz


Test Voltage:	DC 7.6V
Ant. Pol.	Horizontal
Test Mode:	TX DH5 Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

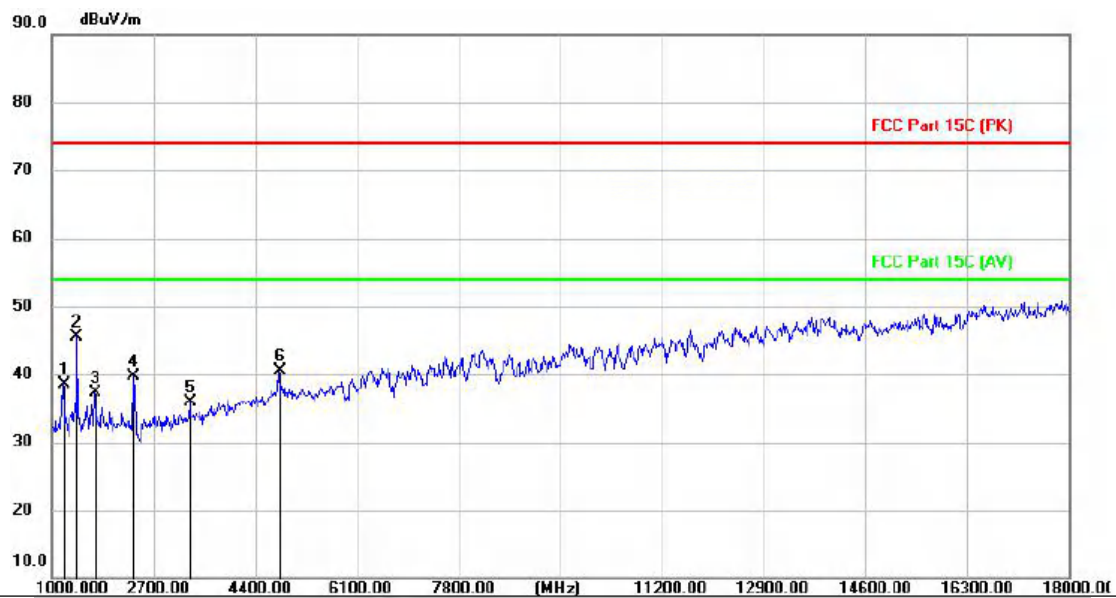

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		1198.900	50.63	-12.03	38.60	74.00	-35.40	peak
2	*	1425.000	57.34	-11.87	45.47	74.00	-28.53	peak
3		1727.600	48.69	-11.36	37.33	74.00	-36.67	peak
4		2375.300	50.56	-10.93	39.63	74.00	-34.37	peak
5		3325.600	45.90	-10.00	35.90	74.00	-38.10	peak
6		4802.900	46.48	-5.92	40.56	74.00	-33.44	peak

Measurement = Reading level + Correct Factor

Test Voltage:	DC 7.6V
Ant. Pol.	Vertical
Test Mode:	TX DH5 Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

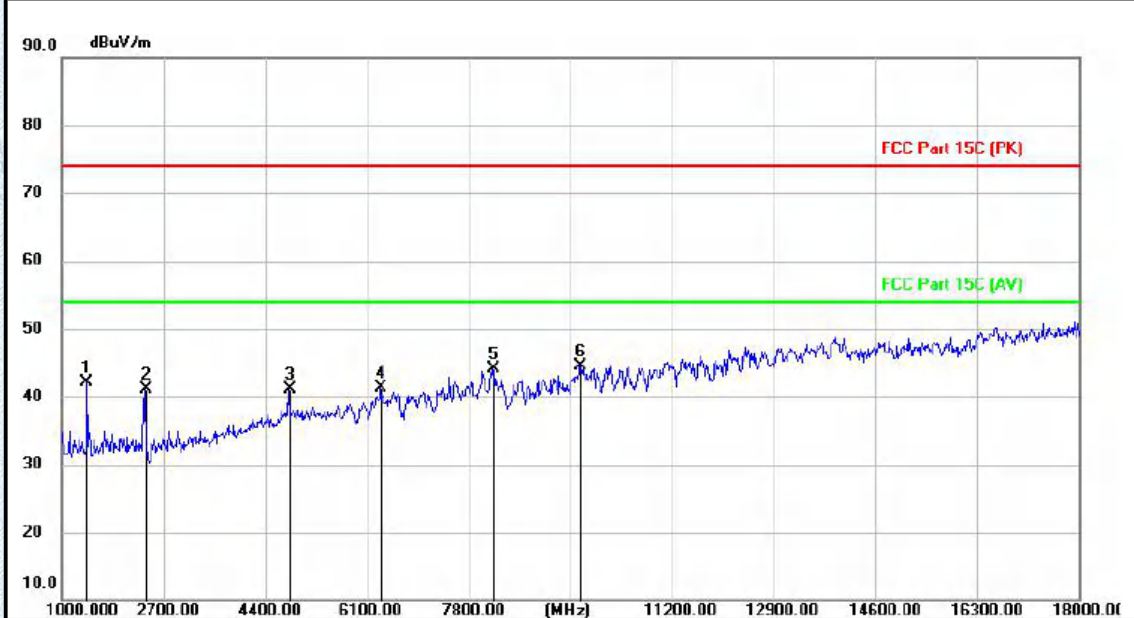

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		1425.000	53.88	-11.87	42.01	74.00	-31.99	peak
2		2402.500	52.08	-10.91	41.17	74.00	-32.83	peak
3		4804.600	47.12	-5.92	41.20	74.00	-32.80	peak
4		6324.400	43.92	-2.70	41.22	74.00	-32.78	peak
5		8199.500	42.09	2.02	44.11	74.00	-29.89	peak
6	*	9664.900	41.17	3.33	44.50	74.00	-29.50	peak

Measurement = Reading level + Correct Factor

Test Voltage:	DC 7.6V
Ant. Pol.	Horizontal
Test Mode:	TX DH5 Mode 2441MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.



No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1	*	1425.000	54.51	-11.87	42.64	74.00	-31.36	peak
2		2375.300	50.88	-10.93	39.95	74.00	-34.05	peak
3		3325.600	45.59	-10.00	35.59	74.00	-38.41	peak
4		4717.900	45.09	-6.15	38.94	74.00	-35.06	peak
5		6287.000	43.36	-2.83	40.53	74.00	-33.47	peak
6		8010.800	40.50	2.07	42.57	74.00	-31.43	peak

Measurement = Reading level + Correct Factor


Test Voltage:	DC 7.6V
Ant. Pol.	Vertical
Test Mode:	TX DH5 Mode 2441MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.



No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		1251.600	48.89	-12.00	36.89	74.00	-37.11	peak
2		1425.000	54.14	-11.87	42.27	74.00	-31.73	peak
3		2028.500	46.58	-11.06	35.52	74.00	-38.48	peak
4		2402.500	51.13	-10.91	40.22	74.00	-33.78	peak
5		4729.800	44.64	-6.12	38.52	74.00	-35.48	peak
6	*	8199.500	41.19	2.02	43.21	74.00	-30.79	peak

Measurement = Reading level + Correct Factor

Test Voltage:	DC 7.6V
Ant. Pol.	Horizontal
Test Mode:	TX DH5 Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

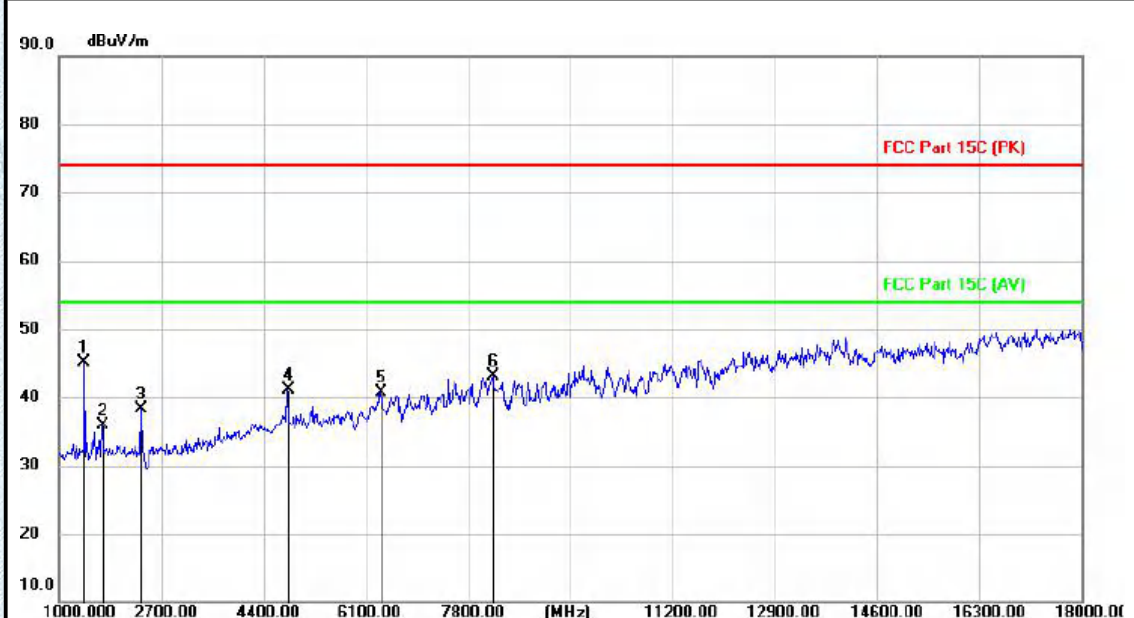

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1	*	1425.000	56.89	-11.87	45.02	74.00	-28.98	peak
2		1727.600	47.18	-11.36	35.82	74.00	-38.18	peak
3		2375.300	49.23	-10.93	38.30	74.00	-35.70	peak
4		4802.900	47.08	-5.92	41.16	74.00	-32.84	peak
5		6346.500	43.42	-2.63	40.79	74.00	-33.21	peak
6		8211.400	41.15	2.02	43.17	74.00	-30.83	peak

Measurement = Reading level + Correct Factor

Test Voltage:	DC 7.6V
Ant. Pol.	Vertical
Test Mode:	TX DH5 Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.



No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		1425.000	54.34	-11.87	42.47	74.00	-31.53	peak
2	*	1836.400	57.97	-11.20	46.77	74.00	-27.23	peak
3		2375.300	51.15	-10.93	40.22	74.00	-33.78	peak
4		4804.600	46.10	-5.92	40.18	74.00	-33.82	peak
5		6618.500	42.67	-1.78	40.89	74.00	-33.11	peak
6		8022.700	41.73	2.06	43.79	74.00	-30.21	peak

Measurement = Reading level + Correct Factor

3.11. Pseudorandom Frequency Hopping Sequence

LIMIT


FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEST RESULTS


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

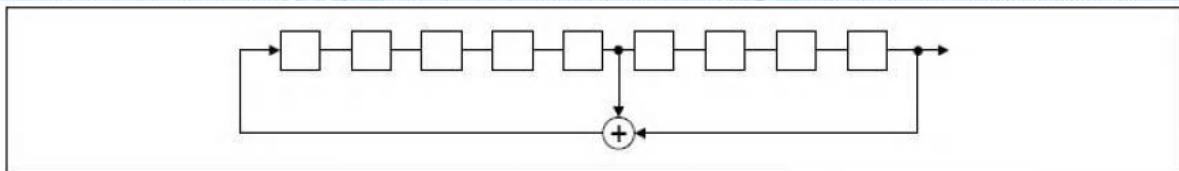

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

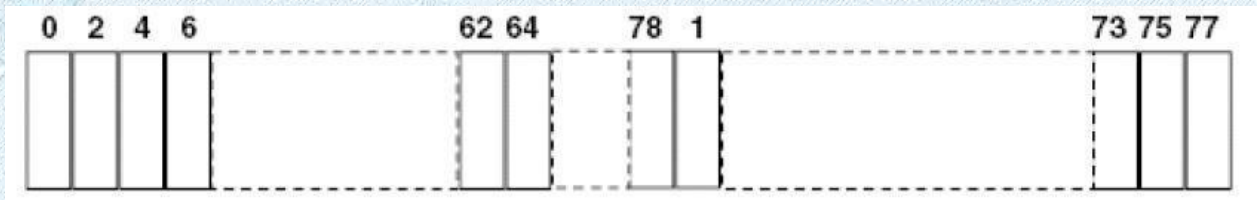

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

4.EUT TEST PHOTOS

Reference to the document No.: Test Photos.

5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL

Reference to the document No.: External Photos and Internal Photos.

*****THE END*****