

# Specification & User Manual

Product Name : Wireless Earbuds      Model: Sport

Brand Name: @UDIO

## MS03B Basic Specifications

- Size:  $\varnothing$  11.6 mm  $\times$  24.5 mm
- Length: Short part :110mm, Long part:450mm
- Weight: 17g (Bare metal )
- Charging port: **Type-C Port**
- Keys: 3 (MFB key, volume up + on a composite key , volume down + under a composite key )
- earplugs: S, M, L 3 Size
- Battery: Rechargeable lithium polymer battery 3.7V; 40mAh\*2
- Charging Current: DC 5V/80mA
- Charger Output: 5V/0.5 ~ 1.0A
- Charge Indicator: Red LED bright (Charging) / Blue LED bright (Charging completed)
- Standby time: 160 hours or more
- Continuous talk time: 5 hours or more
- Continuous music time: 6 hours or more
- Charging time: about 2 hours
- Volume control / Changes in the amount of every segment can : order 16 / every segment can amount 1.5dB Changes
- working battery status LED indicates : battery voltage is below 3.3V ( battery capacity is less than about 15% ) when the red LED flashes , and a beep , lower than 3.1V ( battery level less than about 5% ) automatic shutdown
- Operating temperature: Charging 0 ~ 40 °C, charging than -20 ~ 60 °C.
- Storage temperature : -40 ~ 80 °C.

## Speaker and MIC parameters

- Speaker Specifications / mode :  $\Phi$ 6.0mm, Dynamic
- Distortion : 1 % or less
- Maximum input power : 90mW
- Impedance : 16Ω/typ
- Frequency (Hz): 20Hz ~ 20KHz
- MIC Sensitivity : -42 ± 3dB

## Bluetooth parameters


- Bluetooth version: V4.1
- Solution: CSR8635
- Support Profile: HSP, HFP, A2DP, AVRCP

- The remote control of the player: MFB ( play / pause / stop ) ; volume down + previous / next track volume + plus
- Device Name: Sport
- Pass: 0000
- RF transmitter: class II (-6dBm ~ +4 dBm)
- Receive sensitivity:-92dBm
- Transmission Range (Hz): 2.40GHz ~ 2.48GHz
- Communication distance: 10m

## Operating Instructions (Hall switch inside)


### Power On

When the headset is off, pull open the headset , the LED indicator will flash slowly in blue once time. You will hear the word “Power on” from the speaker of the headset. The headset will be paired with the last connected bluetooth device or mobile phone automatically when turned on.

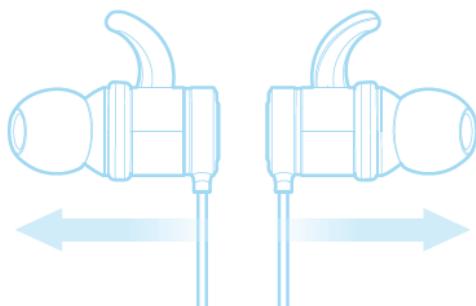

### Power Off

When the headset is on, closed to the headset, the LED indicator will flash slowly in red once time. You will hear the word “power off” from the speaker of the headset. The headset will disconnect from your phone devices when turned off.

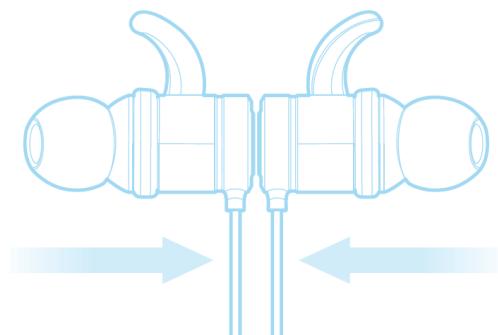

## **Pairing Mode**

Enter in pairing mode automatically 2 seconds after power on, the LED indicator flashes red and blue in alternating colors. You will hear the word “Pairing” from the speaker of the headset.

Note: Headset will connect with the last paired device. If you want to pair the headset with a new phone device, please power off the headset and enter into pairing mode.

## **Easy Connect Function**

If the headset doesn't connect with any phone when it's on, you will need to enter the headset into pairing mode by pressing volume- and volume+ concurrently.

## **Answering Calls**

If a call comes in when listening to music or headset is standing by, press the MFB to answer the incoming call. You will hear the words “Call Answered” from the speaker of the headset. If the music is playing, it will pause automatically during the call. After finishing your call, the music will start playing automatically.

## **Reject Calls**

If a call comes in when listening to music or headset is standing by, press and hold the MFB for 2 seconds to reject the incoming call. You will hear the words “Call Rejected” from the speaker.

## **End Calls**

Press the MFB to terminate when you finished your call, you will hear the words “Call Terminated”.

## **Volume**

To adjust the volume when talking on the phone, press the volume+ or volume- to make volume go up or down. When you reach the max/min volume, you will hear a warning tone.

## **Last Number Redial**

When listening to music or headset is standing by, double click the MFB to redial the last number. You will hear the words “Last Number Redial” from the speaker of the headset. If you are listening to music, it will pause automatically during the call.

## **Mute**

When talking on the phone, press and hold volume+ or volume- for 2 seconds to mute your microphone. You will hear the caller, but the caller will not hear you.

Note: There will be a warning tone every 3 seconds, reminding you that you are in mute mode.

## **Quit Mute**

Hold volume+ or volume- for 2 seconds to exit mute mode.

### **Switching Between Your Mobile Phone and Headset**

When talking on the phone, double-click the MFB to switch the voice from your headset to your mobile phone. By double clicking the MFB again, the voice will switch back to the headset. You will hear the words “Transfer Audio” from the speaker of the headset.

### **Reconnect**

When the headset is disconnected from your mobile phone, you will hear the words “Your Device is Disconnected”. If you press the MFB, it will reconnect. You will hear the words “Your Device is Connected” from the speaker of the headset.

Note: Some devices may have a prompt screen, that will ask you if you would like to pair your device.

### **Voice-Command Dial**

If your mobile phones supports this function, press and hold Vol+ or Vol- for 2 seconds to activate voice command. You will hear “voice dial” from the speaker of the headset. By re-pressing and re-holding Vol+ or Vol- for 2 seconds during the voice dial mode, voice dial will be canceled.

Note: Please refer to the manual of your mobile phone for voice-command dial support.

### **Pause and Restart Music**

When listening to music, click MFB to pause music and click MFB again to restart music.

### **Play Previous Song**

Press volume- for 2 seconds to play previous song.

### **Play Next Song**

Press volume+ for 2 seconds to play next song.

### **Connect with 2 Mobile Phones**

- A. First disconnect the Bluetooth device from your phone if it is already connected.
- B. Press volume+ and volume- concurrently to put the headset in pairing mode.
- C. Turn on and search Bluetooth device on your second phone until you find “MS02D” and select to begin pairing.
- D. Please pair again with your first mobile phone device.
- E. Now you should have two mobile phones connected with the headset.

### **Transfer Calls**

When you’re talking on the phone and receive another incoming call, press the MFB for 2 seconds to reject the incoming call. If you click V+ and V- concurrently, you will receive the incoming call. Your first call will be placed on hold. When you click V+ and V- concurrently again, you will switch back to your first call. You should hear a beep. During

this time your second call will be placed on hold. You can also end the call by clicking the MFB.

Note: This operation requires that your mobile phone supports the call waiting feature.

### **LED Indicator Status**

Charging	Red LED Light
Charging Complete	Blue LED Light
Power On (Connected)	Blue LED light flashes once every 3 seconds
Power On (Talking)	Blue LED light flashes twice every 4 seconds
Power On (Incoming Call)	Blue LED light flashes continuously
Music Playing	Blue LED light flashes twice every 4 seconds
Power On (Not Connected)	Blue LED light flashes once every 5 seconds
Battery Low	Red LED light flashes twice every 4 seconds with the words "Battery Low"
Pairing Mode	LED light flashes in red and blue alternately

Notes:

- 1) It will turn off automatically after 5 minutes if without any connection with mobile phone when it turns on.
- 2) Pairing time: 3 minutes. It will quit the pairing mode automatically after 3 minutes if without any connection with mobile phone when it is in the state of pairing.
- 3) In addition, it can show the battery state on Apple devices

### **Article 12**

Without permission granted by the NCC, any company, enterprise, or user is not allowed to change frequency, enhance transmitting power or alter original characteristic as well as performance to a approved low power radio-frequency devices.

### **Article 14**

The low power radio-frequency devices shall not influence aircraft security and interfere legal communications; If found, the user shall cease operating immediately until no interference is achieved.

The said legal communications means radio communications is operated in compliance with the Telecommunications Act.

The low power radio-frequency devices must be susceptible with the interference from legal communications or ISM radio wave radiated devices.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation.