



TEST REPORT

APPLICANT	:	Gudsen Technology Co., Ltd
PRODUCT NAME	:	MOZA iFocus Wireless Follow Focus Motor
MODEL NAME	:	MOZA iFocus Wireless Follow Focus Motor
BRAND NAME	:	MOZA
FCC ID	:	2AMJR-IFOCUSMOTOR
STANDARD(S)	:	47 CFR Part 15 Subpart C
RECEIPT DATE	:	2018-11-02
TEST DATE	:	2018-11-15 to 2018-11-30
ISSUE DATE	:	2018-12-06

Edited by:

Leng Maoyi Zeng Xiaoving (Rapporte

Approved by:

Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555





DIRECTORY

1. T	Technical Information ·······	4
1.1.	Applicant and Manufacturer Information	4
1.2.	Equipment Under Test (EUT) Description	4
1.3.	Test Standards and Results	5
1.4.	Environmental Conditions	5
2. 4	7 CFR Part 15C Requirements	6
2.1.	Antenna requirement	6
2.2.	Peak Output Power ······	6
2.3.	6dB Bandwidth	D
2.4.	Conducted Spurious Emissions and Band Edge1	3
2.5.	Power spectral density (PSD)17	7
2.6.	Conducted Emission 20	D
2.7.	Restricted Frequency Bands24	4
2.8.	Radiated Emission28	B
Ann	ex A Test Uncertainty3	5
Ann	ex B Testing Laboratory Information	6





Change History				
Version Date		Reason for change		
1.0	2018-12-06	First edition		



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Gudsen Technology Co., Ltd
Applicant Address:	F\6,10th Building,Jiuxiang Ling Industrial Park,Ave Xili ,Nanshan
	District, Shenzhen, China
Manufacturer:	Gudsen Technology Co., Ltd
Manufacturer Address:	F\6,10th Building,Jiuxiang Ling Industrial Park,Ave Xili ,Nanshan
	District, Shenzhen, China

1.2. Equipment Under Test (EUT) Description

Product Name:	MOZA iFocus Wireless Follow Focus Motor				
Serial No:	(N/A, marked #1 by test site)				
Hardware Version:	V1.0				
Software Version:	0.4.2				
Modulation Type:	GFSK				
Bluetooth Version:	Bluetooth LE	Bluetooth LE			
Operating Frequency Range:	The frequency range used is 2	402MHz - 2480MHz			
	(40 channels, at intervals of 2MHz)				
Antenna Type:	DIOP Antenna				
Antenna Gain:	2.26 dBi				
	Battery				
	Brand Name:	MOZA			
	Model No.:	502547-2S			
Accessory Information:	Serial No.:	(N/A, marked #1 by test site)			
	Capacity:	600mAh			
	Rated Voltage:	7.4 V			
	Charge Limit:	8.4 V			

Note 1: The EUT contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies is F(MHz)=2402+2*n (0<=n<=39). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 19 (2440MHz) and 39 (2480MHz).





Note 2: The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT continuous transmission.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS
2	15.247(b)	Peak Output Power	Nov 05, 2018	Zhang Guofeng	PASS
3	15.247(a)	Bandwidth	Nov 05, 2018	Zhang Guofeng	PASS
4	15.247(d)	Conducted Spurious Emission and Band Edge	Nov 05, 2018	Zhang Guofeng	PASS
5	15.247(e)	Power spectral density (PSD)	Nov 05, 2018	Zhang Guofeng	PASS
6	15.207	Conducted Emission	Nov 30, 2018	Ya Xinhou	PASS
7	15.247(d)	Restricted Frequency Bands	Nov 29, 2018	Ya Xinhou	PASS
8	15.209, 15.247(d)	Radiated Emission	Nov 29, 2018	Ya Xinhou	PASS

Note 1: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013 and KDB558074 D01 v05.

Note 2: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 1.5dB contains two parts that test cable loss 1dB and EUT cable 0.5dB.

1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106





2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Peak Output Power


2.2.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.2.2. Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

A. Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



B. Equipments List:

Please refer ANNEX B (4).

2.2.3. Test procedure

The measured output power was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for Peak Output Power test on the spectrum analyzer: a) Set analyzer center frequency to channel center frequency.

- b) Set the RBW to1MHz
- c) Set VBW to 3MHz
- d) Set span to 3MHz
- e) Sweep time to auto couple.
- f) Detector = peak.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use peak marker function to determine the peak amplitude level.





2.2.4. Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

A. Test Verdict:

Channel	Frequency	Measured Output Peak Power		Limit		Verdict	
Channel	(MHz)	dBm	W	dBm	W	verdict	
0	2402	8.13	0.007			PASS	
19	2440	8.25	0.007	30	1	PASS	
39	2480	7.76	0.006			PASS	

B. Test Plots:



(Channel 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn



Agilent Spectrum Analyzer - Swept SA	SENSE:INT	ALIGN AUTO 10:51:52 AM Nov 07, 2018	2
Marker 1 2.439736000000		Avg Type: Log Pwr Avg Hold:>100/100 TYPE Det PNNNN	
Ref Offset 1.5 dB 10 dB/div Ref 20.00 dBm		Mkr1 2.439 736 GH: 8.254 dBr	Next Pea
10.0	↓ 1		Next Pk Rigl
.10.0			Next Pk Le
-20.0			Marker Del
40.0			Mkr→C
60.0			Mkr→RefL
-70.0 Center 2.440000 GHz		Enon 2 000 MH	Mo 1 of
#Res BW 1.0 MHz	#VBW 3.0 MHz	Span 3.000 MH: Sweep 1.000 ms (1001 pts	5

(Channel 19, 2440MHz)



(Channel 39, 2480MHz)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




2.3. 6dB Bandwidth

2.3.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2. Test Description

A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Please refer ANNEX B (4).

2.3.3. Test procedure

The steps for the first option are as follows:

- (1) Set analyzer center frequency to channel center frequency.
- a) Set RBW = 100 kHz.
- b) Set the VBW=300 kHz.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple
- f) Allow the trace to stabilize.

g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by6 dB relative to the maximum level measured in the fundamental emission.





(2) The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW \ge 3 \times RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \ge 6 dB.


2.3.4. Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the module.

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
0	2402	0.691	≥500	PASS
19	2440	0.705	≥500	PASS
39	2480	0.703	≥500	PASS


B. Test Plots:

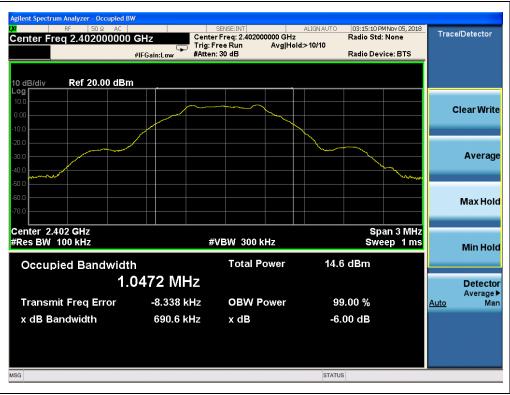


(Channel 0, 2402MHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





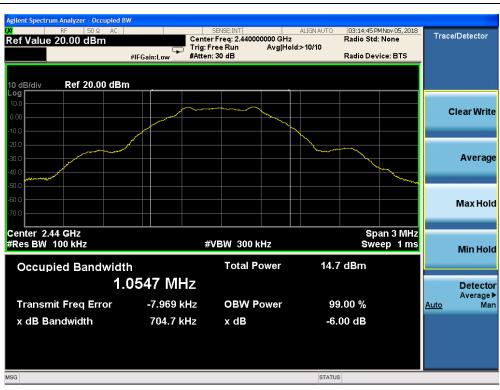





(Channel 39, 2480MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel:
 86-755-36698555
 Fax:
 86-755-36

 Http://www.morlab.cn
 E-mail:
 service

Fax: 86-755-36698525 E-mail: service@morlab.cn




2.4. Conducted Spurious Emissions and Band Edge

2.4.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.4.2. Test Description

A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Please refer ANNEX B (4).





2.4.3. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

A. Test Verdict:

	Channel Channel	Measured Max. Out of	Limit		
Channel		Band Emission (dBm)	Carrier Level	Calculated -20dBc Limit	Verdict
0	2402	-20.74	5.81	-14.19	PASS
19	2440	-20.55	7.52	-12.48	PASS
39	2480	-20.03	6.87	-13.13	PASS

B. Test Plots:

Note: the power of the Module transmitting frequency should be ignored.


Agilent Spectrum Analyzer - Swept SA ΙΧ RF 50 Ω AC Marker 2 4.7992700000000) GHz PN0: Fast C	Avg Type: Log-Pwr	03:25:08 PMNov 05, 2018 TRACE 1 2 3 4 5 6 TYPE MWWWWW	Peak Search
Ref Offset 1.5 dB 10 dB/div Ref 20.00 dBm	IFGain:Low Atten: 30 dB	N	DET P NNNNN /kr2 4.799 GHz -20.738 dBm	Next Peak
10.00				Next Pk Right
-10.0 -20.0 -30.0 -40.0				Next Pk Left
-50.0 -60.0 -70.0	hand the second descent	un and a state of the state of	m	Marker Delta
Start 30 MHz #Res BW 100 kHz	#VBW 300 kHz	-	Stop 25.00 GHz 2.386 s (2001 pts)	Mkr→CF
	2.402 GHz 5.807 dBm 4.799 GHz -20.738 dBm	FUNCTION FUNCTION WIDTH	FUNCTION VALUE	Mkr→RefLvl
7 8 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9			~	More 1 of 2
MSG		STATUS		

(Channel = 0, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



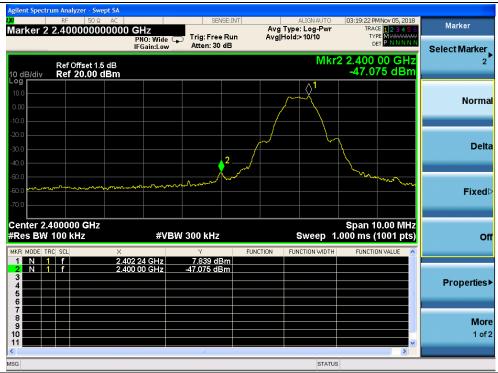

(Band Edge, Channel = 0)

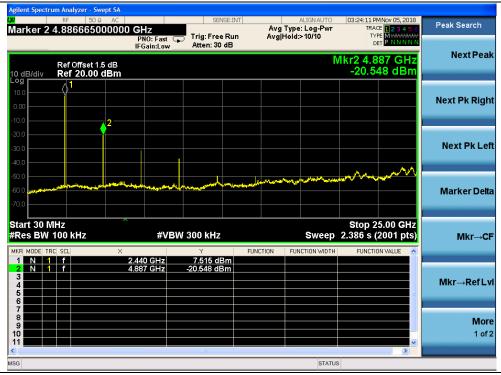

(Channel = 19, 30MHz to 25GHz)

MORLAB


SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn

E-mail: service@morlab.cn



Agilent Spectr	rum Analyzer - S	wept SA							
<mark>W</mark> arkor 2	RF 50		LJ-7	SENSI		ALIGNAUTO	03:26:29 PM TRACE	Nov 05, 2018	Peak Search
Marker Z	4.901575	P	NO: Fast C	🖵 Trig: Free F	Run Avg	Hold:>10/10	TYPE		
		IF	Gain:Low	Atten: 30 d	В				NextPeak
10 dB/div	Ref Offset Ref 20.00					I	vlkr2 4.96 -20.02	62 GHz 8 dBm	Hoxer our
Log 10.0	<u>م1</u>								
0.00	Y								Next Pk Right
-10.0		¢ ²							
-20.0									Next Pk Left
-30.0									NEXL FR LEIL
-40.0							4 .	\sim	
-50.0		A Marine maria		Marken and	Marken Marken	and the stand and the stand and the	and the states of the second	and the second second	
-60.0 			and the second second						Marker Delta
-70.0									
Start 30 M	MHz				~		Stop 25	5.00 GHz	
#Res BW			#VB	W 300 kHz		Sweep	2.386 s (2		Mkr→CF
MKR MODE T	RC SCL	×		Y	FUNCTION	FUNCTION WIDTH	FUNCTION	N VALUE	
1 N 1 2 N 1	f		77 GHz 32 GHz	6.865 dBr -20.028 dBr					
3		4.90		-20.028 dBr	1				Mkr→RefLvl
4 5								=	wiki→Rei Lvi
6									
7 8									More
9									1 of 2
11								~	1012
<						07.171			
MSG						STATU	5		

(Channel = 39, 30MHz to 25GHz)

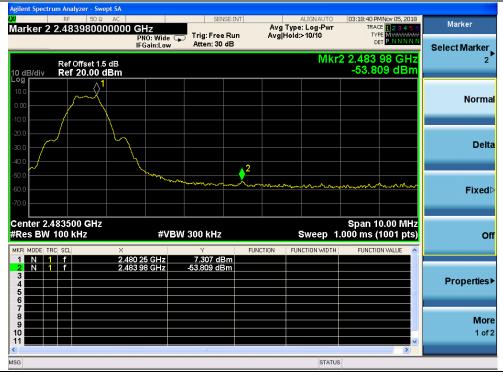

(Band Edge, Channel = 39)






2.5. Power spectral density (PSD)

2.5.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.5.2. Test Description

A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Please refer ANNEX B (4).

2.5.3. Test procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency.
- b) Set the span to 1.5 times DTS
- c) Set the RBW to 3 kHz
- d) Set the VBW to 10 kHz
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.





2.5.4. Test Result

The lowest, middle and highest channels are tested.

A. Test Verdict:

	Spectral power density (dBm/3kHz)										
Channel Frequency (MHz) Measured PSD (dBm/3kHz) Limit (dBm/3kHz) Verdic											
0	2402	-4.06	8	PASS							
19	2440	-4.26	8	PASS							
39	2480	-5.19	8	PASS							

B. Test Plots:



(Channel = 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China






(Channel = 19, 2440MHz)



(Channel = 39, 2480MHz)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





2.6. Conducted Emission

2.6.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μ H/ 50Ω line impedance stabilization network (LISN).

Frequency ran	e Conducted Limit (dBµV)	Conducted Limit (dBµV)			
(MHz)	Quai-peak	Average			
0.15 - 0.50	66 to 56	56 to 46			
0.50 - 5	56	46			
5 - 30	60	50			


NOTE:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.6.2. Test Description

A. Test Setup:

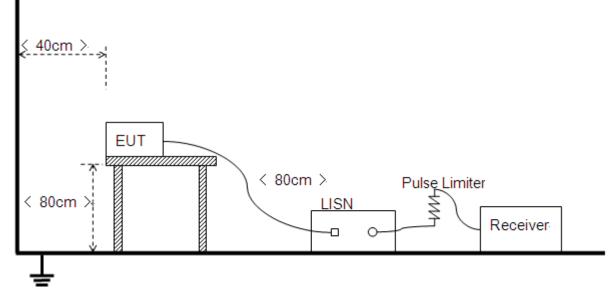

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.





B. Equipments List: Please refer ANNEX B (4).

2.6.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test setup:

Test Mode: <u>EUT +Adaptor + BT TX</u> **Note:** The test voltage is AC 120V/60Hz.






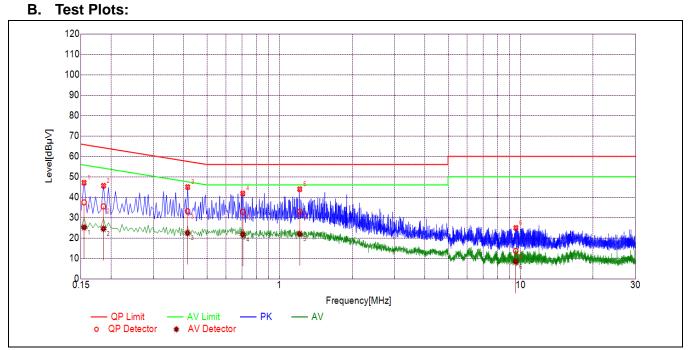


(L Phase)

NO.	Fre.	Emission Level (dBµV)		Limit (dBµV)	Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak	Average		
1	0.1545	37.45	25.22	65.75	55.75		PASS
2	0.1859	35.50	24.54	64.22	54.22		PASS
3	0.4151	33.09	22.41	57.55	47.55	Line	PASS
4	0.7033	32.78	21.74	56.00	46.00	LINE	PASS
5	1.2130	32.90	21.98	56.00	46.00		PASS
6	9.5502	13.65	8.43	60.00	50.00		PASS








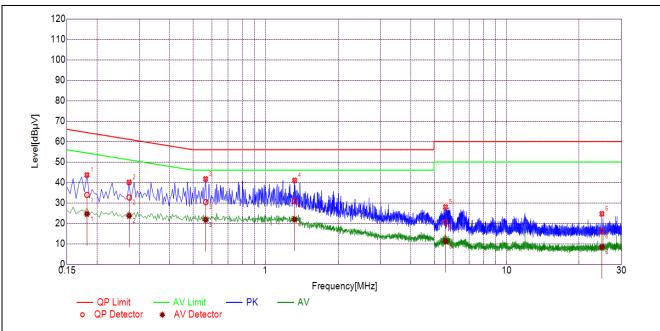

(N	Phase)
----	--------

NO.	Fre.	Emission Level (dBµV)		Limit (dBµV)	Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak	Average		
1	0.1814	33.93	24.61	64.42	54.42		PASS
2	0.2716	32.68	23.72	61.07	51.07		PASS
3	0.5643	30.36	21.75	56.00	46.00	Noutrol	PASS
4	1.3198	30.95	21.92	56.00	46.00	Neutral	PASS
5	5.5870	20.58	11.30	60.00	50.00		PASS
6	24.8603	16.06	8.44	60.00	50.00		PASS








2.7. Restricted Frequency Bands

2.7.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.7.2. Test Description

A. Test Setup

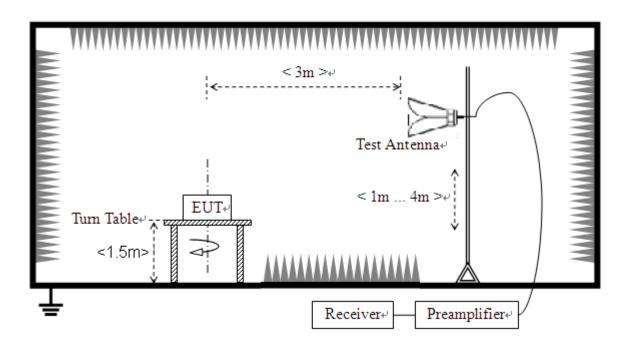

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.





B. Equipments List:

Please refer ANNEX B(4).

2.7.3. Test Result

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below: E $[dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$ A_T: Total correction Factor except Antenna U_R: Receiver Reading G_{preamp}: Preamplifier Gain A_{Factor}: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
Onanner	(MHz)	PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Verdiet
0	2381.74	PK	47.93	-29.67	32.56	50.82	74	PASS
0	2390.00	AV	36.38	-29.67	32.56	39.27	54	PASS
39	2488.87	PK	47.76	-29.67	32.56	50.65	74	PASS
39	2483.50	AV	35.33	-29.67	32.56	38.22	54	PASS

A. Test Verdict:



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



B. Test Plots:

🚺 Keysight Spectrum Analyzer - Swept SA					-	
Marker 1 2.381744000000		SENSE:IN	Avg	Type: Voltage Hold:>100/100	06:45:46 PM Nov 29, 2 TRACE 1 2 3 4 TYPE MMWW	4 5 6 Trace/Detector
	PNO: Fast 🖵 IFGain:Low	Atten: 6 dB			DET P N N	Select Trace
10 dB/div Ref 100.00 dBµV				Mkr1	2.381 744 G 47.933 dB	Hz 1 µV
20.0						
80.0						Clear Writ
70.0						
60.0					$1 \qquad 2 \qquad 1 \qquad 2 \qquad 2$	Trace Averag
50.0	-	warman of the state of the stat	mmhalmandal	verden service with my	an marine her barren and	That e Averag
30.0						
20.0						Max Hol
10.0						
Start 2.30000 GHz					Stop 2.40400 G	GHz
Res BW (CISPR) 1 MHz	#VBW	3.0 MHz			.000 ms (1001 p	
MKR MODE TRC SCL X 1 N 1 f 2.381		Υ 47.933 dBμV	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	
2 N 1 f 2.390) 000 GHz	46.717 dBµV				View Blank
5						Trace On ≡
6 7 8						
9						Mor 1 of

(Channel = 0, PEAK)




(Channel = 0, AVG)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn





						0510			n Analyzer - Swe	
Marker	1Nov 29, 2018 E 1 2 3 4 5 6 E MM	TRAC	e: Voltage :>100/100		Run	SENS	Z O: Fast	00000 GI	ESEL 50 Ω	
Select Marke	68 GHz 7 dBµV	2.488 8	Mkr2		3	Atten: 6 di	ain:Low		ef 100.00	B/div R
Norn										
De	ىرىلىنىيەنلەركىيىمە مەرمەيمە	a proper suspendie and the garding from the	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	astle-transformer-weike				1 		
Fixe										
	000 GHz	Stop 2.50							GH7	rt 2.4780
	N VALUE	.000 ms (Sweep 1	CTION F	FU	3.0 MHz Y	#VBW	z X	PR) 1 MH	
Propertie	Е					46.447 dBµ 47.757 dBµ		2.483 50 2.488 86		N 1
M										
10										

(Channel = 39, PEAK)



(Channel = 39, AVG)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



2.8. Radiated Emission

2.8.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)







2.8.2. Test Description

A. Test Setup:

1) For radiated emissions from 9kHz to 30MHz

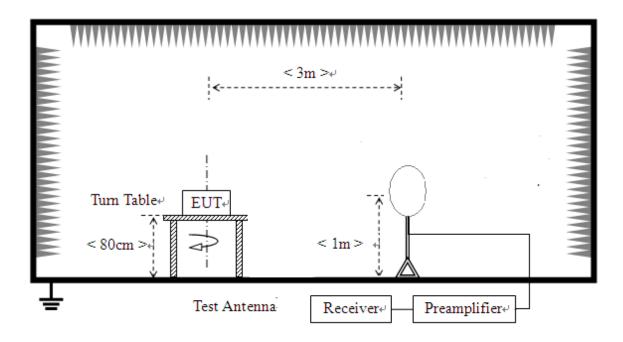

2) For radiated emissions from 30MHz to1GHz

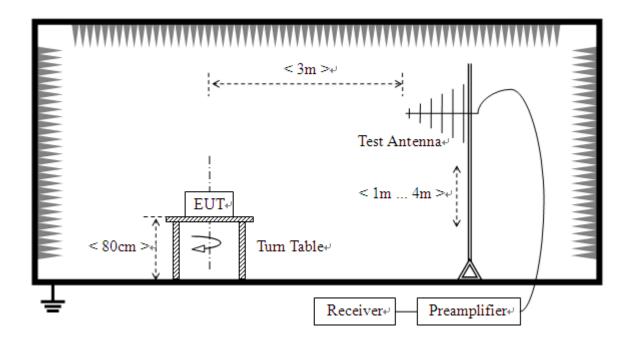




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



3) For radiated emissions above 1GHz

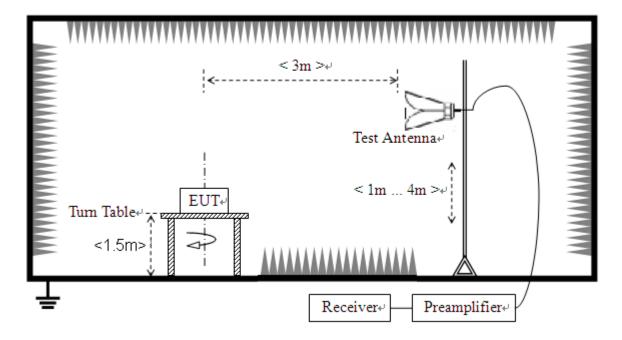

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10:2013. For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10:2013.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant





emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please refer ANNEX B (4).

2.8.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$ $A_T: Total correction Factor except Antenna$ $U_R: Receiver Reading$ $G_{preamp}: Preamplifier Gain$ $A_{Factor}: Antenna Factor at 3m$

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Note3: For the frequency, which started from 25GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.








Plots for Channel = 0

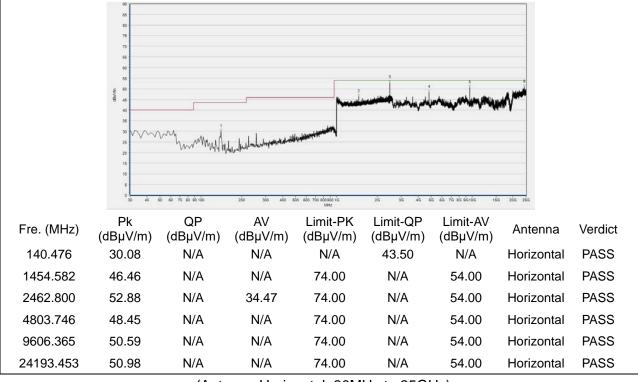

(Antenna Horizontal, 30MHz to 25GHz)

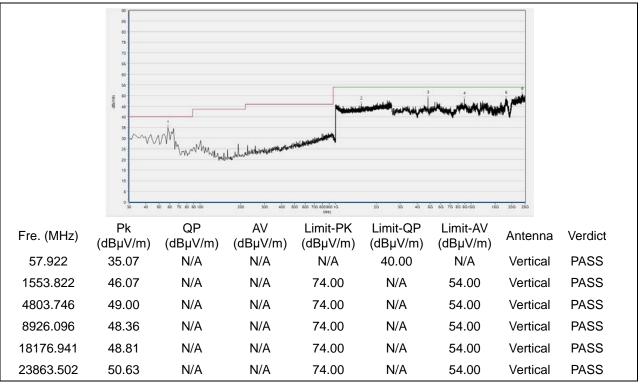

(Antenna Vertical, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fa: Http://www.morlab.cn E-r


Fax: 86-755-36698525 E-mail: service@morlab.cn



Plot for Channel = 19

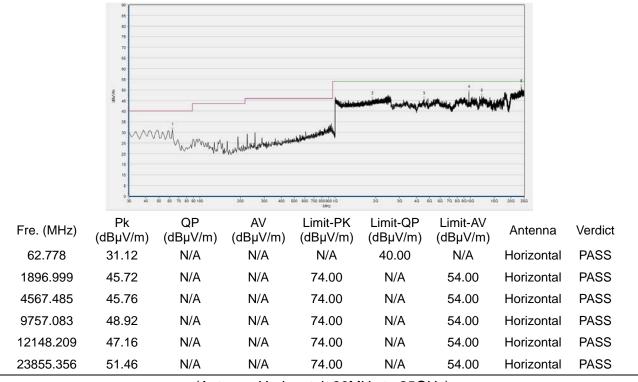

(Antenna Horizontal, 30MHz to 25GHz)

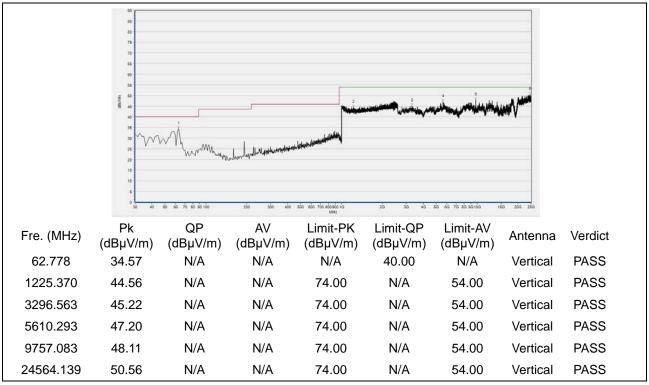


(Antenna Vertical, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 8 Http://www.morlab.cn E-mai

Fax: 86-755-36698525 E-mail: service@morlab.cn






Plot for Channel = 39

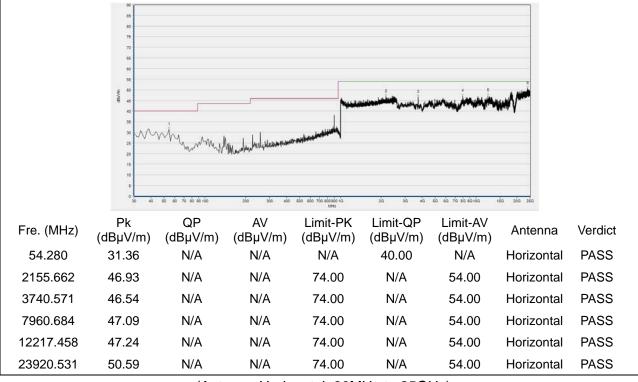

(Antenna Horizontal, 30MHz to 25GHz)

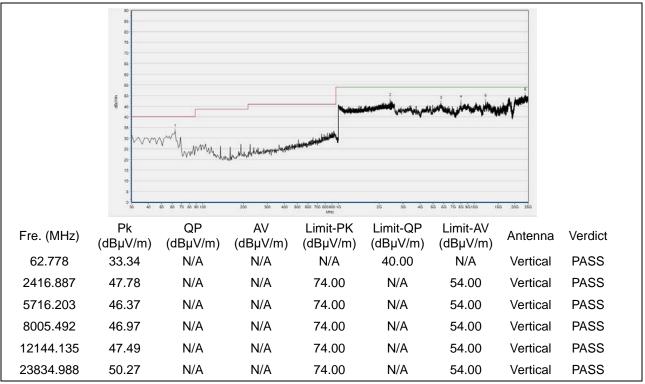

(Antenna Vertical, 30MHz to 25GHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn

E-mail: service@morlab.cn



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	±2.22dB
Power spectral density (PSD)	±2.22dB
Bandwidth	±5%
Conducted Spurious Emission	±2.77 dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.				
	Morlab Laboratory				
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang				
	Road, Block 67, BaoAn District, ShenZhen, GuangDong				
	Province, P. R. China				
Telephone:	+86 755 36698555				
Facsimile:	+86 755 36698525				

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong
	Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.





4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
Power Splitter	NW521	1506A	Weinschel	2018.04.17	2019.04.16
Attenuator 1	(N/A.)	10dB	Resnet	2018.04.17	2019.04.16
Attenuator 2	(N/A.)	3dB	Resnet	2018.04.17	2019.04.16
EXA Signal Analzyer	MY53470836	N9010A	Agilent	2018.11.06	2019.11.05
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2018.05.08	2019.05.07
LISN	812744	NSLK 8127	Schwarzbeck	2018.05.08	2019.05.07
Pulse Limiter	0004	VTSD	Schwarzbeck	2018.05.08	2019.05.07
(20dB)	9391	9561-D			
Coaxial cable(BNC)	CB01	EMC01	Morlab	N/A	N/A
(30MHz-26GHz)	CBUT	ENICOT	MONAD	IN/A	IN/A
Adapter	N/A	HKC005501	ViVo	N/A	N/A
		0-3E			

4.3 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V 1.0





4.4 Radiated Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2018.08.04	2019.08.03
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2018.05.18	2019.05.17
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2018.03.03	2019.03.02
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2018.08.06	2019.08.05
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2018.08.02	2019.08.01
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

_____ END OF REPORT

_



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China