

# TEST REPORT

Reference No..... : WTX20X09064974W-1  
FCC ID ..... : 2AMLFJM-VL01  
Applicant ..... : Shenzhen Jimi IOT Co., Ltd  
Address ..... : 4/F, Building C, Gaoxinqi Industrial Park, Liuxian 1st Road, No.67 Xin'an Street, Bao'an District, Shenzhen, China  
Product Name ..... : 4G Vehicle GPS Tracker  
Test Model. .... : JM-VL01  
Standards ..... : FCC Part 22H, FCC Part 24E  
Date of Receipt sample .... : Sept.10, 2020  
Date of Test..... : Sept.10, 2020 to Sept.22, 2020  
Date of Issue ..... : Sept.23, 2020  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308


Fax.: +86-755-33663309

Tested by:



Jason Su / Project Engineer

Reviewed By:

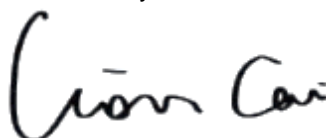

Lion Cai / RF Manager

Approved & Authorized By:



Silin Chen / Manager

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY.....	6
1.4 TEST FACILITY.....	6
1.5 EUT SETUP AND TEST MODE.....	7
1.6 MEASUREMENT UNCERTAINTY.....	8
1.7 TEST EQUIPMENT LIST AND DETAILS.....	9
<b>2. SUMMARY OF TEST RESULTS.....</b>	<b>11</b>
<b>3. RF EXPOSURE.....</b>	<b>12</b>
3.1 STANDARD APPLICABLE.....	12
3.2 TEST RESULT.....	12
<b>4. RF OUTPUT POWER.....</b>	<b>13</b>
4.1 STANDARD APPLICABLE.....	13
4.2 TEST PROCEDURE.....	13
4.3 SUMMARY OF TEST RESULTS/PLOTS.....	13
<b>5. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER.....</b>	<b>18</b>
5.1 STANDARD APPLICABLE.....	18
5.2 TEST PROCEDURE.....	18
5.3 SUMMARY OF TEST RESULTS.....	18
<b>6. EMISSION BANDWIDTH.....</b>	<b>20</b>
6.1 STANDARD APPLICABLE.....	20
6.2 TEST PROCEDURE.....	20
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	20
<b>7. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL.....</b>	<b>35</b>
7.1 STANDARD APPLICABLE.....	35
7.2 TEST PROCEDURE.....	35
7.3 SUMMARY OF TEST RESULTS/PLOTS.....	35
<b>8. SPURIOUS RADIATED EMISSIONS.....</b>	<b>68</b>
8.1 STANDARD APPLICABLE.....	68
8.2 TEST PROCEDURE.....	68
8.3 SUMMARY OF TEST RESULTS/PLOTS.....	68
<b>9. FREQUENCY STABILITY.....</b>	<b>79</b>
9.1 STANDARD APPLICABLE.....	79
9.2 TEST PROCEDURE.....	79
9.3 SUMMARY OF TEST RESULTS/PLOTS.....	79
<b>10. MODULATION CHARACTERISTICS.....</b>	<b>83</b>
10.1 STANDARD APPLICABLE.....	83
10.2 TEST PROCEDURE.....	83
10.3 SUMMARY OF TEST RESULTS/PLOTS.....	83

**Report version**

Version No.	Date of issue	Description
Rev.00	Sept.23, 2020	Original
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Shenzhen Jimi IOT Co., Ltd  
 Address of applicant: 4/F, Building C, Gaoxinqi Industrial Park, Liuxian 1st Road,  
 No.67 Xin'an Street, Bao'an District, Shenzhen, China

Manufacturer: Shenzhen Jimi IOT Co., Ltd  
 Address of manufacturer: 4/F, Building C, Gaoxinqi Industrial Park, Liuxian 1st Road,  
 No.67 Xin'an Street, Bao'an District, Shenzhen, China

General Description of EUT:	
Product Name:	4G Vehicle GPS Tracker
Trade Name:	JIMI
Model No.:	JM-VL01
Adding Model(s):	VL01, VL01A, JM-VL01A, VL01E, JM-VL01E, VL01LA, JM-VL01LA
Rated Voltage:	DC3.7V/DC12V/24V
Battery:	450mAh
Adapter Model:	/
Software Version:	KU982026_VL01
Hardware Version:	KU982026_MAIN_PCB_V1.1
<p><i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model JM-VL01 but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

<b>Technical Characteristics of EUT:</b>	
<b>2G</b>	
Support Networks:	GSM, GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS/EDGE 850: 869~894MHz GSM/GPRS/EDGE 1900: 1930~1990MHz
Max RF Output Power:	GSM850: 33.08dBm, GSM1900: 30.56dBm EDGE850: 26.29dBm, EDGE1900: 26.98dBm
Type of Emission:	GSM850: 258KGXW, GSM1900: 252KGXW EDGE850: 249KG7W, EDGE1900: 251KG7W
Type of Modulation:	GMSK, 8PSK
Type of Antenna:	Integral Antenna
Antenna Gain:	GSM850: -1dBi; GSM1900: 0dBi
GPRS/EDGE Class:	Class 12
<b>3G</b>	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2: 23.33dBm, WCDMA Band 5: 23.53dBm
Type of Emission:	WCDMA Band 2: 4M19F9W WCDMA Band 5: 4M16F9W
Type of Modulation:	BPSK
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band 2: 0dBi, WCDMA Band 5: -1dBi

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 2:** FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS.

**FCC Rules Part 22:** PRIVATE LAND MOBILE RADIO SERVICES.

**FCC Rules Part 24:** PUBLIC MOBILE SERVICES.

**TIA/EIA 603 E March 2016:** Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

**ANSI C63.26-2015:** American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

**KDB 971168 D01 Power Meas License Digital Systems v03r01:** MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with TIA/EIA 603 E/ KDB 971168/ ANSI C63.26

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

### FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	GSM 850	Low, Middle, High Channels
TM2	GPRS 850	Low, Middle, High Channels
TM3	EDGE 850	Low, Middle, High Channels
TM4	GSM 1900	Low, Middle, High Channels
TM5	GPRS 1900	Low, Middle, High Channels
TM6	EDGE 1900	Low, Middle, High Channels
TM7	WCDMA Band 5	Low, Middle, High Channels
TM8	HSDPA Band 5	Low, Middle, High Channels
TM9	HSUPA Band 5	Low, Middle, High Channels
TM10	WCDMA Band 2	Low, Middle, High Channels
TM11	HSDPA Band 2	Low, Middle, High Channels
TM12	HSUPA Band 2	Low, Middle, High Channels

Testing Configure			
Support Band	Support Standard	Channel Frequency(MHz)	Channel Number
GSM 850	GSM/GPRS/EDGE	824.2	128
		836.6	190
		848.8	251
PCS 1900	GSM/GPRS/EDGE	1850.2	512
		1880.0	661
		1909.8	810
WCDMA Band 5	WCDMA/HSDPA/HSUPA	826.4	4132
		836.6	4183
		846.6	4233
WCDMA Band 2	WCDMA/HSDPA/HSUPA	1852.4	9262
		1880.0	9400
		1907.6	9538

Note: the transmitter has been tested on the communications mode of GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA compliance test and record the worst case.

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC Cable	1.5	Unshielded	Without Ferrite
SOS Cable	2.35	Unshielded	Without Ferrite
RS485	1.48	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Battery	JIAD E	DC12x2	/

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Frequency Stability	Conducted	2.3%
Transmitter Spurious Emissions	Conducted	$\pm 0.42\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$



**1.7 Test Equipment List and Details**

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2020-04-28	2021-04-27
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2020-04-28	2021-04-27
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2020-04-28	2021-04-27
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2020-04-28	2021-04-27
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2020-04-28	2021-04-27
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2020-04-28	2021-04-27
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2020-04-28	2021-04-27
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2020-04-28	2021-04-27
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2020-04-28	2021-04-27
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2020-04-28	2021-04-27
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2020-04-28	2021-04-27
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2020-04-28	2021-04-27
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2020-04-28	2021-04-27
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2020-04-28	2021-04-27
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2020-04-28	2021-04-27
SEMT-1055	RF Limiter	ATTEN	AT-BSF-0820~0920	/	2020-04-28	2021-04-27
SEMT-1056	RF Limiter	ATTEN	AT-BSF-1710~1910	/	2020-04-28	2021-04-27
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2020-04-28	2021-04-27
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2020-03-17	2021-03-16
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2020-03-17	2021-03-16

SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2020-03-17	2021-03-16
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2020-03-17	2021-03-16
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16

<b>Software List</b>			
<b>Description</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Version</b>
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§1.1307, §2.1091	RF Exposure	Compliant
§22.913(a), §24.232(c)	RF Output Power	Compliant
§24.51	Peak-to-average Ratio (PAR) of Transmitter	Compliant
§22.917(b), §24.238(b)	Emission Bandwidth	Compliant
§22.917(a), §24.238(a)	Spurious Emissions at Antenna Terminal	Compliant
§22.917(a), §24.238(a)	Spurious Radiation Emissions	Compliant
§22.917(a), §24.238(a)	Out of Band Emissions	Compliant
§22.355, §24.235	Frequency Stability	Compliant

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to §1.1307 and §2.1091, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the RF exposure report.

## 4. RF Output Power

---


### 4.1 Standard Applicable

According to §22.913(a)(2), the ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

### 4.2 Test Procedure

- Conducted output power test method:

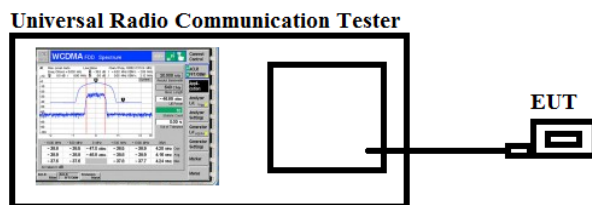

- Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

### 4.3 Summary of Test Results/Plots

➤ **Max. Radiated Power**

Mode	Channel	Antenna Polar	ERP (dBm)	Limit (dBm)	Result
GSM850	128	V	30.59	<38.45	Pass
		H	26.17		
	190	V	30.32		
		H	26.25		
	251	V	30.47		
		H	26.13		
GPRS850	128	V	30.36	<38.45	Pass
		H	25.98		
	190	V	30.74		
		H	26.03		
	251	V	30.02		
		H	25.46		
EGPRS850	128	V	24.35	<38.45	Pass
		H	20.15		
	190	V	24.39		
		H	20.59		
	251	V	24.13		
		H	20.03		

Mode	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Result
PCS1900	512	V	28.41	<33.00	Pass
		H	23.65		
	661	V	28.46		
		H	23.98		
	810	V	28.27		
		H	23.03		
GPRS1900	512	V	28.25	<33.00	Pass
		H	23.47		
	661	V	28.98		
		H	23.69		
	810	V	28.01		
		H	23.72		
EGPRS1900	512	V	24.02	<33.00	Pass
		H	20.74		
	661	V	24.37		
		H	20.36		
	810	V	24.74		
		H	20.03		

Mode	Channel	Antenna Polar	ERP	Limit (dBm)	Result
WCDMA Band V	4132	V	21.06	<38.45	Pass
		H	16.18		
	4183	V	21.12		
		H	16.23		
	4233	V	21.16		
		H	16.71		

Mode	Channel	Antenna Polar	EIRP	Limit (dBm)	Result
WCDMA Band II	9262	V	20.49	<33.00	Pass
		H	15.68		
	9400	V	20.14		
		H	15.35		
	9538	V	20.06		
		H	15.11		

Note: Pre-scan mode WCDMA/HSDPA/HSUPA find the worst case at WCDMA mode and recorded in the test report.



➤ **Max. Conducted Power (Average power)**

Conducted Average power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency(MHz)	824.20	836.60	848.80	1850.20	1880.00	1909.80
GSM	32.98	33.02	33.04	30.53	30.51	30.56
GPRS(1Slot)	33.02	33.06	33.08	30.54	30.54	30.56
EGPRS(1Slot)	26.07	26.29	25.93	26.38	26.98	26.66

Conducted Average power (dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4183	4233	9262	9400	9538
Frequency(MHz)	826.4	836.6	846.6	1852.4	1880.0	1907.6
RMC 12.2k	23.41	23.48	23.53	23.33	23.19	23.15
HSDPA Subtest-1	22.71	23.25	22.44	22.85	22.44	22.35
HSDPA Subtest-2	22.68	23.22	22.41	22.83	22.42	22.32
HSDPA Subtest-3	22.67	23.21	22.42	22.82	22.41	22.32
HSDPA Subtest-4	22.70	23.24	22.42	22.84	22.43	22.33
HSUPA Subtest-1	22.58	23.14	22.47	22.74	22.33	22.28
HSUPA Subtest-2	22.56	23.12	22.45	22.71	22.31	22.25
HSUPA Subtest-3	22.57	23.11	22.46	22.72	22.32	22.26
HSUPA Subtest-4	22.55	23.13	22.45	22.71	22.31	22.27
HSUPA Subtest-5	22.56	23.13	22.45	22.73	22.31	22.24

## 5. Peak-to-average Ratio (PAR) of Transmitter

---

### 5.1 Standard Applicable


According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 5.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Configuration for the emission bandwidth testing:

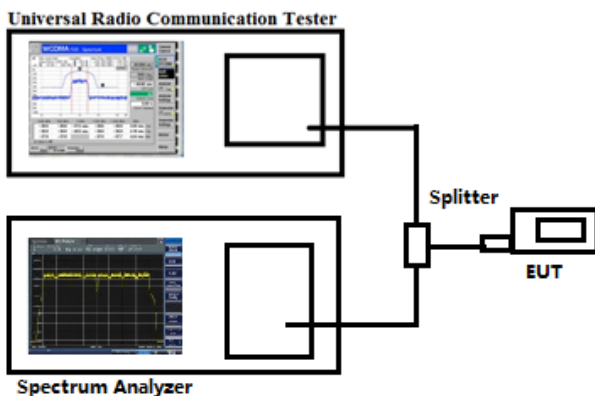

### 5.3 Summary of Test Results

PCS1900				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GSM	661	1850.2	4.95	13
GPRS(1 Slot)	661	1850.2	4.02	13
EDGE(1 Slot)	661	1850.2	4.36	13

WCDMA Band II				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	9262	1852.4	4.01	13
	9400	1880.0	4.65	13
	9538	1907.6	4.97	13

Note: Only the worst case was selected to record.

## 6. Emission Bandwidth

---

### 6.1 Standard Applicable


According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §24.238(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### 6.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

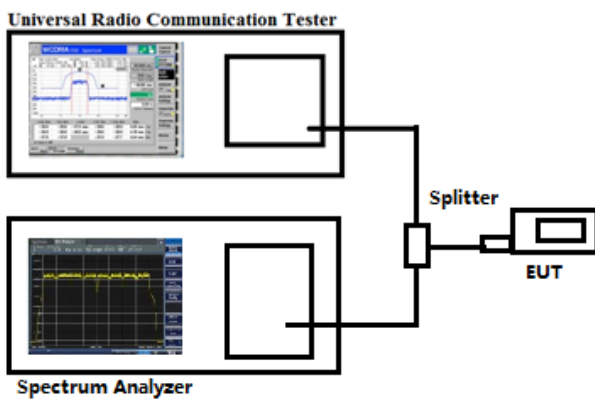

### 6.3 Summary of Test Results/Plots

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
GSM 850 (GMSK)	128	824.20	241.4213	306.192
	190	836.60	241.4563	305.465
	251	848.80	244.3222	310.133
GPRS850 (GMSK,1Slot)	128	824.20	257.6717	322.952
	190	836.60	244.1655	313.865
	251	848.80	246.9229	311.022
EGPRS850 (8PSK,1Slot)	128	824.20	244.1159	312.667
	190	836.60	241.8528	305.459
	251	848.80	248.8740	307.773
PCS1900 (GMSK)	512	1850.20	246.6684	310.915
	661	1880.00	242.0883	323.554
	810	1909.80	244.0378	311.692
GPRS1900 (GMSK,1Slot)	512	1850.20	248.5039	304.239
	661	1880.00	249.8114	321.784
	810	1909.80	251.7658	329.209
EGPRS1900 (8PSK,1Slot)	512	1850.20	240.8400	314.540
	661	1880.00	251.4624	316.753
	810	1909.80	238.9843	303.580

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
WCDMA Band V	4132	826.40	4149.9	4689
	4183	836.60	4147.4	4681
	4233	846.60	4149.5	4668
HSDPA	4132	826.40	4133.9	4680
	4183	836.60	4163.4	4698
	4233	846.60	4158.7	4656
HSUPA	4132	826.40	4144.9	4654
	4183	836.60	4147.5	4676
	4233	846.60	4154.1	4677
WCDMA Band II	9262	1852.40	4154.0	4716
	9400	1880.00	4188.6	4694
	9538	1907.60	4168.3	4685
HSDPA	9262	1852.40	4155.3	4701
	9400	1880.00	4162.7	4694
	9538	1907.60	4167.6	4682
HSUPA	9262	1852.40	4188.1	4701
	9400	1880.00	4163.2	4677
	9538	1907.60	4151.7	4667

GSM850	
Low Channel	<p>Agilent R T</p> <p>Ch Freq 824.2 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak Log 10 dB/Offset 6.5 dB</p> <p>Center 824.2 MHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 241.4213 kHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -426.310 Hz</p> <p>x dB Bandwidth 306.192 kHz</p>
Middle Channel	<p>Agilent R T</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak Log 10 dB/Offset 6.5 dB</p> <p>Center 836.6 MHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 241.4563 kHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -2.535 kHz</p> <p>x dB Bandwidth 305.465 kHz</p>
High Channel	<p>Agilent R T</p> <p>Ch Freq 848.8 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak Log 10 dB/Offset 6.5 dB</p> <p>Center 848.8 MHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 244.3222 kHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -1.964 kHz</p> <p>x dB Bandwidth 310.133 kHz</p>


GPRS850	
Low Channel	<p>Agilent R T</p> <p>Ch Freq 824.2 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak</p> <p>Log 10 dB/Offset 6.5 dB</p> <p>Center 824.2 MHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 257.6717 kHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -2.310 kHz x dB Bandwidth 322.952 kHz</p> <p>Freq/Channel</p> <p>Center Freq 824.200000 MHz</p> <p>Start Freq 823.700000 MHz</p> <p>Stop Freq 824.700000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
Middle Channel	<p>Agilent R T</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak</p> <p>Log 10 dB/Offset 6.5 dB</p> <p>Center 836.6 MHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 244.1655 kHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -2.941 kHz x dB Bandwidth 313.865 kHz</p> <p>Freq/Channel</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 836.100000 MHz</p> <p>Stop Freq 837.100000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
High Channel	<p>Agilent R T</p> <p>Ch Freq 848.8 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak</p> <p>Log 10 dB/Offset 6.5 dB</p> <p>Center 848.8 MHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 246.9229 kHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 1.754 kHz x dB Bandwidth 311.022 kHz</p> <p>Freq/Channel</p> <p>Center Freq 848.800000 MHz</p> <p>Start Freq 848.300000 MHz</p> <p>Stop Freq 849.300000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>




EGPRS850	
Low Channel	<p>Agilent R T</p> <p>Ch Freq 824.2 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak</p> <p>Log 10 dB/Offst 6.5 dB</p> <p>Center 824.2 MHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 244.1159 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -5.403 kHz</p> <p>x dB Bandwidth 312.667 kHz</p> <p>Freq/Channel</p> <p>Center Freq 824.200000 MHz</p> <p>Start Freq 823.700000 MHz</p> <p>Stop Freq 824.700000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
Middle Channel	<p>Agilent R T</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak</p> <p>Log 10 dB/Offst 6.5 dB</p> <p>Center 836.6 MHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 241.8528 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -2.525 kHz</p> <p>x dB Bandwidth 305.459 kHz</p> <p>Freq/Channel</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 836.100000 MHz</p> <p>Stop Freq 837.100000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
High Channel	<p>Agilent R T</p> <p>Ch Freq 848.8 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak</p> <p>Log 10 dB/Offst 6.5 dB</p> <p>Center 848.8 MHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 248.8740 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 4.027 kHz</p> <p>x dB Bandwidth 307.773 kHz</p> <p>Freq/Channel</p> <p>Center Freq 848.800000 MHz</p> <p>Start Freq 848.300000 MHz</p> <p>Stop Freq 849.300000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

PCS1900


Low Channel

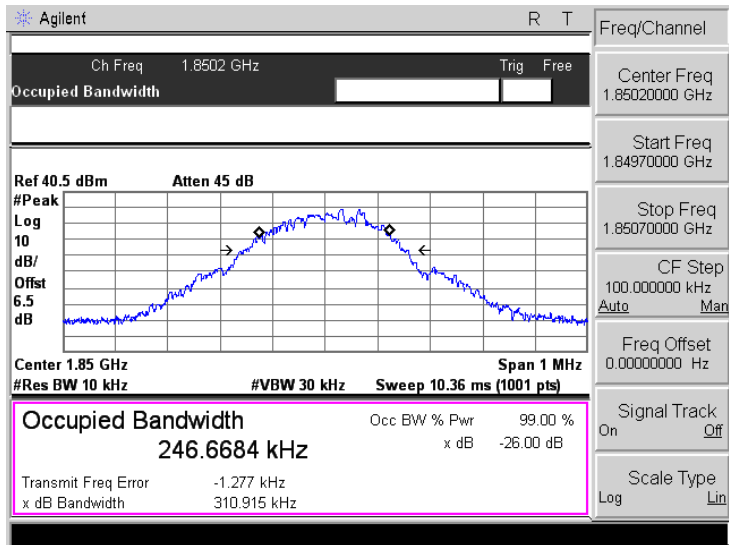

Middle Channel

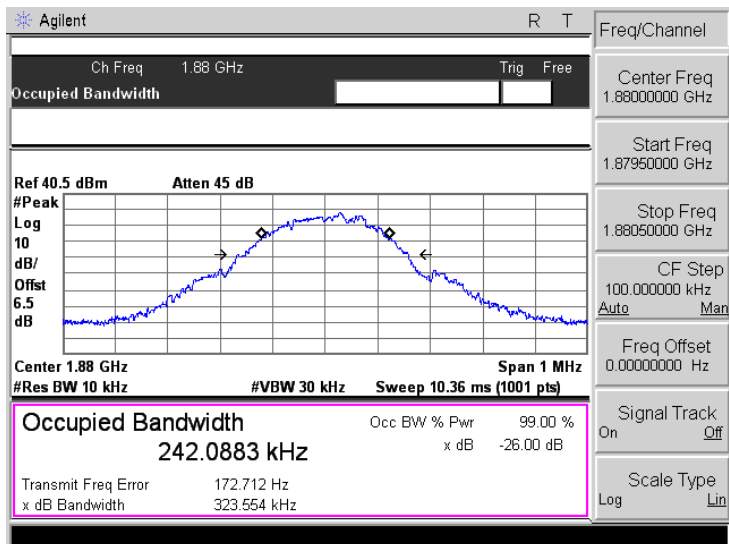

High Channel

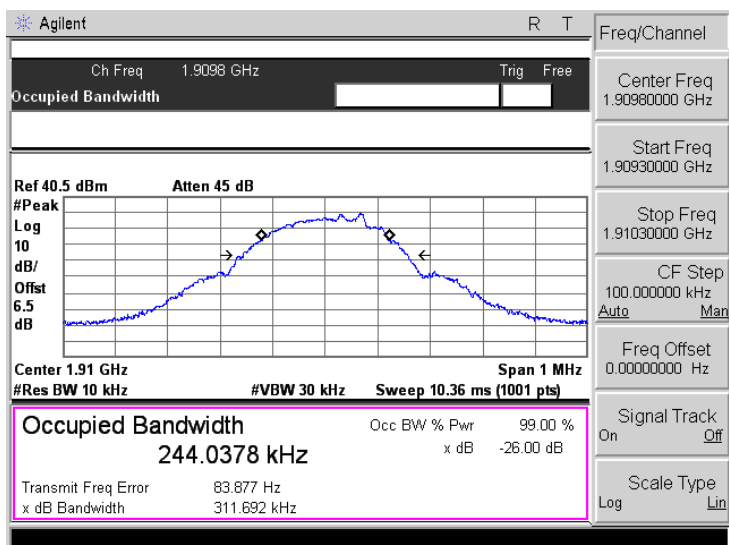

GPRS1900	
Low Channel	<p>Agilent R T</p> <p>Ch Freq 1.8502 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offset</p> <p>6.5 dB</p> <p>Center 1.85 GHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 248.5039 kHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error -248.365 Hz</p> <p>x dB Bandwidth 304.239 kHz</p> <p>Freq/Channel</p> <p>Center Freq 1.85020000 GHz</p> <p>Start Freq 1.84970000 GHz</p> <p>Stop Freq 1.85070000 GHz</p> <p>CF Step 100.000000 kHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
Middle Channel	<p>Agilent R T</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offset</p> <p>6.5 dB</p> <p>Center 1.88 GHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 249.8114 kHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 3.247 kHz</p> <p>x dB Bandwidth 321.784 kHz</p> <p>Freq/Channel</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87950000 GHz</p> <p>Stop Freq 1.88050000 GHz</p> <p>CF Step 100.000000 kHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
High Channel	<p>Agilent R T</p> <p>Ch Freq 1.9098 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offset</p> <p>6.5 dB</p> <p>Center 1.91 GHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 251.7658 kHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 2.022 kHz</p> <p>x dB Bandwidth 329.209 kHz</p> <p>Freq/Channel</p> <p>Center Freq 1.90980000 GHz</p> <p>Start Freq 1.90930000 GHz</p> <p>Stop Freq 1.91030000 GHz</p> <p>CF Step 100.000000 kHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

EGPRS1900	
Low Channel	<p>Agilent R T</p> <p>Ch Freq 1.8502 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offset 6.5 dB</p> <p>Center 1.85 GHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 240.8400 kHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 1.638 kHz</p> <p>x dB Bandwidth 314.540 kHz</p> <p>Freq/Channel</p> <p>Center Freq 1.85020000 GHz</p> <p>Start Freq 1.84970000 GHz</p> <p>Stop Freq 1.85070000 GHz</p> <p>CF Step 100.000000 kHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
Middle Channel	<p>Agilent R T</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offset 6.5 dB</p> <p>Center 1.88 GHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 251.4624 kHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 2.371 kHz</p> <p>x dB Bandwidth 316.753 kHz</p> <p>Freq/Channel</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87950000 GHz</p> <p>Stop Freq 1.88050000 GHz</p> <p>CF Step 100.000000 kHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
High Channel	<p>Agilent R T</p> <p>Ch Freq 1.9098 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offset 6.5 dB</p> <p>Center 1.91 GHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 238.9843 kHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 158.661 Hz</p> <p>x dB Bandwidth 303.580 kHz</p> <p>Freq/Channel</p> <p>Center Freq 1.90980000 GHz</p> <p>Start Freq 1.90930000 GHz</p> <p>Stop Freq 1.91030000 GHz</p> <p>CF Step 100.000000 kHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>


WCDMA Band V	
Low Channel	<p>Agilent R T</p> <p>Ch Freq 826.4 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 826.4 MHz Span 10 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 4.1499 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -3.086 kHz</p> <p>x dB Bandwidth 4.689 MHz</p> <p>Freq/Channel</p> <p>Center Freq 826.400000 MHz</p> <p>Start Freq 821.400000 MHz</p> <p>Stop Freq 831.400000 MHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
Middle Channel	<p>Agilent R T</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 836.6 MHz Span 10 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 4.1474 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -13.321 kHz</p> <p>x dB Bandwidth 4.681 MHz</p> <p>Freq/Channel</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 831.600000 MHz</p> <p>Stop Freq 841.600000 MHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
High Channel	<p>Agilent R T</p> <p>Ch Freq 846.6 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 846.6 MHz Span 10 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 4.1495 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 1.165 kHz</p> <p>x dB Bandwidth 4.668 MHz</p> <p>Freq/Channel</p> <p>Center Freq 846.600000 MHz</p> <p>Start Freq 841.600000 MHz</p> <p>Stop Freq 851.600000 MHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

WCDMA Band V- HSDPA	
Low Channel	<p>Agilent R T</p> <p>Ch Freq 826.4 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 826.4 MHz Span 10 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 4.1339 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -2.430 kHz</p> <p>x dB Bandwidth 4.680 MHz</p> <p>Freq/Channel</p> <p>Center Freq 826.400000 MHz</p> <p>Start Freq 821.400000 MHz</p> <p>Stop Freq 831.400000 MHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
Middle Channel	<p>Agilent R T</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 836.6 MHz Span 10 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 4.1634 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -12.572 kHz</p> <p>x dB Bandwidth 4.698 MHz</p> <p>Freq/Channel</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 831.600000 MHz</p> <p>Stop Freq 841.600000 MHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
High Channel	<p>Agilent R T</p> <p>Ch Freq 846.6 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 846.6 MHz Span 10 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 4.1587 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -5.378 kHz</p> <p>x dB Bandwidth 4.656 MHz</p> <p>Freq/Channel</p> <p>Center Freq 846.600000 MHz</p> <p>Start Freq 841.600000 MHz</p> <p>Stop Freq 851.600000 MHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>


WCDMA Band V- HSUPA	
Low Channel	<p>Agilent R T</p> <p>Ch Freq 826.4 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 826.4 MHz Span 10 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 4.1449 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -6.293 kHz</p> <p>x dB Bandwidth 4.654 MHz</p> <p>Freq/Channel</p> <p>Center Freq 826.400000 MHz</p> <p>Start Freq 821.400000 MHz</p> <p>Stop Freq 831.400000 MHz</p> <p>CF Step 1.0000000 MHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
Middle Channel	<p>Agilent R T</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 836.6 MHz Span 10 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 4.1475 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -8.102 kHz</p> <p>x dB Bandwidth 4.676 MHz</p> <p>Freq/Channel</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 831.600000 MHz</p> <p>Stop Freq 841.600000 MHz</p> <p>CF Step 1.0000000 MHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
High Channel	<p>Agilent R T</p> <p>Ch Freq 846.6 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 846.6 MHz Span 10 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 4.1541 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -4.007 kHz</p> <p>x dB Bandwidth 4.677 MHz</p> <p>Freq/Channel</p> <p>Center Freq 846.600000 MHz</p> <p>Start Freq 841.600000 MHz</p> <p>Stop Freq 851.600000 MHz</p> <p>CF Step 1.0000000 MHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

WCDMA Band II


Low Channel

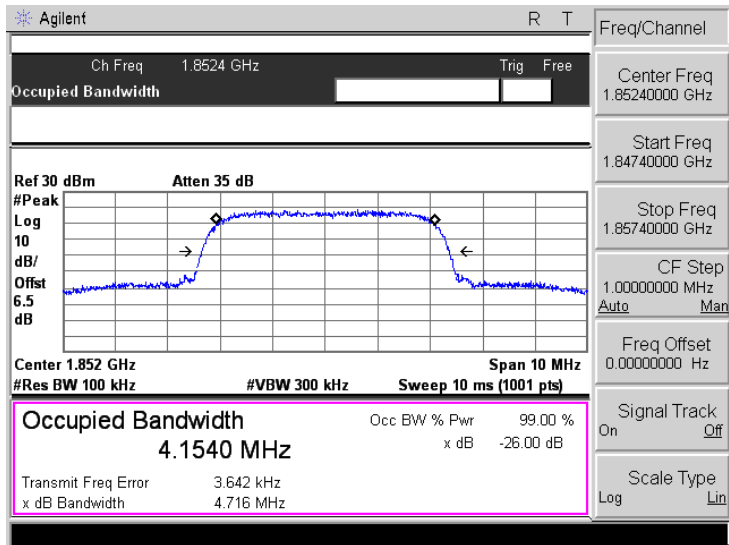

Middle Channel

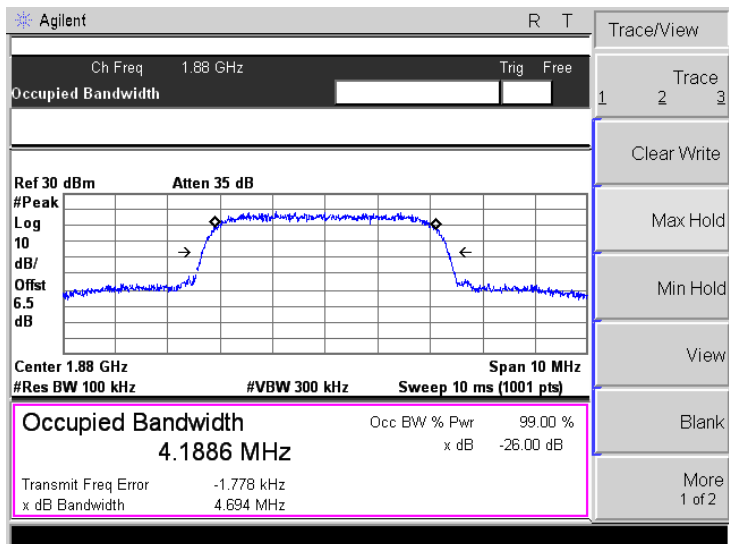

High Channel

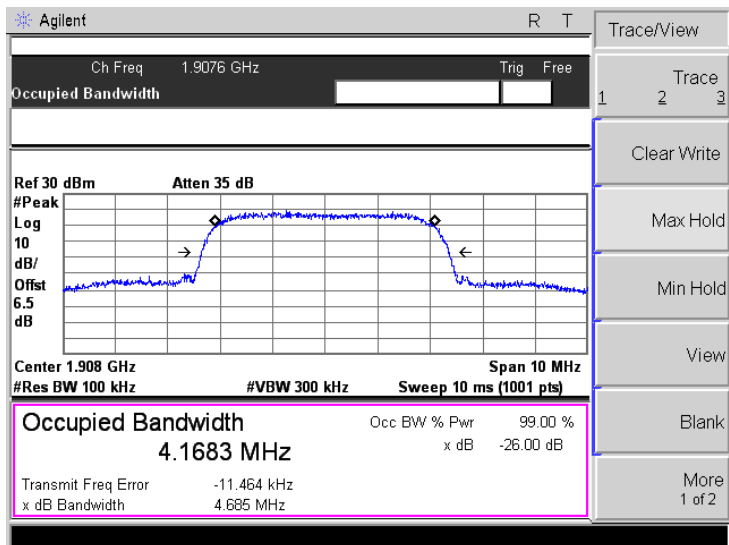





WCDMA Band II- HSDPA	
Low Channel	<p>Agilent R T</p> <p>Ch Freq 1.8524 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 1.852 GHz Span 10 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 4.1553 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 225.338 Hz x dB Bandwidth 4.701 MHz</p> <p>Trace/View: Trace 1, 2, 3; Clear Write; Max Hold; Min Hold; View; Blank; More 1 of 2</p>
Middle Channel	<p>Agilent R T</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 1.88 GHz Span 10 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 4.1627 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -5.507 kHz x dB Bandwidth 4.694 MHz</p> <p>Freq/Channel: Center Freq 1.8800000 GHz; Start Freq 1.8750000 GHz; Stop Freq 1.8850000 GHz; CF Step 1.0000000 MHz (Auto/Man); Freq Offset 0.0000000 Hz; Signal Track On/Off; Scale Type Log/Lin</p>
High Channel	<p>Agilent R T</p> <p>Ch Freq 1.9076 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 1.908 GHz Span 10 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 4.1676 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -8.702 kHz x dB Bandwidth 4.682 MHz</p> <p>Freq/Channel: Center Freq 1.9076000 GHz; Start Freq 1.9026000 GHz; Stop Freq 1.9126000 GHz; CF Step 1.0000000 MHz (Auto/Man); Freq Offset 0.0000000 Hz; Signal Track On/Off; Scale Type Log/Lin</p>

WCDMA Band II- HSUPA


Low Channel

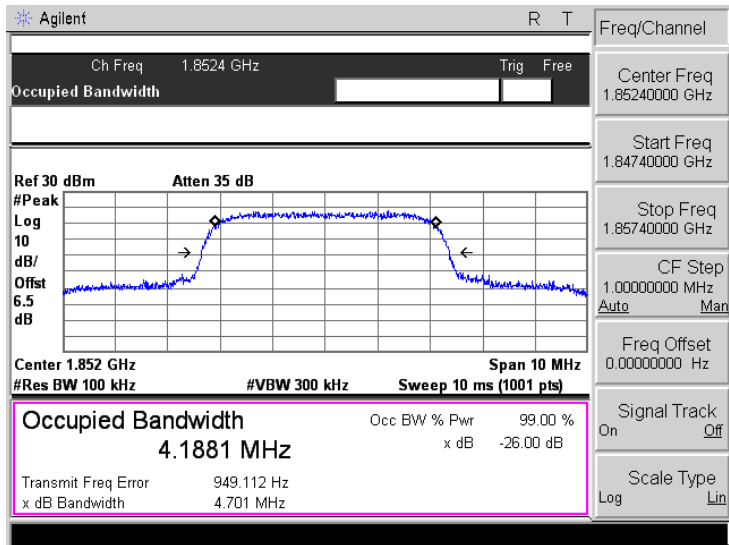

Middle Channel

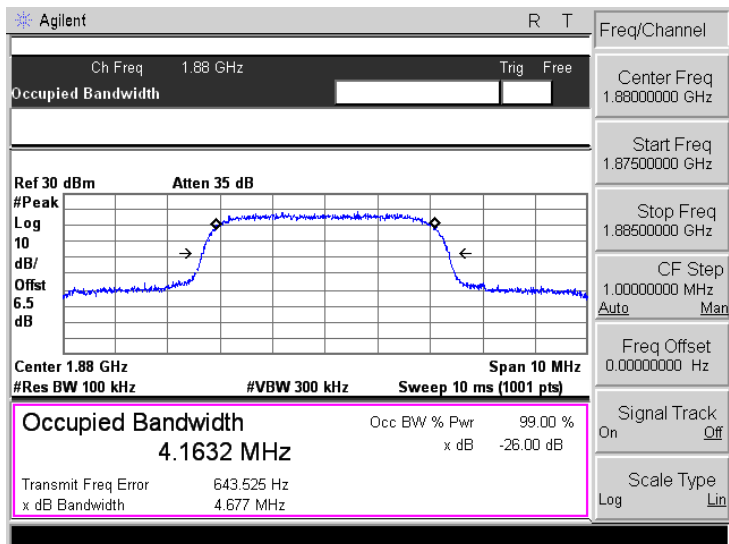

High Channel

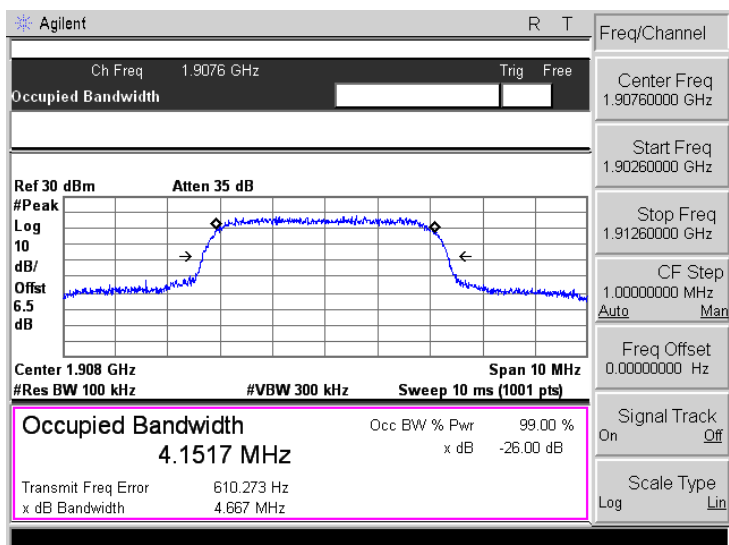

## 7. Out of Band Emissions at Antenna Terminal

---

### 7.1 Standard Applicable


According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### 7.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10<sup>th</sup> harmonic.

Test Configuration for the out of band emissions testing:

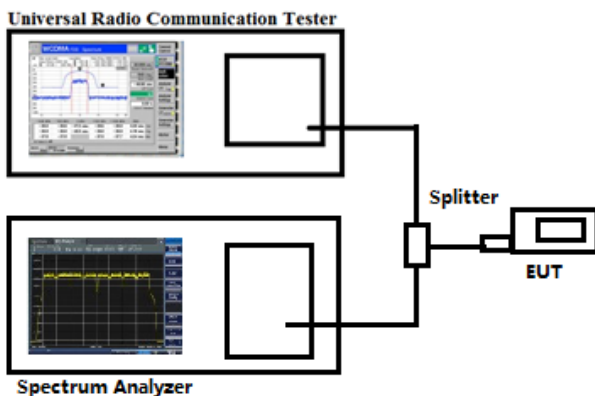



### 7.3 Summary of Test Results/Plots

Note: Pre-scan mode WCDMA/HSDPA/HSUPA find the worst case at WCDMA mode and recorded in the test report.

Please refer to the following test plots



GSM850


Low Channel

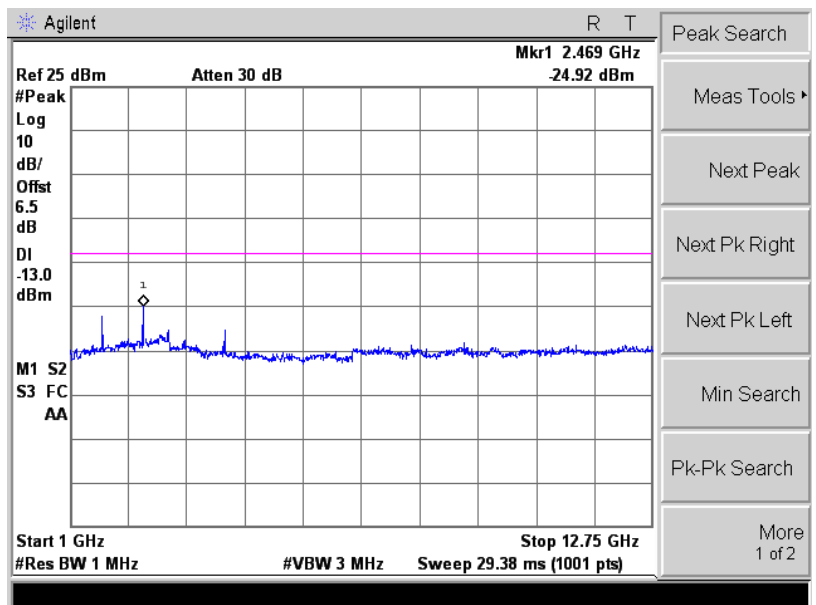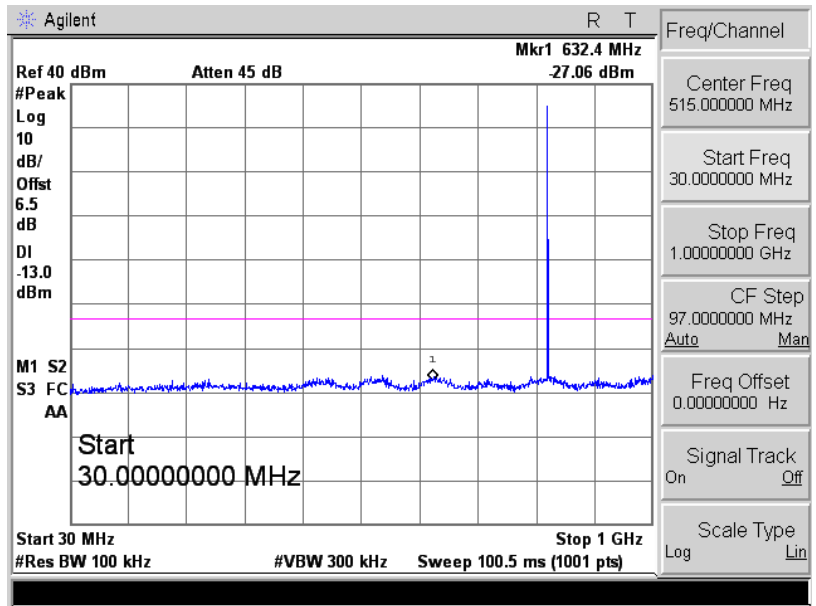

GSM850


Middle Channel

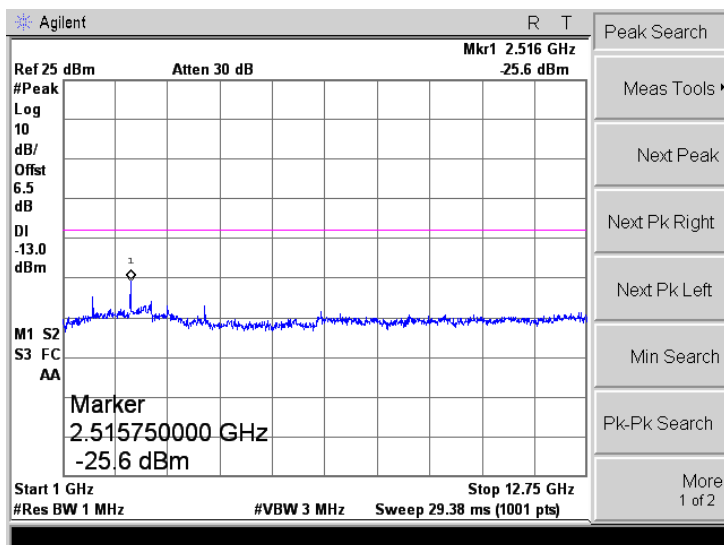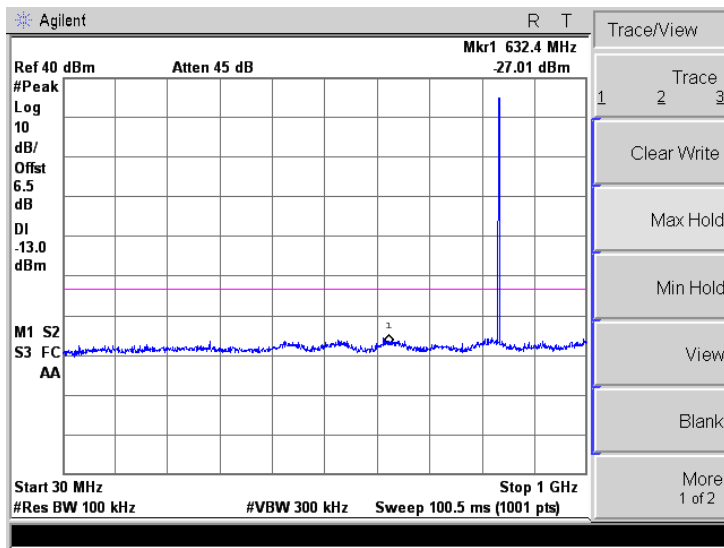

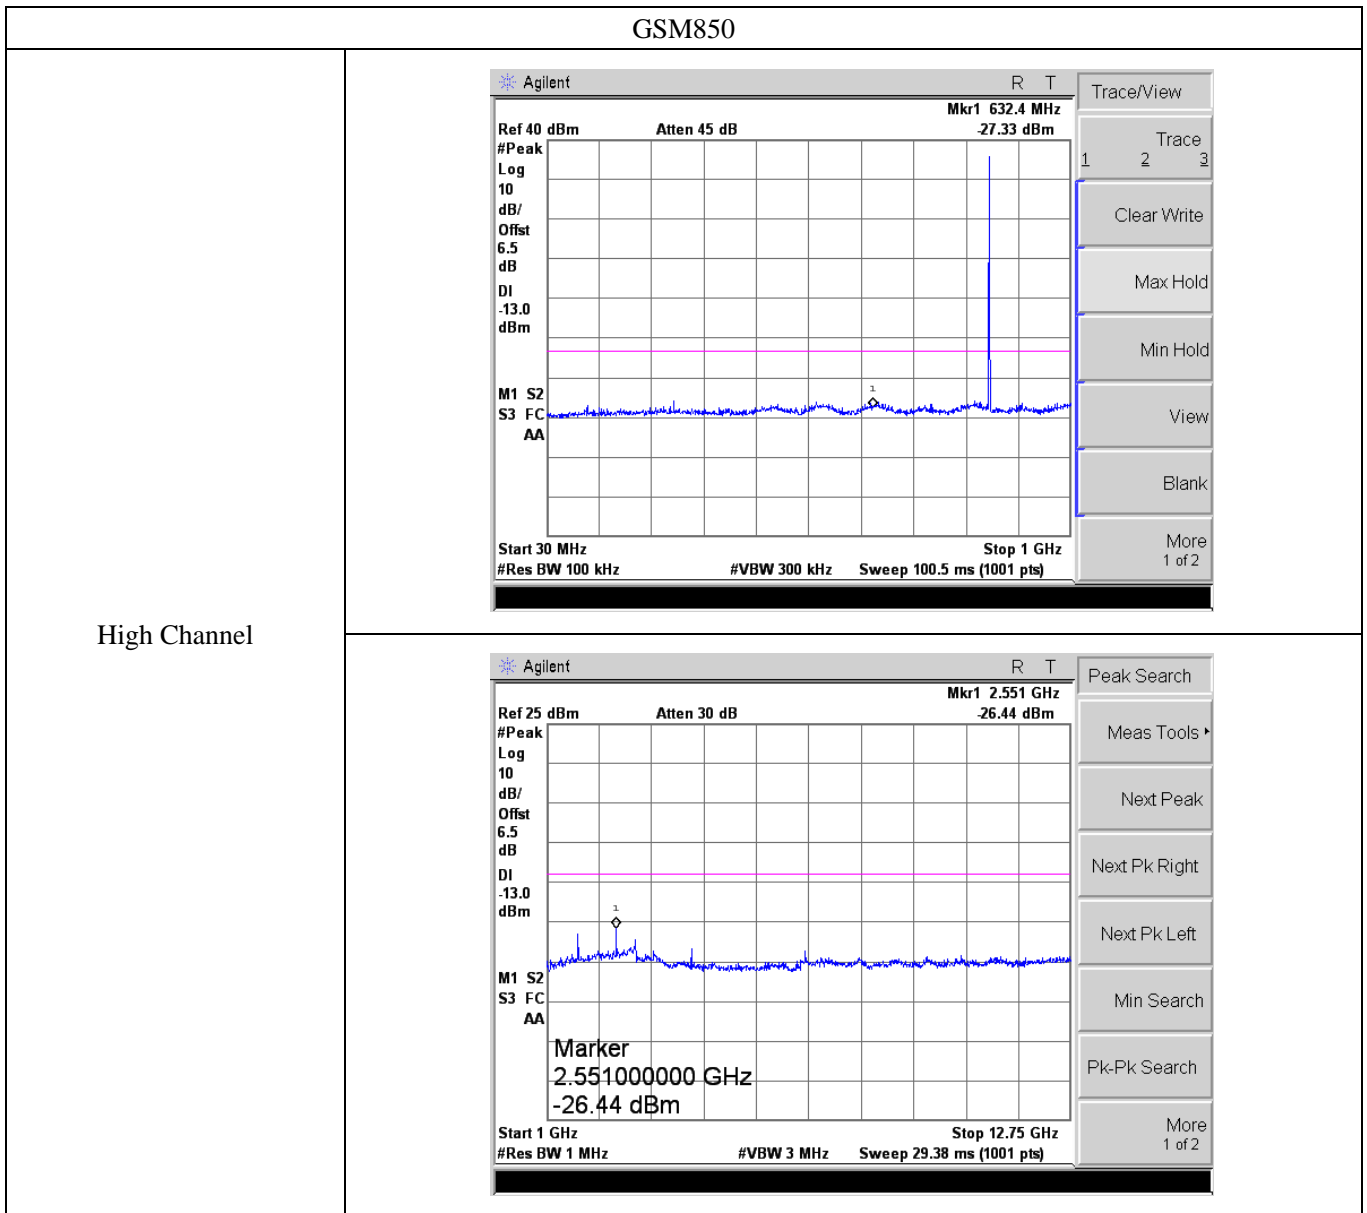


GSM850

Low Band Emission


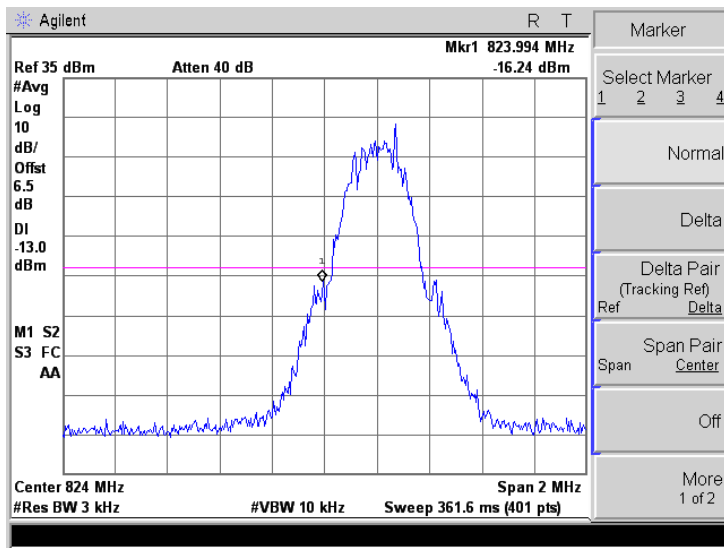


High Band Emission

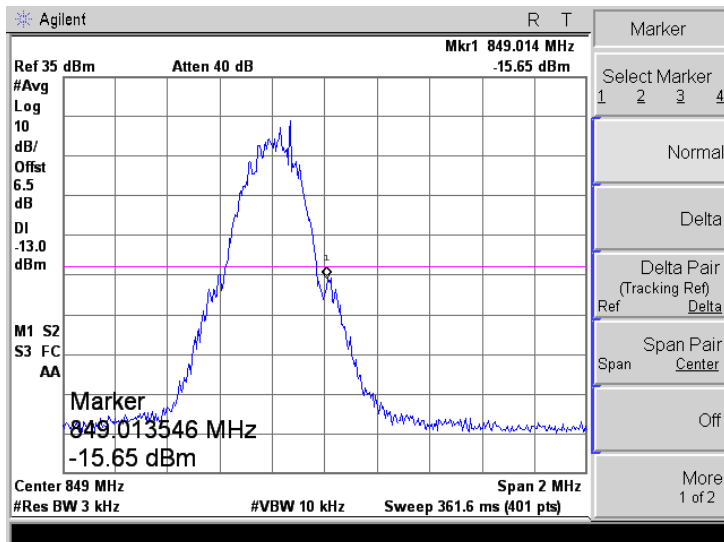

For Cellular Band



GPRS Low Channel

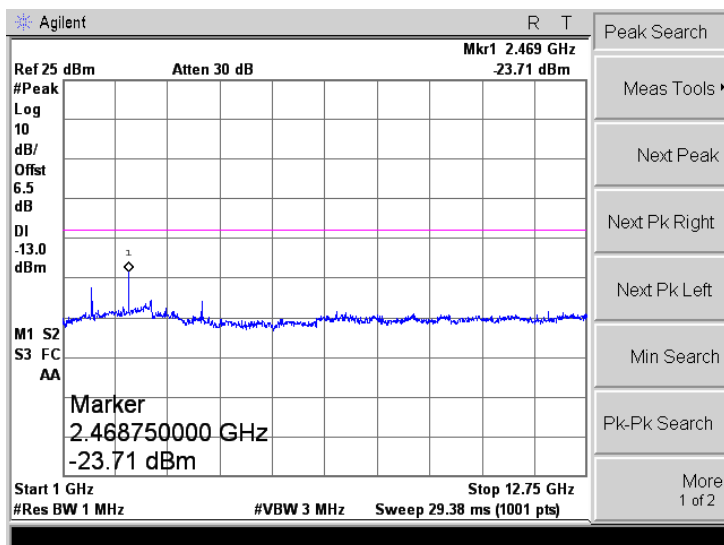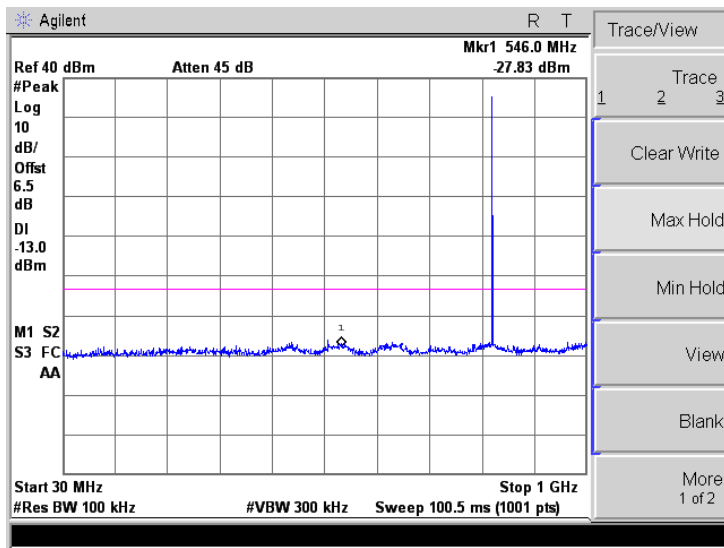





GPRS850


Middle Channel

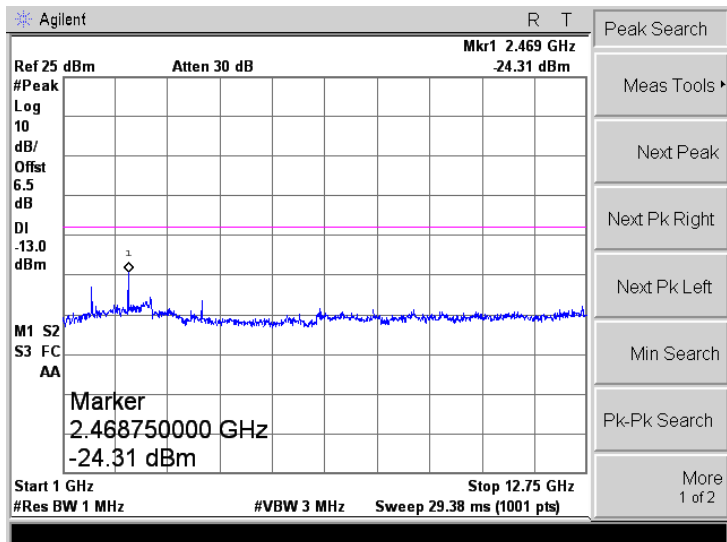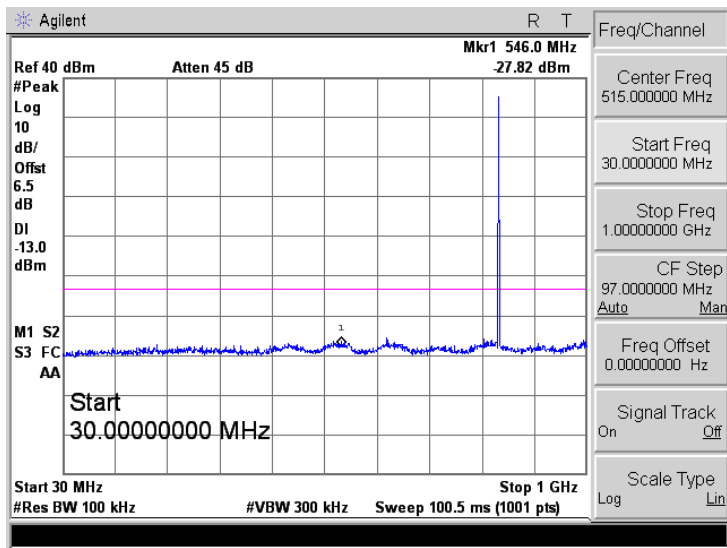

GPRS850



High Channel

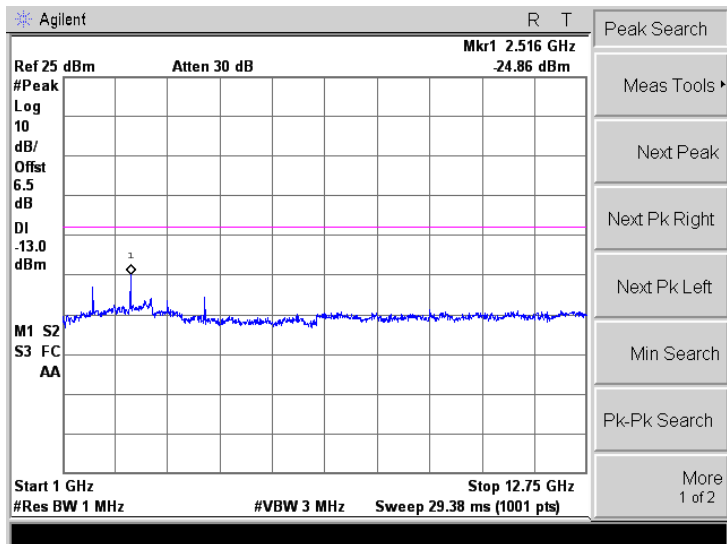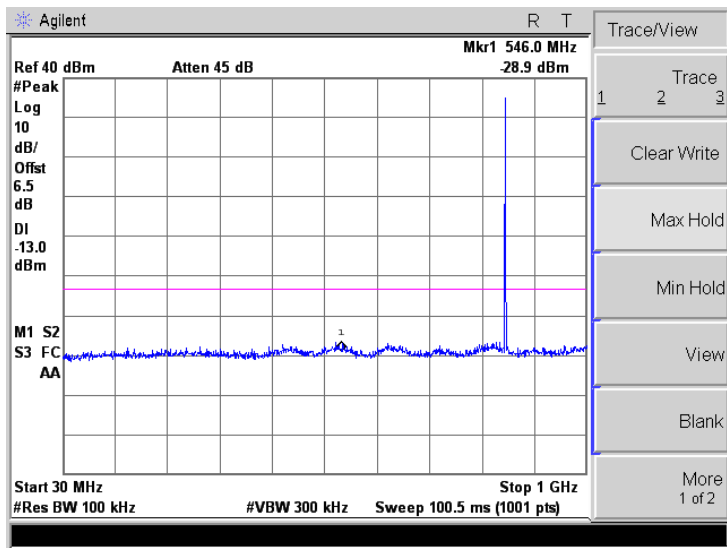

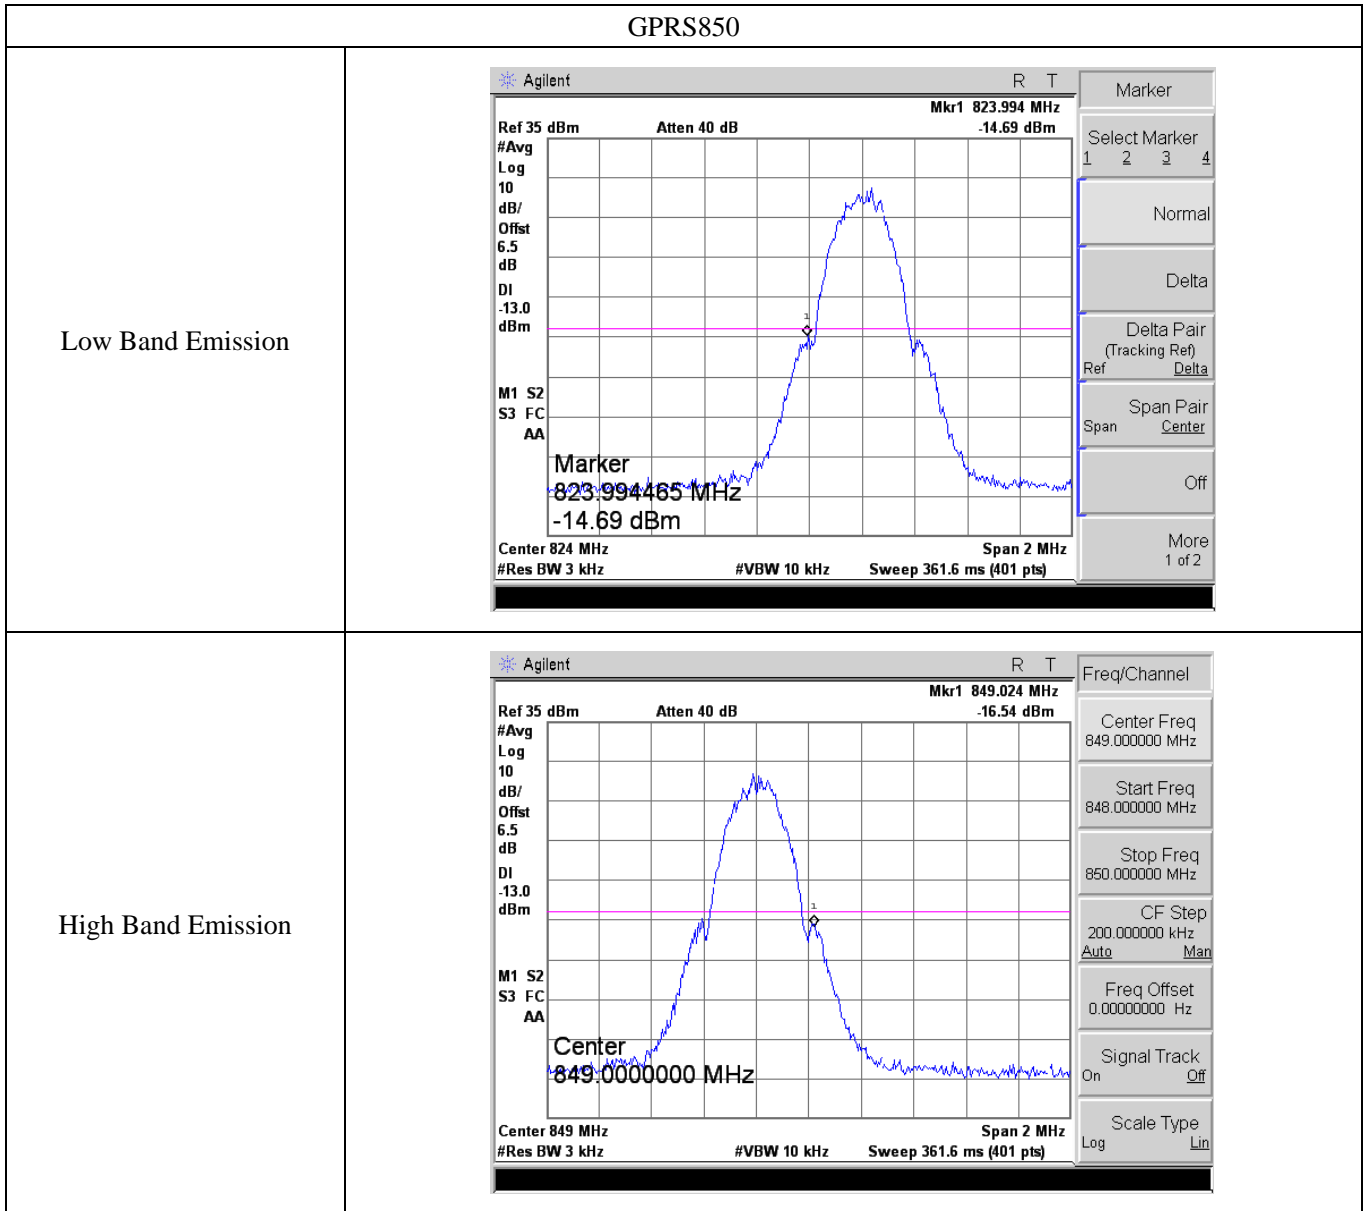



EGPRS850

Low Channel

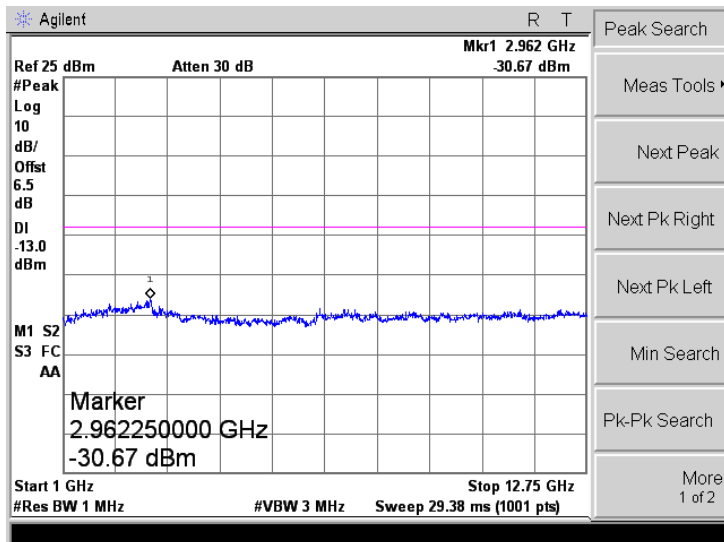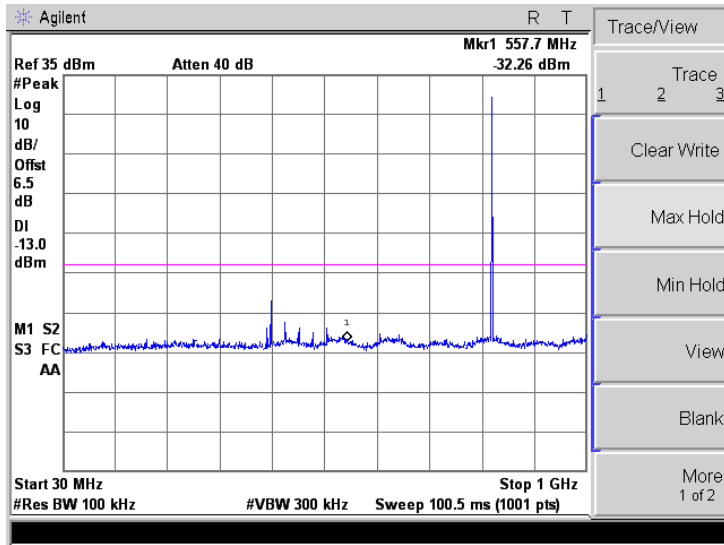



EGPRS850

Middle Channel

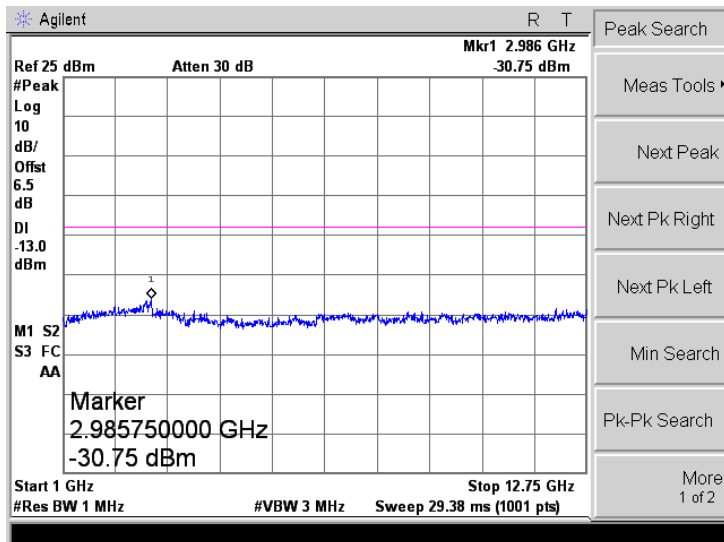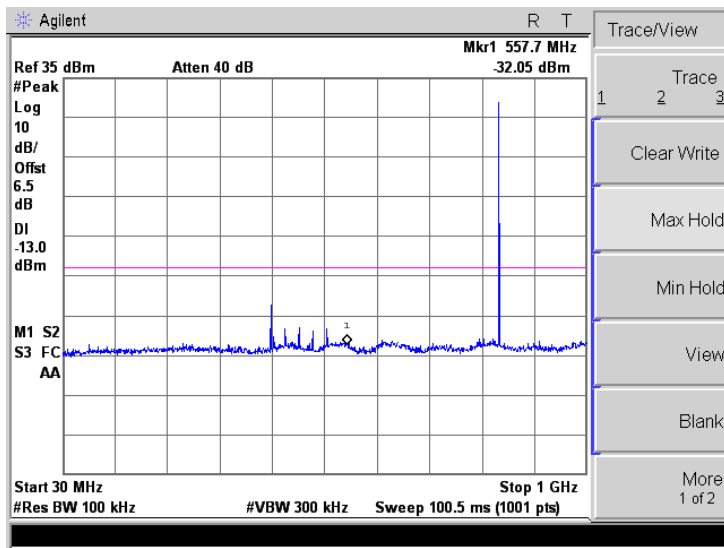

EGPRS850


High Channel

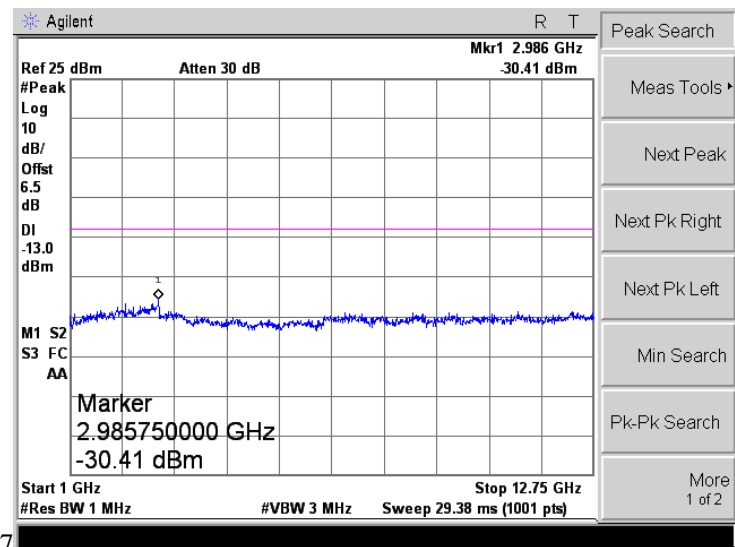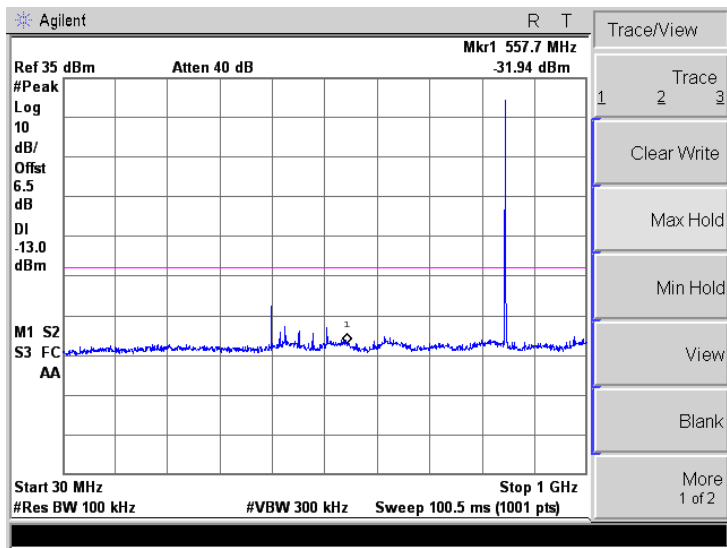


7

EGPRS850

Low Band Emission



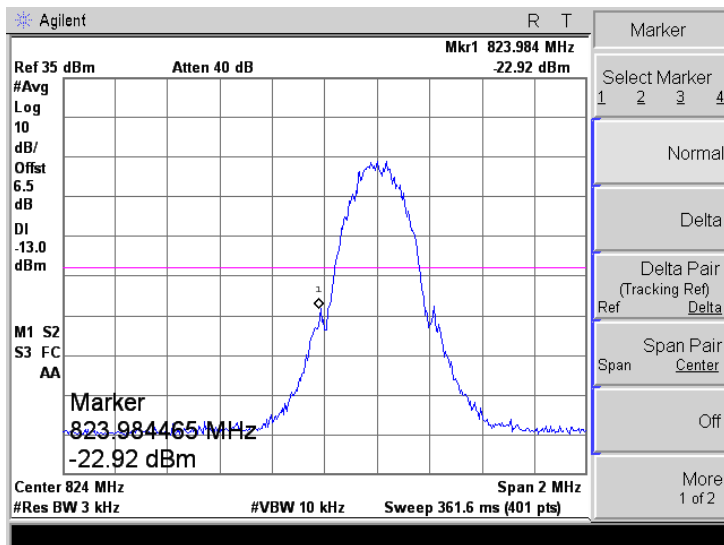


High Band Emission

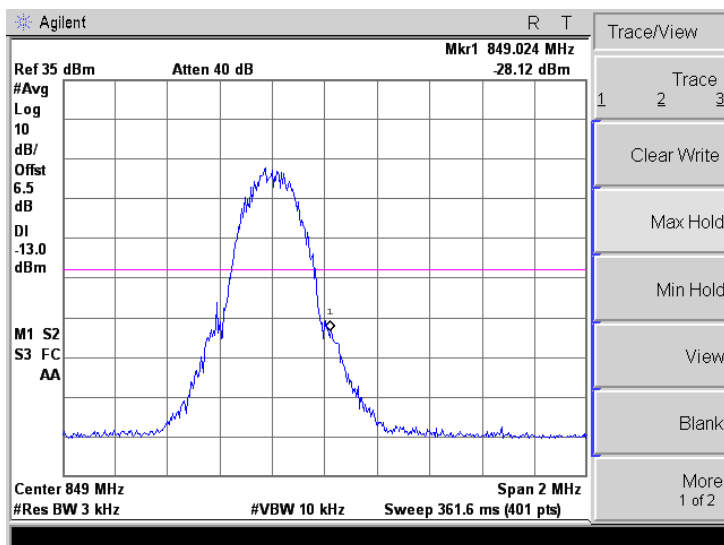

PCS1900




Low Channel

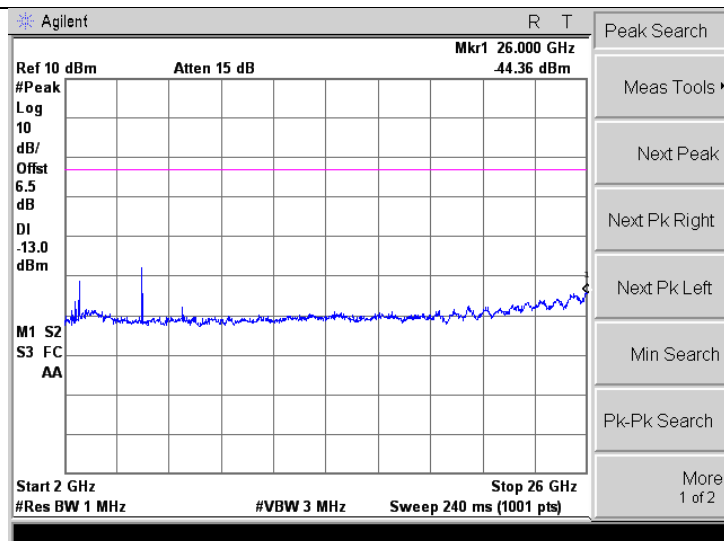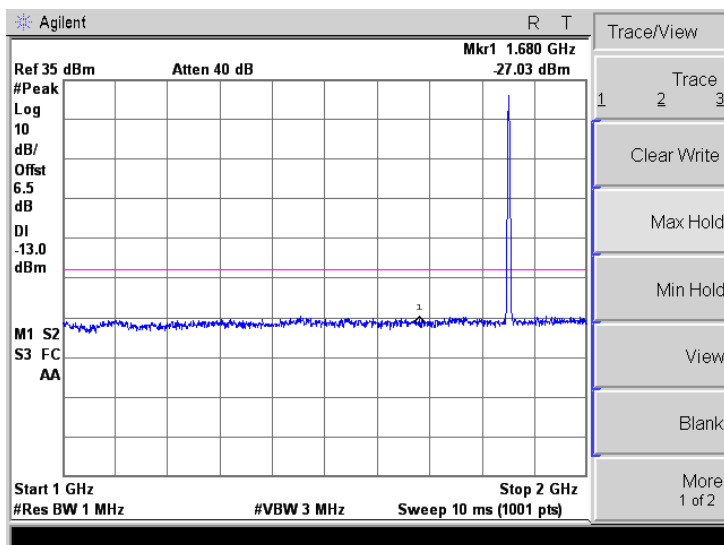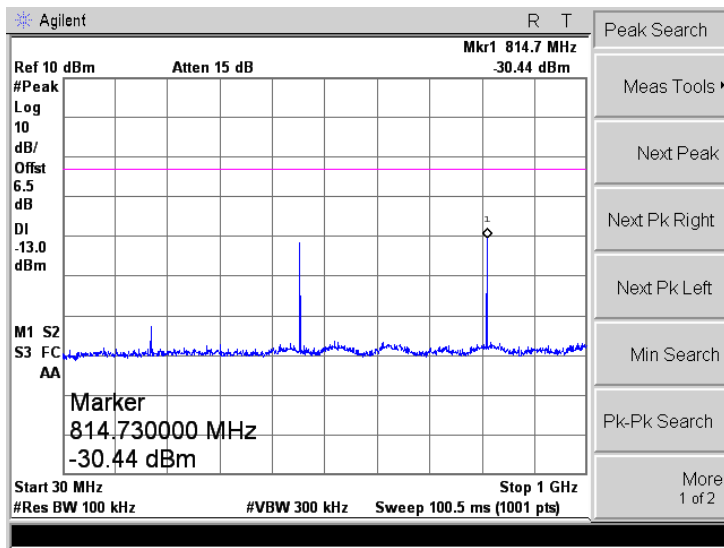






PCS1900

Middle Channel

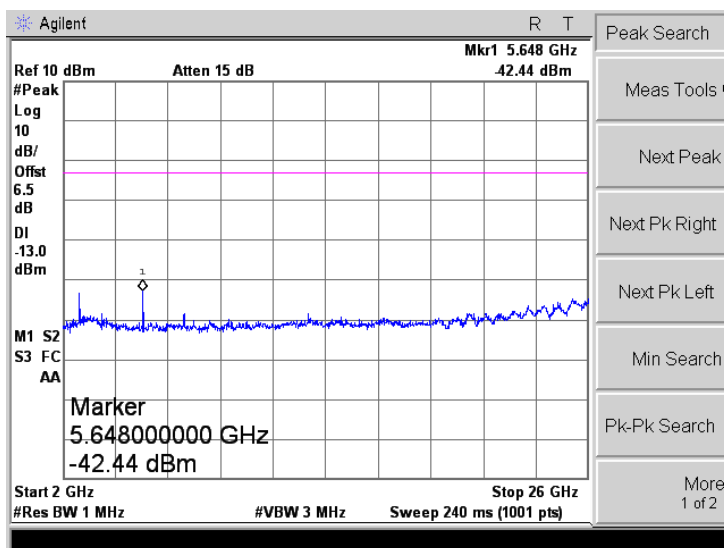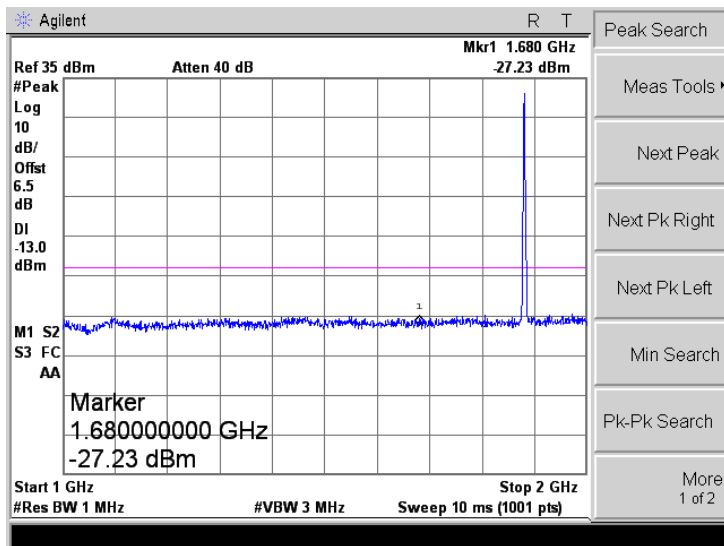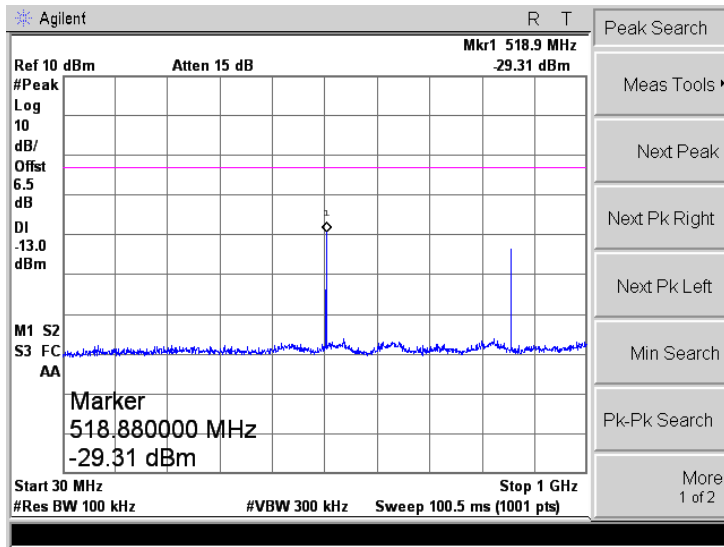


PCS1900

High Channel

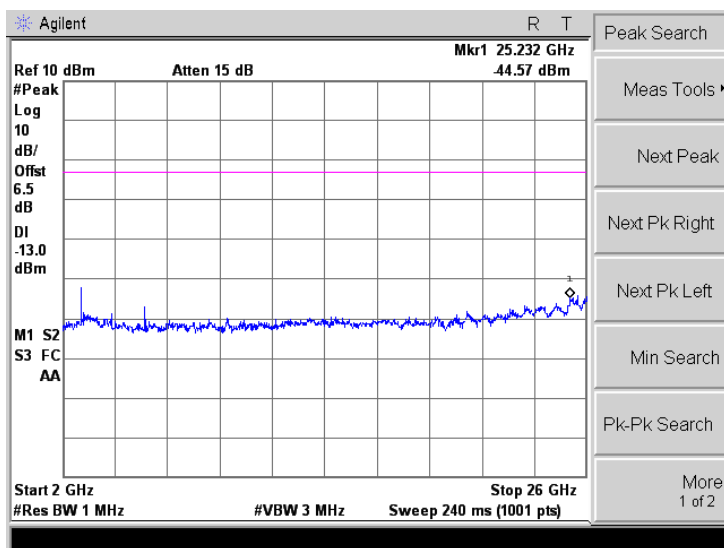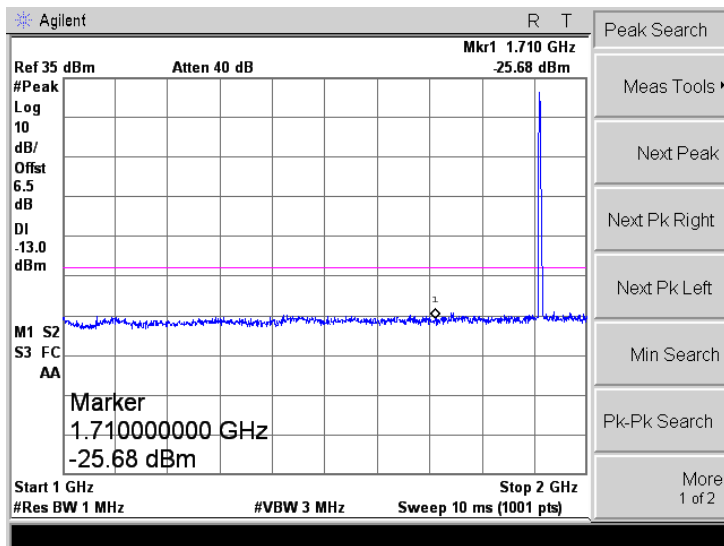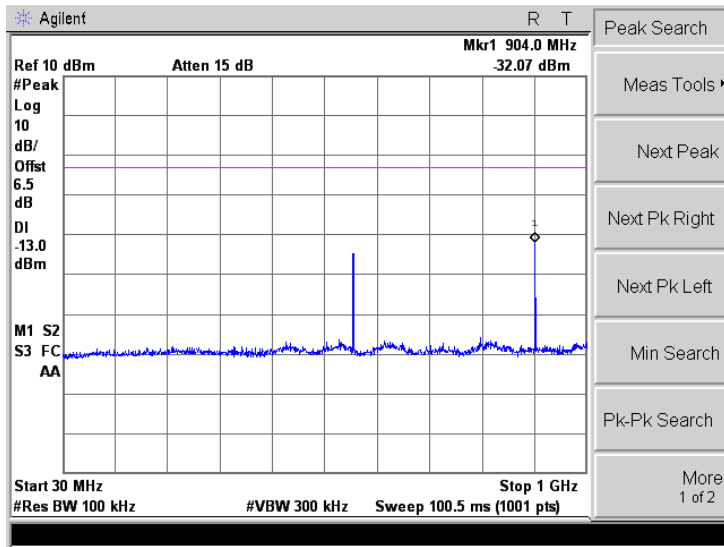


PCS1900

Low Band Emission



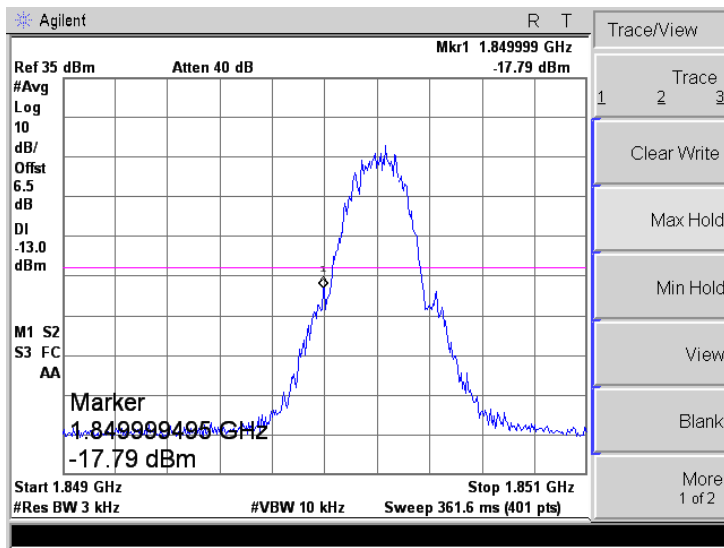


High Band Emission

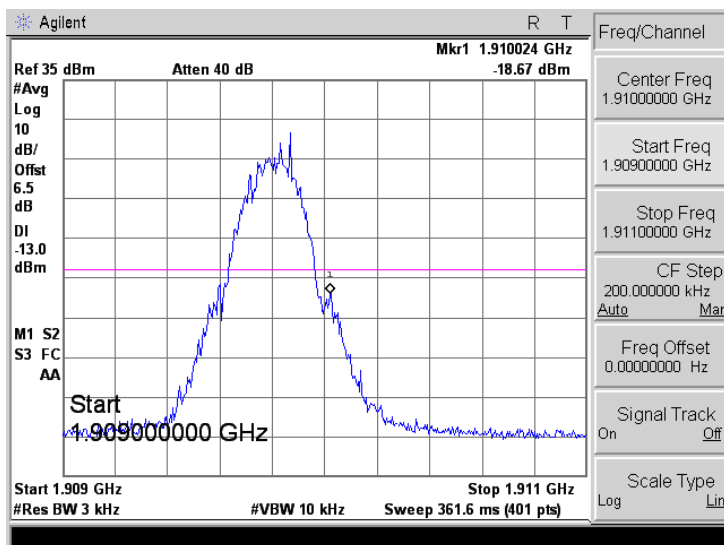




GPRS1900

Low Channel

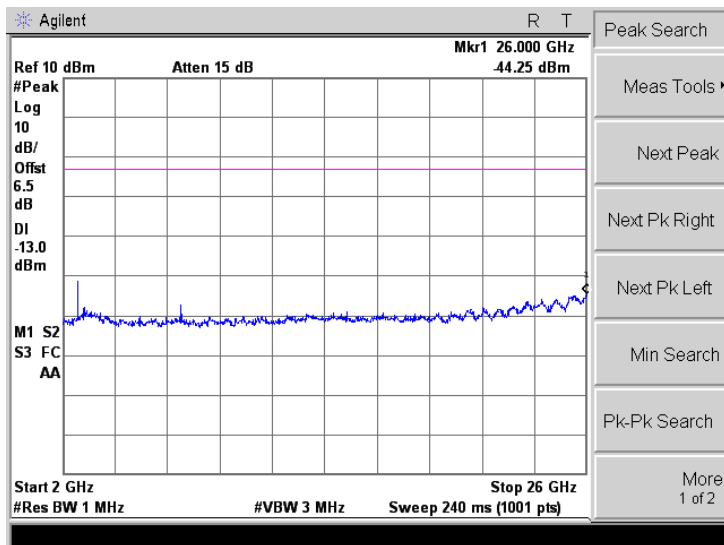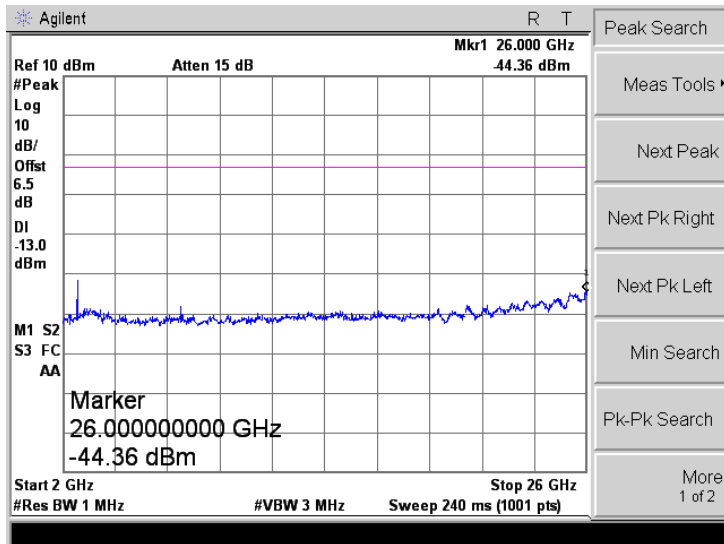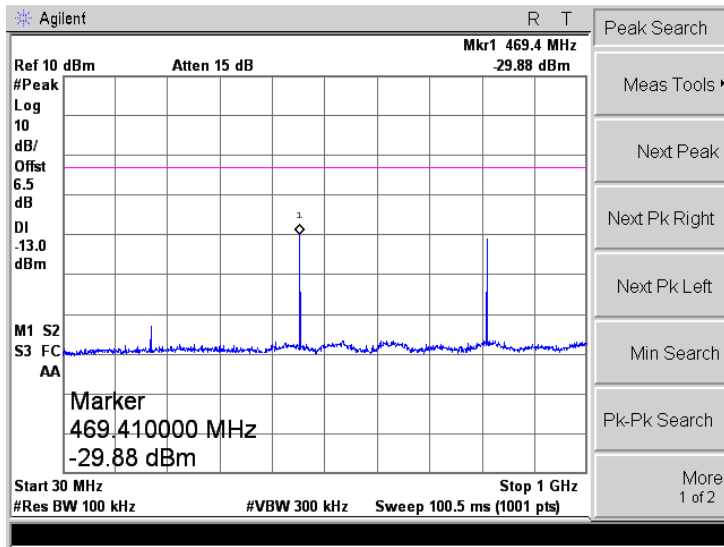




GPRS1900


Middle Channel

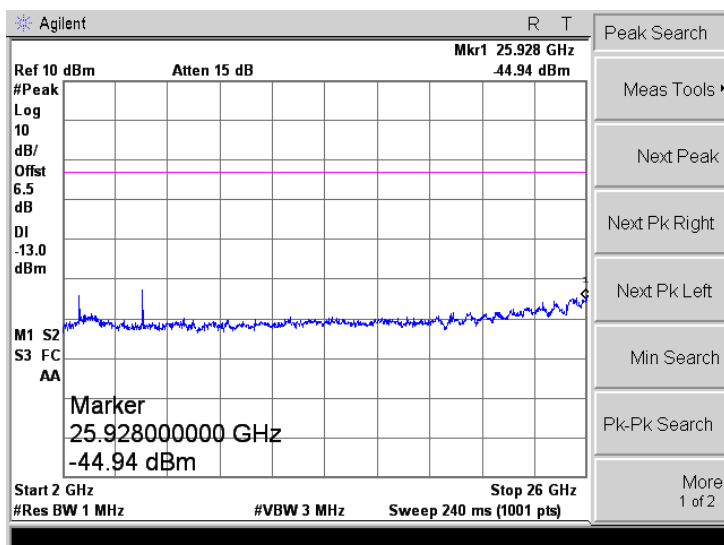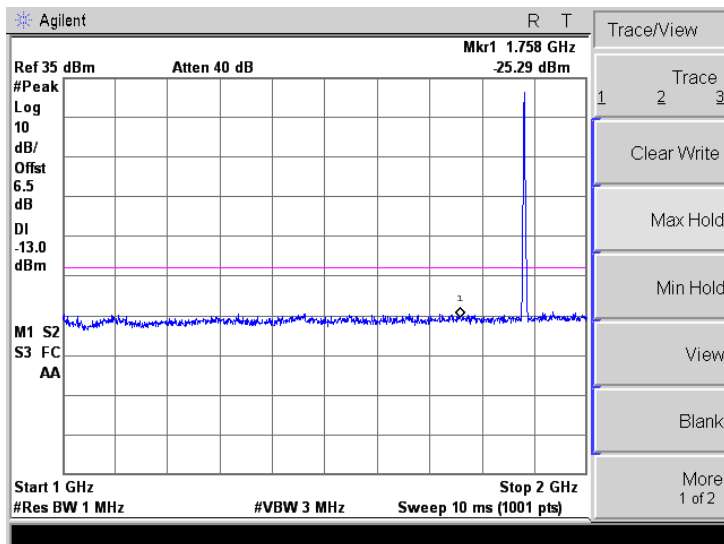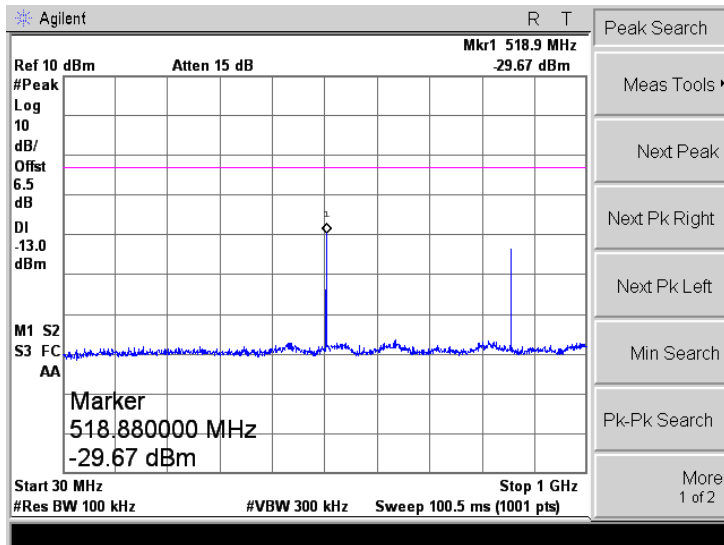

GPRS1900




High Channel

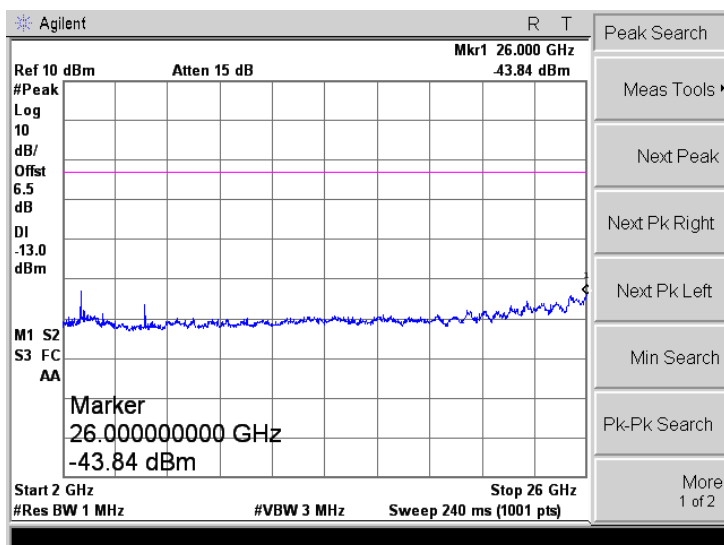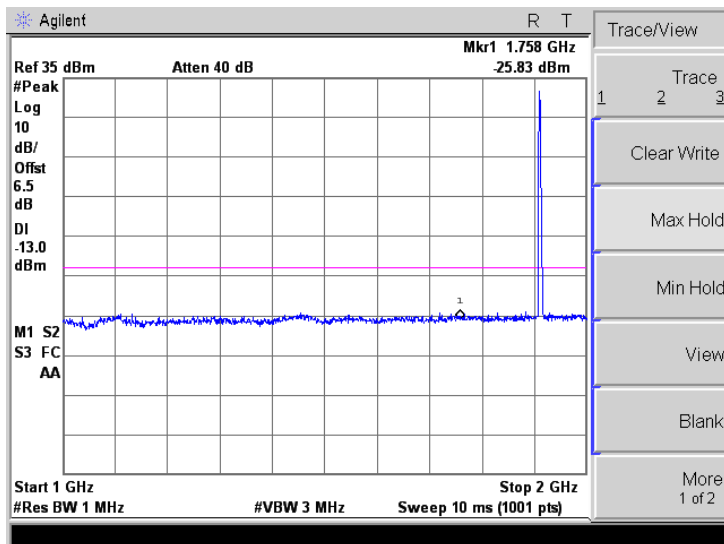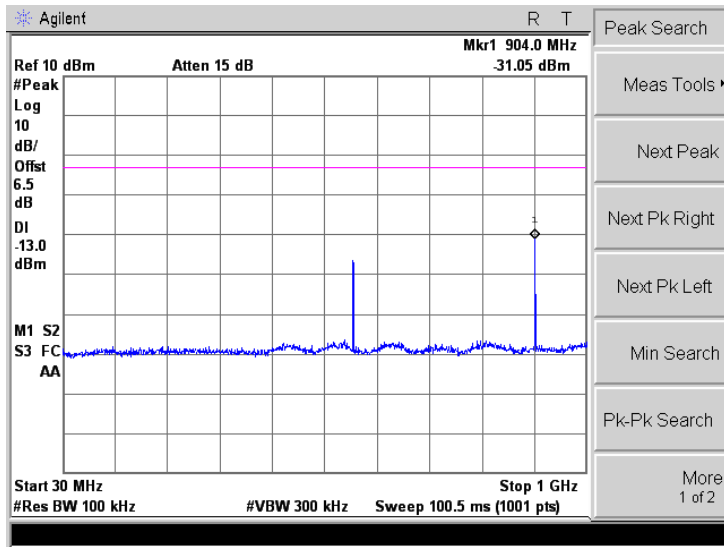

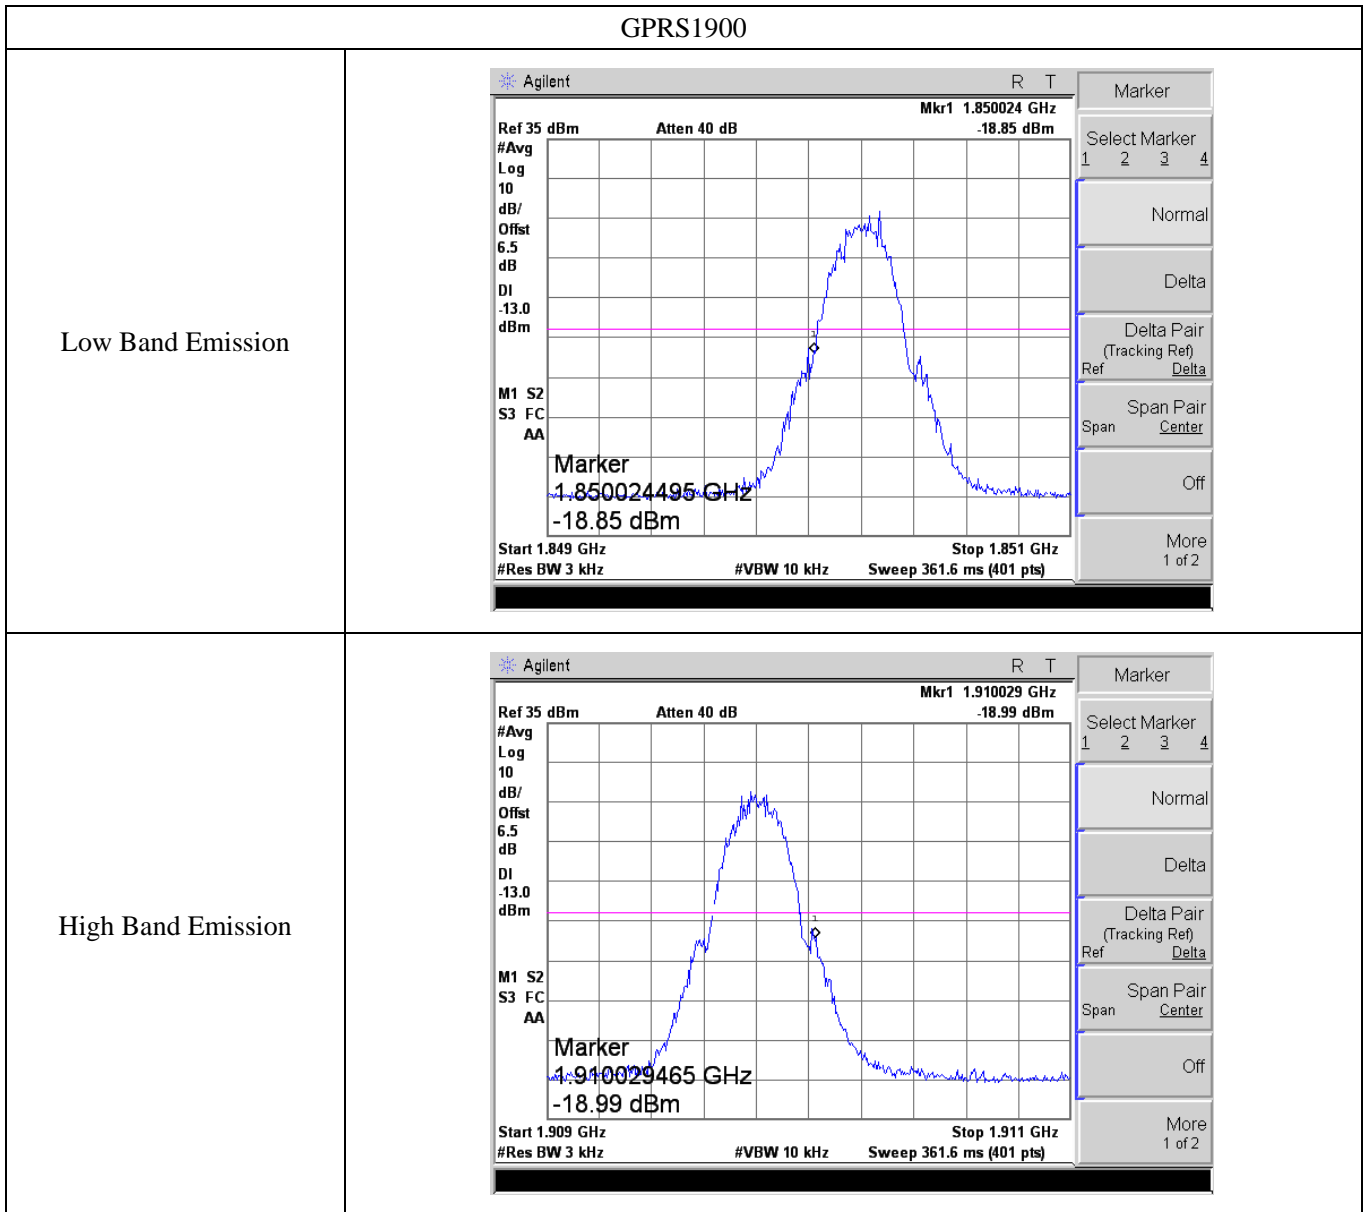

EGPRS1900




Low Channel

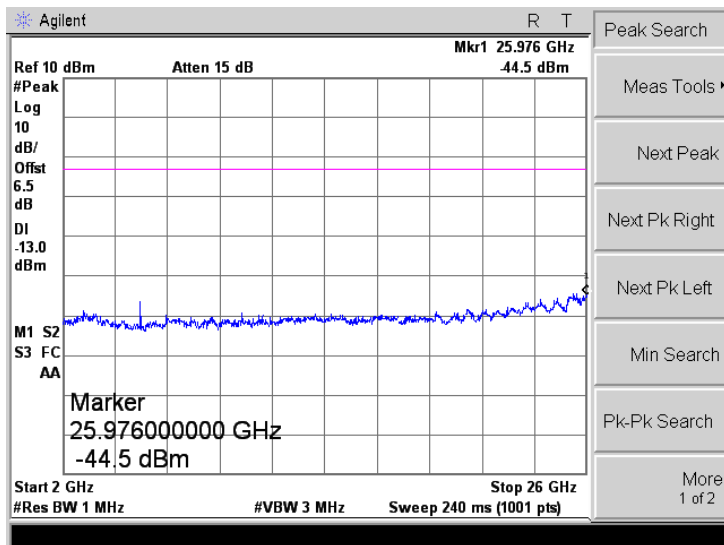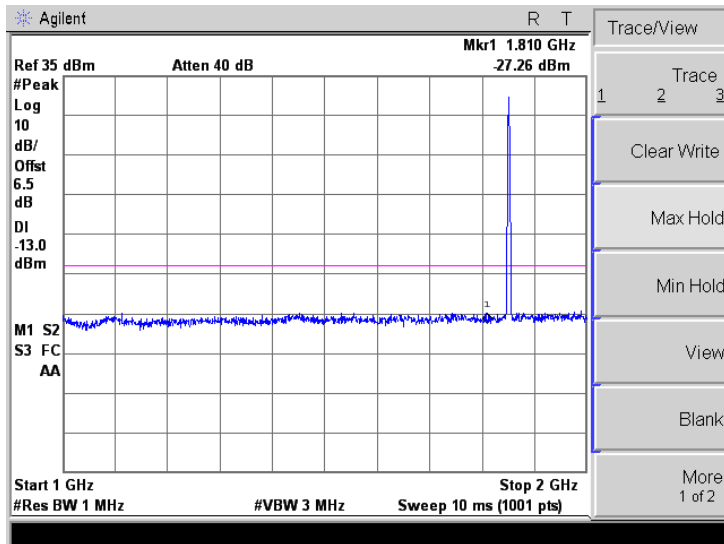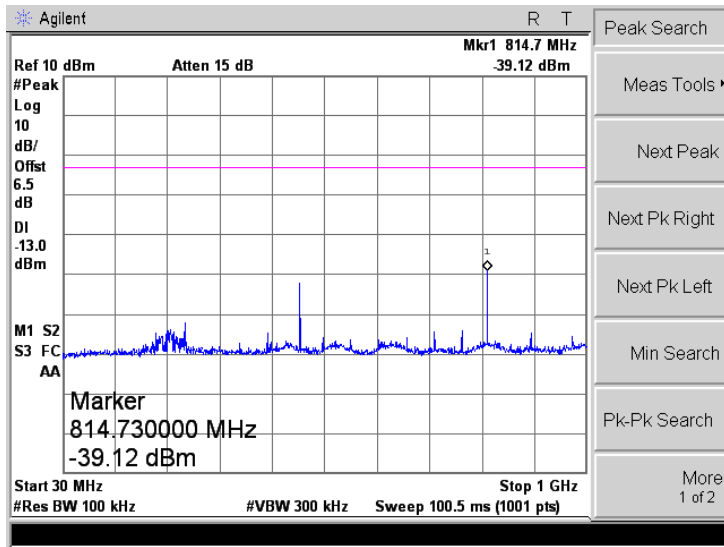






EGPRS1900


Middle Channel

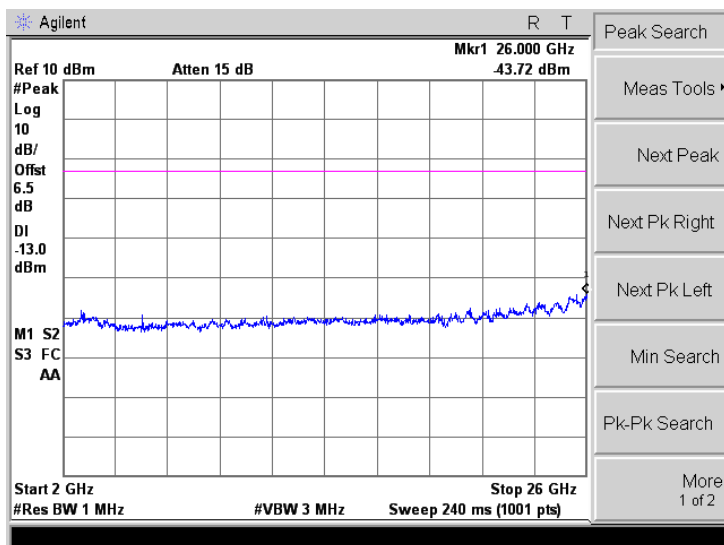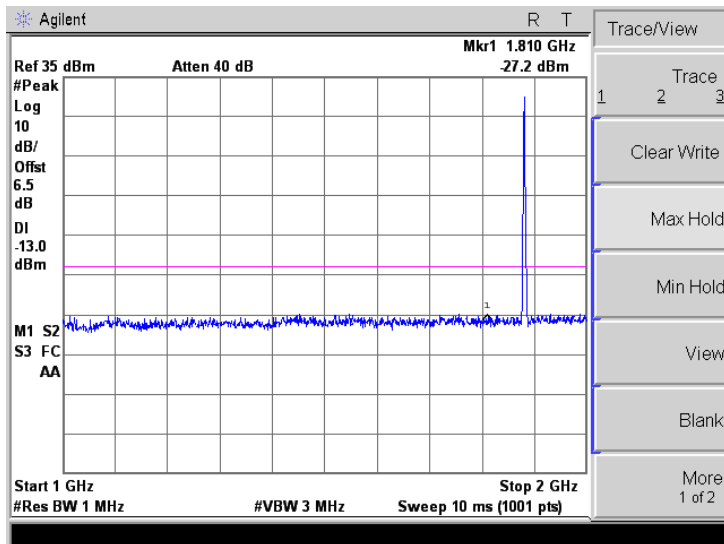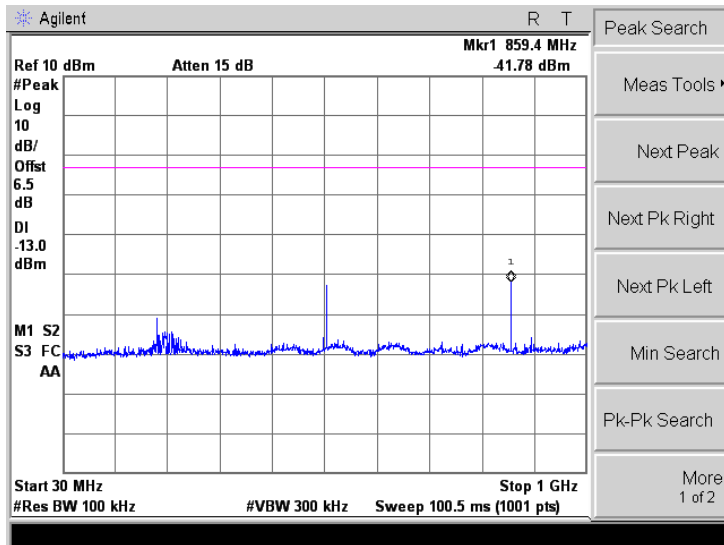

EGPRS1900



High Channel

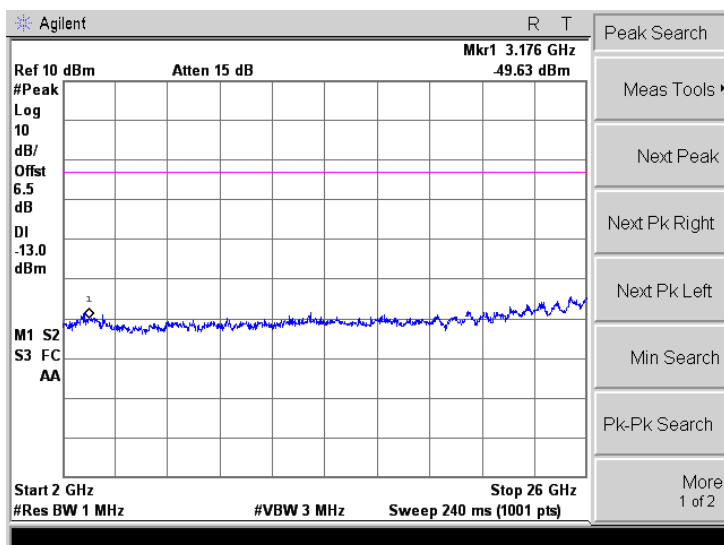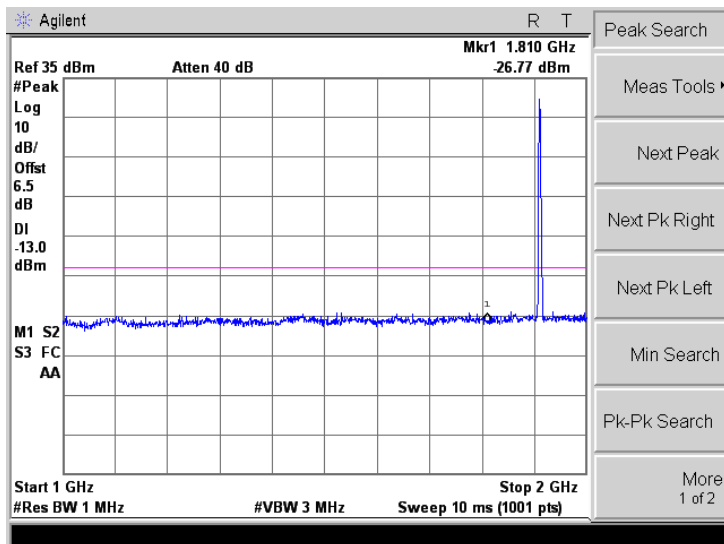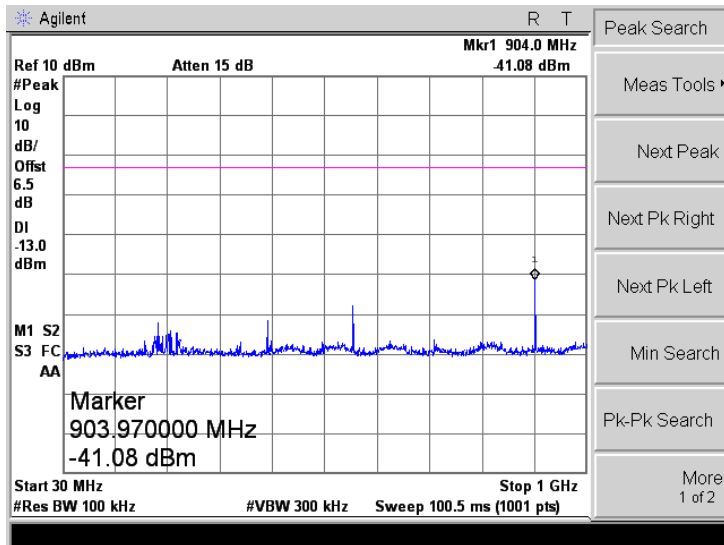

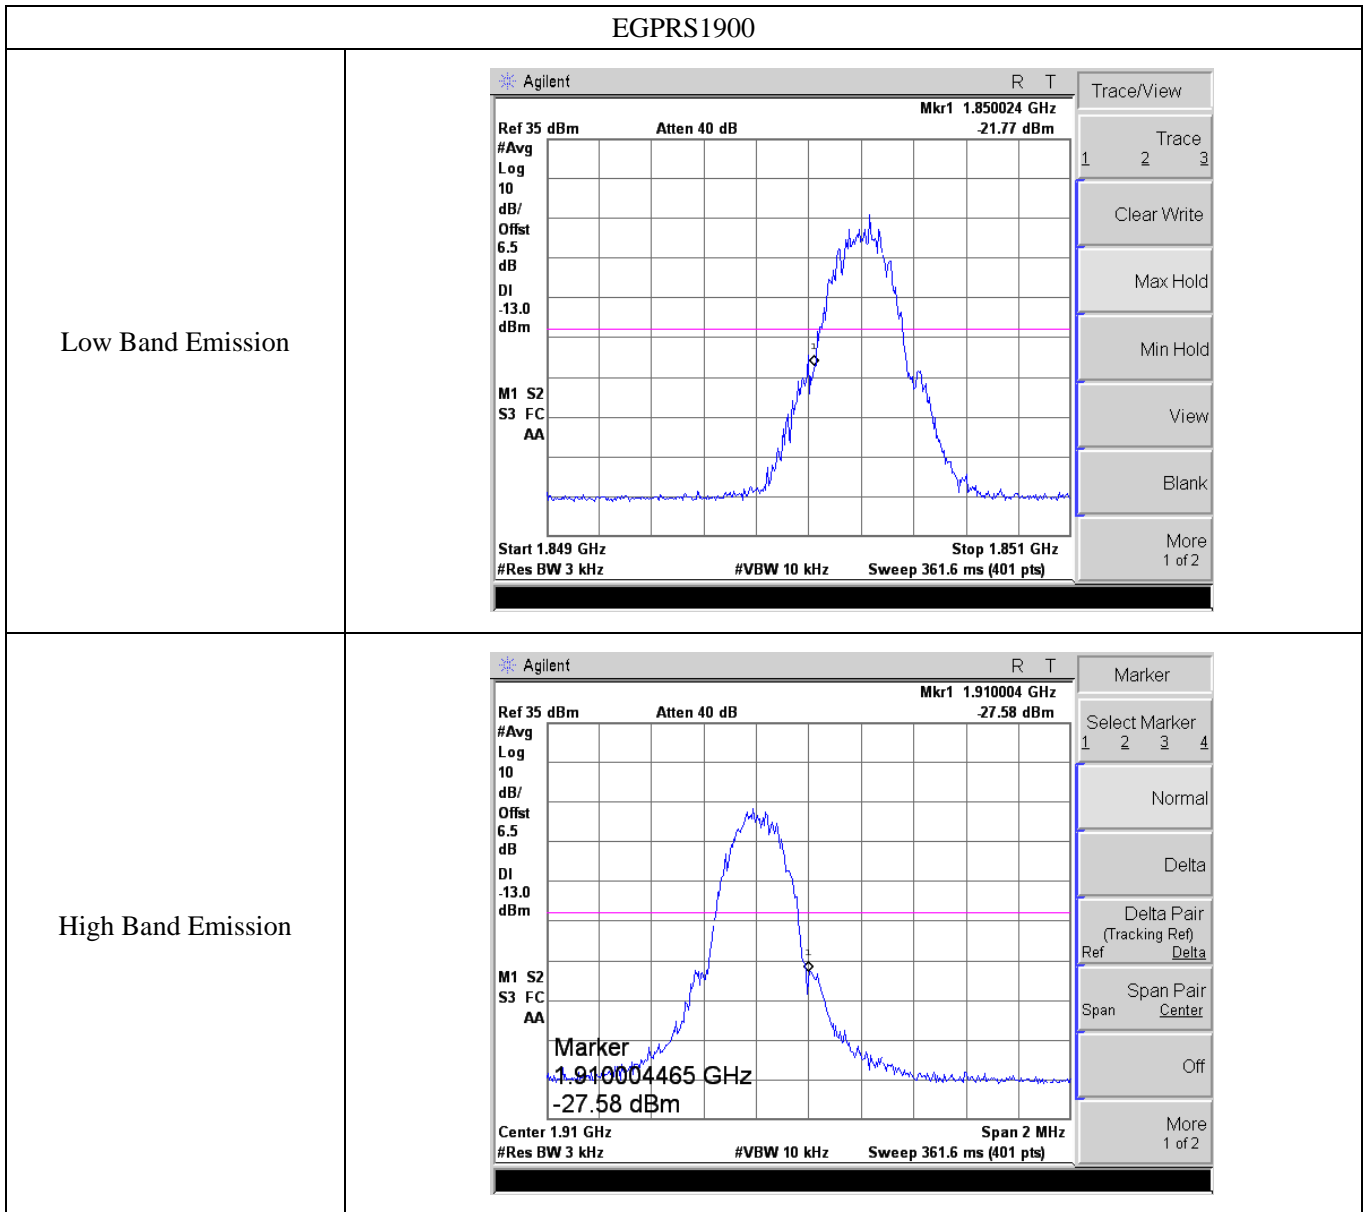



WCDMA Band V

Low Channel

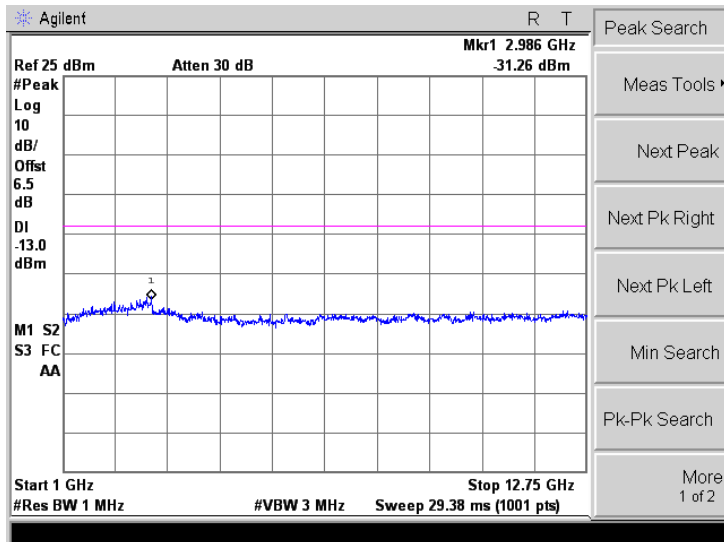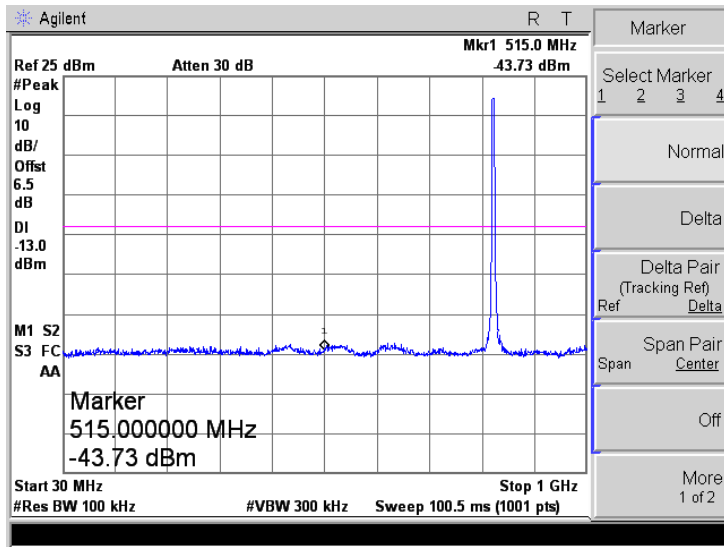



WCDMA Band V

Middle Channel

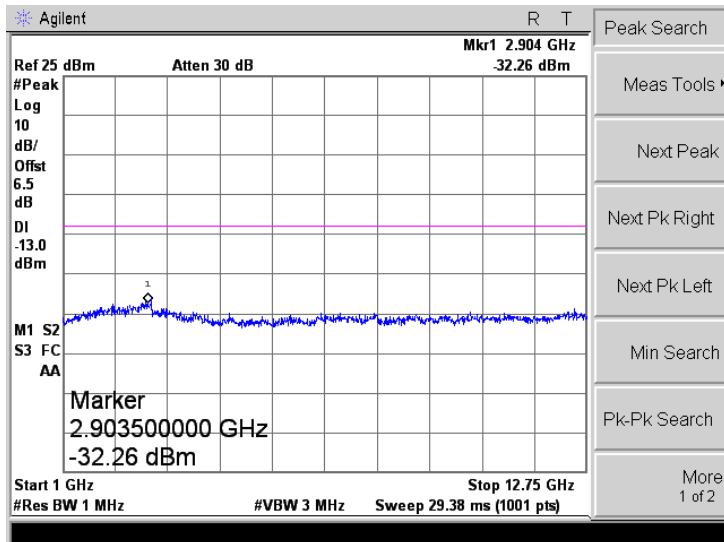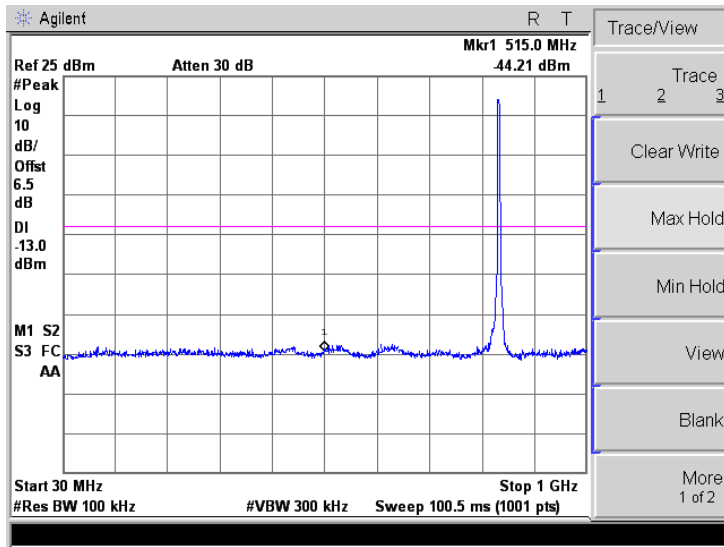


WCDMA Band V

High Channel

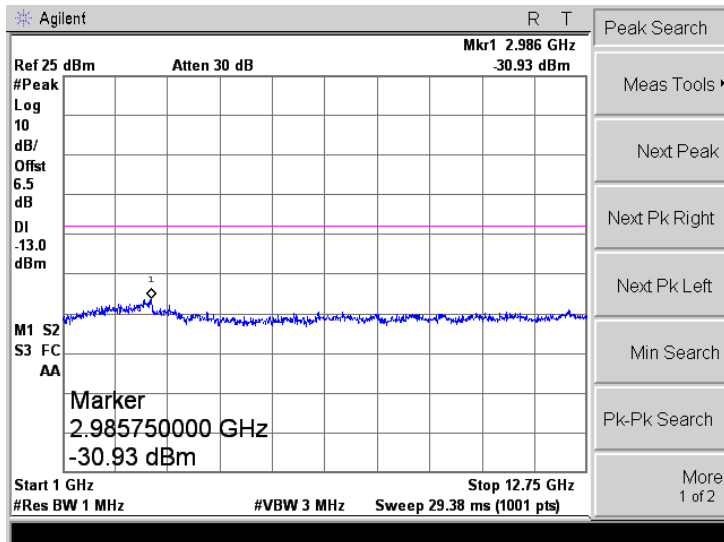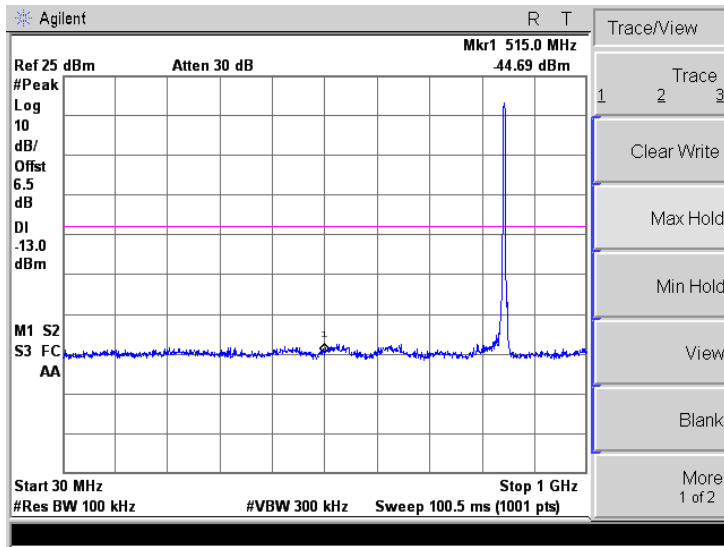


WCDMA Band V

Low Band Emission



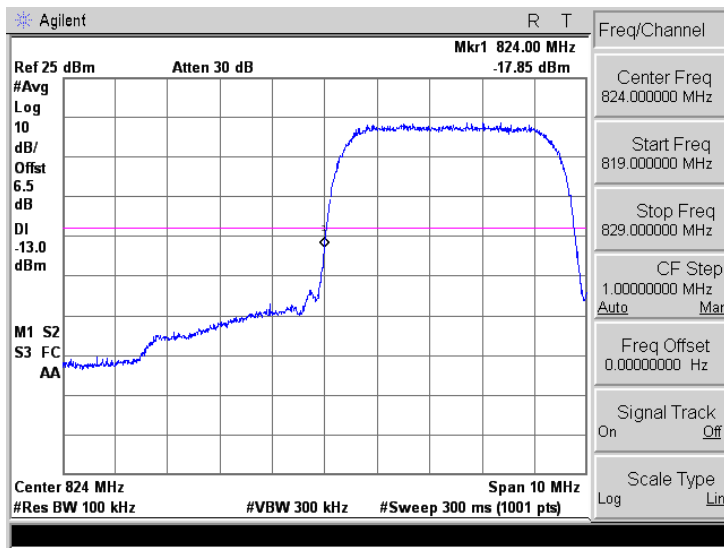


High Band Emission

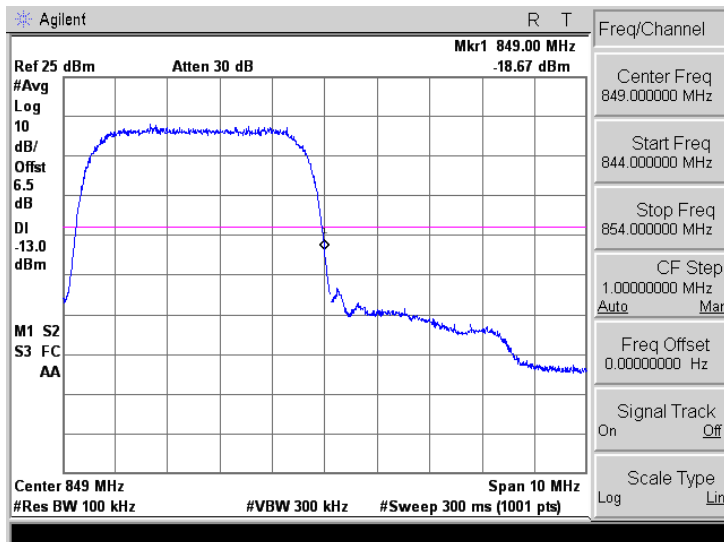

WCDMA Band II




Low Channel

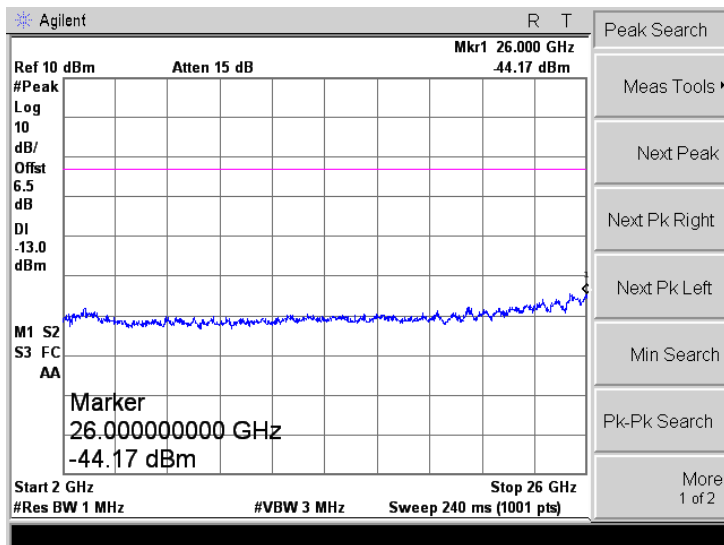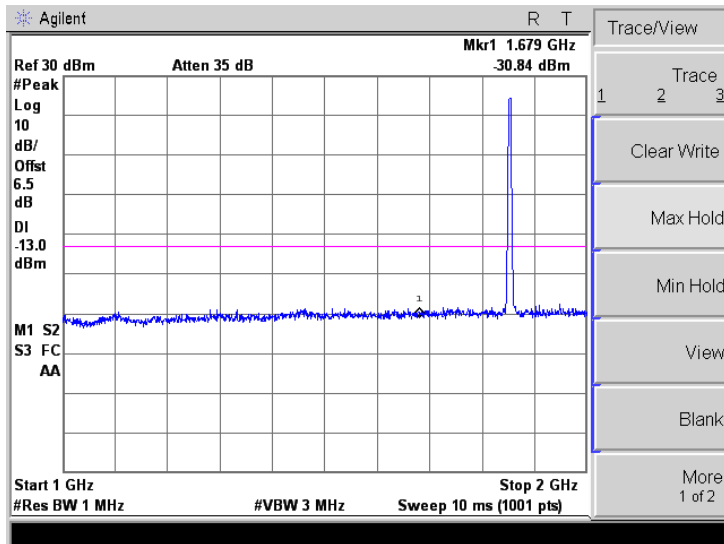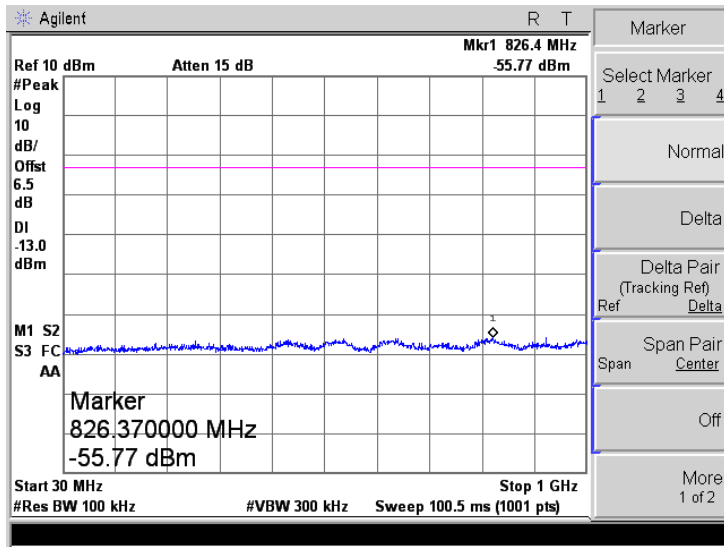






WCDMA Band II

Middle Channel

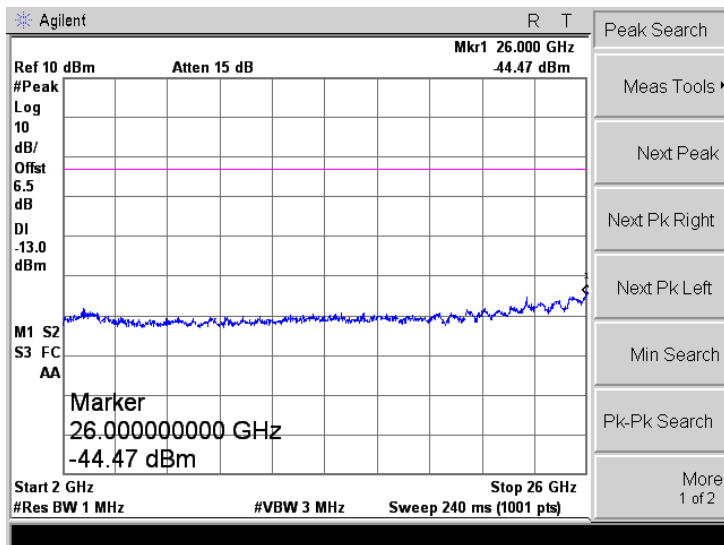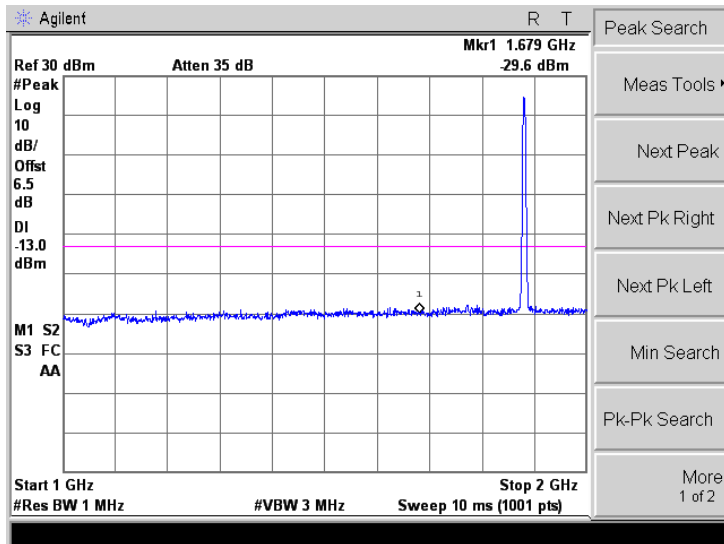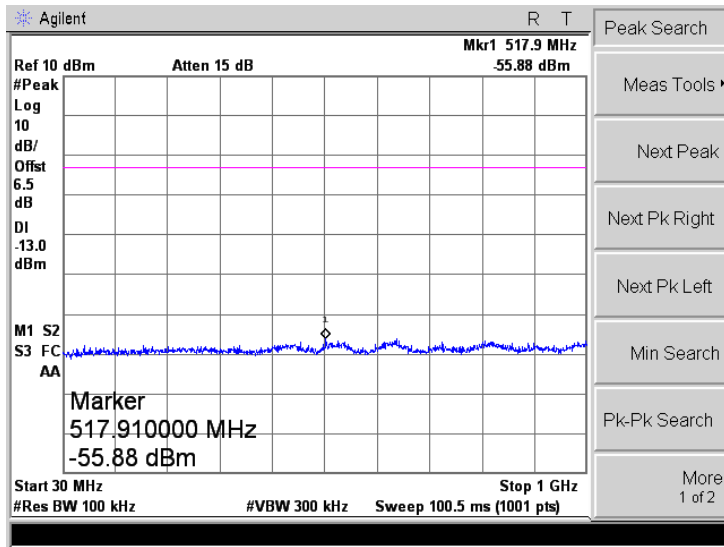


WCDMA Band II

High Channel

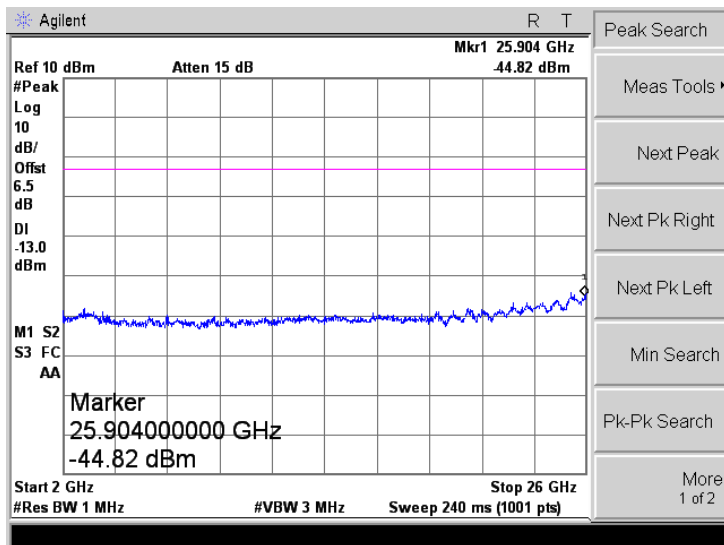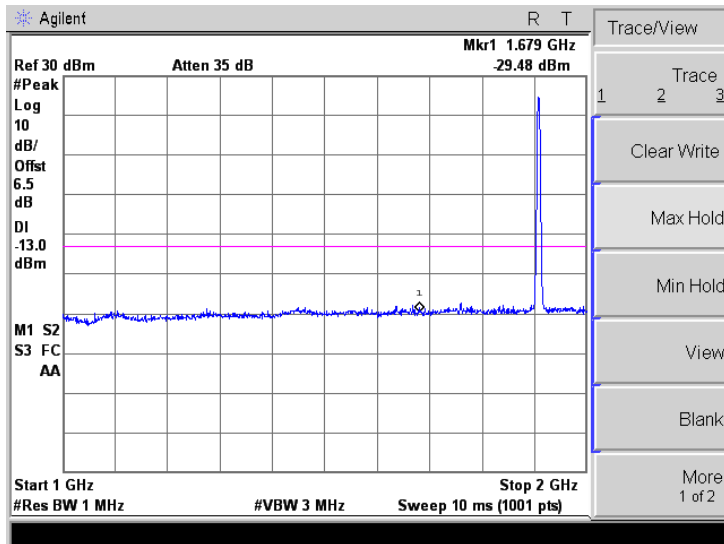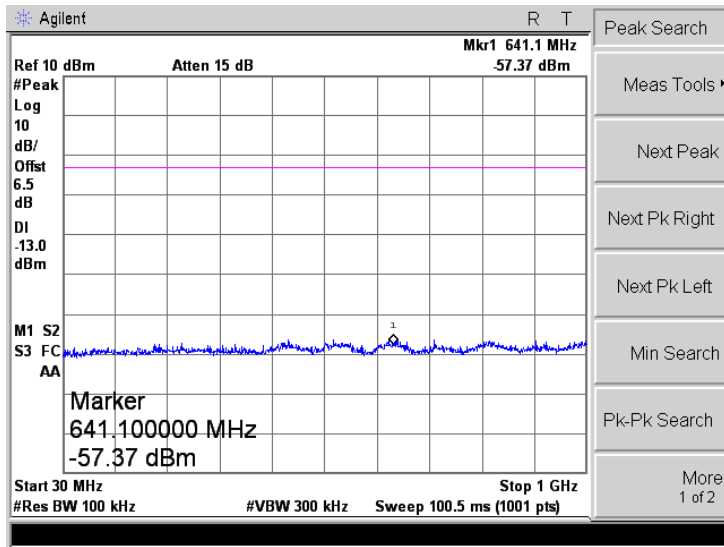


WCDMA Band II

Low Band Emission

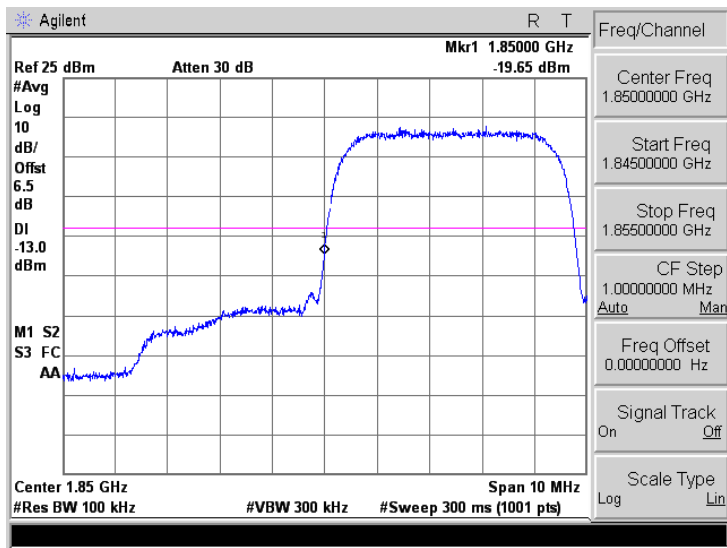

High Band Emission

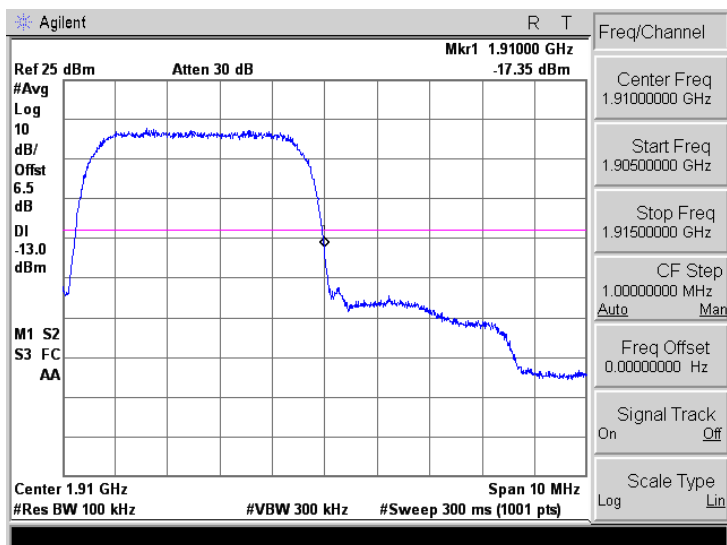

## 8. Spurious Radiated Emissions

---

### 8.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### 8.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.


Spurious attenuation limit in dB =  $43 + 10 \log_{10}$  (power out in Watts)

### 8.3 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


➤ Spurious Emissions Below 1GHz

For Cellular Band			
Test Channel	GSM850	Polarity:	Horizontal

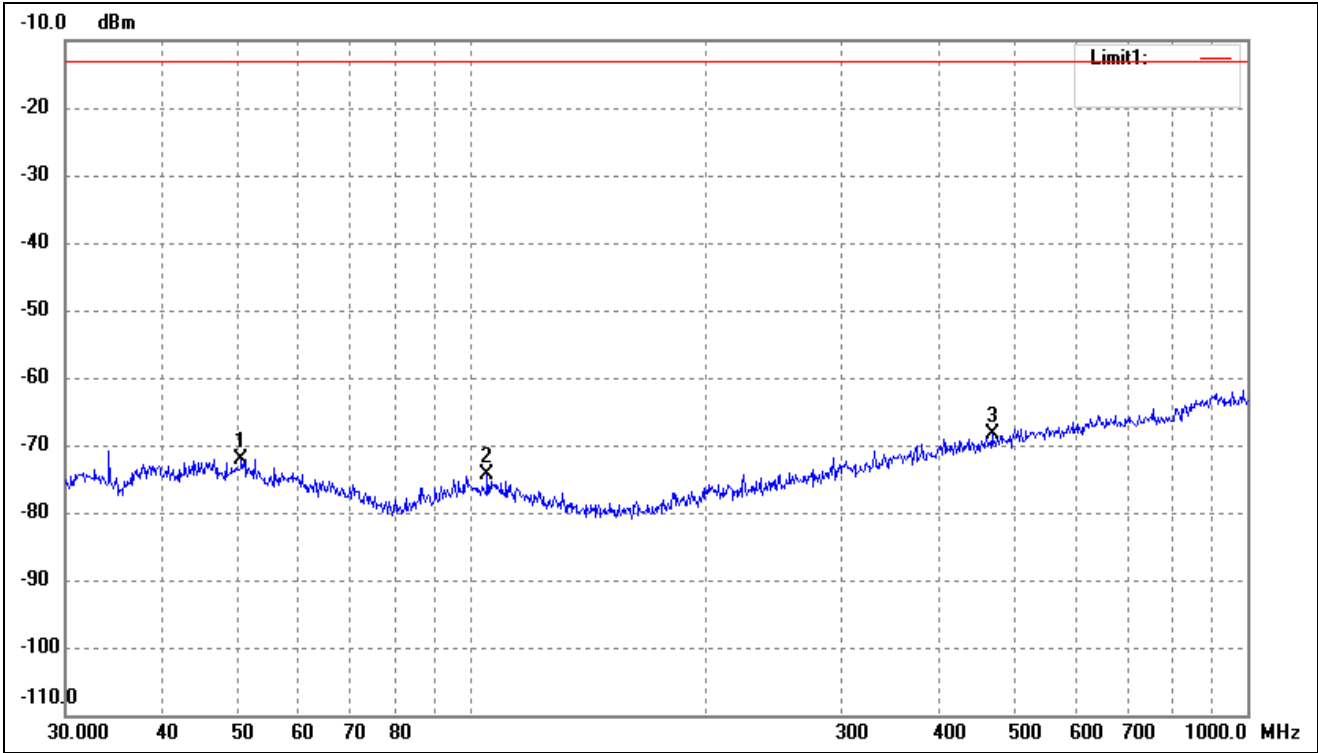


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	50.5860	-72.16	0.11	-72.05	-13.00	-59.05	-	-	peak
2	104.9033	-72.75	-1.52	-74.27	-13.00	-61.27	-	-	peak
3	468.8762	-75.21	6.80	-68.41	-13.00	-55.41	-	-	peak

For Cellular Band			
Test Channel	GSM850	Polarity:	Vertical

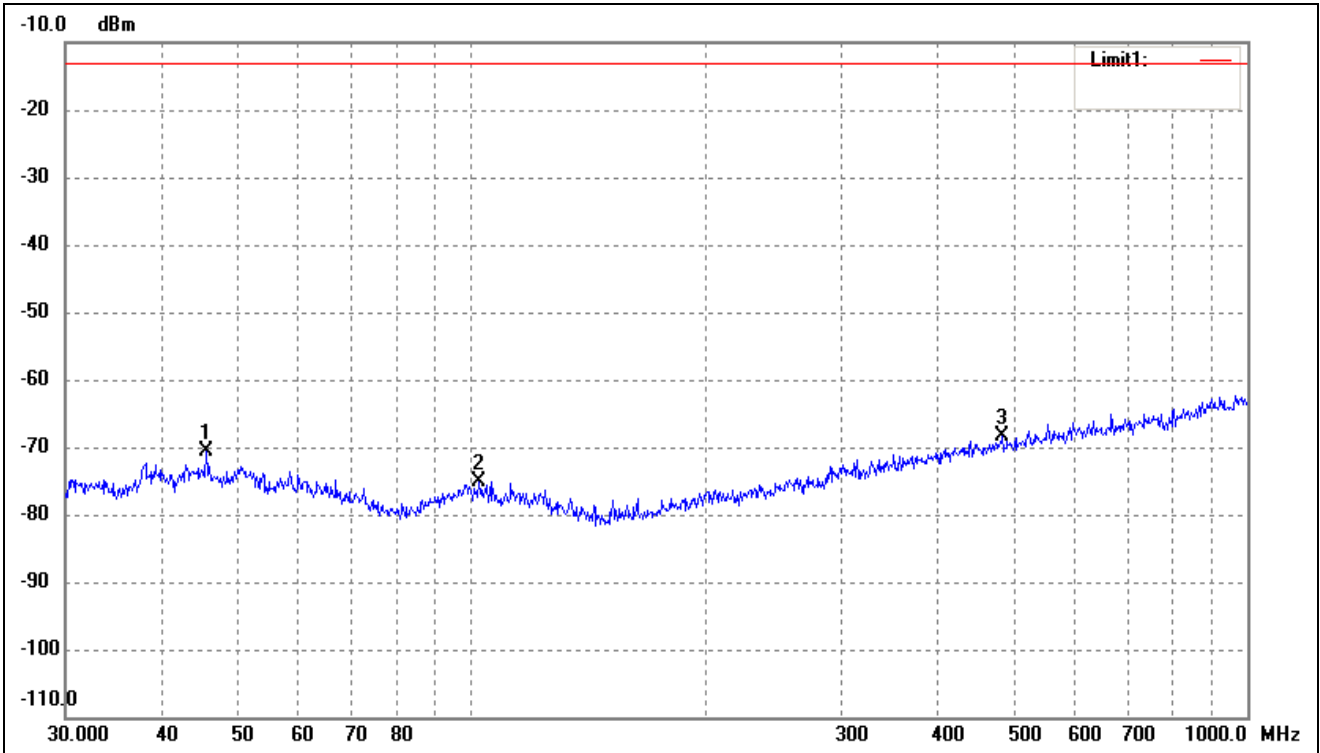


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	45.5348	-70.74	0.03	-70.71	-13.00	-57.71	-	-	peak
2	102.3597	-73.67	-1.51	-75.18	-13.00	-62.18	-	-	peak
3	483.9094	-75.60	7.27	-68.33	-13.00	-55.33	-	-	peak

For Cellular Band			
Test Channel	GSM1900	Polarity:	Horizontal

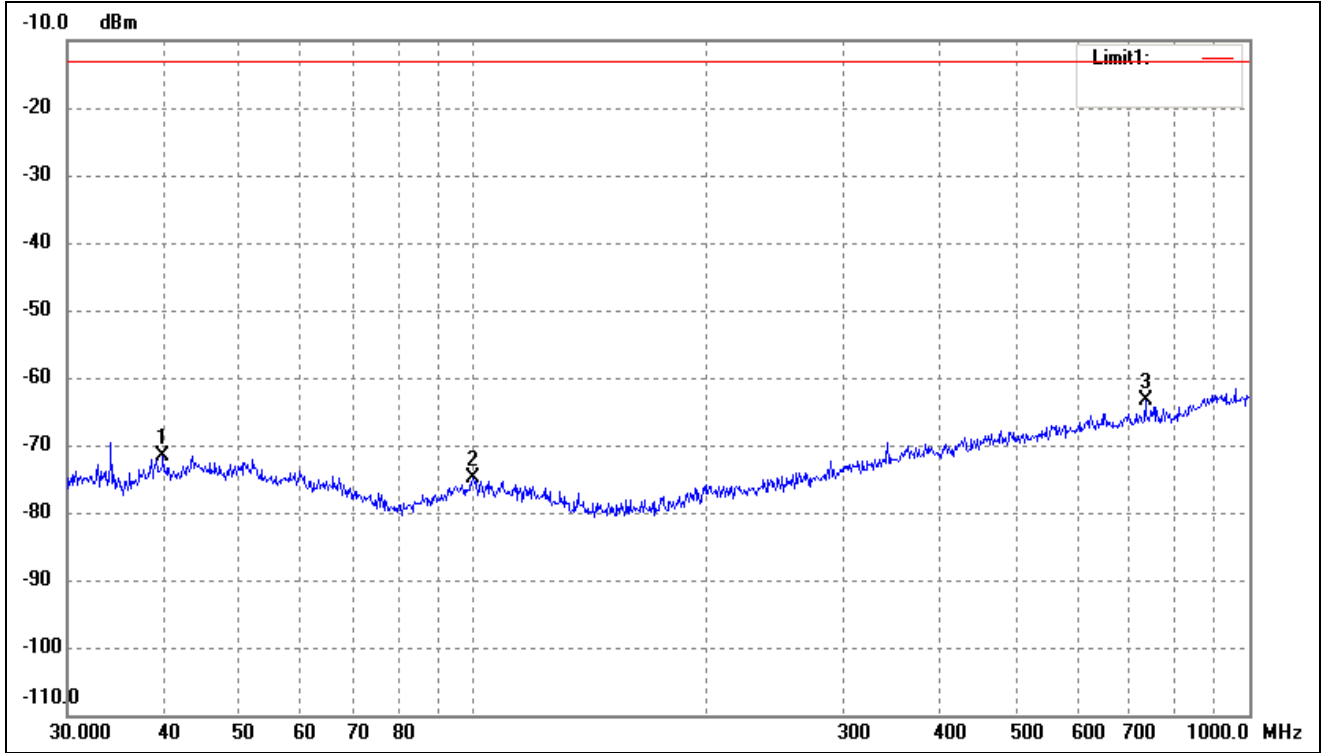

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	39.8542	-71.43	-0.23	-71.66	-13.00	-58.66	-	-	peak
2	99.8777	-73.24	-1.54	-74.78	-13.00	-61.78	-	-	peak
3	734.4913	-74.19	10.70	-63.49	-13.00	-50.49	-	-	peak

For Cellular Band			
Test Channel	GSM1900	Polarity:	Vertical

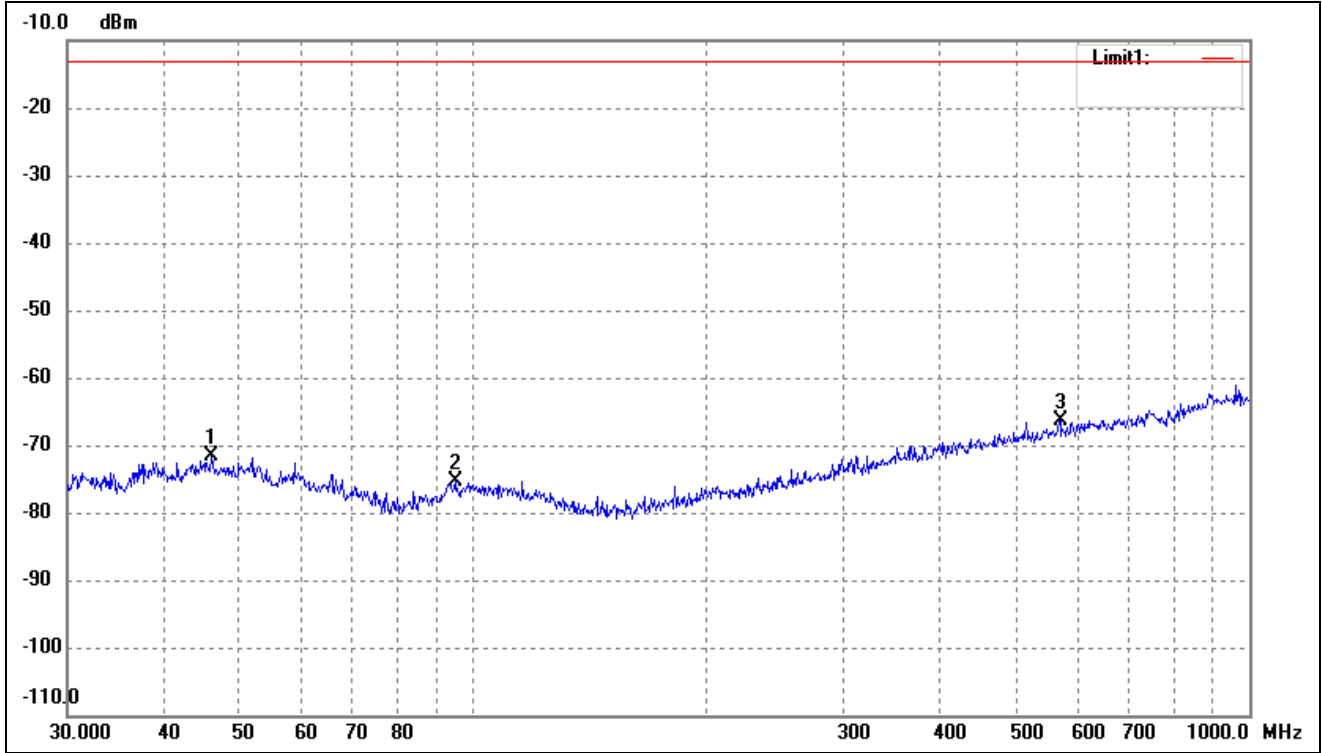


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	46.0164	-71.73	0.06	-71.67	-13.00	-58.67	-	-	peak
2	94.7601	-72.86	-2.39	-75.25	-13.00	-62.25	-	-	peak
3	570.6100	-75.46	9.02	-66.44	-13.00	-53.44	-	-	peak

Note: Margin= (Reading+ Correct)- Limit




Test Channel	band 5	Polarity:	Horizontal
--------------	--------	-----------	------------

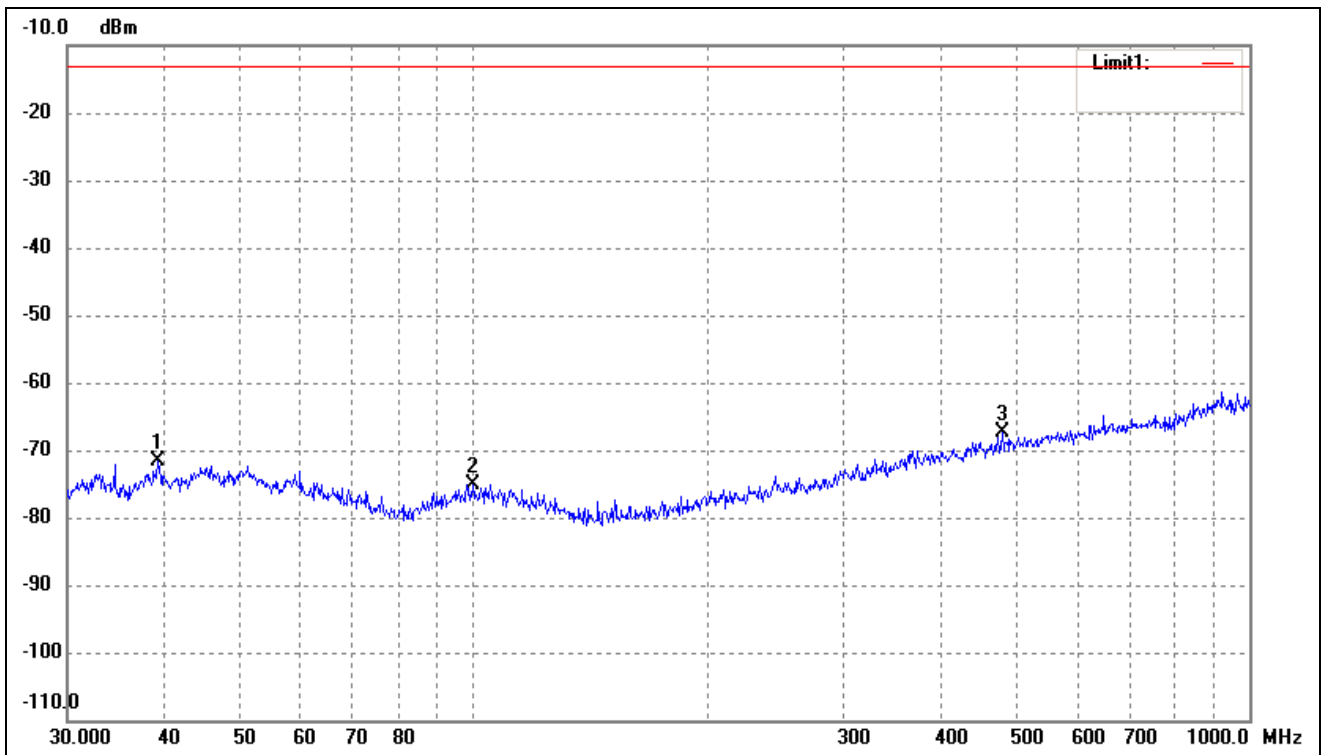


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	39.1616	-71.20	-0.50	-71.70	-13.00	-58.70	-	-	peak
2	99.8777	-73.49	-1.54	-75.03	-13.00	-62.03	-	-	peak
3	480.5276	-74.43	7.16	-67.27	-13.00	-54.27	-	-	peak

Test Channel	band 5	Polarity:	Vertical
--------------	--------	-----------	----------

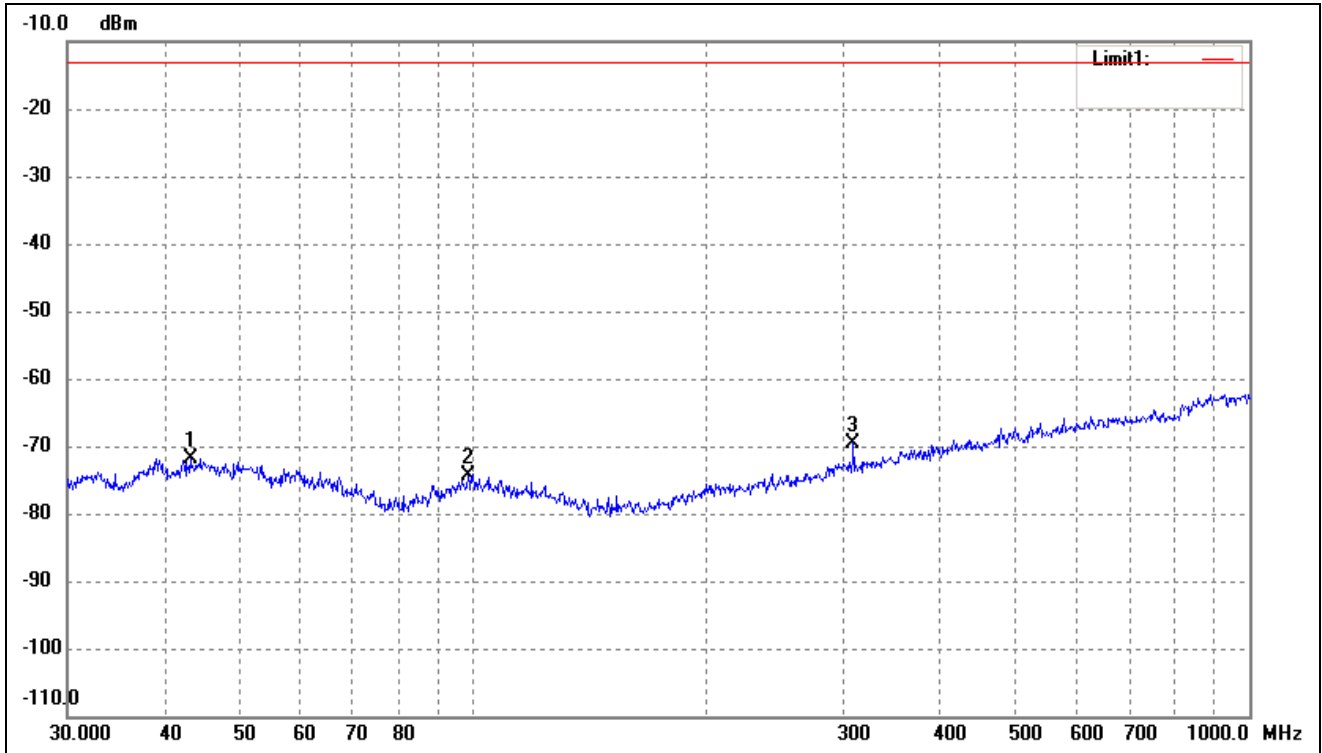


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	43.2017	-71.82	-0.06	-71.88	-13.00	-58.88	-	-	peak
2	98.4866	-72.67	-1.77	-74.44	-13.00	-61.44	-	-	peak
3	308.9126	-72.36	2.86	-69.50	-13.00	-56.50	-	-	peak

Test Channel	band 2	Polarity:	Horizontal
--------------	--------	-----------	------------

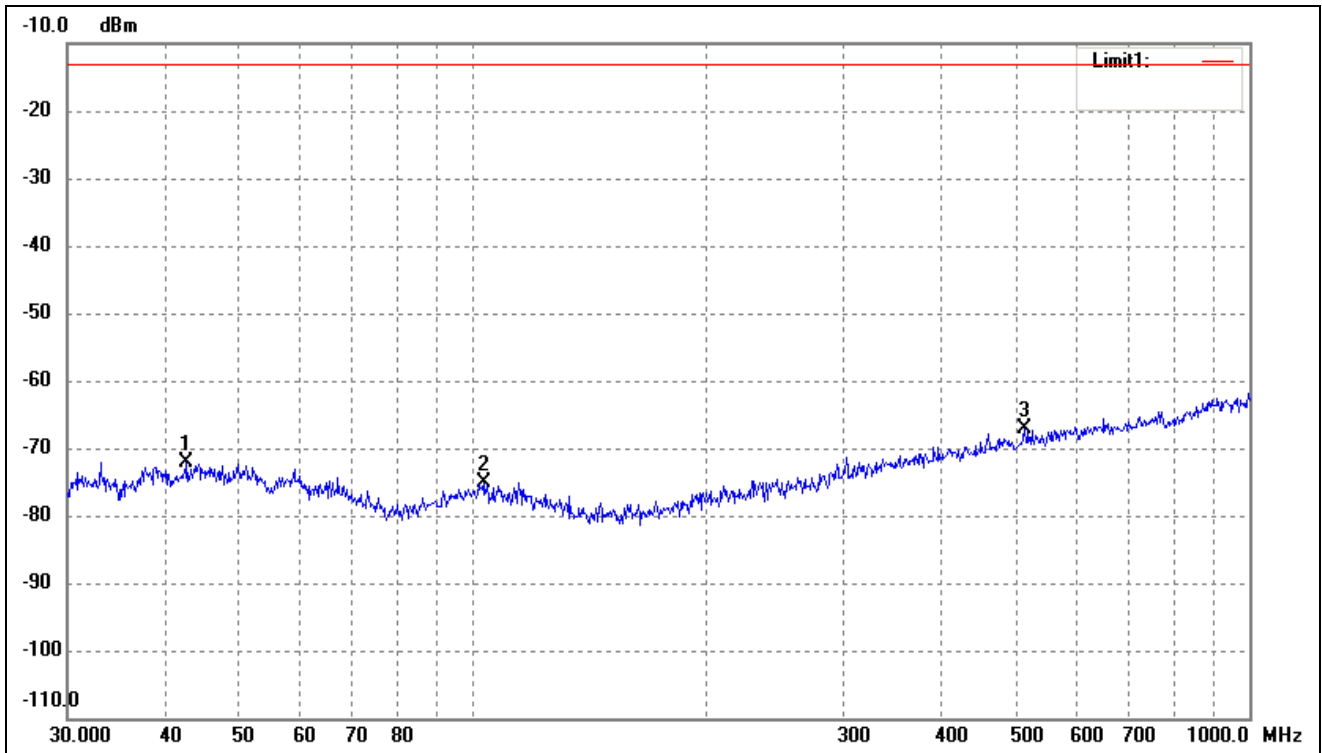

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	42.7496	-72.06	-0.08	-72.14	-13.00	-59.14	-	-	peak
2	103.4421	-73.61	-1.51	-75.12	-13.00	-62.12	-	-	peak
3	513.6331	-74.81	7.68	-67.13	-13.00	-54.13	-	-	peak

Test Channel	band 2	Polarity:	Vertical
--------------	--------	-----------	----------

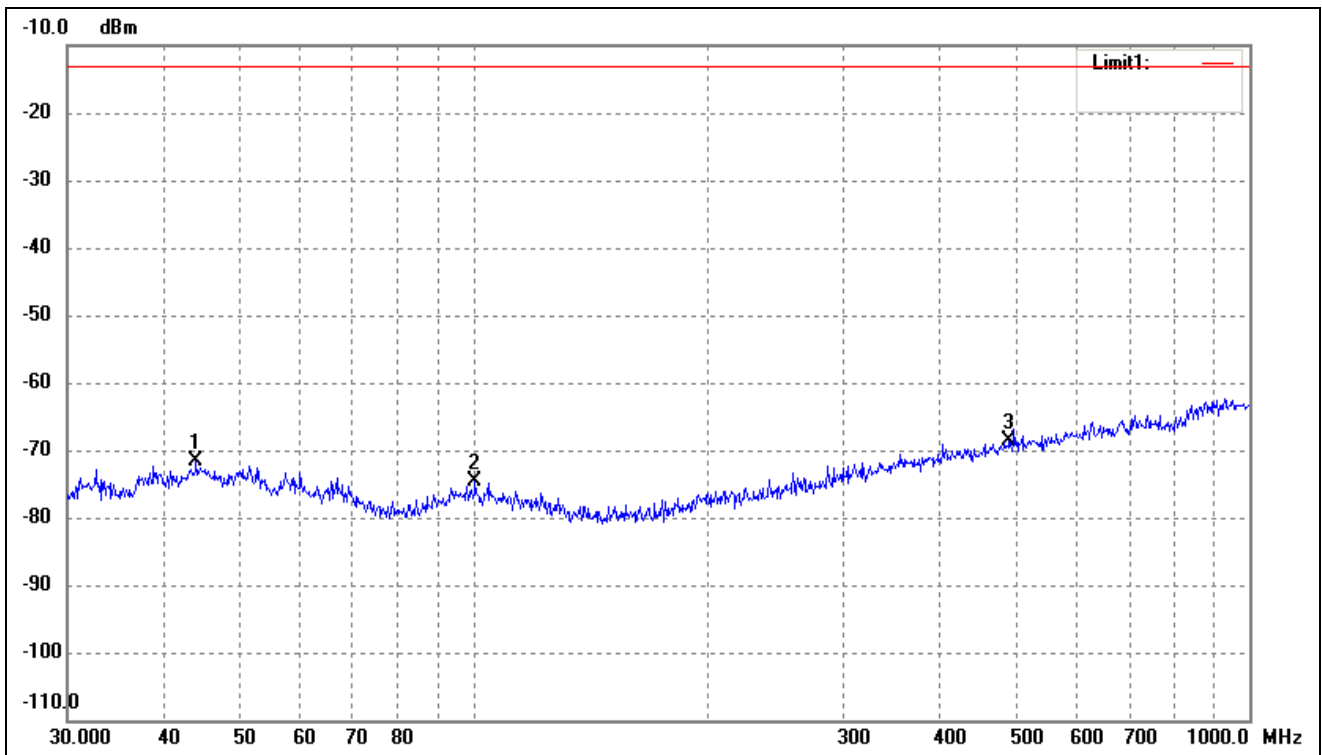

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	43.9658	-71.57	-0.03	-71.60	-13.00	-58.60	-	-	peak
2	100.5806	-73.03	-1.53	-74.56	-13.00	-61.56	-	-	peak
3	490.7447	-75.97	7.47	-68.50	-13.00	-55.50	-	-	peak

Note:  $Margin = (Reading + Correct) - Limit$

Remark: ‘-’ Means the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- For Cellular Band\_GSM850 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (824.2MHz)						
1648.4	-35.44	4.94	-30.5	-13	-17.50	H
2472.6	-42.93	8.46	-34.47	-13	-21.47	H
1648.4	-37.12	4.94	-32.18	-13	-19.18	V
2472.6	-42.09	8.46	-33.63	-13	-20.63	V
Middle Channel (836.6MHz)						
1673.2	-36.3	5.11	-31.19	-13	-18.19	H
2509.8	-44.27	8.54	-35.73	-13	-22.73	H
1673.2	-35.99	5.11	-30.88	-13	-17.88	V
2509.8	-42.17	8.54	-33.63	-13	-20.63	V
High Channel (848.8MHz)						
1697.6	-35.8	5.25	-30.55	-13	-17.55	H
2546.4	-43.76	8.57	-35.19	-13	-22.19	H
1697.6	-35.64	5.25	-30.39	-13	-17.39	V
2546.4	-43.24	8.57	-34.67	-13	-21.67	V

- For PCS Band\_GSM1900 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1850.2MHz)						
3700.4	-39.71	10.54	-29.17	-13	-16.17	H
5550.6	-46.34	13.37	-32.97	-13	-19.97	H
3700.4	-39.19	10.54	-28.65	-13	-15.65	V
5550.6	-49.95	13.37	-36.58	-13	-23.58	V
Middle Channel (1880MHz)						
3760.0	-40.57	10.64	-29.93	-13	-16.93	H
5640.0	-49.24	13.54	-35.7	-13	-22.7	H
3760.0	-39.72	10.64	-29.08	-13	-16.08	V
5640.0	-49.16	13.54	-35.62	-13	-22.62	V
High Channel (1909.8MHz)						
3819.6	-42.86	10.74	-32.12	-13	-19.12	H
5729.4	-47.38	13.71	-33.67	-13	-20.67	H
3819.6	-42.79	10.74	-32.05	-13	-19.05	V
5729.4	-46.33	13.71	-32.62	-13	-19.62	V

## ➤ For WCDMA Band V Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (826.4MHz)						
1652.8	-34.77	4.94	-29.83	-13	-16.83	H
2479.2	-44.14	8.46	-35.68	-13	-22.68	H
1652.8	-36.63	4.94	-31.69	-13	-18.69	V
2479.2	-42.33	8.46	-33.87	-13	-20.87	V
Middle Channel (836.6MHz)						
1672.8	-34.01	5.11	-28.9	-13	-15.9	H
2509.2	-43.94	8.54	-35.4	-13	-22.4	H
1672.8	-37.23	5.11	-32.12	-13	-19.12	V
2509.2	-42.64	8.54	-34.1	-13	-21.1	V
High Channel (846.6MHz)						
1693.2	-35.22	5.25	-29.97	-13	-16.97	H
2539.8	-43.1	8.57	-34.53	-13	-21.53	H
1693.2	-34.1	5.25	-28.85	-13	-15.85	V
2539.8	-43.75	8.57	-35.18	-13	-22.18	V

## ➤ For WCDMA Band II Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1852.4MHz)						
3704.8	-41.15	10.54	-30.61	-13	-17.61	H
5557.2	-49.46	13.37	-36.09	-13	-23.09	H
3704.8	-39.08	10.54	-28.54	-13	-15.54	V
5557.2	-48.52	13.37	-35.15	-13	-22.15	V
Middle Channel (1880MHz)						
3760.0	-42.91	10.64	-32.27	-13	-19.27	H
5640.0	-48.66	13.54	-35.12	-13	-22.12	H
3760.0	-40	10.64	-29.36	-13	-16.36	V
5640.0	-48.96	13.54	-35.42	-13	-22.42	V
High Channel (1907.6MHz)						
3815.2	-40.01	10.74	-29.27	-13	-16.27	H
5722.8	-48.76	13.71	-35.05	-13	-22.05	H
3815.2	-41.14	10.74	-30.4	-13	-17.4	V
5722.8	-48.3	13.71	-34.59	-13	-21.59	H

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 9. Frequency Stability

---

### 9.1 Standard Applicable

According to §22.355, §24.235 the limit is 2.5ppm.

### 9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

### 9.3 Summary of Test Results/Plots

Note: 1. Worst case at GSM850/PCS1900/WCDMA B2/B5 middle channel

2..Normal Voltage NV=DC3.7V; Low Voltage LV=DC3.5V;High Voltage HV=DC4.2V

## ➤ Frequency stability V.S. Temperature measurement

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature ( °C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	55	0.0653	2.50	Pass
	-20	45	0.0533		
	-10	34	0.0405		
	0	29	0.0349		
	10	25	0.0303		
	20	21	0.0248		
	30	25	0.0303		
	40	33	0.0395		
	50	38	0.0460		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature ( °C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	53	0.0282	2.50	Pass
	-20	39	0.0209		
	-10	33	0.0176		
	0	27	0.0143		
	10	23	0.0123		
	20	18	0.0098		
	30	26	0.0139		
	40	34	0.0180		
	50	40	0.0213		



Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature ( °C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	74	0.0883	2.50	Pass
	-20	59	0.0708		
	-10	50	0.0598		
	0	46	0.0552		
	10	39	0.0469		
	20	35	0.0423		
	30	41	0.0487		
	40	47	0.0561		
	50	52	0.0616		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature ( °C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	63	0.0336	2.50	Pass
	-20	58	0.0311		
	-10	47	0.0250		
	0	43	0.0229		
	10	38	0.0200		
	20	32	0.0168		
	30	37	0.0196		
	40	45	0.0237		
	50	50	0.0266		

## ➤ Frequency stability V.S. Voltage measurement

Reference Frequency: GSM850 (GSM link) Middle channel=190 channel=836.6MHz					
Temperature ( °C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	50	0.0598	2.50	Pass
	NV	45	0.0542		
	LV	35	0.0414		
Reference Frequency: PCS1900 (GSM link) Middle channel=661 channel=1880MHz					
Temperature ( °C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	61	0.0323	2.50	Pass
	NV	56	0.0299		
	LV	48	0.0254		
Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Temperature ( °C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	25	0.0303	2.50	Pass
	NV	30	0.0359		
	LV	36	0.0432		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Temperature ( °C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	36	0.0192	2.50	Pass
	NV	42	0.0221		
	LV	48	0.0258		

## 10. Modulation characteristics

---


### 10.1 Standard Applicable

According to §2.1047, measurements required: Modulation characteristics is given below:

- (a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.
- (b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.
- (c) Single sideband and independent sideband radiotelephone transmitters which employ a device or circuit to limit peak envelope power. A curve showing the peak envelope power output versus the modulation input voltage shall be supplied. The modulating signals shall be the same in frequency as specified in paragraph (c) of §2.1049 for the occupied bandwidth tests.
- (d) Other types of equipment. A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.


### 10.2 Test Procedure


According to ANSI C63.26-2015 section 5.3.2, the following test setup was performed.

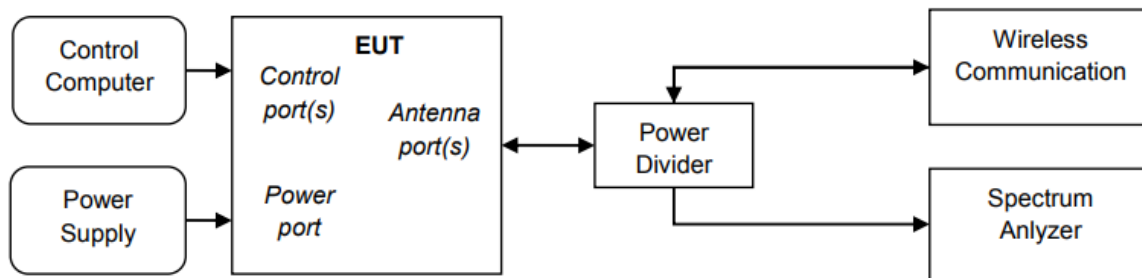


### 10.3 Summary of Test Results/Plots

Only the worst case was selected to record

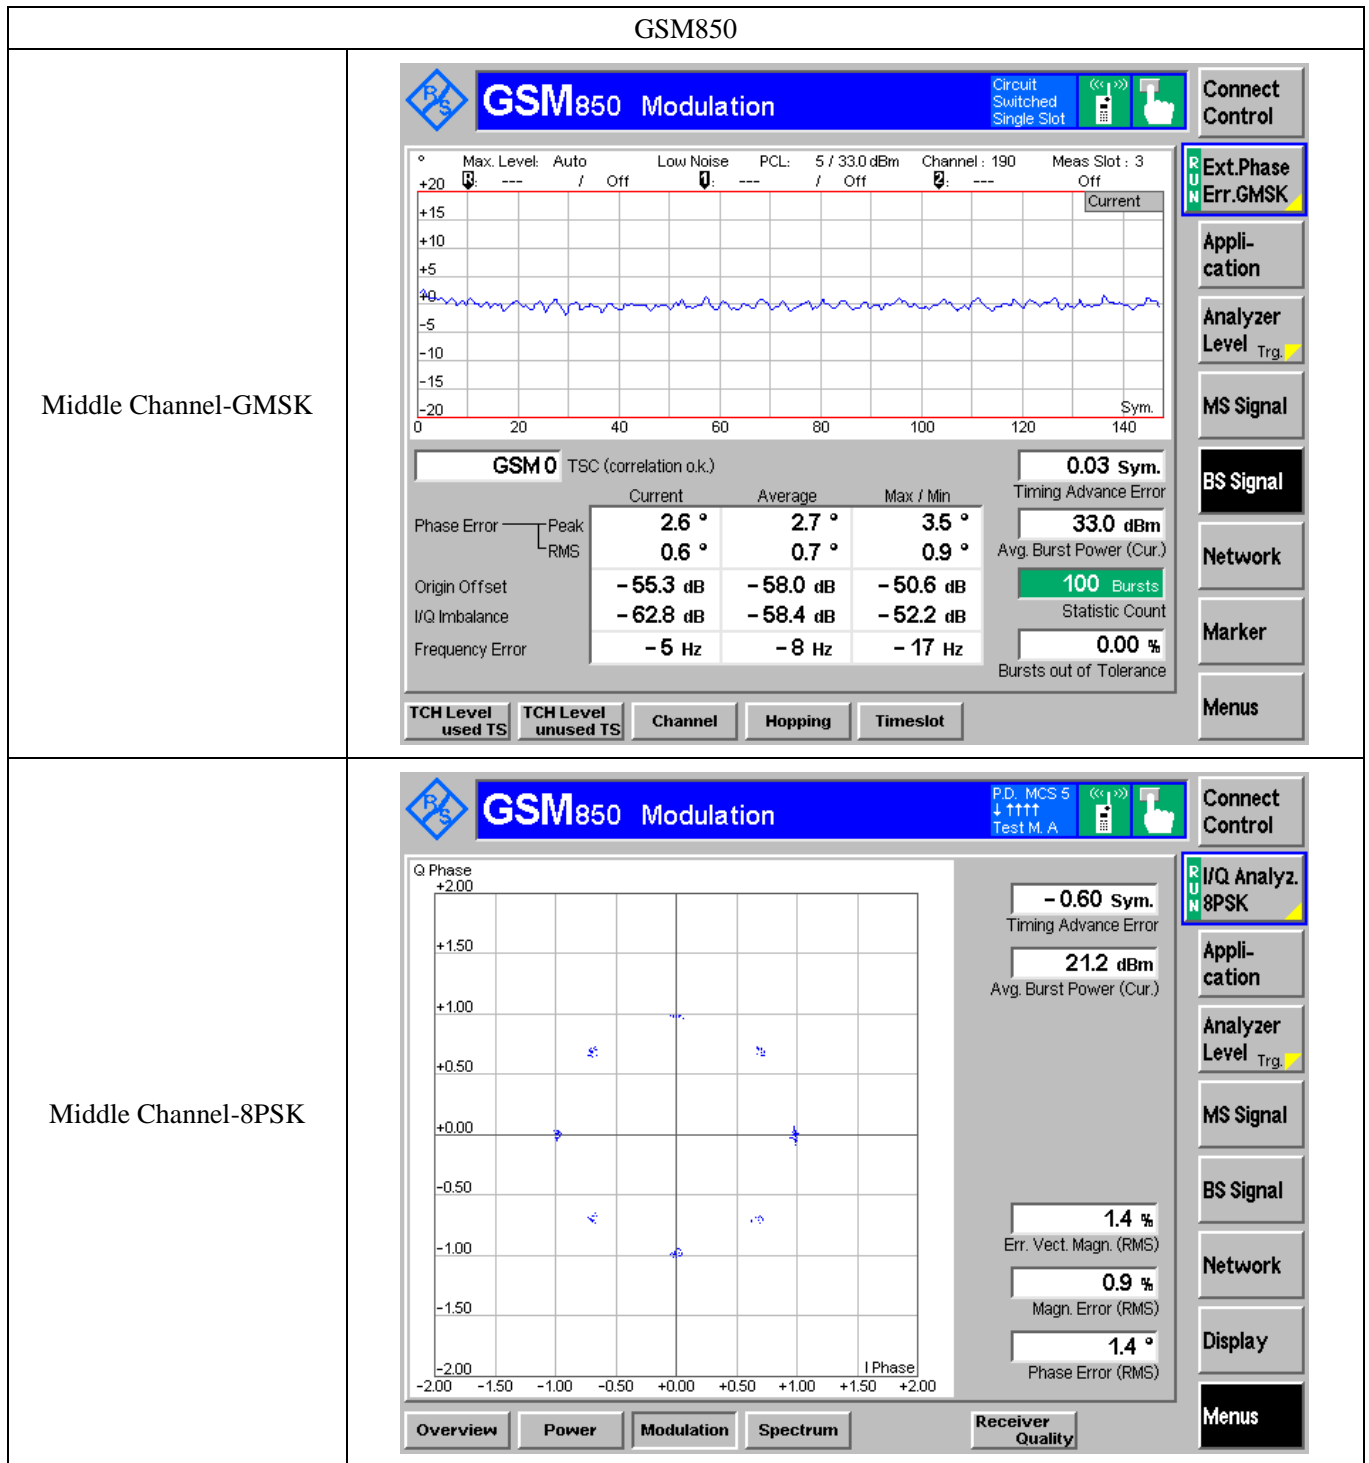

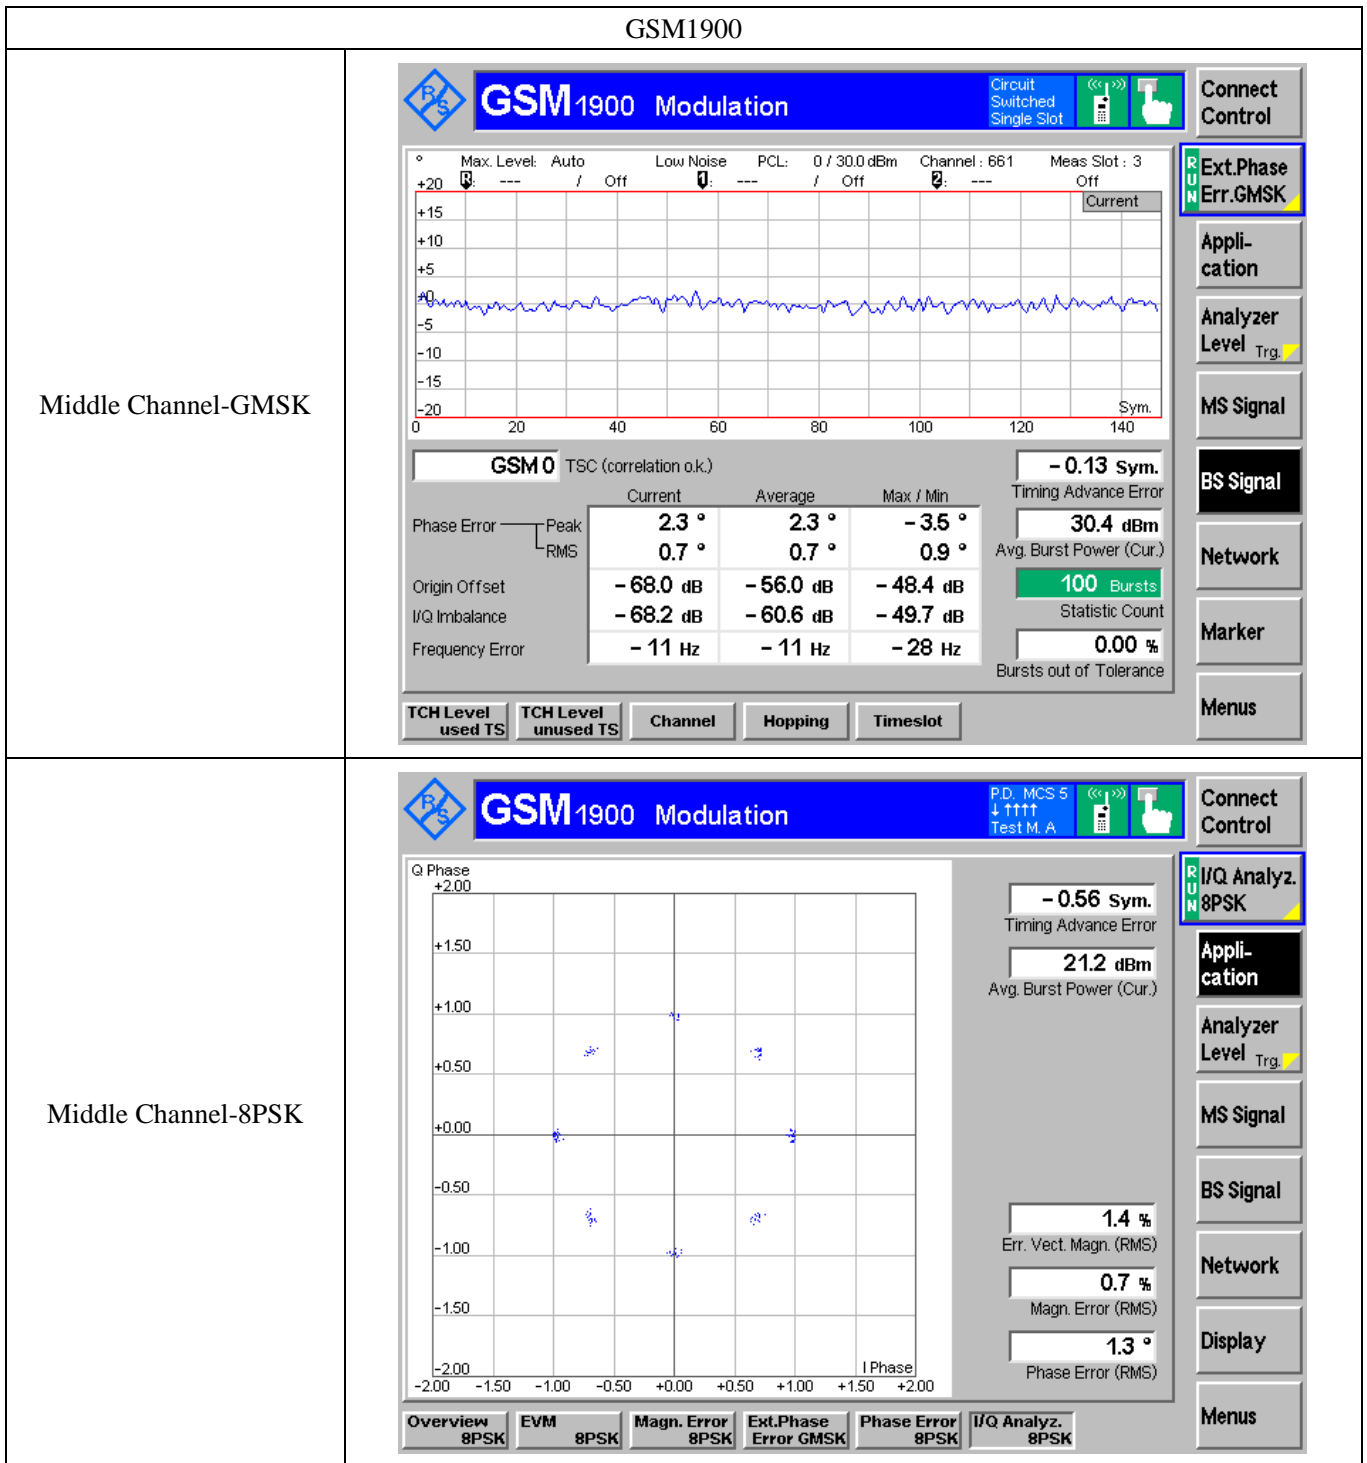

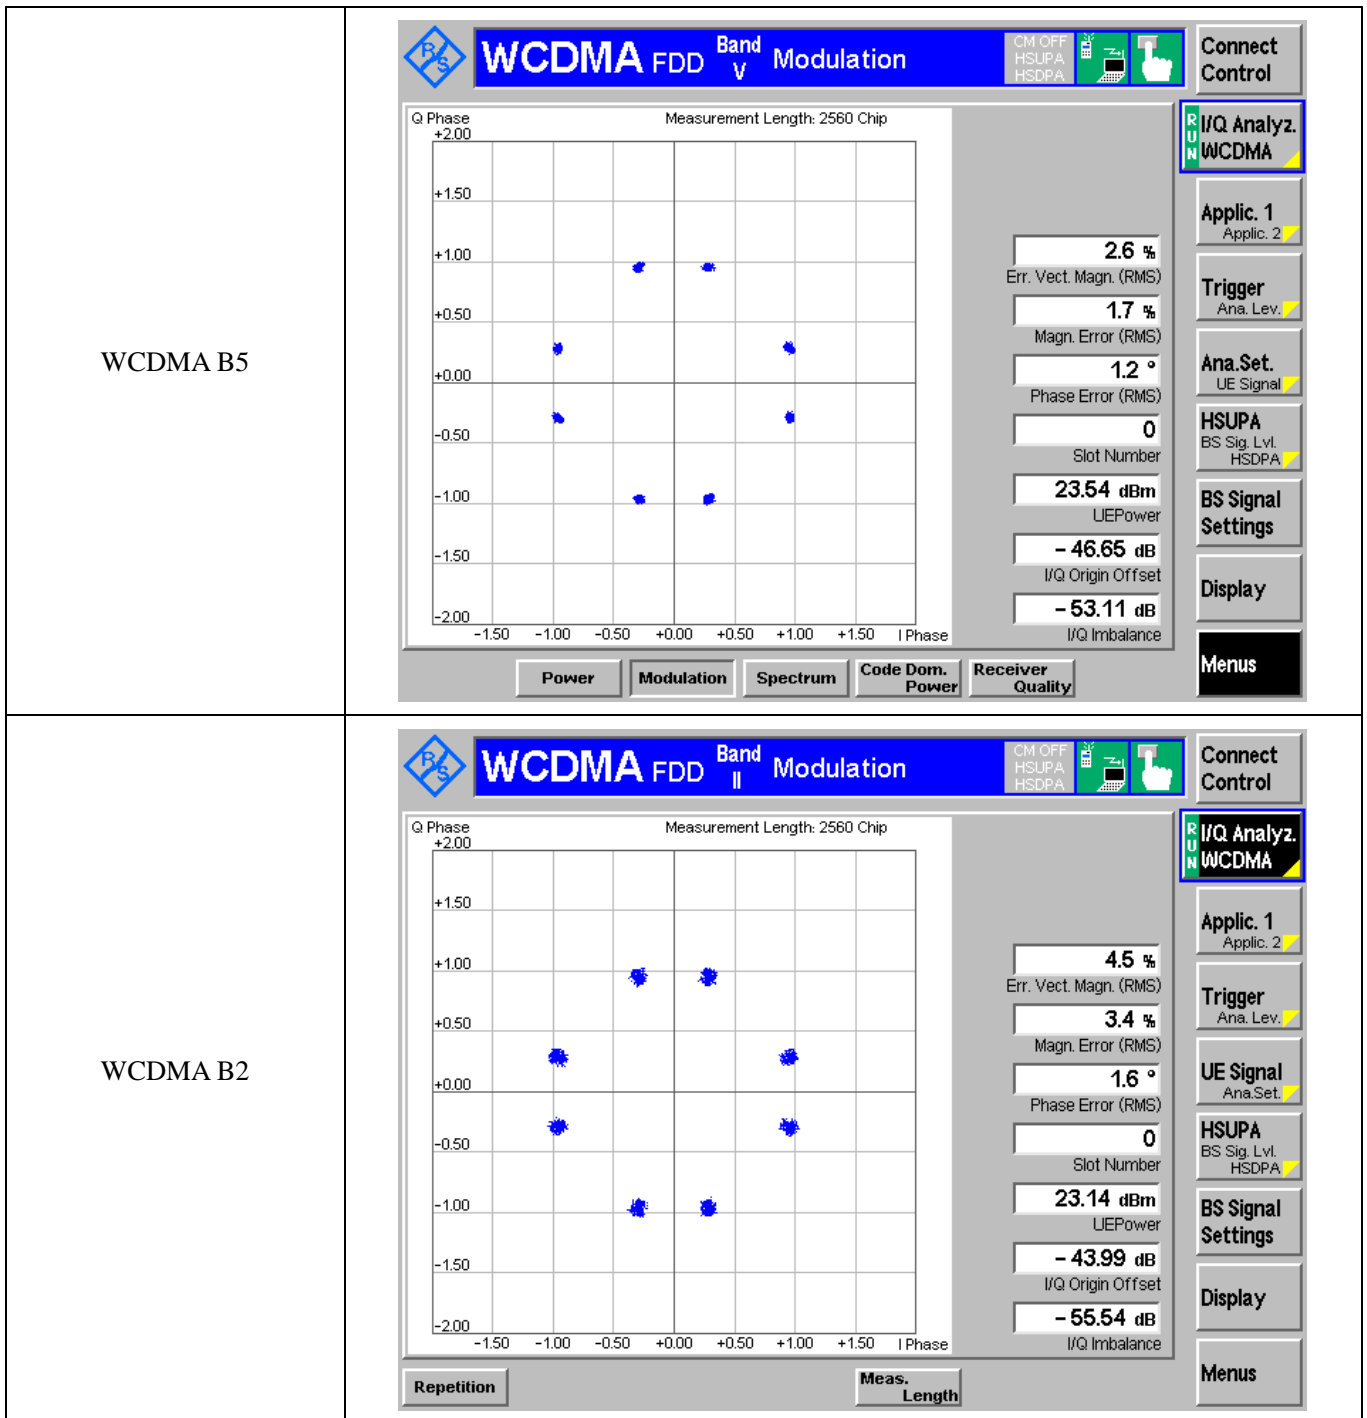

\*\*\*\*\* END OF REPORT \*\*\*\*\*