

Date: Aug. 13, 2023

## Test Laboratory: AGC Lab LTE Band 26B Mid-Body-Back (1 RB#0) DUT: 4G Smart Phone; Type: AGM\_H6

Communication System: LTE; Communication System Band: LTE Band 26A; Duty Cycle:1:1; Conv.F=2.13 Frequency: 821.5 MHz; Medium parameters used: f = 835 MHz;  $\sigma$ =0.85 mho/m;  $\epsilon$ r =42.36;  $\rho$ = 1000 kg/m<sup>3</sup>; Phantom section: Flat Section


Ambient temperature (°C): 21.2, Liquid temperature (°C): 21.0

SATIMO Configuration:

- Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_32

**Configuration/ LTE Band 26B Mid-Body-Back/Area Scan:** Measurement grid: dx=8mm, dy=8mm **Configuration/ LTE Band 26B Mid-Body-Back/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5m;


Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 26B
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

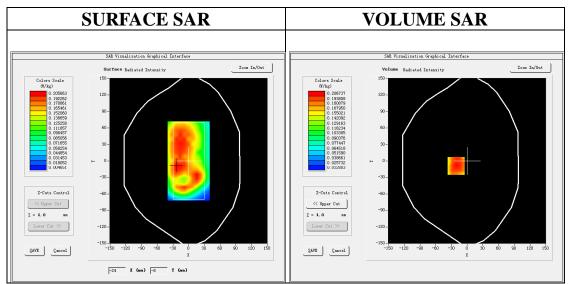


## Maximum location: X=-21.00, Y=-9.00 SAR Peak: 0.26 W/kg

<b>SAR 10g (W/Kg)</b>	0.140385
SAR 1g (W/Kg)	0.197771



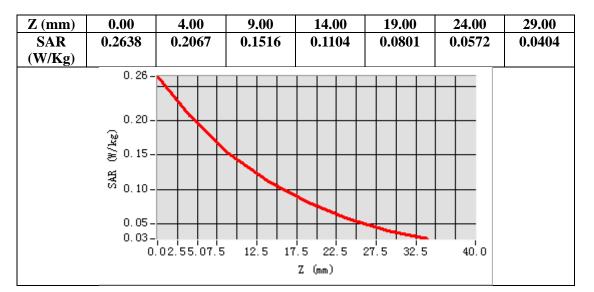

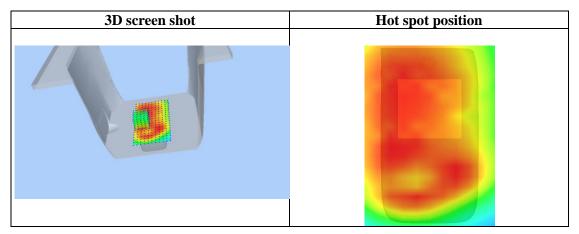



#### Date: Aug. 21, 2023

## Test Laboratory: AGC Lab LTE Band 41 Mid-Touch-Left (1RB#0) DUT: 4G Smart Phone; Type: AGM\_H6

Communication System: LTE; Communication System Band: LTE Band 41; Duty Cycle:1:1.58; Conv.F=2.29 Frequency: 2593MHz; Medium parameters used: f =2600 MHz;  $\sigma$ =1.96 mho/m;  $\epsilon$ r =39.27;  $\rho$ = 1000 kg/m<sup>3</sup>; Phantom section: Left Section


Ambient temperature (°C): 21.3, Liquid temperature (°C): 21.1

SATIMO Configuration:

- Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_32

**Configuration/ LTE BAND 41 Mid-Touch-Left/Area Scan:** Measurement grid: dx=8mm, y=8mm **Configuration/ LTE BAND 41 Mid-Touch-Left/Zoom Scan:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE BAND 41
Channels	Middle
Signal	OFDM (Crest factor: 1.58)

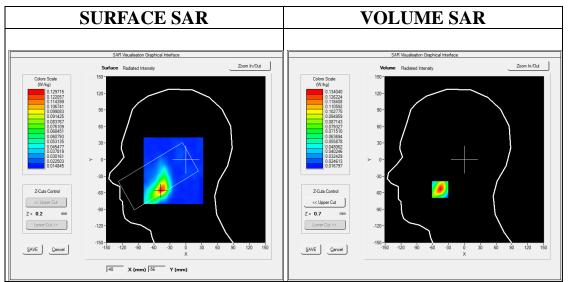


## Maximum location: X=-46.00, Y=-54.00 SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)	0.063297
SAR 1g (W/Kg)	0.123726



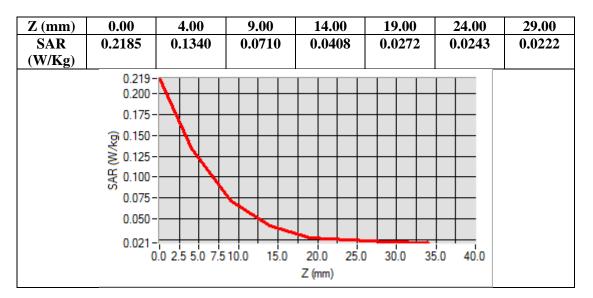

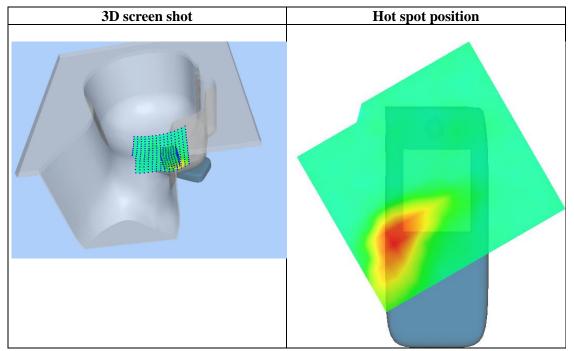



#### Date: Aug. 21, 2023

#### Test Laboratory: AGC Lab LTE Band 41 Mid-Body-Back(1RB#0) DUT: 4G Smart Phone ; Type: AGM\_H6


Communication System: LTE; Communication System Band: LTE Band 41; Duty Cycle:1:1.58; Conv.F=2.29 Frequency: 2593MHz; Medium parameters used: f =2600 MHz;  $\sigma$ =1.96 mho/m;  $\epsilon$ r =39.27;  $\rho$ = 1000 kg/m<sup>3</sup>; Phantom section: Flat Section Ambient temperature (°C): 21.3, Liquid temperature (°C): 21.1

SATIMO Configuration:

- Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_32

**Configuration/ LTE BAND 41 Mid-Body-Back /Area Scan:** Measurement grid: dx=10mm, y=10mm **Configuration/ LTE BAND 41 Mid-Body-Back /Zoom Scan:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE BAND 41
Channels	Middle
Signal	OFDM (Crest factor: 1.58)

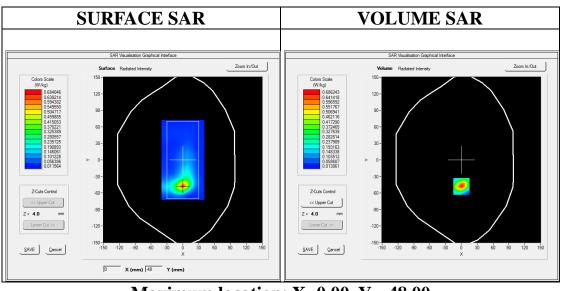


# Maximum location: X=0.00, Y=-48.00 SAR Peak: 1.19 W/kg

SAR 10g (W/Kg)	0.249305
SAR 1g (W/Kg)	0.608942



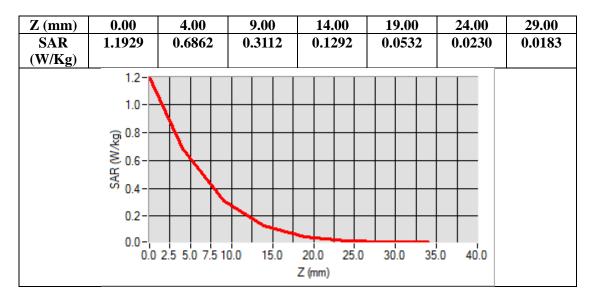

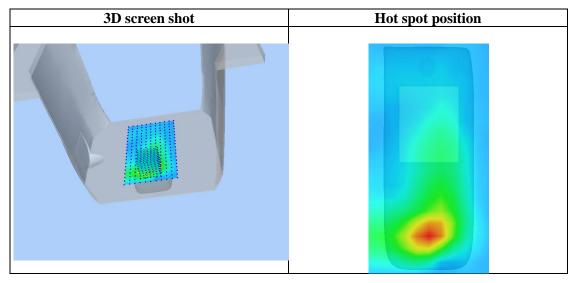



#### **WIFI MODE Test Laboratory: AGC Lab** 802.11b Mid- Tilt -Left DUT: 4G Smart Phone ; Type: AGM\_H6

Date: Aug. 16, 2023

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=2.34; Frequency: 2437 MHz; Medium parameters used: f = 2450 MHz;  $\sigma = 1.83 \text{ mho/m}$ ;  $\epsilon r = 39.65 \rho = 1000 \text{ kg/m}^3$ ; Phantom section: Left Section


Ambient temperature (°C):21.4, Liquid temperature (°C): 21.1

SATIMO Configuration:

- Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- · Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4 02 32


Configuration/802.11b Mid- Tilt -Left/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11b Mid- Tilt -Left/Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	2450MHz
Channels	Middle
Signal	Crest factor: 1.0

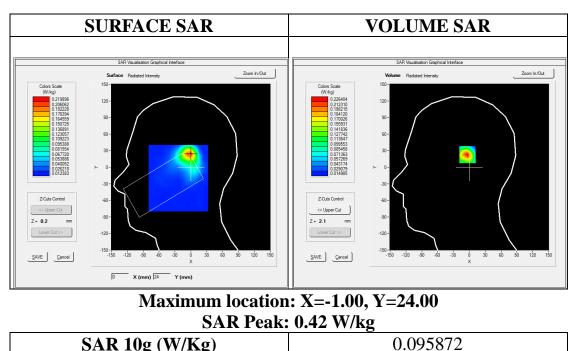

SAR 10g (W/Kg)



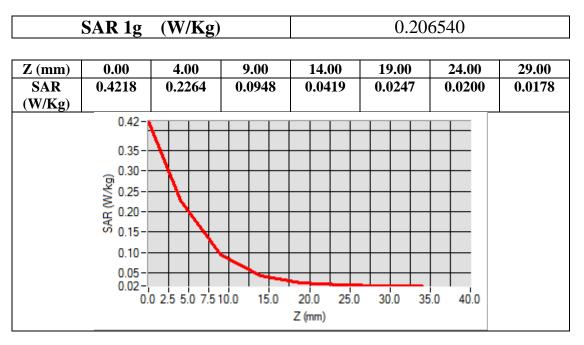

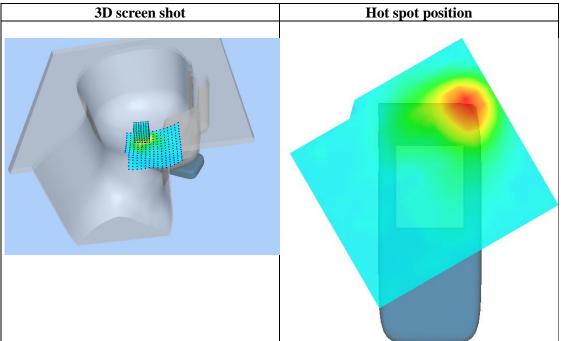



Date: Aug. 16, 2023

## Test Laboratory: AGC Lab 802.11b Mid-Body-Worn- Back DUT: 4G Smart Phone ; Type: AGM\_H6

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=2.34; Frequency: 2437 MHz; Medium parameters used: f = 2450 MHz;  $\sigma$  =1.83mho/m;  $\epsilon$ r =39.65;  $\rho$ = 1000 kg/m<sup>3</sup>; Phantom section: Flat Section


Ambient temperature (°C):21.4, Liquid temperature (°C): 21.1

SATIMO Configuration:

- Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_32

**Configuration/802.11b Mid- Body- Back /Area Scan:** Measurement grid: dx=8mm, dy=8mm **Configuration/802.11b Mid- Body- Back /Zoom Scan:** Measurement grid: dx=5mm,dy=5mm, dz=5mm;


Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	2450MHz
Channels	Middle
Signal	Crest factor: 1.0

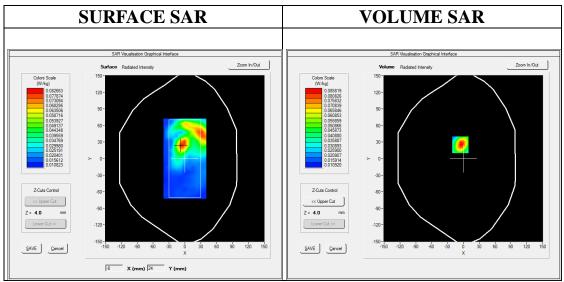


## Maximum location: X=-6.00, Y=25.00 SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.041531
SAR 1g (W/Kg)	0.080291



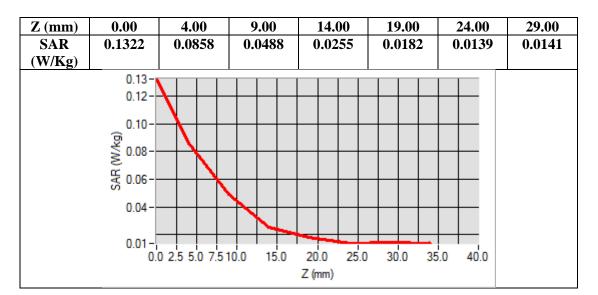

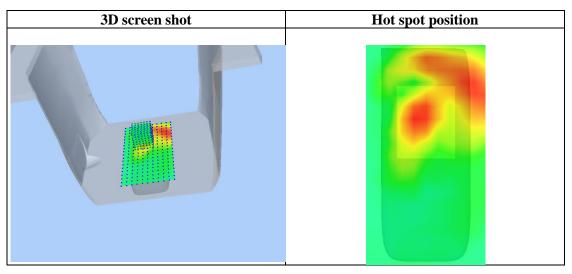



#### 5.2GHz 802.11a **Test Laboratory: AGC Lab** 802.11a CH40- Touch-Left DUT: 4G Smart Phone ; Type: AGM\_H6

Date: Aug. 20, 2023

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.20; Frequency: 5200MHz; Medium parameters used: f = 5200 MHz;  $\sigma = 4.52$ mho/m;  $\epsilon r = 36.28$ ;  $\rho = 1000$  kg/m<sup>3</sup>; Phantom section: Flat Section


Ambient temperature (°C): 20.9, Liquid temperature (°C): 20.7

SATIMO Configuration:

- Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- · Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_32


Configuration/802.11a CH40- Touch-Left /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11a CH40- Touch-Left /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	5200MHz
Channels	CH40
Signal	Crest factor: 1.0

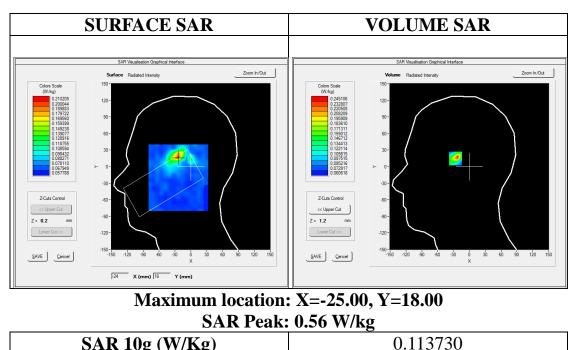

SAR 10g (W/Kg)



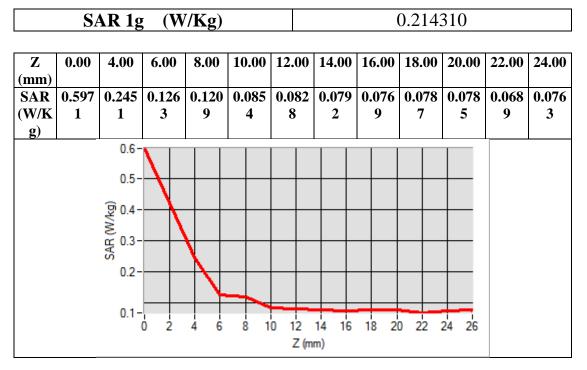

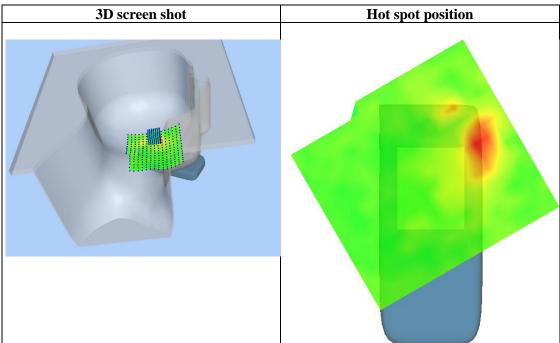



#### Test Laboratory: AGC Lab 802.11a CH40-Edge1 DUT: 4G Smart Phone ; Type: AGM\_H6

Date: Aug. 20, 2023

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=2.35; Frequency: 5200MHz; Medium parameters used: f = 5200 MHz;  $\sigma$ = 4.52mho/m;  $\epsilon$ r =36.28;  $\rho$ = 1000 kg/m<sup>3</sup>; Phantom section: Flat Section


Ambient temperature (°C): 20.9, Liquid temperature (°C): 20.7

SATIMO Configuration:

- Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_32

Configuration/802.11aCH40- Edge1 /Area Scan: Measurement grid: dx=8mm, dy=8mmConfiguration/802.11aCH40- Edge1 /Zoom Scan: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Edge1
Band	5200MHz
Channels	CH40
Signal	Crest factor: 1.0

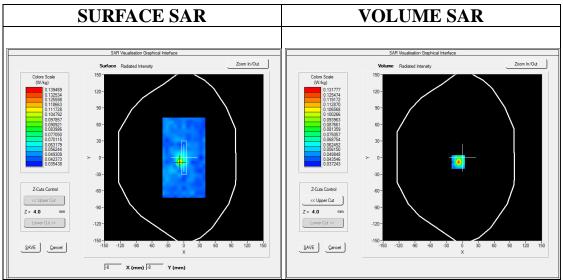

## Maximum location: X=-8.00, Y=-8.00 SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)	0.061175
SAR 1g (W/Kg)	0.122260

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd


 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR	0.367	0.131	0.063	0.047	0.052	0.048	0.049	0.047	0.051	0.048	0.052	0.050
(W/K	9	8	2	2	2	7	3	0	6	4	2	4
<b>g</b> )												
		0.37	-									
		0.30					+					
		<b>9</b> 025										
		0.25	- N									
		2 0.20					+					
		WY 0.15		$\mathbf{v}$			+	_		_		
		0.10										
		0.05	_			<u>+ +</u>	+ +	_				
			Ó Ż	4 6	8 1	10 12	14 16	18 2	0 22	24 26		
						Z (n	ım)					

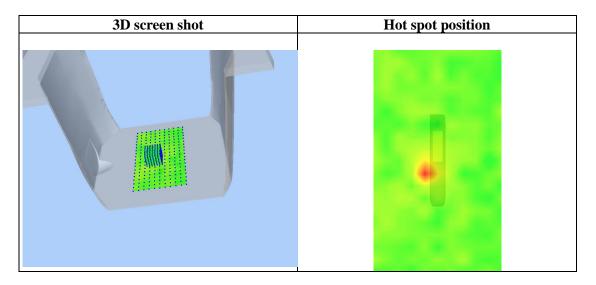



#### 5.8GHz **Test Laboratory: AGC Lab** 802.11a CH157- Tilt - Right DUT: 4G Smart Phone ; Type: AGM\_H6

Date: Aug. 19, 2023

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.85; Frequency: 5785MHz; Medium parameters used: f = 5800 MHz;  $\sigma = 5.29 \text{ mho/m}$ ;  $\epsilon r = 36.27$ ;  $\rho = 1000 \text{ kg/m}^3$ ; Phantom section: Flat Section


Ambient temperature (°C): 21.0, Liquid temperature (°C): 20.8

SATIMO Configuration:

- Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- · Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_32

Configuration/802.11a CH157- Tilt - Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11a CH157- Tilt - Right /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Tilt
Band	5800MHz
Channels	Middle
Signal	Crest factor: 1.0

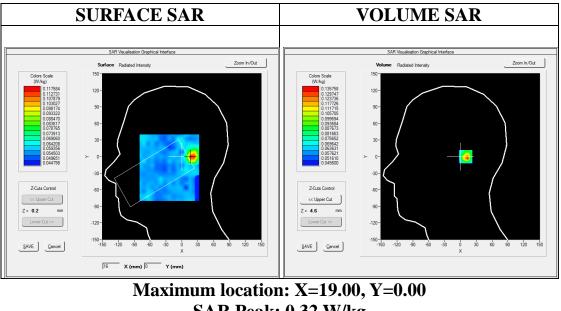



# SAR Peak: 0.32 W/kg

SAR 10g (W/Kg)

0.076932



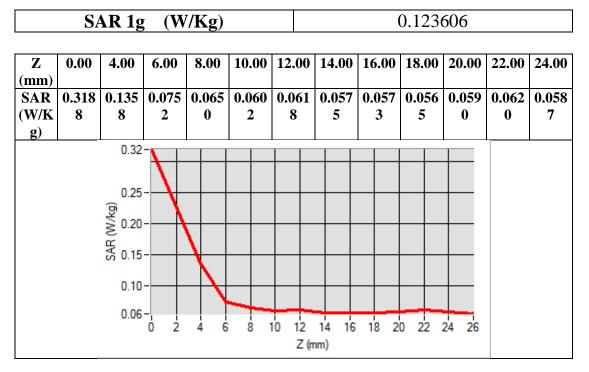

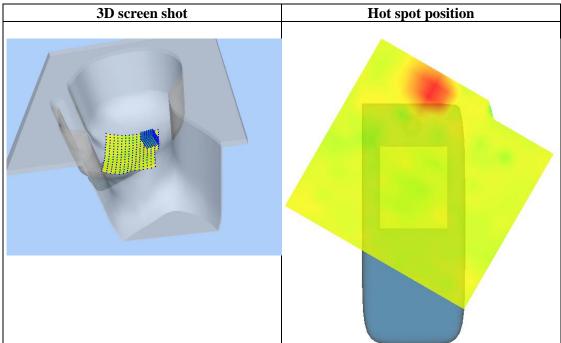



## Test Laboratory: AGC Lab 802.11a CH157-Edge1 DUT: 4G Smart Phone ; Type: AGM\_H6

Date: Aug. 19, 2023

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.85; Frequency: 5785MHz; Medium parameters used: f = 5800 MHz;  $\sigma$ = 5.29mho/m;  $\epsilon$ r =36.27;  $\rho$ = 1000 kg/m<sup>3</sup>; Phantom section: Flat Section


Ambient temperature (°C): 21.0, Liquid temperature (°C): 20.8

SATIMO Configuration:

- Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_32

**Configuration/ 802.11a CH157- Edge1 /Area Scan:** Measurement grid: dx=8mm, dy=8mm **Configuration/ 802.11a CH157- Edge1 /Zoom Scan:** Measurement grid: dx=4mm,dy=4mm, dz=2mm

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Edge1
Band	5800MHz
Channels	Middle
Signal	Crest factor: 1.0

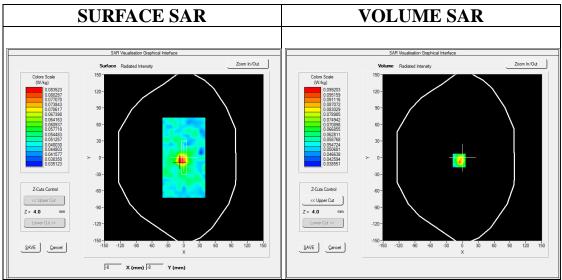

## Maximum location: X=-6.00, Y=-5.00 SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)	0.061967
SAR 1g (W/Kg)	0.087306

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR	0.204	0.099	0.057	0.055	0.055	0.053	0.051	0.046	0.054	0.052	0.054	0.060
(W/K	0	2	8	8	8	1	4	4	6	8	8	6
<b>g</b> )												
		0.20	-			+ +	+ +	_		+		
		0.18										
			<b>1</b>									
		0.16					+					
		(5V 0.14 0.12 UN UN U					+			-		
		2 0.12				+ +	+ $+$					
		S 0.10	_									
				-N								
		0.08										
		0.06				┝╼╼┝╼						
		0.05	0 2	4 6	8 1	10 12	14 16	18 2	0 22	24 26		
			U 2	- 0	0	10 12	14 10	10 2	0 22	24 20		

3D screen shot	Hot spot position



#### Repeated SAR Test Laboratory: AGC Lab WCDMA Band II Low-Tilt-Right <RMC> DUT: 4G Smart Phone; Type: AGM\_H6

Date: Aug. 12, 2023

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=2.32; Frequency: 1852.4 MHz; Medium parameters used: f = 1800 MHz;  $\sigma$ = 1.38 mho/m; $\epsilon$ r =42.19;  $\rho$ = 1000 kg/m<sup>3</sup>; Phantom section: Right Section


Ambient temperature (°C): 20.9, Liquid temperature (°C): 20.7

SATIMO Configuration:

- Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_32

**Configuration/WCDMA Band II Low -Tilt-Right/Area Scan:** Measurement grid: dx=8mm, dy=8mm **Configuration/WCDMA Band II Low -Tilt-Right/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5mm;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Tilt
Band	WCDMA band II
Channels	Low
Signal	CDMA (Crest factor: 1.0)

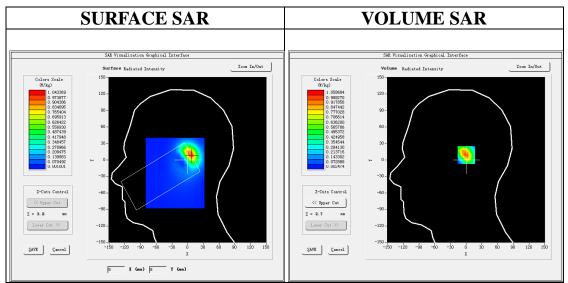


## Maximum location: X=7.00, Y=9.00 SAR Peak: 1.75 W/kg

<b>SAR 10g (W/Kg)</b>	0.466360
SAR 1g (W/Kg)	0.986176



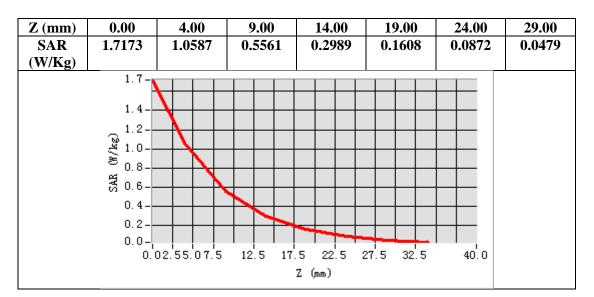

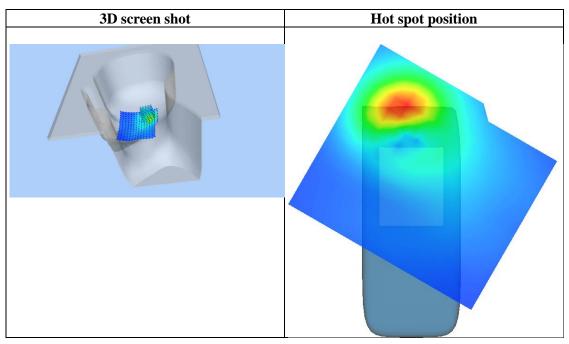



Date: Aug. 12, 2023

## Test Laboratory: AGC Lab LTE Band 2 Mid-Body-Back (1 RB#0) DUT: 4G Smart Phone ; Type: AGM\_H6


Communication System: LTE; Communication System Band: LTE Band 2; Duty Cycle:1:1; Conv.F=2.32; Frequency:1880MHz; Medium parameters used: f = 1800 MHz;  $\sigma$ = 1.40 mho/m;  $\epsilon$ r =42.08;  $\rho$ = 1000 kg/m<sup>3</sup>; Phantom section: Flat Section Ambient temperature (°C): 20.9, Liquid temperature (°C): 20.7

SATIMO Configuration:

- Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_32

**Configuration/ LTE Band 2 Mid-Body-Back/Area Scan:** Measurement grid: dx=8mm, dy=8mm **Configuration/ LTE Band 2 Mid-Body-Back/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5m;


Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 2
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

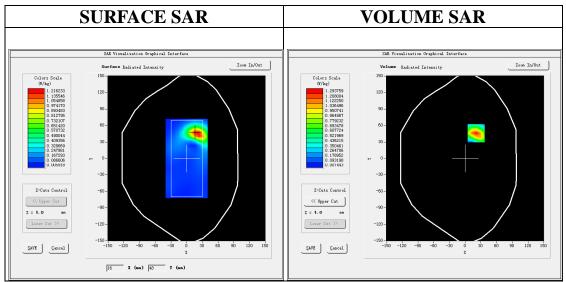


## Maximum location: X=21.00, Y=46.00 SAR Peak: 2.06 W/kg

SAR 10g (W/Kg)	0.590268		
SAR 1g (W/Kg)	1.204109		



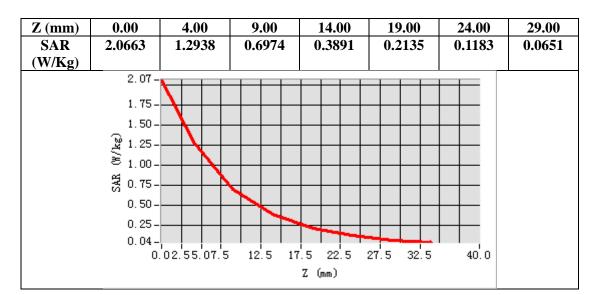

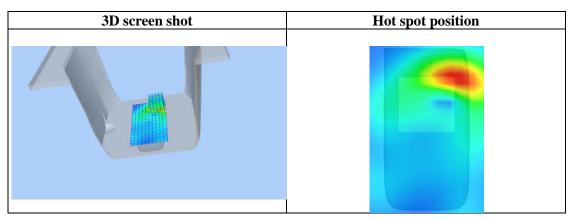



Date: Aug. 14, 2023

## Test Laboratory: AGC Lab LTE Band 4 Mid- Tilt - Right (1 RB#0) DUT: 4G Smart Phone ; Type: AGM\_H6


Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=2.39; Frequency:1732.5 MHz; Medium parameters used: f =1750 MHz;  $\sigma$ = 1.35 mho/m;  $\epsilon$ r =41.06;  $\rho$ = 1000 kg/m<sup>3</sup>; Phantom section: Right Section Ambient temperature (°C): 20.8, Liquid temperature (°C): 20.6

SATIMO Configuration:

- Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_32

**Configuration/ LTE Band 4 Mid- Tilt - Right /Area Scan:** Measurement grid: dx=8mm, dy=8mm **Configuration/ LTE Band 4 Mid- Tilt - Right /Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5mm;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

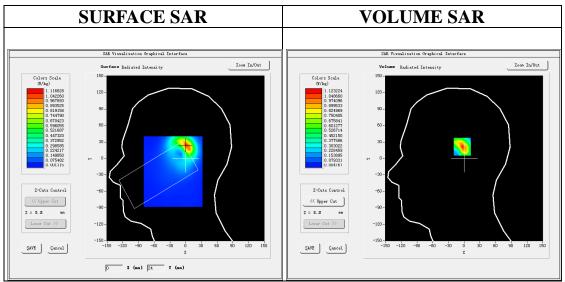


## Maximum location: X=1.00, Y=23.00 SAR Peak: 1.90 W/kg

SAR 10g (W/Kg)	0.496902		
SAR 1g (W/Kg)	1.046201		



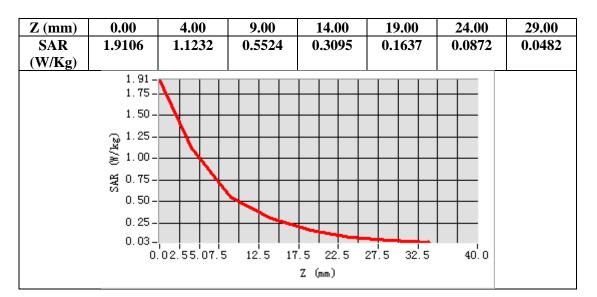

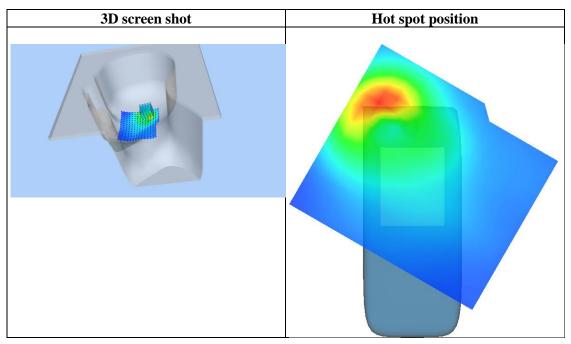




Report No.: AGC00408230802FH01 Page 183 of 192

## APPENDIX C. TEST SETUP PHOTOGRAPHS

LEFT-CHEEK TOUCH

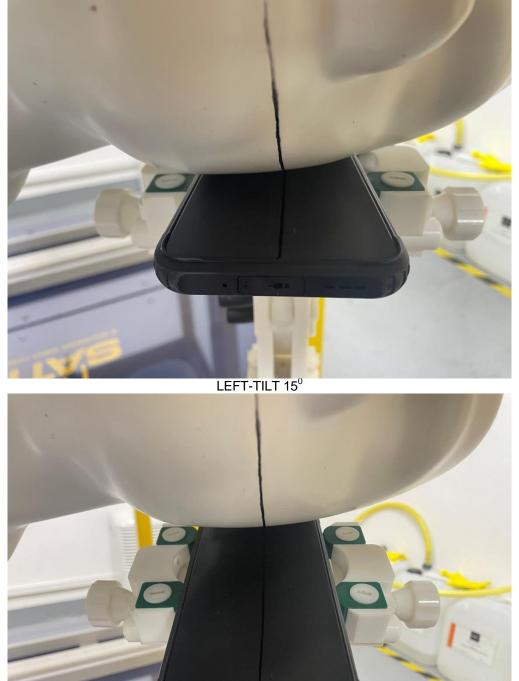



Report No.: AGC00408230802FH01 Page 184 of 192

## **RIGHT- CHEEK TOUCH**




RIGHT-TILT 15°





#### Body Back 10mm

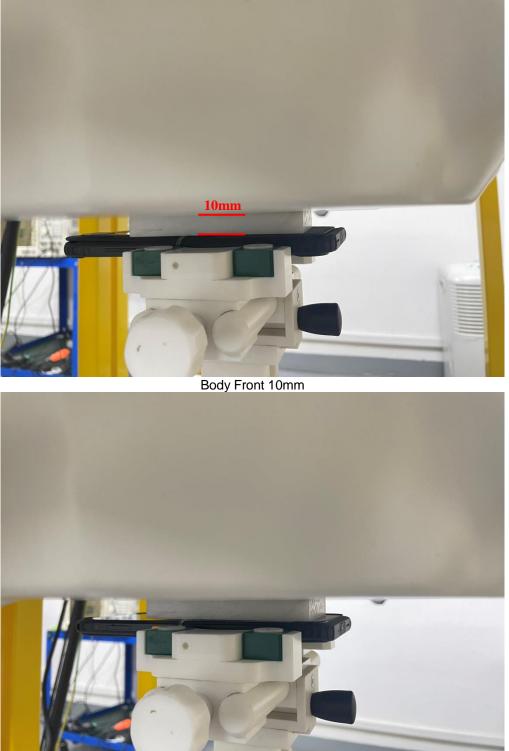



#### Edge 1(Top) 10mm-Hotspot Mode



Edge 2(Right) 10mm-Hotspot Mode





Report No.: AGC00408230802FH01 Page 187 of 192

#### Edge 3(Bottom) 10mm-Hotspot Mode



Edge 4(Left) 10mm-Hotspot Mode





Report No.: AGC00408230802FH01 Page 188 of 192


## Body Back with earphone 10mm






## DEPTH OF THE LIQUID IN THE PHANTOM—ZOOM IN

Note : The position used in the measurement were according to IEEE Std. 1528:2013

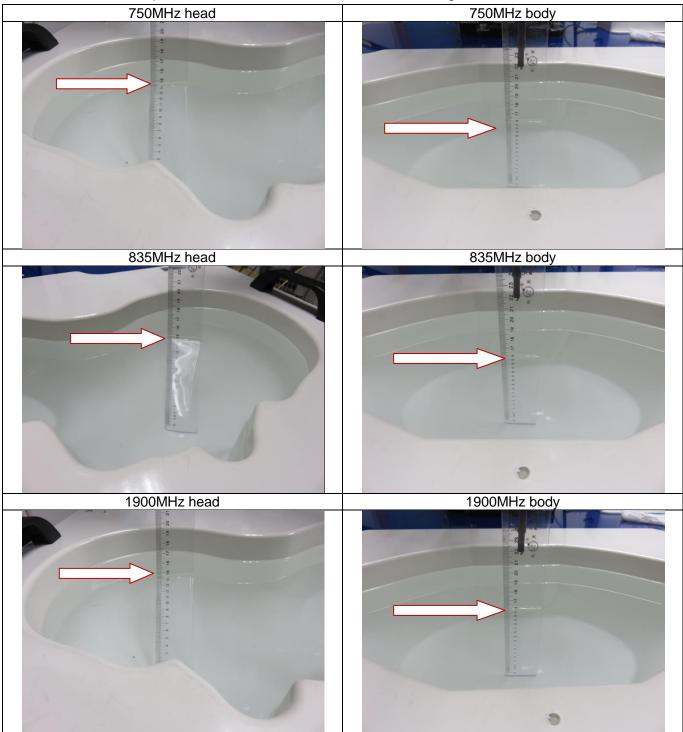



Report No.: AGC00408230802FH01 Page 190 of 192

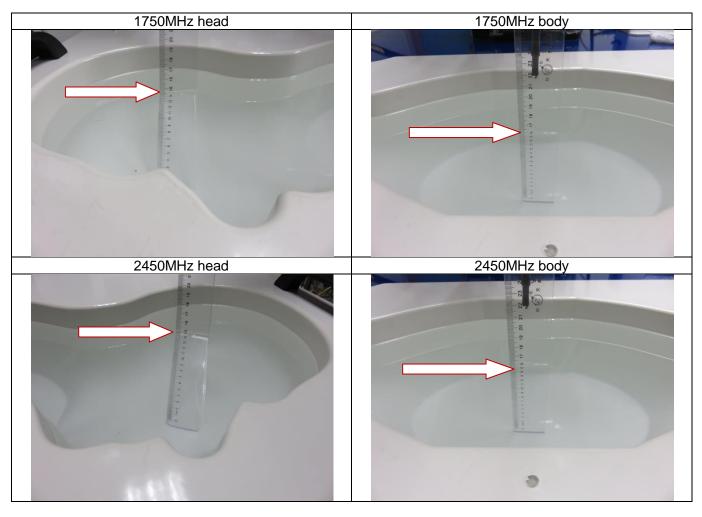




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Report No.: AGC00408230802FH01 Page 191 of 192

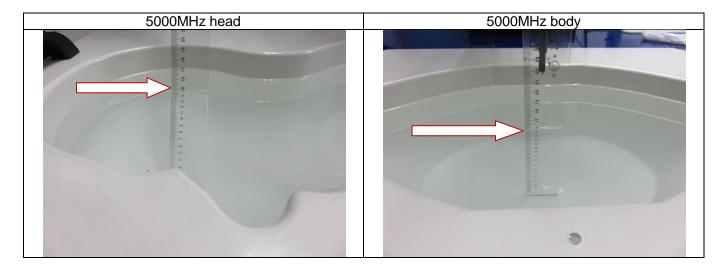



Report No.: AGC00408230802FH01 Page 192 of 192

# **APPENDIX D. CALIBRATION DATA**

Refer to Attached files.

----END OF REPORT----

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



## Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.