

FCC Test Report

Report No.: AGC00408230802FR03A

FCC ID : 2A3DR-AGMH6

APPLICATION PURPOSE: Class II Permissive Change

PRODUCT DESIGNATION: 4G Smart Phone

BRAND NAME : AGM

MODEL NAME : AGM_H_MAX

APPLICANT : AGM MOBILE LIMITED

DATE OF ISSUE : Sep. 13, 2024

STANDARD(S) : FCC Part 15 Subpart C §15.247

REPORT VERSION: V1.0

Attestation of Global Conclance (Shenzhen) Co., Ltd



Page 2 of 21

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Sep. 13, 2024	Valid	Initial Release	

Note: The original test report AGC00408230802FR03 (dated Aug. 22, 2023 and tested from Aug.11, 2023 to Aug. 22, 2023) was modified on Sep. 13, 2024, including the following changes and additions:

- Changed model name.
- Changed software version.
- Changed manufacturer, manufacturer address, factory and factory address.
- Changed rated voltage of battery and model name and manufacturer.
- Changed the circuit components of the headphones (added geomagnetic function).
- Changed the appearance, size, and thickness of the product.
- Changed the appearance and gain of the antenna.


Other electrical components and motherboard circuits are exactly the same.

Based on the above changes RADIATED EMISSION has were subjected to re-evaluation testing.



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. IEEE 802.11N MODULATION SCHEME	7
2.4. RELATED SUBMITTAL(S) / GRANT (S)	8
2.5. TEST METHODOLOGY	8
2.6. SPECIAL ACCESSORIES	8
2.7. EQUIPMENT MODIFICATIONS	8
2.8. ANTENNA REQUIREMENT	8
3. MEASUREMENT UNCERTAINTY	9
4. DESCRIPTION OF TEST MODES	10
5. SYSTEM TEST CONFIGURATION	11
5.1. CONFIGURATION OF EUT SYSTEM	11
5.2. EQUIPMENT USED IN EUT SYSTEM	11
5.3. SUMMARY OF TEST RESULTS	11
6. TEST FACILITY	12
7. RADIATED EMISSION	13
7.1 MEASUREMENT LIMITS	13
7.2 MEASUREMENT PROCEDURE	13
7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	15
7.4 MEASUREMENT RESULT	16
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	21
APPENDIX II: PHOTOGRAPHS OF EUT	21





1. VERIFICATION OF CONFORMITY

Applicant	AGM MOBILE LIMITED
Address	FLAT/RM 2253 22/F HOI TAI FACTORY ESTATE TSING YEUNG CIRCUIT TUEN MUN NT HONG KONG,CHINA
manufacturer	GUANGDONG AIJIEMO ELECTRONIC INDUSTRY CO., LTD
Address	AGM TECHNOLOGY PARK,NO.187 LIANFA ROAD,TONGQIAO TOWN,ZHONGKAI HIGH-TECH DISTRICT,HUIZHOU CITY,P.R.CHINA
Factory	GUANGDONG AIJIEMO ELECTRONIC INDUSTRY CO., LTD
Address	AGM TECHNOLOGY PARK,NO.187 LIANFA ROAD,TONGQIAO TOWN,ZHONGKAI HIGH-TECH DISTRICT,HUIZHOU CITY,P.R.CHINA
Product Designation	4G Smart Phone
Brand Name	AGM
Test Model	AGM_H_MAX
Date of receipt of test item	Aug. 14, 2024
Date of test	Aug. 14, 2024~Sep. 13, 2024
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BGN/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Prepared By	Bibo zhang	
	Bibo Zhang (Project Engineer)	Sep. 13, 2024
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Sep. 13, 2024
Approved By	Max Zhang	
•	Max Zhang (Authorized Officer)	Sep. 13, 2024



Page 5 of 21

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

Equipment Type	WLAN 2.4G
Frequency Band	2400MHz ~ 2483.5MHz
Operation Frequency	2412MHz ~ 2462MHz
Output Dower (Average)	IEEE 802.11b:15.10dBm; IEEE 802.11g:12.89dBm;
Output Power (Average)	IEEE 802.11n(HT20):11.39dBm; IEEE 802.11n(HT40):11.55dBm
Output Power (Peak)	IEEE 802.11b:17.83dBm; IEEE 802.11g:20.33dBm;
Output Power (Peak)	IEEE 802.11n(HT20):19.08dBm; IEEE 802.11n(HT40):18.96dBm
Modulation	802.11b:(DQPSK, DBPSK,CCK)DSSS
Wiodulation	802.11g/n:(64-QAM,16-QAM,QPSK, BPSK)OFDM
	802.11b:1/2/5.5/11Mbps
Data Rate	802.11g: 6/9/12/18/24/36/48/54Mbps
	802.11n: up to 300Mbps
Number of channels	11
Hardware Version	S681_V1
Software Version	Android 14
Antenna Designation	PIFA antenna (Comply with requirements of the FCC part 15.203)
Antenna Gain	0.94dBi
Power Supply	DC 3.85V by battery or DC 5V by adapter



Page 6 of 21

2.2. TABLE OF CARRIER FREQUENCYS

For 2412-2462MHz:

11 channels are provided for 802.11b/g/n(HT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz		

7 channels are provided for 802.11n(HT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency
01		02		03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10		11			



Page 7 of 21

2.3. IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	Modulation	R NBPS	NBPSC	NCI	BPS .	NDI	3PS	Da rate(N 800)	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval



Page 8 of 21

2.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID**: **2A3DR-AGMH6** filing to comply with the FCC Part 15 requirements.

2.5. TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

2.6. SPECIAL ACCESSORIES

Refer to section 5.2.

2.7. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.8. ANTENNA REQUIREMENT

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. For the antenna gain is 0.94dBi



Page 9 of 21

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$



Report No.: AGC00408230802FR03A Page 10 of 21

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel transmitting (TX)
2	Middle channel transmitting (TX)
3	High channel transmitting (TX)

Note:

- 1) Transmit by 802.11b with Date rate (1/2/5.5/11)
- 2) Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54)
- 3) Transmit by 802.11n (20MHz) with Date rate (6.5/13/19.5/26/39/52/58.5/65)
- 4) Transmit by 802.11n (40MHz) with Date rate (13.5/27/40.5/54/81/108/121.5/135)
- 5) The test channel for 20MHz bandwidth system is channel 1, 6 and 11.
- 6) The test channel for 40MHz bandwidth system is channel 3, 6 and 9.

Note:


- 1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the EUT is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.
- 3. The test software is through engineering commands, EUT can be set to a separate test mode.



Page 11 of 21

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

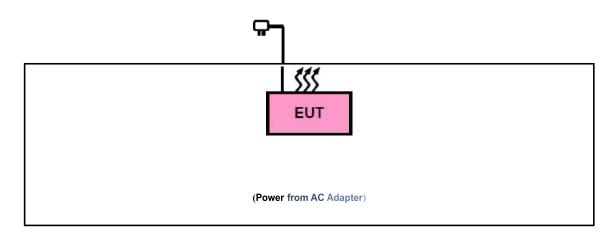

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	Identifier	Note
1	Adapter	U312E0A050200	Input: AC 100-240V 50/60Hz, 0.35A Output: DC 5.0V 2A	AE
2	Battery	AGM_H_MAX	DC 3.85V 10000mAh	AE
3	USB Cable	N/A	N/A	AE

5.3. SUMMARY OF TEST RESULTS

Item	FCC Rules	Description Of Test	Result
1	§15.209	Radiated Emission& Band Edge	Pass



Report No.: AGC00408230802FR03A Page 12 of 21

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF RADIATED EMISSION TEST

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23	
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	



Page 13 of 21

7. RADIATED EMISSION

7.1 MEASUREMENT LIMITS


15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

7.2 MEASUREMENT PROCEDURE

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.





As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start Stan Fraguency	1GHz~26.5GHz
Start ~Stop Frequency	1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)


RADIATED EMISSION TEST SETUP 9KHz-30MHz

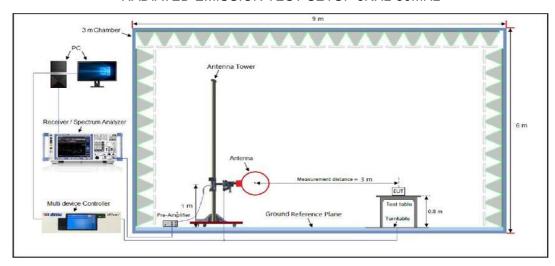

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

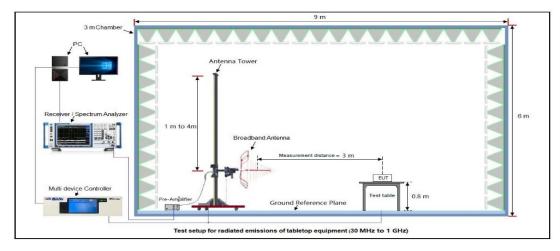

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

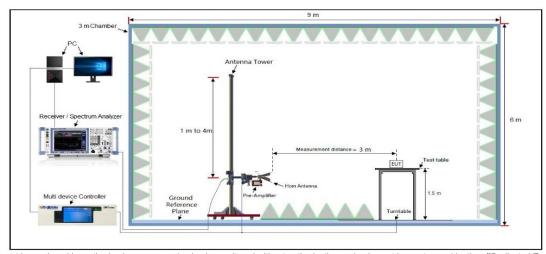




7.4 MEASUREMENT RESULT

Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated emission from 30MHz to 1000MHz

EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	802.11b with 2412MHz	Antenna	Horizontal

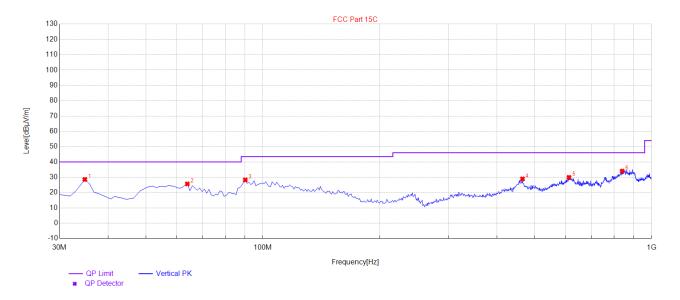


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	34.85	31.83	11.82	40.00	8.17	100	280	Horizontal
2	54.25	29.02	16.35	40.00	10.98	100	70	Horizontal
3	99.84	24.89	17.03	43.50	18.61	100	220	Horizontal
4	463.59	28.32	23.86	46.00	17.68	100	110	Horizontal
5	619.76	30.23	25.90	46.00	15.77	100	50	Horizontal
6	899.12	34.62	30.26	46.00	11.38	100	200	Horizontal

RESULT: PASS



EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	802.11b with 2412MHz	Antenna	Vertical

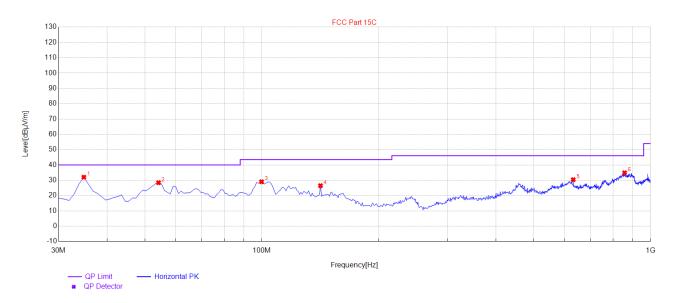

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	34.85	28.24	11.82	40.00	11.76	100	30	Vertical
2	59.1	26.35	17.64	40.00	13.65	100	90	Vertical
3	94.02	25.85	15.27	43.50	17.65	100	210	Vertical
4	459.71	27.71	24.69	46.00	18.29	100	100	Vertical
5	619.76	30.04	25.90	46.00	15.96	100	70	Vertical
6	857.41	34.25	29.93	46.00	11.75	100	200	Vertical

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Measurement.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report.



Page 18 of 21

Radiated emission above 1GHz

EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	802.11b with date rate 1_2412MHz	Antenna	Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
4824.000	49.36	0.08	49.44	74.00	-24.56	peak
4824.000	39.11	0.08	39.19	54.00	-14.81	AVG
7236.000	50.14	2.21	52.35	74.00	-21.65	peak
7236.000	39.52	2.21	41.73	54.00	-12.27	AVG
Remark:			_			

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	802.11b with date rate 1_2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type		
4824.000	50.21	0.08	50.29	74.00	-23.71	peak		
4824.000	39.17	0.08	39.25	54.00	-14.75	AVG		
7236.000	49.33	2.21	51.54	74.00	-22.46	peak		
7236.000	40.12	2.21	42.33	54.00	-11.67	AVG		
Remark:								
Factor = Ante	Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

RESULT: PASS





EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	802.11b with date rate 1_2437MHz	Antenna	Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
4874.000	49.12	0.14	49.26	74.00	-24.74	peak
4874.000	39.77	0.14	39.91	54.00	-14.09	AVG
7311.000	48.39	2.36	50.75	74.00	-23.25	peak
7311.000	39.15	2.36	41.51	54.00	-12.49	AVG
Remark:						_

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	802.11b with date rate 1_2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type		
4874.000	50.55	0.14	50.69	74.00	-23.31	peak		
4874.000	40.12	0.14	40.26	54.00	-13.74	AVG		
7311.000	49.36	2.36	51.72	74.00	-22.28	peak		
7311.000	40.51	2.36	42.87	54.00	-11.13	AVG		
Remark:								
Factor = Ante	Factor = Antenna Factor + Cable Loss - Pre-amplifier.							

RESULT: PASS





EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	802.11b with date rate 1_2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type		
4924.000	50.87	0.22	51.09	74.00	-22.91	peak		
4924.000	41.23	0.22	41.45	54.00	-12.55	AVG		
7386.000	49.52	2.64	52.16	74.00	-21.84	peak		
7386.000	40.78	2.64	43.42	54.00	-10.58	AVG		
Remark:								
Cootor Ant	Foster Antonno Foster I Coble Loss Dro amplifier							

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	802.11b with date rate 1_2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
4924.000	49.78	0.22	50.00	74.00	-24.00	peak
4924.000	40.51	0.22	40.73	54.00	-13.27	AVG
7386.000	49.22	2.64	51.86	74.00	-22.14	peak
7386.000	41.25	2.64	43.89	54.00	-10.11	AVG
Remark:						

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 40 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over= Limit-Measure.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report.



Page 21 of 21

APPENDIX I: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC00408230802AP01A

APPENDIX II: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC00408230802AP02A

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.