


## 20.2 BLOCK DIAGRAM OF TEST SETUP

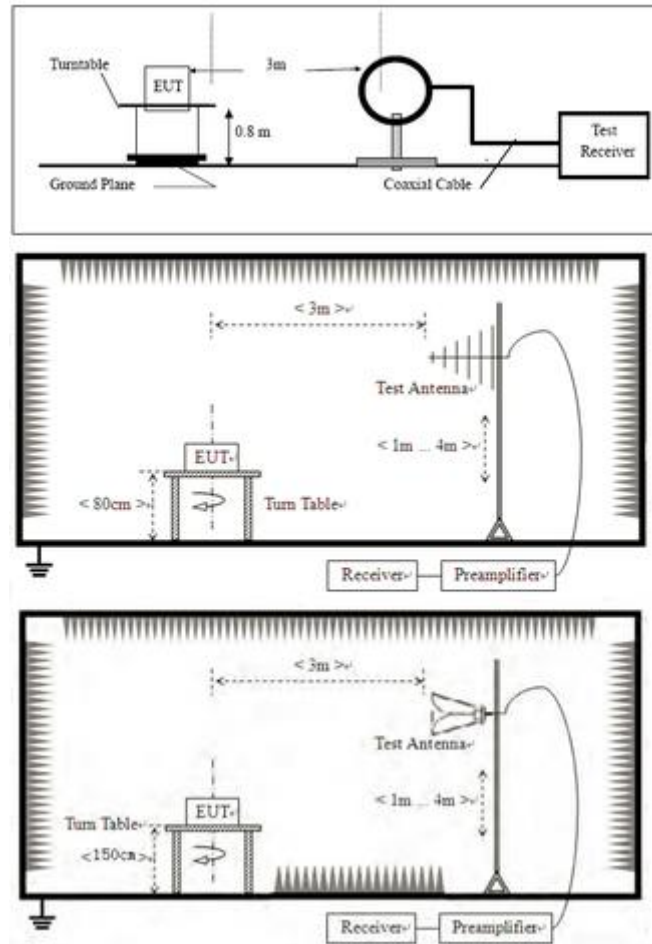

## 20.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1:  $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

### 20.4 TEST DATA

[TestMode: TX low channel]; [Polarity: Horizontal]

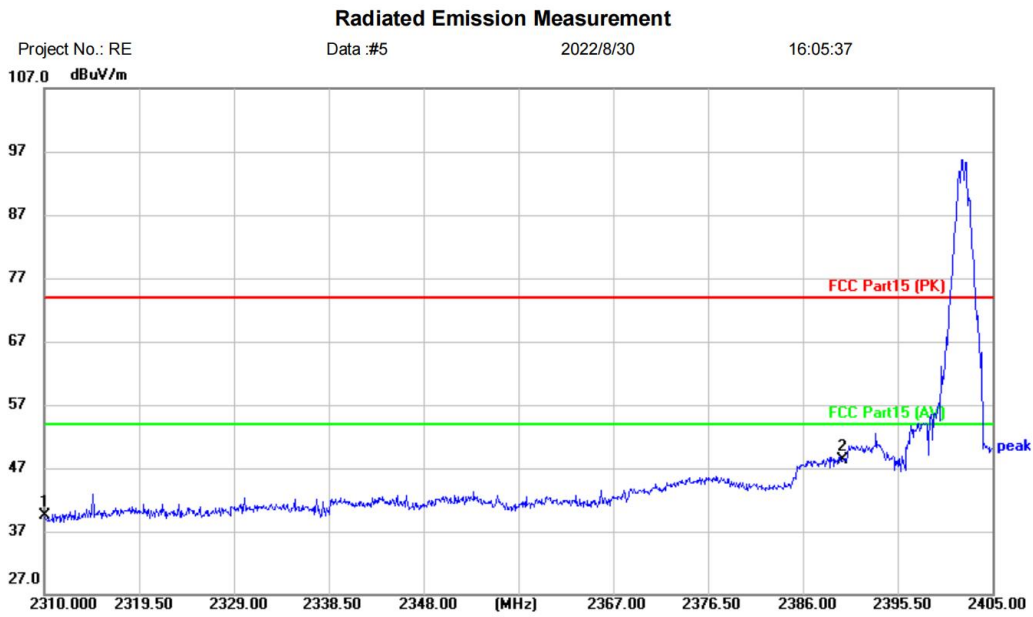


Site	Polarization: <b>Horizontal</b>	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Haylou lady bag		
M/N: T87		
Mode: TX-L		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	43.71	-4.27	39.44	74.00	-34.56	peak	
2	*	2390.000	52.18	-3.82	48.36	74.00	-25.64	peak	

\*:Maximum data    x:Over limit    !:over margin      <Reference Only

**Test Result: Pass**

[TestMode: TX low channel]; [Polarity: Vertical]

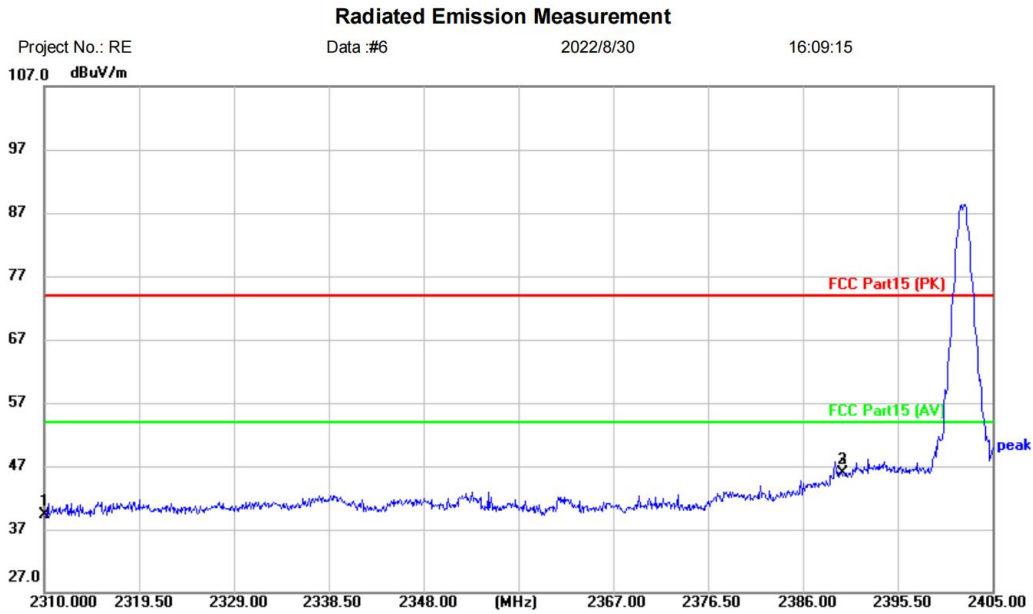

Site	Polarization: <b>Vertical</b>	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Haylou lady bag		
M/N: T87		
Mode: TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	43.63	-4.27	39.36	74.00	-34.64	peak	
2	*	2390.000	49.64	-3.82	45.82	74.00	-28.18	peak	
3	*	2390.000	49.64	-3.82	45.82	74.00	-28.18	peak	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX high cahnnel]; [Polarity: Horizontal]

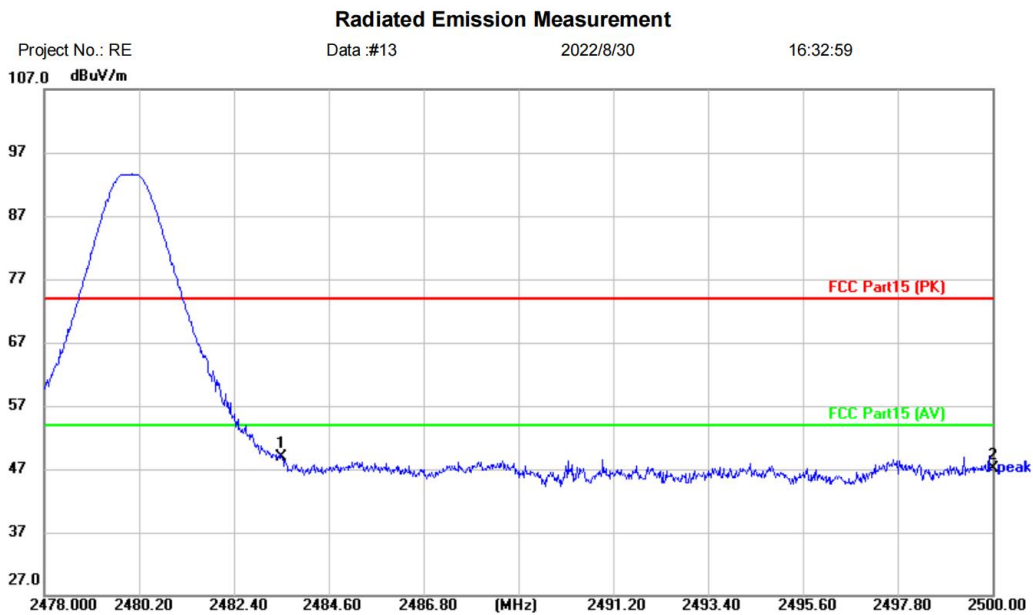

Site	Polarization: <b>Horizontal</b>	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Haylou lady bag		
M/N: T87		
Mode: TX-H		
Note:		


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	52.92	-3.96	48.96	74.00	-25.04	peak	
2		2500.000	51.13	-4.00	47.13	74.00	-26.87	peak	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX high cahnnel]; [Polarity: Vertical]

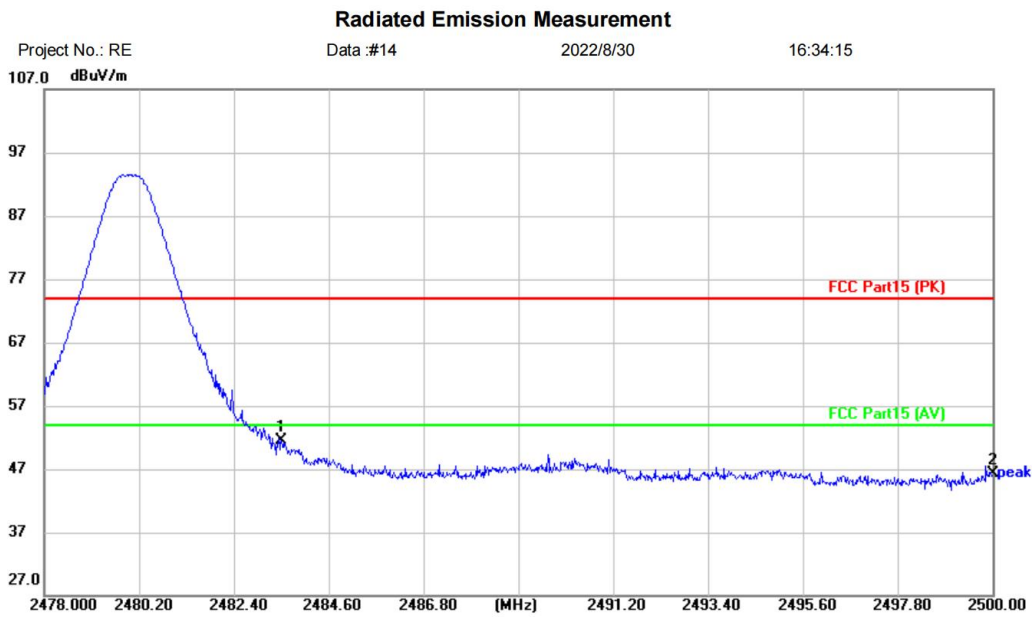

Site	Polarization: <b>Vertical</b>	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Haylou lady bag		
M/N: T87		
Mode: TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	*	2483.500	55.37	-3.96	51.41	74.00	-22.59	peak	
2		2500.000	50.29	-4.00	46.29	74.00	-27.71	peak	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)


**Test Result: Pass**

## 21 APPENDIX


### Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	-1.07	21	Pass
NVNT	1-DH1	2441	Ant1	-0.184	21	Pass
NVNT	1-DH1	2480	Ant1	0.805	21	Pass
NVNT	2-DH1	2402	Ant1	-0.988	21	Pass
NVNT	2-DH1	2441	Ant1	-0.14	21	Pass
NVNT	2-DH1	2480	Ant1	0.753	21	Pass
NVNT	3-DH1	2402	Ant1	-0.993	21	Pass
NVNT	3-DH1	2441	Ant1	-0.202	21	Pass
NVNT	3-DH1	2480	Ant1	0.676	21	Pass


Power NVNT 1-DH1 2402MHz Ant1

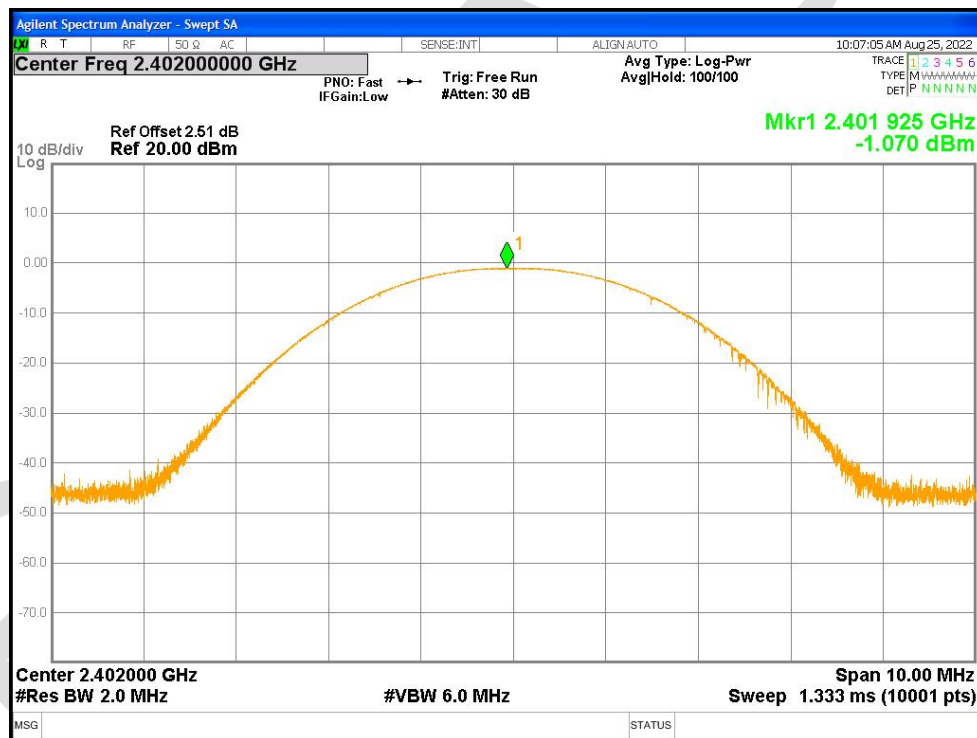

Power NVNT 1-DH1 2441MHz Ant1

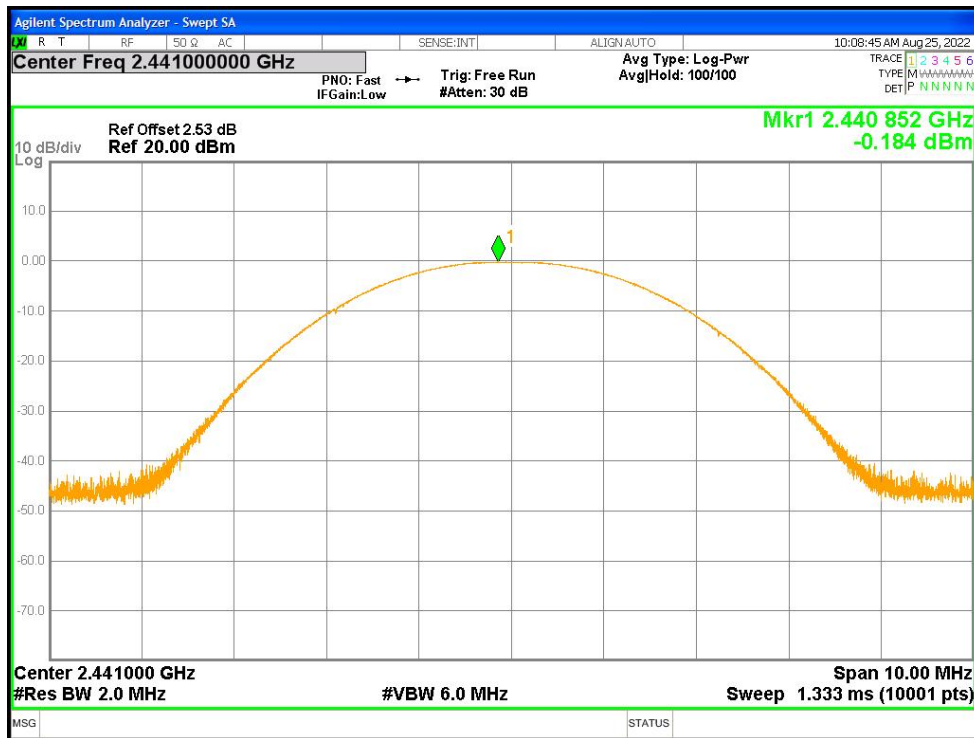


Power NVNT 1-DH1 2480MHz Ant1

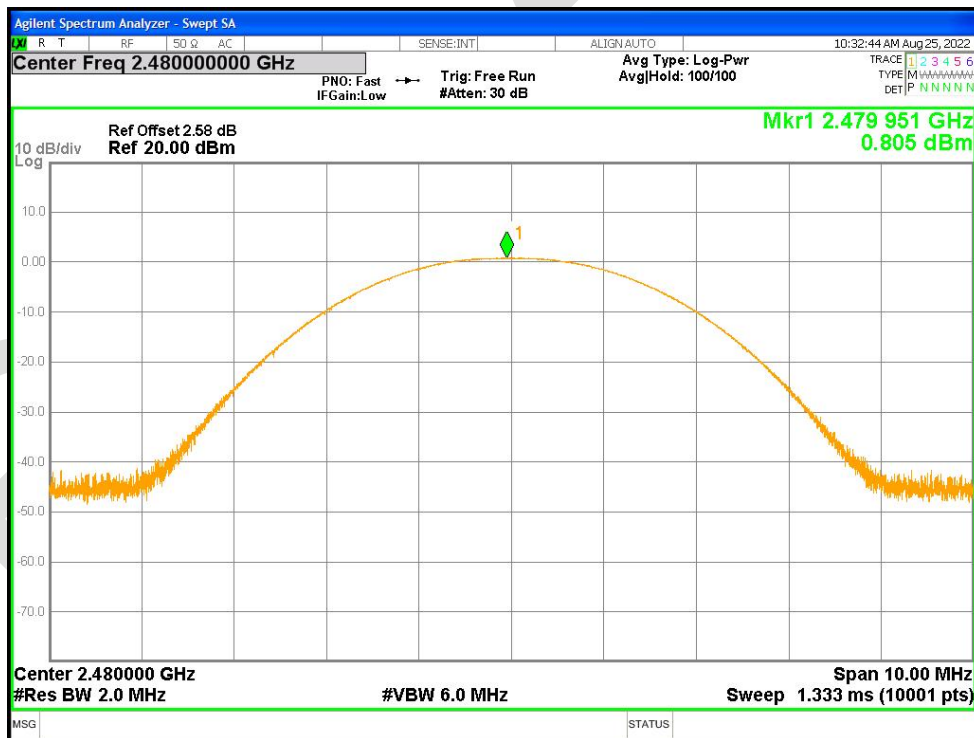


Power NVNT 2-DH1 2402MHz Ant1




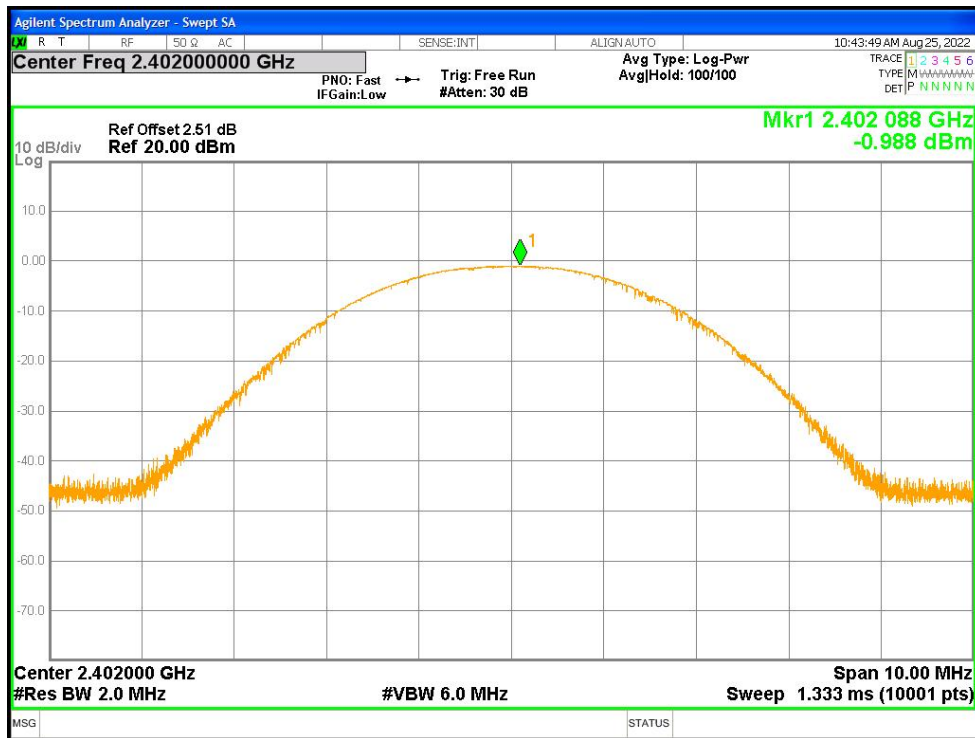


Power NVNT 2-DH1 2441MHz Ant1

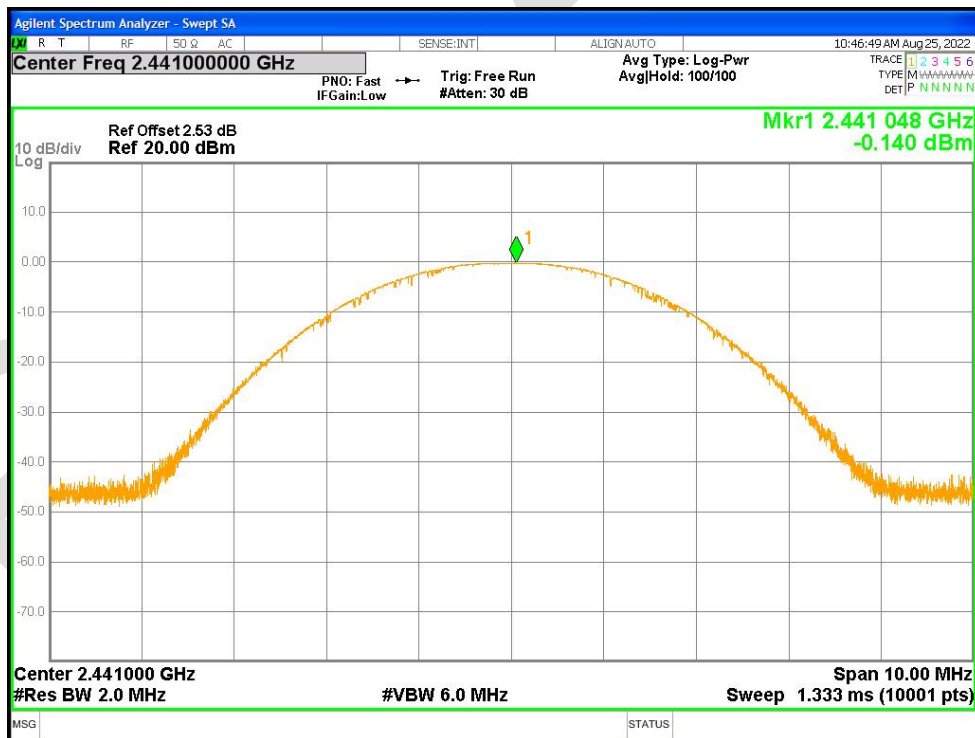


Power NVNT 2-DH1 2480MHz Ant1

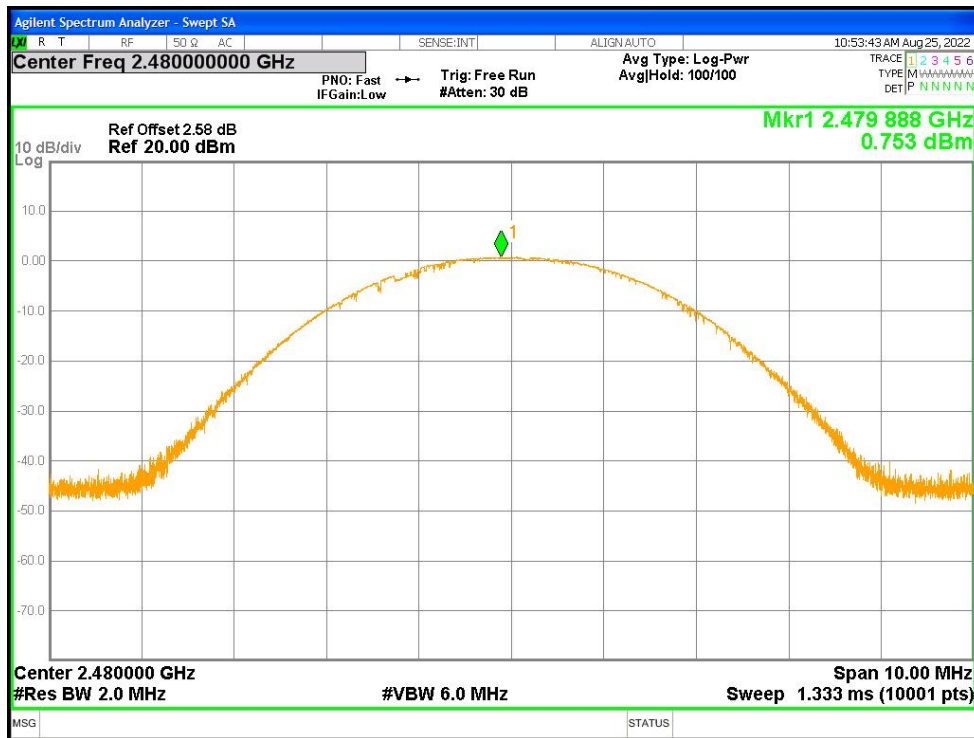


Power NVNT 3-DH1 2402MHz Ant1

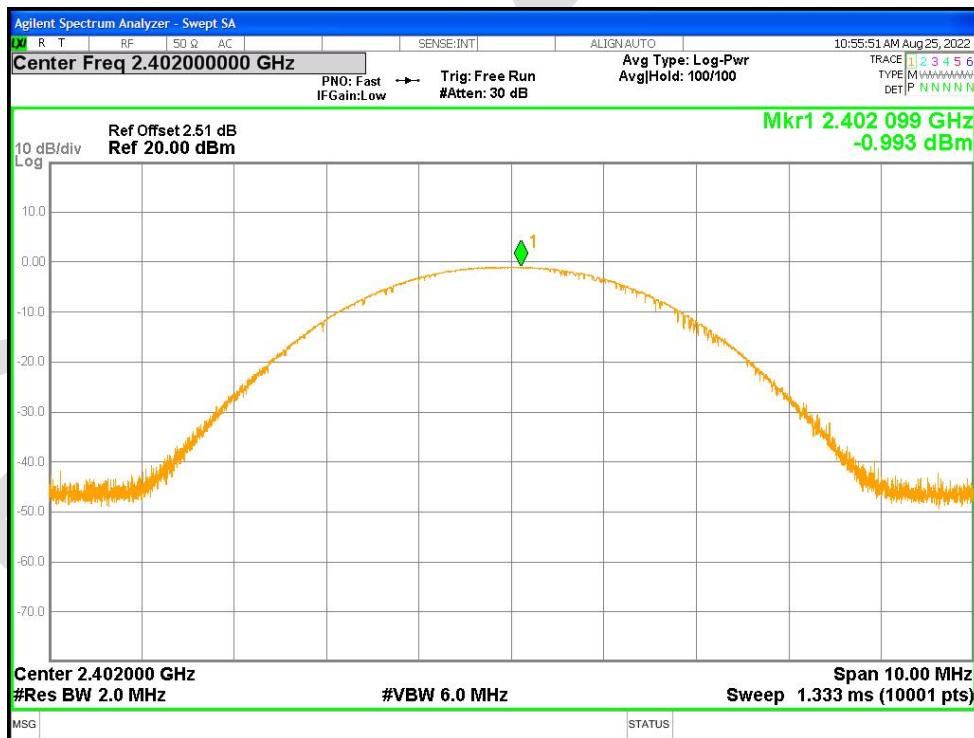

Power NVNT 3-DH1 2441MHz Ant1

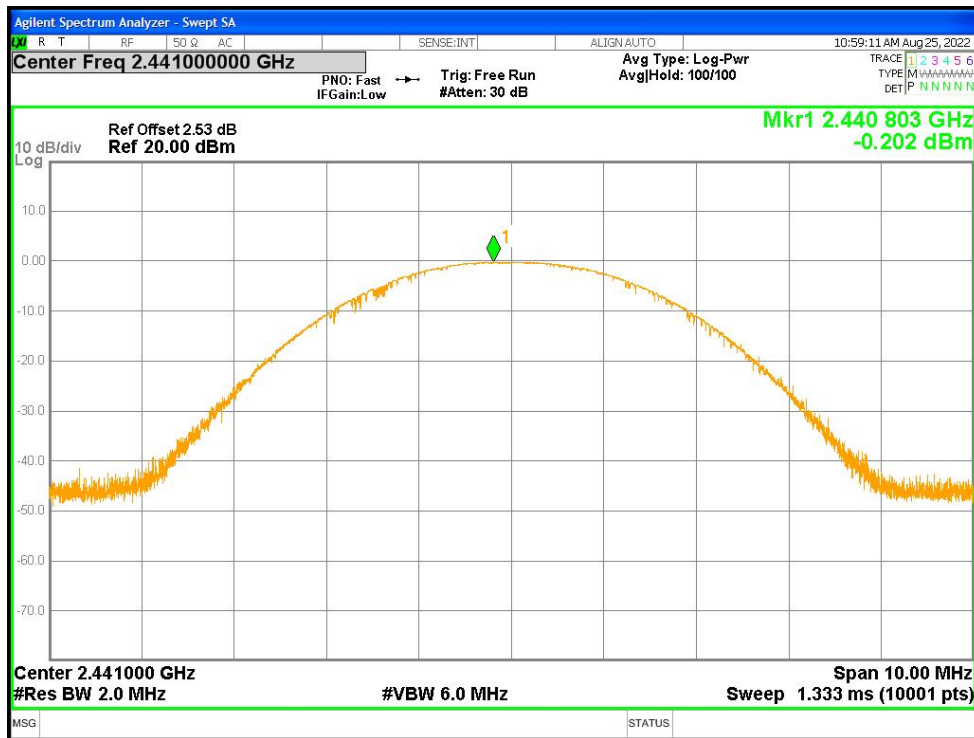



Power NVNT 3-DH1 2480MHz Ant1

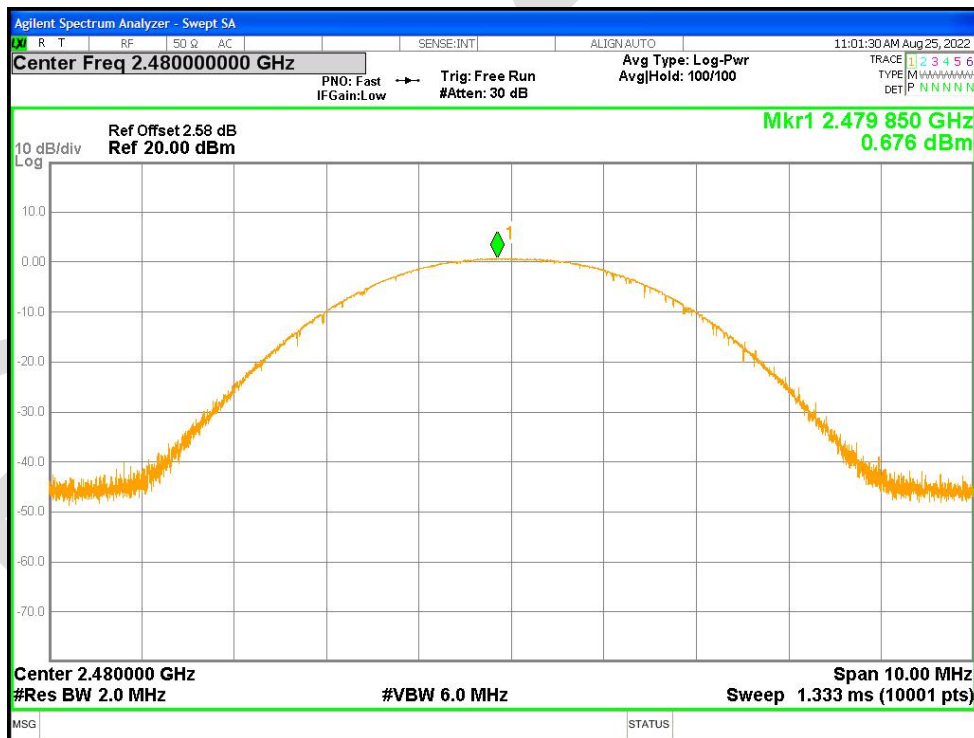


**-20dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	1.032	0	Pass
NVNT	1-DH1	2441	Ant1	0.877	0	Pass
NVNT	1-DH1	2480	Ant1	0.987	0	Pass
NVNT	2-DH1	2402	Ant1	1.18	0	Pass
NVNT	2-DH1	2441	Ant1	1.163	0	Pass
NVNT	2-DH1	2480	Ant1	1.138	0	Pass
NVNT	3-DH1	2402	Ant1	1.141	0	Pass
NVNT	3-DH1	2441	Ant1	1.194	0	Pass
NVNT	3-DH1	2480	Ant1	1.186	0	Pass

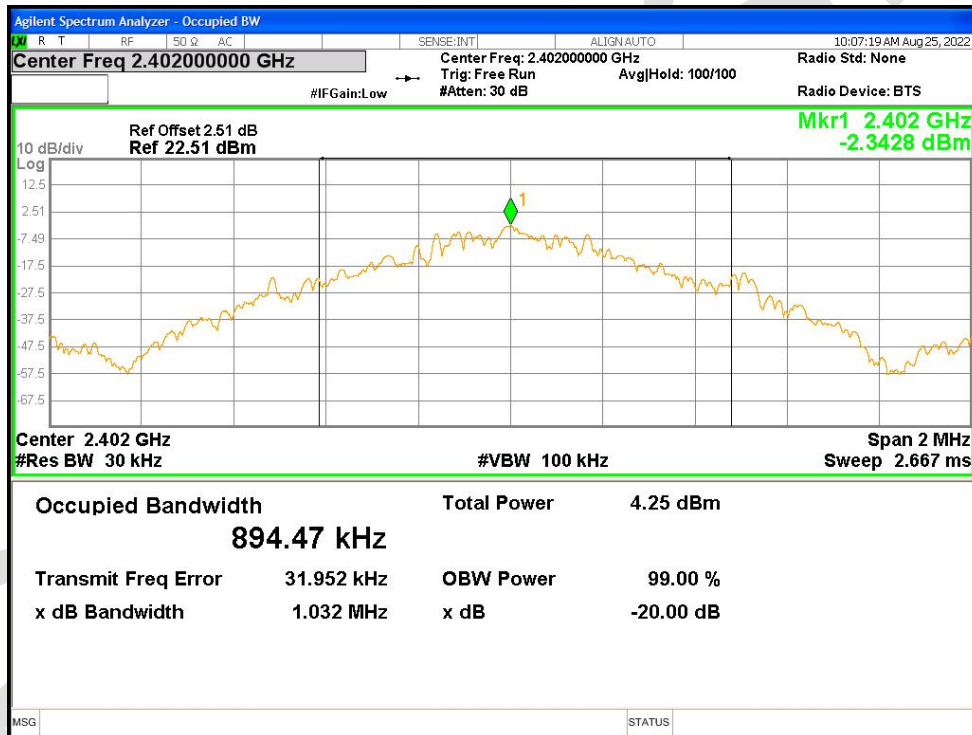
**-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1**

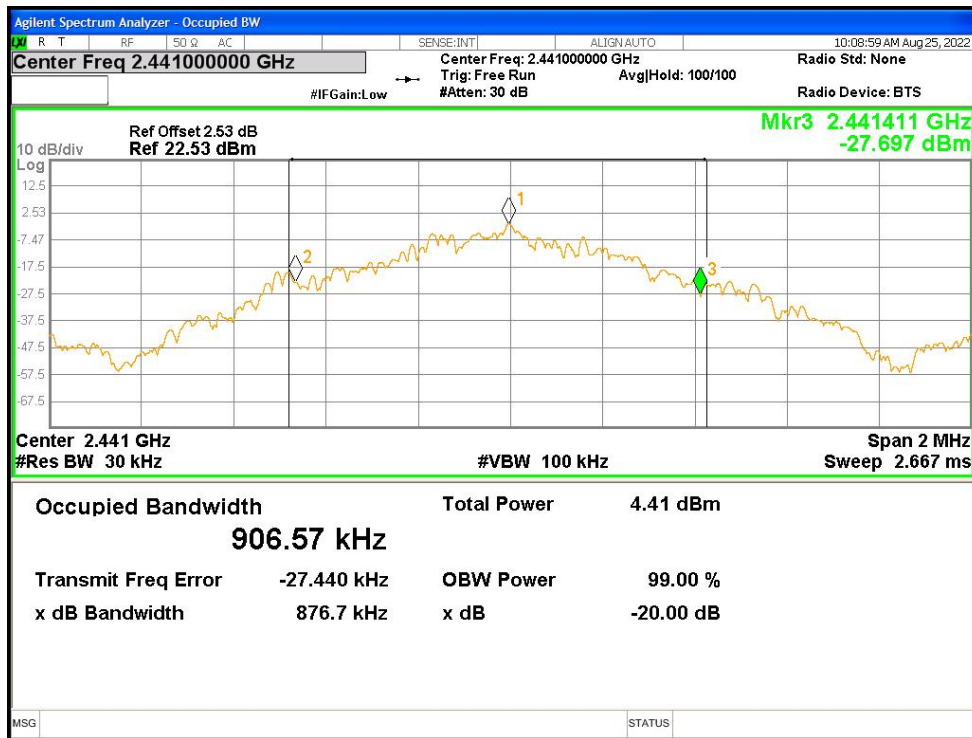**-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1**

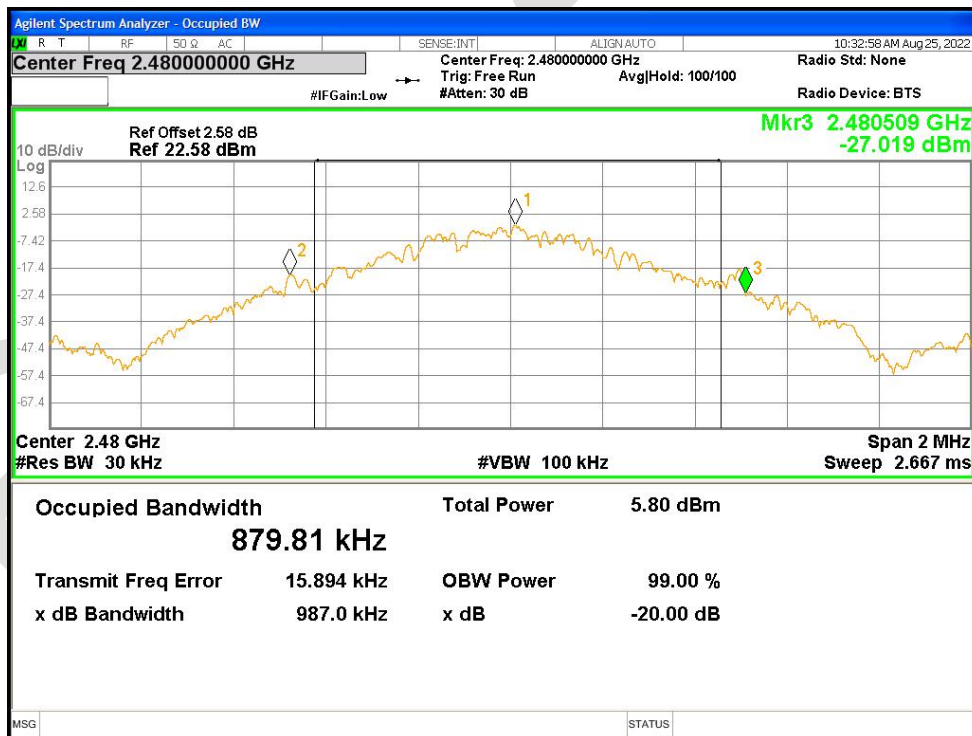


-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

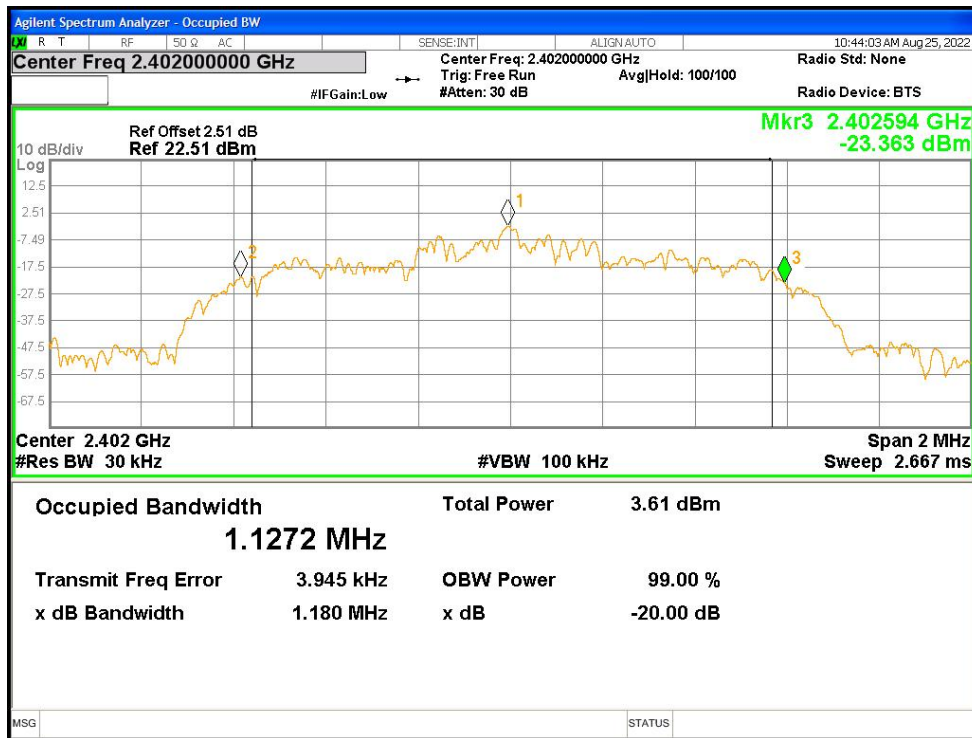

-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1




-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

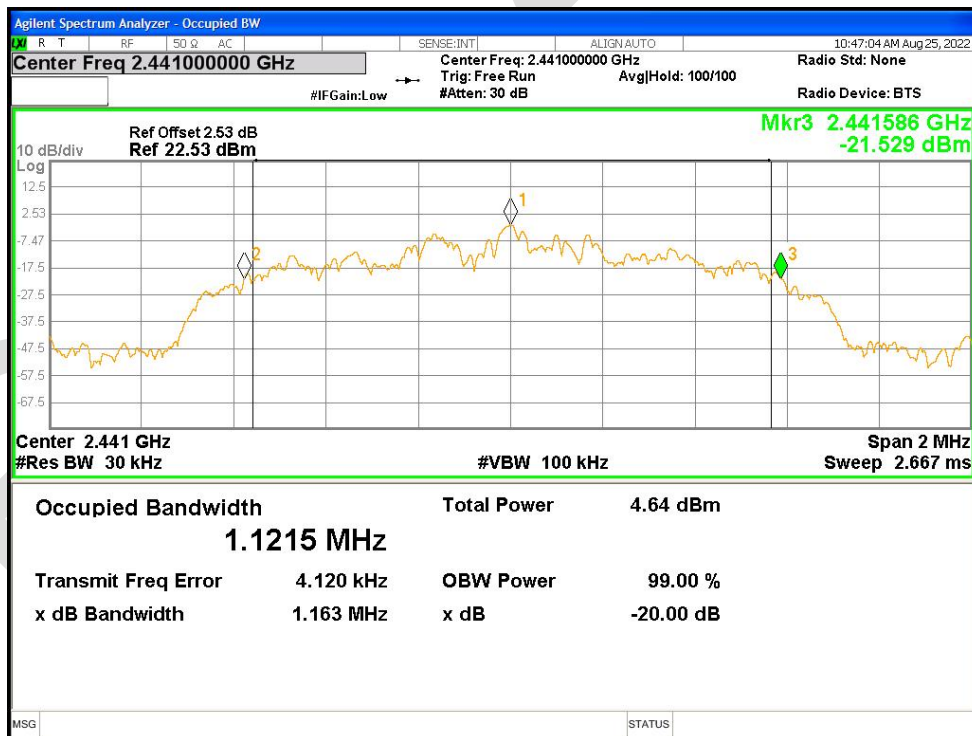


-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1




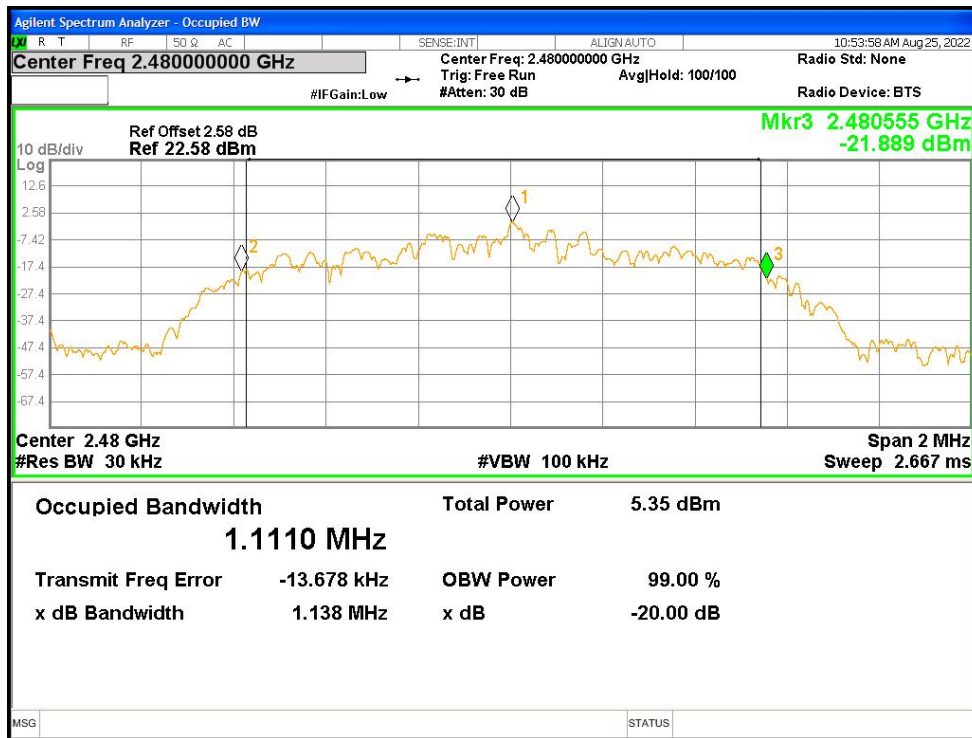


-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

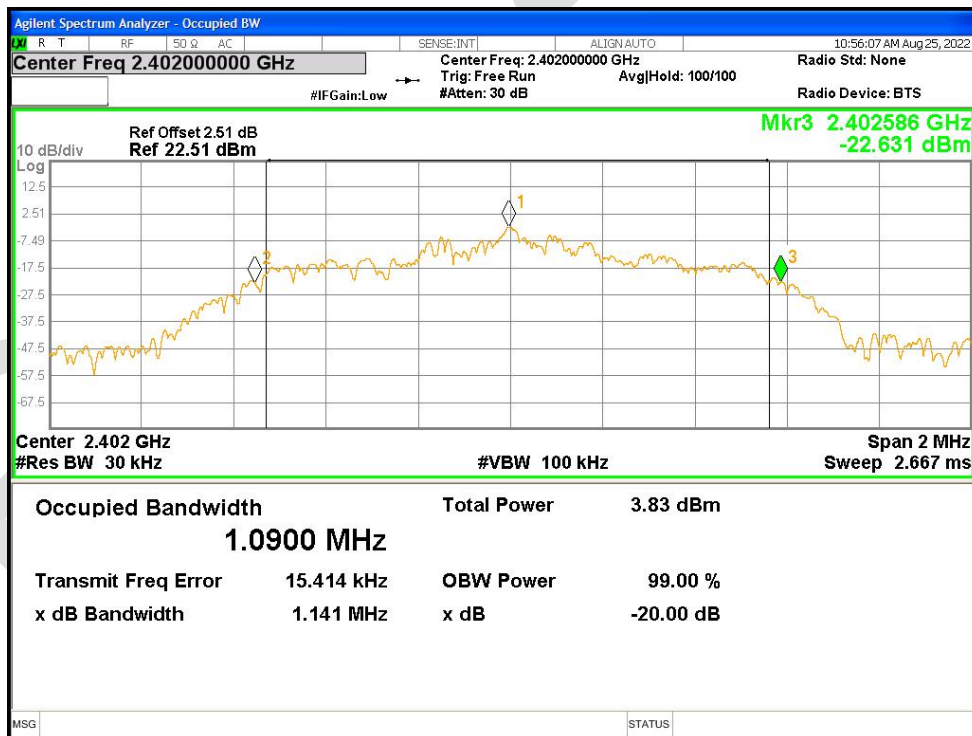

-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

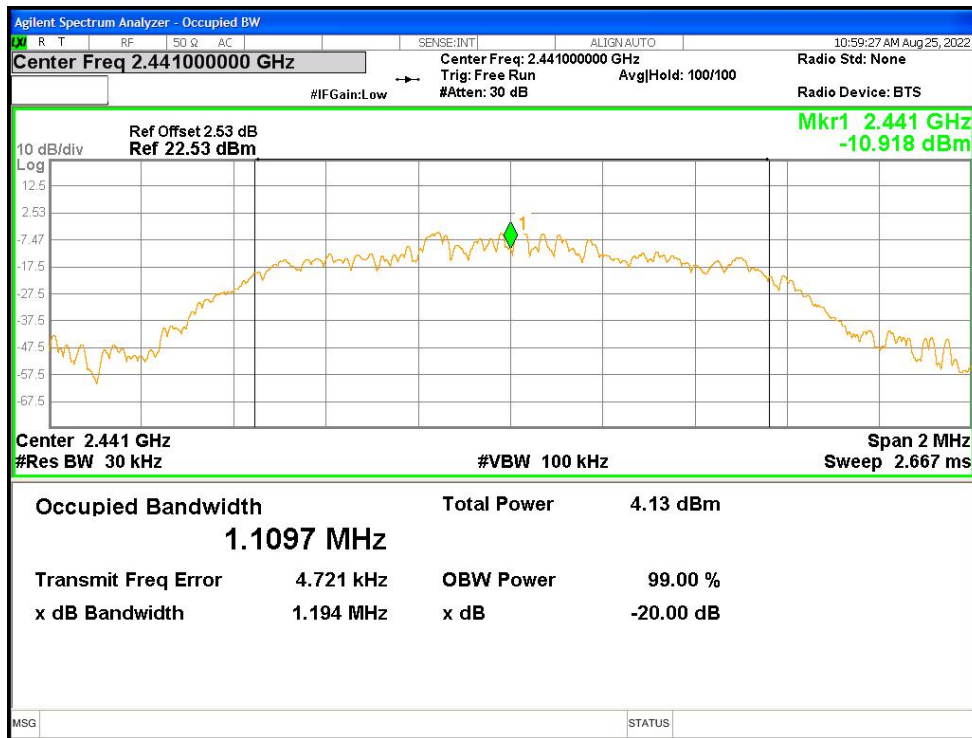

-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

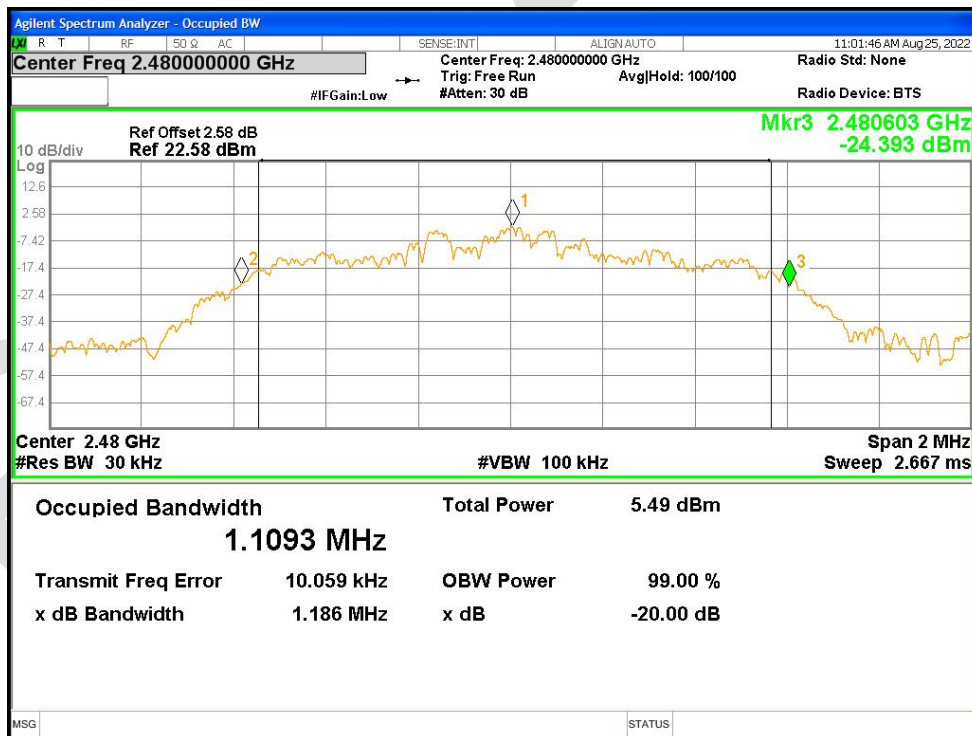





**Occupied Channel Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.85592
NVNT	1-DH1	2441	Ant1	0.85598
NVNT	1-DH1	2480	Ant1	0.95952
NVNT	2-DH1	2402	Ant1	1.1009
NVNT	2-DH1	2441	Ant1	1.1245
NVNT	2-DH1	2480	Ant1	1.1170
NVNT	3-DH1	2402	Ant1	1.1031
NVNT	3-DH1	2441	Ant1	1.0916
NVNT	3-DH1	2480	Ant1	1.1236


OBW NVNT 1-DH1 2402MHz Ant1

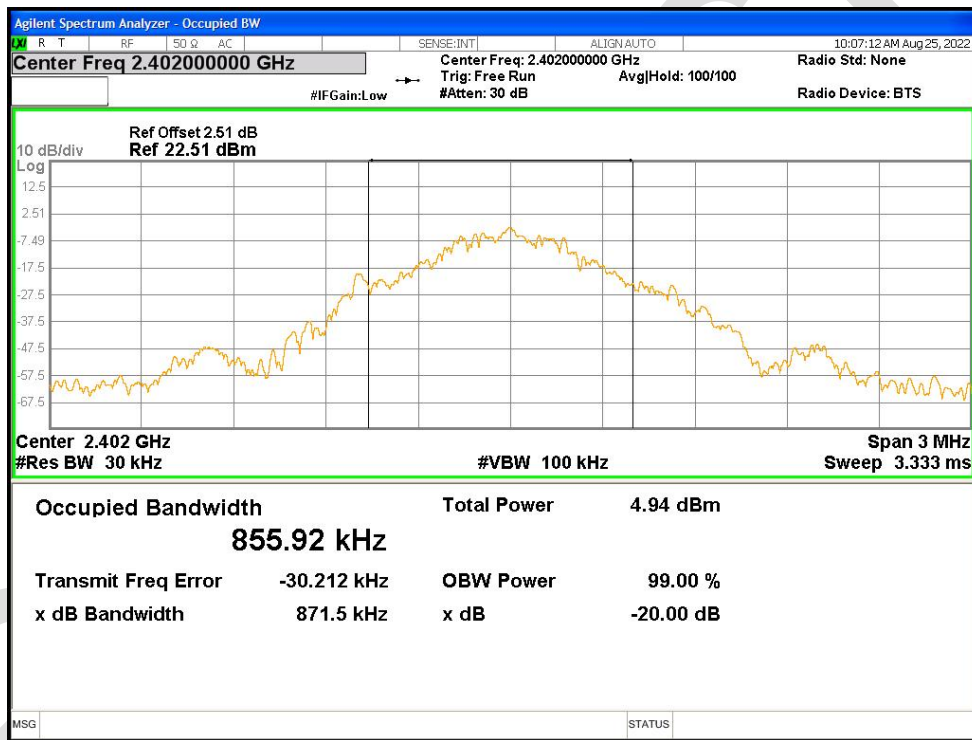


OBW NVNT 1-DH1 2441MHz Ant1

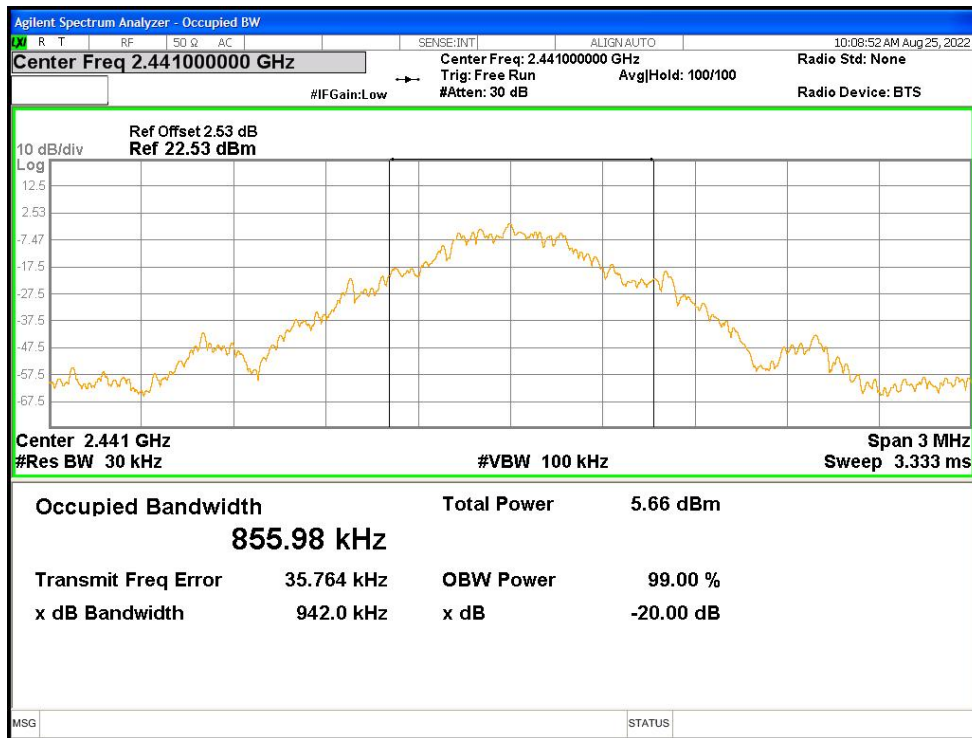


OBW NVNT 1-DH1 2480MHz Ant1

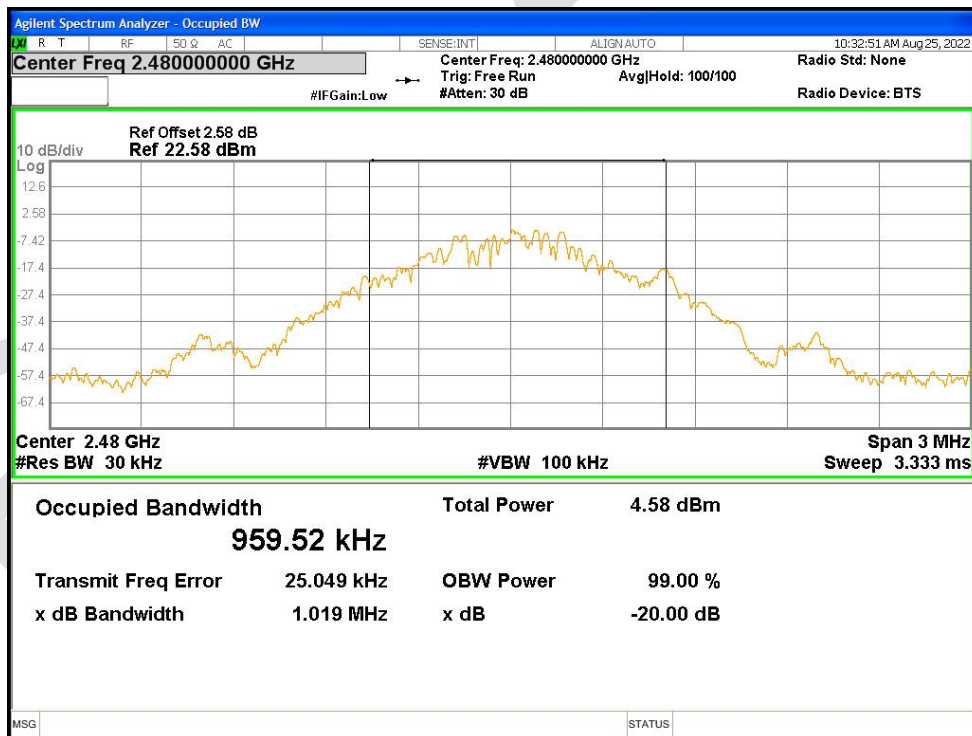


OBW NVNT 2-DH1 2402MHz Ant1

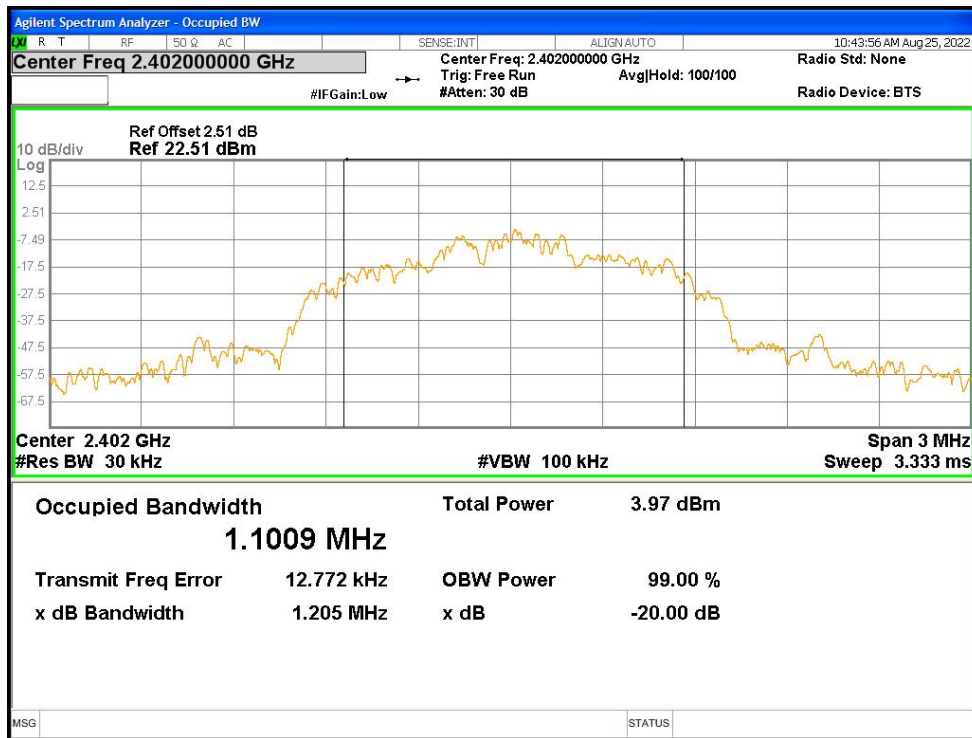


OBW NVNT 2-DH1 2441MHz Ant1

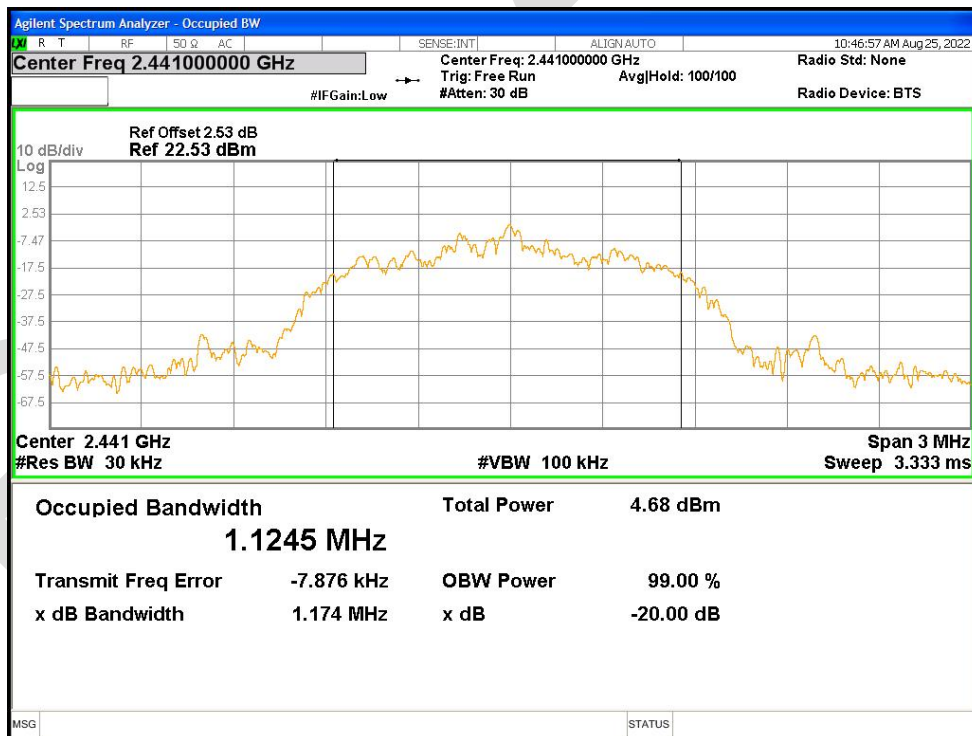

OBW NVNT 2-DH1 2480MHz Ant1

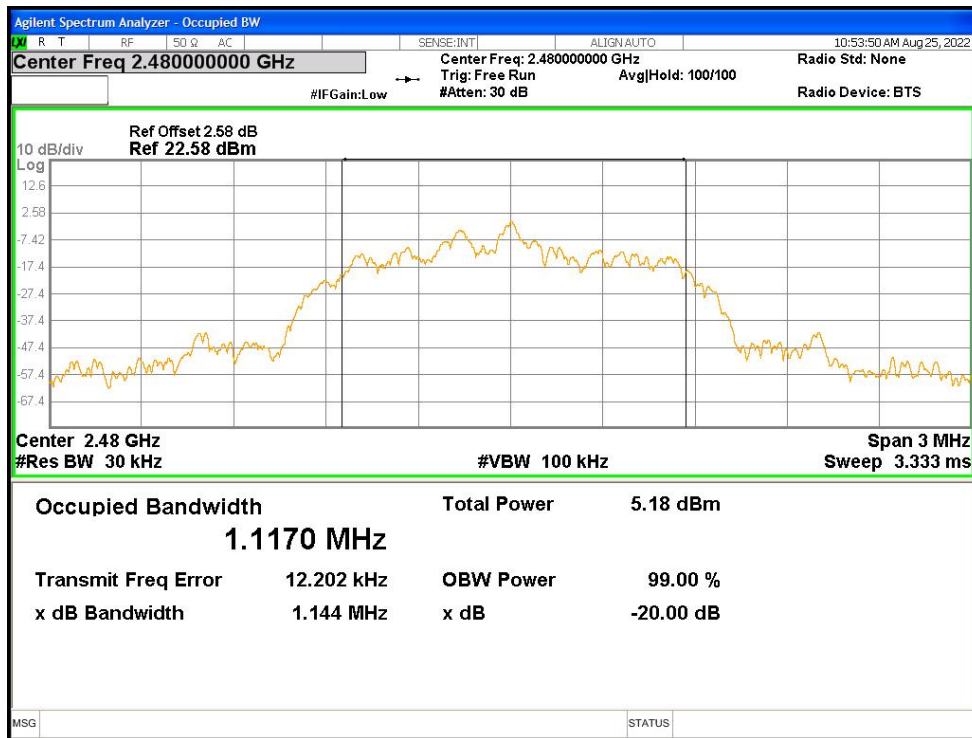

OBW NVNT 3-DH1 2402MHz Ant1

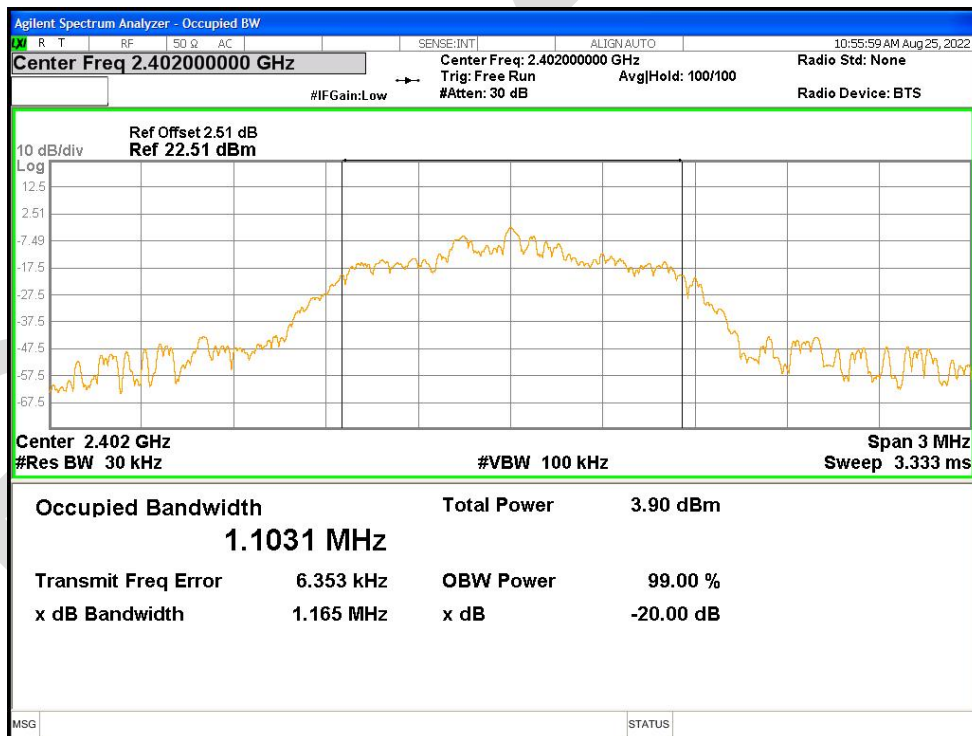

OBW NVNT 3-DH1 2441MHz Ant1