

FCC Test Report

Report No.: AGC00408230802FR02A

FCC ID : 2A3DR-AGMH6

APPLICATION PURPOSE: Class II Permissive Change

PRODUCT DESIGNATION: 4G Smart Phone

BRAND NAME : AGM

MODEL NAME : AGM_H_MAX

APPLICANT: AGM MOBILE LIMITED

DATE OF ISSUE : Sep. 13, 2024

STANDARD(S) : FCC Part 15 Subpart C §15.247

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 24

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep. 13, 2024	Valid	Initial Release

Note: The original test report AGC00408230802FR02 (dated Aug. 22, 2023 and tested from Aug.11, 2023 to Aug. 22, 2023) was modified on Sep. 13, 2024, including the following changes and additions:

- Changed model name.
- Changed software version.
- Changed manufacturer, manufacturer address, factory and factory address.
- Changed rated voltage of battery and model name and manufacturer.
- Changed the circuit components of the headphones (added geomagnetic function).
- Changed the appearance, size, and thickness of the product.
- Changed the appearance and gain of the antenna.

Other electrical components and motherboard circuits are exactly the same.

Based on the above changes RADIATED EMISSION has were subjected to re-evaluation testing.







TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
2.3. RELATED SUBMITTAL(S)/GRANT(S)	6
2.4. TEST METHODOLOGY	6
2.5. SPECIAL ACCESSORIES	6
2.6. EQUIPMENT MODIFICATIONS	6
2.7. ANTENNA REQUIREMENT	6
3. MEASUREMENT UNCERTAINTY	7
4. DESCRIPTION OF TEST MODES	8
5. SYSTEM TEST CONFIGURATION	
5.1. CONFIGURATION OF TESTED SYSTEM	9
5.2. EQUIPMENT USED IN TESTED SYSTEM	9
5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	
7. RADIATED EMISSION	11
7.1. MEASUREMENT PROCEDURE	11
7.2. TEST SETUP	12
7.3. LIMITS AND MEASUREMENT RESULT	
7.4. TEST RESULT	
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	24
ADDENDIV II. DUOTOCD ADUS OF FUT	24





1. VERIFICATION OF COMPLIANCE

Applicant	AGM MOBILE LIMITED
Address FLAT/RM 2253 22/F HOI TAI FACTORY ESTATE TSING YEUNG CIRC TUEN MUN NT HONG KONG,CHINA	
Manufacturer GUANGDONG AIJIEMO ELECTRONIC INDUSTRY CO., LTD	
Address	AGM TECHNOLOGY PARK,NO.187 LIANFA ROAD,TONGQIAO TOWN,ZHONGKAI HIGH-TECH DISTRICT,HUIZHOU CITY,P.R.CHINA
Factory	GUANGDONG AIJIEMO ELECTRONIC INDUSTRY CO., LTD
Address	AGM TECHNOLOGY PARK,NO.187 LIANFA ROAD,TONGQIAO TOWN,ZHONGKAI HIGH-TECH DISTRICT,HUIZHOU CITY,P.R.CHINA
Product Designation	4G Smart Phone
Brand Name	AGM
Test Model	AGM_H_MAX
Date of receipt of test item	Aug. 14, 2024
Date of test	Aug. 14, 2024~Sep. 13, 2024
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BLE/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Prepared By	Bibo zhang	
	Bibo Zhang (Project Engineer)	Sep. 13, 2024
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Sep. 13, 2024
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Sep. 13, 2024



Page 5 of 24

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as a "4G Smart Phone". It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	1Mbps: 0.447dBm (Max) 2Mbps: 0.265dBm (Max)
Bluetooth Version V5.0	
Modulation	BR □GFSK, EDR □π /4-DQPSK, □8DPSK BLE ☑GFSK 1Mbps □GFSK 2Mbps
Number of channels 40 Channel	
Antenna Designation PIFA Antenna (Comply with requirements of the FCC part 15.203)	
Antenna Gain	0.94dBi
Hardware Version	S681_V1
Software Version	Android 14
Power Supply	DC 3.85V by battery or DC 5V by adapter

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2402 MHz
	1	2404 MHz
2400~2483.5MHz	:	:
	38	2478 MHz
	39	2480 MHz



Page 6 of 24

2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2A3DR-AGMH6** filing to comply with the FCC Part 15.247 requirements.

2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX II: PHOTOGRAPHS OF EUT.



Page 7 of 24

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$



Page 8 of 24

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX_CH00_1Mbps
2	Middle channel TX_CH19_1Mbps
3	High channel TX_CH39_1Mbps
4	Low channel TX_CH00_2Mbps
5	Middle channel TX_CH19_2Mbps
6	High channel TX_CH39_2Mbps

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- 4. The test software is through engineering commands, EUT can be set to a separate test mode.




Page 9 of 24

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:

EUT	AE

5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Adapter	U312E0A050200	Input: AC 100-240V 50/60Hz, 0.35A Output: DC 5.0V 2A	AE
2	Battery	AGM_H_MAX	DC 3.85V 10000mAh	AE
3	USB Cable	N/A	N/A	AE

5.3. SUMMARY OF TEST RESULTS

FCC RUL	ES	DESCRIPTION OF TEST	RESULT
15.209		Radiated Emission	Compliant



Page 10 of 24

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF RADIATED EMISSION TEST

• F	Radiated Spurio	ous Emission					
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27
	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04
	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23
	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08



Page 11 of 24

7. RADIATED EMISSION


7.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




7.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

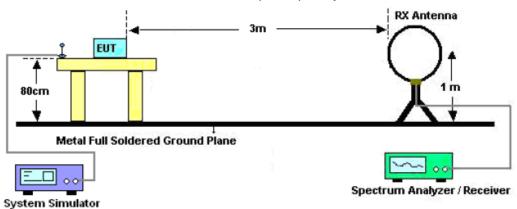

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

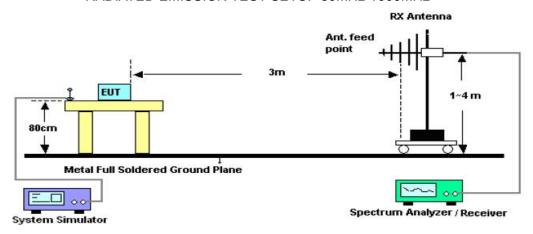

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

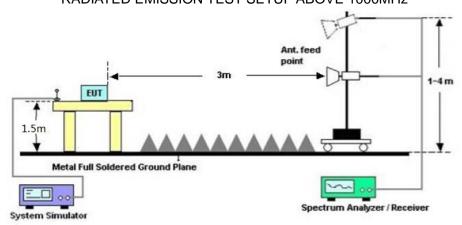

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 13 of 24

7.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed


Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

7.4. TEST RESULT

Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.






Radiated emission from 30MHz to 1000MHz-1Mbps

EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 3	Antenna	Horizontal

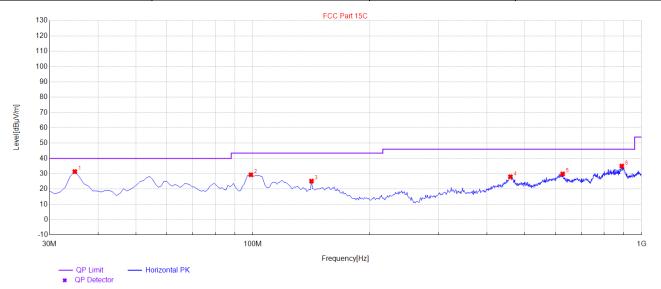


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	34.85	32.01	11.82	40.00	7.99	100	190	Horizontal
2	54.25	28.37	16.35	40.00	11.63	100	180	Horizontal
3	99.84	29.01	17.03	43.50	14.49	100	90	Horizontal
4	141.55	26.47	16.13	43.50	17.03	100	20	Horizontal
5	632.37	30.40	24.14	46.00	15.60	100	110	Horizontal
6	857.41	34.87	29.93	46.00	11.13	100	350	Horizontal

RESULT: PASS





EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 3	Antenna	Vertical

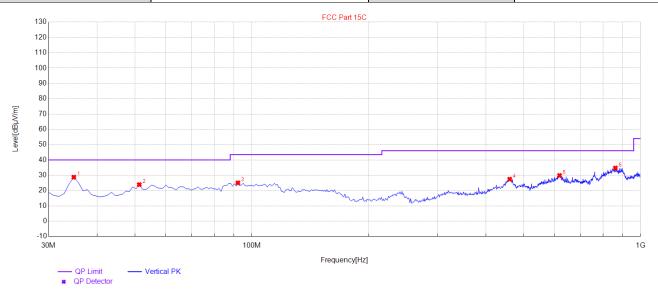


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	34.85	29.15	11.82	40.00	10.85	100	100	Vertical
2	56.19	28.05	16.87	40.00	11.95	100	70	Vertical
3	113.42	26.29	16.23	43.50	17.21	100	180	Vertical
4	463.59	28.39	23.86	46.00	17.61	100	40	Vertical
5	616.85	30.20	25.57	46.00	15.80	100	310	Vertical
6	854.5	35.21	29.83	46.00	10.79	100	300	Vertical

RESULT: PASS

Note:


- 1. Factor=Antenna Factor + Cable loss, Margin= Limit-Measurement.
- 2. All test modes had been tested. The mode 3 is the worst case and recorded in the report.






Radiated emission from 30MHz to 1000MHz-2Mbps

EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 6	Antenna	Horizontal

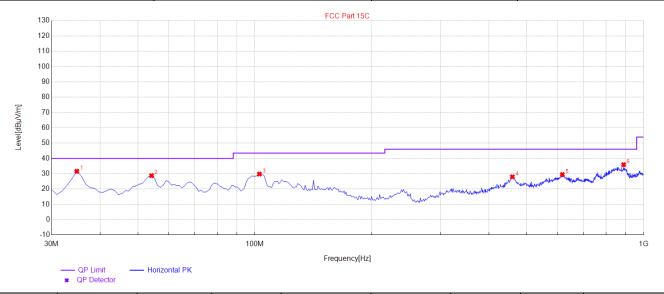


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	34.85	32.36	11.82	40.00	7.64	100	200	Horizontal
2	54.25	25.63	16.35	40.00	14.37	100	70	Horizontal
3	99.84	26.73	17.03	43.50	16.77	100	80	Horizontal
4	456.8	28.84	23.86	46.00	17.16	100	240	Horizontal
5	625.58	30.81	25.12	46.00	15.19	100	120	Horizontal
6	884.57	34.02	29.56	46.00	11.98	100	100	Horizontal

RESULT: PASS





EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 6	Antenna	Vertical

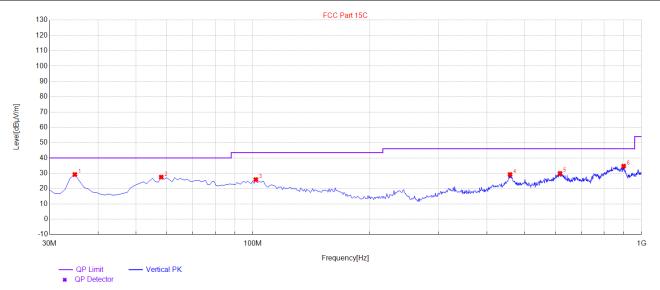

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	34.85	28.62	11.82	40.00	11.38	100	70	Vertical
2	55.22	24.88	16.61	40.00	15.12	100	90	Vertical
3	107.6	31.21	16.67	43.50	12.29	100	100	Vertical
4	463.59	28.18	23.86	46.00	17.82	100	90	Vertical
5	623.64	30.03	25.40	46.00	15.97	100	130	Vertical
6	835.1	33.50	28.87	46.00	12.50	100	270	Vertical

RESULT: PASS Note:

- 1. Factor=Antenna Factor + Cable loss, Margin= Limit-Measurement.
- 2. All test modes had been tested. The mode 6 is the worst case and recorded in the report.



Page 18 of 24

Radiated emission above 1GHz

EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value				
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type				
4804.000	49.51	0.08	49.59	74.00	-24.41	peak				
4804.000	40.55	0.08	40.63	54.00	-13.37	AVG				
7206.000	50.23	2.21	52.44	74.00	-21.56	peak				
7206.000	40.31	2.21	42.52	54.00	-11.48	AVG				
Remark:										
Factor = Ant	Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
4804.000	50.12	0.08	50.2	74.00	-23.80	peak
4804.000	40.36	0.08	40.44	54.00	-13.56	AVG
7206.000	49.85	2.21	52.06	74.00	-21.94	peak
7206.000	39.12	2.21	41.33	54.00	-12.67	AVG
Remark:						

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



Page 19 of 24

EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
4880.000	50.85	0.14	50.99	74.00	-23.01	peak
4880.000	39.74	0.14	39.88	54.00	-14.12	AVG
7320.000	48.96	2.36	51.32	74.00	-22.68	peak
7320.000	41.17	2.36	43.53	54.00	-10.47	AVG
Remark:	-	_				<u> </u>


rtomant.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
4880.000	49.74	0.14	49.88	74.00	-24.12	peak
4880.000	40.51	0.14	40.65	54.00	-13.35	AVG
7320.000	49.78	2.36	52.14	74.00	-21.86	peak
7320.000	38.63	2.36	40.99	54.00	-13.01	AVG

Factor = Antenna Factor + Cable Loss - Pre-amplifier.





EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
4960.000	49.87	0.22	50.09	74.00	-23.91	peak
4960.000	39.99	0.22	40.21	54.00	-13.79	AVG
7440.000	48.87	2.64	51.51	74.00	-22.49	peak
7440.000	38.66	2.64	41.30	54.00	-12.70	AVG
Remark:						
Factor - Antenna Factor + Cable Loss - Pre-amplifier						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре	
4960.000	50.17	0.22	50.39	74.00	-23.61	peak	
4960.000	40.35	0.22	40.57	54.00	-13.43	AVG	
7440.000	49.77	2.64	52.41	74.00	-21.59	peak	
7440.000	39.12	2.64	41.76	54.00	-12.24	AVG	
Remark:							
Factor = Ant	Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Page 21 of 24

Radiated emission above 1GHz

EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 4	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
4804.000	49.74	0.08	49.82	74.00	-24.18	peak
4804.000	40.39	0.08	40.47	54.00	-13.53	AVG
7206.000	48.79	2.21	51	74.00	-23.00	peak
7206.000	40.55	2.21	42.76	54.00	-11.24	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 4	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
4804.000	50.14	0.08	50.22	74.00	-23.78	peak
4804.000	39.89	0.08	39.97	54.00	-14.03	AVG
7206.000	49.36	2.21	51.57	74.00	-22.43	peak
7206.000	38.21	2.21	40.42	54.00	-13.58	AVG
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Page 22 of 24

EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 5	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
4880.000	49.33	0.14	49.47	74.00	-24.53	peak
4880.000	41.12	0.14	41.26	54.00	-12.74	AVG
7320.000	48.89	2.36	51.25	74.00	-22.75	peak
7320.000	39.31	2.36	41.67	54.00	-12.33	AVG
Remark:	-					<u> </u>

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 5	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
4880.000	49.31	0.14	49.45	74.00	-24.55	peak
4880.000	40.87	0.14	41.01	54.00	-12.99	AVG
7320.000	49.12	2.36	51.48	74.00	-22.52	peak
7320.000	40.11	2.36	42.47	54.00	-11.53	AVG
Remark:			_			

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



Page 23 of 24

EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 6	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
4960.000	49.17	0.22	49.39	74.00	-24.61	peak
4960.000	41.36	0.22	41.58	54.00	-12.42	AVG
7440.000	48.96	2.64	51.60	74.00	-22.40	peak
7440.000	40.21	2.64	42.85	54.00	-11.15	AVG
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	4G Smart Phone	Model Name	AGM_H_MAX
Temperature	25° C	Relative Humidity 55.4%	
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 6	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type		
4960.000	49.33	0.22	49.55	74.00	-24.45	peak		
4960.000	40.85	0.22	41.07	54.00	-12.93	AVG		
7440.000	49.31	2.64	51.95	74.00	-22.05	peak		
7440.000	39.17	2.64	41.81	54.00	-12.19	AVG		
Remark:								
Factor = Ant	Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 40 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



Page 24 of 24

APPENDIX I: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC00408230802AP01A

APPENDIX II: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC00408230802AP02A

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.