

FCC Test Report

Report No.: AGC00408240102FR04

FCC ID : 2A3DR-AGMP2

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: 4G smart PAD, Tablet

BRAND NAME : AGM

MODEL NAME : AGM_PAD_P2, AGM_PAD_P2W

APPLICANT : AGM MOBILE LIMITED

DATE OF ISSUE : Mar. 01, 2024

STANDARD(S) : FCC Part 15 Subpart E §15.407

REPORT VERSION: V1.0

Attestation of Global Conciliance (Shenzhen) Co., Ltd



Page 2 of 119


Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Mar. 01, 2024	Valid	Initial Release




Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Table of Carrier Frequency	7
2.3 IEEE 802.11n Modulation Scheme	8
2.5 Related Submittal(S) / Grant (S)	g
2.6 Test Methodology	g
2.7 Special Accessories	g
2.8 Equipment Modifications	9
2.9 Antenna Requirement	9
2.11 Description of Test Software	10
3. Test Environment	11
3.1 Address of The Test Laboratory	11
3.2 Test Facility	11
3.3 Environmental Conditions	12
3.4 Measurement Uncertainty	12
3.5 List of Equipment Used	13
4.System Test Configuration	15
4.1 EUT Configuration	15
4.2 EUT Exercise	15
4.3 Configuration of Tested System	15
4.4 Equipment Used in Tested System	15
4.5 Summary of Test Results	16
5. Description of Test Modes	17
6. Duty Cycle Measurement	20
7. RF Output Power Measurement	23
7.1 Provisions Applicable	23
7.2 Measurement Procedure	23
7.3 Measurement Setup (Block Diagram of Configuration)	24
7.4 Measurement Result	24
8. 6dB&26dB Bandwidth Measurement	26
8.1 Provisions Applicable	26
8.2 Measurement Procedure	26
8.3 Measurement Setup (Block Diagram of Configuration)	26
8.4 Measurement Results	27





9. Power Spectral Density Measurement	50
9.1 Provisions Applicable	50
9.2 Measurement Procedure	50
9.3 Measurement Setup (Block Diagram of Configuration)	50
9.4 Measurement Result	51
10. Conducted Band Edge and Out-of-Band Emissions	67
10.1 Provisions Applicable	67
10.2 Measurement Procedure	67
10.3 Measurement Setup (Block Diagram of Configuration)	67
10.4 Measurement Results	68
11. Radiated Spurious Emission	88
11.1 Measurement Limit	88
11.2 Measurement Procedure	89
11.3 Measurement Setup (Block Diagram of Configuration)	91
11.4 Measurement Result	92
12. AC Power Line Conducted Emission Test	115
12.1 Measurement limit	115
12.2 Block Diagram of Line Conducted Emission Test	115
12.3 Preliminary Procedure of Line Conducted Emission Test	116
12.4 Final Procedure of Line Conducted Emission Test	116
12.5 Test Result of Line Conducted Emission Test	117
Appendix I: Photographs of Test Setup	119
Appendix II: Photographs of EUT	119





1. General Information

Address FLAT/RM 2253 22/F HOI TAI FACTORY ESTATE TSING YEUNG CIRCUIT TUE MUN NT HONG KONG, CHINA Guangdong Aijiemo Electronic Industry Co., Ltd Address AGM Technology Park, No. 187 Lianfa Road, Tongqiao Town, Zhongkai High-tec District, Huizhou City, Guangdong, China Factory Guangdong Aijiemo Electronic Industry Co., Ltd Address AGM Technology Park, No. 187 Lianfa Road, Tongqiao Town, Zhongkai High-tec District, Huizhou City, Guangdong, China Product Designation 4G smart PAD, Tablet Brand Name AGM Test Model AGM_PAD_P2 Series Model(s) AGM_PAD_P2W In addition to the different model names between the main test and the series, there are also different headphone plate layouts, and corresponding antenna types and gains. There are no differences in the other PCB layouts and RF parameters. Date of receipt of test item Jan. 22, 2024 Deviation from Standard No any deviation from the test method				
Address MUN NT HONG KONG, CHINA Guangdong Aijiemo Electronic Industry Co., Ltd Address AGM Technology Park, No. 187 Lianfa Road, Tongqiao Town, Zhongkai High-tec District, Huizhou City, Guangdong, China Factory Guangdong Aijiemo Electronic Industry Co., Ltd Address AGM Technology Park, No. 187 Lianfa Road, Tongqiao Town, Zhongkai High-tec District, Huizhou City, Guangdong, China Product Designation Brand Name AGM Test Model AGM_PAD_P2 Series Model(s) AGM_PAD_P2W In addition to the different model names between the main test and the series, there are also different headphone plate layouts, and corresponding antenna types and gains. There are no differences in the other PCB layouts and RF parameters. Date of receipt of test item Jan. 22, 2024 Deviation from Standard No any deviation from the test method Condition of Test Sample Normal Test Result Pass	Applicant	AGM MOBILE LIMITED		
Mun NT Hong Kong, CHINA Guangdong Aijiemo Electronic Industry Co., Ltd Address AGM Technology Park, No. 187 Lianfa Road, Tongqiao Town, Zhongkai High-tec District, Huizhou City, Guangdong, China Factory Guangdong Aijiemo Electronic Industry Co., Ltd AGM Technology Park, No. 187 Lianfa Road, Tongqiao Town, Zhongkai High-tec District, Huizhou City, Guangdong, China Product Designation 4G smart PAD, Tablet Brand Name AGM Test Model AGM_PAD_P2 Series Model(s) AGM_PAD_P2W In addition to the different model names between the main test and the series, there are also different headphone plate layouts, and corresponding antenna types and gains. There are no differences in the other PCB layouts and RF parameters. Date of receipt of test item Jan. 22, 2024 Deviation from Standard No any deviation from the test method Test Result Pass	Address	FLAT/RM 2253 22/F HOI TAI FACTORY ESTATE TSING YEUNG CIRCUIT TUEN		
Address AGM Technology Park, No. 187 Lianfa Road, Tongqiao Town, Zhongkai High-tec District, Huizhou City, Guangdong, China Factory Guangdong Aijiemo Electronic Industry Co., Ltd Address AGM Technology Park, No. 187 Lianfa Road, Tongqiao Town, Zhongkai High-tec District, Huizhou City, Guangdong, China Product Designation 4G smart PAD, Tablet Brand Name AGM Test Model AGM_PAD_P2 Series Model(s) AGM_PAD_P2W In addition to the different model names between the main test and the series, there are also different headphone plate layouts, and corresponding antenna types and gains. There are no differences in the other PCB layouts and RF parameters. Date of receipt of test item Jan. 22, 2024 Date of Test Jan. 22, 2024~Feb. 27, 2024 Deviation from Standard Normal Test Result Pass	Addiess	MUN NT HONG KONG, CHINA		
District, Huizhou City, Guangdong, China Factory Guangdong Aijiemo Electronic Industry Co., Ltd Address AGM Technology Park, No. 187 Lianfa Road, Tongqiao Town, Zhongkai High-tec District, Huizhou City, Guangdong, China Product Designation 4G smart PAD, Tablet Brand Name AGM Test Model AGM_PAD_P2 Series Model(s) AGM_PAD_P2W In addition to the different model names between the main test and the series, there are also different headphone plate layouts, and corresponding antenna types and gains. There are no differences in the other PCB layouts and RF parameters. Date of receipt of test item Jan. 22, 2024 Date of Test Jan. 22, 2024 No any deviation from the test method Normal Test Result Pass	Manufacturer	Guangdong Aijiemo Electronic Industry Co., Ltd		
District, Huizhou City, Guangdong, China Factory Guangdong Aijiemo Electronic Industry Co., Ltd Address AGM Technology Park, No. 187 Lianfa Road, Tongqiao Town, Zhongkai High-tec District, Huizhou City, Guangdong, China Product Designation Germand Name AGM Test Model AGM_PAD_P2 Series Model(s) AGM_PAD_P2W In addition to the different model names between the main test and the series, there are also different headphone plate layouts, and corresponding antenna types and gains. There are no differences in the other PCB layouts and RF parameters. Date of receipt of test item Jan. 22, 2024 Deviation from Standard No any deviation from the test method Condition of Test Sample Test Result Pass	Addross	AGM Technology Park, No. 187 Lianfa Road, Tongqiao Town, Zhongkai High-tech		
Address AGM Technology Park, No. 187 Lianfa Road, Tongqiao Town, Zhongkai High-technology Park, No. 187 Lianfa Road, Tongqiao Town, Zhongkai High-technology Polistrict, Huizhou City, Guangdong, China Product Designation 4G smart PAD, Tablet Brand Name AGM Test Model AGM_PAD_P2 Series Model(s) AGM_PAD_P2W In addition to the different model names between the main test and the series, there are also different headphone plate layouts, and corresponding antenna types and gains. There are no differences in the other PCB layouts and RF parameters. Date of receipt of test item Date of Test Jan. 22, 2024 Deviation from Standard No any deviation from the test method Condition of Test Sample Normal Test Result Pass	Address	District, Huizhou City, Guangdong, China		
District, Huizhou City, Guangdong, China Product Designation Brand Name AGM Test Model AGM_PAD_P2 Series Model(s) AGM_PAD_P2W In addition to the different model names between the main test and the series, there are also different headphone plate layouts, and corresponding antenna types and gains. There are no differences in the other PCB layouts and RF parameters. Date of receipt of test item Date of Test Date of Test Jan. 22, 2024 Deviation from Standard No any deviation from the test method Condition of Test Sample Normal Test Result Pass	Factory	Guangdong Aijiemo Electronic Industry Co., Ltd		
District, Huizhou City, Guangdong, China Product Designation 4G smart PAD, Tablet Brand Name AGM Test Model AGM_PAD_P2 Series Model(s) AGM_PAD_P2W In addition to the different model names between the main test and the series, there are also different headphone plate layouts, and corresponding antenna types and gains. There are no differences in the other PCB layouts and RF parameters. Date of receipt of test item Jan. 22, 2024 Deviation from Standard No any deviation from the test method Condition of Test Sample Normal Test Result Pass	Addross	AGM Technology Park, No. 187 Lianfa Road, Tongqiao Town, Zhongkai High-tech		
Brand Name AGM Test Model Series Model(s) AGM_PAD_P2 In addition to the different model names between the main test and the series, there are also different headphone plate layouts, and corresponding antenna types and gains. There are no differences in the other PCB layouts and RF parameters. Date of receipt of test item Date of Test Jan. 22, 2024 Deviation from Standard No any deviation from the test method Condition of Test Sample Test Result Pass	Address	District, Huizhou City, Guangdong, China		
Test Model Series Model(s) AGM_PAD_P2 In addition to the different model names between the main test and the series, there are also different headphone plate layouts, and corresponding antenna types and gains. There are no differences in the other PCB layouts and RF parameters. Date of receipt of test item Date of Test Dan. 22, 2024 Date of Test Deviation from Standard Condition of Test Sample Normal Test Result Pass	Product Designation	4G smart PAD, Tablet		
Series Model(s) AGM_PAD_P2W In addition to the different model names between the main test and the series, there are also different headphone plate layouts, and corresponding antenna types and gains. There are no differences in the other PCB layouts and RF parameters. Date of receipt of test item Date of Test Jan. 22, 2024 Deviation from Standard No any deviation from the test method Condition of Test Sample Test Result Pass	Brand Name	AGM		
Difference Description In addition to the different model names between the main test and the series, there are also different headphone plate layouts, and corresponding antenna types and gains. There are no differences in the other PCB layouts and RF parameters. Date of receipt of test item Dan. 22, 2024 Date of Test Deviation from Standard No any deviation from the test method Condition of Test Sample Normal Test Result Pass	Test Model	AGM_PAD_P2		
there are also different headphone plate layouts, and corresponding antenna types and gains. There are no differences in the other PCB layouts and RF parameters. Date of receipt of test item Jan. 22, 2024 Date of Test Jan. 22, 2024~Feb. 27, 2024 Deviation from Standard No any deviation from the test method Condition of Test Sample Normal Test Result Pass	Series Model(s)	AGM_PAD_P2W		
types and gains. There are no differences in the other PCB layouts and RF parameters. Date of receipt of test item Jan. 22, 2024 Date of Test Jan. 22, 2024~Feb. 27, 2024 Deviation from Standard No any deviation from the test method Condition of Test Sample Normal Test Result Pass		In addition to the different model names between the main test and the series,		
types and gains. There are no differences in the other PCB layouts and RF parameters. Date of receipt of test item Jan. 22, 2024 Date of Test Jan. 22, 2024~Feb. 27, 2024 Deviation from Standard No any deviation from the test method Condition of Test Sample Normal Test Result Pass	Difference Description	there are also different headphone plate layouts, and corresponding antenna		
Date of receipt of test item Jan. 22, 2024 Date of Test Jan. 22, 2024~Feb. 27, 2024 Deviation from Standard No any deviation from the test method Condition of Test Sample Normal Test Result Pass	Dillerence Description	types and gains. There are no differences in the other PCB layouts and RF		
Date of Test Jan. 22, 2024~Feb. 27, 2024 Deviation from Standard No any deviation from the test method Condition of Test Sample Normal Test Result Pass		parameters.		
Deviation from Standard No any deviation from the test method Condition of Test Sample Normal Test Result Pass	Date of receipt of test item	Jan. 22, 2024		
Condition of Test Sample Normal Test Result Pass	Date of Test	Jan. 22, 2024~Feb. 27, 2024		
Test Result Pass	Deviation from Standard	No any deviation from the test method		
	Condition of Test Sample	Normal		
Test Report Form No AGCER-FCC-5G WLAN-V1	Test Result	Pass		
	Test Report Form No	AGCER-FCC-5G WLAN-V1		

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Bibo Zhang	
	Bibo Zhang (Project Engineer)	Mar. 01, 2024
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Mar. 01, 2024
Approved By	Max Zhang	
	Max Zhang Authorized Officer	Mar. 01, 2024



Report No.: AGC00408240102FR04 Page 6 of 119

2. Product Information

2.1 Product Technical Description

Equipment Type	☐ Outdoor access points☐ Fixed P2P access points☐ Client devices		
Operation Frequency	 □ U-NII 1:5150MHz~5250MHz □ U-NII 2A: 5250MHz~5350MHz □ U-NII 3: 5725MHz~5850MHz 		
DFS Design Type	☐ Master ☐ Slave with radar detection ☐ Slave without radar detection		
TPC Function	☐ Yes ☐ No		
Hardware Version	V1.0		
Software Version	M193_P9901_V1		
Test Frequency Range	For 802.11a/n-HT20/ac-VHT20: 5180~5240MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40: 5190~5230MHz, 5755~5795MHz For 802.11ac-VHT80: 5210MHz		
RF Output Power	IEEE 802.11a(HT20): 10.35dBm; IEEE 802.11n(HT20):10.39dBm; IEEE802.11n(HT40): 10.60dBm; IEEE 802.11ac(VHT20): 10.46dBm; IEEE802.11ac(VHT40): 10.53dBm; IEEE802.11ac(VHT80): 8.85dBm;		
Modulation	802.11a/n:(64-QAM, 16-QAM, QPSK, BPSK) OFDM 802.11ac :(256-QAM, 64-QAM, 16-QAM, QPSK, BPSK) OFDM		
Data Rate	802.11a:6/9/12/18/24/36/48/54Mbps; 802.11n:up to 300Mbps; 802.11ac:up to 866.6Mbps;		
Number of channels	7 channels of U-NII-1 Band 7 channels of U-NII-2A Band 12 channels of U-NII-2C Band 8 channels of U-NII 3 Band		
Antenna Designation	Internal Antenna		
Antenna Gain	AGM_PAD_P2:1.83dBi AGM_PAD_P2W:7.08dBi		
Power Supply	DC 3.85V by battery		



Page 7 of 119

2.2 Table of Carrier Frequency

For 5180~5240MHz:

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency	Channel	Frequency
42	5210 MHz		

For 5745~5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency	Channel	Frequency
155	5775 MHz		



Page 8 of 119

2.3 IEEE 802.11n Modulation Scheme

MCS Index	Nss	Modulation	R	N _{BPSC}	N _{CBPS} N _{DBPS}		N _{DBPS}		(Mt	rate ops) nsGI
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval



Page 9 of 119

2.5 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for **FCC ID: 2A3DR-AGMP2** filing to comply with the FCC Part 15 requirements.

2.6 Test Methodology

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 789033	789033 D02 General U-NII Test Procedures New Rules v02r01

2.7 Special Accessories

Refer to section 4.4.

2.8 Equipment Modifications

Not available for this EUT intended for grant.

2.9 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain is 1.83dBi(AGM_PAD_P2) and 7.08dBi(AGM_PAD_P2W)



Page 10 of 119

2.11 Description of Test Software

For IEEE 802.11 mode:

The test software is through engineering commands. EUT can be set to a separate test mode.

		•
Test Mode	Channel	Power Index
802.11a	L/M/H	19
802.11n(HT20)	L/M/H	18
802.11n(HT40)	L/M/H	17
802.11ac(VHT20)	L/M/H	16
802.11ac(VHT40)	L/M/H	16
802.11ac(VHT80)	L/M/H	15



Page 11 of 119

3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 12 of 119


3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20% - 75%
Pressure range (kPa)	86 - 106
Power supply	DC 3.85V

3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2.7 \%$
	_






3.5 List of Equipment Used

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31	
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2023-02-03	2024-02-02	
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31	
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2023-02-03	2024-02-02	
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31	
\boxtimes	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2023-06-01	2024-05-31	
\boxtimes	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17	
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-07	2024-03-06	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2025-03-22	
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
\boxtimes	AGC-EM-A118	5G Filter	SongYi	BRM50716	N/A	2023-06-01	2024-05-31	
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	





A	AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02	
\boxtimes	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024-06-02	
\boxtimes	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2024-06-08	

Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information		
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71		
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A		
\boxtimes	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6		
	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0		



Page 15 of 119

4. System Test Configuration


4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

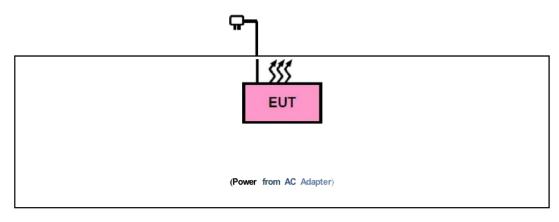

4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Adapter	FX202E	HUNAN GAOYUAN BATTERY CO.,LTD	Input: AC 100-240V 50/60Hz, 0.7A DC: 5V3A 9V2.22A 12V1.67A	
2	Battery	AGM_PAD_P2	SHENZHEN Fangxin Technology Co. ,Ltd	DC 3.85V 8000mAh	
3	USB Cable	N/A	N/A	N/A	1.2m unshielded



Page 16 of 119

4.5 Summary of Test Results

Item	FCC Rules	Description Of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.407(a/1/3)	RF Output Power	Pass
3	§15.407(e)	6dB Bandwidth Measurement	Pass
4	§15.403(i)	26dB bandwidth Measurement	Pass
5	515.407(g)	Frequency Stability	Pass (See Note 1)
6	515.407(C)	Transmission Discontinuation Requirement	Pass (See Note 2)
7	§15.407(a/1/3)	Power Spectral Density	Pass
8	§15.407(b)(1/4)	Conducted Spurious Emission	Pass
9	§15.209,§15.407(b)(1/4)	Radiated Emission& Band Edge	Pass
10	§15.207	AC Power Line Conducted Emission	Pass

Note:

- The manufacturer has corresponding claims in the operating description and user manual that it meets the e specified frequency range requirements.
- 2. The device operates without the transmission of information.



Page 17 of 119

5. Description of Test Modes

EUT Configure Mode		Applic	cable To		Description
201 Comigare Mode	RE > 1G	RE < 1G	·		Bookinplion
А	\boxtimes	\boxtimes	\boxtimes		Powered by Adapter with WIFI(5G) Link
В	\boxtimes	\boxtimes		\boxtimes	Powered by Battery with WIFI(5G) Link
С					Powered by USB with WIFI(5G) Link

Where. RE > 1G: Radiated Emission above 1GHz PLC: Power Line Conducted Emission

NOTE 1: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane.

NOTE 2: "--"means no effect.

• Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (IF EUT with antenna diversity architecture).

The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
Α	802.11n (20MHz)	5180-5240	36 to 48	36, 40, 48	OFDM	6.5
А	802.11n (20MHz)	5745-5825	149 to 165	149, 157, 165	OFDM	6.5



Page 18 of 119

Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).

The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
В	802.11n(20MHz)	5180-5240	36 to 48	36	OFDM	6.5

Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).

☐ The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

☐ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
Α	802.11n(20MHz)	5180-5240	36 to 48	36	OFDM	6.5

Band edge Measurement:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).

The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
Α	802.11n (20MHz)		36 to 48	36	OFDM	6.5
Α	802.11n (40MHz)	5180-5240	38 to 46	38	OFDM	13.5
Α	802.11ac (80MHz)		42	42	OFDM	29.3
Α	802.11n (20MHz)		149 to 165	149	OFDM	6.5
Α	802.11n (40MHz)	5745-5825	151 to 159	151	OFDM	13.5
Α	802.11ac (80MHz)		155	155	OFDM	29.3



Page 19 of 119

• Antenna Port Conducted Measurement:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
В	802.11a		36 to 48	36, 40, 48	OFDM	6.0
В	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	6.5
В	802.11n (40MHz)	5180-5240	38 to 46	38, 46	OFDM	13.5
В	802.11ac (20MHz)	3100-3240	36 to 48	36, 40, 48	OFDM	6.5
В	802.11ac (40MHz)		38 to 46	38, 46	OFDM	13.5
В	802.11ac (80MHz)		42	42	OFDM	29.3
В	802.11a		149 to 165	149, 157, 165	OFDM	6.0
В	802.11n (20MHz)		149 to 165	149, 157, 165	OFDM	6.5
В	802.11n (40MHz)	5745-5825	151 to 159	151, 159	OFDM	13.5
В	802.11ac (20MHz)	0140-0020	149 to 165	149, 157, 165	OFDM	6.5
В	802.11ac (40MHz)		151 to 159	151, 159	OFDM	13.5
В	802.11ac (80MHz)		155	155	OFDM	29.3



Page 20 of 119


6. Duty Cycle Measurement

5GHz WLAN (NII) operation is possible in 20MHz, 40MHz and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	Data rates (Mbps)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	Average Factor (dB)			
	Band U-NII1:5150MHz-5250MHz							
802.11a	6	97	0.13	0.72	-0.26			
802.11n_HT20	MCS0	97	0.13	0.76	-0.26			
802.11n_HT40	MCS0	95	0.22	1.56	-0.45			
802.11ac_VHT20	MCS0	96	0.18	0.76	-0.35			
802.11ac_VHT40	MCS0	94	0.27	1.53	-0.54			
802.11ac_VHT80	MCS0	90	0.46	3.10	-0.92			
	Ва	and U-NII 3:5745	MHz-5825MHz					
802.11a	6	97	0.13	0.72	-0.26			
802.11n_HT20	MCS0	97	0.13	0.77	-0.26			
802.11n_HT40	MCS0	95	0.22	1.53	-0.45			
802.11ac_VHT20	MCS0	97	0.13	0.76	-0.26			
802.11ac_VHT40	MCS0	95	0.22	1.53	-0.45			
802.11ac_VHT80	MCS0	90	0.46	3.10	-0.92			


Remark:


- 1. Duty Cycle factor = 10 * log (1/ Duty cycle), Average factor = 20 log10 Duty Cycle
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value.
- 3. Involving the test items of duty cycle compensation coefficient, the final results have been added and calculated by the software and presented.






The test plots as follows:

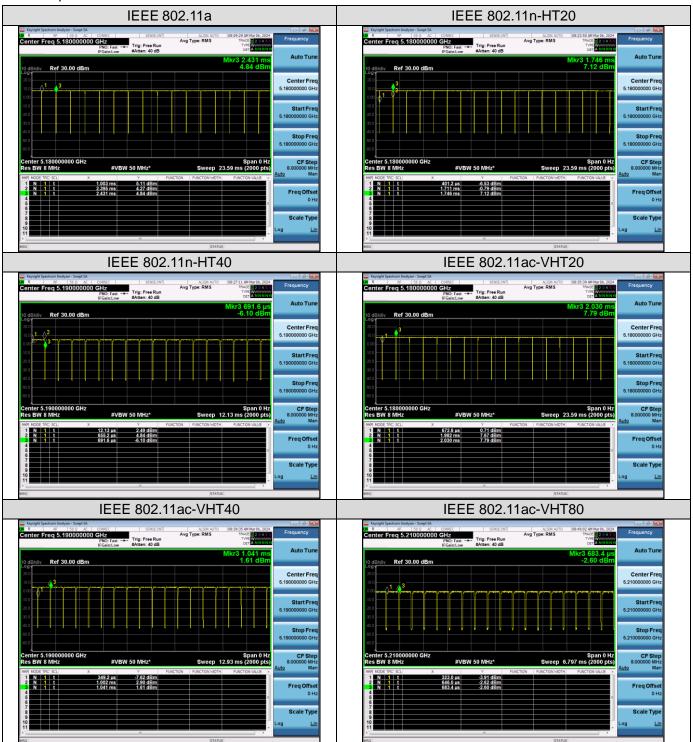





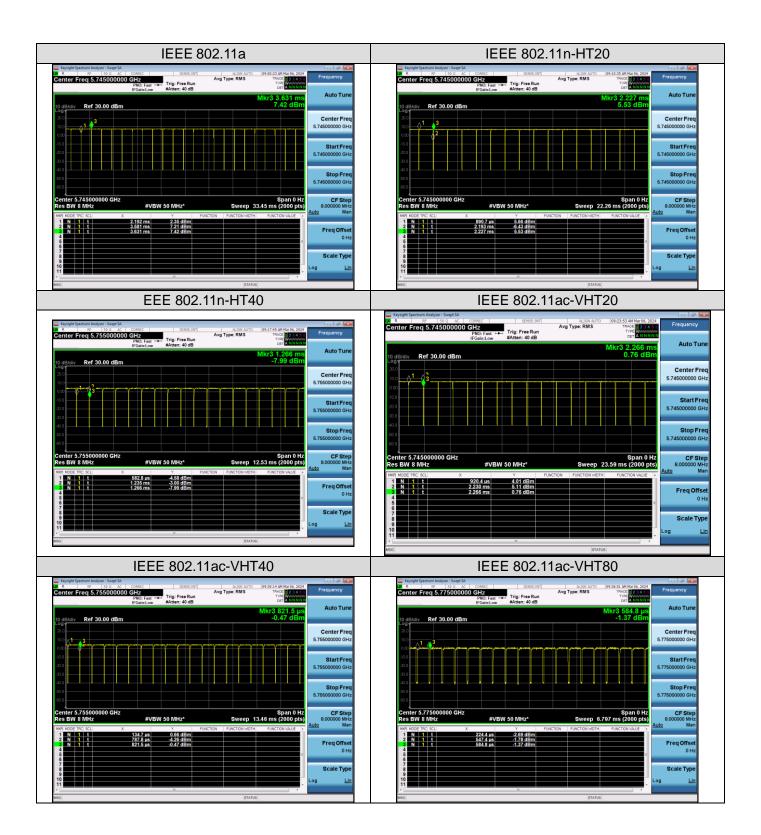



Page 23 of 119

7. RF Output Power Measurement

7.1 Provisions Applicable

Operation Band		EUT Category	LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p < 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
J		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
	\boxtimes	Client devices	250mW (23.98 dBm)
U-NII-2A		/	250mW (23.98 dBm) or 11 dBm+10 log B*
U-NII-2C		/	250mW (23.98 dBm) or 11 dBm+10 log B*
U-NII-3		/	1 Watt (30 dBm)

Note: Where B is the 26dB emission bandwidth in MHz.


7.2 Measurement Procedure

Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 12.3.3.1
- 2. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
- 3. The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 4. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 5. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 6. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 7. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- 8. Adjust the measurement in dBm by adding [10 log (1 / D)], where D is the duty cycle {e.g., [10 log (1 / 0.25)], if the duty cycle is 25%}.
- 9. Record the test results in the report.




7.3 Measurement Setup (Block Diagram of Configuration)

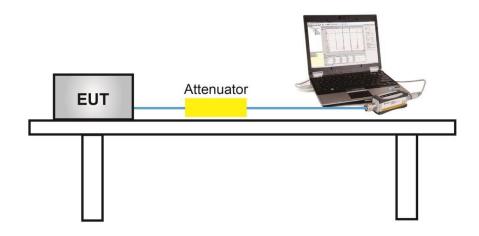

7.4 Measurement Result

	Test Data of Conducted Output Power for band 5.15-5.25 GHz							
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail				
	5180	10.12	23.98	Pass				
802.11a	5200	9.81	23.98	Pass				
	5240	10.35	23.98	Pass				
	5180	10.39	23.98	Pass				
802.11n20	5200	9.86	23.98	Pass				
	5240	9.51	23.98	Pass				
802.11n40	5190	10.60	23.98	Pass				
002.111140	5230	9.90	23.98	Pass				
	5180	10.46	23.98	Pass				
802.11ac20	5200	9.84	23.98	Pass				
	5240	9.70	23.98	Pass				
802.11ac40	5190	10.14	23.98	Pass				
602.11ac40	5230	10.53	23.98	Pass				
802.11ac80	5210	8.85	23.98	Pass				





	Test Data of Conducted Output Power for band 5.725-5.850 GHz							
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail				
	5745	10.00	30	Pass				
802.11a	5785	9.50	30	Pass				
	5825	10.09	30	Pass				
	5745	9.36	30	Pass				
802.11n20	5785	9.57	30	Pass				
	5825	9.90	30	Pass				
802.11n40	5755	9.70	30	Pass				
602.111140	5795	9.73	30	Pass				
	5745	9.33	30	Pass				
802.11ac20	5785	9.58	30	Pass				
	5825	9.88	30	Pass				
902 11 0010	5755	9.74	30	Pass				
802.11ac40	5795	9.66	30	Pass				
802.11ac80	5775	10.05	30	Pass				





8. 6dB&26dB Bandwidth Measurement

8.1 Provisions Applicable

The minimum 6dB bandwidth shall be at least 500 kHz.

8.2 Measurement Procedure

◆ -6dB bandwidth (DTS bandwidth) Test setting:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on operation frequency individually.
- 3. Set RBW = 100kHz.
- 4. Set the VBW $\geq 3*RBW$. Detector = Peak. Trace mode = max hold.
- 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.

♦ 99% occupied bandwidth test setting:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 1.5 to 5 times the OBW, centered on a nominal channel
 The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

◆ -26dB Bandwidth test setting:

- 1. Set RBW = approximately 1% of the emission bandwidth.
- 2. Set the VBW > RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Note: The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

8.3 Measurement Setup (Block Diagram of Configuration)

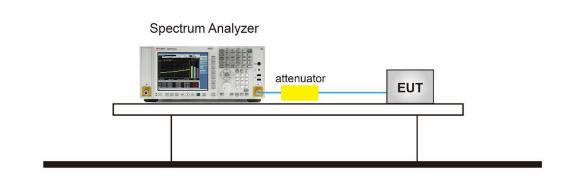




Page 27 of 119


8.4 Measurement Results

Test	Data of Occupied I	Bandwidth and -26d	IB Bandwidth for ba	nd 5.15-5.2	5 GHz
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-26dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
	5180	16.493	21.612	N/A	Pass
802.11a	5200	16.461	21.025	N/A	Pass
	5240	16.538	21.649	N/A	Pass
	5180	17.626	23.207	N/A	Pass
802.11n20	5200	17.589	20.655	N/A	Pass
	5240	17.563	19.920	N/A	Pass
802.11n40	5190	36.060	50.344	N/A	Pass
002.111140	5230	35.986	46.036	N/A	Pass
	5180	17.609	21.439	N/A	Pass
802.11ac20	5200	17.553	20.434	N/A	Pass
	5240	17.581	20.420	N/A	Pass
802.11ac40	5190	35.951	44.964	N/A	Pass
002.11a040	5230	36.003	50.696	N/A	Pass
802.11ac80	5210	75.970	114.148	N/A	Pass







Tes	t Data of Occupied	Bandwidth and DT	S Bandwidth for bar	d 5.725-5.8	35 GHz
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	Limits (MHz)	Pass or Fail
	5745	16.437	15.034	0.5	Pass
802.11a	5785	16.468	14.177	0.5	Pass
	5825	16.451	15.030	0.5	Pass
	5745	17.541	14.989	0.5	Pass
802.11n20	5785	17.516	13.133	0.5	Pass
	5825	17.546	15.058	0.5	Pass
000 11 = 10	5755	35.910	34.996	0.5	Pass
802.11n40	5795	35.935	35.041	0.5	Pass
	5745	17.541	15.107	0.5	Pass
802.11ac20	5785	17.535	15.093	0.5	Pass
	5825	17.545	15.106	0.5	Pass
902 110010	5755	35.900	33.849	0.5	Pass
802.11ac40	5795	35.925	35.095	0.5	Pass
802.11ac80	5775	75.828	76.248	0.5	Pass







Test Graphs of Occupied Bandwidth and -26dB Bandwidth for band 5.15-5.25 GHz

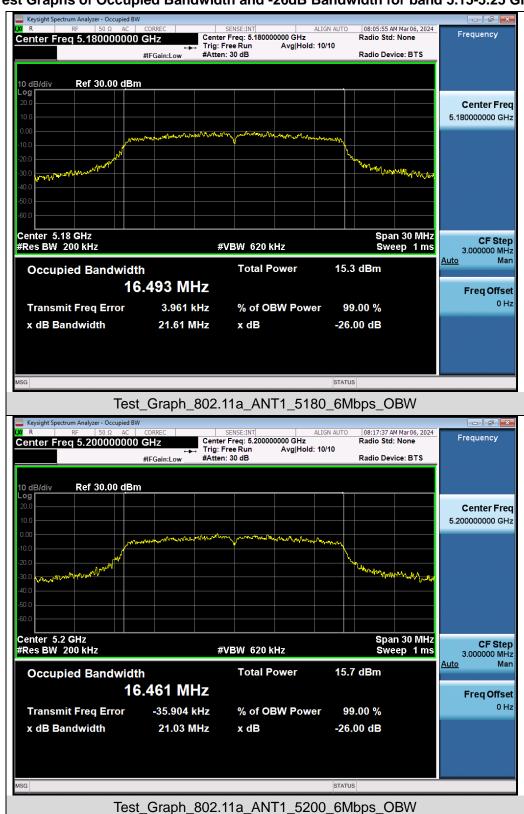







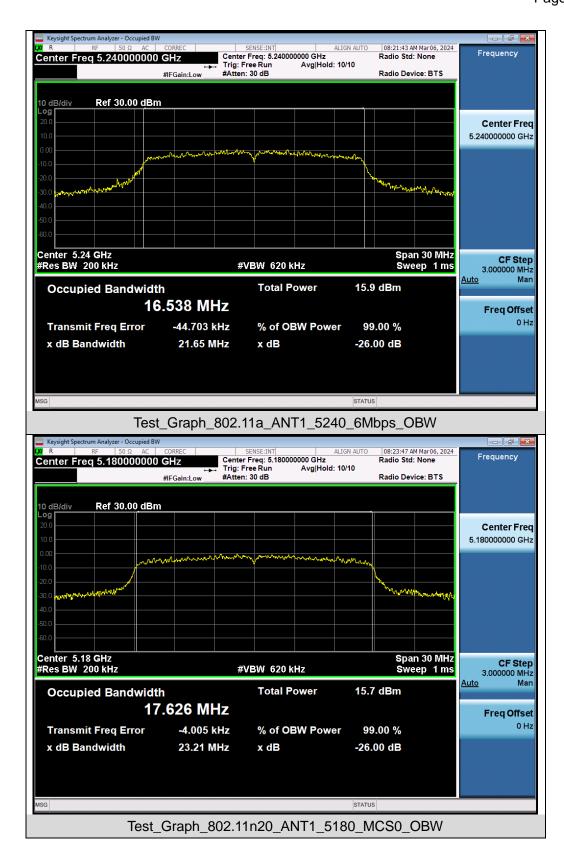







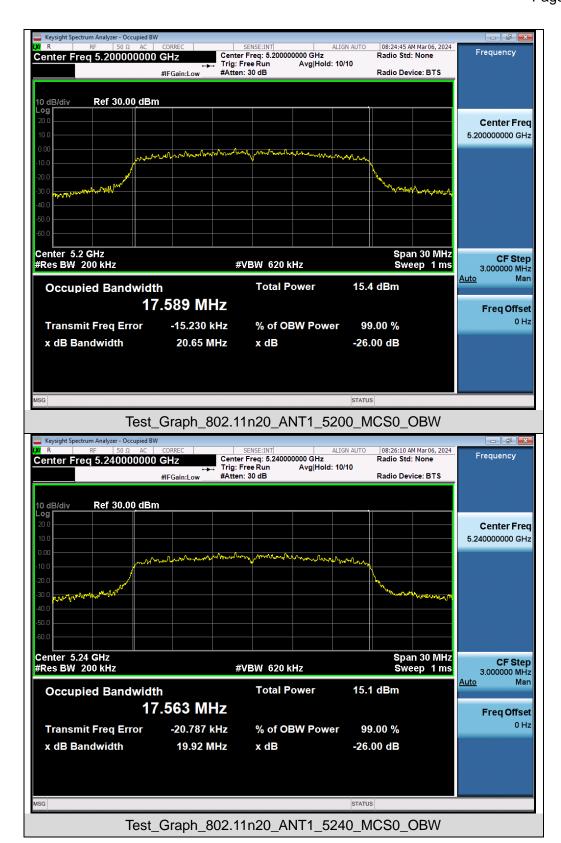







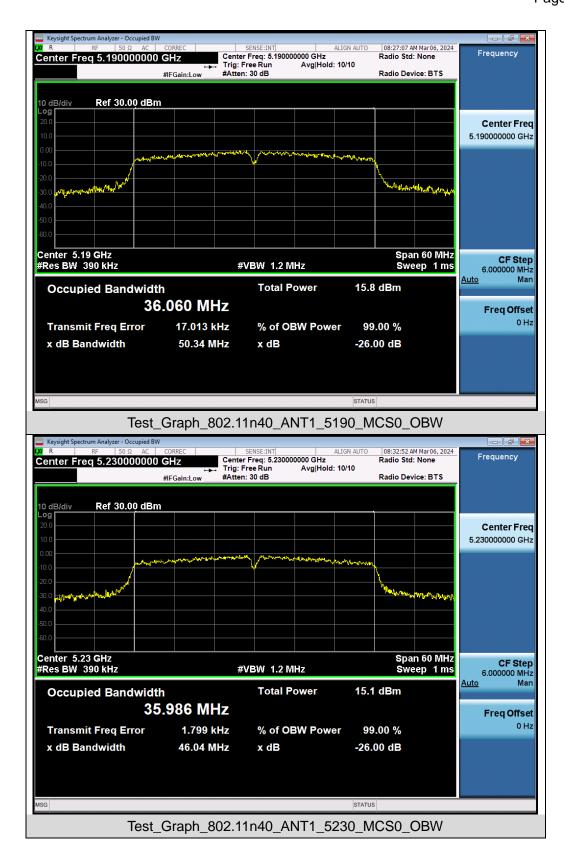







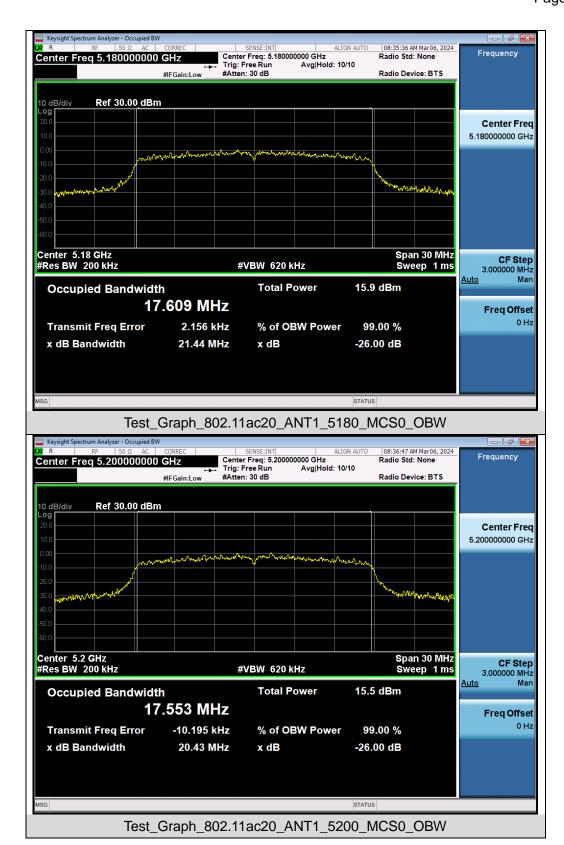







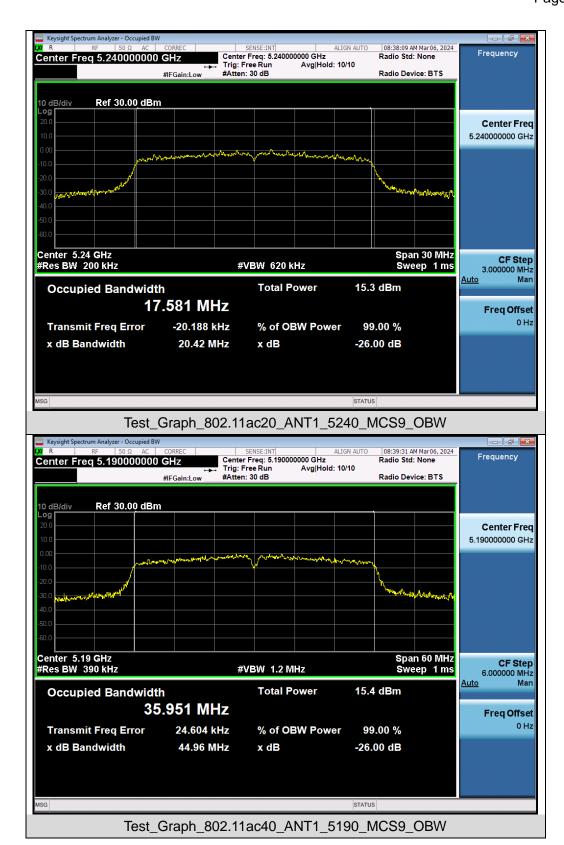






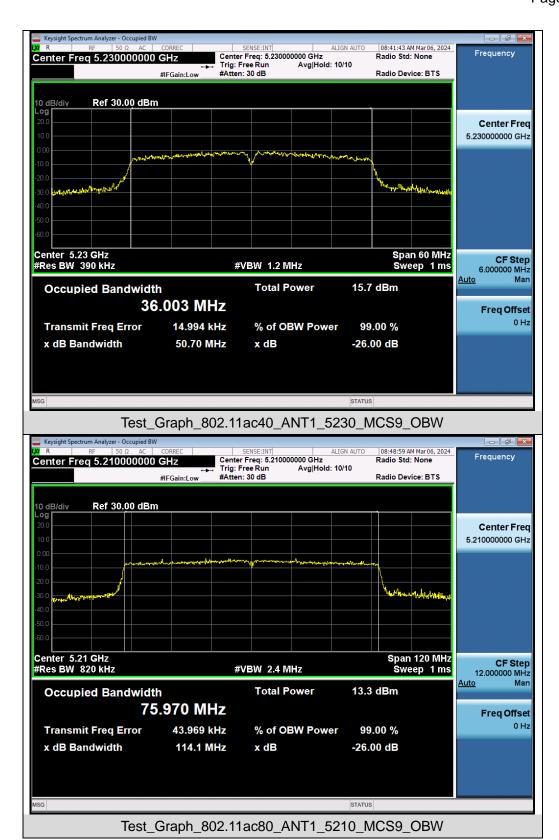








Test Graphs of Occupied Bandwidth for band 5.725-5.85 GHz

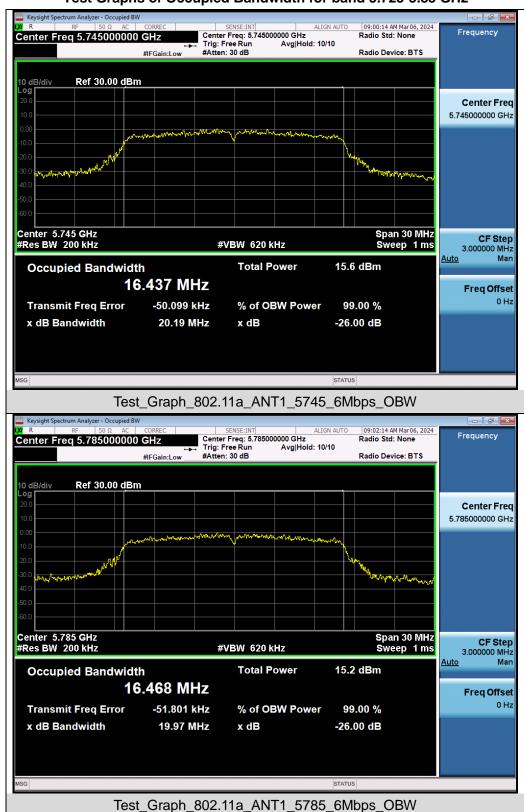







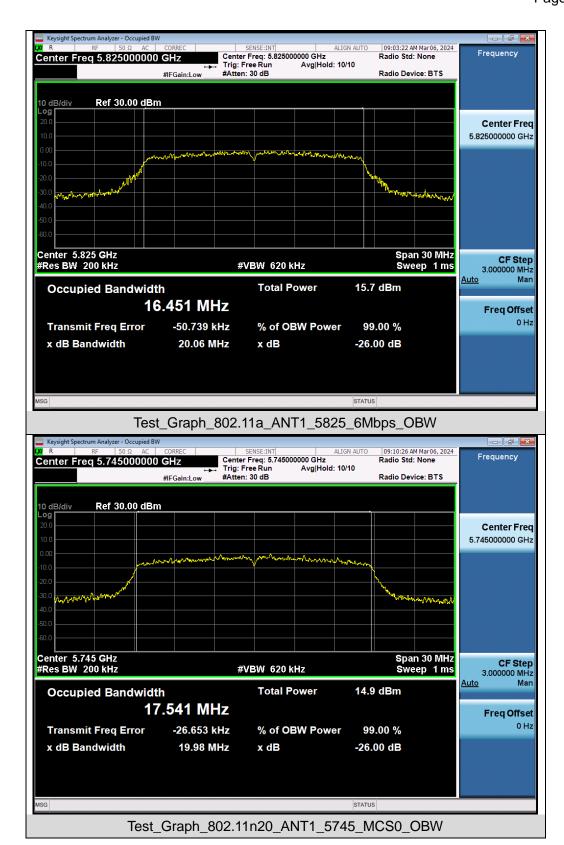







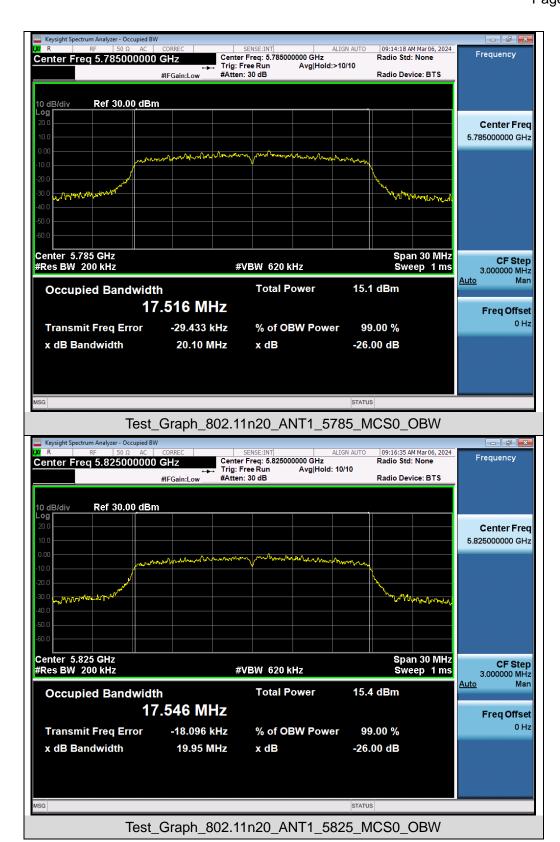







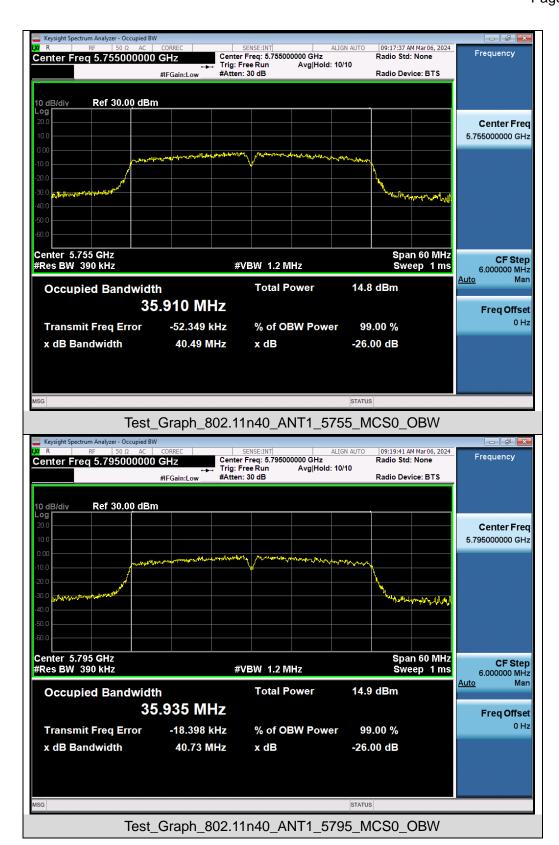







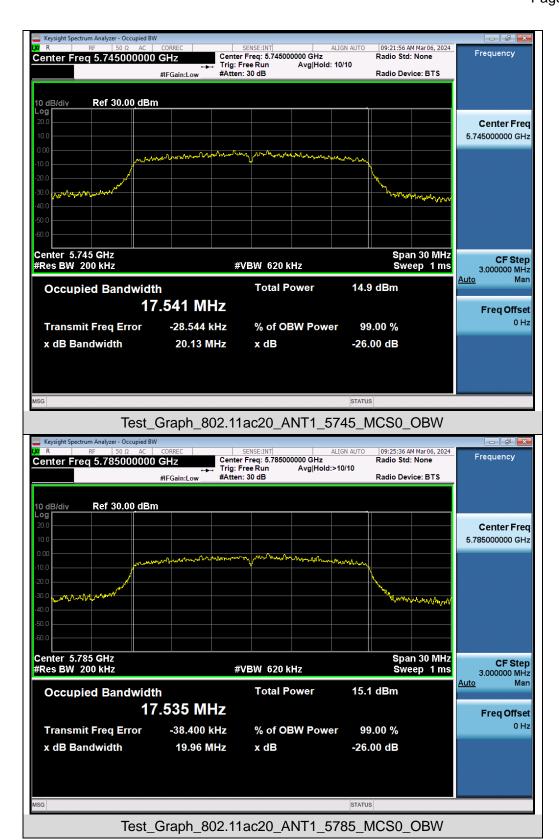







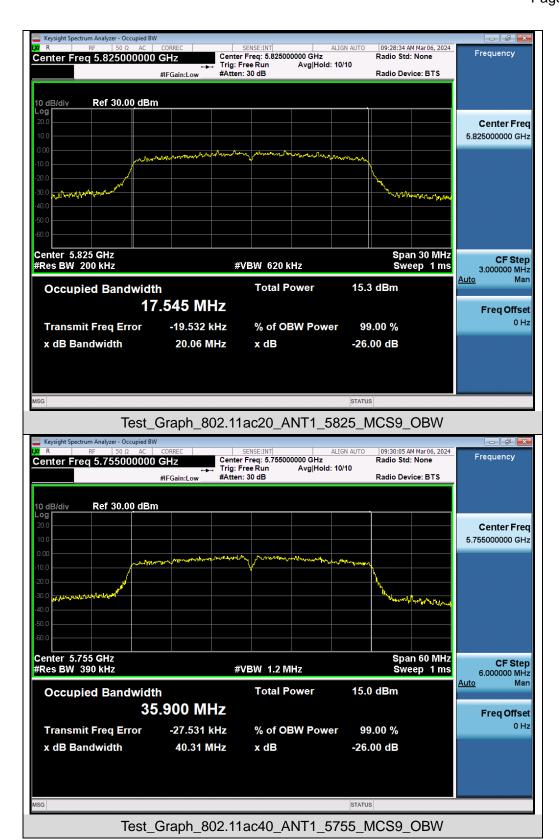






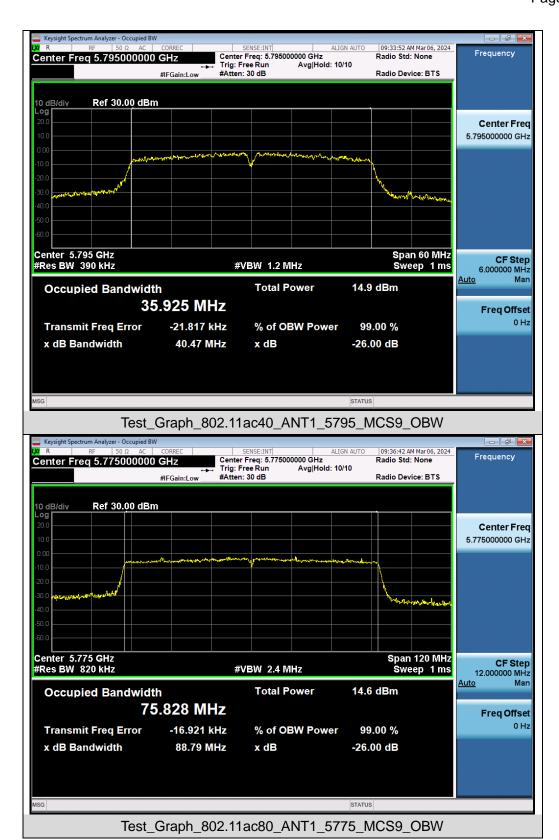








Test Graphs of DTS Bandwidth for band 5.725-5.85 GHz

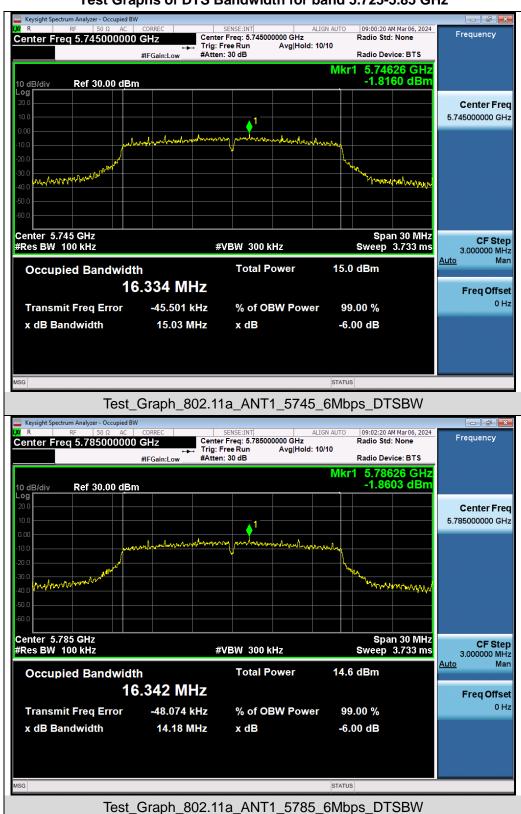







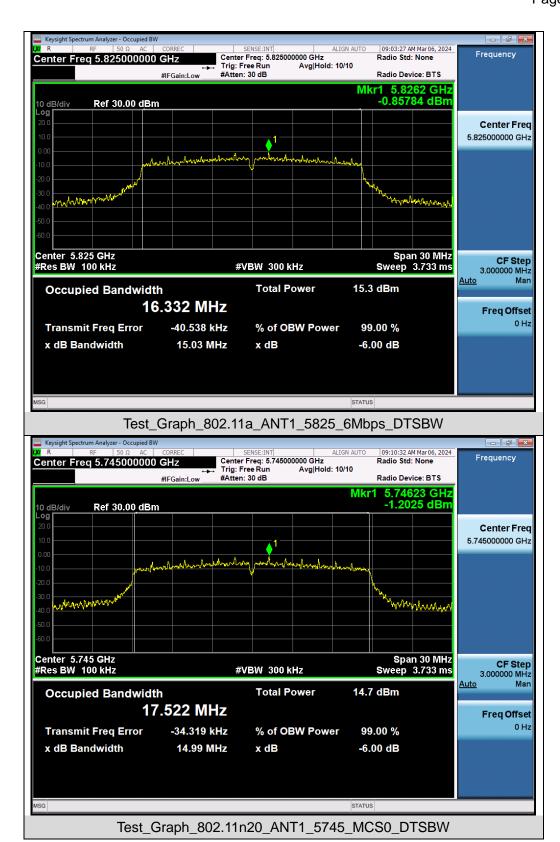







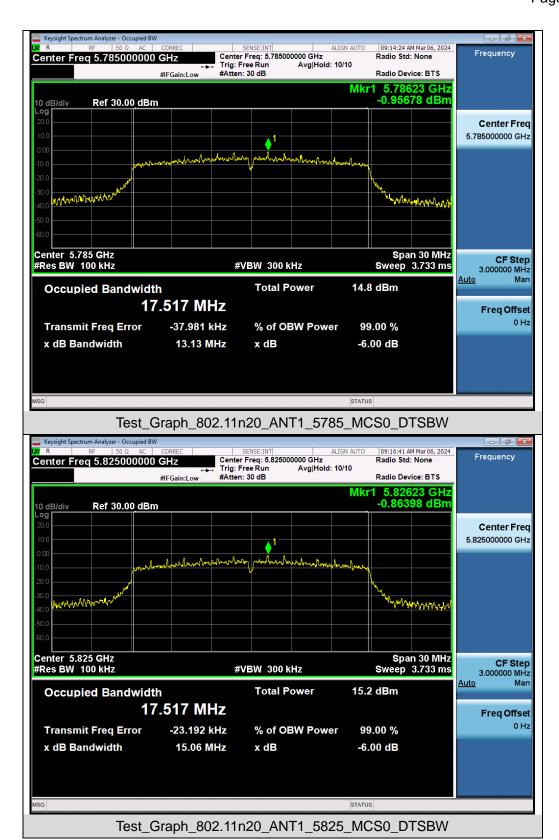







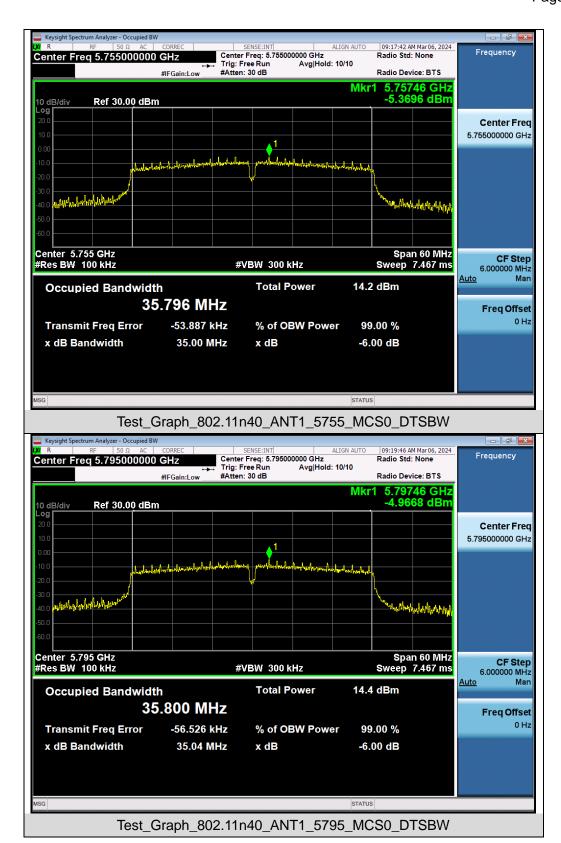







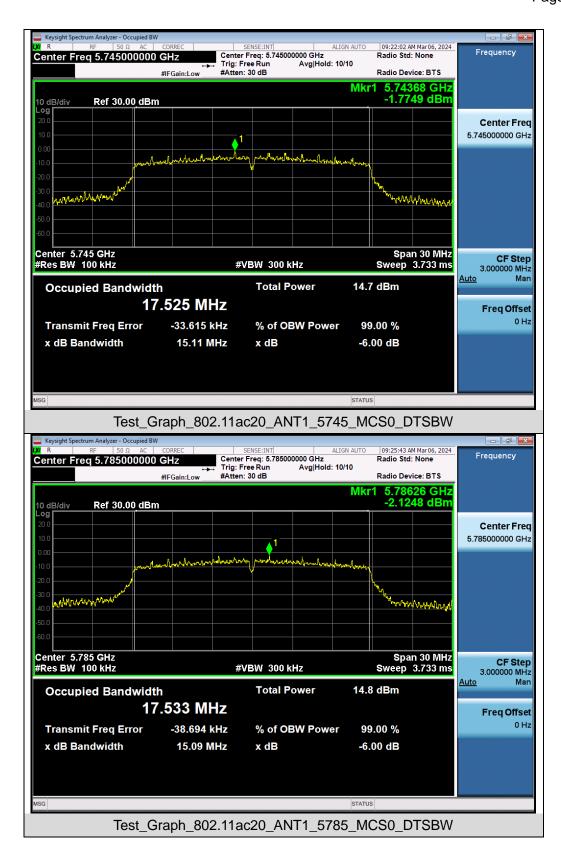






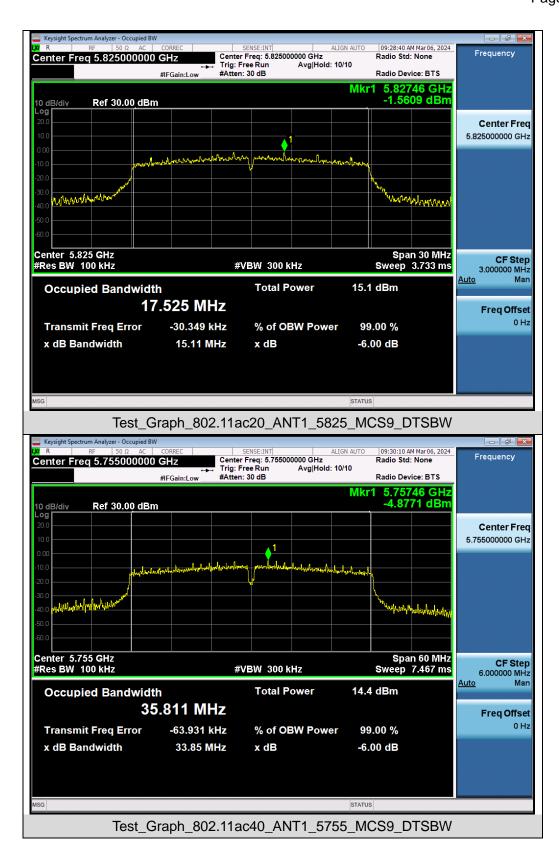





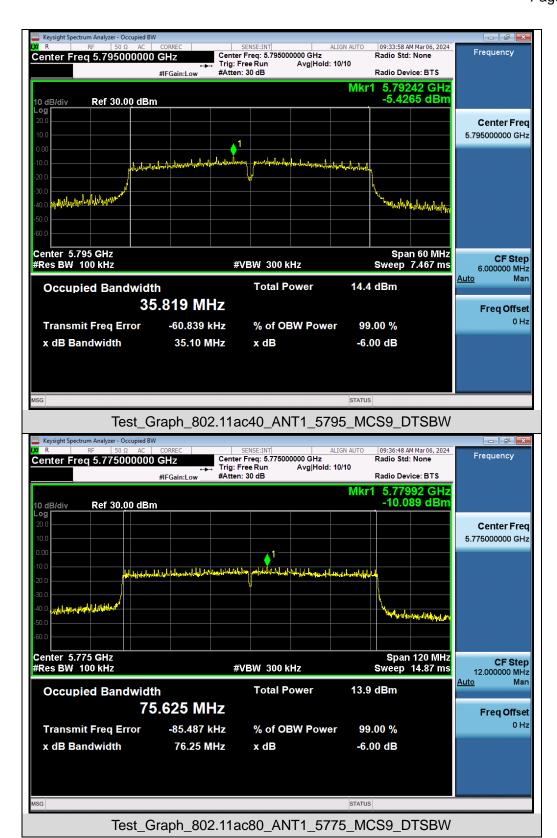



9. Power Spectral Density Measurement


9.1 Provisions Applicable


Operation Band	EUT Category		LIMIT	
U-NII-1		Outdoor Access Point	17dBm/ MHz	
		Fixed point-to-point Access Point	17dBm/ MHz	
		Indoor Access Point	17dBm/ MHz	
	\boxtimes	Client devices	11dBm/ MHz	
U-NII-2A	/		11dBm/ MHz	
U-NII-2C	/		11dBm/ MHz	
U-NII-3	/		30 dBm/500kHz	

9.2 Measurement Procedure

- Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
- 2. Span was set to encompass the entire 26dB EBW of the signal.
- 3. RBW = 1MHz.
- 4. If measurement bandwidth of Maximum PSD is specified in 500 kHz, RBW = 100KHz
- 5. Set VBW≥[3×RBW].
- 6. Sweep Time=Auto couple.
- 7. Detector function=RMS (i.e., power averaging).
- 8. Trace average at least 100 traces in power averaging (rms) mode.
- 9. When the measurement bandwidth of Maximum PSD is specified in 100 kHz, add a constant factor 10*log(500kHz/100kHz) = 6.99 dB to the measured result.
- 10. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 11. Add [10 log (1/D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.
- 12. Record the test results in the report.

9.3 Measurement Setup (Block Diagram of Configuration)

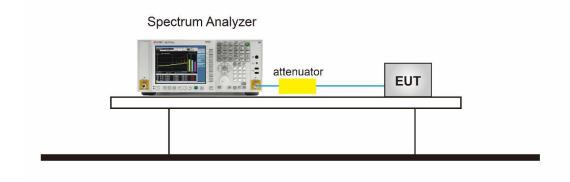






9.4 Measurement Result


Test Data of Conducted Output Power Density for band 5.15-5.25 GHz								
Test Mode	Test Channel (MHz)	Average Power Density (dBm/MHz)	Limits (dBm/MHz)	Pass or Fail				
802.11a	5180	0.179	11	Pass				
	5200	-0.181	11	Pass				
	5240	0.330	11	Pass				
802.11n20	5180	0.264	11	Pass				
	5200	-0.354	11	Pass				
	5240	-0.493	11	Pass				
802.11n40	5190	-2.424	11	Pass				
	5230	-3.258	11	Pass				
802.11ac20	5180	0.556	11	Pass				
	5200	-0.307	11	Pass				
	5240	-0.440	11	Pass				
802.11ac40	5190	-2.907	11	Pass				
	5230	-2.576	11	Pass				
802.11ac80	5210	-7.877	11	Pass				






Test Data of Conducted Output Power Density for band 5.725-5.85 GHz							
Test Mode	Test Channel (MHz)	Average Power Density (dBm/100kHz)	Average Power Density (dBm/500kHz)	Limits (dBm/500kHz)	Pass or Fail		
802.11a	5745	-8.848	-1.858	30	Pass		
	5785	-9.152	-2.162	30	Pass		
	5825	-8.756	-1.766	30	Pass		
802.11n20	5745	-9.773	-2.783	30	Pass		
	5785	-9.599	-2.609	30	Pass		
	5825	-8.815	-1.825	30	Pass		
802.11n40	5755	-12.702	-5.712	30	Pass		
	5795	-12.537	-5.547	30	Pass		
802.11ac20	5745	-9.858	-2.868	30	Pass		
	5785	-9.414	-2.424	30	Pass		
	5825	-9.061	-2.071	30	Pass		
802.11ac40	5755	-12.333	-5.343	30	Pass		
	5795	-12.675	-5.685	30	Pass		
802.11ac80	5775	-15.31	-8.320	30	Pass		


Note:1.Power density(dBm/500kHz) = Power density(dBm/100kHz)+10*log(500/100).







Test Graphs of Conducted Output Power Spectral Density for band 5.15-5.25 GHz

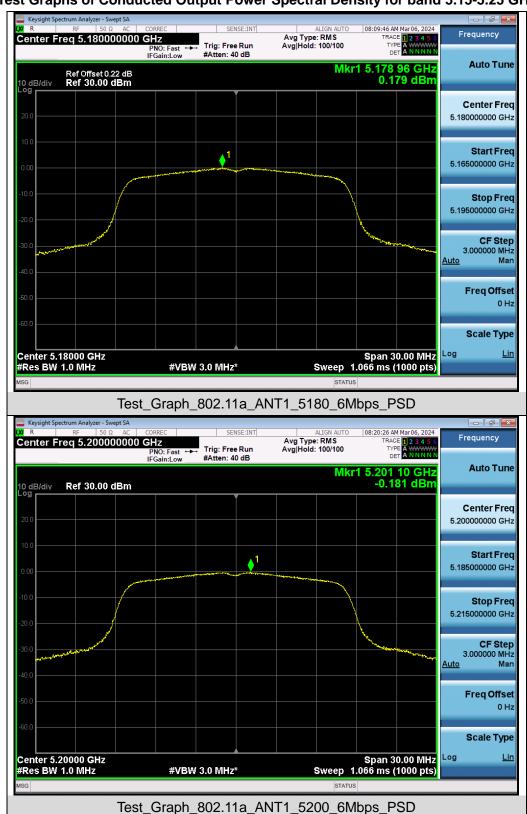






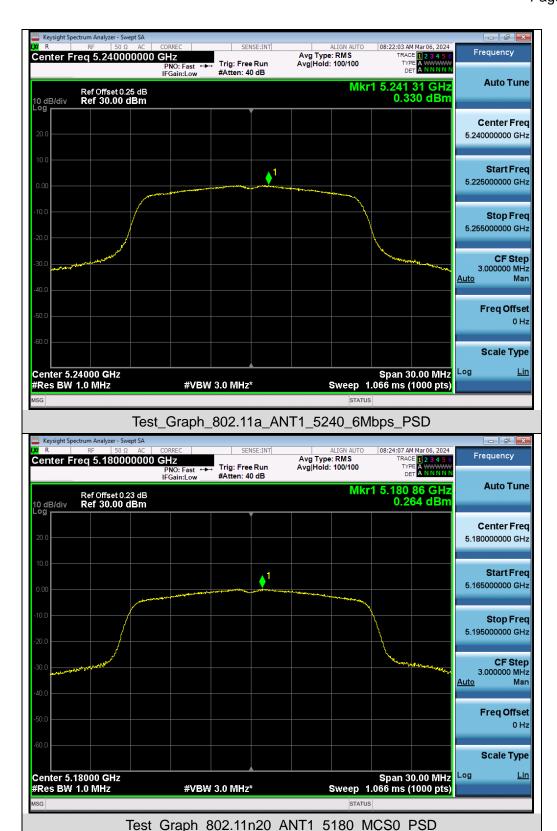







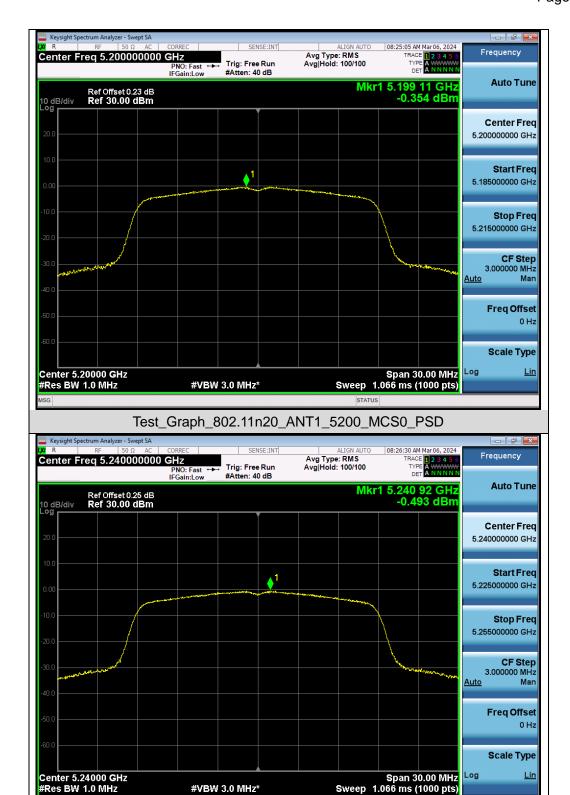


Test Graph 802.11n20 ANT1 5240 MCS0 PSD







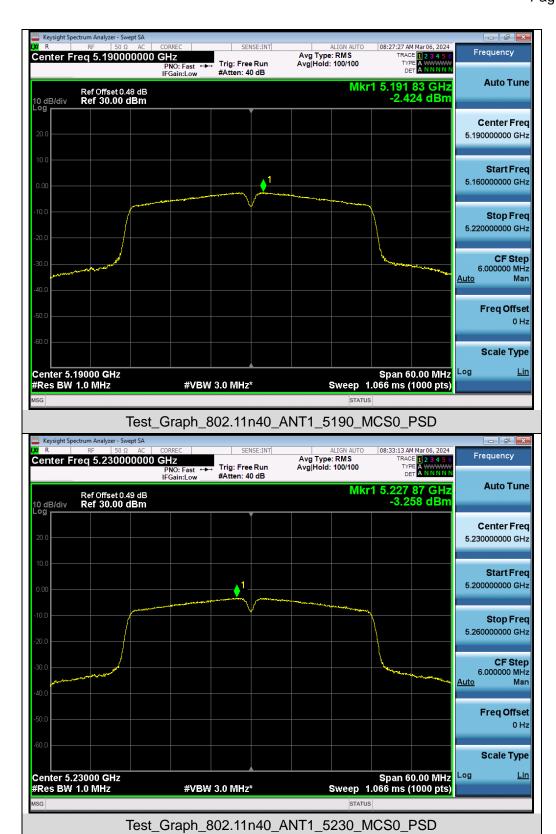






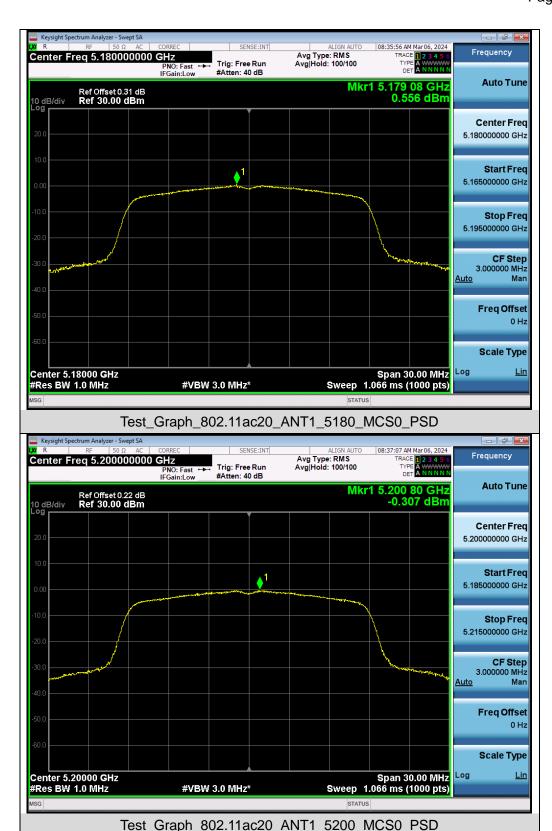













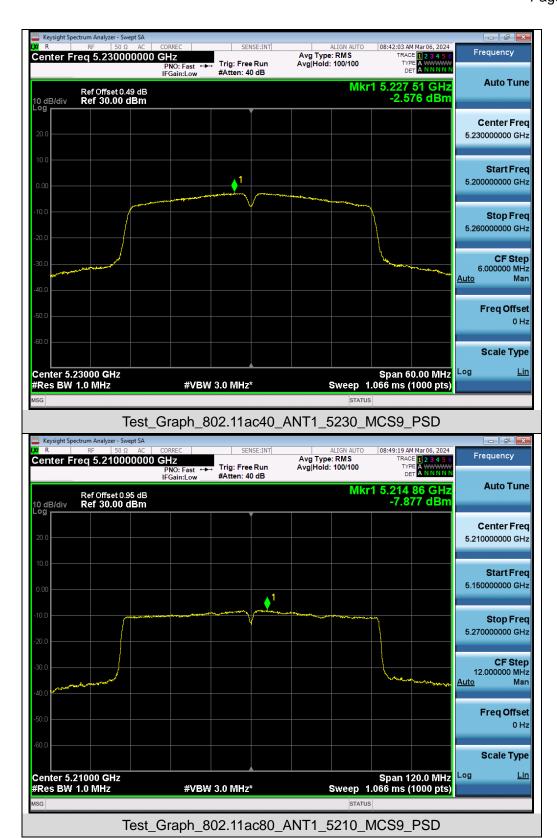





Test Graphs of Conducted Output Power Spectral Density for band 5.725-5.85 GHz

