

FCC Test Report

Report No.: AGC00408240102FR05

FCC ID : 2A3DR-AGMP2

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: 4G smart PAD, Tablet

BRAND NAME : AGM

MODEL NAME : AGM_PAD_P2, AGM_PAD_P2W

APPLICANT : AGM MOBILE LIMITED

DATE OF ISSUE : Mar. 01, 2024

FCC Part 22 Subpart H

STANDARD(S) : FCC Part 24 Subpart E

FCC Part 27 Subpart L

REPORT VERSION: V1.0

Attestation of Global CAMPIONCE (Shenzhen) Co., Ltd.



Page 2 of 112

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Mar. 01, 2024	Valid	Initial Release






Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Related Submittal(S) / Grant (S)	8
2.3 Test Methodology	8
2.4 Device Capabilities	8
2.5 Special Accessories	8
2.6 Equipment Modifications	8
2.7 Emission Designator	9
3. Test Environment	10
3.1 Address of The Test Laboratory	10
3.2 Test Facility	10
3.3 Environmental Conditions	11
3.4 Measurement Uncertainty	11
3.5 List of Test Equipment	12
4. System Test Configuration	14
4.1 EUT Configuration	14
4.2 EUT Exercise	14
4.3 Configuration of EUT System	14
4.4 Equipment Used in Tested System	14
5. Summary of Test Results	15
5.1 Test Condition: Conducted Test	15
5.2 Test Condition: Radiated Test	15
6. Description of Test Modes	16
7. Conducted Output Power	18
7.1 Provisions Applicable	18
7.2 Measurement Procedure	18
7.3 Measurement Setup	18
7.4 Measurement Result	19
8. Radiated Output Power	22
8.1 Provisions Applicable	22
8.2 Measurement Procedure	22
8.3 Measurement Setup	23
8.4 Measurement Result	25
9. Peak-to-Average Ratio	27
9.1 Provisions Applicable	27

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/



Report No.: AGC00408240102FR05 Page 4 of 112

9.2 Measurement Procedure	27
9.3 Measurement Setup	28
9.4 Measurement Result	29
10. 99% Occupied Bandwidth and 26dB Emission Bandwidth	30
10.1 Provisions Applicable	30
10.2 Measurement Procedure	30
10.3 Measurement Setup	30
10.4 Measurement Result	31
11. Band Edge Emissions at Antenna Terminal	43
11.1 Provisions Applicable	43
11.2 Measurement Procedure	43
11.3 Measurement Setup	43
11.4 Measurement Result	44
12. Spurious Emissions at Antenna Terminal	49
12.1 Provisions Applicable	49
12.2 Measurement Procedure	49
12.3 Measurement Setup	49
12.4 Measurement Result	50
13. Radiated Spurious Emission	64
13.1. Provisions Applicable	64
13.2. Measurement Procedure	64
13.3. Measurement Setup	66
13.4 Measurement Result	67
14. Frequency Stability / Variation of Ambient Temperature	87
14.1 Provisions Applicable	87
14.2 Measurement Procedure	87
14.3 Measurement Setup	88
14.4 Measurement Result	89
Appendix I: Photographs of Test Setup	112
Appendix II: Photographs of EUT	112



Page 5 of 112

1. General Information

	1
Applicant	AGM MOBILE LIMITED
Address	FLAT/RM 2253 22/F HOI TAI FACTORY ESTATE TSING YEUNG CIRCUIT TUEN MUN NT HONG KONG, CHINA
Manufacturer	Guangdong Aijiemo Electronic Industry Co., Ltd
Address	AGM Technology Park, No. 187 Lianfa Road, Tongqiao Town, Zhongkai High-tech District, Huizhou City, Guangdong, China
Factory	Guangdong Aijiemo Electronic Industry Co., Ltd
Address	AGM Technology Park, No. 187 Lianfa Road, Tongqiao Town, Zhongkai High-tech District, Huizhou City, Guangdong, China
Product Designation	4G smart PAD, Tablet
Brand Name	AGM
Test Model	AGM_PAD_P2
Series Model(s)	AGM_PAD_P2W
Difference Description	In addition to the different model names between the main test and the series, there are also different headphone plate layouts, and corresponding antenna types and gains. There are no differences in the other PCB layouts and RF parameters.
Date of receipt of test item	Jan. 22, 2024
Date of Test	Jan. 22, 2024~Feb. 27, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-GSM&WCDMA-V1

Note: The test results of this report relate only to the tested sample identified in this report.



Page 6 of 112

2. Product Information

2.1 Product Technical Description

Support Networks	GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA					
Hardware Version	V1.0					
Software Version	M193_P9901_V1					
	☐GSM 850	⊠PCS1900	⊠UMTS FDD Band II			
	☑UMTS FDD Band IV	⊠UMTS FDD Band V	(U.S. Bands)			
Support Frequency Band	⊠GSM 900	⊠DCS 1800	⊠UMTS FDD Band I			
	☑UMTS FDD Band VIII	(Non-U.S. Bands)				
	824.2MHz-848.8MHz (GS	SM/GPRS/EDGE 850)	1			
	1850.2MHz-1909.8MHz (GSM/GPRS/EDGE 1900)				
Frequency Range	1852.4MHz-1907.6MHz (WCDMA Band II)				
	1712.4MHz-1752.6MHz (WCDMA Band IV)				
	826.4MHz-846.6 MHz (W	CDMA Band V)				
Turns of Madulation	GMSK/8PSK Modulation	For GSM/GPRS/EDGE				
Type of Modulation	BPSK/QPSK Modulation	For WCDMA/HSDPA/HSU	JPA			
	GSM 850:	246KGXW				
	GPRS 850:	248KGXW				
	EDGE 850:	249KG7W				
	GSM 1900:	246KGXW				
Emission Designator	GPRS 1900:	SPRS 1900: 247KGXW				
	EDGE 1900:	321KG7W				
	WCDMA Band II:	4M22F9W				
	WCDMA Band IV:	4M20F9W				
	WCDMA Band V:	5M30F9W				
Antenna Designation	Internal Antenna					
Antenna Gain	GSM850:0.29dBi	PCS1900: 0.16dBi				
AGM_PAD_P2	WCDMA850:0.29dBi	WCDMA1700:0.27dBi	WCDMA1900:0.16dBi			
Antenna Gain	GSM850:0.71dBi	PCS1900: 0.75dBi				
AGM_PAD_P2W	WCDMA850:0.71dBi	WCDMA1700:1.66dBi	WCDMA1900:0.75dBi			
Power Supply	DC 3.85V by Built-in Li-ion Battery					
Dual Card	GSM /WCDMA Card Slot					
Extreme Vol. Limits DC3.27V to 4.40V (Normal: DC 3.85V)						
Extreme Temp. Tolerance	-30 °C to +50 °C					
Temperature Range	-20°C to +50°C					



Page 7 of 112

GSM/WCDMA SLOT 1:

	Maximum ERP/EIRP	Max. Average	
	(dBm)	Burst Power (dBm)	
GSM 850	32.56	34.31	
PCS 1900	29.85	31.68	
UMTS BAND V	21.78	23.55	
UMTS BAND II	20.70	23.18	
UMTS BAND IV	20.69	22.84	

GSM/WCDMA SLOT 2:

	Maximum ERP/EIRP	Max. Average		
	(dBm)	Burst Power (dBm)		
GSM 850	30.71	32.52		
PCS 1900	27.23	29.85		
UMTS BAND V	19.99	21.74		
UMTS BAND II	19.74	21.99		
UMTS BAND IV	18.54	20.58		



Page 8 of 112

2.2 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2A3DR-AGMP2**, filing to comply with Part 2, Part 22/24/27 of the Federal Communication Commission rules.

2.3 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title		
1	47 CFR FCC Part 2	Frequency allocations and radio treaty matters, general rules and regulations.		
2	47 CFR FCC Part 22	Public Mobile Services.		
3	47 CFR FCC Part 24	Personal Communications Services.		
4	4 47 CFR FCC Part 27 Miscellaneous Wireless Communications Services.			
5	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters		
5 ANSI C63.26-2015		Used in Licensed Radio Services		
6	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and		
0	ANSI/11A-003-E-2010	Performance Standards		
7	KDB 971168	D01 v03r01 Measurement Guidance For Certification Of Licensed Digital		
_ ′		Transmitters.		

2.4 Device Capabilities

850/1900 GSM/GPRS/EGPRS,850/1700/1900 WCDMA/HSPA, Multi-Band LTE,802.11 b/g/n for WLAN,802.11 a/n/ac for UNII, Bluetooth (1X,EDR,LE),GPS.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

This device supports dual-SIM communication, and only the data corresponding to the worst card slot (SIM Card 1) is reflected in the report.

2.5 Special Accessories

The battery was supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

2.6 Equipment Modifications

Not available for this EUT intended for grant.



Page 9 of 112

2.7 Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand



Page 10 of 112

3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 11 of 112

3.3 Environmental Conditions

	Normal Conditions	Extreme Conditions	
Temperature range	15~35℃	-20℃~50℃	
Humidity range	20 % to 75 %.	20 % to 75 %.	
Pressure range	86-106kPa	86-106kPa	
Power supply	DC 3.85V	DC 3.27V or 4.40V	

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

3.4 Measurement Uncertainty

Test	Measurement Uncertainty
Transmitter power conducted	±0.57 dB
Transmitter power Radiated	±2.20 dB
Conducted spurious emission 9kHz-40 GHz	±2.20 dB
Occupied Bandwidth	±0.01ppm
Radiated Emission 30~1000MHz	±4.10dB
Radiated Emission Above 1GHz	±4.32dB
Conducted Disturbance:0.15~30MHz	±3.20dB
Radio Frequency	± 6.5 x 10-8
RF Power, Conducted	± 0.9 dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Page 12 of 112

3.5 List of Test Equipment

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-03	2024-02-02	
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31	
\boxtimes	AGC-ER-E032	Universal Radio Communication Tester	R&S	CMW500	120909	2023-07-05	2024-07-04	
	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
\boxtimes	AGC-EM-E005	Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	2023-01-05	2024-01-04	
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22	
\boxtimes	AGC-EM-E102	Broadband Ridged Horn Antenna	ETS	3117	00154520	2023-06-03	2024-06-02	
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
	AGC-EM-E021	Pre-amplifier	MITEQ	AM-4A-000115	1465421	2022-06-08	2024-06-07	
\boxtimes	AGC-ER-E037	Signal Generator	Agilent	N5182A	MY50140530	2023-06-01	2024-05-31	
\boxtimes	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
	AGC-EM-A090	High Pass Filter 1 (2500-18000MHz)	N/A	N/A	N/A	2023-06-01	2024-05-31	
\boxtimes	AGC-EM-A091	High Pass Filter 2 (1200-18000MHz)	N/A	N/A	N/A	2023-06-01	2024-05-31	
\boxtimes	AGC-EM-A113	Band Stop Filter (825-850MHz)	MICRO-TRONICS	BRC50717	N/A	2023-06-01	2024-05-31	
	AGC-EM-A114	Band Stop Filter (880-915MHz)	MICRO-TRONICS	BRC50718	N/A	2023-06-01	2024-05-31	
\boxtimes	AGC-EM-A115	Band Stop Filter (1710-1785MHz)	MICRO-TRONICS	BRC50719	N/A	2023-06-01	2024-05-31	
\boxtimes	AGC-EM-A116	Band Stop Filter (1850-1950MHz)	MICRO-TRONICS	BRC50720	N/A	2023-06-01	2024-05-31	
	AGC-EM-A117	Band Stop Filter (1920-1980MHz)	MICRO-TRONICS	BRC50721	N/A	2023-06-01	2024-05-31	



Page 13 of 112

• [RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-ER-E087	Spectrum Analyzer	KEYSIGHT	N9020B	MY56101792	2023-06-01	2024-05-31	
\boxtimes	AGC-ER-E032	Universal Radio Communication Tester	R&S	CMW500	120909	2023-07-05	2024-07-04	
\boxtimes	AGC-ER-E032	Universal Radio Communication Tester	R&S	CMU200	113939	2023-06-01	2024-05-31	
\boxtimes	AGC-ER-E075	Small Environmental Tester	SH-242	ESPEC	93008290	2022-08-03	2024-08-02	
\boxtimes	1	Universal Switch Control Unit	Tonscend	JS	N/A	N/A	N/A	
	AGC-ER-E033	RF Test Plat (DECT)	RTX	RTX-2012-HS-RF	N/A	2022-08-04	2024-08-03	
\boxtimes		RF Connection Cable	N/A	1#	N/A	Each time	N/A	
\boxtimes		RF Connection Cable	N/A	2#	N/A	Each time	N/A	

Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information		
	AGC-ER-S006	GSM Test System	Tonscend	JS1120-4	2.1.6.0		
	AGC-ER-S007	WCDMA Test System	Tonscend	JS1120-3	2.1.5.10		
	AGC-EM-S011	RSE Test System	Tonscend	TS ⁺ Ver2.1(JS36-RSE)	4.0.0.0		



Page 14 of 112

4. System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of EUT System

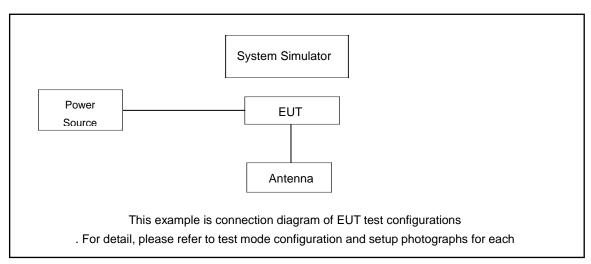


Table 2-1 Equipment Used in EUT System

4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

- ☐ Test Accessories Come From The Laboratory
- ☐ Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Adapter	FX202E	HUNAN GAOYUAN BATTERY CO.,LTD	Input: AC 100-240V 50/60Hz, 0.7A DC: 5V3A 9V2.22A 12V1.67A	
2	Battery	AGM_PAD_P2	SHENZHEN Fangxin Technology Co. ,Ltd	DC 3.85V 8000mAh	
3	USB Cable	N/A	N/A	N/A	1.2m unshielded



Page 15 of 112

5. Summary of Test Results

5.1 Test Condition: Conducted Test

Item	Test Description	FCC Rules	Result
1	Occupied Bandwidth	§2.1049	Pass
2	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal	§2.1051, §22.917(a), §24.238(a) §27.53(h)	Pass
3	Conducted Output Power	§2.1046	Pass
4	Frequency stability / variation of ambient temperature	§2.1055, § 22.355, §24.235, §27.54	Pass
5	Peak- to- Average Ratio	§24.232(d), §27.50(d)(5),	Pass

5.2 Test Condition: Radiated Test

Item	Test Description	FCC Rules	Result
1	Effective Radiated Power	§22.913(a)(5)	Pass
2	Equivalent Isotropic Radiated Power	§24.232(c), §27.50(d)(4)	Pass
3	Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a), §24.238(a), §27.53(h)	Pass



Page 16 of 112

6. Description of Test Modes

			RF Channel			
Bands	Tx/Rx Frequency	Low(L)	Middle(M)	High(H)		
GSM/GPRS/	TX	Channel 128	Channel 190	Channel 251		
EDGE 850	(824 MHz ~ 849 MHz)	824.2 MHz	836.6 MHz	848.8 MHz		
	TX	Channel 4132	Channel 4182	Channel 4233		
WCDMA band V	(824 MHz ~ 849 MHz)	826.4 MHz	836.4 MHz	846.6 MHz		

Bands	Tx/Rx Frequency	RF Channel		
Barido	TATEA Troquonoy	Low(L)	Middle(M)	High(H)
GSM/GPRS/	TX	Channel 512	Channel 661	Channel 810
EDGE1900	(1850 MHz-1910 MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz
	TX	Channel 9262	Channel 9400	Channel 9538
WCDMA Band II	(1850 MHz-1910 MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz

		RF Channel		
Bands	Tx/Rx Frequency	Low(L)	Middle(M)	High(H)
	TX	Channel 1312	Channel 1412	Channel 1513
WCDMA Band IV	(1710 MHz-1755 MHz)	1712.4 MHz	1732.4 MHz	1752.6 MHz

Pre-scan all bandwidth and RB, find worse case mode are chosen to the report, the worse mode applicability and tested channel detail as below:

Band	Radiated	Conducted
0011/0000/	GSM (GMSK, 1Tx-slot) Link	GSM (GMSK,1Tx-slot) Link
GSM/GPRS/	GPRS (GMSK, 1Tx-slot) Link	GPRS (GMSK, 1Tx-slot) Link
EDGE 850/1900	EDGE (8PSK, 1Tx-slot) Link	EDGE (8PSK, 1Tx-slot) Link
WCDMA Band II/IV/V	RMC 12.2kbps Link	RMC 12.2kbps Link



Page 17 of 112

According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)		
For all combinations of ,DPDCH,DPCCH	0≤ CM≤3.5	MAX(CM 4.0)		
HS-DPDCH,E-DPDCH and E-DPCCH	US CIVISO.5 IVIAA(CIVI-1,0)	MAX(CM-1,0)		
Note: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{bc}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH.				

Note: CM=1 for β_c/β_d =12/15, β_{hs}/β_c =24/15. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done. However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



Page 18 of 112

7. Conducted Output Power

7.1 Provisions Applicable

The conduction test is carried out in a shielded room. According to the test, connect the device under test to the antenna port on the non-conductive platform directly to the test device for evaluation and measurement (ANSI-C63.26-2015 Clause 5.4)

7.2 Measurement Procedure

- ➤ The transmitter output port was connected to base station.
- > The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
- > The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all mode (GSM/EGPRS 850, GSM/EGPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band IV ,WCDMA/HSPA band V)at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

7.3 Measurement Setup






Page 19 of 112

7.4 Measurement Result

GSM 850 Maximum Average Power (dBm)					
Channel	128	190	251		
Frequency (MHz)	824.2 MHz	836.6 MHz	848.8 MHz		
GSM (GMSK, 1Tx-slot)	34.27	33.83	33.96		
GPRS (GMSK, 1Tx-slot)	34.32	33.83	34.01		
GPRS (GMSK, 2Tx-slot)	32.55	31.43	31.49		
GPRS (GMSK, 3Tx-slot)	30.29	29.78	29.81		
GPRS (GMSK, 4Tx-slot)	28.53	27.67	27.55		
EDGE (8PSK, 1Tx-slot)	27.93	27.01	27.09		
EDGE (8PSK, 2Tx-slot)	25.36	25.12	25.34		
EDGE (8PSK, 3Tx-slot)	23.78	23.63	23.71		
EDGE (8PSK, 4Tx-slot)	21.55	21.77	21.13		


PCS 1900 Maximum Average Power (dBm)					
Channel	512	661	810		
Frequency (MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz		
GSM (GMSK, 1Tx-slot)	31.58	31.44	31.09		
GPRS (GMSK, 1Tx-slot)	31.68	31.51	31.20		
GPRS (GMSK, 2Tx-slot)	29.47	29.63	29.37		
GPRS (GMSK, 3Tx-slot)	27.55	27.36	27.18		
GPRS (GMSK, 4Tx-slot)	25.39	25.11	25.39		
EDGE (8PSK, 1Tx-slot)	25.82	25.84	25.48		
EDGE (8PSK, 2Tx-slot)	23.10	23.02	23.08		
EDGE (8PSK, 3Tx-slot)	21.78	21.96	21.74		
EDGE (8PSK, 4Tx-slot)	19.90	19.52	19.37		





WCDMA Band II Maximum Average Power (dBm)					
Channel	9262	9400	9538		
Frequency (MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz		
RMC 12.2kbps	23.17	23.13	23.18		
HSDPA Subtest-1	22.26	22.11	22.16		
HSDPA Subtest-2	21.69	21.63	21.65		
HSDPA Subtest-3	21.73	21.63	21.67		
HSDPA Subtest-4	21.72	21.62	21.67		
HSUPA Subtest-1	20.24	20.15	20.20		
HSUPA Subtest-2	20.76	20.69	20.66		
HSUPA Subtest-3	21.21	21.16	21.19		
HSUPA Subtest-4	20.25	20.14	20.18		
HSUPA Subtest-5	22.27	22.15	22.19		

	WCDMA Band IV Maximum Average Power (dBm)						
Channel	1312	1412	1513				
Frequency (MHz)	1712.4 MHz	1732.4 MHz	1752.6 MHz				
RMC 12.2kbps	22.78	22.84	22.82				
HSDPA Subtest-1	21.83	21.85	21.89				
HSDPA Subtest-2	21.29	21.33	21.42				
HSDPA Subtest-3	21.29	21.31	21.41				
HSDPA Subtest-4	21.29	21.31	21.37				
HSUPA Subtest-1	19.80	19.83	19.87				
HSUPA Subtest-2	20.29	20.29	20.36				
HSUPA Subtest-3	20.82	20.84	20.90				
HSUPA Subtest-4	19.76	19.84	19.88				
HSUPA Subtest-5	21.84	21.84	21.89				





	WCDMA Band V Maximum Average Power (dBm)							
Channel	4132	4182	4233					
Frequency(MHz)	826.4 MHz	836.4 MHz	846.6 MHz					
RMC 12.2kbps	23.55	23.37	23.50					
HSDPA Subtest-1	22.53	22.42	22.53					
HSDPA Subtest-2	22.02	21.92	22.02					
HSDPA Subtest-3	22.05	21.92	22.05					
HSDPA Subtest-4	22.04	21.88	22.10					
HSUPA Subtest-1	21.23	21.23	21.05					
HSUPA Subtest-2	20.52	20.12	20.12					
HSUPA Subtest-3	20.12	20.30	20.35					
HSUPA Subtest-4	20.37	20.19	20.33					
HSUPA Subtest-5	22.56	22.71	22.41					



Page 22 of 112

8. Radiated Output Power

8.1 Provisions Applicable

The radiation test is carried out in a semi-anechoic chamber.

According to the test, put the device under test on a non-conductive platform 3 meters away from the receiving antenna (ANSI/TIA-603-E-2016 Article 2.2.17).

The following rules are for the maximum radiated power limit requirements of the product:

Mode	Nominal Peak Power
GSM 850	< 7 Watts max. ERP (38.45dBm)
PCS 1900	< 2 Watts max. EIRP (33dBm)
WCDMA Band II	< 2 Watts max. EIRP (33dBm)
WCDMA Band IV	< 1 Watts max. EIRP (30dBm)
WCDMA Band V	< 7 Watts max. ERP (38.45dBm)

8.2 Measurement Procedure

- 1. Radiated power measurements are performed using the signal analyzer's "channel power"
- 2. measurement capability for signals with continuous operation.
- 3. RBW = 1 5% of the expected OBW, not to exceed 1MHz
- 4. VBW \geq 3 x RBW
- 5. Span = 1.5 times the OBW
- 6. No. of sweep points > 2 x span / RBW
- 7. Detector = RMS
- 8. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
- 9. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
- 10. Trace mode = trace averaging (RMS) over 100 sweeps
- 11. The trace was allowed to stabilize.



Page 23 of 112

Radiation Construction Method:


- 1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
- A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.
- 3. The power is calculated by the following formula:


Pd(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dB)

- 4. Where: Pd is the dipole equivalent power and Pg is the generator output power into the substitution antenna.
- 5. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
- 6. The EUT was tested in three orthogonal planes (X, Y, Z) and in all possible test configurations and positioning.
- 7. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.


8.3 Measurement Setup

Radiated Power 30MHz to 1GHz Test setup

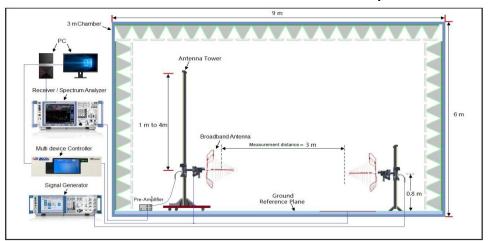







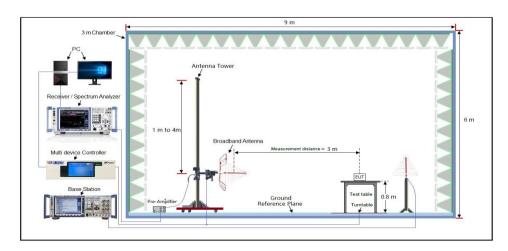

Radiated Power Above 1GHz Test setup

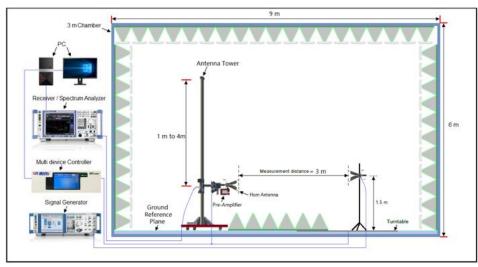

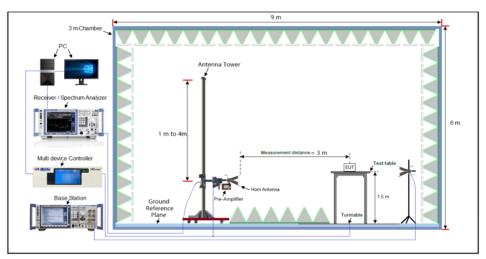

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 25 of 112

8.4 Measurement Result

	Ch./ Freq.		Substitute	Ant. Gain			Limit	EF	RP
Mode	channel	Freq. (MHz)	Level (dBm)	(dBi)	C.L	Pol.	w	w	dBm
	128	824.2	27.86	5.90	1.21	Н		1.799	32.55
GSM850	190	836.6	27.44	5.90	1.22	Н		1.629	32.12
	251	848.8	27.91	5.90	1.25	Н		1.803	32.56
	128	824.2	26.87	5.90	1.21	Н		1.432	31.56
GPRS	190	836.6	27.35	5.90	1.22	Н		1.596	32.03
	251	848.8	27.09	5.90	1.25	Н	< 7.00	1.493	31.74
	128	824.2	20.65	5.90	1.21	Н		0.342	25.34
EDGE	190	836.6	20.76	5.90	1.22	Н		0.350	25.44
	251	848.8	21.95	5.90	1.25	Н		0.457	26.60
	4132	826.4	16.67	5.90	1.21	Н		0.137	21.36
WCDMA850	4183	836.6	17.13	5.90	1.25	Н		0.151	21.78
	4233	846.6	16.89	5.90	1.24	Н		0.143	21.55
	4132	826.4	15.67	5.90	1.21	Н		0.109	20.36
HSDPA	4183	836.6	15.46	5.90	1.25	Н		0.103	20.11
	4233	846.6	15.39	5.90	1.24	Н	1	0.101	20.05
	4132	826.4	14.46	5.90	1.21	Н		0.082	19.15
HSUPA	4183	836.6	14.66	5.90	1.25	Н		0.085	19.31
	4233	846.6	14.45	5.90	1.24	Н		0.081	19.11



	Ch./ Freq.		Substitute	Ant Coin			Limit	Ell	RP
Mode	channel	Freq. (MHz)	Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	w	w	dBm
	512	1850.2	23.36	8.6	2.11	Н		0.966	29.85
PCS1900	661	1880.0	23.32	8.6	2.15	Н		0.948	29.77
	810	1909.8	23.07	8.6	2.15	Н		0.895	29.52
	512	1850.2	22.84	8.6	2.11	Н		0.857	29.33
GPRS	661	1880.0	22.67	8.6	2.15	Н		0.817	29.12
	810	1909.8	22.86	8.6	2.15	Н		0.853	29.31
	512	1850.2	16.63	8.6	2.11	Н		0.205	23.12
EDGE	661	1880.0	16.40	8.6	2.15	Н		0.193	22.85
	810	1909.8	16.22	8.6	2.15	Н		0.185	22.67
MODIMA	9262	1852.4	13.63	8.6	2.11	Н	< 2.00	0.103	20.12
WCDMA	9400	1880.0	13.90	8.6	2.15	Н		0.108	20.35
1900	9538	1907.6	14.25	8.6	2.15	Н		0.117	20.70
	9262	1852.4	12.07	8.6	2.11	Н		0.072	18.56
HSDPA	9400	1880.0	12.57	8.6	2.15	Н		0.080	19.02
	9538	1907.6	12.32	8.6	2.15	Н		0.075	18.77
	9262	1852.4	12.89	8.6	2.11	Н		0.086	19.34
HSUPA	9400	1880.0	13.60	8.6	2.15	Н		0.101	20.05
	9538	1907.6	13.67	8.6	2.15	Н		0.103	20.12
MODIMA	1312	1712.4	14.08	8.3	2.05	Н		0.108	20.33
WCDMA	1412	1732.4	14.44	8.3	2.05	Н		0.117	20.69
1700	1513	1752.6	14.08	8.3	2.06	Н		0.108	20.32
	1312	1712.4	12.87	8.3	2.05	Н		0.082	19.12
HSDPA	1412	1732.4	12.80	8.3	2.05	Н	< 1.00	0.080	19.05
	1513	1752.6	12.80	8.3	2.06	Н		0.080	19.04
	1312	1712.4	12.85	8.3	2.05	Н		0.081	19.10
HSUPA	1412	1732.4	12.81	8.3	2.05	Н		0.081	19.06
	1513	1752.6	12.91	8.3	2.06	Н		0.082	19.15

Note:

- 1. EIRP/ERP = Substitute Level (dBm) + Ant. Gain C.L (Cable Loss)
- 2. All polarizations and modes have been tested, only the worst mode is recorded in the report



Page 27 of 112

9. Peak-to-Average Ratio

9.1 Provisions Applicable

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

9.2 Measurement Procedure

CCDF Procedure for PAPR:

- 1. Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;
- 2. Set the number of counts to a value that stabilizes the measured CCDF curve;
- 3. Set the measurement interval as follows:
 - for continuous transmissions, set to 1 ms,
 - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time
- 4. that is less than or equal to the burst duration.
- 5. Record the maximum PAPR level associated with a probability of 0.1%.

Alternate Procedure for PAPR:

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and recordas PAvg. Determine the P.A.R. from:

 $P.A.R(dB) = P_{Pk} (dBm) - P_{Avg} (dBm) (P_{Avg} = Average Power + Duty cycle Factor)$

Allow trace to fully stabilize.

Use the peak marker function to determine the peak amplitude level.

■ Test Settings (Peak Power):

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW \geq 3 × RBW.

- 1. Set the RBW ≥ OBW.
- 2. Set VBW ≥ 3 × RBW.
- 3. Set span ≥ 2 × OBW.




Report No.: AGC00408240102FR05 Page 28 of 112

- 5. Detector = peak.
- 6. Trace mode = max hold.
- 7. Allow trace to fully stabilize.
- 8. Use the peak marker function to determine the peak amplitude level.

Test Settings (Average Power)

- 1. Set span to 2 x to 3 x the OBW.
- 2. Set RBW ≥ OBW.
- 3. Set VBW ≥ 3 × RBW.
- 4. Set number of measurement points in sweep ≥ 2 × span / RBW.
- 5. Sweep time: Set ≥ [10 × (number of points in sweep) × (transmission period)] for single sweep (Automation-compatible) measurement. The transmission period is the (on + off) time.
- 6. Detector = power averaging (rms).
- 7. Set sweep trigger to "free run."
- 8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. Add [10 log (1/duty cycle)] to the measured maximum power level to compute the average power during continuous transmission. For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is a constant 25%.

9.3 Measurement Setup

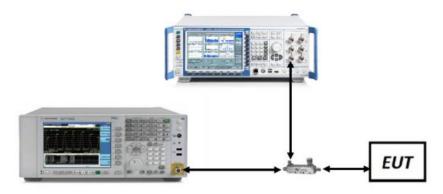



Page 29 of 112

9.4 Measurement Result

Bands	Modulation	Peak-t	Peak-to-average ratio (dB)			Result
Dalius	Woddiation	Lowest	Middle	Highest	(dB)	Nesuit
	GSM	3.04	3.04	3.04	13	Pass
GSM 850	GPRS	3.04	3.03	3.03	13	Pass
	EDGE	5.92	5.88	5.90	13	Pass
	GSM	2.83	2.87	2.86	13	Pass
PCS 1900	GPRS	2.82	2.84	2.86	13	Pass
	EDGE	5.87	5.93	5.96	13	Pass
WCDMA Band II	RMC 12.2kbps	2.82	2.97	2.99	13	Pass
WCDMA Band II	HSUPA	3.01	3.12	3.13	13	Pass
WCDMA Band II	HSDPA	4.13	4.20	4.22	13	Pass
WCDMA Band IV	RMC 12.2kbps	3.63	3.00	3.21	13	Pass
WCDMA Band IV	HSUPA	3.62	3.66	3.57	13	Pass
WCDMA Band IV	HSDPA	5.09	5.32	5.36	13	Pass
WCDMA Band V	RMC 12.2kbps	3.04	3.00	2.99	13	Pass
WCDMA Band V	HSUPA	3.19	3.17	3.19	13	Pass
WCDMA Band V	HSDPA	4.36	4.23	4.24	13	Pass



Page 30 of 112

10. 99% Occupied Bandwidth and 26dB Emission Bandwidth

10.1 Provisions Applicable

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

10.2 Measurement Procedure

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99%
- 2. Occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by
- 3. any intermediate power nulls in the fundamental emission.
- 4. RBW = 1 5% of the expected OBW
- 5. VBW \geq 3 x RBW
- 6. Detector = Peak
- 7. Trace mode = max hold
- 8. Sweep = auto couple
- 9. The trace was allowed to stabilize
- 10. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
- 11. 1-5% of the 99% occupied bandwidth observed in Step 7

10.3 Measurement Setup

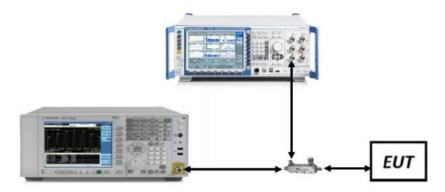




Report No.: AGC00408240102FR05 Page 31 of 112

10.4 Measurement Result

Test Band	Test Mode	Test Channel	Occupied Bandwidth (kHz)	Emission Bandwidth (kHz)	Verdict	
		128	245.9	317	Pass	
	GSM	190	245.0	303	Pass	
		251	244.5	318	Pass	
	GPRS	128	244.7	316	Pass	
GSM 850		190	245.5	314	Pass	
		251	247.5	315	Pass	
			128	247.1	313	Pass
	EDGE	190	249.1	316	Pass	
		251	246.7	311	Pass	

Test Band	Test Mode	Test Channel	Occupied Bandwidth (kHz)	Emission Bandwidth (kHz)	Verdict
		512	244.7	315	Pass
	GSM	661	246.3	318	Pass
		810	244.4	312	Pass
	GPRS	512	243.9	309	Pass
PCS 1900		661	244.9	312	Pass
		810	247.0	306	Pass
	EDGE	512	320.9	489	Pass
		661	247.1	307	Pass
		810	248.0	300	Pass






Test Band	Test Mode	Test Channel	Occupied Bandwidth (MHz)	Emission Bandwidth (MHz)	Verdict
		4132	4.5206	8.838	Pass
	RMC	4183	4.2016	4.764	Pass
	12.2kbps	4233	5.3009	9.500	Pass
		4132	4.2595	4.906	Pass
WCDMA 850	HSDPA	4183	4.1963	4.720	Pass
030		4233	4.4105	7.050	Pass
		4132	4.1780	4.747	Pass
	HSUPA	4183	4.2013	4.723	Pass
		4233	4.4105	7.050	Pass

Test Band	Test Mode	Test Channel	Occupied Bandwidth (MHz)	Emission Bandwidth (MHz)	Verdict
	5140	9262	4.1752	4.713	Pass
	RMC 12.2kbps	9400	4.1646	4.691	Pass
	12.28009	9538	4.1765	4.731	Pass
	HSUPA	9262	4.1754	4.717	Pass
WCDMA 1900		9400	4.2185	4.707	Pass
1300		9538	4.2224	4.706	Pass
		9262	4.1793	4.711	Pass
	HSDPA	9400	4.1773	4.704	Pass
		9538	4.1751	4.701	Pass





Page 33 of 112

Test Band	Test Mode	Test Channel	Occupied Bandwidth (MHz)	Emission Bandwidth (MHz)	Verdict
		1312	4.1611	4.687	Pass
	RMC 12.2kbps	1412	4.1756	4.699	Pass
	12.2KUPS	1513	4.1735	4.697	Pass
14/05144	HSDPA	1312	4.1755	4.708	Pass
1700		1412	4.1776	4.712	Pass
1700		1513	4.1885	4.704	Pass
	HSUPA	1312	4.1814	4.714	Pass
		1412	4.1837	4.699	Pass
		1513	4.1959	4.697	Pass







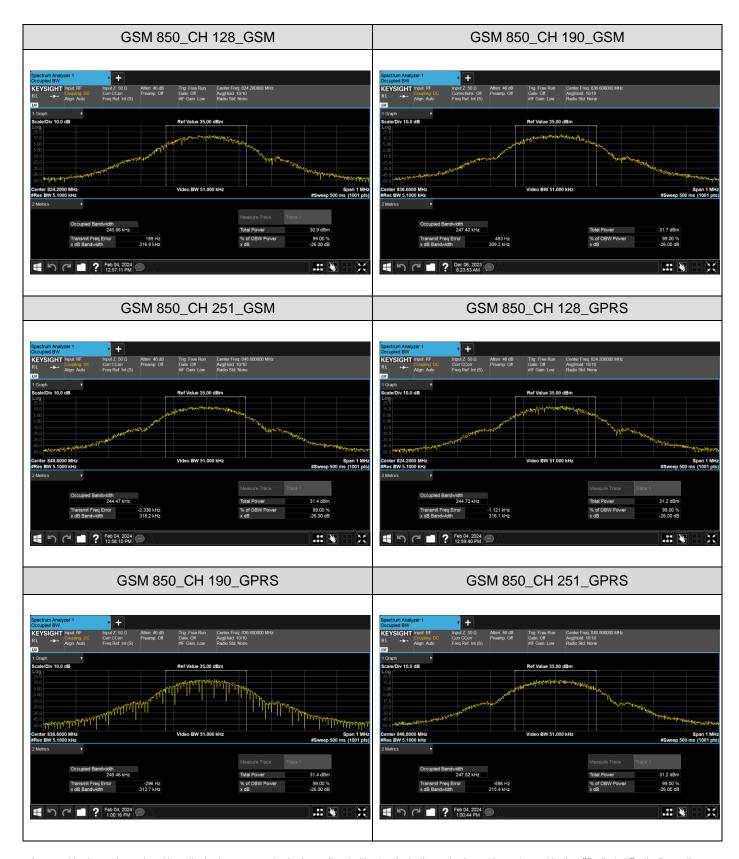







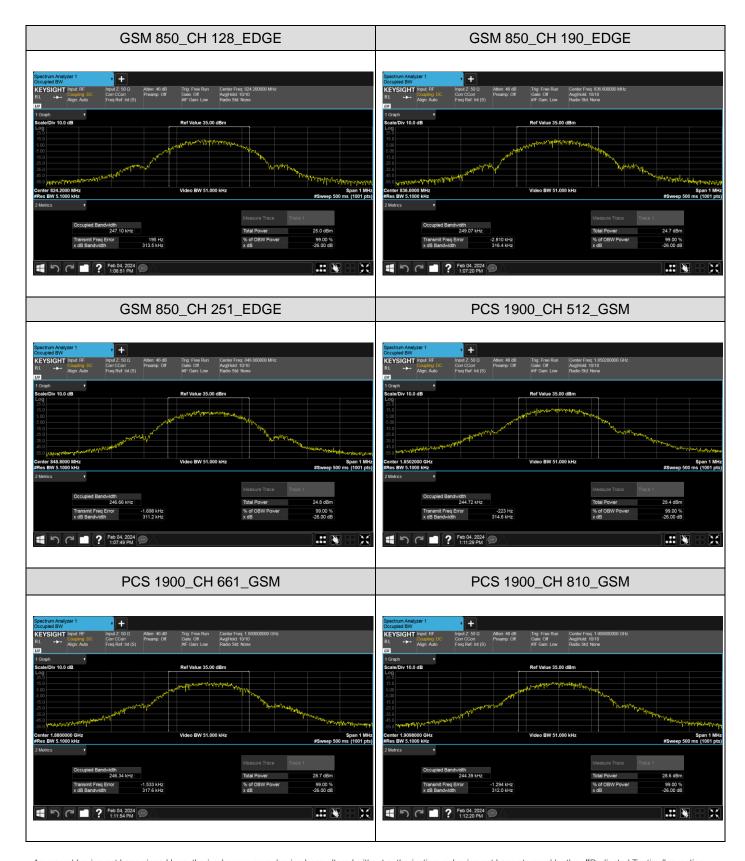





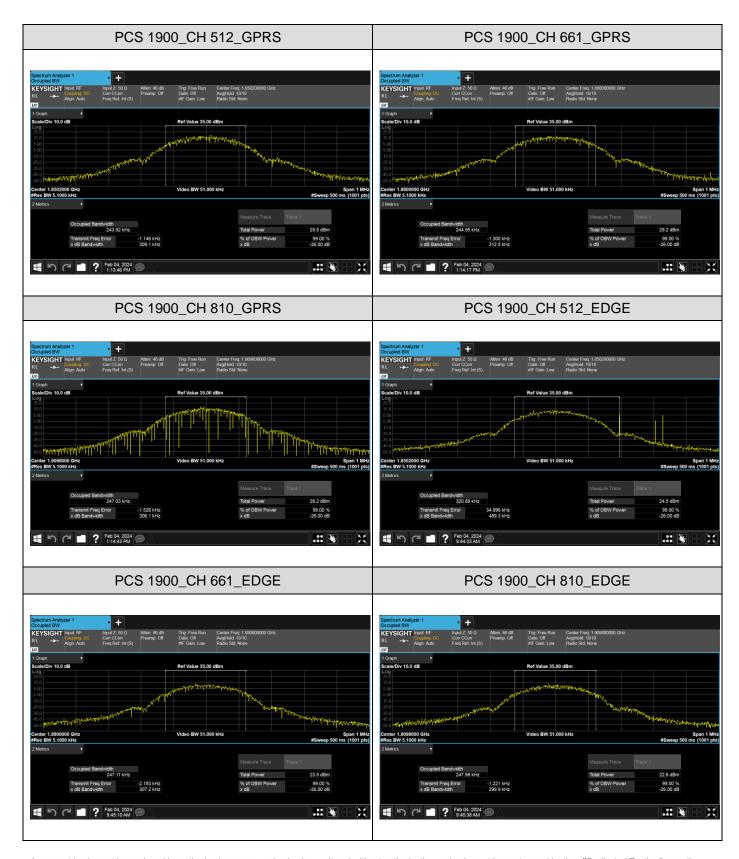




WCDMA 1900 CH 9400 RMC 12.2kbps




WCDMA 1900 CH 9262 RMC 12.2kbps




Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writhout the writhout permitted without the writhout permitted without the writhout permitted without the writing portion of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.






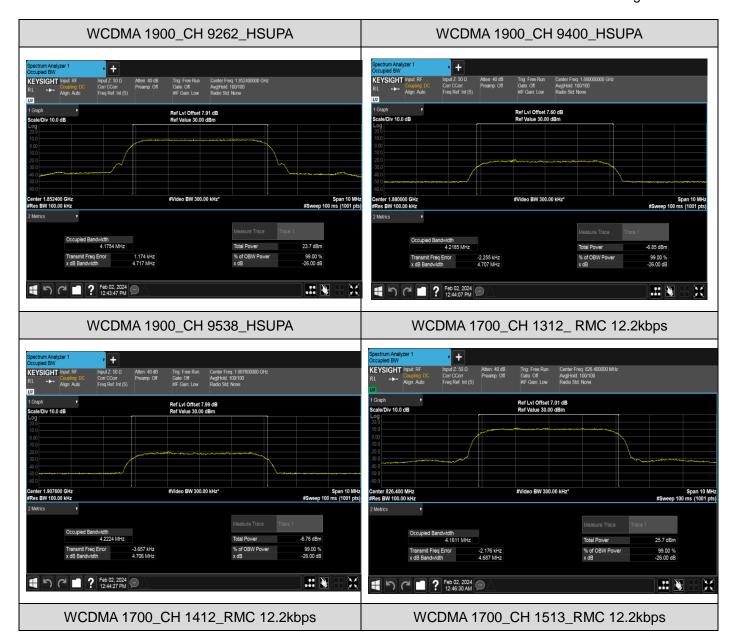






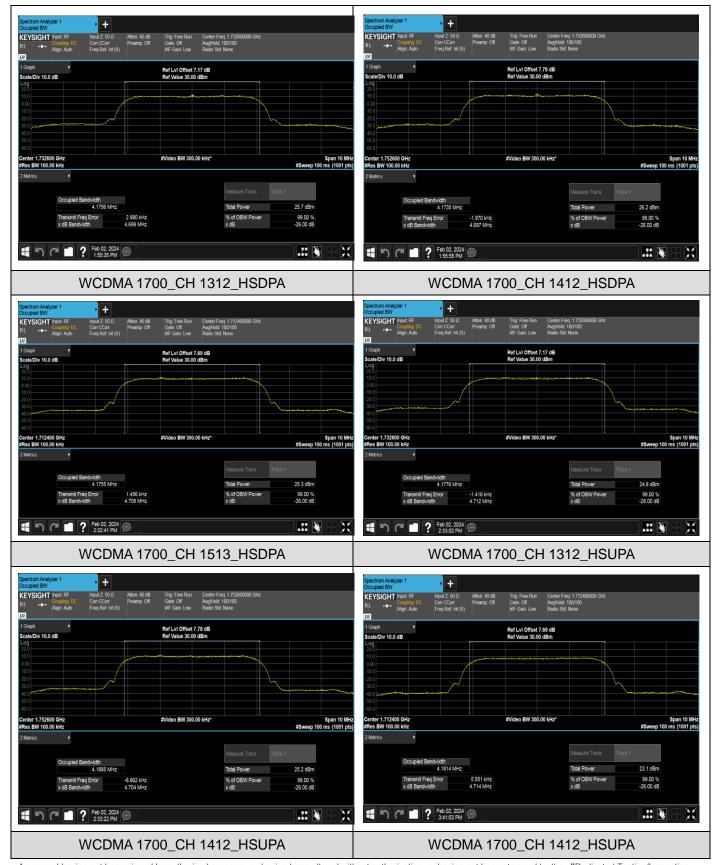


Attestation of Global Compliance(Shenzhen)Co., Ltd


Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/







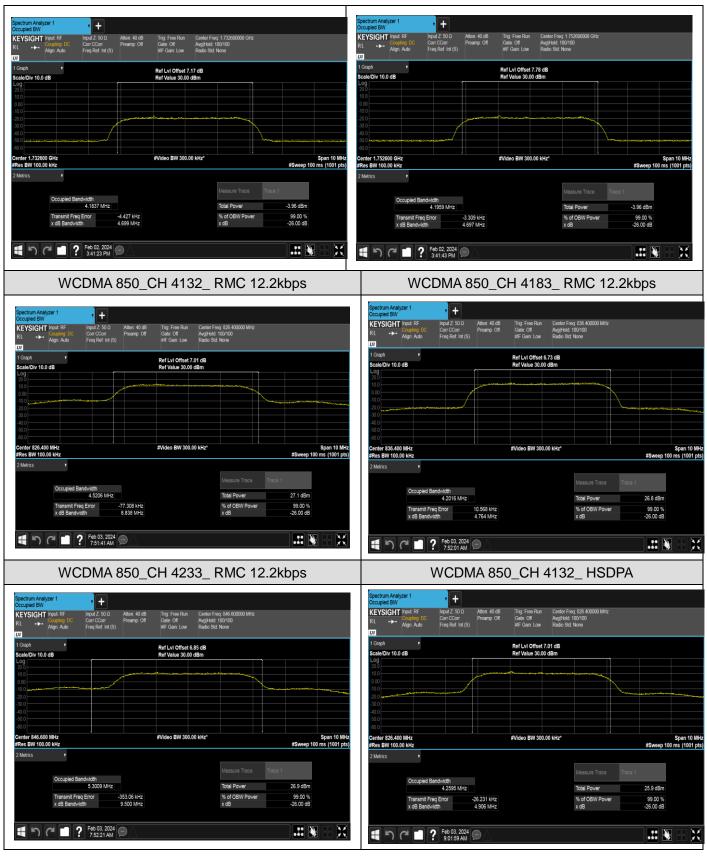






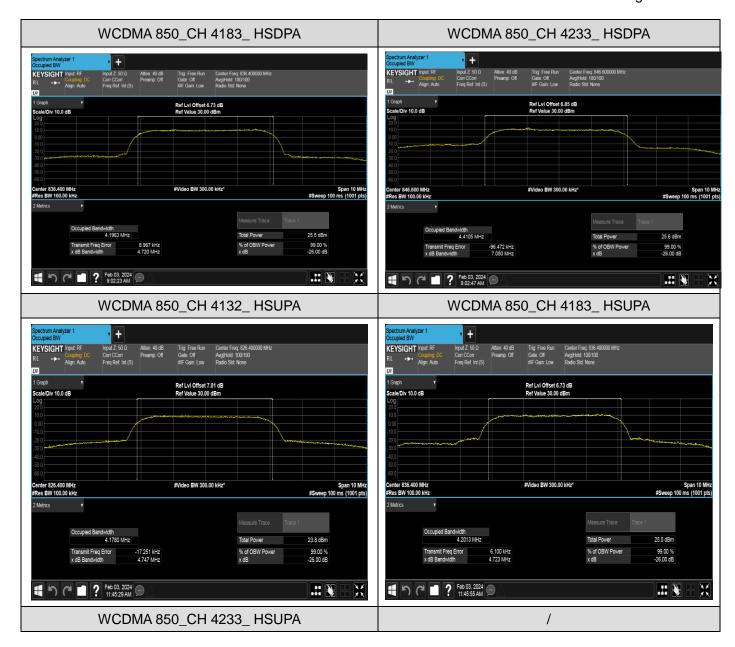





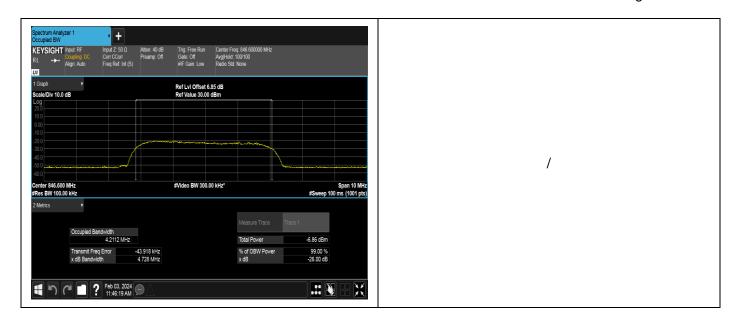



Page 43 of 112

11. Band Edge Emissions at Antenna Terminal

11.1 Provisions Applicable

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


11.2 Measurement Procedure


- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- 4. $VBW > 3 \times RBW$
- 5. Detector = RMS
- 6. Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

Test Note

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. All measurements were done at 2 channels(low and high operational frequency range.) The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

11.3 Measurement Setup

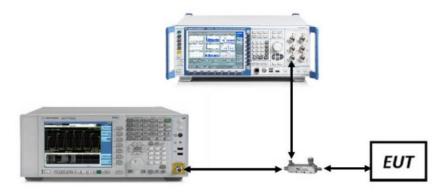





11.4 Measurement Result

