

TEST REPORT

Product : Smart Wi-Fi Dimmer Switch
Trade mark : Meross, Refoss, Flysocks
Model/Type reference : MSS560, MSS565, MSS570,
MSS565MA, MSS565RE,
MSS570MA, MSS570AD
Serial Number : N/A
Report Number : EED32M00314801
FCC ID : 2AMUU-MSWWS03
Date of Issue : Nov. 26, 2020
Test Standards : 47 CFR Part 15Subpart C
Test result : PASS

Prepared for:

Chengdu Meross Technology Co., Ltd.
Room 1312, Floor 13, Building 6-1, Zone E,
Tianfu Software Park, Gaoxin District,
Chengdu, Sichuan, China

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385

Compiled by:

Sunlight Sun

Sunlight Sun

Reviewed by:

Tom Chen

Tom Chen

Approved by:

Aaron Ma

Aaron Ma

Date:

Nov. 26, 2020



Check No.:4762165284

2 Version

Version No.	Date	Description
00	Nov. 26, 2020	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious Emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

Company Name and Address shown on Report, the sample(s) and sample Information was/ were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.

Model No.: MSS560, MSS565, MSS570, MSS565MA, MSS565RE, MSS570MA, MSS570AD.

Only the model MSS560 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference the model number of market reason.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION	8
6.1 CLIENT INFORMATION.....	8
6.2 GENERAL DESCRIPTION OF EUT.....	8
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	8
6.4 DESCRIPTION OF SUPPORT UNITS.....	10
6.5 TEST LOCATION.....	10
6.6 DEVIATION FROM STANDARDS.....	10
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	10
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	10
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, $k=2$).....	10
7 EQUIPMENT LIST	11
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	14
Appendix A): Conducted Peak Output Power.....	20
Appendix B): 6dB Occupied Bandwidth.....	22
Appendix C): Band-edge for RF Conducted Emissions.....	32
Appendix D): RF Conducted Spurious Emissions.....	37
Appendix E): Power Spectral Density.....	51
Appendix F): Antenna Requirement.....	56
Appendix G): AC Power Line Conducted Emission.....	58
Appendix H): Restricted bands around fundamental frequency (Radiated).....	61
Appendix I): Radiated Spurious Emissions.....	94
PHOTOGRAPHS OF TEST SETUP	102
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	105

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

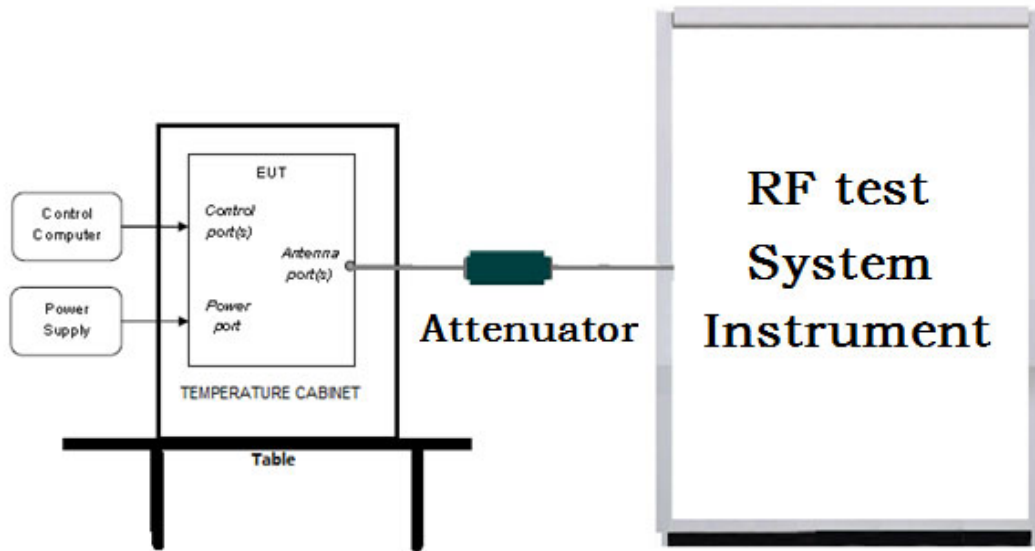

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

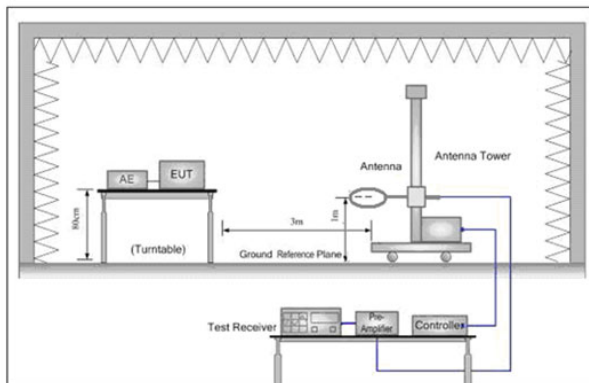


Figure 1. Below 30MHz

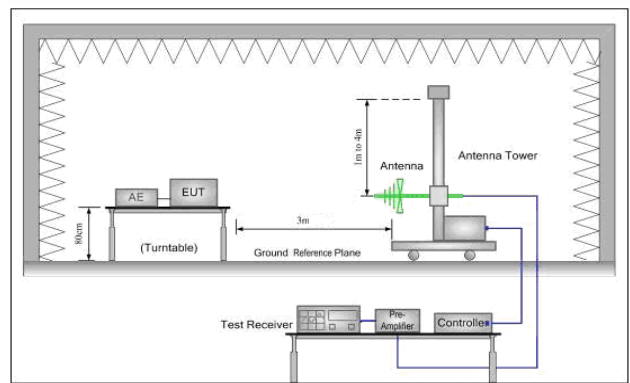


Figure 2. 30MHz to 1GHz


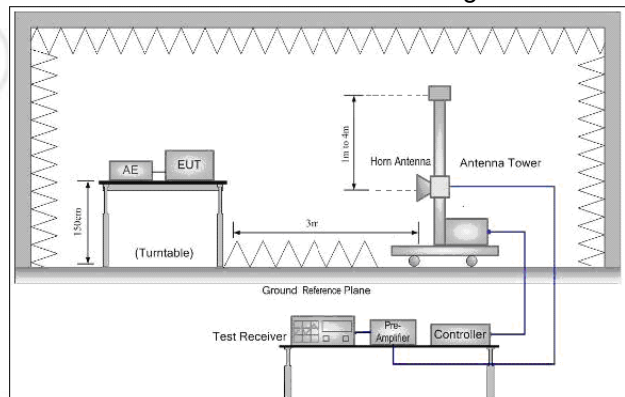


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup
Conducted Emissions setup

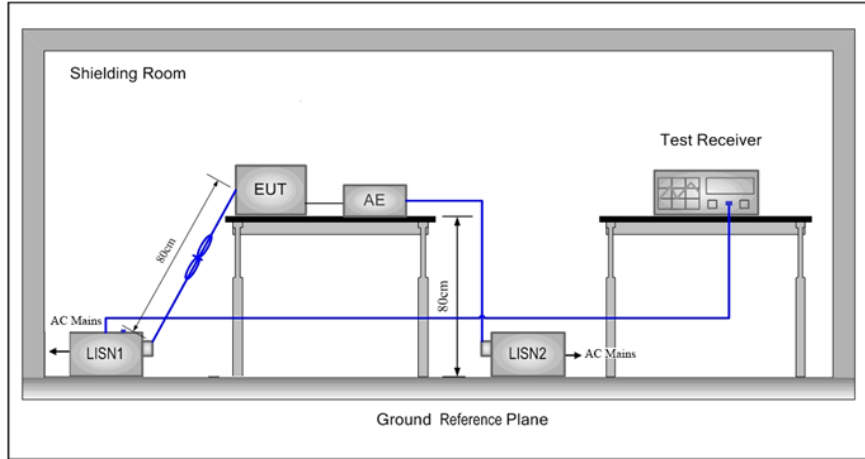

5.2 Test Environment

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11b/g/n(HT20)	2412MHz ~2462 MHz	Channel 1	Channel 6	Channel11
		2412MHz	2437MHz	2462MHz
802.11n(HT40)	2422MHz ~2452 MHz	Channel 1	Channel 4	Channel7
		2422MHz	2437MHz	2452MHz
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.			

Test mode:

Pre-scan under all rate at lowest channel 1

Mode	802.11b				X				
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps					
Power(dBm)	14.7	14.67	14.63	14.61					
Mode	802.11g								
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
Power(dBm)	14.45	14.43	14.40	14.38	14.35	14.33	14.31	14.30	
Mode	802.11n (HT20)								
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps	
Power(dBm)	13.31	13.29	13.26	13.24	13.21	13.20	13.17	13.15	
Mode	802.11n (HT40)								
Data Rate	13.5Mbps	27Mbps	40.5Mbps	54Mbps	81Mbps	108Mbps	121.5Mbps	135Mbps	
Power(dBm)	12.32	12.29	12.28	12.25	12.23	12.21	12.19	12.16	

Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).

6 General Information

6.1 Client Information

Applicant:	Chengdu Meross Technology Co., Ltd.
Address of Applicant:	Room 1312, Floor 13, Building 6-1, Zone E, Tianfu Software Park, Gaoxin District, Chengdu, Sichuan, China
Manufacturer:	Chengdu Meross Technology Co., Ltd.
Address of Manufacturer:	Room 1312, Floor 13, Building 6-1, Zone E, Tianfu Software Park, Gaoxin District, Chengdu, Sichuan, China
Factory:	CHENGDU XUGUANG TECHNOLOGY CO.,LTD.
Address of Factory:	2 Section of Park Road, Longquanyi, Chengdu, China

6.2 General Description of EUT

Product Name:	Smart Wi-Fi Dimmer Switch
Model No.(EUT):	MSS560, MSS565, MSS570, MSS565MA, MSS565RE, MSS570MA, MSS570AD
Test Model No.:	MSS560
Trade mark:	Meross, Refoss, Flysocks
EUT Supports Radios application:	IEEE 802.11 b/g/n(HT20)(HT40): 2412MHz to 2462MHz
Power Supply:	AC 120V
Sample Received Date:	Sep. 29, 2020
Sample tested Date:	Sep. 29, 2020 to Oct. 21, 2020

6.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g :OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM,QPSK,BPSK)
Test Power Grade:	Default
Test Software of EUT:	QATool_Dbg.exe
Antenna Type and Gain:	Type: PCB antenna Gain:1.5 dBi
Test Voltage:	AC 120V

Operation Frequency each of channel(802.11b/g/n HT20)								
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency	
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz	
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz	
3	2422MHz	6	2437MHz	9	2452MHz			
Operation Frequency each of channel(802.11n HT40)								
Channel	Frequency	Channel	Frequency	Channel	Frequency			
1	2422MHz	4	2437MHz	7	2452MHz			
2	2427MHz	5	2442MHz					
3	2432MHz	6	2447MHz					

6.4 Description of Support Units

The EUT has been tested with associated equipment below.

Associated equipment name		Manufacture	model	S/N serial number	Supplied by	Certification
AE1	Notebook	HP	HP ProBook 430 G3	5CG5192QSM	CTI	CE&FCC

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	02-17-2020	02-16-2021
Signal Generator	Keysight	N5182B	MY53051549	02-17-2020	02-16-2021
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	06-29-2020	06-28-2021
High-pass filter	Sinoscite	FL3CX03WG18N M12-0398-002	---	---	---
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	---	---
DC Power	Keysight	E3642A	MY56376072	02-17-2020	02-16-2021
PC-1	Lenovo	R4960d	---	---	---
BT&WI-FI Automatic control	R&S	OSP120	101374	02-17-2020	02-16-2021
RF control unit	JS Tonscend	JS0806-2	158060006	02-17-2020	02-16-2021
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	---	---	---

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-28-2020	04-27-2021
Temperature/ Humidity Indicator	Defu	TH128	/	---	---
LISN	R&S	ENV216	100098	03-05-2020	03-04-2021
Barometer	changchun	DYM3	1188	---	---

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	05-16-2020	05-15-2021
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
Receiver	R&S	ESCI7	100938-003	10-16-2020	10-15-2021
Multi device Controller	matturo	NCD/070/107 11112	---	---	---
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	06-29-2020	06-28-2021
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	---	---
Receiver	Keysight	N9038A	MY57290136	03-05-2020	03-04-2021
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-05-2020	03-04-2021
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-05-2020	03-04-2021
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980597	05-20-2020	05-19-2021
Preamplifier	EMCI	EMC001330	980563	04-22-2020	04-21-2021
Preamplifier	JS Tonscend	980380	EMC051845 SE	01-09-2020	01-08-2021
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	04-27-2020	04-26-2021
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:


Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (b)(3)	ANSI C63.10	Conducted Peak Output Power	PASS	Appendix A)
Part15C Section 15.247 (a)(2)	ANSI C63.10	6dB Occupied Bandwidth	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix I)


EUT DUTY CYCLE


Result Table


Test Mode	Antenna	Channel	Duty Cycle [%]	Limit	Verdict
11B	Ant1	2412	98.21	---	PASS
	Ant1	2437	98.75	---	PASS
	Ant1	2462	98.72	---	PASS
11G	Ant1	2412	94.18	---	PASS
	Ant1	2437	93.71	---	PASS
	Ant1	2462	94.18	---	PASS
11N20SISO	Ant1	2412	88.56	---	PASS
	Ant1	2437	90.28	---	PASS
	Ant1	2462	88.10	---	PASS
11N40SISO	Ant1	2422	83.95	---	PASS
	Ant1	2437	83.11	---	PASS
	Ant1	2452	85.96	---	PASS

Test Graph

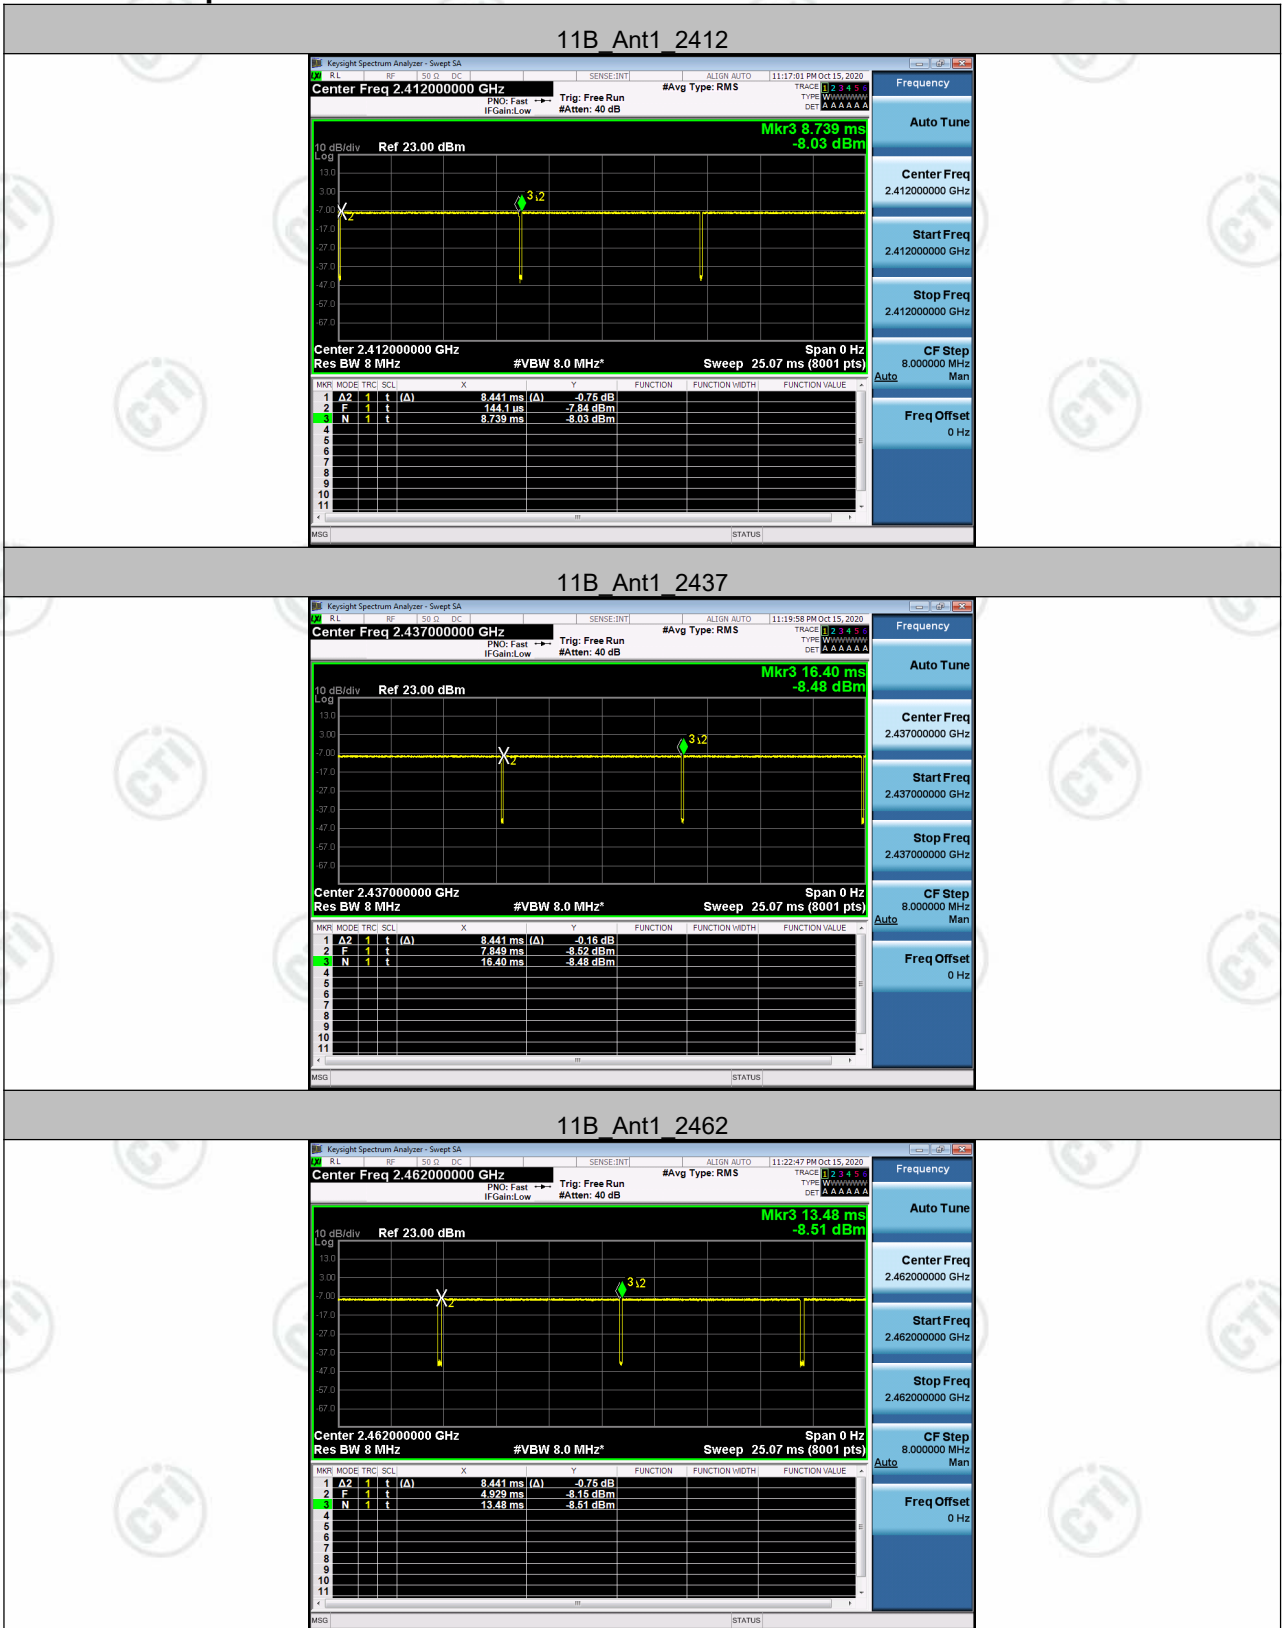

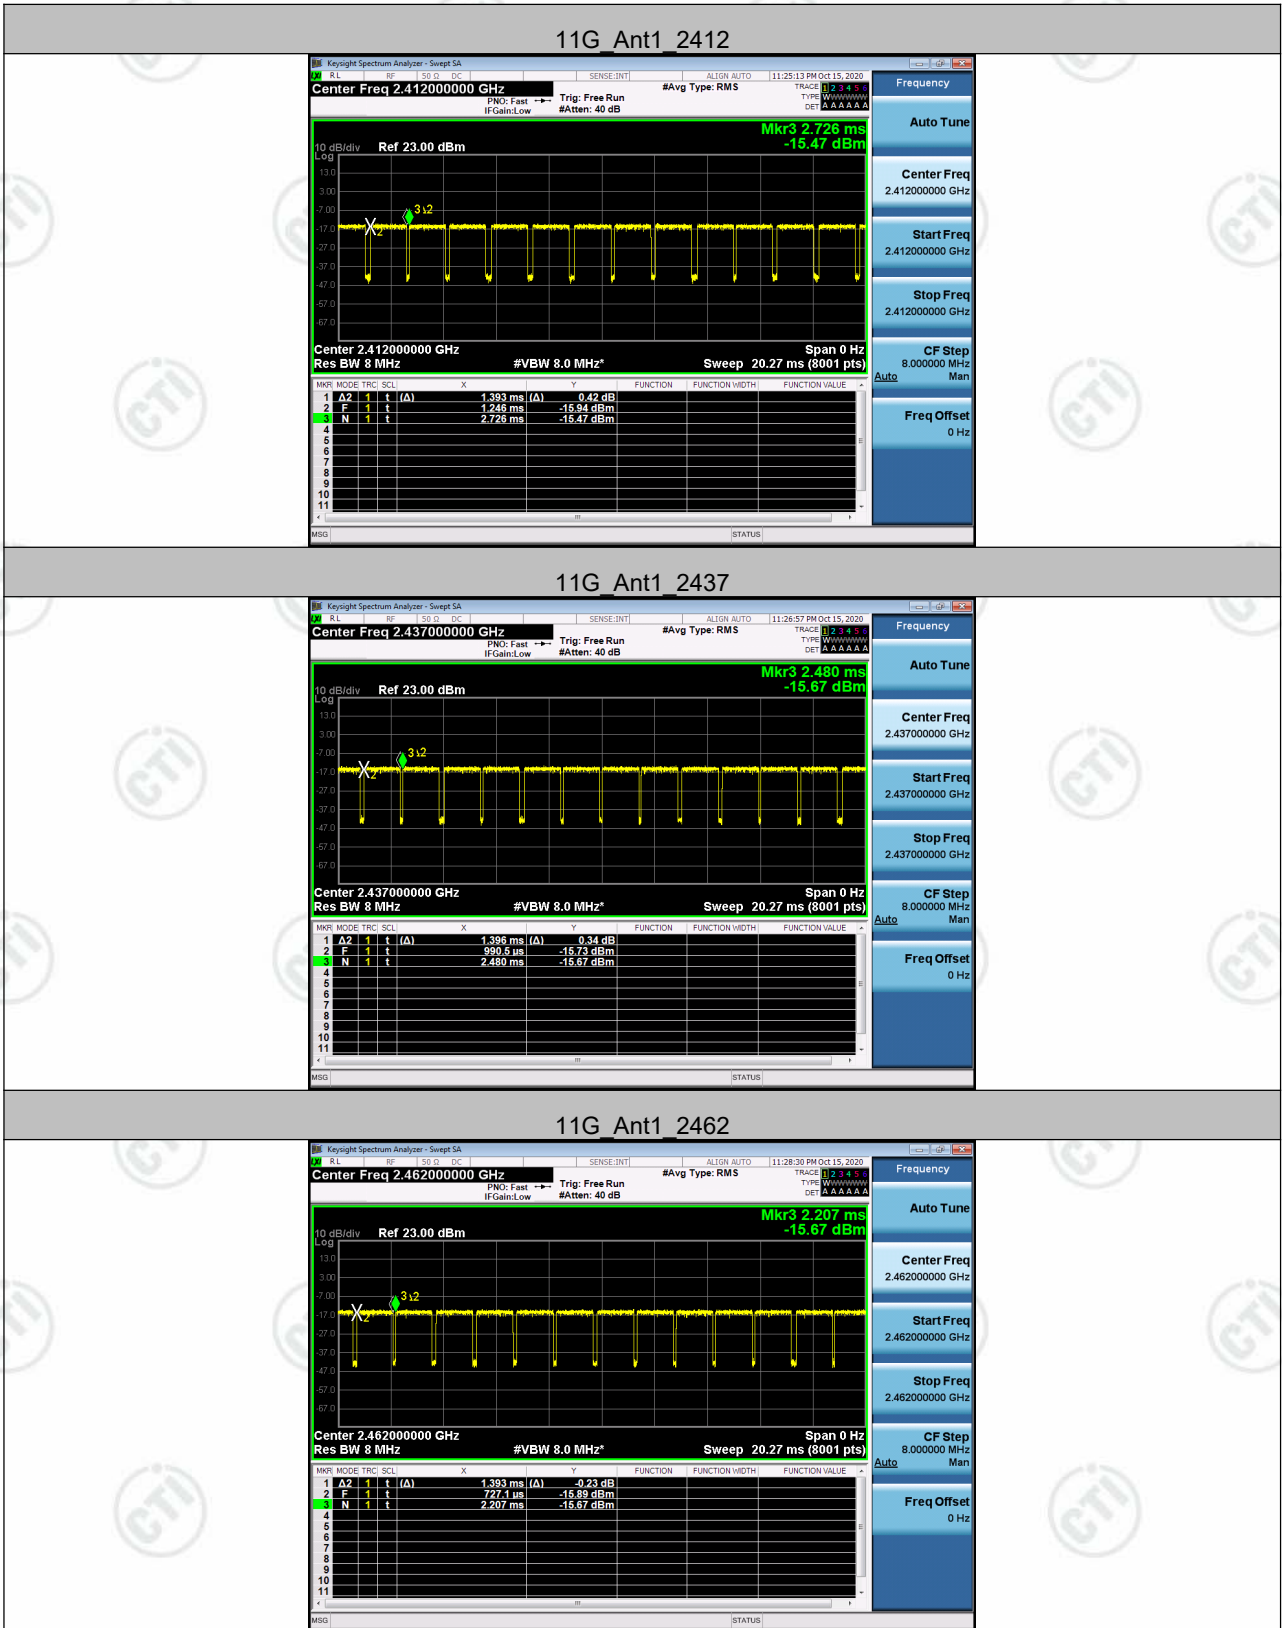

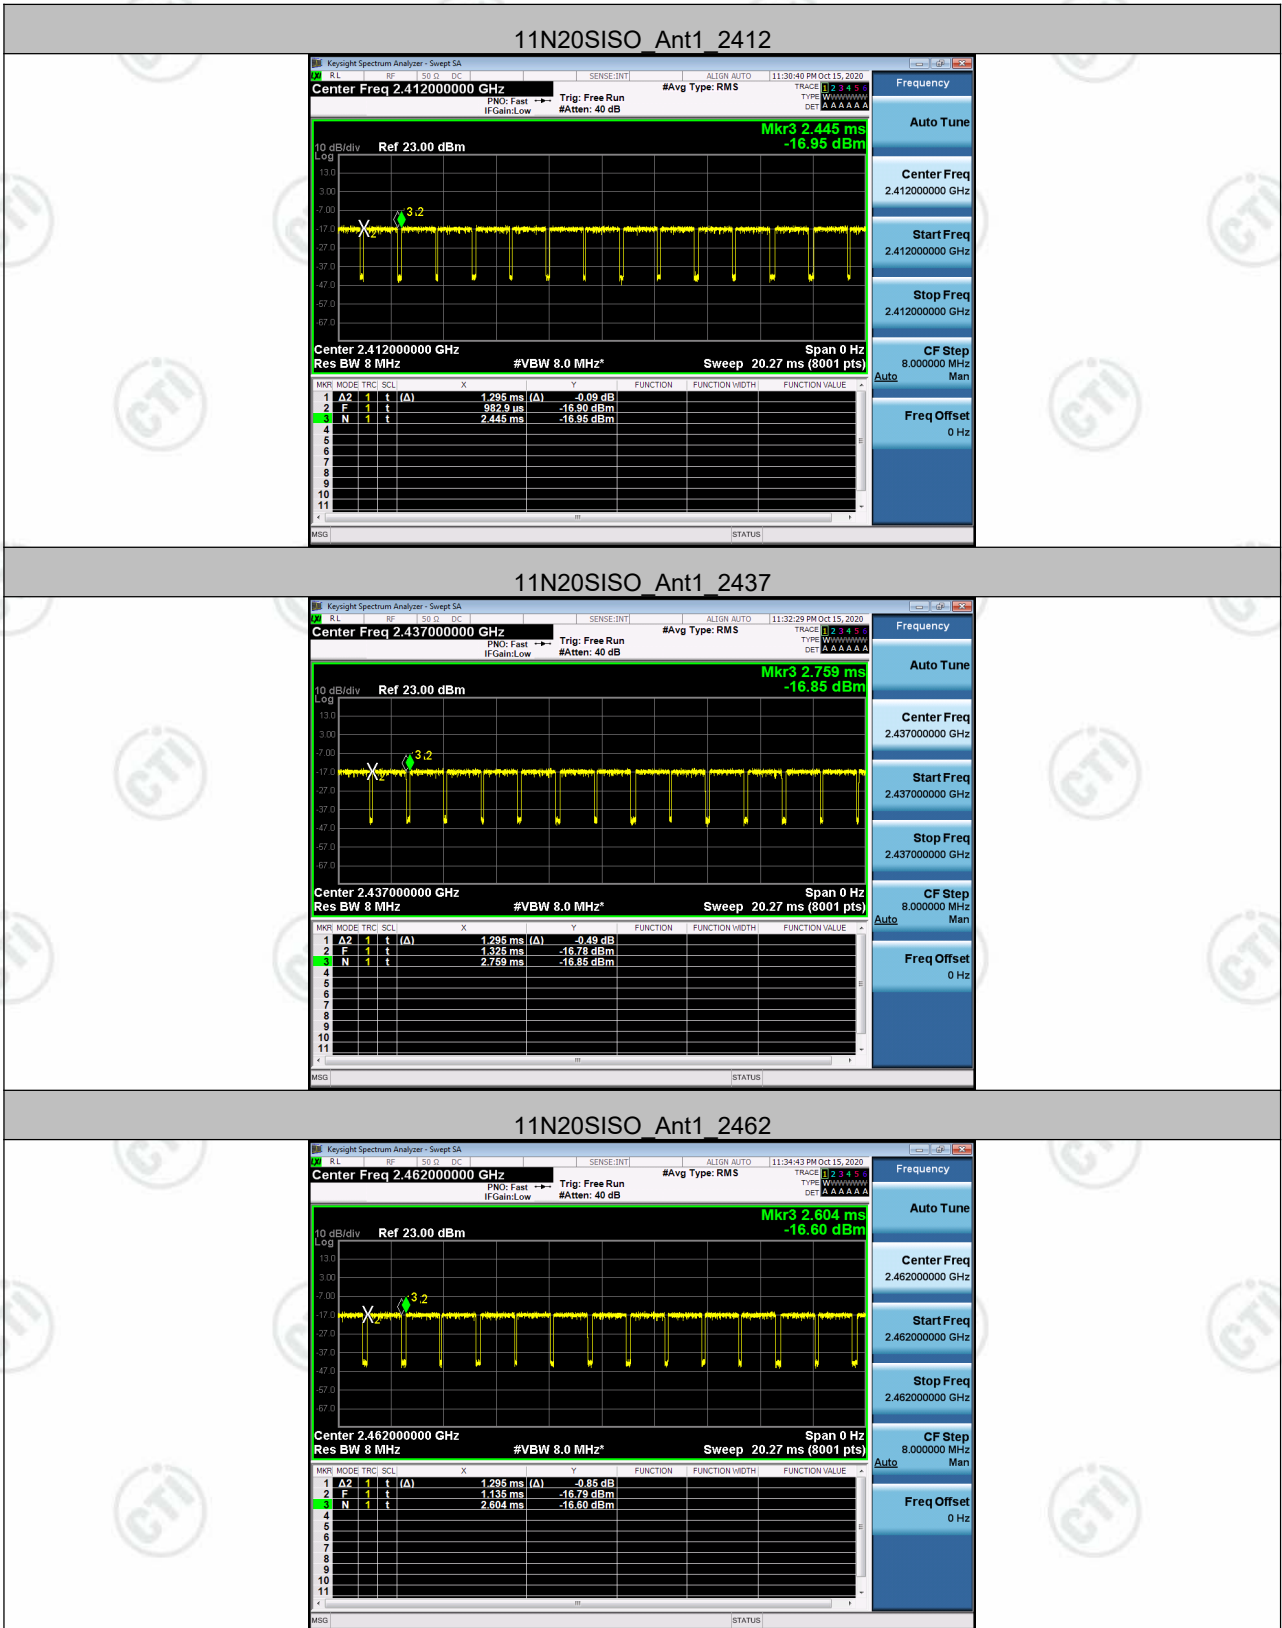

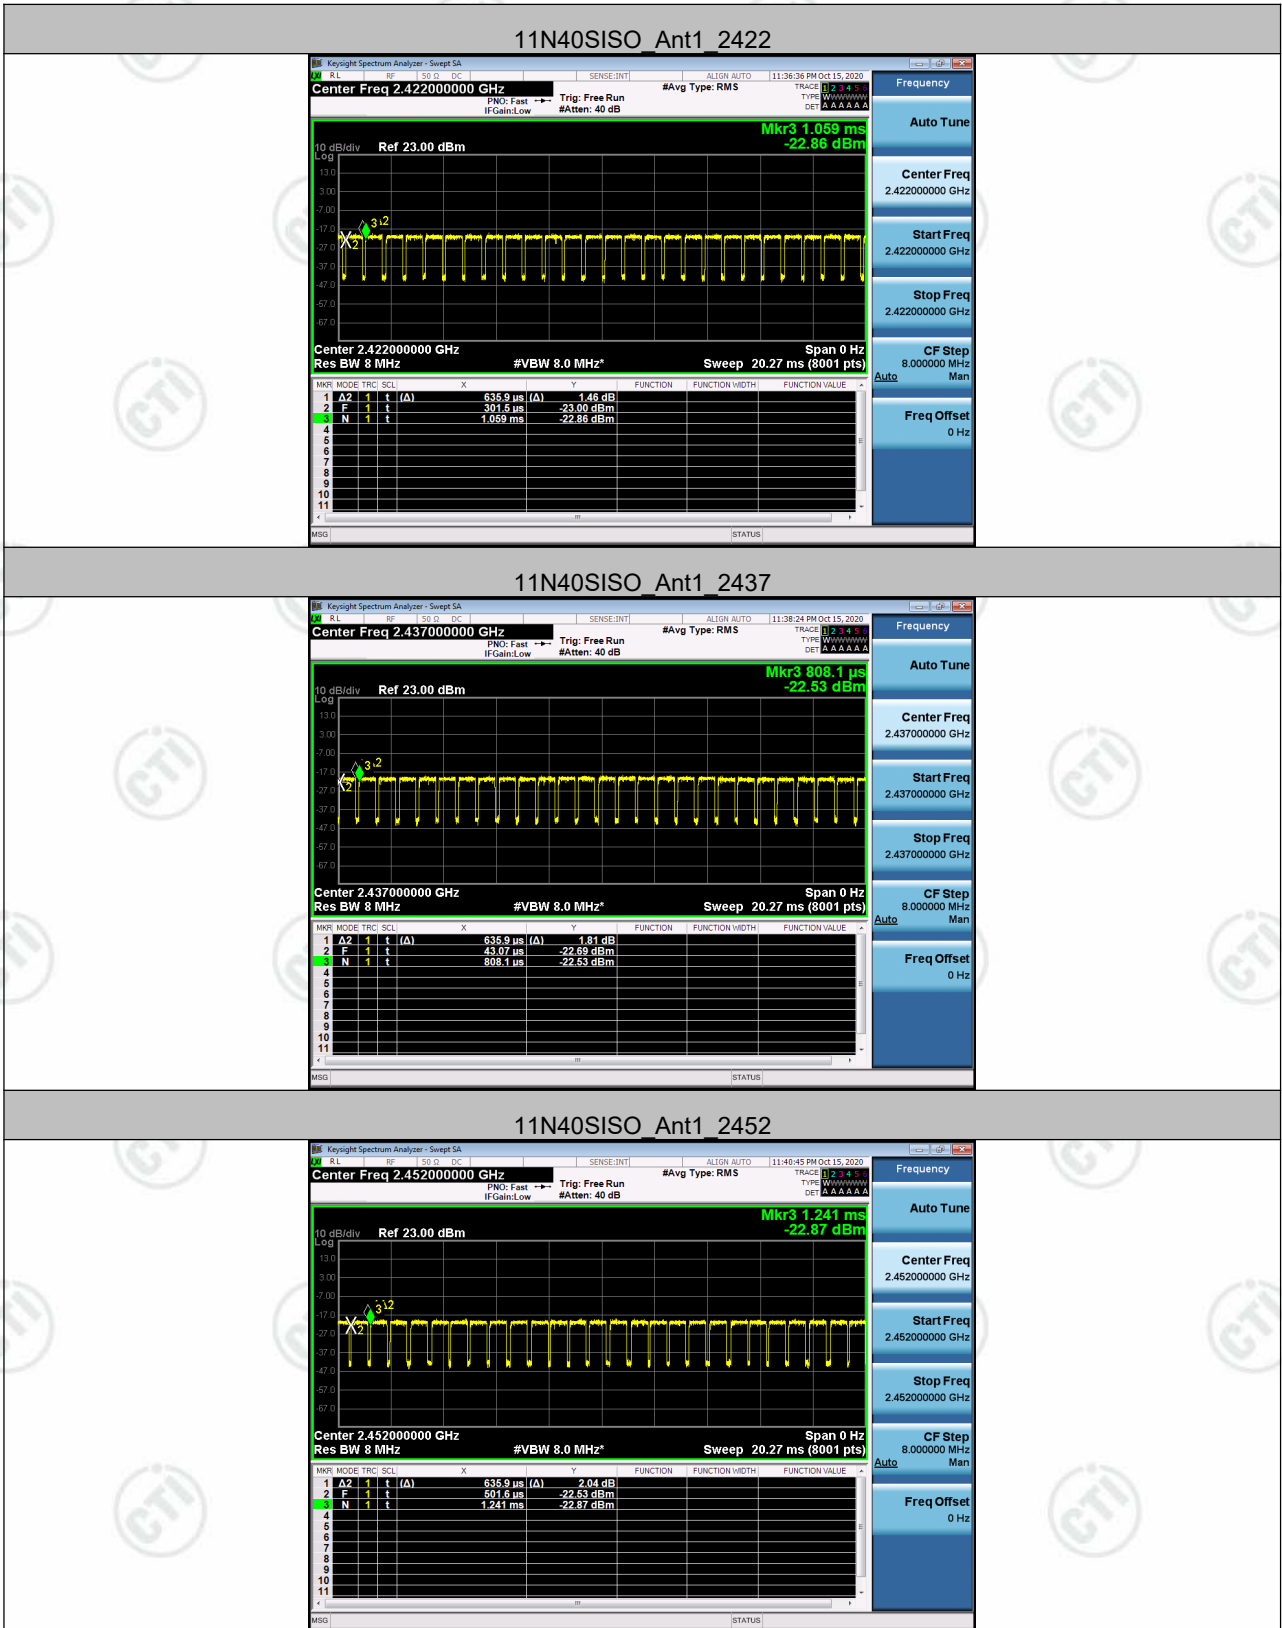

Appendix A): Conducted Peak Output Power

Test Limit

According to §15.247(b)(3),

Peak output power:

For systems using digital modulation in the 2400-2483.5 MHz: 1 Watt(30 dBm), base on the use of antennas with directional gain not exceed 6 dBi. If transmitting antennas of directional gain greater than 6dBi are used the peak output power the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi: 30dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi: [Limit = 30 – (DG – 6)] <input type="checkbox"/> Point-to-point operation:
-------	--


Average output power: For reporting purposes only.

Test Procedure

Test method Refer as KDB 558074 D01.

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

Test Setup

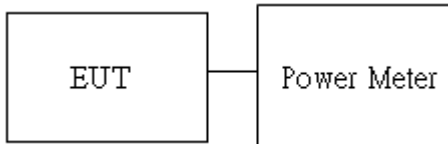

Test Result

Mode	Channel	Conducted Peak Output Power [dBm]	Verdict
11B	LCH	14.70	PASS
11B	MCH	14.54	PASS
11B	HCH	14.47	PASS
11G	LCH	14.45	PASS
11G	MCH	14.96	PASS
11G	HCH	14.86	PASS
11N20SISO	LCH	13.31	PASS
11N20SISO	MCH	13.83	PASS
11N20SISO	HCH	13.68	PASS
11N40SISO	LCH	12.32	PASS
11N40SISO	MCH	12.43	PASS
11N40SISO	HCH	12.50	PASS

Appendix B): 6dB Occupied Bandwidth

Test Limit

According to §15.247(a)(2),

6 dB Bandwidth :

Limit	Shall be at least 500kHz
-------	--------------------------


Occupied Bandwidth(99%) : For reporting purposes only.

Test Procedure

Test method Refer as KDB 558074 D01 and ANSI C63.10: 2013 clause 6.9.2,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW =100KHz , VBW = 300KHz and Detector = Peak, to measurement 6dB Bandwidth
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth
5. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

Test Setup

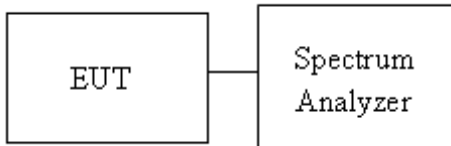


Test Result

Mode	Channel	6dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
11B	LCH	9.096	14.457	PASS
11B	MCH	9.111	14.323	PASS
11B	HCH	10.02	14.396	PASS
11G	LCH	15.11	16.703	PASS
11G	MCH	15.06	16.675	PASS
11G	HCH	15.07	16.746	PASS
11N20SISO	LCH	15.10	17.630	PASS
11N20SISO	MCH	15.10	17.600	PASS
11N20SISO	HCH	15.09	17.675	PASS
11N40SISO	LCH	35.11	36.069	PASS
11N40SISO	MCH	35.03	35.967	PASS
11N40SISO	HCH	33.85	36.085	PASS




Test Graph

6 dB Bandwidth

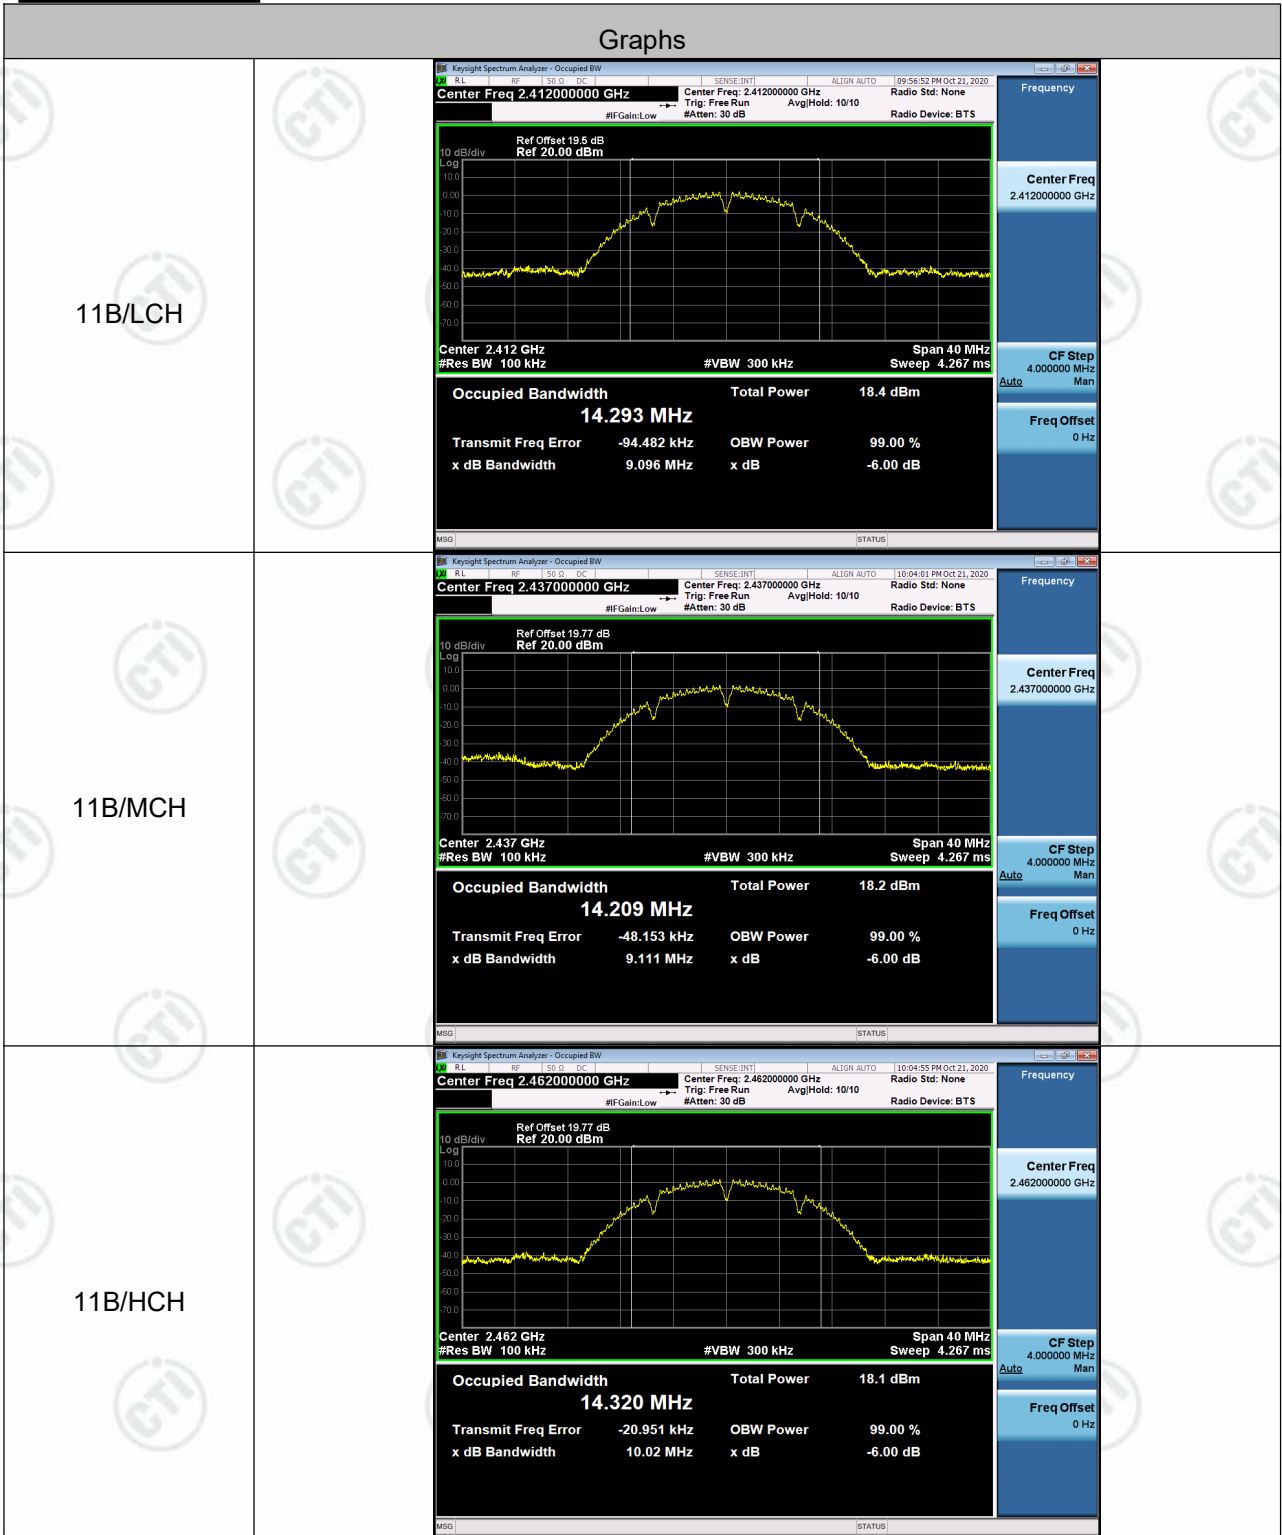


<p>11G/LCH</p>	<p>Center Freq 2.41200000 GHz</p> <p>Ref Offset 19.5 dB Ref 20.00 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 16.308 MHz</p> <p>Total Power 12.9 dBm</p> <p>Transmit Freq Error -47.400 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 15.11 MHz x dB -6.00 dB</p>
<p>11G/MCH</p>	<p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 16.302 MHz</p> <p>Total Power 13.3 dBm</p> <p>Transmit Freq Error -47.160 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 15.06 MHz x dB -6.00 dB</p>
<p>11G/HCH</p>	<p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 16.328 MHz</p> <p>Total Power 13.2 dBm</p> <p>Transmit Freq Error -46.394 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 15.07 MHz x dB -6.00 dB</p>

<p>11N20SISO/LCH</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 19.5 dB Ref 20.00 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 17.494 MHz Total Power 11.8 dBm</p> <p>Transmit Freq Error -49.456 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 15.10 MHz x dB -6.00 dB</p>
<p>11N20SISO/MCH</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 17.487 MHz Total Power 12.2 dBm</p> <p>Transmit Freq Error -46.449 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 15.10 MHz x dB -6.00 dB</p>
<p>11N20SISO/HCH</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 17.505 MHz Total Power 12.2 dBm</p> <p>Transmit Freq Error -46.088 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 15.09 MHz x dB -6.00 dB</p>

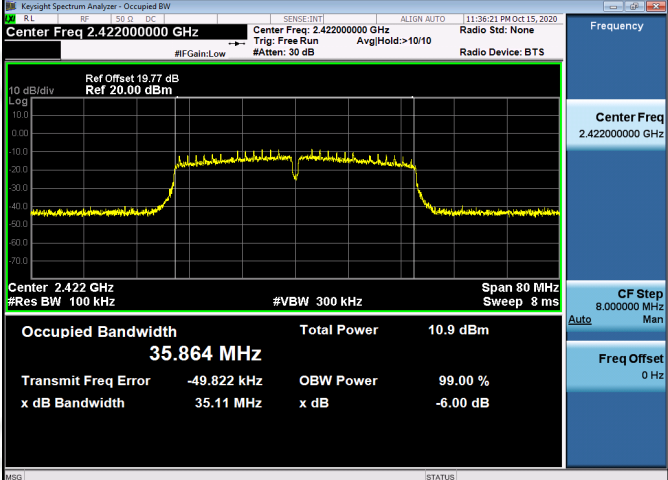
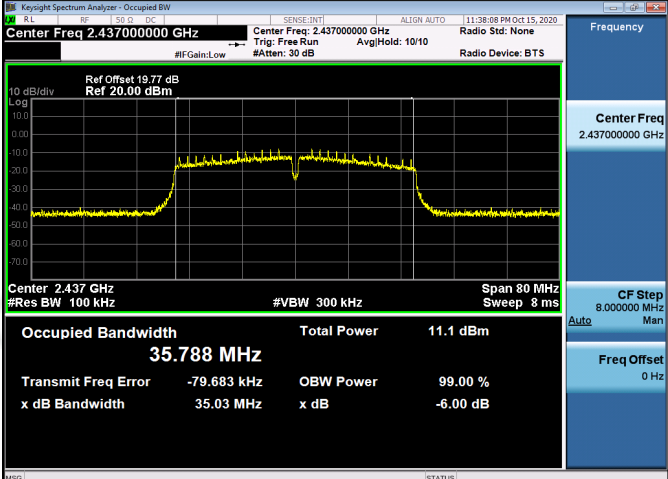
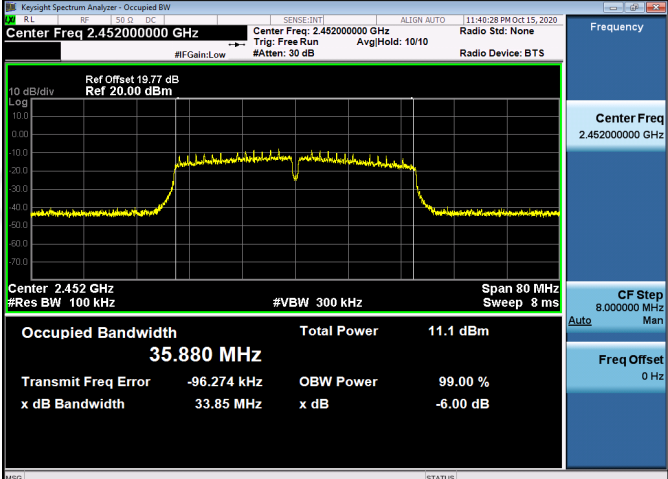
<p>11N40SISO/LCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.42200000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.422 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 35.864 MHz</p> <p>Total Power 10.9 dBm</p> <p>Transmit Freq Error -49.822 kHz</p> <p>x dB Bandwidth 35.11 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>
<p>11N40SISO/MCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 35.788 MHz</p> <p>Total Power 11.1 dBm</p> <p>Transmit Freq Error -79.683 kHz</p> <p>x dB Bandwidth 35.03 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>
<p>11N40SISO/HCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.452000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.452 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 35.880 MHz</p> <p>Total Power 11.1 dBm</p> <p>Transmit Freq Error -96.274 kHz</p> <p>x dB Bandwidth 33.85 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>

Occupied Bandwidth(99%)

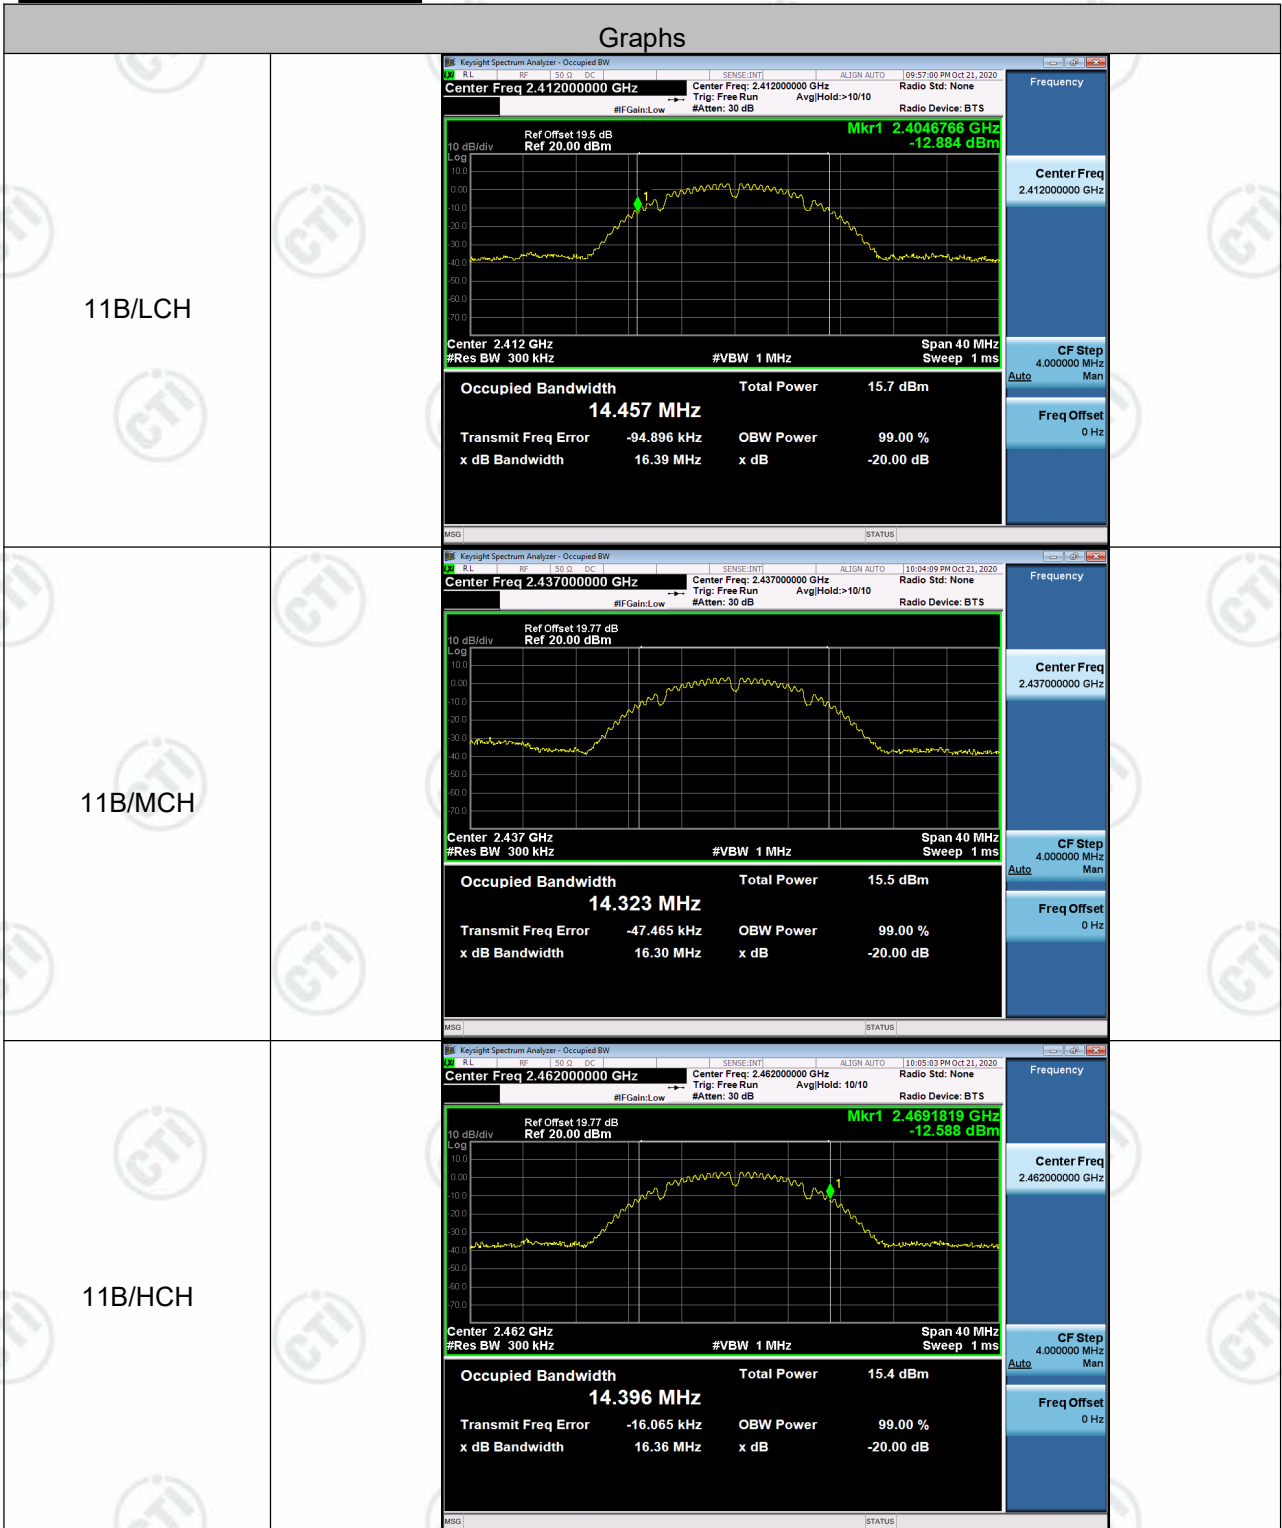

<p>11G/LCH</p>	<p>Center Freq 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Mkr1 2.4035724 GHz -10.635 dBm</p> <p>Ref Offset: 19.8 dB Ref 20.00 dBm</p> <p>Center 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.3 dBm</td> </tr> <tr> <td colspan="3">16.703 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-76.105 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>18.81 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	13.3 dBm	16.703 MHz			Transmit Freq Error	OBW Power	99.00 %	-76.105 kHz			x dB Bandwidth	x dB	-20.00 dB	18.81 MHz		
Occupied Bandwidth	Total Power	13.3 dBm																	
16.703 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-76.105 kHz																			
x dB Bandwidth	x dB	-20.00 dB																	
18.81 MHz																			
<p>11G/MCH</p>	<p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.7 dBm</td> </tr> <tr> <td colspan="3">16.675 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-83.975 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>18.82 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	13.7 dBm	16.675 MHz			Transmit Freq Error	OBW Power	99.00 %	-83.975 kHz			x dB Bandwidth	x dB	-20.00 dB	18.82 MHz		
Occupied Bandwidth	Total Power	13.7 dBm																	
16.675 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-83.975 kHz																			
x dB Bandwidth	x dB	-20.00 dB																	
18.82 MHz																			
<p>11G/HCH</p>	<p>Center Freq 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Mkr1 2.4703144 GHz -10.627 dBm</p> <p>Ref Offset: 19.77 dB Ref 20.00 dBm</p> <p>Center 2.462 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.7 dBm</td> </tr> <tr> <td colspan="3">16.746 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-58.610 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>18.87 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	13.7 dBm	16.746 MHz			Transmit Freq Error	OBW Power	99.00 %	-58.610 kHz			x dB Bandwidth	x dB	-20.00 dB	18.87 MHz		
Occupied Bandwidth	Total Power	13.7 dBm																	
16.746 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-58.610 kHz																			
x dB Bandwidth	x dB	-20.00 dB																	
18.87 MHz																			

<p>11N20SISO/LCH</p>	 <p>Center Freq 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Mkr1 2.4031404 GHz -10.366 dBm</p> <p>Ref Offset: 19.8 dB Ref 20.00 dBm</p> <p>Center 2.412 GHz #Res BW 300 kHz</p> <p>#VBW 1 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.3 dBm</td> </tr> <tr> <td>17.630 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-44.580 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>19.30 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.3 dBm	17.630 MHz			Transmit Freq Error	OBW Power	99.00 %	-44.580 kHz			x dB Bandwidth	x dB	-20.00 dB	19.30 MHz		
Occupied Bandwidth	Total Power	12.3 dBm																	
17.630 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-44.580 kHz																			
x dB Bandwidth	x dB	-20.00 dB																	
19.30 MHz																			
<p>11N20SISO/MCH</p>	 <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 300 kHz</p> <p>#VBW 1 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.8 dBm</td> </tr> <tr> <td>17.600 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-45.579 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>19.27 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.8 dBm	17.600 MHz			Transmit Freq Error	OBW Power	99.00 %	-45.579 kHz			x dB Bandwidth	x dB	-20.00 dB	19.27 MHz		
Occupied Bandwidth	Total Power	12.8 dBm																	
17.600 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-45.579 kHz																			
x dB Bandwidth	x dB	-20.00 dB																	
19.27 MHz																			
<p>11N20SISO/HCH</p>	 <p>Center Freq 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Mkr1 2.4708073 GHz -10.985 dBm</p> <p>Ref Offset: 19.77 dB Ref 20.00 dBm</p> <p>Center 2.462 GHz #Res BW 300 kHz</p> <p>#VBW 1 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.6 dBm</td> </tr> <tr> <td>17.675 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-30.219 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>19.43 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.6 dBm	17.675 MHz			Transmit Freq Error	OBW Power	99.00 %	-30.219 kHz			x dB Bandwidth	x dB	-20.00 dB	19.43 MHz		
Occupied Bandwidth	Total Power	12.6 dBm																	
17.675 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-30.219 kHz																			
x dB Bandwidth	x dB	-20.00 dB																	
19.43 MHz																			
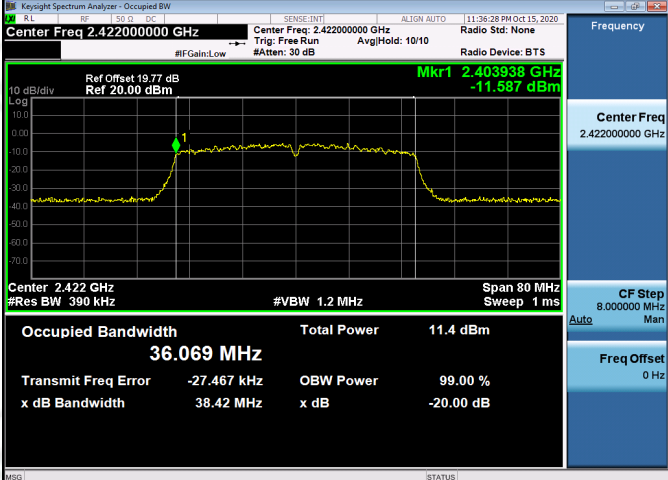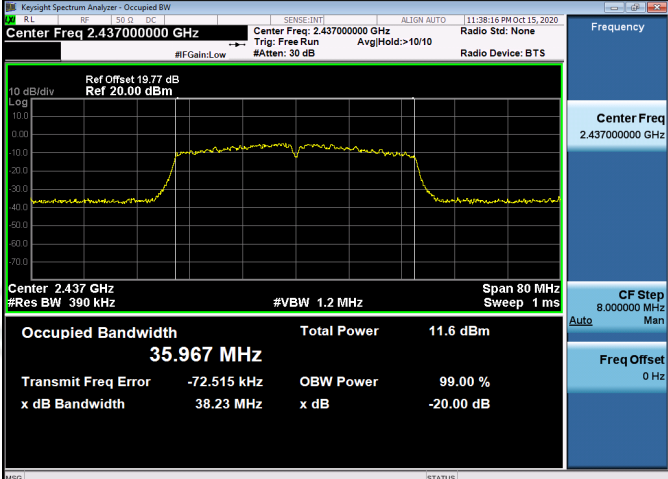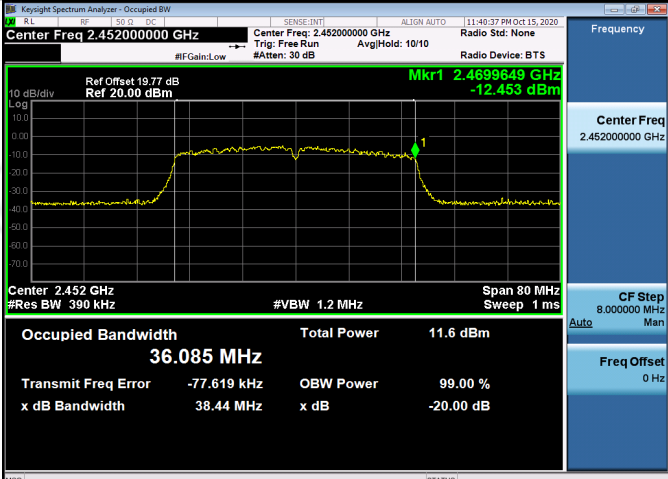
<p>11N40SISO/LCH</p>	 <p>Center Freq 2.422000000 GHz</p> <p>Center Freq: 2.422000000 GHz</p> <p>Mkr1 2.403938 GHz -11.587 dBm</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.422 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 36.069 MHz Total Power 11.4 dBm</p> <p>Transmit Freq Error -27.467 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 38.42 MHz x dB -20.00 dB</p>
<p>11N40SISO/MCH</p>	 <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 35.967 MHz Total Power 11.6 dBm</p> <p>Transmit Freq Error -72.515 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 38.23 MHz x dB -20.00 dB</p>
<p>11N40SISO/HCH</p>	 <p>Center Freq 2.452000000 GHz</p> <p>Center Freq: 2.452000000 GHz</p> <p>Mkr1 2.4699649 GHz -12.453 dBm</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.452 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 36.085 MHz Total Power 11.6 dBm</p> <p>Transmit Freq Error -77.619 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 38.44 MHz x dB -20.00 dB</p>

Appendix C): Band-edge for RF Conducted Emissions

Test Limit

According to §15.247(d),

In any 100 kHz bandwidth outside the authorized frequency band,

Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Test Procedure

Test method Refer as KDB 558074 D01.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


Test Setup




Result Table

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
11B	LCH	2.126	-49.951	-27.87	PASS
11B	HCH	1.808	-49.782	-28.19	PASS
11G	LCH	-3.180	-49.469	-33.18	PASS
11G	HCH	-2.792	-48.070	-32.79	PASS
11N20SISO	LCH	-5.044	-49.652	-35.04	PASS
11N20SISO	HCH	-3.764	-49.736	-33.76	PASS
11N40SISO	LCH	-8.377	-49.824	-38.38	PASS
11N40SISO	HCH	-8.600	-49.828	-38.6	PASS

Test Graph

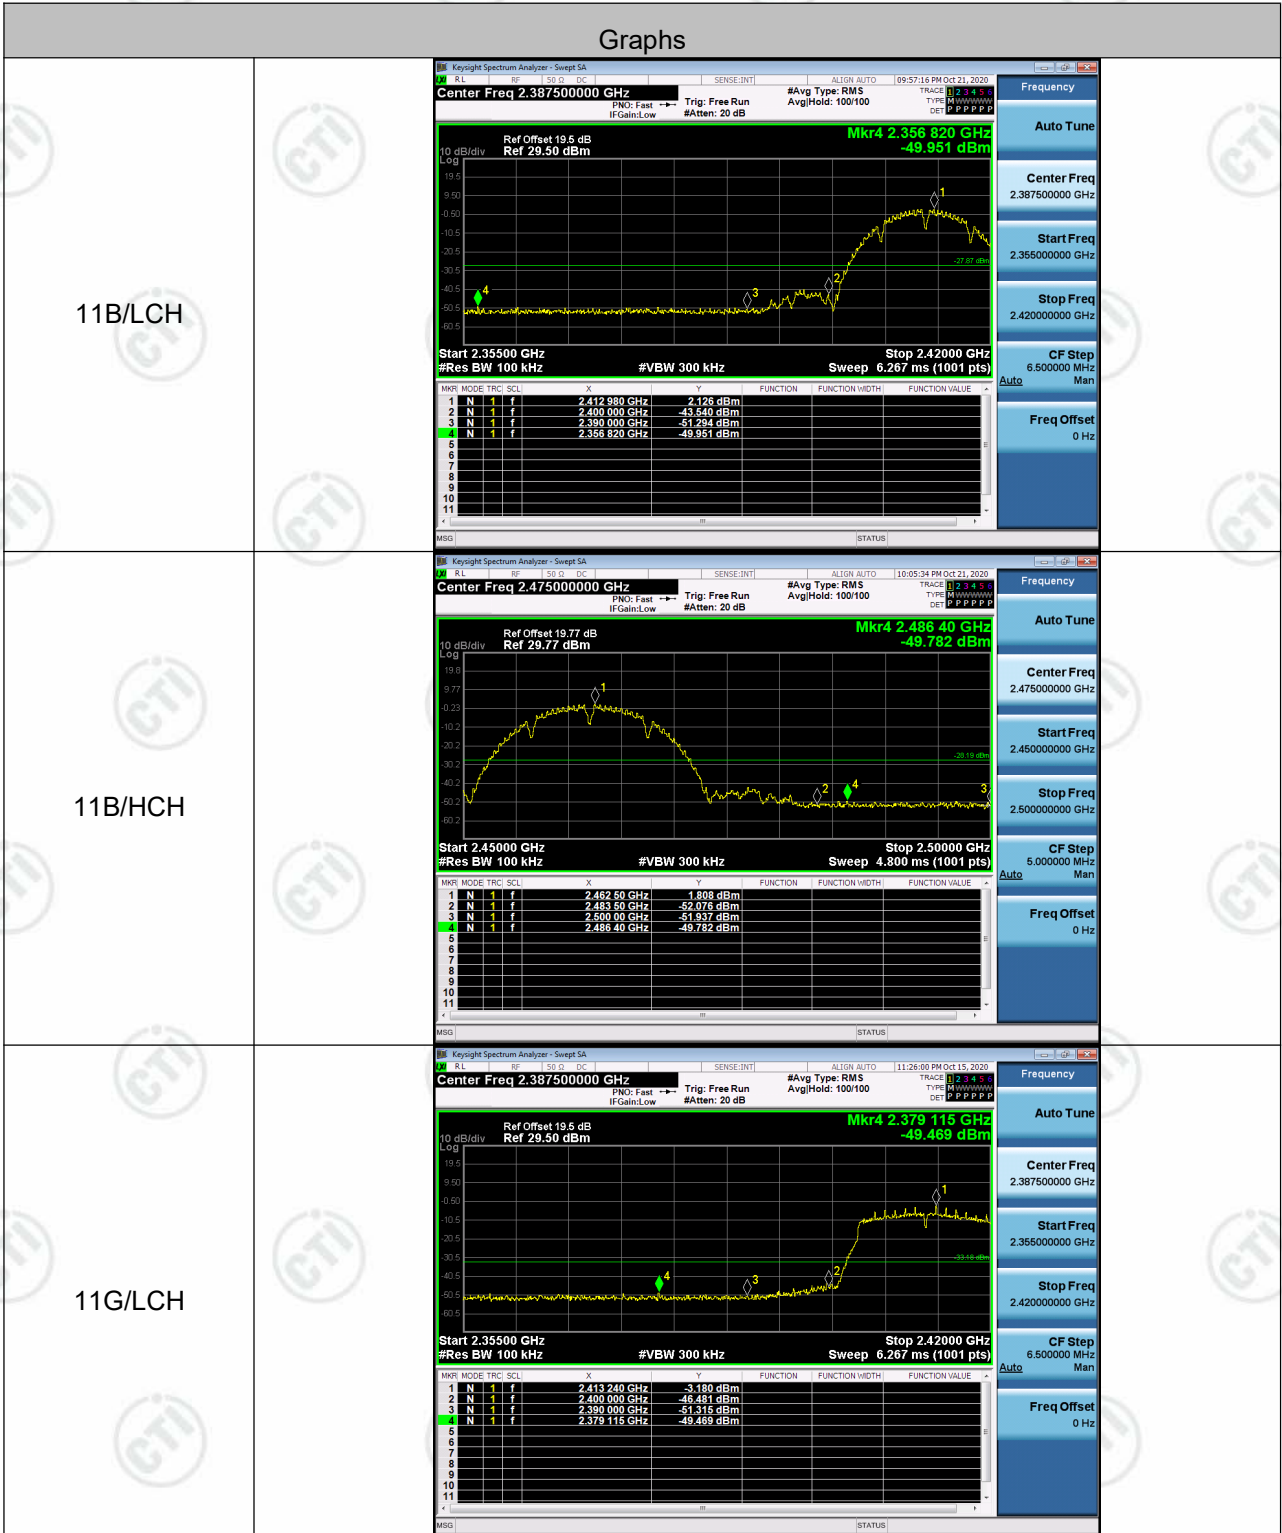

<p>11G/HCH</p>	<p>Key Screenshot Data:</p> <ul style="list-style-type: none"> Center Freq: 2.475000000 GHz Mkr4 2.497 20 GHz -48.070 dBm Start Freq: 2.450000000 GHz Stop Freq: 2.500000000 GHz Sweep: 4.800 ms (1001 pts) <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.463 25 GHz</td> <td>-2.792 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 50 GHz</td> <td>-50.892 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 00 GHz</td> <td>-50.872 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.497 20 GHz</td> <td>-48.070 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.463 25 GHz	-2.792 dBm				2	N	1	f	2.483 50 GHz	-50.892 dBm				3	N	1	f	2.500 00 GHz	-50.872 dBm				4	N	1	f	2.497 20 GHz	-48.070 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.463 25 GHz	-2.792 dBm																																									
2	N	1	f	2.483 50 GHz	-50.892 dBm																																									
3	N	1	f	2.500 00 GHz	-50.872 dBm																																									
4	N	1	f	2.497 20 GHz	-48.070 dBm																																									
<p>11N20SISO/LCH</p>	<p>Key Screenshot Data:</p> <ul style="list-style-type: none"> Center Freq: 2.387500000 GHz Mkr4 2.363 060 GHz -49.652 dBm Start Freq: 2.355000000 GHz Stop Freq: 2.420000000 GHz Sweep: 6.267 ms (1001 pts) <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.413 175 GHz</td> <td>-5.044 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-48.238 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-50.508 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.363 060 GHz</td> <td>-49.652 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.413 175 GHz	-5.044 dBm				2	N	1	f	2.400 000 GHz	-48.238 dBm				3	N	1	f	2.390 000 GHz	-50.508 dBm				4	N	1	f	2.363 060 GHz	-49.652 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.413 175 GHz	-5.044 dBm																																									
2	N	1	f	2.400 000 GHz	-48.238 dBm																																									
3	N	1	f	2.390 000 GHz	-50.508 dBm																																									
4	N	1	f	2.363 060 GHz	-49.652 dBm																																									
<p>11N20SISO/HCH</p>	<p>Key Screenshot Data:</p> <ul style="list-style-type: none"> Center Freq: 2.475000000 GHz Mkr4 2.488 10 GHz -49.736 dBm Start Freq: 2.450000000 GHz Stop Freq: 2.500000000 GHz Sweep: 4.800 ms (1001 pts) <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 20 GHz</td> <td>-3.764 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 50 GHz</td> <td>-52.293 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 00 GHz</td> <td>-52.253 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.488 10 GHz</td> <td>-49.736 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.483 20 GHz	-3.764 dBm				2	N	1	f	2.483 50 GHz	-52.293 dBm				3	N	1	f	2.500 00 GHz	-52.253 dBm				4	N	1	f	2.488 10 GHz	-49.736 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.483 20 GHz	-3.764 dBm																																									
2	N	1	f	2.483 50 GHz	-52.293 dBm																																									
3	N	1	f	2.500 00 GHz	-52.253 dBm																																									
4	N	1	f	2.488 10 GHz	-49.736 dBm																																									

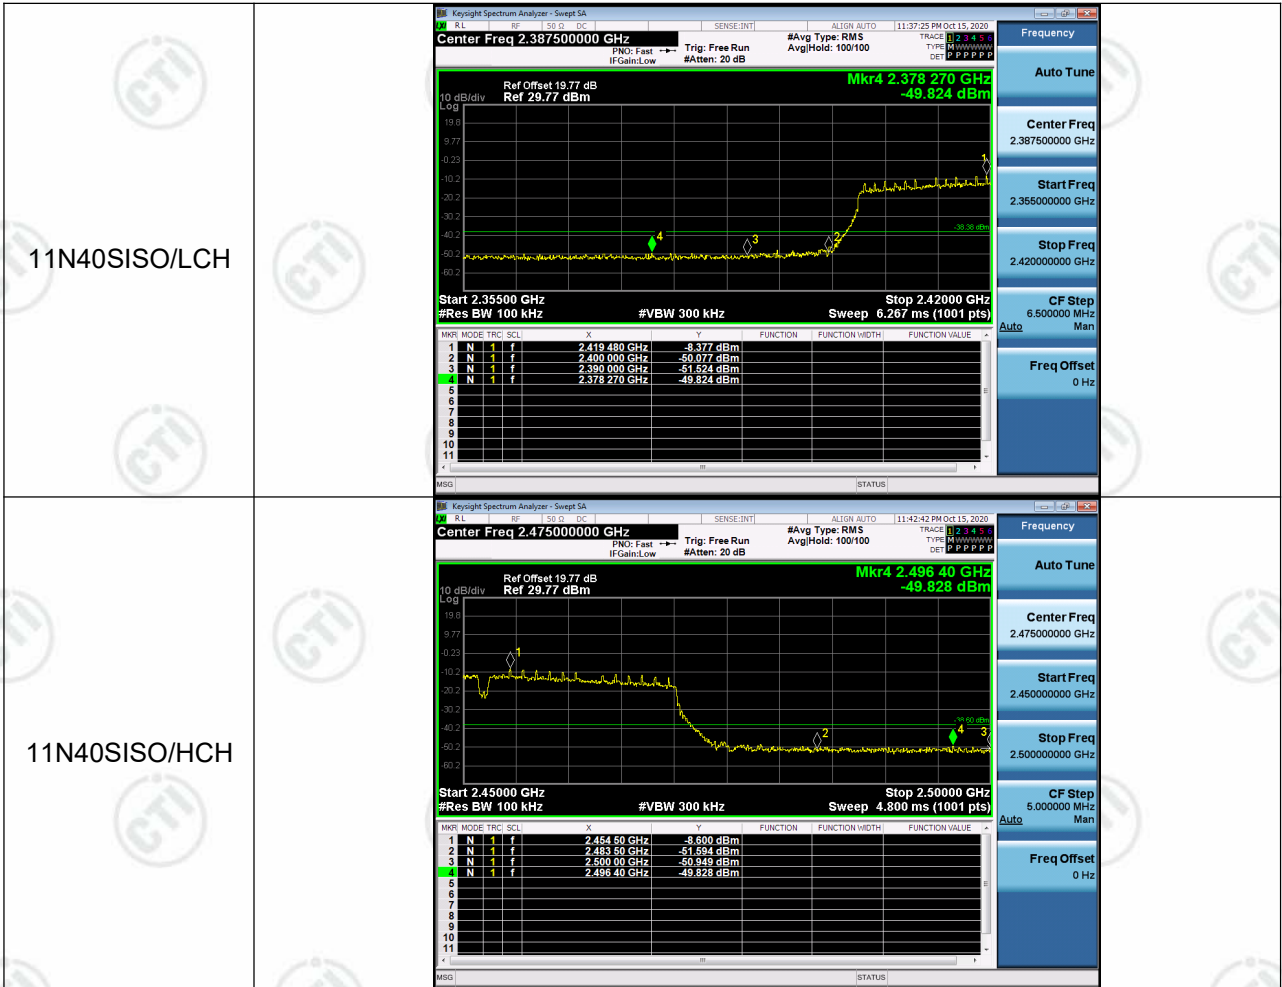

Appendix D): RF Conducted Spurious Emissions

Test Limit

According to §15.247(d),

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Test Procedure

Test method Refer as KDB 558074 D01.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


Test Setup

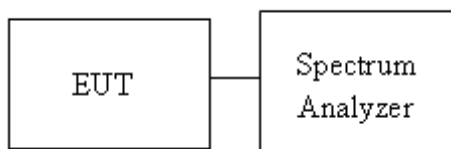



Result Table

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
11B	LCH	3.02	<Limit	PASS
11B	MCH	1.909	<Limit	PASS
11B	HCH	1.921	<Limit	PASS
11G	LCH	-3.236	<Limit	PASS
11G	MCH	-2.838	<Limit	PASS
11G	HCH	-3.35	<Limit	PASS
11N20SISO	LCH	-4.25	<Limit	PASS
11N20SISO	MCH	-3.542	<Limit	PASS
11N20SISO	HCH	-3.676	<Limit	PASS
11N40SISO	LCH	-8.45	<Limit	PASS
11N40SISO	MCH	-7.891	<Limit	PASS
11N40SISO	HCH	-8.462	<Limit	PASS

Test Graph

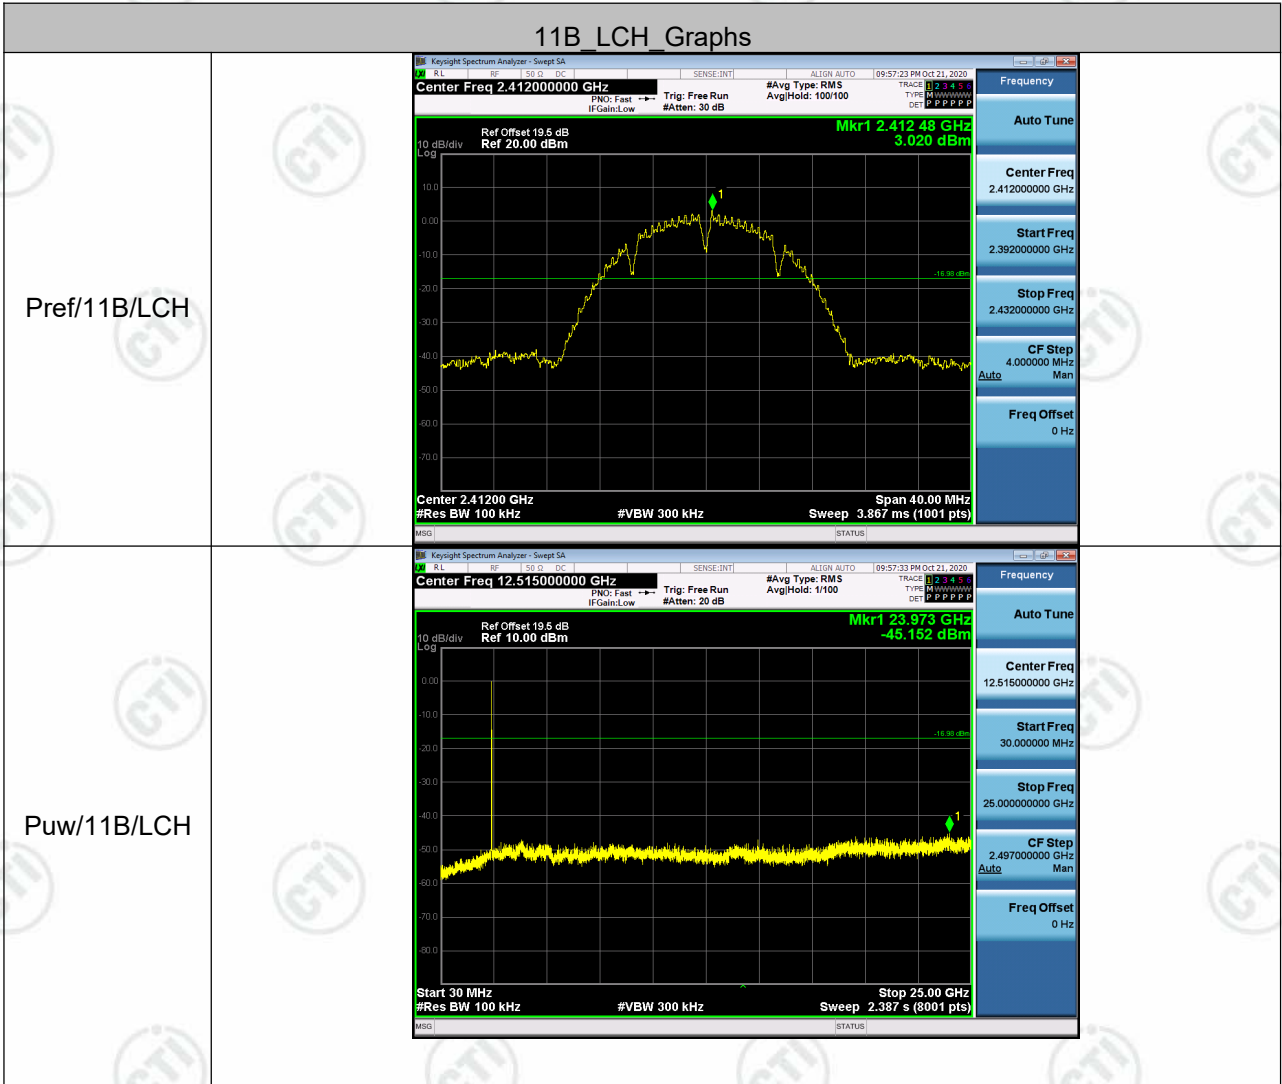


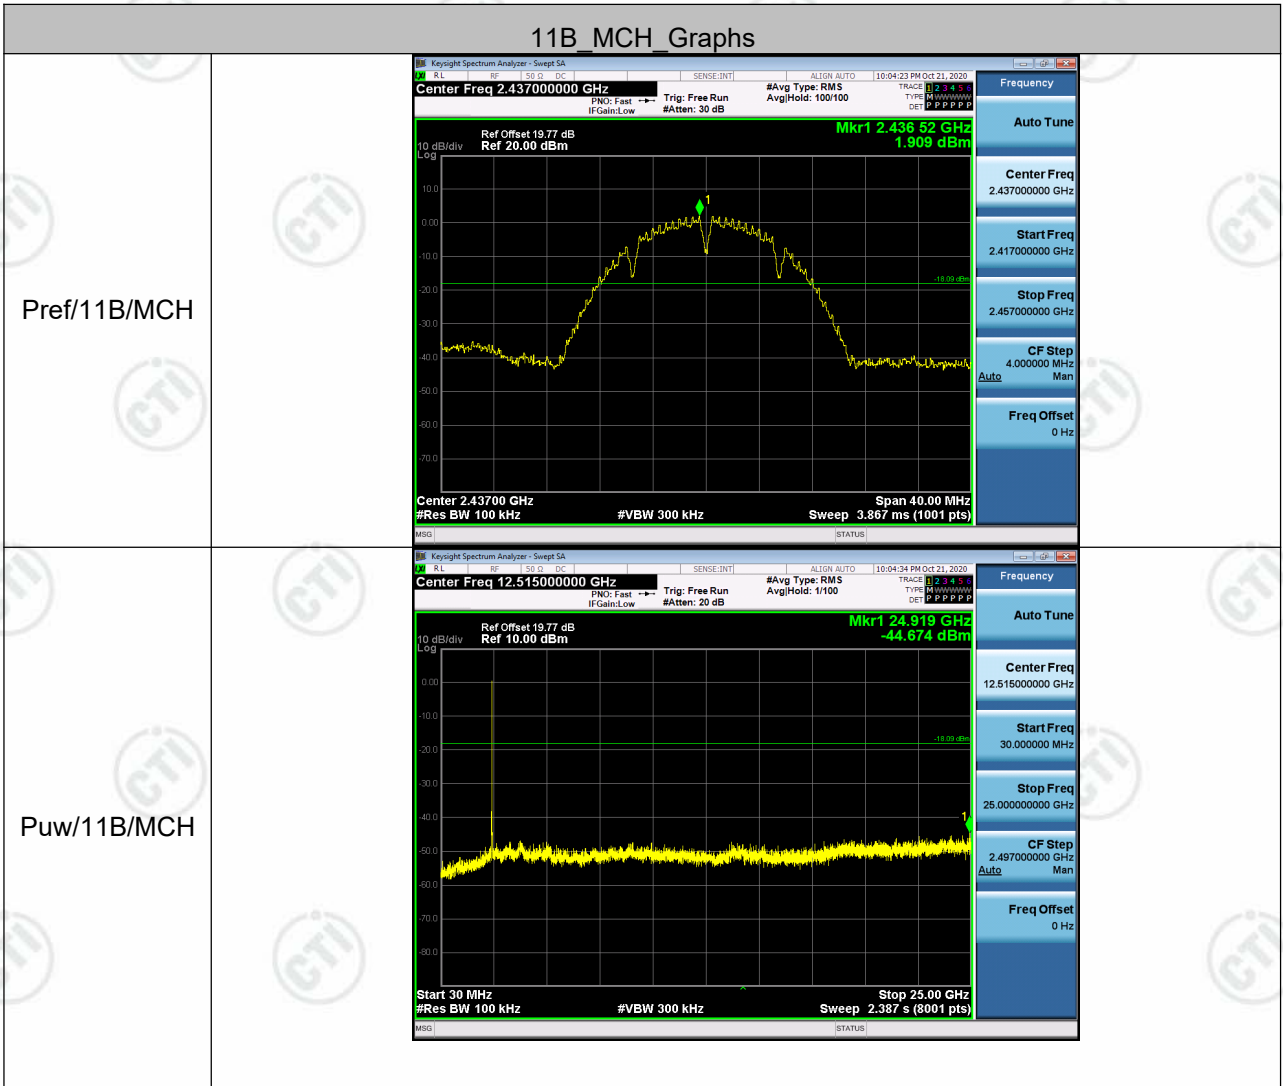


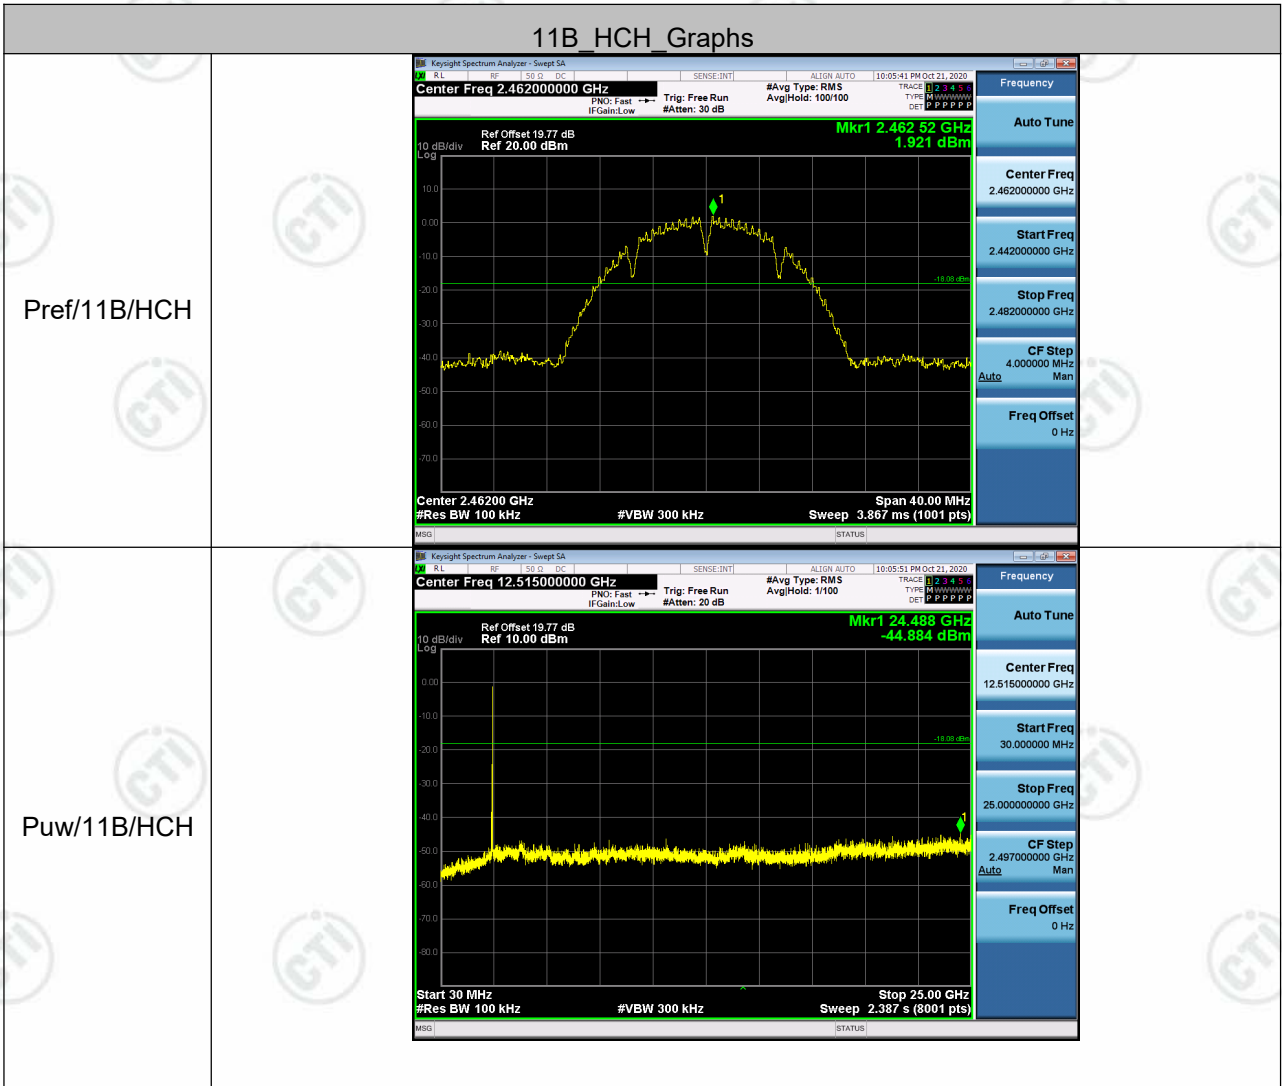








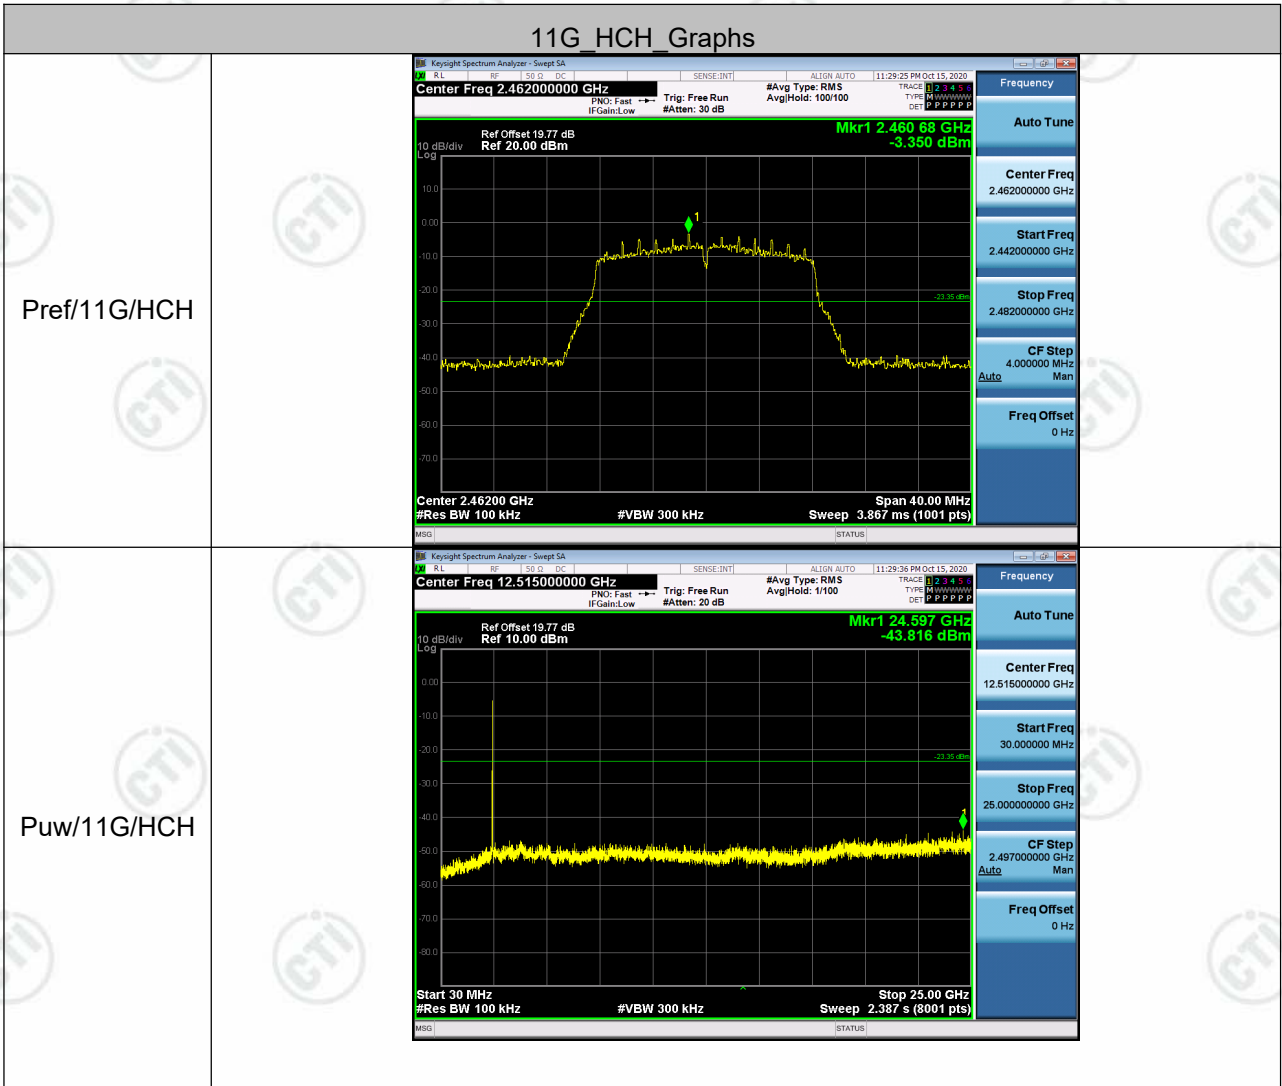


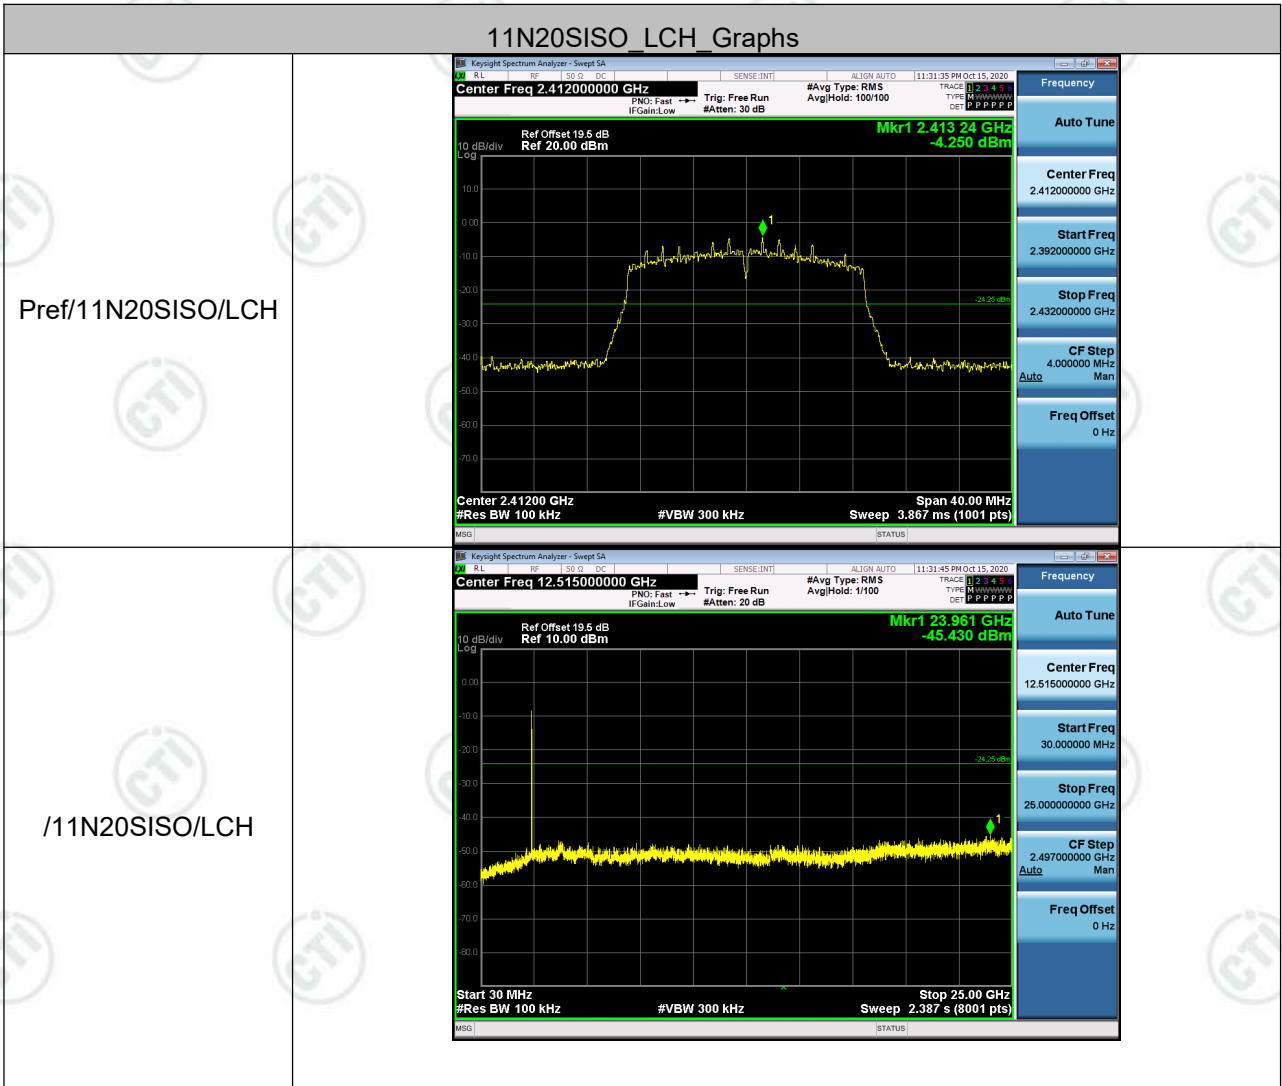


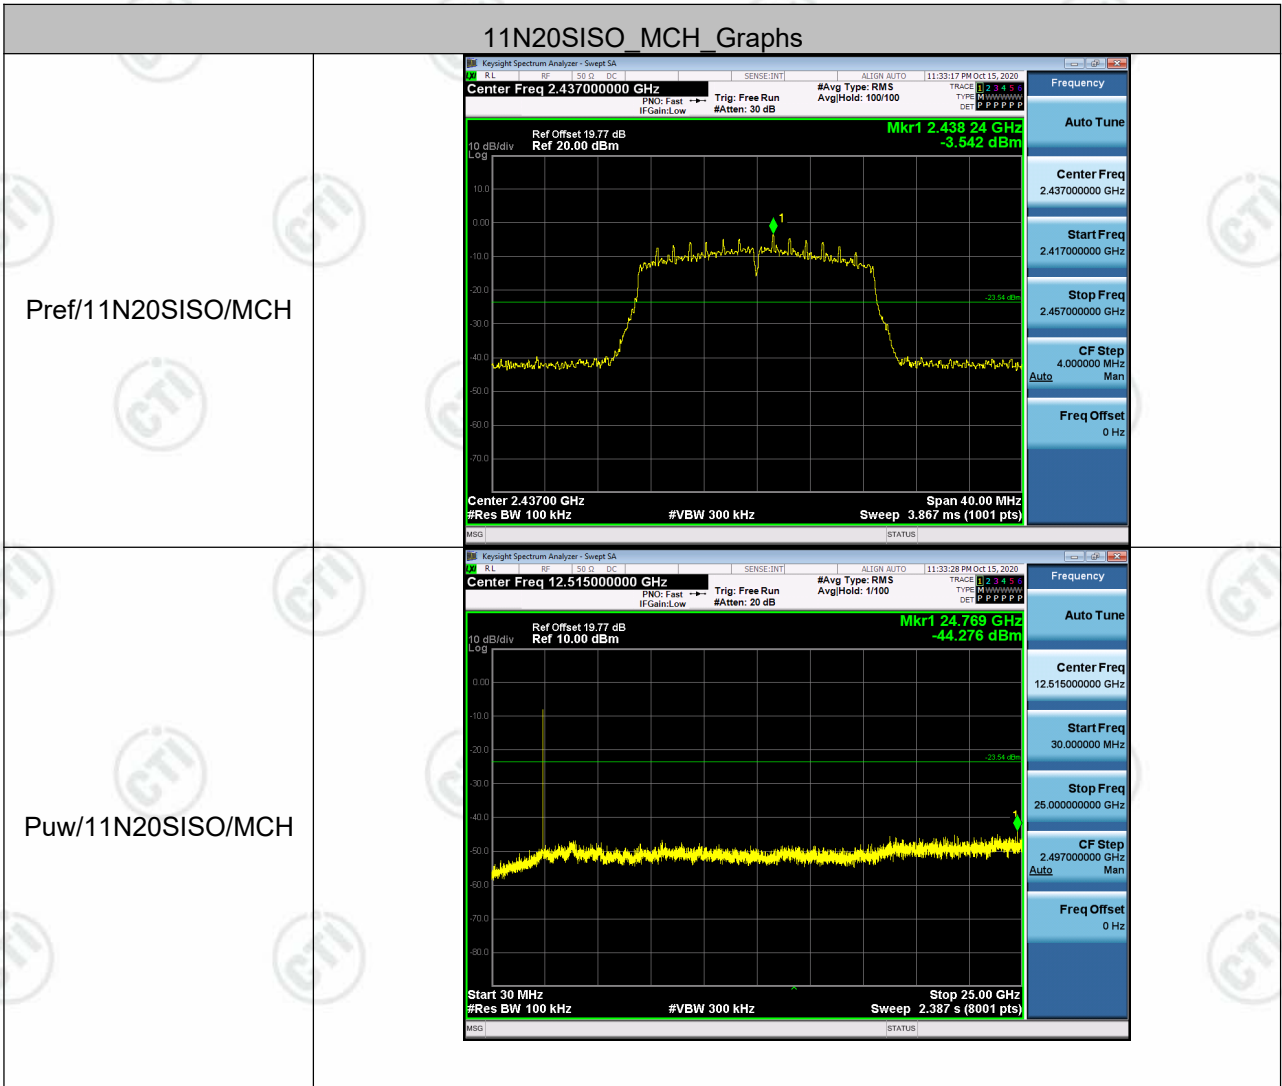

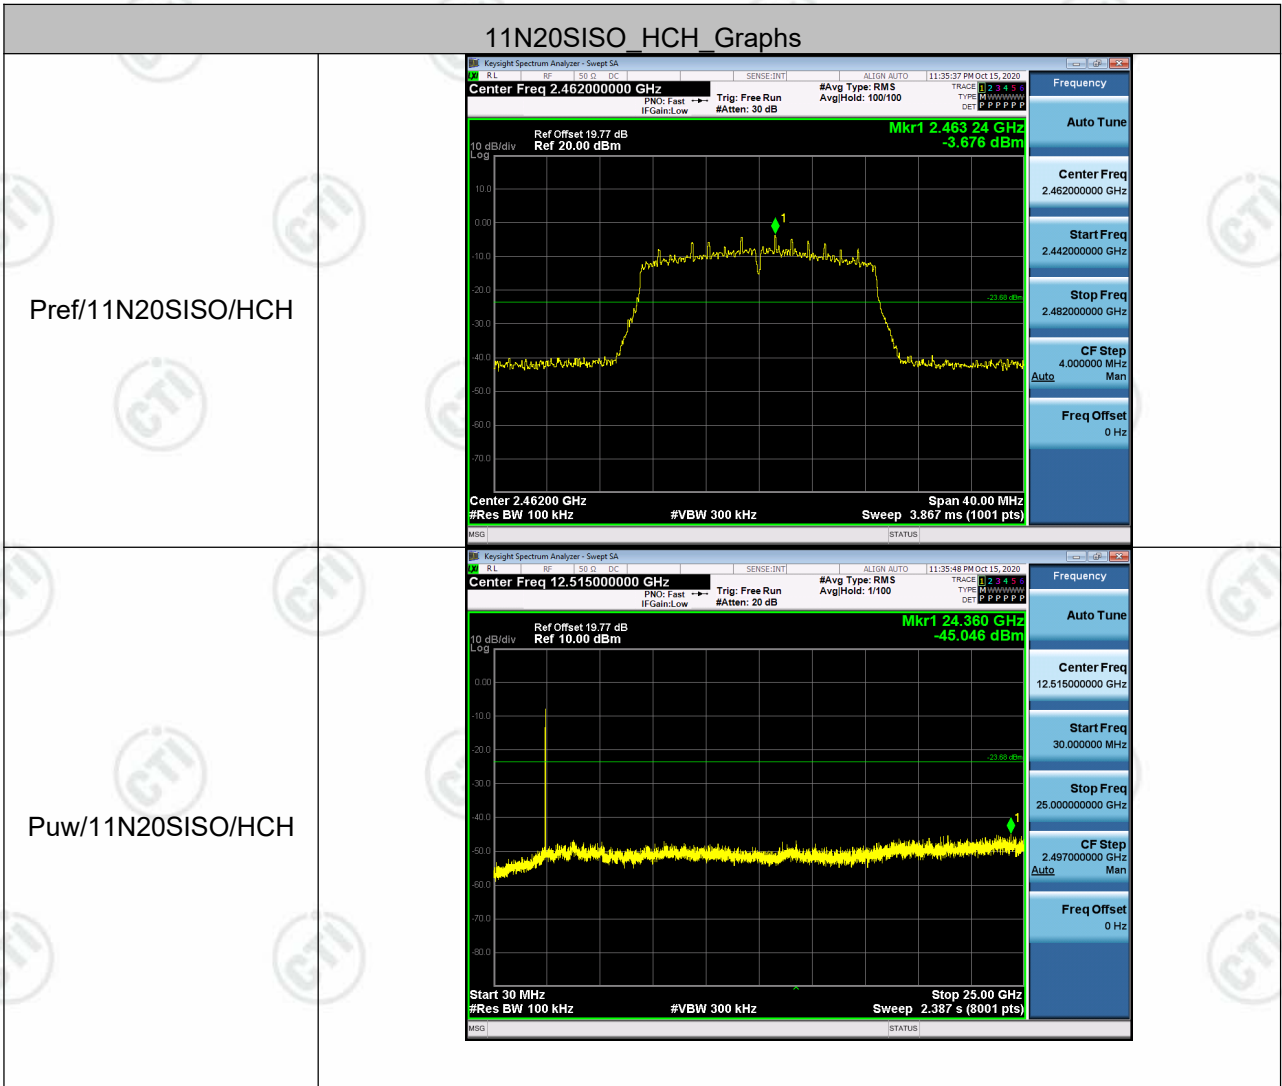

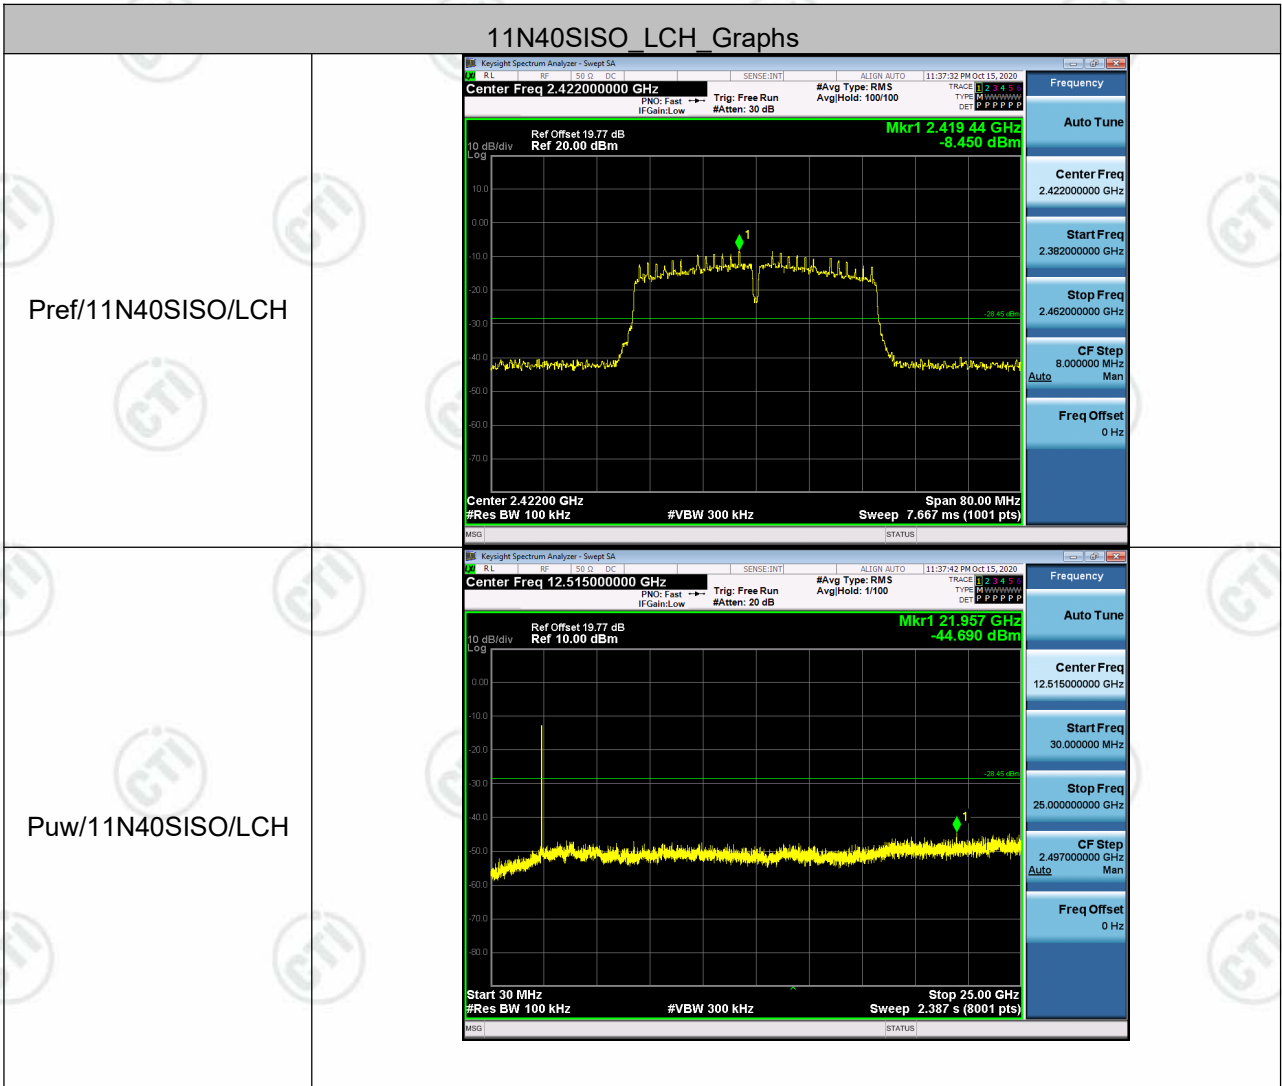

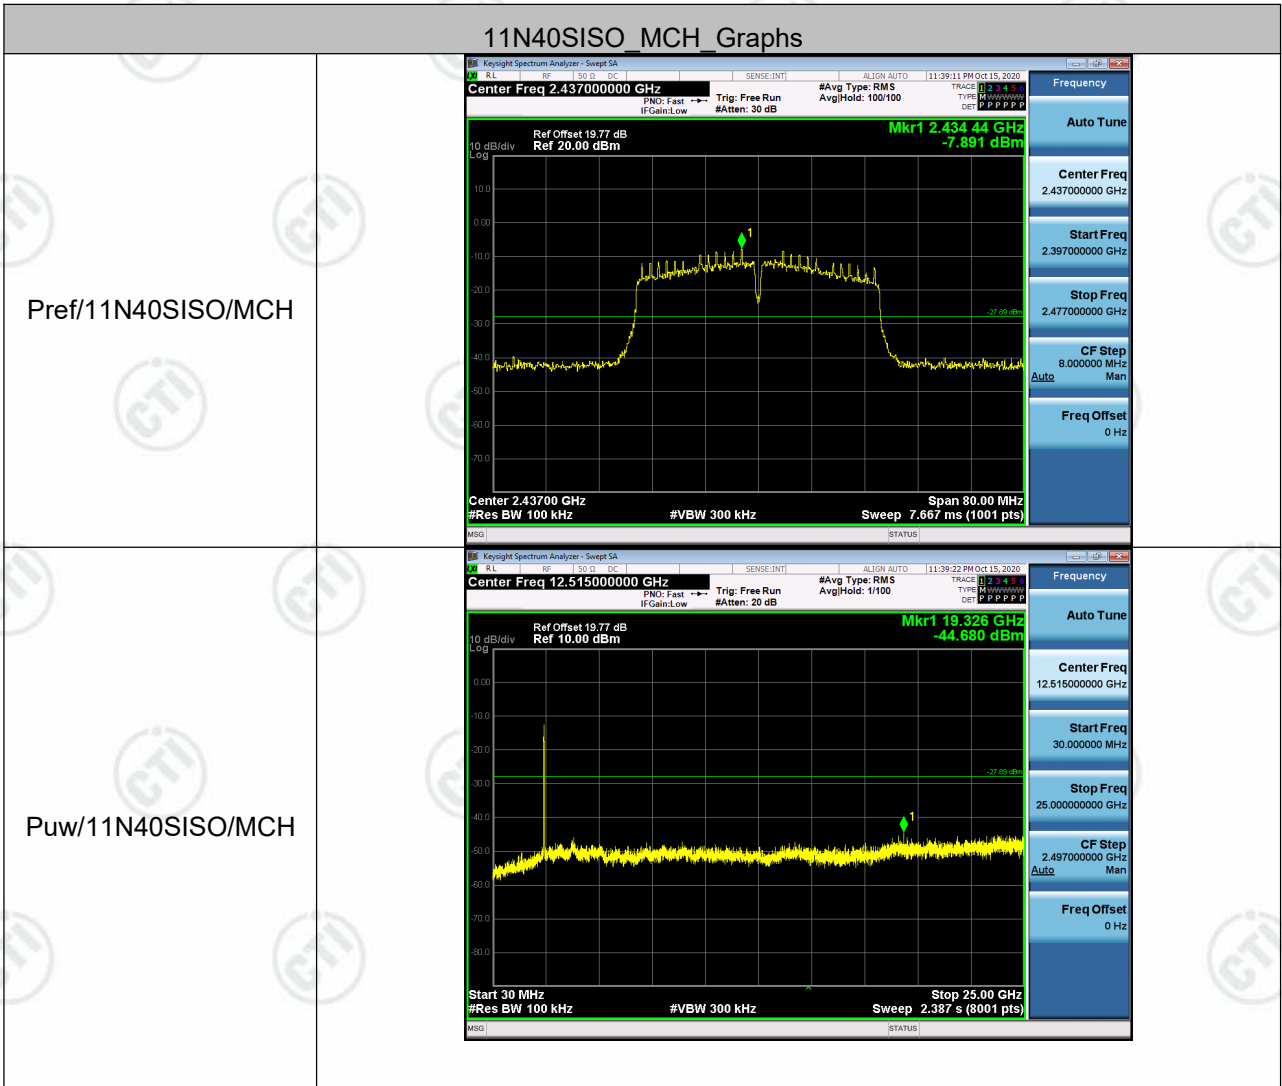

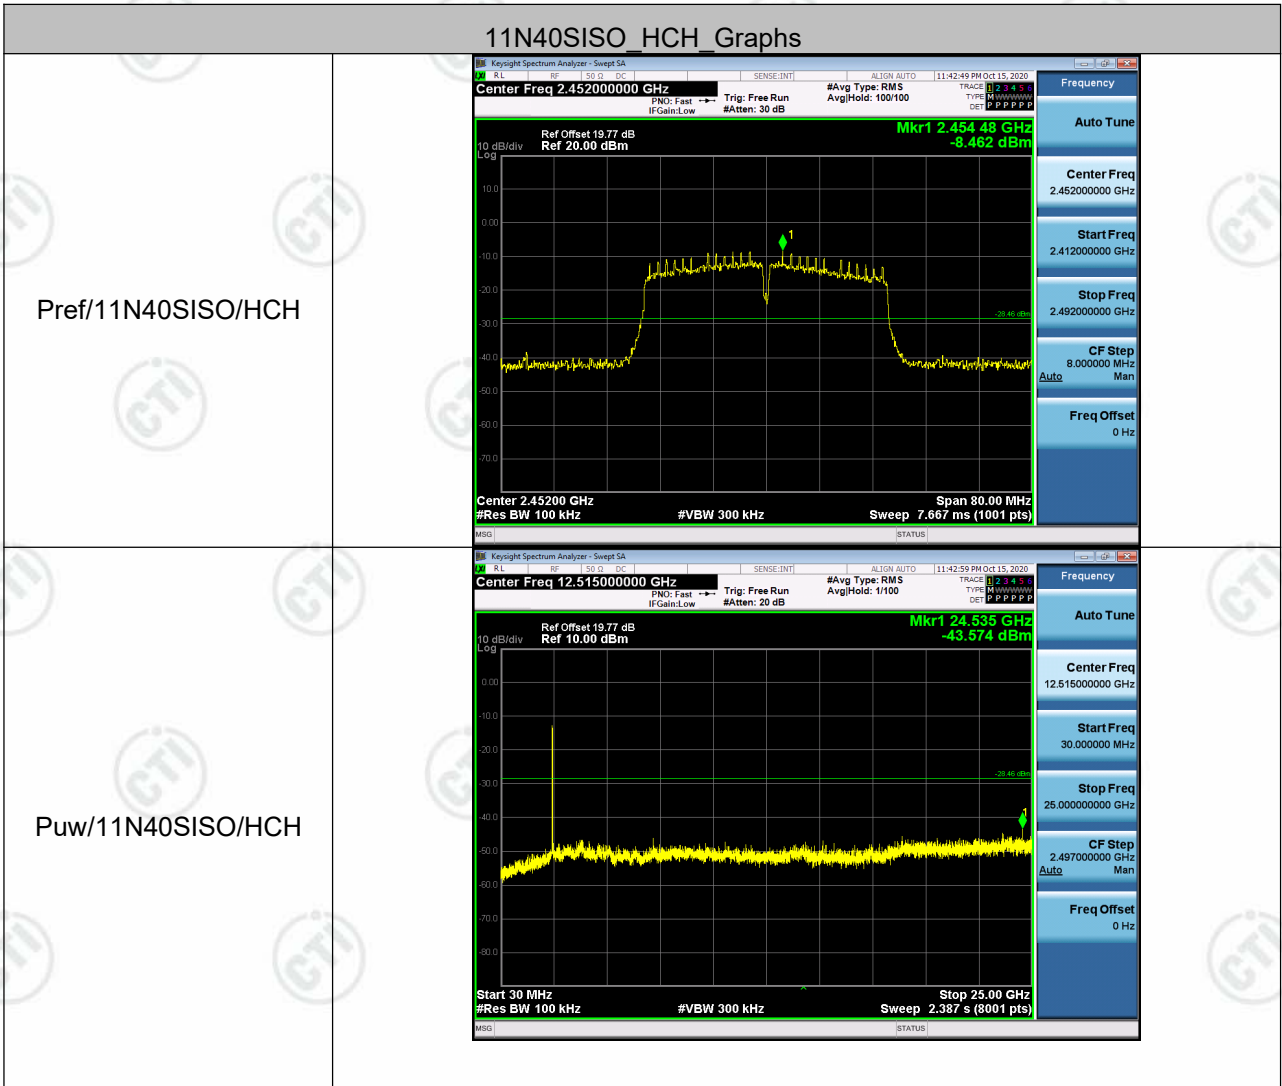

Appendix E): Power Spectral Density

Test Limit

According to §15.247(e),

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi: 8dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi: [Limit = 8 – (DG – 6)] <input type="checkbox"/> Point-to-point operation:
-------	--

Test Procedure

Test method Refer as KDB 558074 D01.

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 30kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss was compensated to the results for each measurement by SA.
5. Mark the maximum level.
6. Measure and record the result of power spectral density. in the test report.


Test Setup

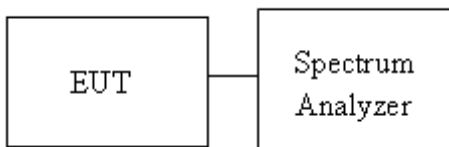



Result Table

Mode	Channel	Power Spectral Density [dBm]	Verdict
11B	LCH	-12.545	PASS
11B	MCH	-12.907	PASS
11B	HCH	-13.599	PASS
11G	LCH	-19.415	PASS
11G	MCH	-19.231	PASS
11G	HCH	-19.225	PASS
11N20SISO	LCH	-18.792	PASS
11N20SISO	MCH	-20.207	PASS
11N20SISO	HCH	-19.778	PASS
11N40SISO	LCH	-24.721	PASS
11N40SISO	MCH	-23.872	PASS
11N40SISO	HCH	-25.734	PASS

Test Graph

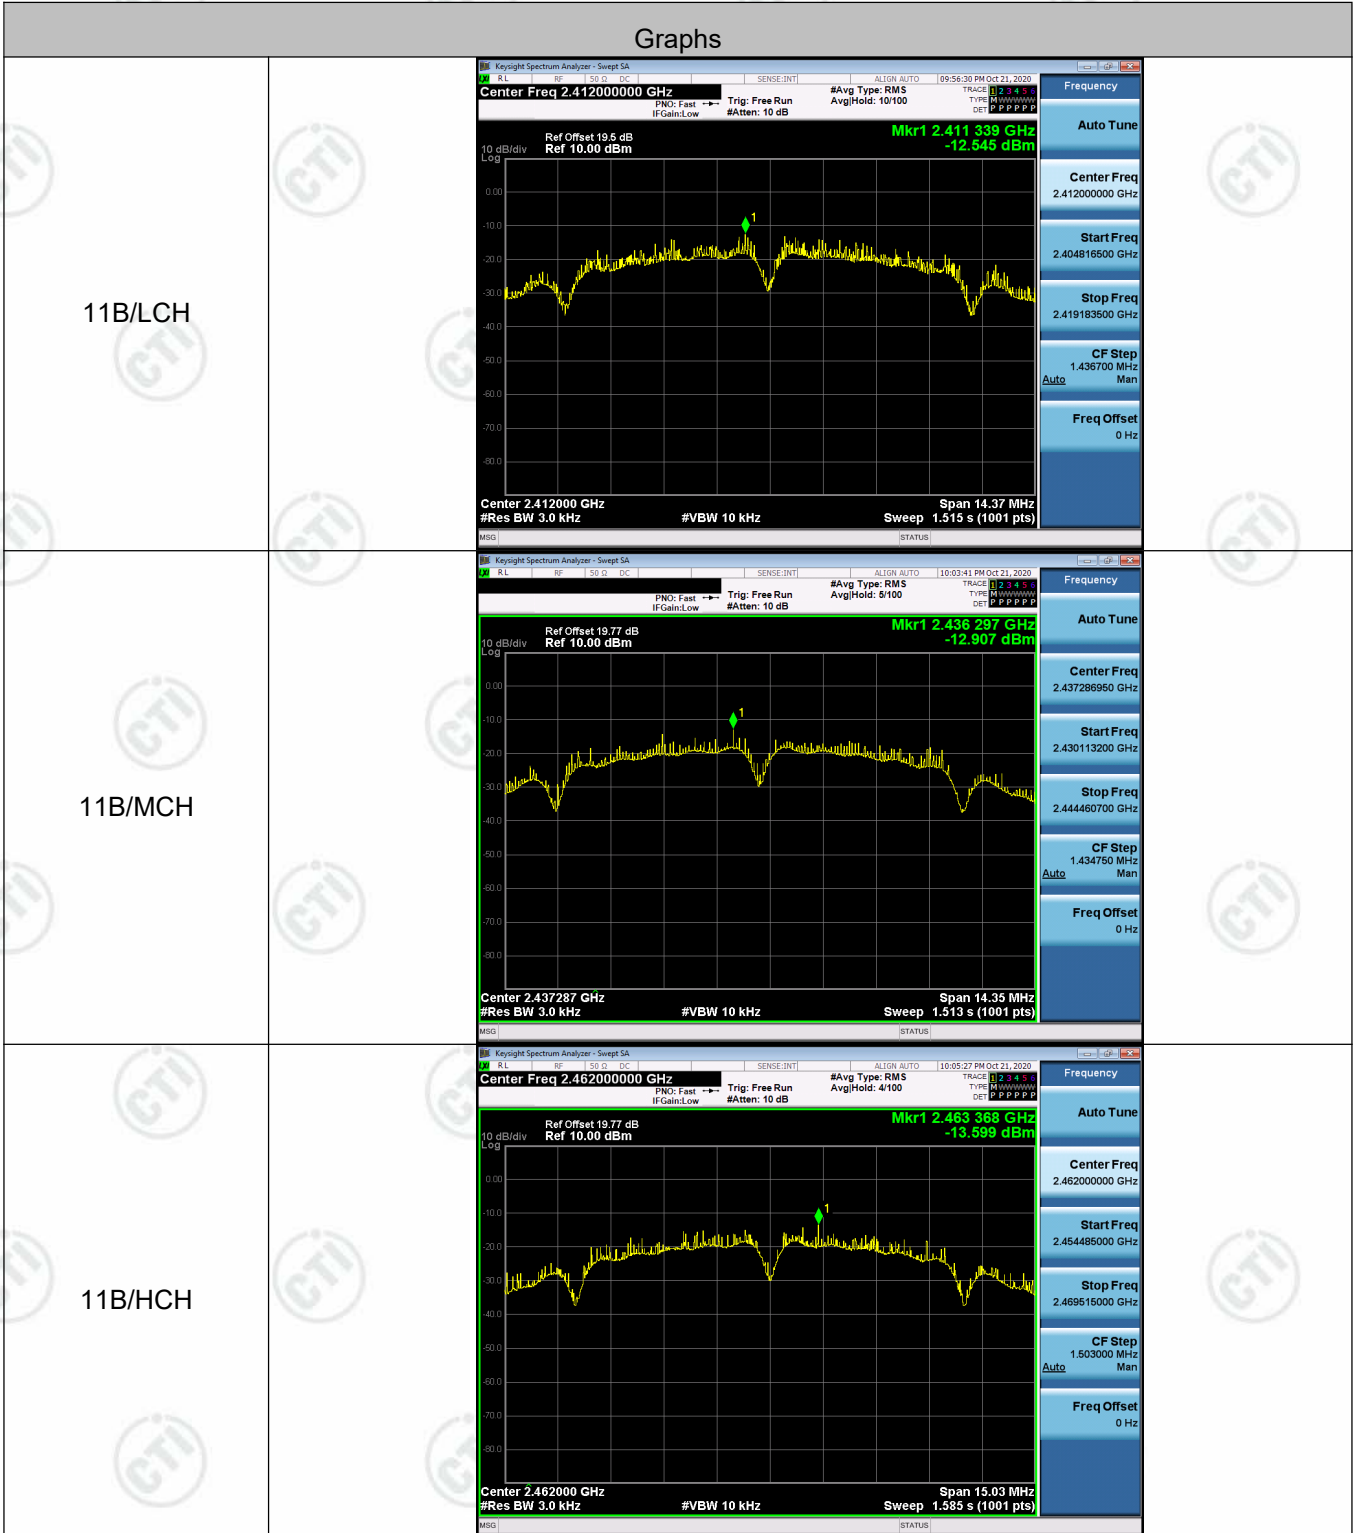

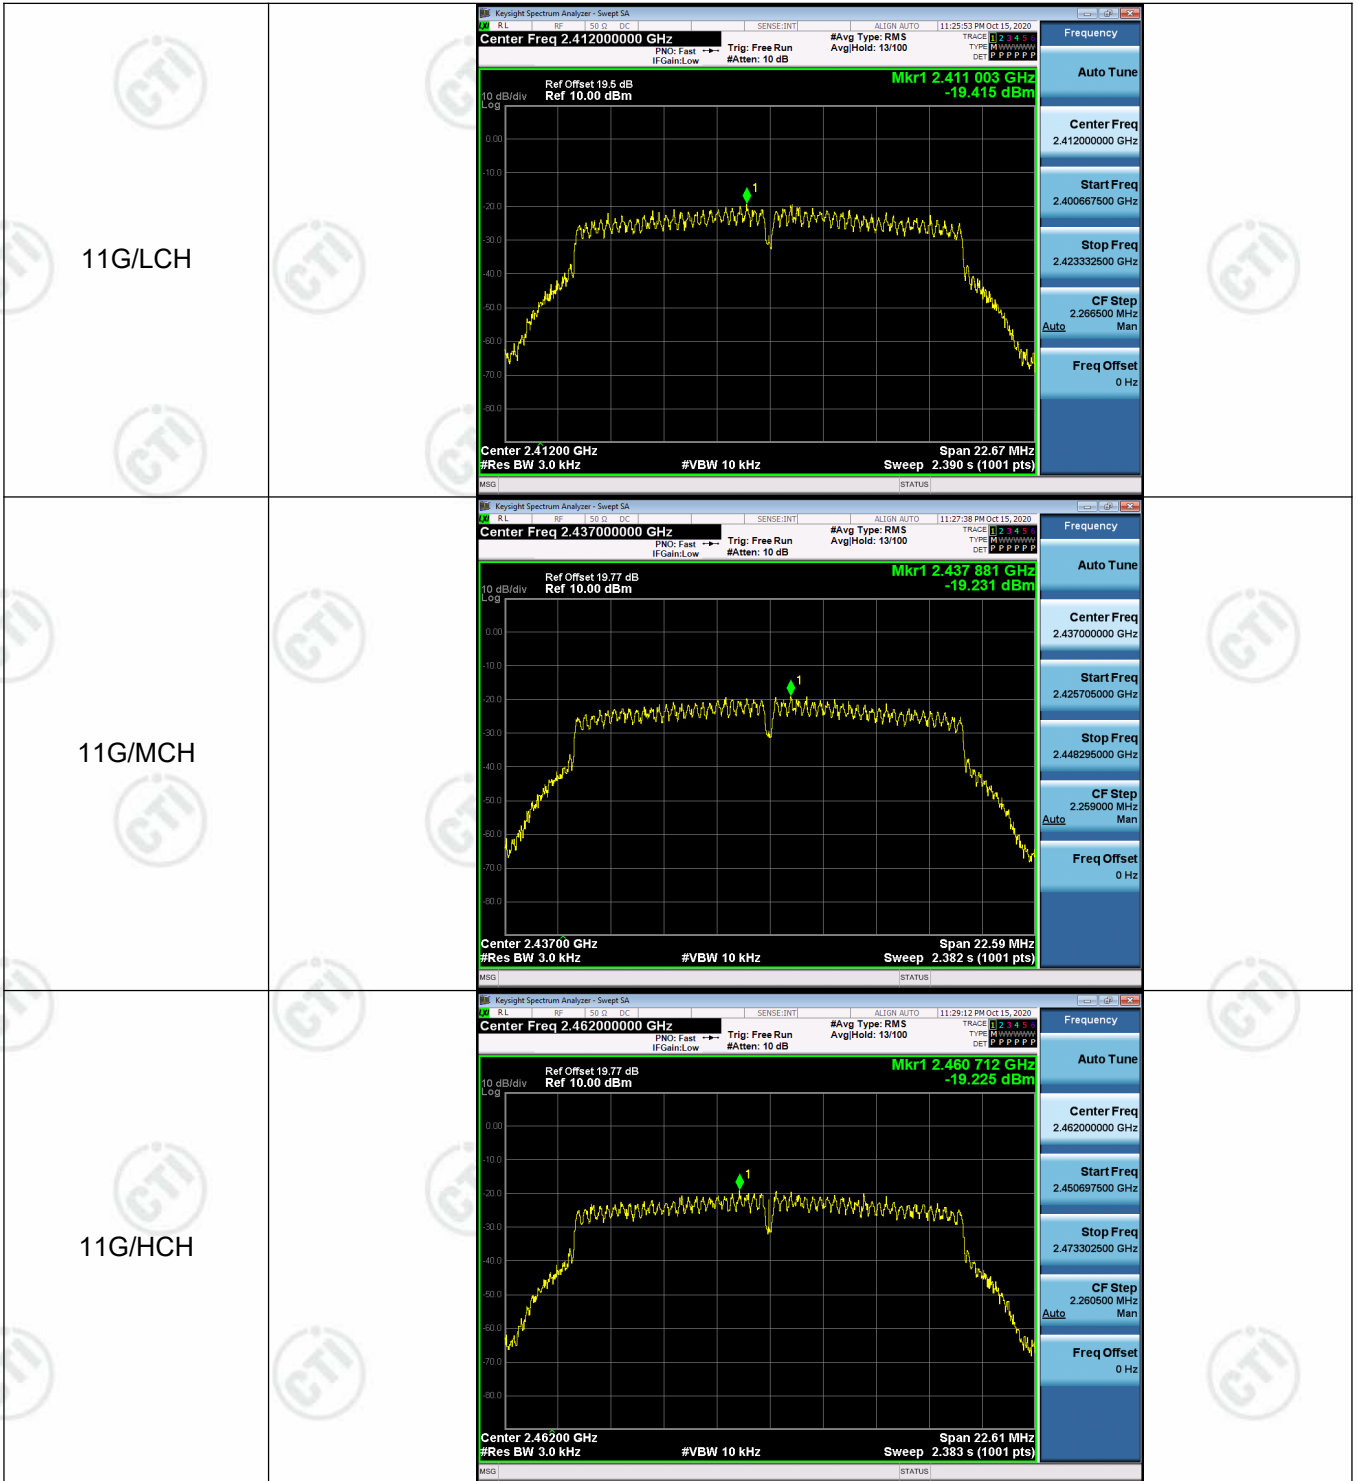

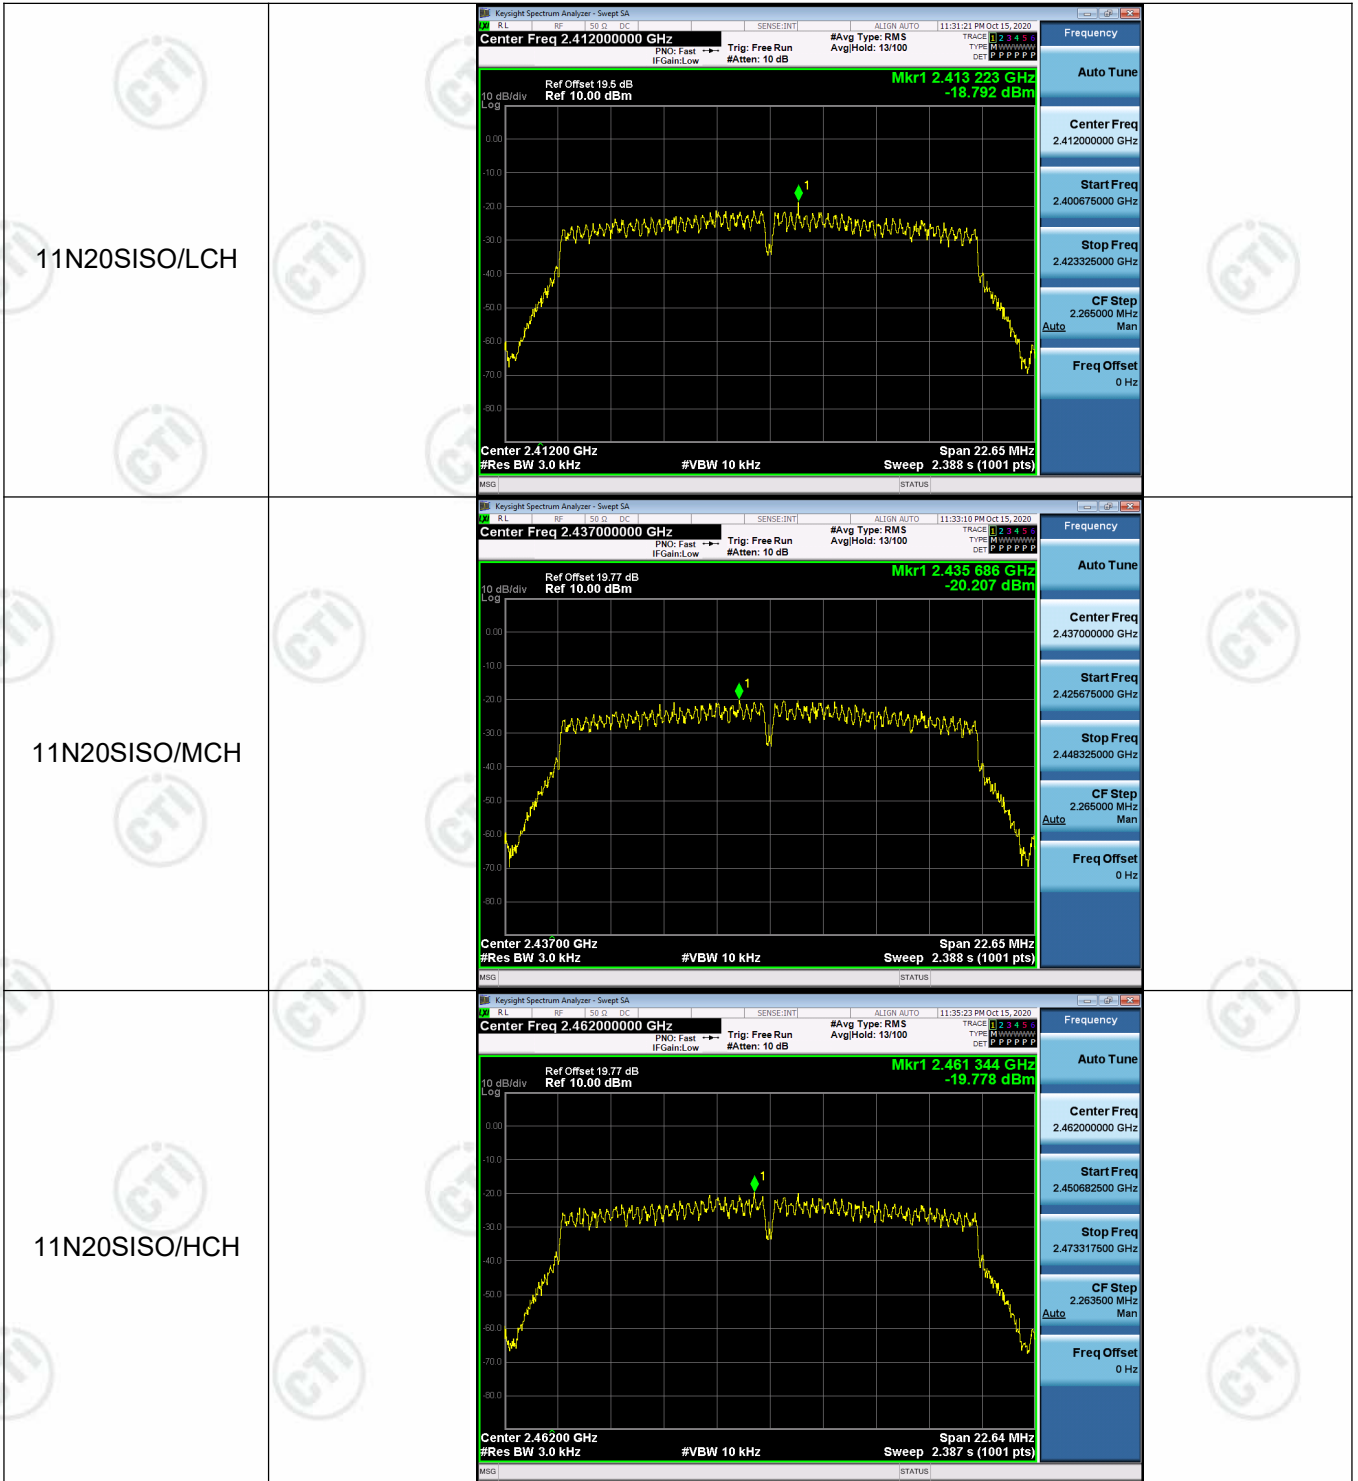



Appendix F): Antenna Requirement


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

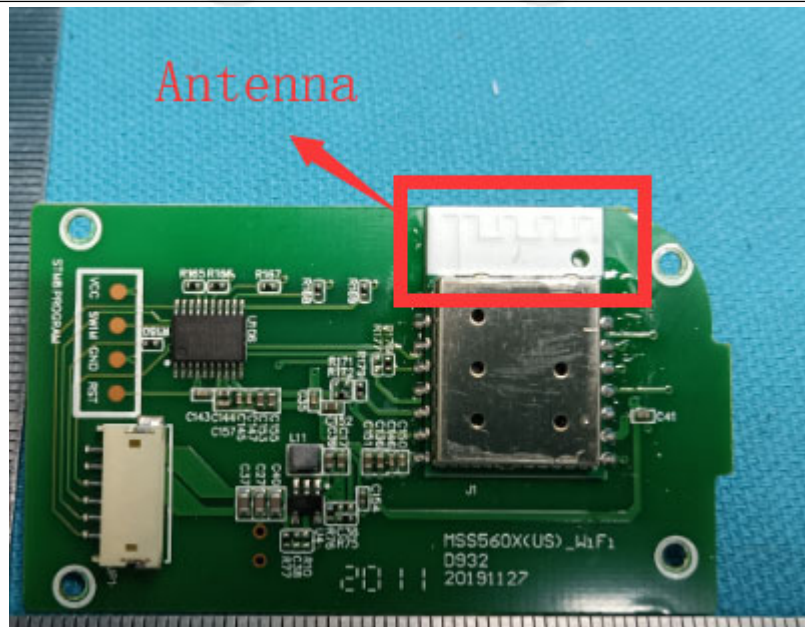

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.5 dBi.

Appendix G): AC Power Line Conducted Emission


<p>Test Procedure:</p>	<p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. 														
<p>Limit:</p>	<table border="1" data-bbox="464 1115 1331 1339"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

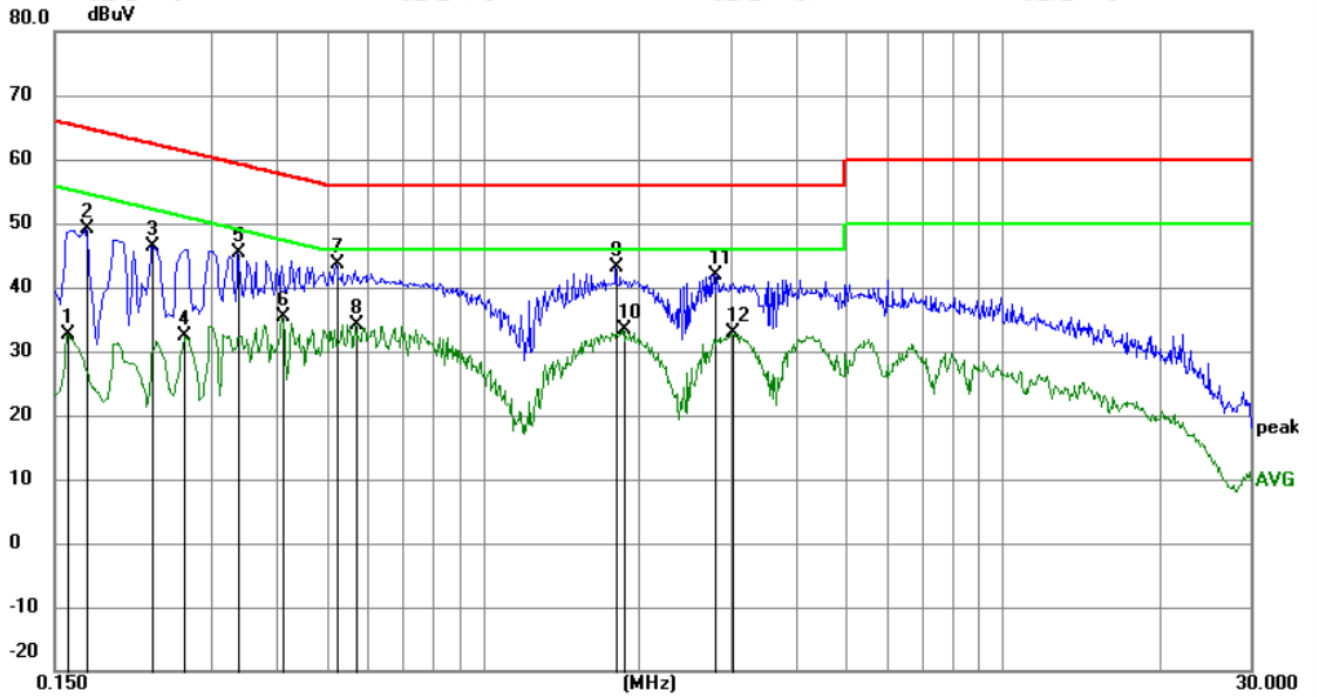

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1590	22.81	9.87	32.68	55.52	-22.84	AVG	
2		0.1725	39.36	9.87	49.23	64.84	-15.61	QP	
3		0.2310	36.45	9.93	46.38	62.41	-16.03	QP	
4		0.2670	22.36	10.00	32.36	51.21	-18.85	AVG	
5		0.3390	35.23	10.03	45.26	59.23	-13.97	QP	
6		0.4110	25.43	9.97	35.40	47.63	-12.23	AVG	
7		0.5235	33.60	9.98	43.58	56.00	-12.42	QP	
8	*	0.5685	24.18	10.03	34.21	46.00	-11.79	AVG	
9		1.8015	33.24	9.80	43.04	56.00	-12.96	QP	
10		1.8645	23.53	9.80	33.33	46.00	-12.67	AVG	
11		2.7825	32.19	9.79	41.98	56.00	-14.02	QP	
12		3.0120	23.08	9.79	32.87	46.00	-13.13	AVG	

Neutral line:
80.0 dBuV

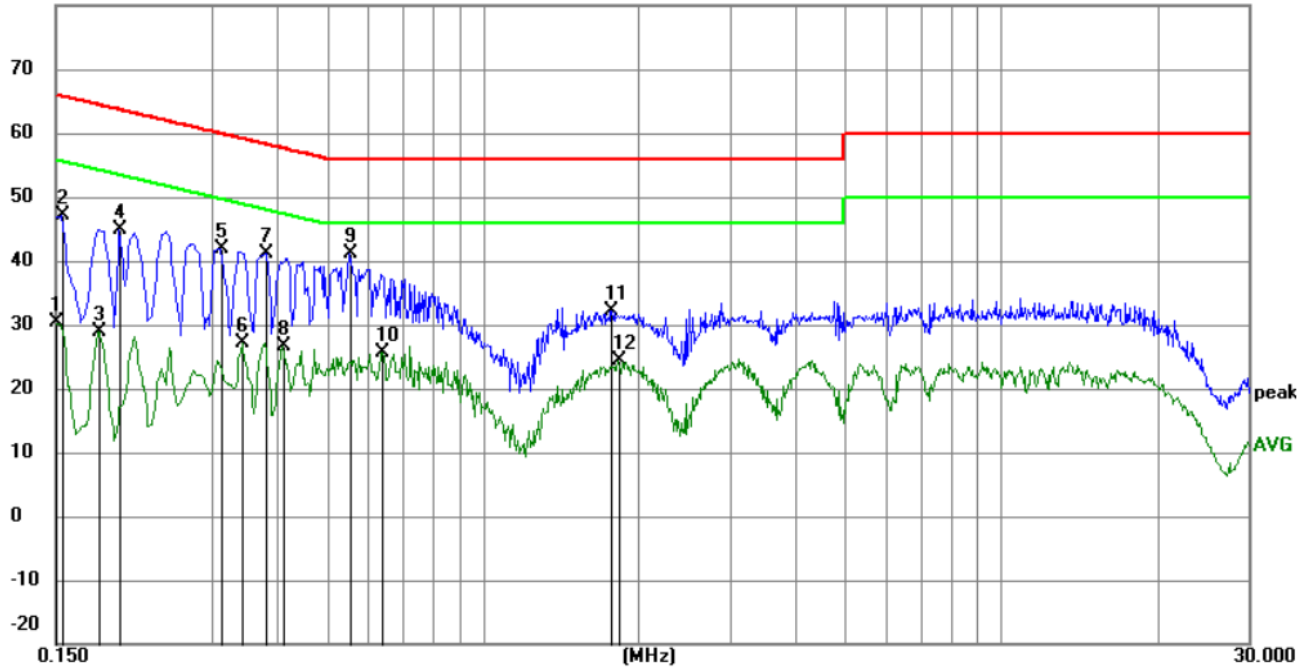

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	20.45	9.87	30.32	56.00	-25.68	AVG	
2		0.1545	37.32	9.87	47.19	65.75	-18.56	QP	
3		0.1815	19.02	9.87	28.89	54.42	-25.53	AVG	
4		0.1995	35.13	9.87	45.00	63.63	-18.63	QP	
5		0.3120	31.85	10.06	41.91	59.92	-18.01	QP	
6		0.3435	17.22	10.03	27.25	49.12	-21.87	AVG	
7		0.3795	31.07	9.99	41.06	58.29	-17.23	QP	
8		0.4110	16.64	9.97	26.61	47.63	-21.02	AVG	
9	*	0.5550	31.08	10.02	41.10	56.00	-14.90	QP	
10		0.6405	15.75	9.99	25.74	46.00	-20.26	AVG	
11		1.7655	22.40	9.80	32.20	56.00	-23.80	QP	
12		1.8195	14.53	9.80	24.33	46.00	-21.67	AVG	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.


Appendix H): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120kHz</td> <td>300kHz</td> <td>Quasi-peak</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak	Above 1GHz	Peak	1MHz	3MHz	Peak	Peak	1MHz	10Hz	Average	
Frequency	Detector	RBW	VBW	Remark																	
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak																	
Above 1GHz	Peak	1MHz	3MHz	Peak																	
	Peak	1MHz	10Hz	Average																	
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <p>Test method Refer as KDB 558074 D01</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 																				
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBμV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>54.0</td> <td>Average Value</td> </tr> <tr> <td>74.0</td> <td>Peak Value</td> </tr> </tbody> </table>	Frequency	Limit (dB μ V/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dB μ V/m @3m)	Remark																			
30MHz-88MHz	40.0	Quasi-peak Value																			
88MHz-216MHz	43.5	Quasi-peak Value																			
216MHz-960MHz	46.0	Quasi-peak Value																			
960MHz-1GHz	54.0	Quasi-peak Value																			
Above 1GHz	54.0	Average Value																			
	74.0	Peak Value																			

Test plot as follows:

Mode:	802.11 b Transmitting	Channel:	2412
Remark:	PK		


Test Graph

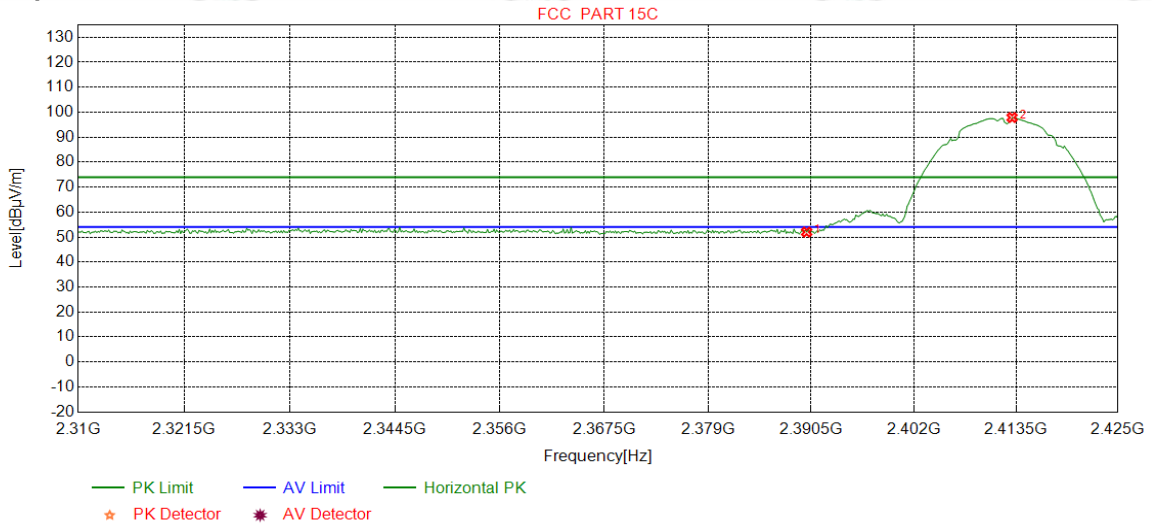

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	49.51	52.01	74.00	21.99	Pass	Horizontal
2	2413.0538	32.28	13.36	-43.12	95.34	97.86	74.00	-23.86	Pass	Horizontal

Mode:	802.11 b Transmitting	Channel:	2412
Remark:	PK		


Test Graph

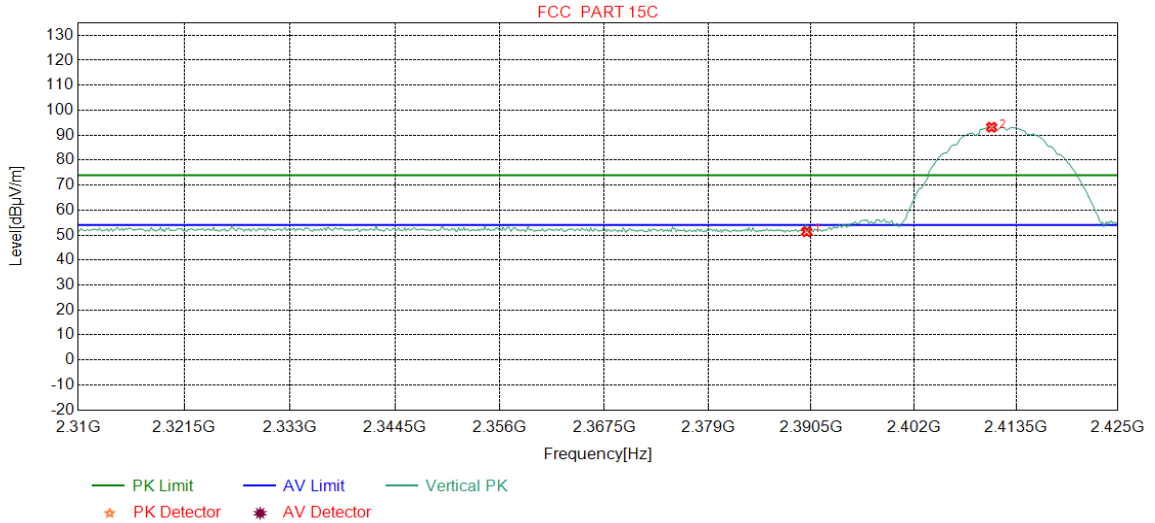

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	48.82	51.32	74.00	22.68	Pass	Vertical
2	2410.7509	32.28	13.35	-43.12	90.67	93.18	74.00	-19.18	Pass	Vertical

Mode:	802.11 b Transmitting	Channel:	2412
Remark:	AV		


Test Graph

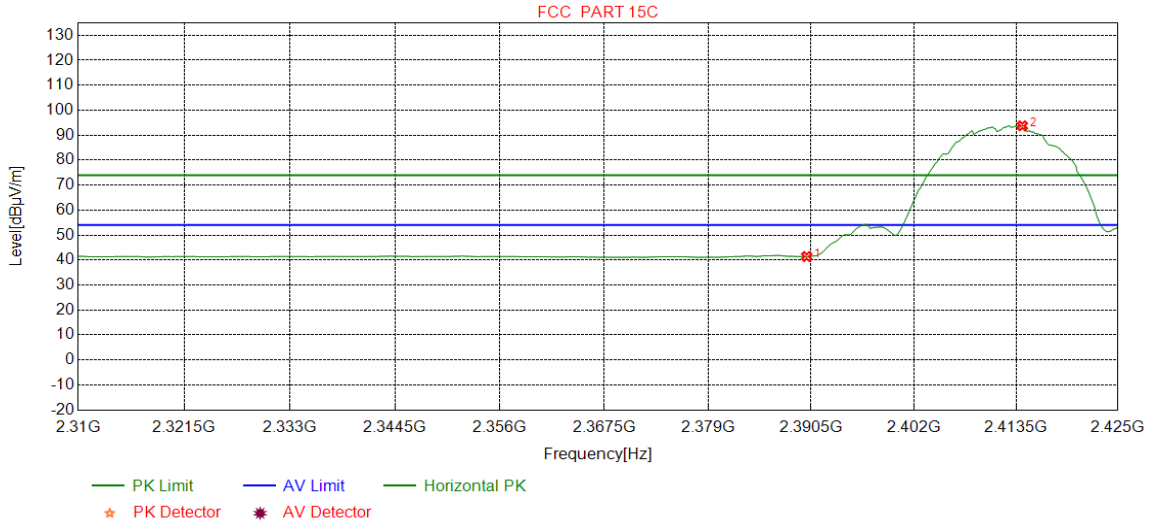

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	38.91	41.41	54.00	12.59	Pass	Horizontal
2	2414.2053	32.28	13.37	-43.12	91.22	93.75	54.00	-39.75	Pass	Horizontal

Mode:	802.11 b Transmitting	Channel:	2412
Remark:	AV		


Test Graph

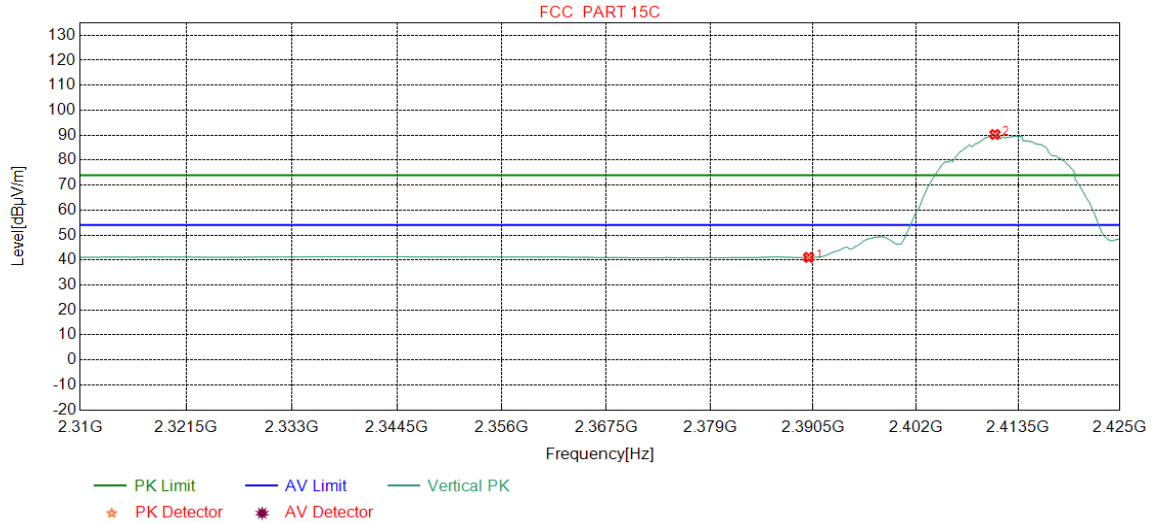

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	38.57	41.07	54.00	12.93	Pass	Vertical
2	2410.8949	32.28	13.35	-43.12	87.78	90.29	54.00	-36.29	Pass	Vertical

Mode:	802.11 b Transmitting	Channel:	2462
Remark:	PK		


Test Graph

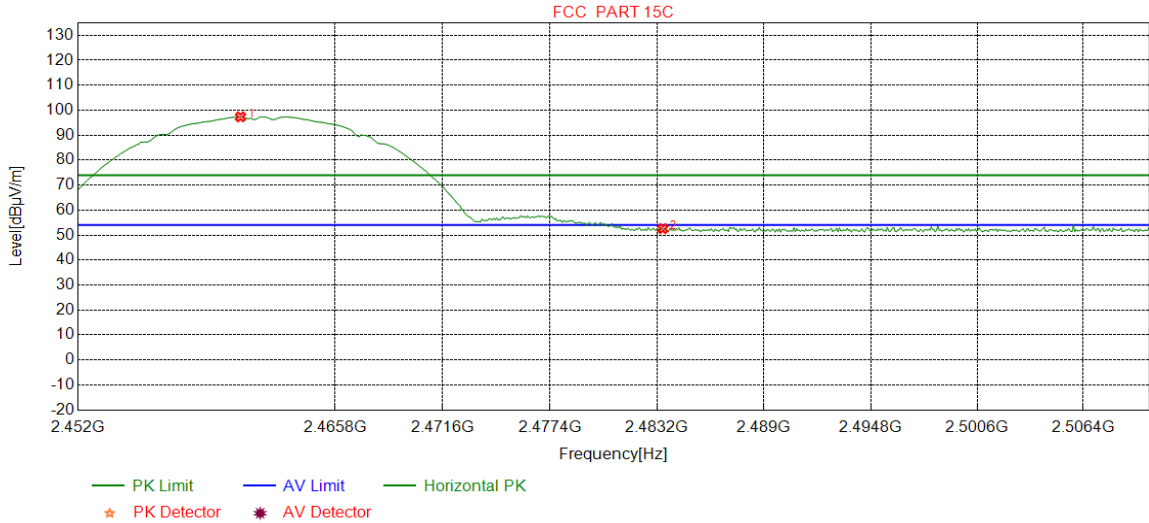

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2460.7109	32.34	13.48	-43.10	94.61	97.33	74.00	-23.33	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	49.92	52.57	74.00	21.43	Pass	Horizontal

Mode:	802.11 b Transmitting	Channel:	2462
Remark:	PK		


Test Graph

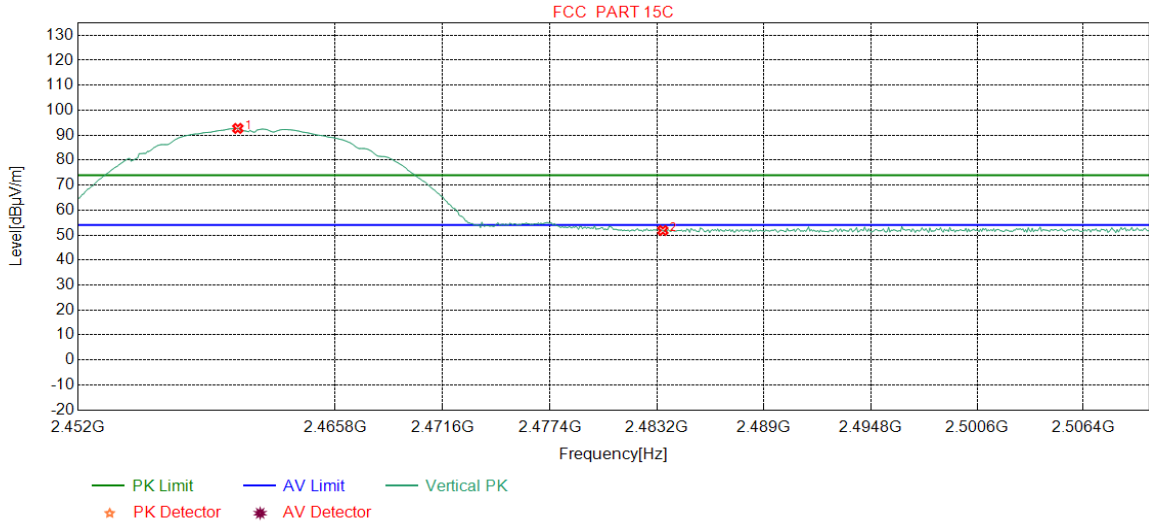

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2460.5657	32.34	13.48	-43.10	89.99	92.71	74.00	-18.71	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	49.18	51.83	74.00	22.17	Pass	Vertical

Mode:	802.11 b Transmitting	Channel:	2462
Remark:	AV		


Test Graph

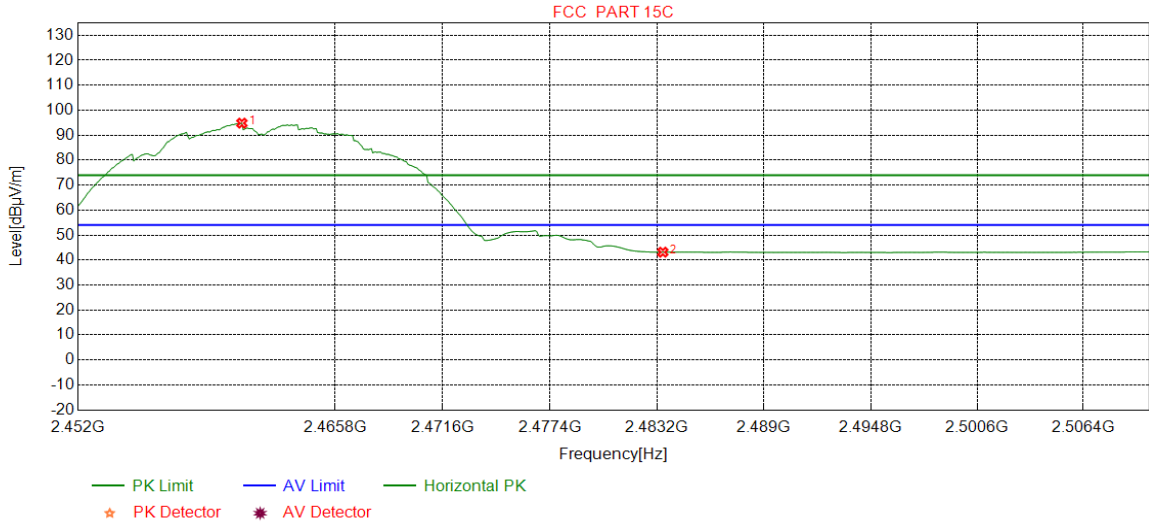

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2460.7835	32.35	13.48	-43.11	92.09	94.81	54.00	-40.81	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	40.50	43.15	54.00	10.85	Pass	Horizontal

Mode:	802.11 b Transmitting	Channel:	2462
Remark:	AV		


Test Graph

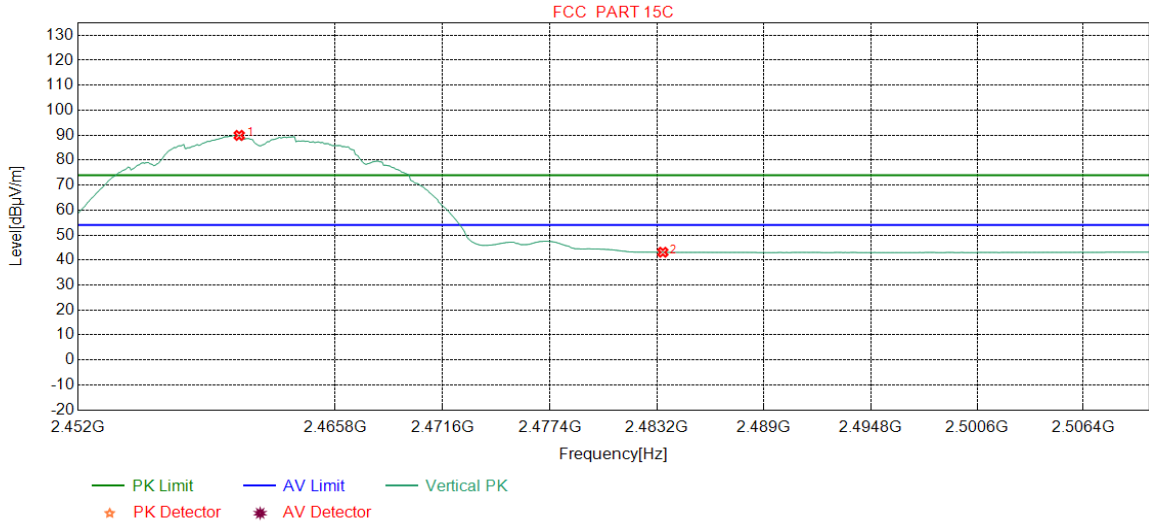

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2460.6383	32.34	13.48	-43.10	87.19	89.91	54.00	-35.91	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	40.47	43.12	54.00	10.88	Pass	Vertical

Mode:	802.11 g Transmitting	Channel:	2412
Remark:	PK		


Test Graph

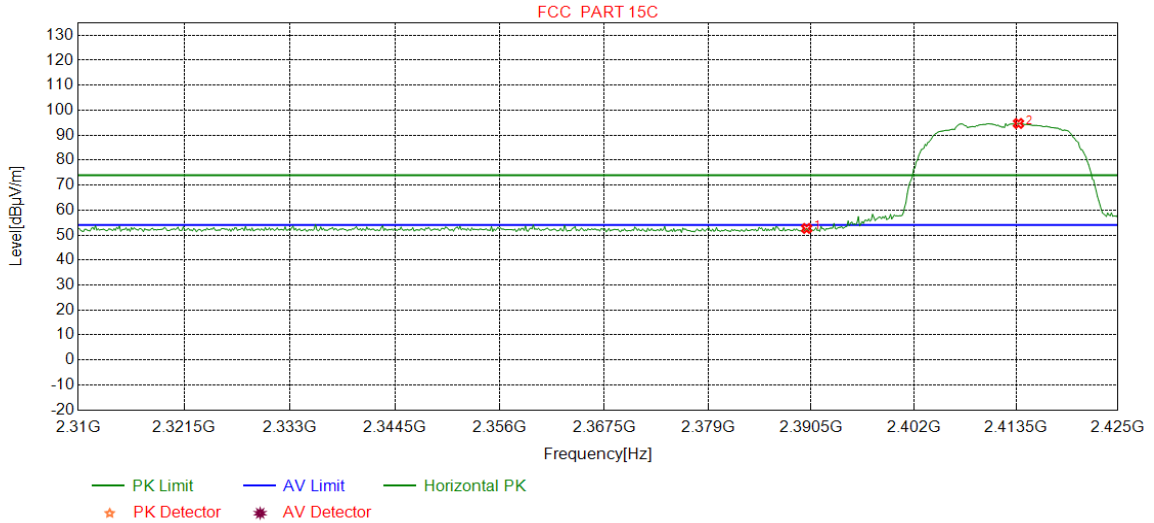

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	50.16	52.66	74.00	21.34	Pass	Horizontal
2	2413.7735	32.28	13.36	-43.11	92.16	94.69	74.00	-20.69	Pass	Horizontal

Mode:	802.11 g Transmitting	Channel:	2412
Remark:	PK		


Test Graph

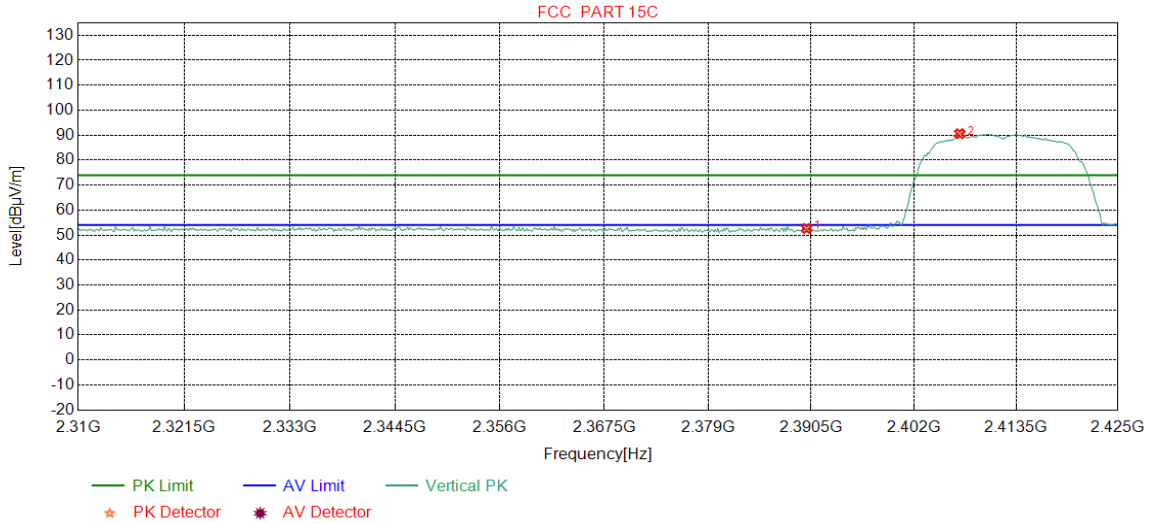

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	50.11	52.61	74.00	21.39	Pass	Vertical
2	2407.1527	32.27	13.33	-43.12	88.10	90.58	74.00	-16.58	Pass	Vertical

Mode:	802.11 g Transmitting	Channel:	2412
Remark:	AV		


Test Graph

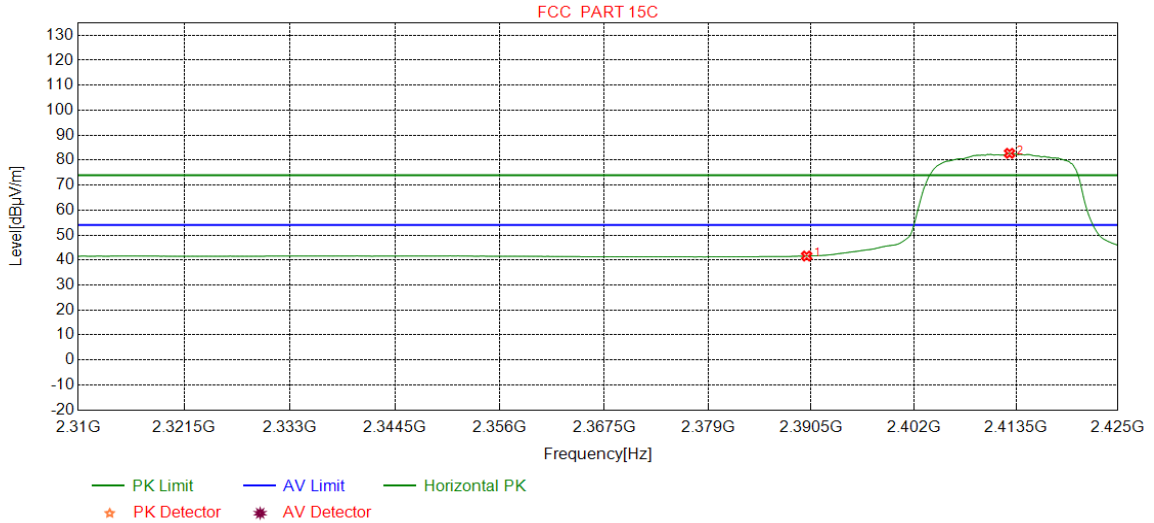

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	39.10	41.60	54.00	12.40	Pass	Horizontal
2	2412.7660	32.28	13.36	-43.12	80.23	82.75	54.00	-28.75	Pass	Horizontal

Mode:	802.11 g Transmitting	Channel:	2412
Remark:	AV		


Test Graph

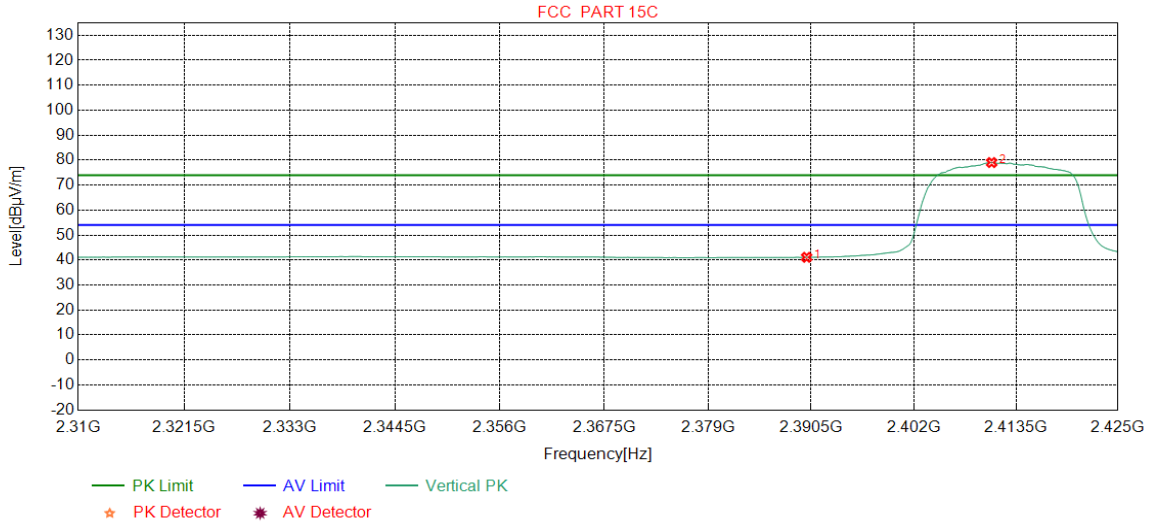

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	38.60	41.10	54.00	12.90	Pass	Vertical
2	2410.7509	32.28	13.35	-43.12	76.53	79.04	54.00	-25.04	Pass	Vertical

Mode:	802.11 g Transmitting	Channel:	2462
Remark:	PK		


Test Graph

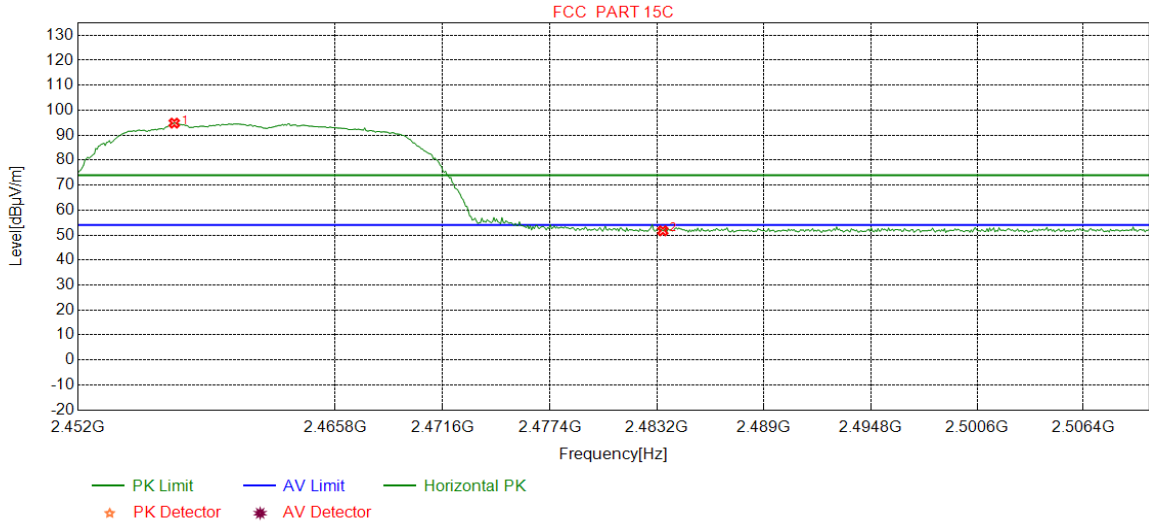

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2457.1539	32.34	13.50	-43.11	92.09	94.82	74.00	-20.82	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	49.06	51.71	74.00	22.29	Pass	Horizontal

Mode:	802.11 g Transmitting	Channel:	2462
Remark:	PK		


Test Graph

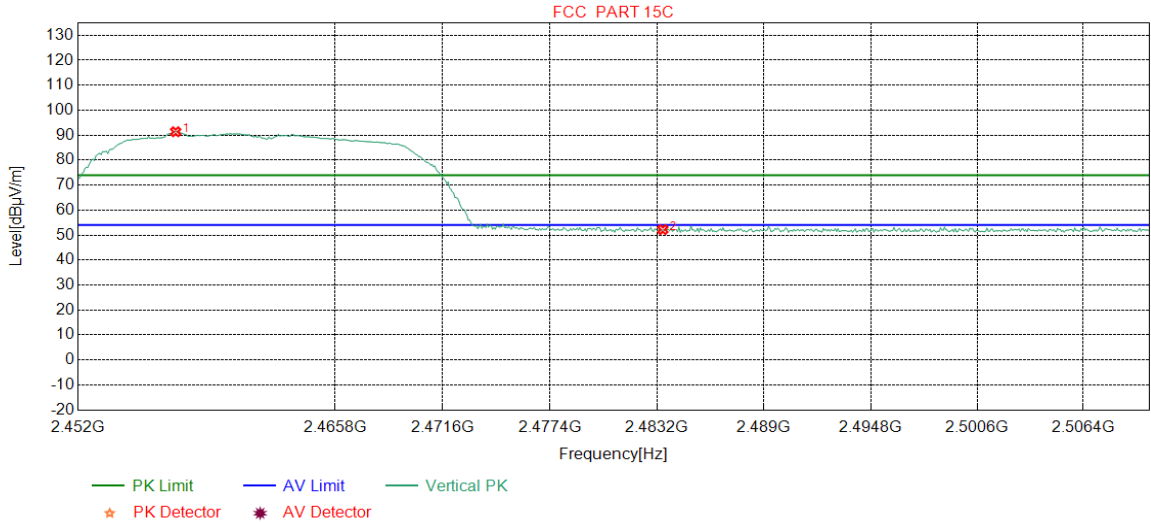

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2457.2265	32.34	13.50	-43.11	88.64	91.37	74.00	-17.37	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	49.54	52.19	74.00	21.81	Pass	Vertical

Mode:	802.11 g Transmitting	Channel:	2462
Remark:	AV		


Test Graph

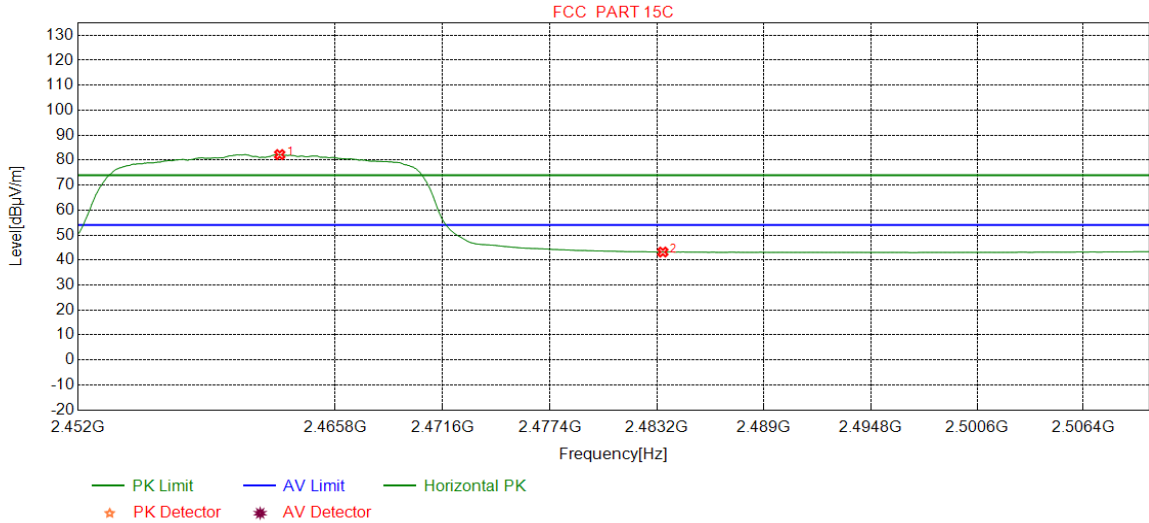

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2462.8160	32.35	13.47	-43.11	79.51	82.22	54.00	-28.22	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	40.55	43.20	54.00	10.80	Pass	Horizontal

Mode:	802.11 g Transmitting	Channel:	2462
Remark:	AV		


Test Graph

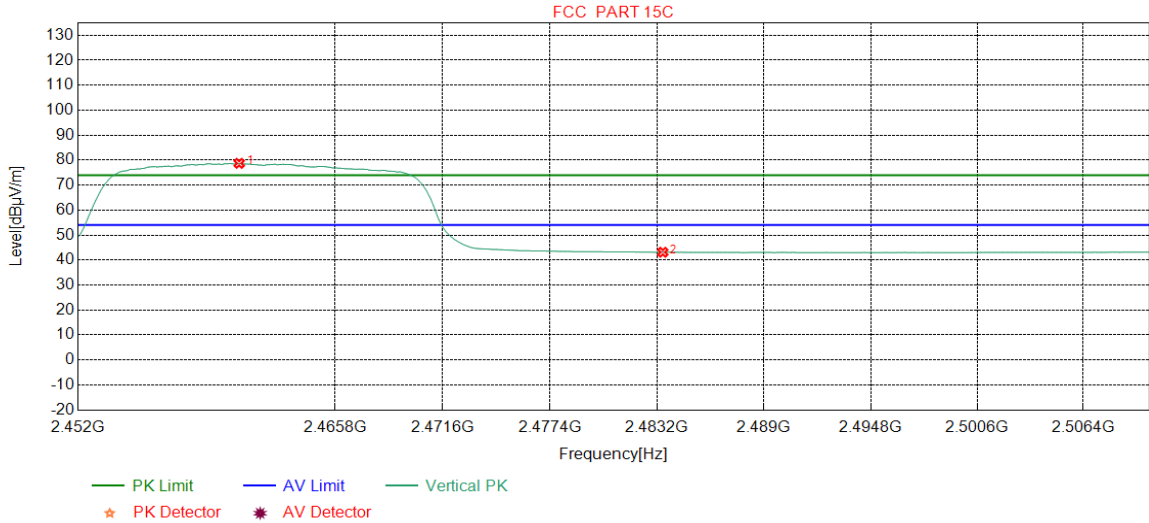

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2460.6383	32.34	13.48	-43.10	76.01	78.73	54.00	-24.73	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	40.48	43.13	54.00	10.87	Pass	Vertical

Mode:	802.11 n(HT20) Transmitting	Channel:	2412
Remark:	PK		


Test Graph

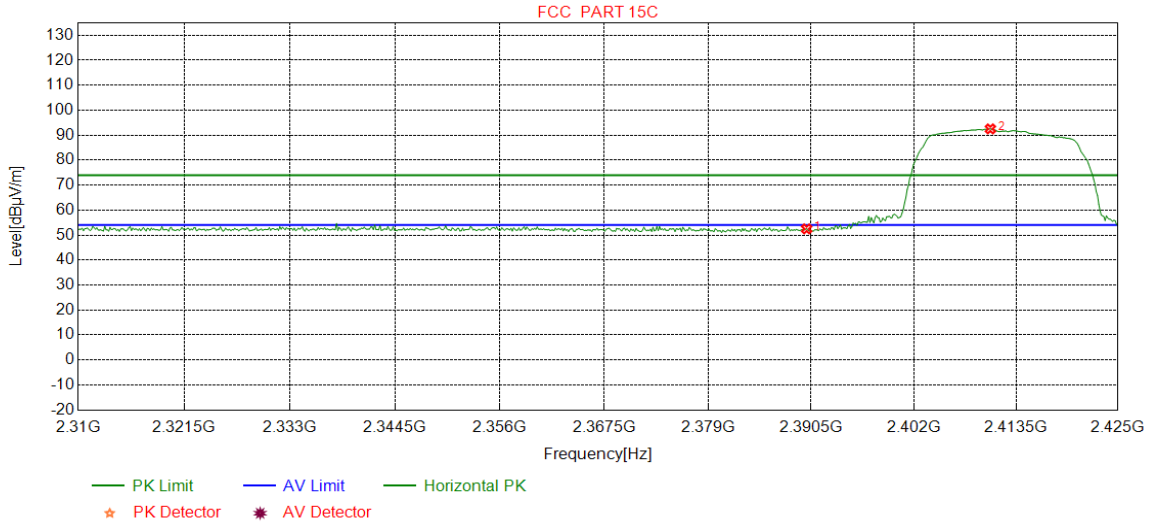

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	49.98	52.48	74.00	21.52	Pass	Horizontal
2	2410.6070	32.27	13.35	-43.11	90.00	92.51	74.00	-18.51	Pass	Horizontal

Mode:	802.11 n(HT20) Transmitting	Channel:	2412
Remark:	PK		


Test Graph

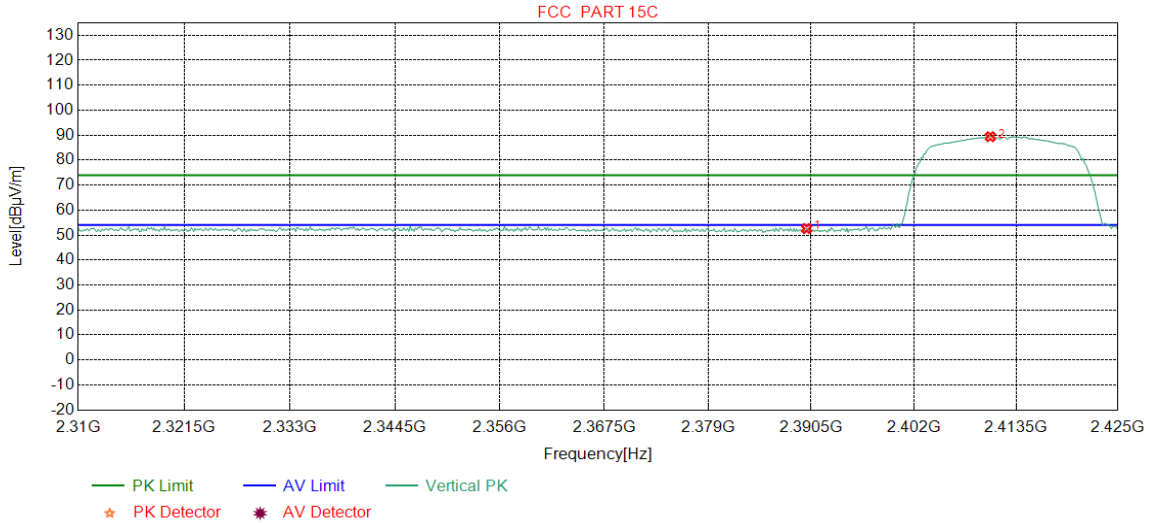

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	50.10	52.60	74.00	21.40	Pass	Vertical
2	2410.6070	32.27	13.35	-43.11	86.88	89.39	74.00	-15.39	Pass	Vertical

Mode:	802.11 n(HT20) Transmitting	Channel:	2412
Remark:	AV		


Test Graph

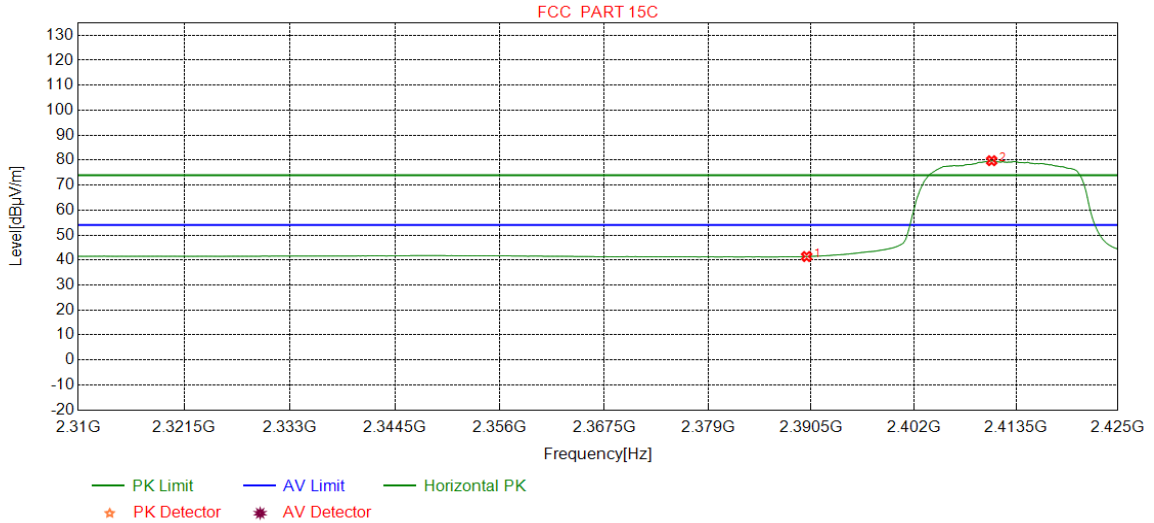

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	38.90	41.40	54.00	12.60	Pass	Horizontal
2	2410.7509	32.28	13.35	-43.12	77.27	79.78	54.00	-25.78	Pass	Horizontal

Mode:	802.11 n(HT20) Transmitting	Channel:	2412
Remark:	AV		


Test Graph

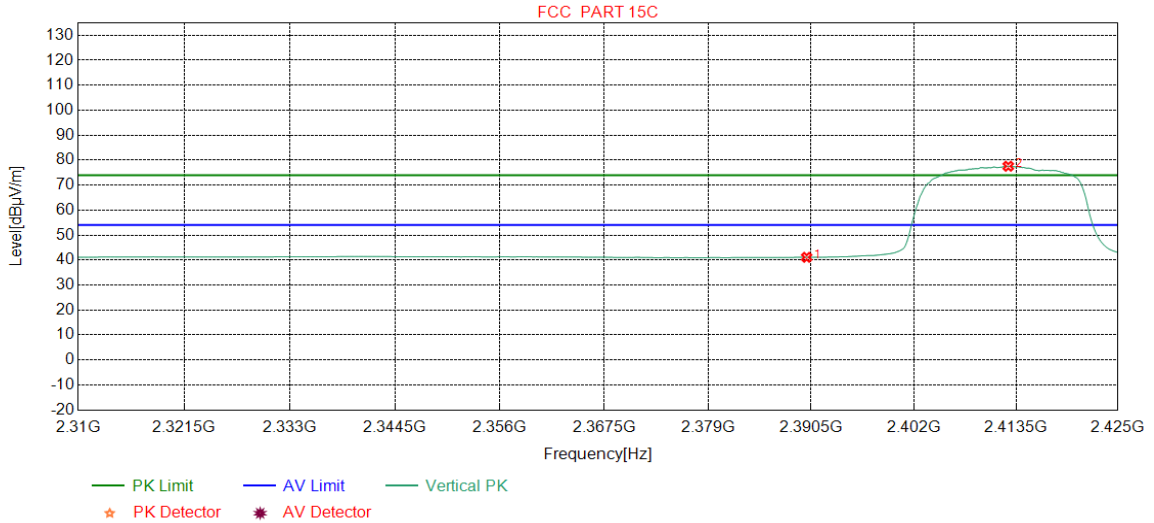

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	38.60	41.10	54.00	12.90	Pass	Vertical
2	2412.6220	32.28	13.36	-43.12	75.04	77.56	54.00	-23.56	Pass	Vertical

Mode:	802.11 n(HT20) Transmitting	Channel:	2462
Remark:	PK		


Test Graph

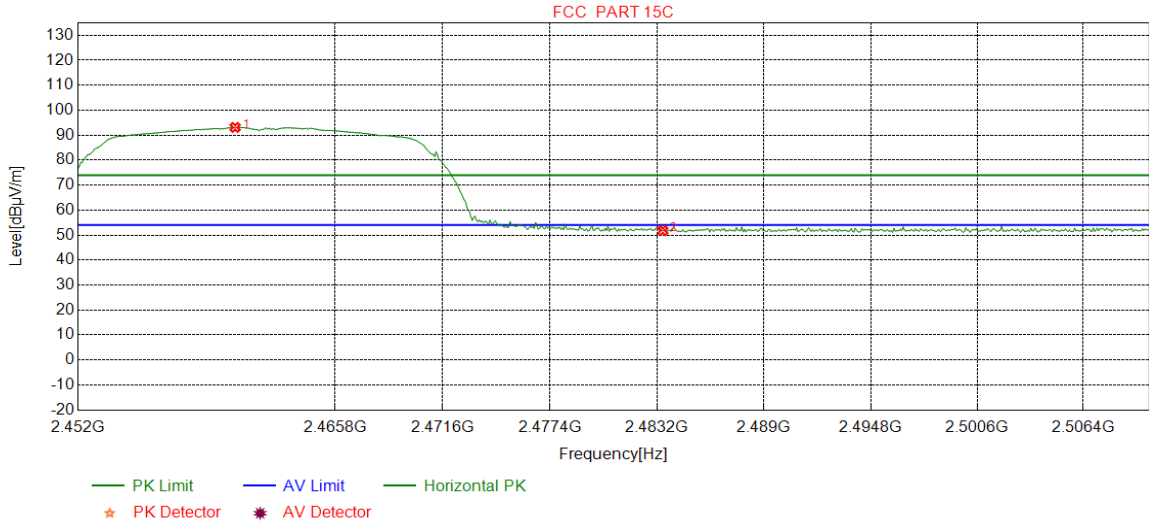

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2460.4205	32.34	13.48	-43.10	90.37	93.09	74.00	-19.09	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	49.13	51.78	74.00	22.22	Pass	Horizontal

Mode:	802.11 n(HT20) Transmitting	Channel:	2462
Remark:	PK		


Test Graph

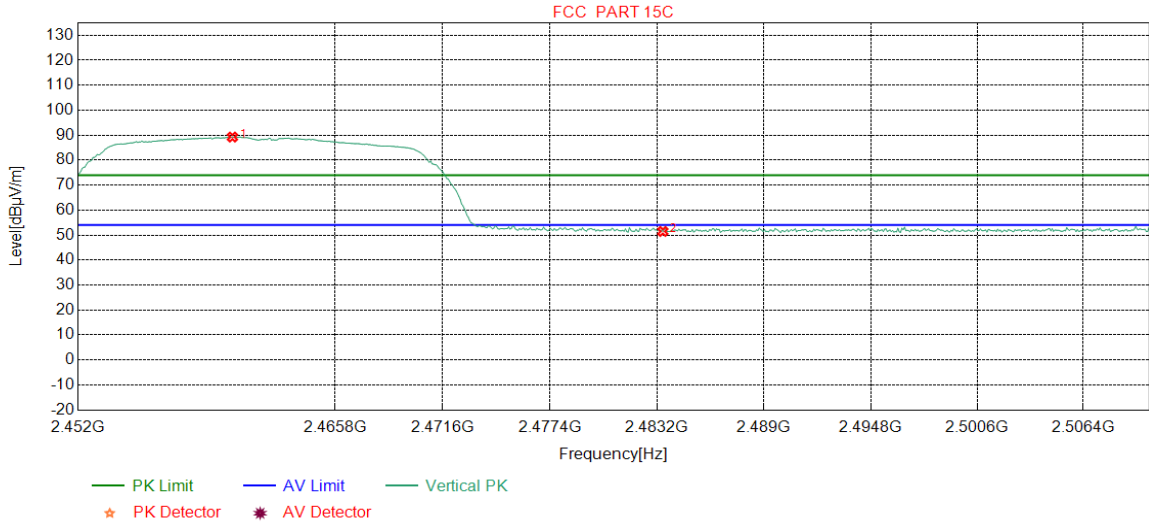

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2460.2753	32.34	13.48	-43.10	86.53	89.25	74.00	-15.25	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	48.80	51.45	74.00	22.55	Pass	Vertical

Mode:	802.11 n(HT20) Transmitting	Channel:	2462
Remark:	AV		


Test Graph

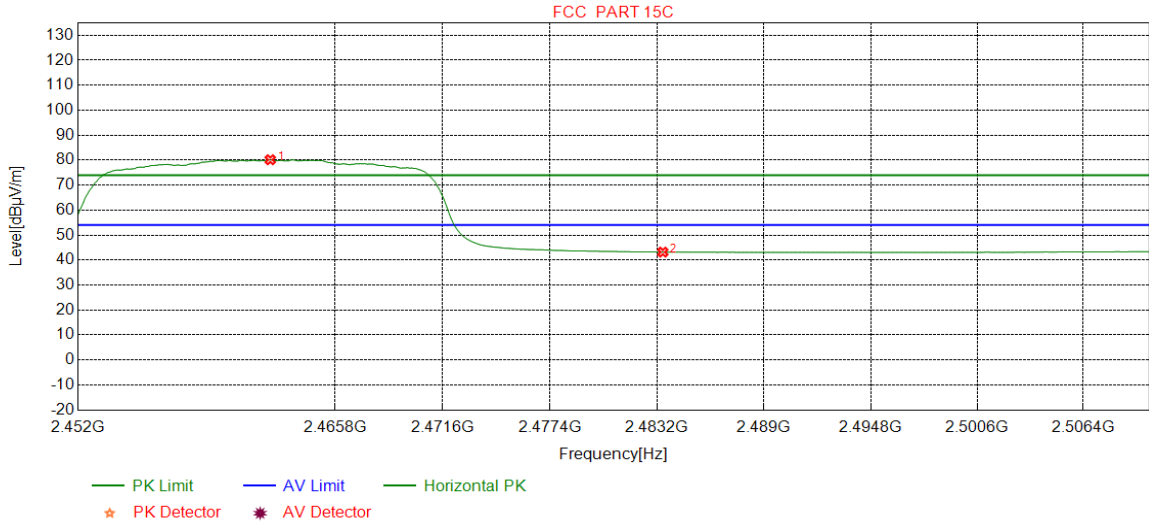

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2462.3079	32.35	13.47	-43.11	77.45	80.16	54.00	-26.16	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	40.53	43.18	54.00	10.82	Pass	Horizontal

Mode:	802.11 n(HT20) Transmitting	Channel:	2462
Remark:	AV		


Test Graph

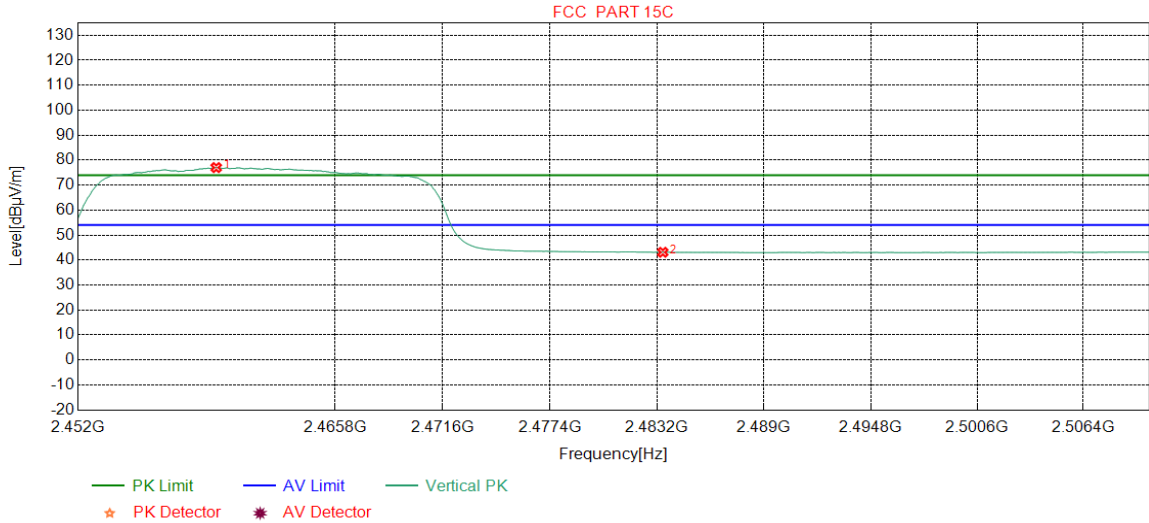

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2459.4043	32.34	13.49	-43.11	74.30	77.02	54.00	-23.02	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	40.46	43.11	54.00	10.89	Pass	Vertical

Mode:	802.11 n(HT40) Transmitting	Channel:	2422
Remark:	PK		


Test Graph

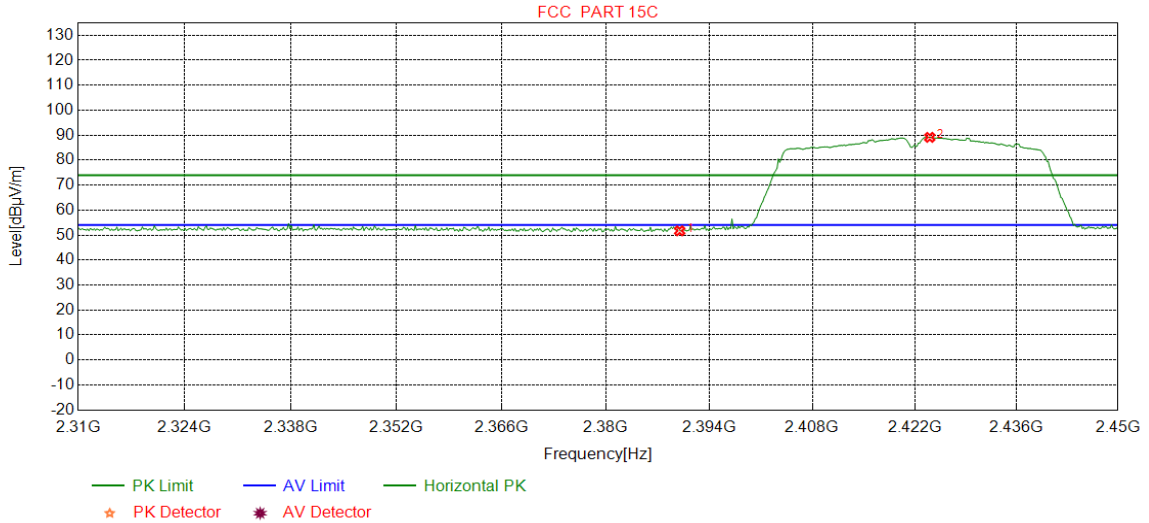

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	49.19	51.69	74.00	22.31	Pass	Horizontal
2	2424.0676	32.29	13.41	-43.11	86.54	89.13	74.00	-15.13	Pass	Horizontal

Mode:	802.11 n(HT40) Transmitting	Channel:	2422
Remark:	PK		


Test Graph

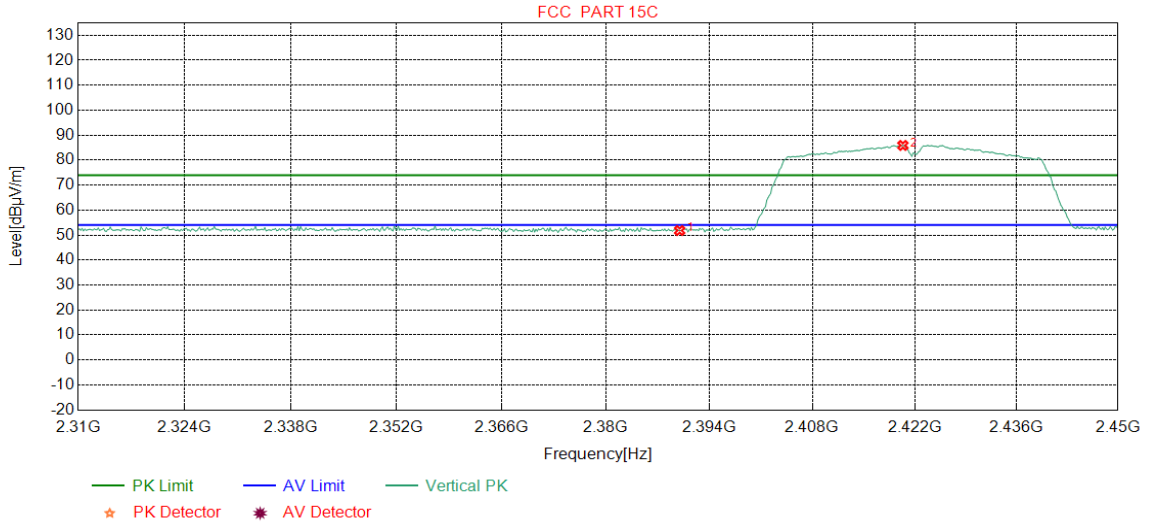

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	49.31	51.81	74.00	22.19	Pass	Vertical
2	2420.3880	32.29	13.39	-43.11	83.32	85.89	74.00	-11.89	Pass	Vertical

Mode:	802.11 n(HT40) Transmitting	Channel:	2422
Remark:	AV		


Test Graph

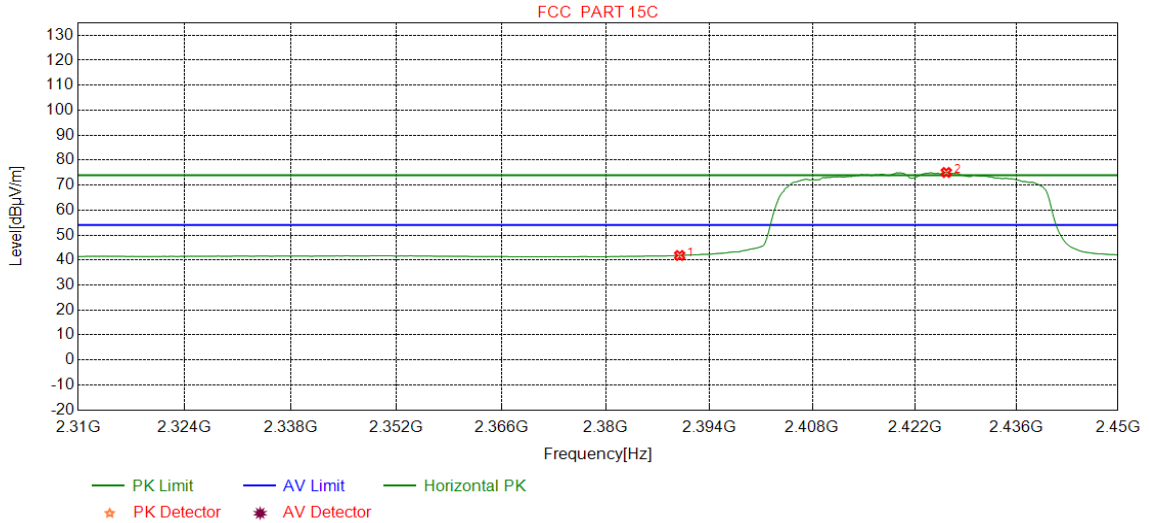

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	39.34	41.84	54.00	12.16	Pass	Horizontal
2	2426.3454	32.30	13.42	-43.12	72.47	75.07	54.00	-21.07	Pass	Horizontal

Mode:	802.11 n(HT40) Transmitting	Channel:	2422
Remark:	AV		


Test Graph

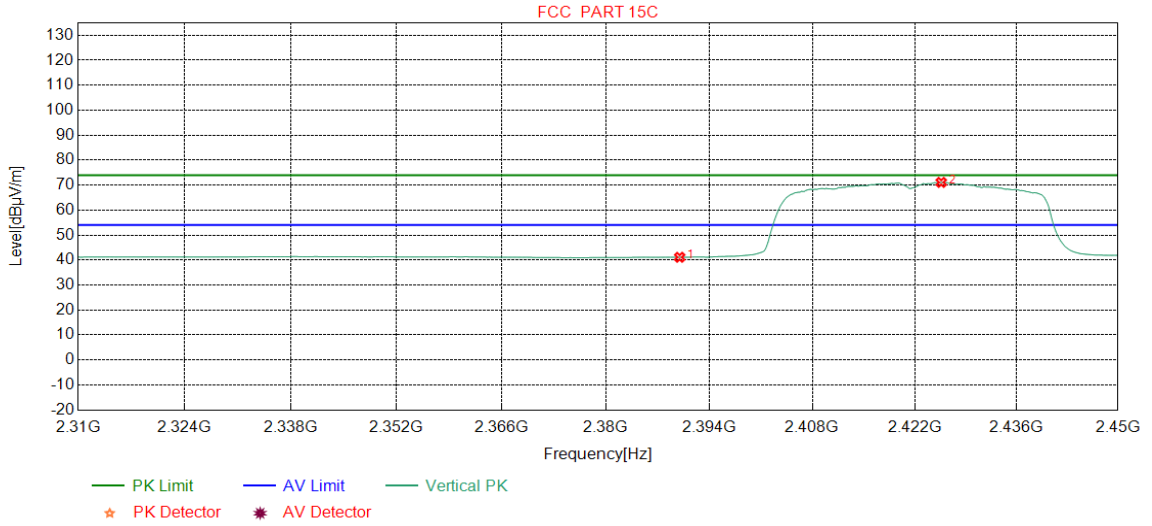

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	38.61	41.11	54.00	12.89	Pass	Vertical
2	2425.6446	32.30	13.42	-43.12	68.49	71.09	54.00	-17.09	Pass	Vertical

Mode:	802.11 n(HT40) Transmitting	Channel:	2452
Remark:	PK		


Test Graph

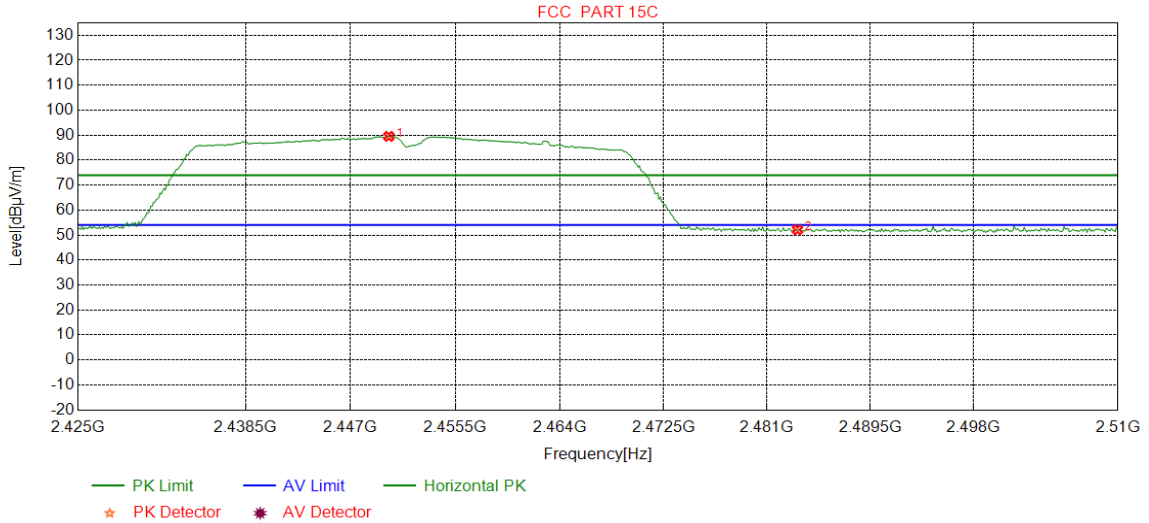

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2450.1064	32.33	13.53	-43.11	86.77	89.52	74.00	-15.52	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	49.47	52.12	74.00	21.88	Pass	Horizontal

Mode:	802.11 n(HT40) Transmitting	Channel:	2452
Remark:	PK		


Test Graph

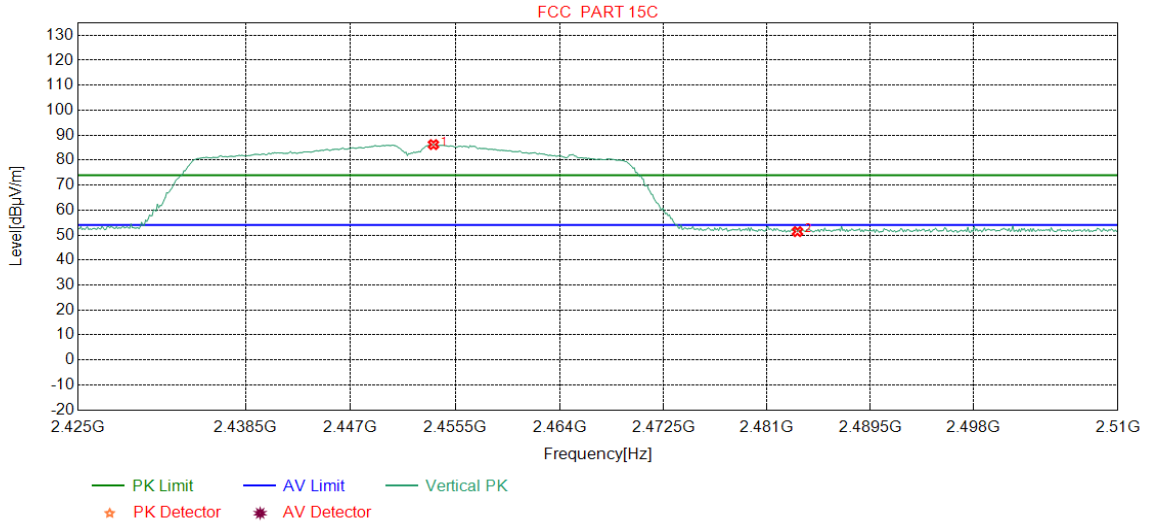

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2453.7234	32.34	13.51	-43.11	83.48	86.22	74.00	-12.22	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	48.73	51.38	74.00	22.62	Pass	Vertical

Mode:	802.11 n(HT40) Transmitting	Channel:	2452
Remark:	AV		


Test Graph

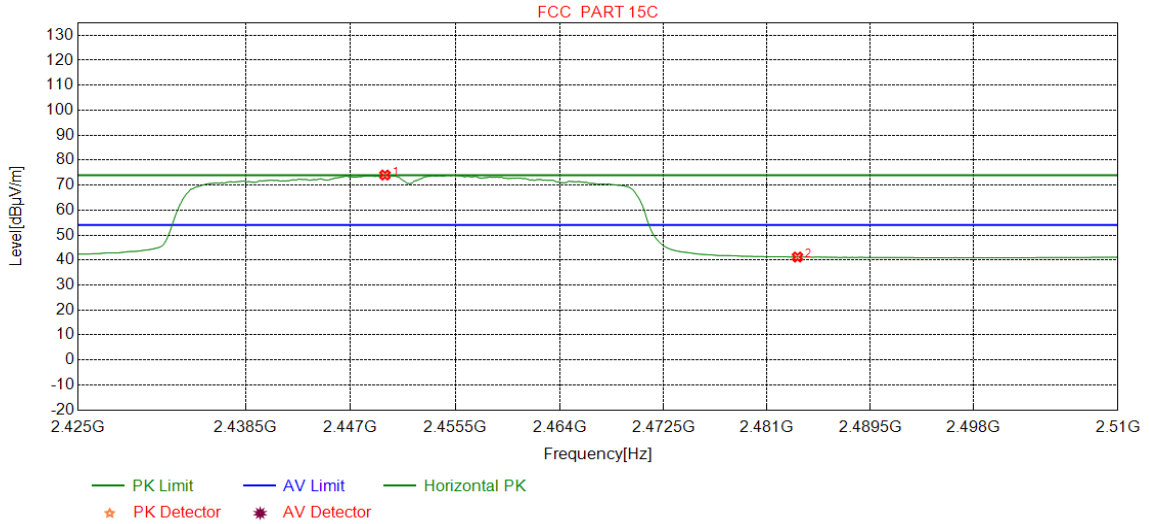

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2449.7872	32.33	13.53	-43.11	71.28	74.03	54.00	-20.03	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	38.56	41.21	54.00	12.79	Pass	Horizontal

Mode:	802.11 n(HT40) Transmitting	Channel:	2452
Remark:	AV		

Test Graph

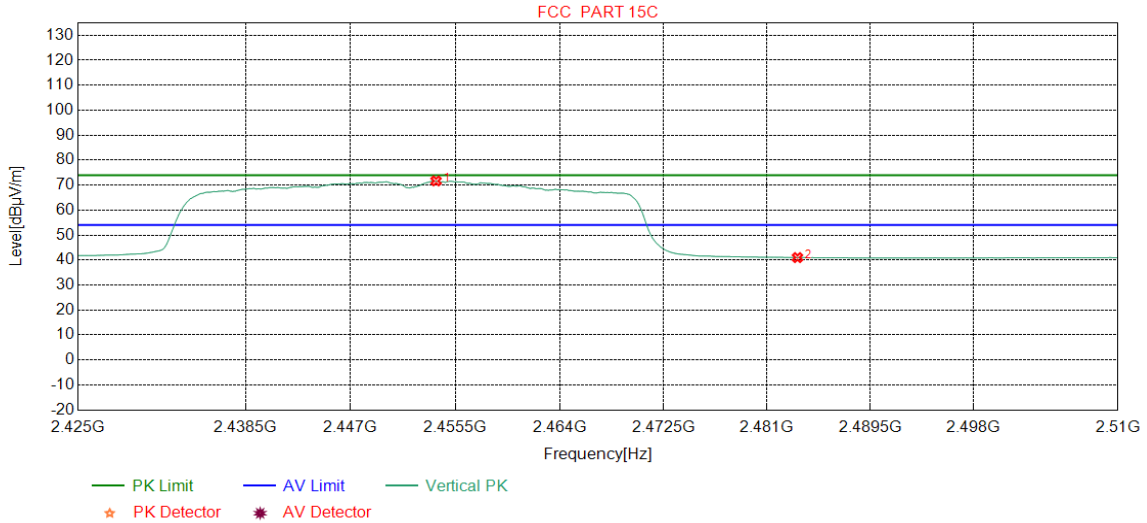

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2453.9362	32.34	13.51	-43.11	68.93	71.67	54.00	-17.67	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	38.34	40.99	54.00	13.01	Pass	Vertical

Note:

1) Through Pre-scan transmitting mode and charge+transmitter mode with all kind of modulation and data rate, find the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40),and then Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

Appendix I): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Test Procedure:					
Below 1GHz test procedure as below:					
<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>					
Above 1GHz test procedure as below:					
<p>g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).</p> <p>h. Test the EUT in the lowest channel, the middle channel ,the Highest channel .</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					

Radiated Spurious Emissions test Data:

Radiated Emission below 1GHz

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 11B Channel 2437MHz was selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Mode:			802.11 b Transmitting					Channel:		2437	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	60.7521	11.40	0.90	-31.81	51.11	31.60	40.00	8.40	Pass	H	PK
2	106.2496	10.94	1.21	-32.00	57.77	37.92	43.50	5.58	Pass	H	PK
3	179.9770	9.00	1.58	-31.99	57.66	36.25	43.50	7.25	Pass	H	PK
4	299.9780	13.20	2.06	-31.40	55.83	39.69	46.00	6.31	Pass	H	PK
5	432.0082	15.91	2.46	-31.83	52.47	39.01	46.00	6.99	Pass	H	PK
6	852.0602	21.52	3.51	-31.74	43.42	36.71	46.00	9.29	Pass	H	PK
7	59.1999	11.73	0.89	-31.83	54.76	35.55	40.00	4.45	Pass	V	PK
8	84.0344	8.03	1.06	-31.98	59.93	37.04	40.00	2.96	Pass	V	PK
9	160.8661	7.95	1.48	-31.99	54.45	31.89	43.50	11.61	Pass	V	PK
10	299.9780	13.20	2.06	-31.40	51.99	35.85	46.00	10.15	Pass	V	PK
11	419.9790	15.72	2.45	-31.84	50.66	36.99	46.00	9.01	Pass	V	PK
12	912.0122	22.17	3.61	-31.46	40.45	34.77	46.00	11.23	Pass	V	PK

Transmitter Emission above 1GHz

Mode:			802.11 b Transmitting					Channel:		2412	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1991.4992	31.64	3.46	-43.17	52.40	44.33	74.00	29.67	Pass	H	PK
2	2949.1949	33.12	4.40	-43.10	50.67	45.09	74.00	28.91	Pass	H	PK
3	4824.1216	34.50	4.61	-42.80	60.44	56.75	74.00	17.25	Pass	H	PK
4	7237.2825	36.34	5.79	-42.16	56.06	56.03	74.00	17.97	Pass	H	PK
5	9054.4036	37.69	6.48	-42.02	48.93	51.08	74.00	22.92	Pass	H	PK
6	9648.0000	37.66	6.72	-42.10	46.96	49.24	74.00	24.76	Pass	H	PK
7	4823.9246	34.50	4.61	-42.80	54.23	50.54	54.00	3.46	Pass	H	AV
8	7236.8255	36.34	5.79	-42.15	49.65	49.63	54.00	4.37	Pass	H	AV
9	1799.2799	30.38	3.32	-42.72	57.33	48.31	74.00	25.69	Pass	V	PK
10	1995.0995	31.67	3.47	-43.20	58.00	49.94	74.00	24.06	Pass	V	PK
11	3191.0127	33.28	4.64	-43.11	51.56	46.37	74.00	27.63	Pass	V	PK
12	4824.1216	34.50	4.61	-42.80	59.31	55.62	74.00	18.38	Pass	V	PK
13	7236.0000	36.34	5.79	-42.16	51.01	50.98	74.00	23.02	Pass	V	PK
14	9648.0000	37.66	6.72	-42.10	45.78	48.06	74.00	25.94	Pass	V	PK
15	4823.8766	34.50	4.61	-42.80	54.11	50.42	54.00	3.58	Pass	V	AV

Mode:			802.11 b Transmitting					Channel:		2437	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1693.8694	29.68	3.19	-42.67	50.59	40.79	74.00	33.21	Pass	H	PK
2	3459.0306	33.38	4.44	-43.10	49.55	44.27	74.00	29.73	Pass	H	PK
3	4874.0000	34.50	4.78	-42.80	59.03	55.51	74.00	18.49	Pass	H	PK
4	6498.2332	35.90	5.47	-42.50	51.04	49.91	74.00	24.09	Pass	H	PK
5	7313.2876	36.41	5.85	-42.13	53.20	53.33	74.00	20.67	Pass	H	PK
6	9748.0000	37.70	6.77	-42.10	46.67	49.04	74.00	24.96	Pass	H	PK
7	4873.8979	34.50	4.78	-42.80	54.25	50.73	54.00	3.27	Pass	H	AV
8	1991.4992	31.64	3.46	-43.17	59.32	51.25	74.00	22.75	Pass	V	PK
9	3627.0418	33.50	4.34	-43.07	49.47	44.24	74.00	29.76	Pass	V	PK
10	4874.0000	34.50	4.78	-42.80	57.15	53.63	74.00	20.37	Pass	V	PK
11	6499.2333	35.90	5.47	-42.50	50.13	49.00	74.00	25.00	Pass	V	PK
12	7309.2873	36.41	5.85	-42.14	50.78	50.90	74.00	23.10	Pass	V	PK
13	9748.0000	37.70	6.77	-42.10	46.40	48.77	74.00	25.23	Pass	V	PK

Mode:			802.11 b Transmitting					Channel:		2462		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark	
1	1793.2793	30.34	3.31	-42.71	55.88	46.82	74.00	27.18	Pass	H	PK	
2	1992.0992	31.65	3.46	-43.18	57.56	49.49	74.00	24.51	Pass	H	PK	
3	3763.0509	33.61	4.36	-43.05	49.70	44.62	74.00	29.38	Pass	H	PK	
4	4924.0000	34.50	4.85	-42.80	59.48	56.03	74.00	17.97	Pass	H	PK	
5	7386.0000	36.49	5.85	-42.13	49.63	49.84	74.00	24.16	Pass	H	PK	
6	9848.0000	37.74	6.83	-42.10	46.51	48.98	74.00	25.02	Pass	H	PK	
7	4923.9023	34.50	4.85	-42.80	53.87	50.42	54.00	3.58	Pass	H	AV	
8	1798.4798	30.37	3.32	-42.71	55.98	46.96	74.00	27.04	Pass	V	PK	
9	1998.0998	31.69	3.47	-43.20	58.73	50.69	74.00	23.31	Pass	V	PK	
10	3895.0597	33.72	4.34	-43.02	49.62	44.66	74.00	29.34	Pass	V	PK	
11	4924.0000	34.50	4.85	-42.80	55.85	52.40	74.00	21.60	Pass	V	PK	
12	7386.0000	36.49	5.85	-42.13	49.63	49.84	74.00	24.16	Pass	V	PK	
13	9848.0000	37.74	6.83	-42.10	45.65	48.12	74.00	25.88	Pass	V	PK	

Mode:			802.11 g Transmitting					Channel:		2412		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark	
1	1798.0798	30.37	3.32	-42.72	51.08	42.05	74.00	31.95	Pass	H	PK	
2	3347.0231	33.34	4.52	-43.10	49.18	43.94	74.00	30.06	Pass	H	PK	
3	4824.0000	34.50	4.61	-42.80	49.95	46.26	74.00	27.74	Pass	H	PK	
4	6432.2288	35.89	5.45	-42.52	51.65	50.47	74.00	23.53	Pass	H	PK	
5	7236.0000	36.34	5.79	-42.16	47.42	47.39	74.00	26.61	Pass	H	PK	
6	9648.0000	37.66	6.72	-42.10	46.36	48.64	74.00	25.36	Pass	H	PK	
7	1992.6993	31.65	3.46	-43.18	58.84	50.77	74.00	23.23	Pass	V	PK	
8	3818.0545	33.65	4.37	-43.04	49.93	44.91	74.00	29.09	Pass	V	PK	
9	4824.0000	34.50	4.61	-42.80	48.68	44.99	74.00	29.01	Pass	V	PK	
10	7236.0000	36.34	5.79	-42.16	46.62	46.59	74.00	27.41	Pass	V	PK	
11	9046.4031	37.69	6.47	-42.01	49.42	51.57	74.00	22.43	Pass	V	PK	
12	9648.0000	37.66	6.72	-42.10	45.73	48.01	74.00	25.99	Pass	V	PK	

Mode:			802.11 g Transmitting					Channel:		2437	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1996.6997	31.68	3.47	-43.20	52.36	44.31	74.00	29.69	Pass	H	PK
2	3572.0381	33.46	4.40	-43.09	49.27	44.04	74.00	29.96	Pass	H	PK
3	4874.0000	34.50	4.78	-42.80	48.98	45.46	74.00	28.54	Pass	H	PK
4	6498.2332	35.90	5.47	-42.50	51.56	50.43	74.00	23.57	Pass	H	PK
5	7311.0000	36.41	5.85	-42.14	46.24	46.36	74.00	27.64	Pass	H	PK
6	9748.0000	37.70	6.77	-42.10	46.42	48.79	74.00	25.21	Pass	H	PK
7	1792.0792	30.33	3.31	-42.71	55.21	46.14	74.00	27.86	Pass	V	PK
8	1990.4991	31.64	3.46	-43.18	57.11	49.03	74.00	24.97	Pass	V	PK
9	3864.0576	33.69	4.35	-43.02	49.85	44.87	74.00	29.13	Pass	V	PK
10	4874.0000	34.50	4.78	-42.80	47.52	44.00	74.00	30.00	Pass	V	PK
11	7311.0000	36.41	5.85	-42.14	46.31	46.43	74.00	27.57	Pass	V	PK
12	9748.0000	37.70	6.77	-42.10	45.80	48.17	74.00	25.83	Pass	V	PK

Mode:			802.11 g Transmitting					Channel:		2462	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1999.9000	31.70	3.47	-43.20	53.97	45.94	74.00	28.06	Pass	H	PK
2	3395.0263	33.36	4.56	-43.11	48.93	43.74	74.00	30.26	Pass	H	PK
3	4924.0000	34.50	4.85	-42.80	48.38	44.93	74.00	29.07	Pass	H	PK
4	6565.2377	35.93	5.40	-42.46	49.74	48.61	74.00	25.39	Pass	H	PK
5	7386.0000	36.49	5.85	-42.13	46.18	46.39	74.00	27.61	Pass	H	PK
6	9848.0000	37.74	6.83	-42.10	46.04	48.51	74.00	25.49	Pass	H	PK
7	1993.8994	31.66	3.46	-43.18	58.31	50.25	74.00	23.75	Pass	V	PK
8	4112.0741	33.96	4.37	-42.96	49.82	45.19	74.00	28.81	Pass	V	PK
9	4924.0000	34.50	4.85	-42.80	47.71	44.26	74.00	29.74	Pass	V	PK
10	5988.1992	35.78	5.34	-42.60	49.09	47.61	74.00	26.39	Pass	V	PK
11	7386.0000	36.49	5.85	-42.13	46.42	46.63	74.00	27.37	Pass	V	PK
12	9848.0000	37.74	6.83	-42.10	46.61	49.08	74.00	24.92	Pass	V	PK

Mode:			802.11 n(HT20) Transmitting					Channel:		2412	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1796.4796	30.36	3.31	-42.71	53.15	44.11	74.00	29.89	Pass	H	PK
2	1992.6993	31.65	3.46	-43.18	51.68	43.61	74.00	30.39	Pass	H	PK
3	3452.0301	33.38	4.43	-43.10	50.12	44.83	74.00	29.17	Pass	H	PK
4	4824.0000	34.50	4.61	-42.80	50.18	46.49	74.00	27.51	Pass	H	PK
5	7236.0000	36.34	5.79	-42.16	46.46	46.43	74.00	27.57	Pass	H	PK
6	9648.0000	37.66	6.72	-42.10	45.53	47.81	74.00	26.19	Pass	H	PK
7	1995.6996	31.67	3.47	-43.19	57.72	49.67	74.00	24.33	Pass	V	PK
8	3483.0322	33.39	4.47	-43.10	48.75	43.51	74.00	30.49	Pass	V	PK
9	4824.0000	34.50	4.61	-42.80	48.34	44.65	74.00	29.35	Pass	V	PK
10	7236.0000	36.34	5.79	-42.16	46.89	46.86	74.00	27.14	Pass	V	PK
11	9648.0000	37.66	6.72	-42.10	46.11	48.39	74.00	25.61	Pass	V	PK
12	11408.560	38.85	7.44	-42.01	48.95	53.23	74.00	20.77	Pass	V	PK

Mode:			802.11 n(HT20) Transmitting					Channel:		2437	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1883.8884	30.93	3.41	-42.91	50.56	41.99	74.00	32.01	Pass	H	PK
2	3692.0461	33.55	4.26	-43.06	49.34	44.09	74.00	29.91	Pass	H	PK
3	4874.0000	34.50	4.78	-42.80	48.72	45.20	74.00	28.80	Pass	H	PK
4	6498.2332	35.90	5.47	-42.50	50.26	49.13	74.00	24.87	Pass	H	PK
5	7311.0000	36.41	5.85	-42.14	46.05	46.17	74.00	27.83	Pass	H	PK
6	9748.0000	37.70	6.77	-42.10	47.02	49.39	74.00	24.61	Pass	H	PK
7	1991.8992	31.65	3.46	-43.18	57.48	49.41	74.00	24.59	Pass	V	PK
8	3749.0499	33.60	4.35	-43.05	49.95	44.85	74.00	29.15	Pass	V	PK
9	4874.0000	34.50	4.78	-42.80	47.90	44.38	74.00	29.62	Pass	V	PK
10	6460.2307	35.89	5.51	-42.51	49.16	48.05	74.00	25.95	Pass	V	PK
11	7311.0000	36.41	5.85	-42.14	46.10	46.22	74.00	27.78	Pass	V	PK
12	9748.0000	37.70	6.77	-42.10	47.02	49.39	74.00	24.61	Pass	V	PK

Mode:			802.11 n(HT20) Transmitting					Channel:		2462	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1999.5000	31.70	3.47	-43.20	53.85	45.82	74.00	28.18	Pass	H	PK
2	3835.0557	33.67	4.36	-43.03	49.95	44.95	74.00	29.05	Pass	H	PK
3	4924.0000	34.50	4.85	-42.80	48.55	45.10	74.00	28.90	Pass	H	PK
4	6355.2237	35.87	5.44	-42.52	49.00	47.79	74.00	26.21	Pass	H	PK
5	7386.0000	36.49	5.85	-42.13	46.92	47.13	74.00	26.87	Pass	H	PK
6	9848.0000	37.74	6.83	-42.10	46.87	49.34	74.00	24.66	Pass	H	PK
7	1992.2992	31.65	3.46	-43.18	58.39	50.32	74.00	23.68	Pass	V	PK
8	3308.0205	33.32	4.57	-43.10	49.42	44.21	74.00	29.79	Pass	V	PK
9	4924.0000	34.50	4.85	-42.80	47.06	43.61	74.00	30.39	Pass	V	PK
10	6352.2235	35.87	5.45	-42.53	49.30	48.09	74.00	25.91	Pass	V	PK
11	7386.0000	36.49	5.85	-42.13	45.94	46.15	74.00	27.85	Pass	V	PK
12	9848.0000	37.74	6.83	-42.10	45.97	48.44	74.00	25.56	Pass	V	PK

Mode:			802.11 n(HT40) Transmitting					Channel:		2422	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1799.2799	30.38	3.32	-42.72	51.83	42.81	74.00	31.19	Pass	H	PK
2	3742.0495	33.59	4.33	-43.05	49.37	44.24	74.00	29.76	Pass	H	PK
3	4844.0000	34.50	4.66	-42.80	48.39	44.75	74.00	29.25	Pass	H	PK
4	6458.2305	35.89	5.51	-42.50	50.91	49.81	74.00	24.19	Pass	H	PK
5	7266.0000	36.37	5.80	-42.15	46.10	46.12	74.00	27.88	Pass	H	PK
6	9688.0000	37.68	6.62	-42.10	46.02	48.22	74.00	25.78	Pass	H	PK
7	1799.4799	30.38	3.32	-42.71	55.54	46.53	74.00	27.47	Pass	V	PK
8	1991.0991	31.64	3.46	-43.18	57.80	49.72	74.00	24.28	Pass	V	PK
9	3935.0623	33.75	4.34	-43.01	50.18	45.26	74.00	28.74	Pass	V	PK
10	4844.0000	34.50	4.66	-42.80	47.28	43.64	74.00	30.36	Pass	V	PK
11	7266.0000	36.37	5.80	-42.15	46.70	46.72	74.00	27.28	Pass	V	PK
12	9688.0000	37.68	6.62	-42.10	46.61	48.81	74.00	25.19	Pass	V	PK

Mode:			802.11 n(HT40) Transmitting					Channel:		2437	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1796.4796	30.36	3.31	-42.71	51.58	42.54	74.00	31.46	Pass	H	PK
2	3831.0554	33.66	4.36	-43.03	49.80	44.79	74.00	29.21	Pass	H	PK
3	4874.0000	34.50	4.78	-42.80	47.19	43.67	74.00	30.33	Pass	H	PK
4	6499.2333	35.90	5.47	-42.50	50.67	49.54	74.00	24.46	Pass	H	PK
5	7311.0000	36.41	5.85	-42.14	45.37	45.49	74.00	28.51	Pass	H	PK
6	9748.0000	37.70	6.77	-42.10	46.41	48.78	74.00	25.22	Pass	H	PK
7	1999.9000	31.70	3.47	-43.20	57.69	49.66	74.00	24.34	Pass	V	PK
8	3911.0607	33.73	4.34	-43.02	50.04	45.09	74.00	28.91	Pass	V	PK
9	4874.0000	34.50	4.78	-42.80	47.14	43.62	74.00	30.38	Pass	V	PK
10	7311.0000	36.41	5.85	-42.14	45.83	45.95	74.00	28.05	Pass	V	PK
11	8846.3898	37.36	6.42	-42.00	47.99	49.77	74.00	24.23	Pass	V	PK
12	9748.0000	37.70	6.77	-42.10	46.74	49.11	74.00	24.89	Pass	V	PK

Mode:			802.11 n(HT40) Transmitting					Channel:		2452	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1796.4796	30.36	3.31	-42.71	53.39	44.35	74.00	29.65	Pass	H	PK
2	4191.0794	34.07	4.49	-42.93	49.37	45.00	74.00	29.00	Pass	H	PK
3	4904.0000	34.50	4.88	-42.80	47.57	44.15	74.00	29.85	Pass	H	PK
4	5932.1955	35.69	5.23	-42.60	49.51	47.83	74.00	26.17	Pass	H	PK
5	7356.0000	36.46	5.85	-42.13	46.79	46.97	74.00	27.03	Pass	H	PK
6	9808.0000	37.72	6.59	-42.10	46.91	49.12	74.00	24.88	Pass	H	PK
7	1992.2992	31.65	3.46	-43.18	57.95	49.88	74.00	24.12	Pass	V	PK
8	3819.0546	33.66	4.37	-43.04	49.48	44.47	74.00	29.53	Pass	V	PK
9	4904.0000	34.50	4.88	-42.80	46.20	42.78	74.00	31.22	Pass	V	PK
10	6456.2304	35.89	5.51	-42.50	49.43	48.33	74.00	25.67	Pass	V	PK
11	7356.0000	36.46	5.85	-42.13	46.25	46.43	74.00	27.57	Pass	V	PK
12	9808.0000	37.72	6.59	-42.10	46.26	48.47	74.00	25.53	Pass	V	PK

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.