


## TEST REPORT

**Product** : Pilot Translating Earpiece  
**Trade mark** :  **WAVERLYLABS**  
**Model/Type reference** : V100LR,V100LB,V100LW  
**Serial Number** : N/A  
**Report Number** : EED32J00237201  
**FCC ID** : 2AN4B-WLABSV1PL  
**Date of Issue** : Nov. 22, 2017  
**Test Standards** : 47 CFR Part 15 Subpart C  
**Test result** : PASS

Prepared for:

**Waverly Labs Inc.**

**19 Morris Ave Brooklyn New York United States 11205**

Prepared by:

**Centre Testing International Group Co., Ltd.**  
**Hongwei Industrial Zone, Bao'an 70 District,**  
**Shenzhen, Guangdong, China**  
**TEL: +86-755-3368 3668**  
**FAX: +86-755-3368 3385**



Tested By:

*Tom - chen*

Tom chen (Test Project)

Reviewed by:

*Kevin Yang*

Kevin yang (Reviewer)

Compiled by:

*Kevin lan*

Kevin lan (Project Engineer)

Approved by:

*Sheek Luo*

Sheek Luo (Lab supervisor)

Date:

Nov. 22, 2017

Check No.: 2392114011

## 2 Version

Version No.	Date	Description
00	Nov. 22, 2017	Original

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	N/A
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
<b>20dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Carrier Frequencies Separation</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Hopping Channel Number</b>	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
<b>Dwell Time</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Pseudorandom Frequency Hopping Sequence</b>	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
<b>RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

**Remark:**

The tested sample(s) and the sample information are provided by the client.

N/A:The device is only battery operated, the conducted emission at AC mains is not applicable.

Model No.: V100LR,V100LB,V100LW

Only the model V100LR was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being color of appearance and model name.

## 4 Content

<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 VERSION</b> .....	<b>2</b>
<b>3 TEST SUMMARY</b> .....	<b>3</b>
<b>4 CONTENT</b> .....	<b>4</b>
<b>5 TEST REQUIREMENT</b> .....	<b>5</b>
5.1 TEST SETUP.....	5
5.1.1 For Radiated Emissions test setup.....	5
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
<b>6 GENERAL INFORMATION</b> .....	<b>7</b>
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	7
6.4 DESCRIPTION OF SUPPORT UNITS.....	8
6.5 TEST LOCATION.....	8
6.6 DEVIATION FROM STANDARDS.....	8
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	8
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	8
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	8
<b>7 EQUIPMENT LIST</b> .....	<b>9</b>
<b>8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b> .....	<b>11</b>
Appendix A): 20dB Occupied Bandwidth.....	12
Appendix B): Carrier Frequency Separation.....	16
Appendix C): Dwell Time.....	20
Appendix D): Hopping Channel Number.....	24
Appendix E): Conducted Peak Output Power.....	26
Appendix F): Band-edge for RF Conducted Emissions.....	30
Appendix G): RF Conducted Spurious Emissions.....	35
Appendix H): Pseudorandom Frequency Hopping Sequence.....	42
Appendix I): Antenna Requirement.....	43
Appendix J): Restricted bands around fundamental frequency (Radiated).....	44
Appendix K): Radiated Spurious Emissions.....	51
<b>PHOTOGRAPHS OF TEST SETUP</b> .....	<b>59</b>
<b>PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b> .....	<b>61</b>

## 5 Test Requirement

### 5.1 Test setup

#### 5.1.1 For Radiated Emissions test setup

Radiated Emissions setup:

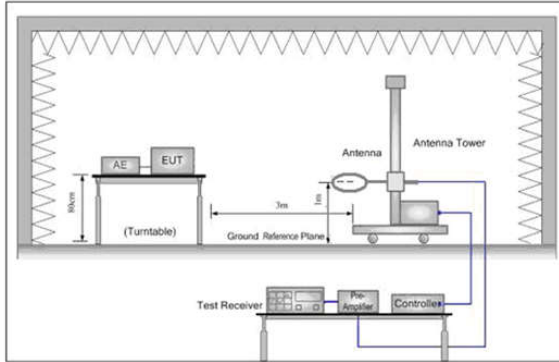


Figure 1. Below 30MHz

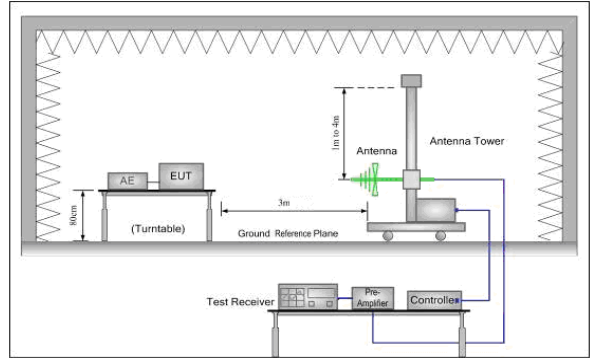


Figure 2. 30MHz to 1GHz

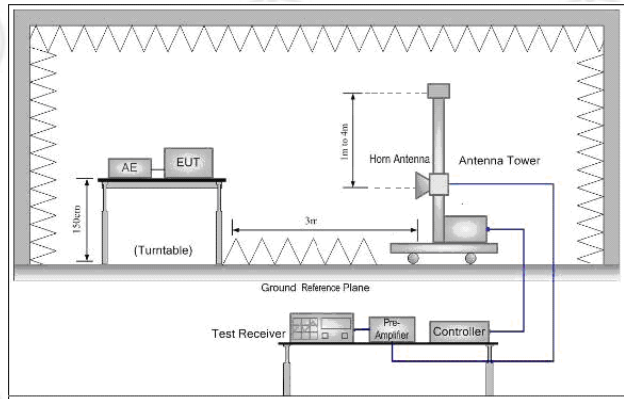


Figure 3. Above 1GHz



## 5.2 Test Environment

<b>Operating Environment:</b>	
Temperature:	24.6 °C
Humidity:	55 % RH
Atmospheric Pressure:	1010mbar

## 5.3 Test Condition

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/ $\pi$ /4DQPSK/ 8DPSK(DH1,DH3,DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel79
		2402MHz	2441MHz	2480MHz

Test mode:

### Pre-scan under all rate at Middle channel

Mode	GFSK		
packets	1-DH1	1-DH3	1-DH5
Power(dBm)	7.105	7.152	7.734

Mode	$\pi$ /4DQPSK		
packets	2-DH1	2-DH3	2-DH5
Power(dBm)	6.487	6.784	6.819
Mode	8DPSK		
packets	3-DH1	3-DH3	3-DH5
Power(dBm)	6.312	6.957	7.001


Through Pre-scan, 1-DH5 packet the power is the worst case of GFSK, 2-DH5 packet the power is the worst case of  $\pi$ /4DQPSK, 3-DH5 packet the power is the worst case of 8DPSK.

## 6 General Information

### 6.1 Client Information

Applicant:	Waverly Labs Inc.
Address of Applicant:	19 Morris Ave Brooklyn New York United States 11205
Manufacturer:	Waverly Labs Inc.
Address of Manufacturer:	19 Morris Ave Brooklyn New York United States 11205
Factory:	ShengHai Electronics (Shenzhen) Ltd.
Address of Factory:	Block 17-19, Hui Ming Ying Industry, Yan Chuan, Song Gang, Baoan County, Shenzhen, China 518105

### 6.2 General Description of EUT

Product Name:	Pilot Translating Earpiece
Model No.(EUT):	V100LR,V100LB,V100LW
Test Model No.:	V100LR
Trade mark:	 <b>WAVERLYLABS</b>
EUT Supports Radios application:	BT4.1 Dual mode, 2402-2480MHz
Power Supply:	Lithium-ion button cell:1x3.7V(Z55)=3.7V
Sample Received Date:	Oct. 25, 2017
Sample tested Date:	Oct. 25, 2017 Nov. 21, 2017

### 6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	Other then BT4.1
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Portable production
Test Power Grade:	Class 1(manufacturer declare )
Test Software of EUT:	Blue Suite 2.4.8 (manufacturer declare )
Antenna Type:	Monopole antenna
Antenna Gain:	0dBi
Test Voltage:	Lithium-ion button cell:1x3.7V(Z55)=3.7V

Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz

8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

#### 6.4 Description of Support Units

The EUT has been tested independently.

#### 6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

#### 6.6 Deviation from Standards

None.

#### 6.7 Abnormalities from Standard Conditions

None.

#### 6.8 Other Information Requested by the Customer

None.

#### 6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9 x 10 <sup>-8</sup>
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%



## 7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-14-2017	03-13-2018
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-14-2017	03-13-2018
Signal Generator	Keysight	N5182B	MY53051549	03-14-2017	03-13-2018
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-11-2017	01-10-2018
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA09C L12-0395-001	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA08C L12-0393-001	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA04C L12-0396-002	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA03C L12-0394-001	---	01-11-2017	01-10-2018
DC Power	Keysight	E3642A	MY54436035	03-14-2017	03-13-2018
PC-1	Lenovo	R4960d	---	04-01-2017	03-31-2018
BT&WI-FI Automatic control	R&S	OSP120	101374	03-14-2017	03-13-2018
RF control unit	JS Tonscend	JS0806-2	158060006	03-14-2017	03-13-2018
BT&WI-FI Automatic test software	JS Tonscend	JS1120-2	---	03-14-2017	03-13-2018

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-05-2016	06-05-2019
TRILOG Broadband Antenna	SCHWARZBEC K	VULB9163	9163-484	05-23-2017	05-22-2018
Microwave Preamplifier	Agilent	8449B	3008A02425	02-16-2017	02-15-2018
Horn Antenna	ETS-LINDGREN	3117	00057407	07-20-2015	07-18-2018
Loop Antenna	ETS	6502	00071730	06-22-2017	06-21-2018
Microwave Preamplifier	A.H.SYSTEMS	PAP-1840-60	6041.6042	06-30-2015	06-28-2018
Horn Antenna	A.H.SYSTEMS	SAS-574 374	---	06-30-2015	06-28-2018
Spectrum Analyzer	R&S	FSP40	100416	06-13-2017	06-12-2018
Receiver	R&S	ESCI	100435	06-14-2017	06-13-2018
Multi device Controller	matur	NCD/070/10711 112	---	01-11-2017	01-10-2018
LISN	schwarzbeck	NNBM8125	81251547	06-13-2017	06-12-2018
LISN	schwarzbeck	NNBM8125	81251548	06-13-2017	06-12-2018
Signal Generator	Agilent	E4438C	MY45095744	03-14-2017	03-13-2018
Signal Generator	Keysight	E8257D	MY53401106	03-14-2017	03-13-2018
Temperature/ Humidity Indicator	TAYLOR	1451	1905	05-08-2017	05-07-2018
Cable line	Fulai(7M)	SF106	5219/6A	01-11-2017	01-10-2018
Cable line	Fulai(6M)	SF106	5220/6A	01-11-2017	01-10-2018
Cable line	Fulai(3M)	SF106	5216/6A	01-11-2017	01-10-2018
Cable line	Fulai(3M)	SF106	5217/6A	01-11-2017	01-10-2018
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-11-2017	01-10-2018
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	---	01-11-2017	01-10-2018

## 8 Radio Technical Requirements Specification

### Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

### Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	N/A	N/A
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix K)

**Appendix A): 20dB Occupied Bandwidth**

**Test Result**

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict	Remark
GFSK	LCH	0.9396	0.87153	PASS	Peak detector
GFSK	MCH	0.9371	0.85396	PASS	
GFSK	HCH	0.9348	0.85206	PASS	
$\pi/4$ DQPSK	LCH	1.229	1.1650	PASS	
$\pi/4$ DQPSK	MCH	1.229	1.1679	PASS	
$\pi/4$ DQPSK	HCH	1.232	1.1748	PASS	
8DPSK	LCH	1.263	1.1580	PASS	
8DPSK	MCH	1.276	1.1654	PASS	
8DPSK	HCH	1.261	1.1670	PASS	

**Test Graph**





<p><math>\pi/4</math>DQPSK/LCH</p>	<p>KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Center Freq: 2.402000000 GHz Trig: Free Run Avg/Hold: &gt;10/10 #Gain: Low #Atten: 10 dB Radio Std: None Radio Device: BTS</p> <p>Ref Offset 19.08 dB Ref 19.08 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1650 MHz Total Power 11.7 dBm</p> <p>Transmit Freq Error -13.548 kHz OBW Power 99.00 % x dB Bandwidth 1.229 MHz x dB -20.00 dB</p>
<p><math>\pi/4</math>DQPSK/MCH</p>	<p>KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Center Freq: 2.441000000 GHz Trig: Free Run Avg/Hold: &gt;10/10 #Gain: Low #Atten: 10 dB Radio Std: None Radio Device: BTS</p> <p>Ref Offset 19.02 dB Ref 19.02 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1679 MHz Total Power 13.2 dBm</p> <p>Transmit Freq Error -13.860 kHz OBW Power 99.00 % x dB Bandwidth 1.229 MHz x dB -20.00 dB</p>
<p><math>\pi/4</math>DQPSK/HCH</p>	<p>KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Center Freq: 2.480000000 GHz Trig: Free Run Avg/Hold: &gt;10/10 #Gain: Low #Atten: 10 dB Radio Std: None Radio Device: BTS</p> <p>Ref Offset 19.05 dB Ref 19.05 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1748 MHz Total Power 12.8 dBm</p> <p>Transmit Freq Error -12.655 kHz OBW Power 99.00 % x dB Bandwidth 1.232 MHz x dB -20.00 dB</p>

<p>8DPSK/LCH</p>	<p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset 19.08 dB Ref 19.08 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1580 MHz Total Power 12.3 dBm</p> <p>Transmit Freq Error -9.204 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.263 MHz x dB -20.00 dB</p>
<p>8DPSK/MCH</p>	<p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Ref Offset 19.02 dB Ref 19.02 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1654 MHz Total Power 13.7 dBm</p> <p>Transmit Freq Error -11.098 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.276 MHz x dB -20.00 dB</p>
<p>8DPSK/HCH</p>	<p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset 19.05 dB Ref 19.05 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1670 MHz Total Power 13.5 dBm</p> <p>Transmit Freq Error -12.213 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.261 MHz x dB -20.00 dB</p>

## Appendix B): Carrier Frequency Separation


**Result Table**

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	0.958	PASS
GFSK	MCH	1.038	PASS
GFSK	HCH	1.082	PASS
$\pi/4$ DQPSK	LCH	1.128	PASS
$\pi/4$ DQPSK	MCH	1.150	PASS
$\pi/4$ DQPSK	HCH	1.158	PASS
8DPSK	LCH	1.018	PASS
8DPSK	MCH	0.910	PASS
8DPSK	HCH	0.966	PASS




**Test Graph**





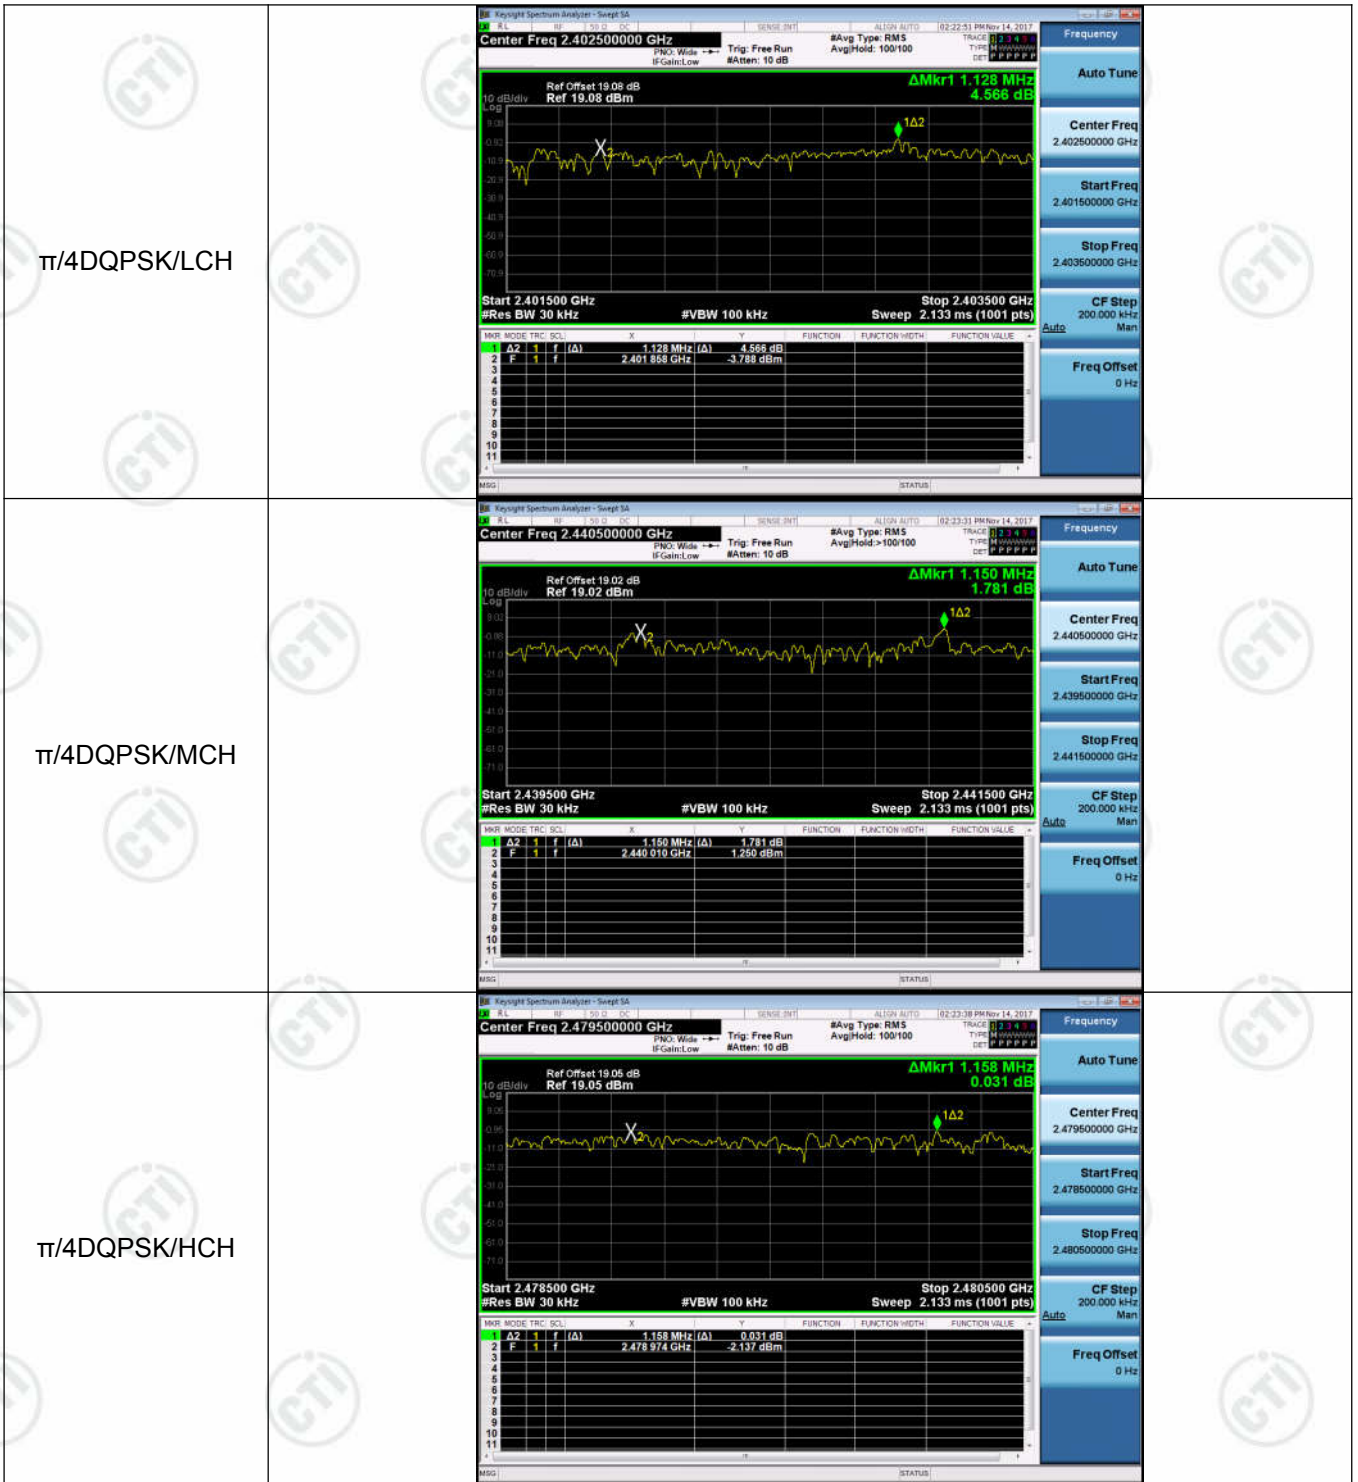

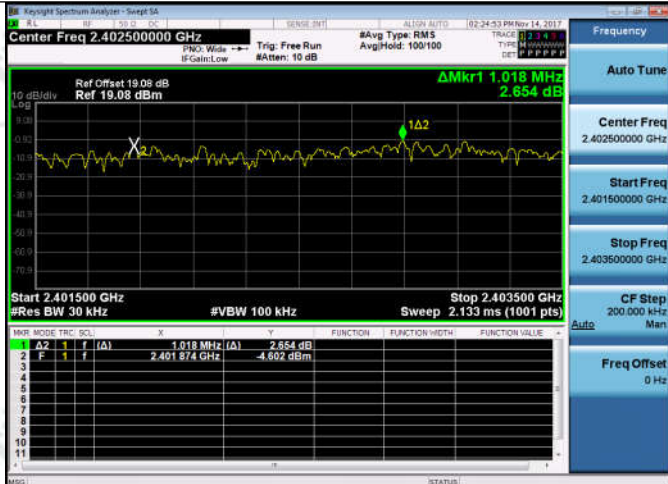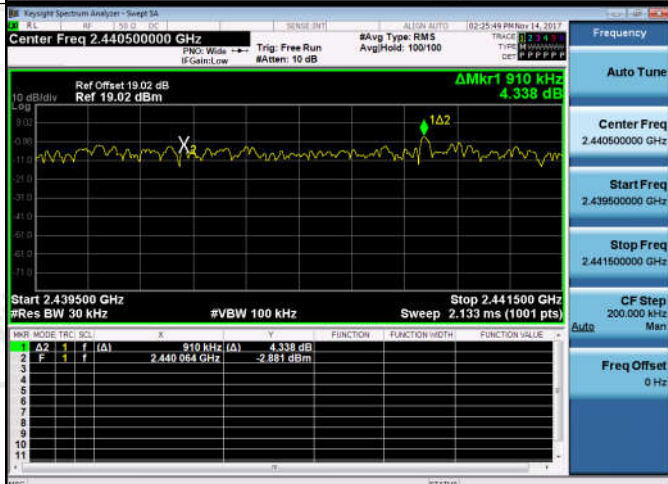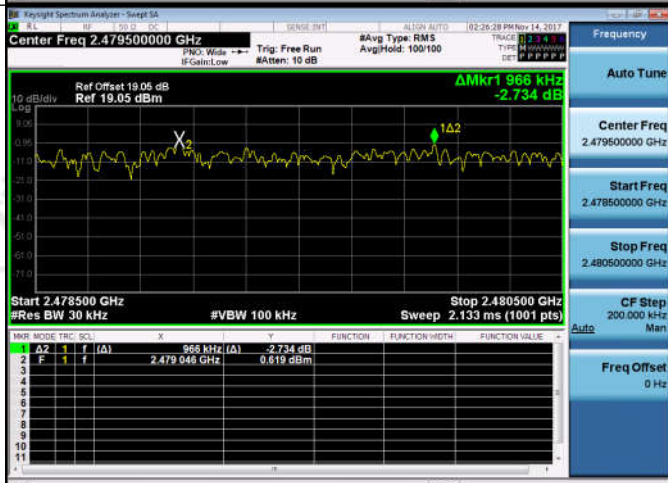



<p>8DPSK/LCH</p>	
<p>8DPSK/MCH</p>	
<p>8DPSK/HCH</p>	

**Appendix C): Dwell Time  
Result Table**




Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.40026	320	0.128	0.32	PASS
GFSK	DH1	MCH	0.399	320	0.128	0.32	PASS
GFSK	DH1	HCH	0.399	320	0.128	0.32	PASS
GFSK	DH3	LCH	1.65553	160	0.265	0.66	PASS
GFSK	DH3	MCH	1.65554	160	0.265	0.66	PASS
GFSK	DH3	HCH	1.655533	160	0.265	0.66	PASS
GFSK	DH5	LCH	2.8888	106.7	0.308	0.77	PASS
GFSK	DH5	MCH	2.8888	106.7	0.308	0.77	PASS
GFSK	DH5	HCH	2.8796	106.7	0.307	0.77	PASS

**Test Graph**

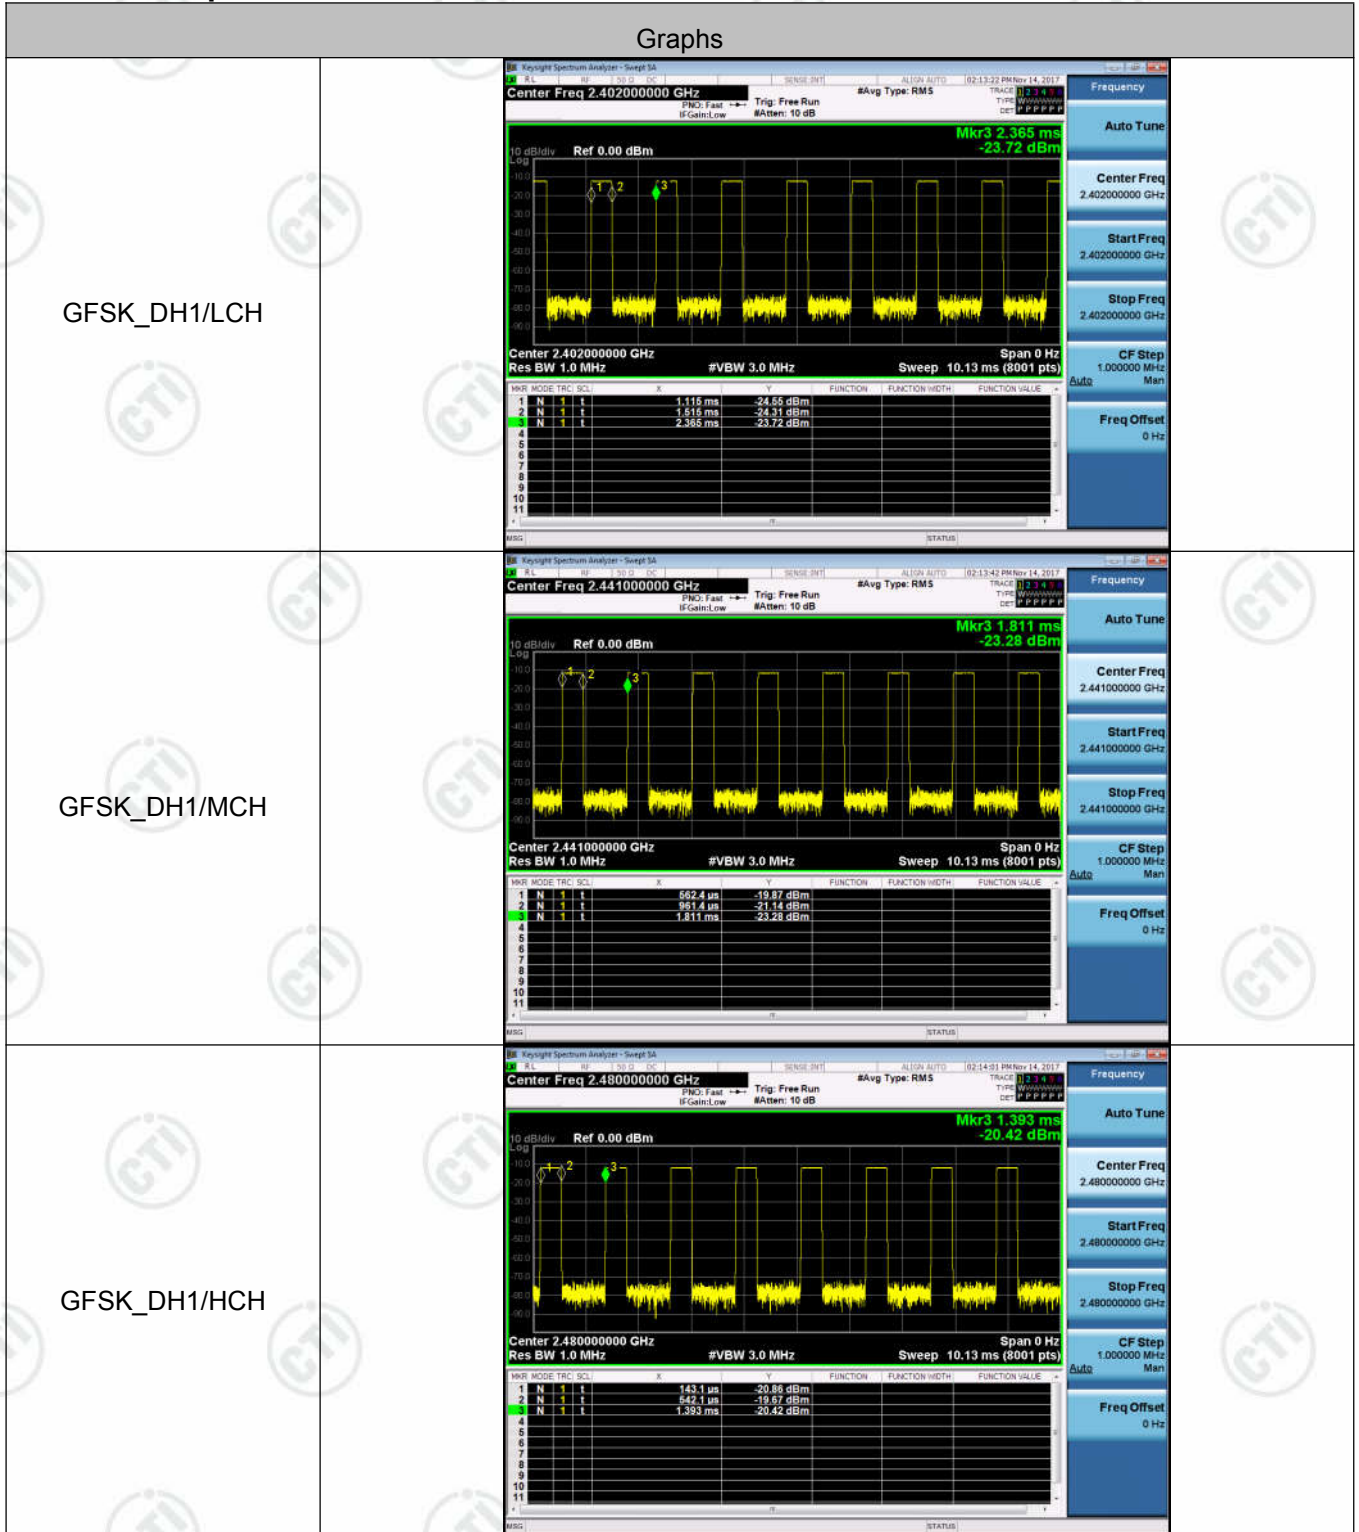

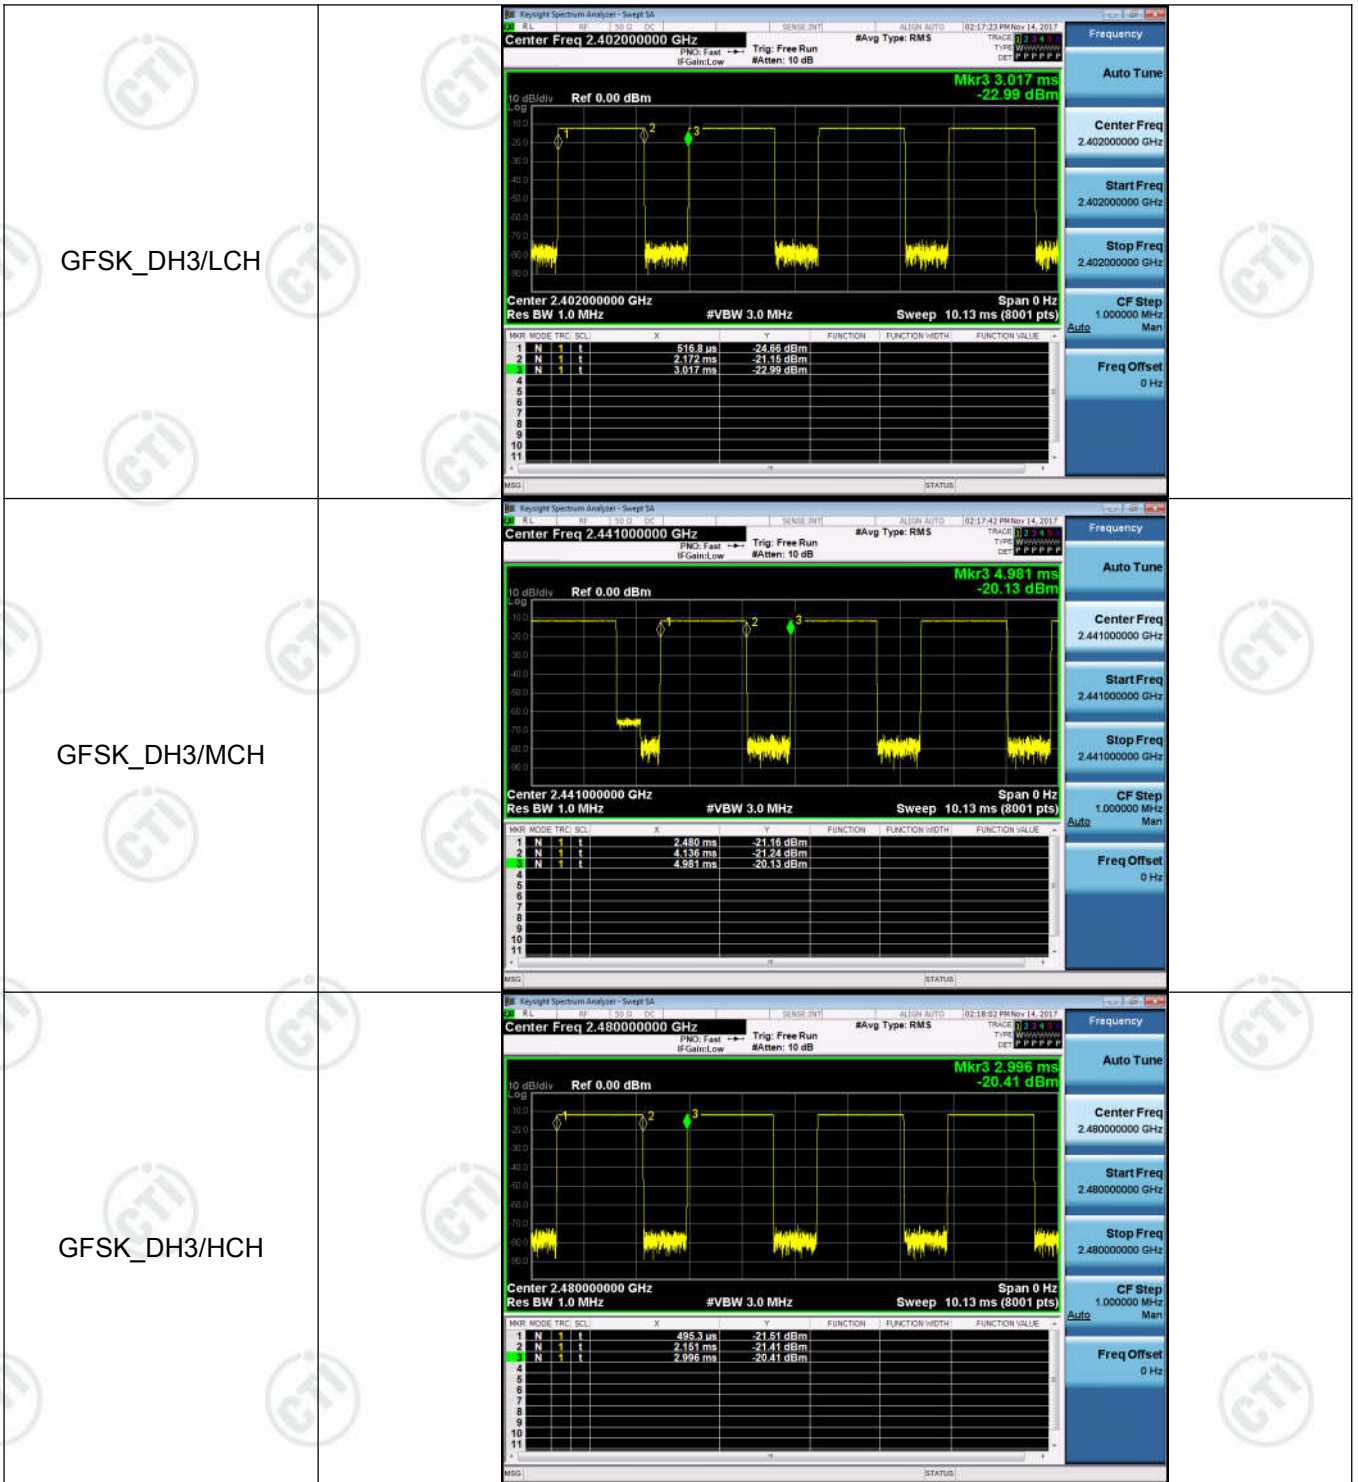

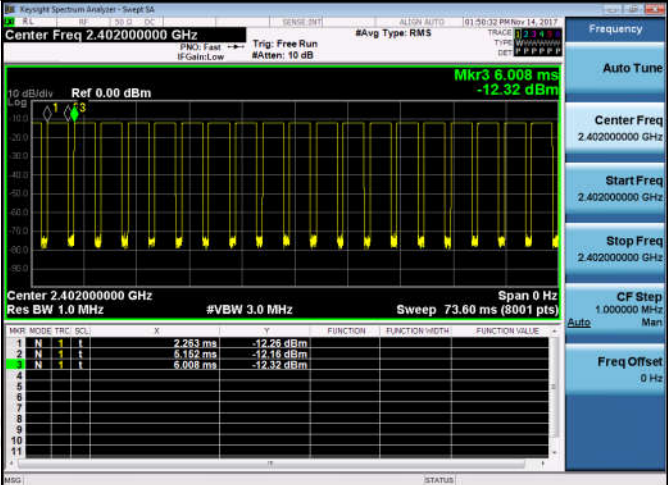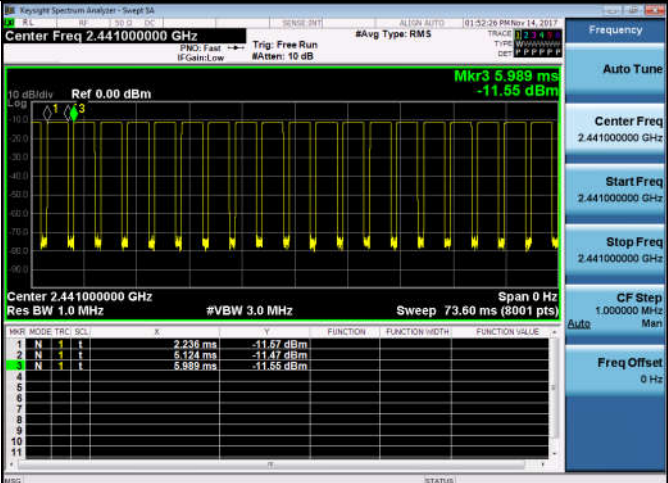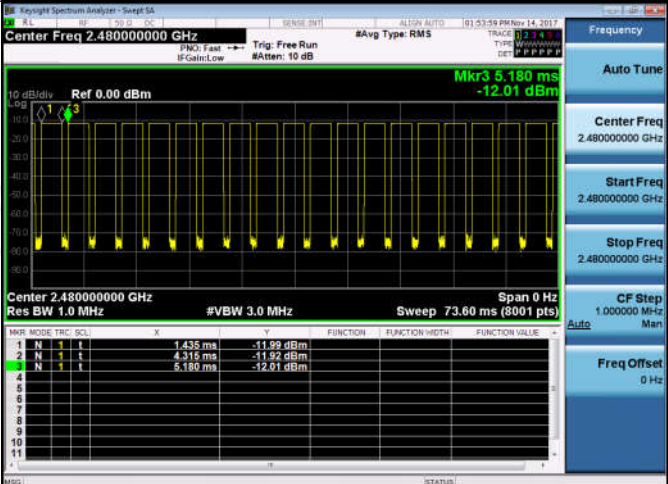


<p>GFSK_DH5/LCH</p>	 <p>Center Freq 2.40200000 GHz</p> <p>Mkr3 6.008 ms -12.32 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION (MATH)</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>1</td> <td>2.283 ms</td> <td>-12.28 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>1</td> <td>5.162 ms</td> <td>-12.16 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>1</td> <td>6.008 ms</td> <td>-12.32 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION (MATH)	FUNCTION VALUE	1	N	1	1	2.283 ms	-12.28 dBm				2	N	1	1	5.162 ms	-12.16 dBm				3	N	1	1	6.008 ms	-12.32 dBm			
MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION (MATH)	FUNCTION VALUE																													
1	N	1	1	2.283 ms	-12.28 dBm																																
2	N	1	1	5.162 ms	-12.16 dBm																																
3	N	1	1	6.008 ms	-12.32 dBm																																
<p>GFSK_DH5/MCH</p>	 <p>Center Freq 2.44100000 GHz</p> <p>Mkr3 5.989 ms -11.55 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION (MATH)</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>1</td> <td>2.236 ms</td> <td>-11.67 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>1</td> <td>5.124 ms</td> <td>-11.47 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>1</td> <td>5.989 ms</td> <td>-11.55 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION (MATH)	FUNCTION VALUE	1	N	1	1	2.236 ms	-11.67 dBm				2	N	1	1	5.124 ms	-11.47 dBm				3	N	1	1	5.989 ms	-11.55 dBm			
MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION (MATH)	FUNCTION VALUE																													
1	N	1	1	2.236 ms	-11.67 dBm																																
2	N	1	1	5.124 ms	-11.47 dBm																																
3	N	1	1	5.989 ms	-11.55 dBm																																
<p>GFSK_DH5/HCH</p>	 <p>Center Freq 2.48000000 GHz</p> <p>Mkr3 5.180 ms -12.01 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION (MATH)</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>1</td> <td>1.435 ms</td> <td>-11.89 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>1</td> <td>4.315 ms</td> <td>-11.92 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>1</td> <td>5.180 ms</td> <td>-12.01 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION (MATH)	FUNCTION VALUE	1	N	1	1	1.435 ms	-11.89 dBm				2	N	1	1	4.315 ms	-11.92 dBm				3	N	1	1	5.180 ms	-12.01 dBm			
MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION (MATH)	FUNCTION VALUE																													
1	N	1	1	1.435 ms	-11.89 dBm																																
2	N	1	1	4.315 ms	-11.92 dBm																																
3	N	1	1	5.180 ms	-12.01 dBm																																



### Appendix D): Hopping Channel Number Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS



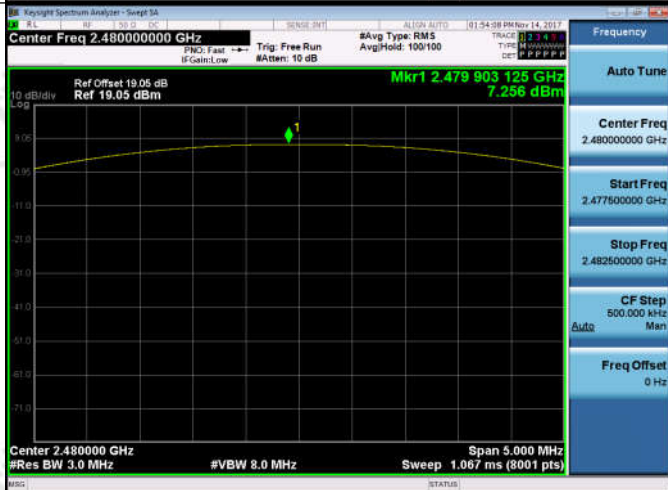
**Test Graph**

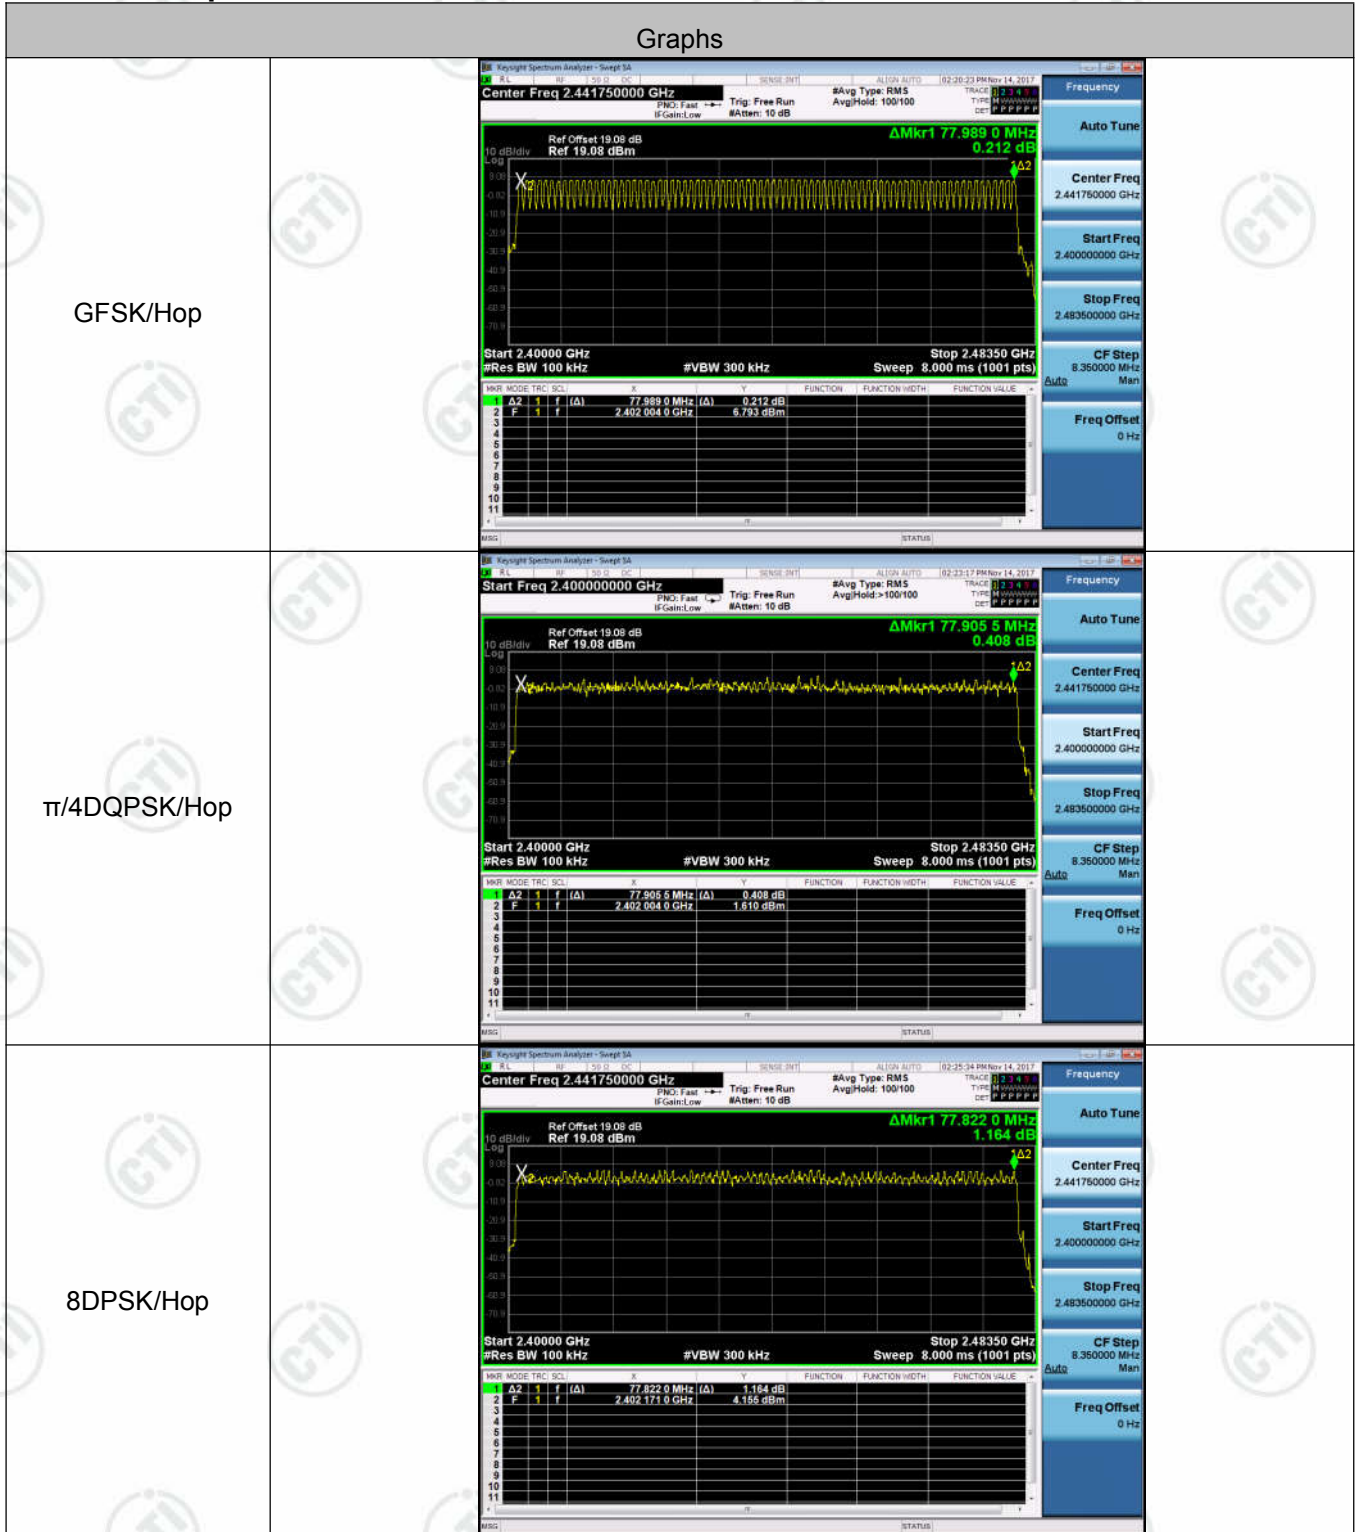
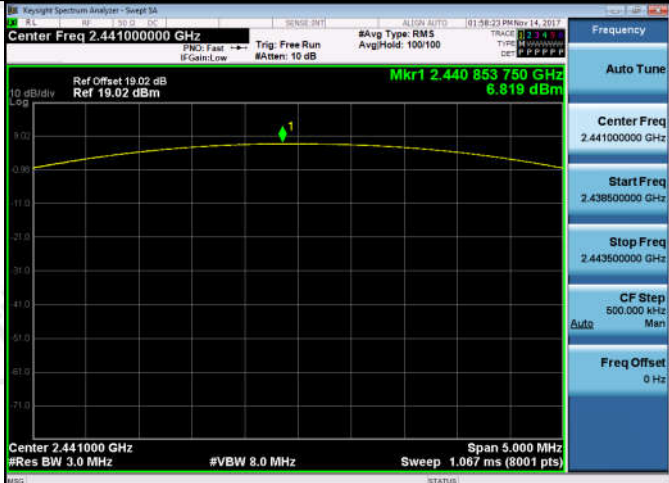
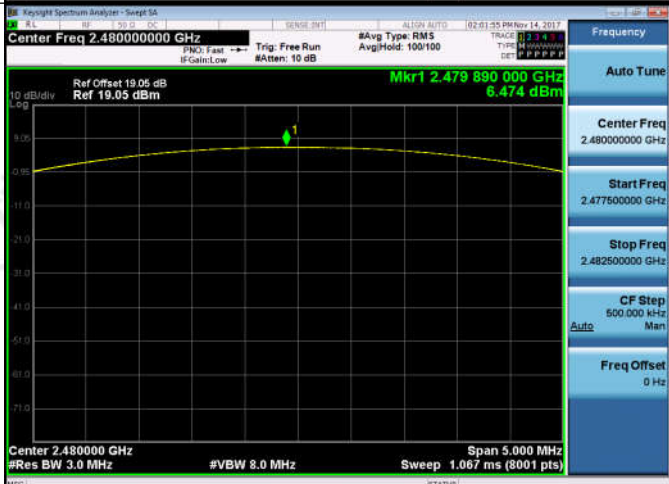


**Appendix E): Conducted Peak Output Power  
Result Table**




Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	7.104	PASS
GFSK	MCH	7.734	PASS
GFSK	HCH	7.256	PASS
$\pi/4$ DQPSK	LCH	5.702	PASS
$\pi/4$ DQPSK	MCH	6.819	PASS
$\pi/4$ DQPSK	HCH	6.474	PASS
8DPSK	LCH	5.966	PASS
8DPSK	MCH	7.001	PASS
8DPSK	HCH	6.607	PASS

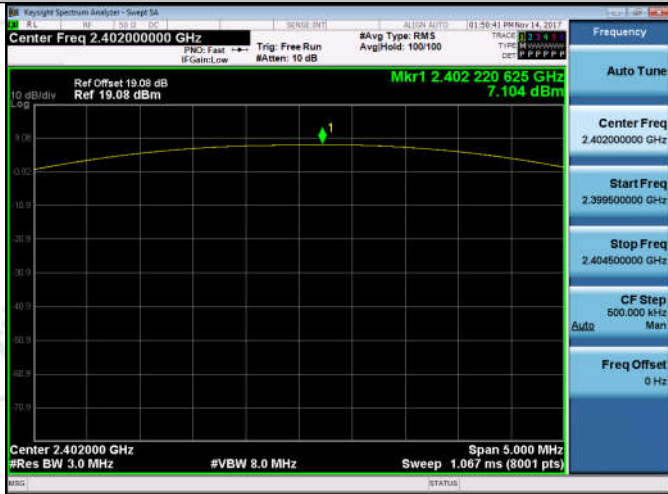**Test Graph**

Graphs	
GFSK/LCH	
GFSK/MCH	
GFSK/HCH	

<p><math>\pi/4</math>DQPSK/LCH</p>	 <p>Center Freq 2.40200000 GHz Mkr1 2.401 903 750 GHz 5.702 dBm Center 2.402000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts)</p>
<p><math>\pi/4</math>DQPSK/MCH</p>	 <p>Center Freq 2.44100000 GHz Mkr1 2.440 853 750 GHz 6.819 dBm Center 2.441000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts)</p>
<p><math>\pi/4</math>DQPSK/HCH</p>	 <p>Center Freq 2.48000000 GHz Mkr1 2.479 890 000 GHz 6.474 dBm Center 2.480000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts)</p>

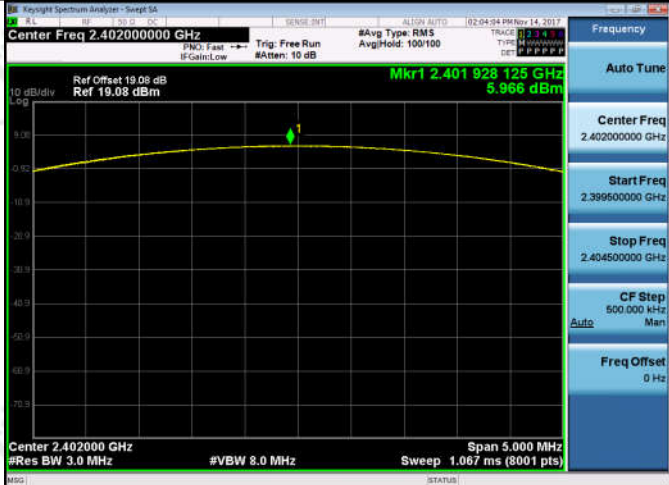



<p>8DPSK/LCH</p>	
<p>8DPSK/MCH</p>	
<p>8DPSK/HCH</p>	

**Appendix F): Band-edge for RF Conducted Emissions  
Result Table**

Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	6.984	Off	-60.220	-13.02	PASS
			7.089	On	-57.659	-12.91	PASS
GFSK	HCH	2480	7.155	Off	-53.428	-12.85	PASS
			7.101	On	-54.309	-12.90	PASS
π/4DQPSK	LCH	2402	4.078	Off	-60.646	-15.92	PASS
			3.167	On	-61.203	-16.83	PASS
π/4DQPSK	HCH	2480	5.509	Off	-55.953	-14.49	PASS
			5.269	On	-57.832	-14.73	PASS
8DPSK	LCH	2402	4.341	Off	-60.485	-15.66	PASS
			4.149	On	-59.566	-15.85	PASS
8DPSK	HCH	2480	5.471	Off	-55.969	-14.53	PASS
			3.771	On	-54.648	-16.23	PASS


**Test Graph**

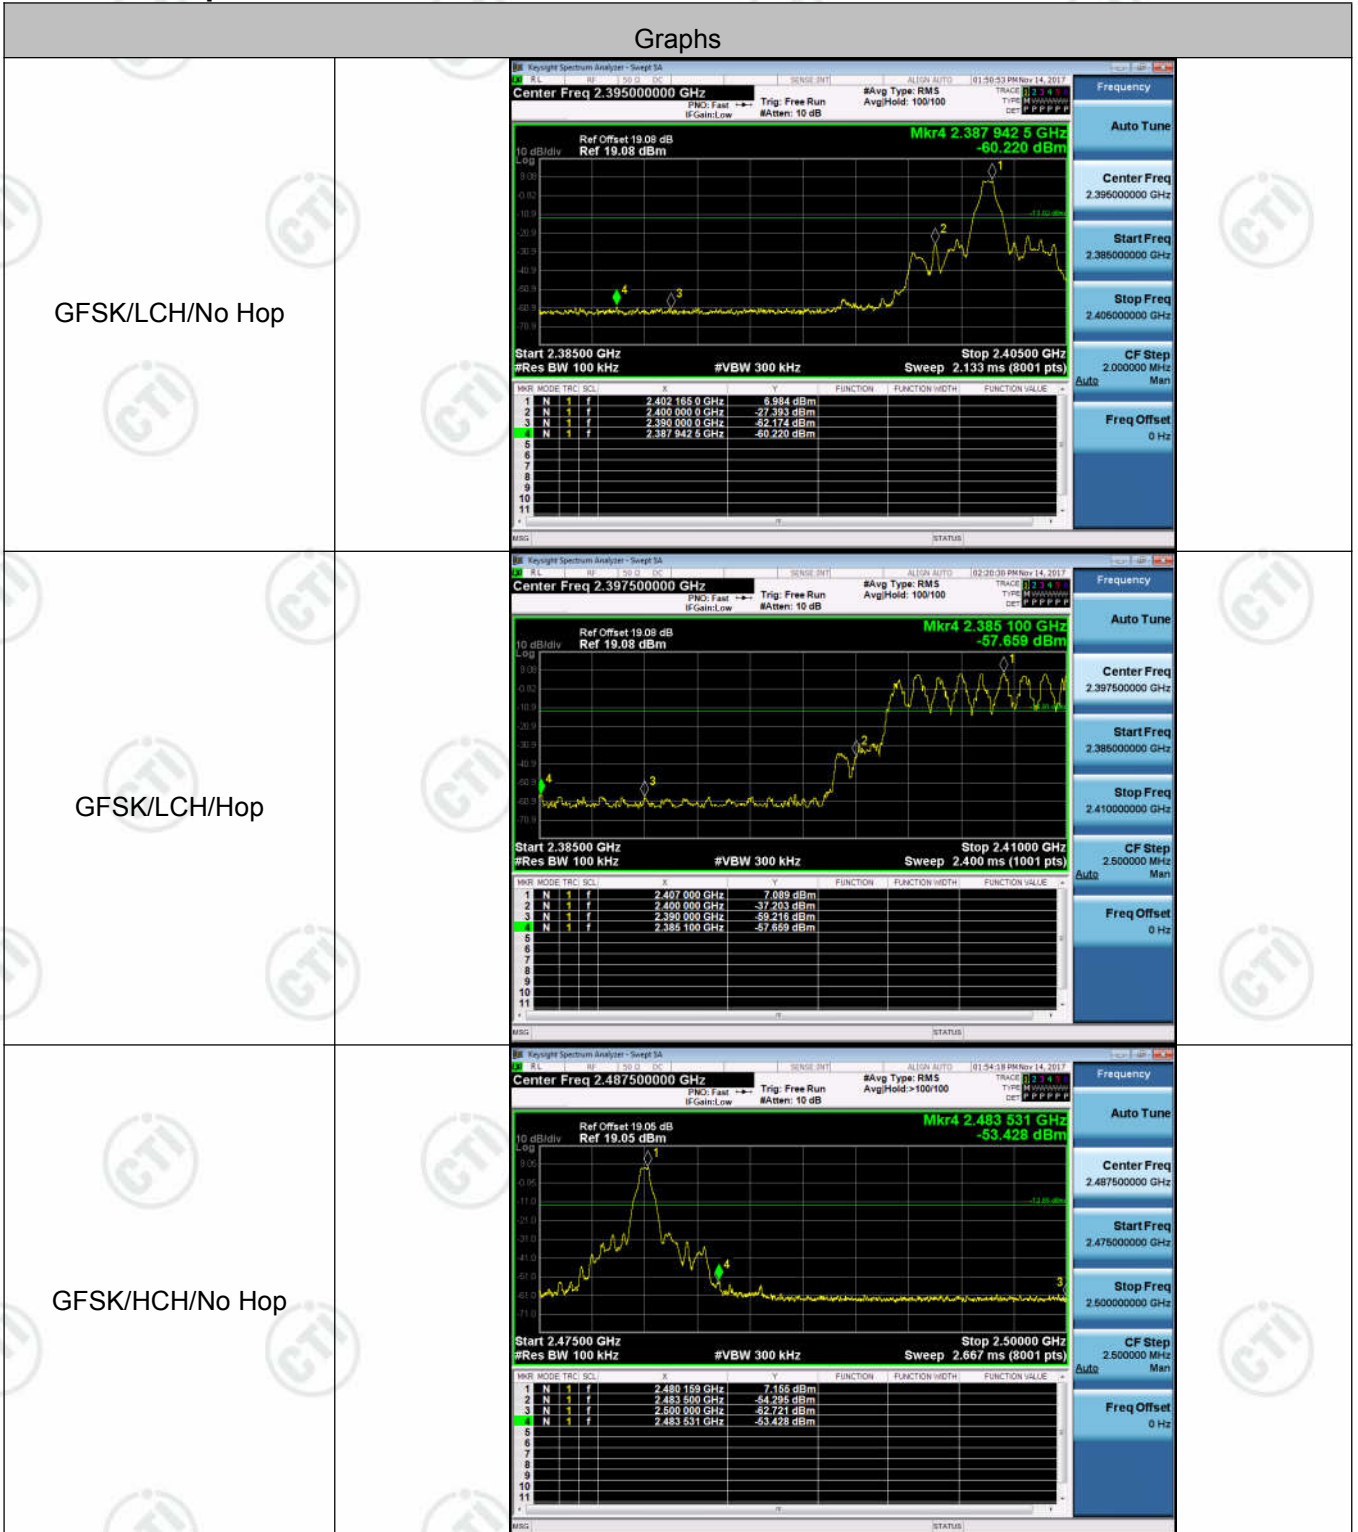

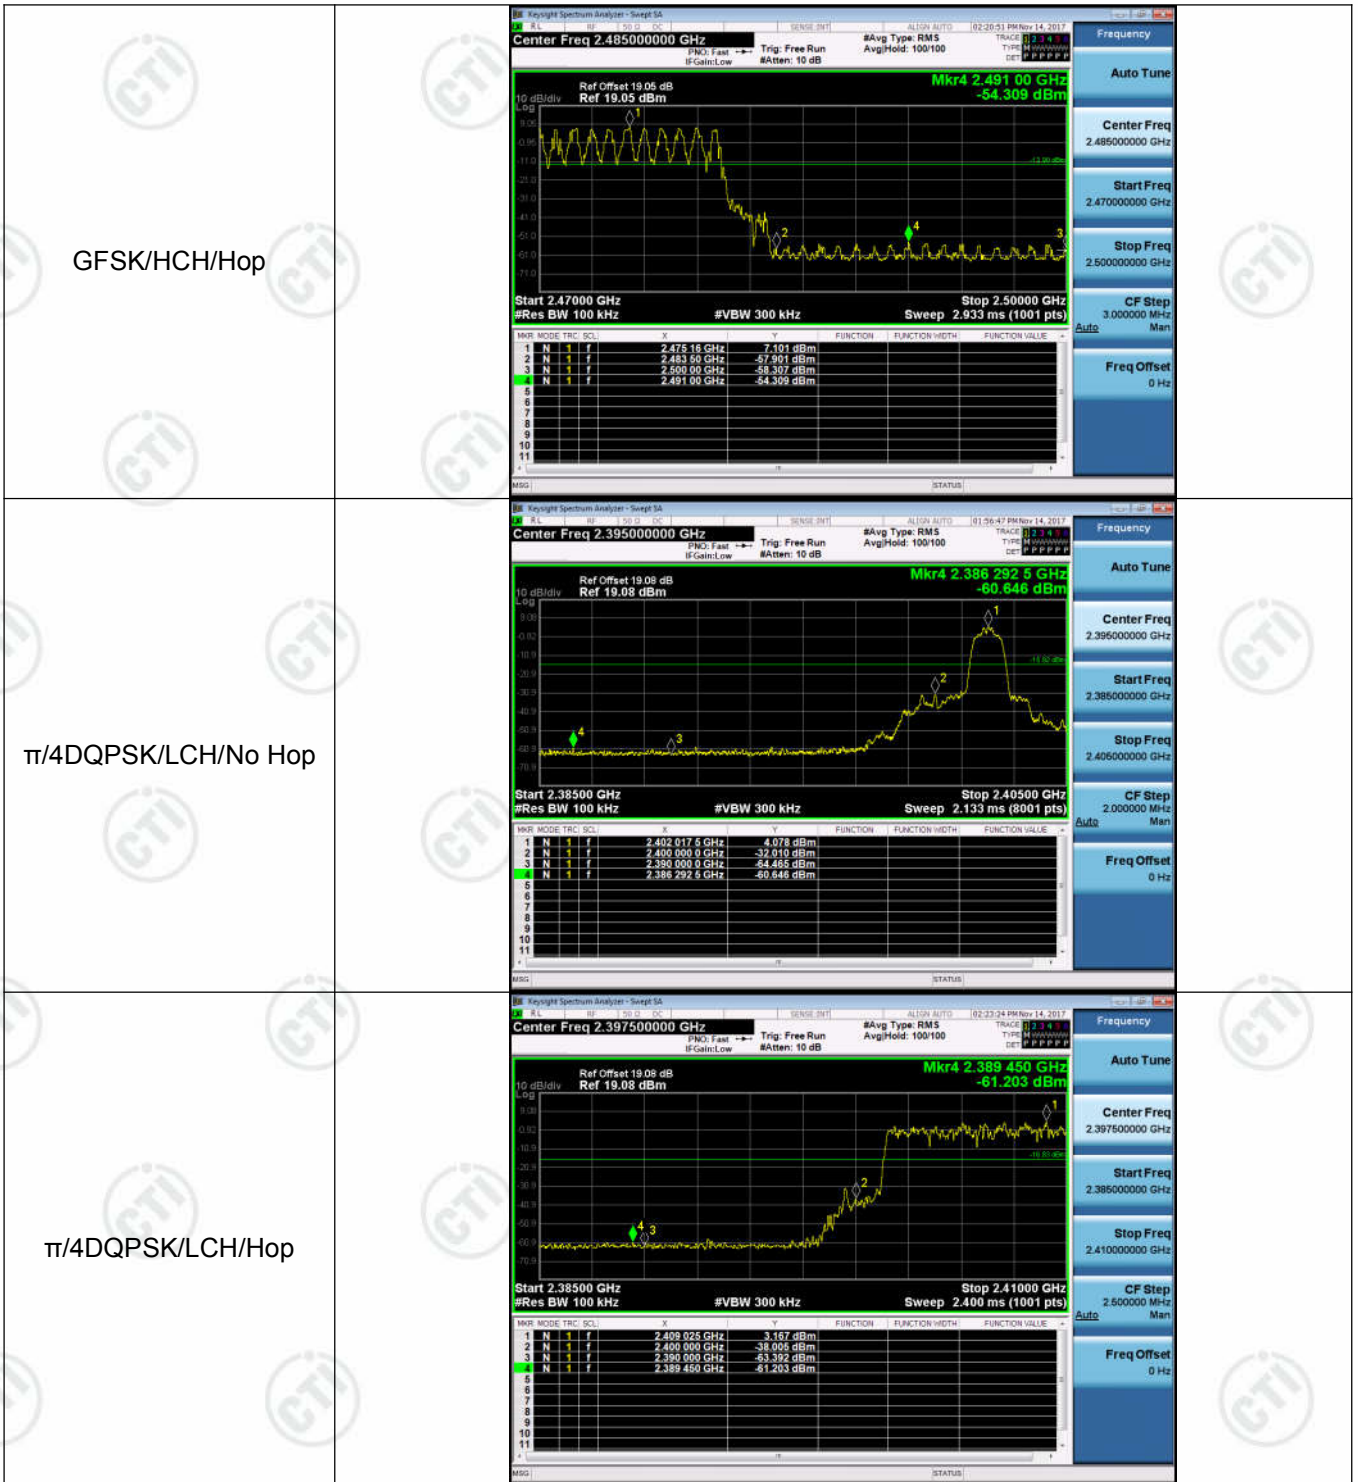





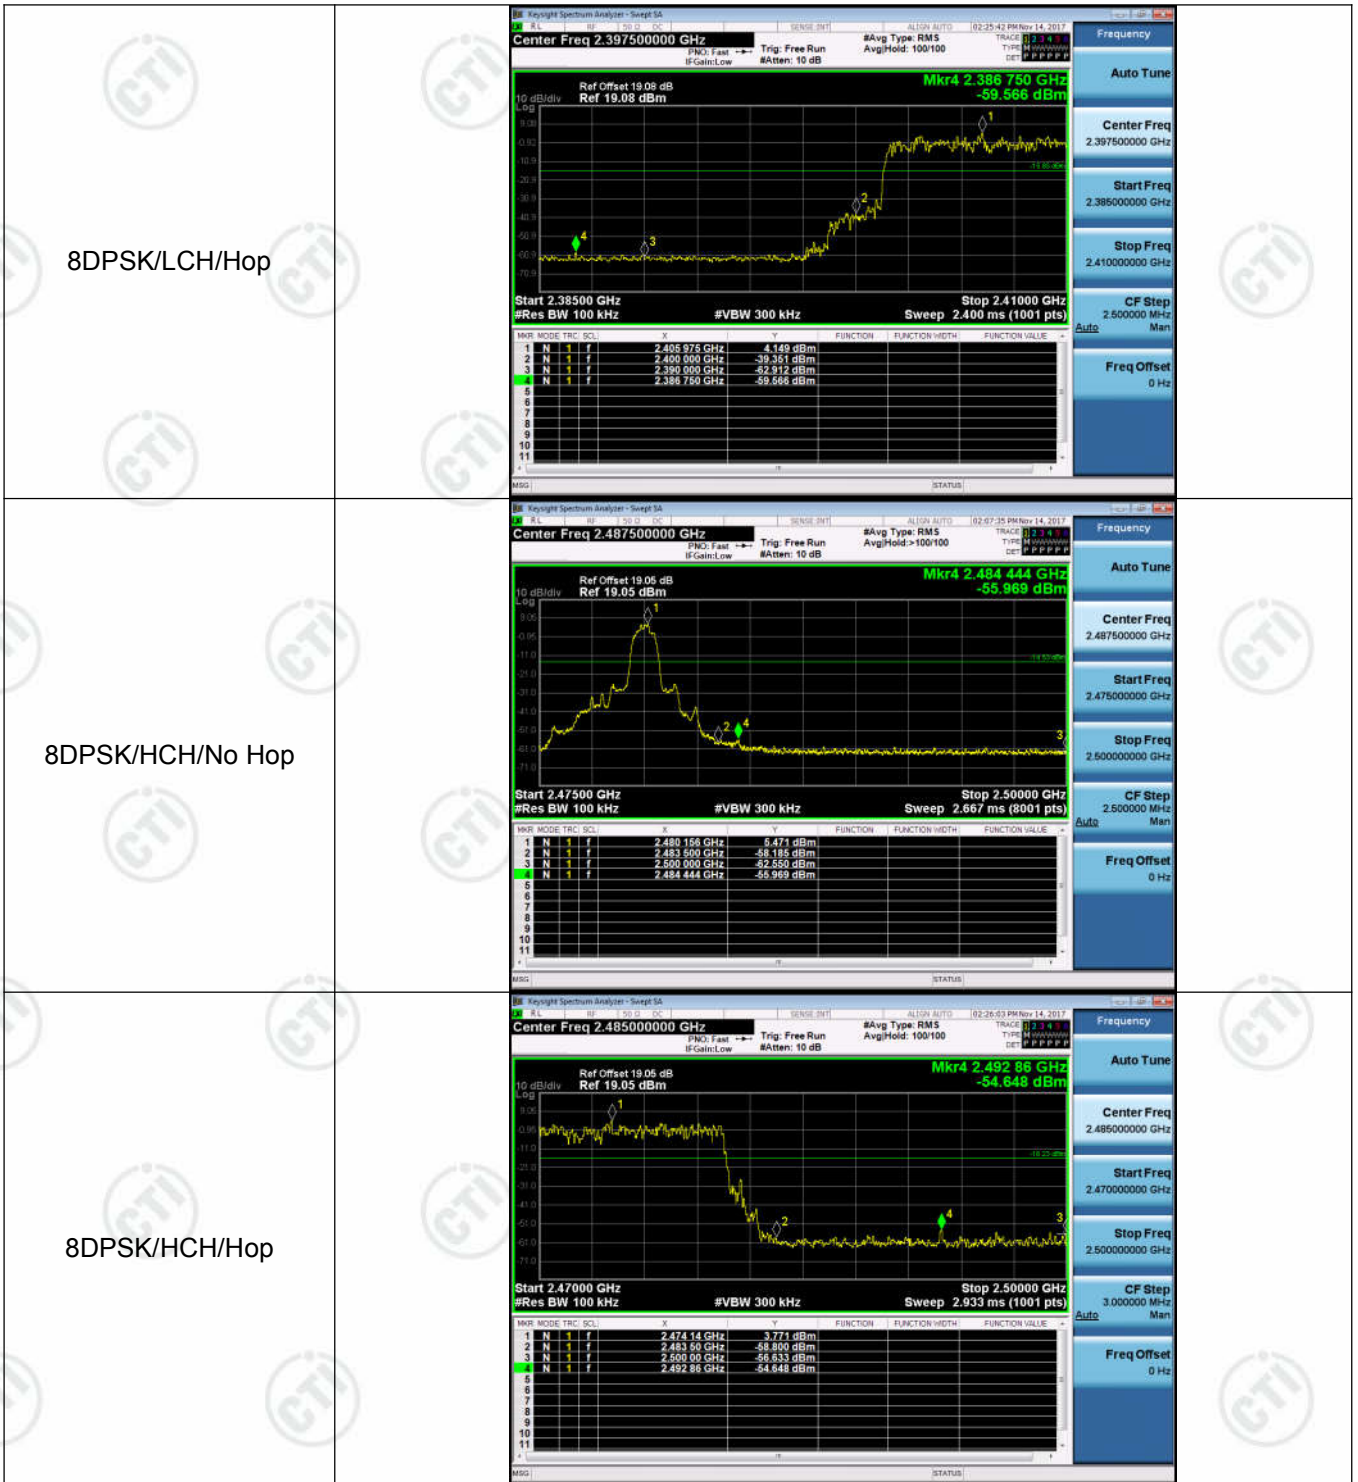


**Appendix G): RF Conducted Spurious Emissions  
Result Table**

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	6.965	<Limit	PASS
GFSK	MCH	7.466	<Limit	PASS
GFSK	HCH	7.120	<Limit	PASS
$\pi/4$ DQPSK	LCH	4.191	<Limit	PASS
$\pi/4$ DQPSK	MCH	5.648	<Limit	PASS
$\pi/4$ DQPSK	HCH	5.420	<Limit	PASS
8DPSK	LCH	4.204	<Limit	PASS
8DPSK	MCH	5.809	<Limit	PASS
8DPSK	HCH	5.430	<Limit	PASS


**Test Graph**






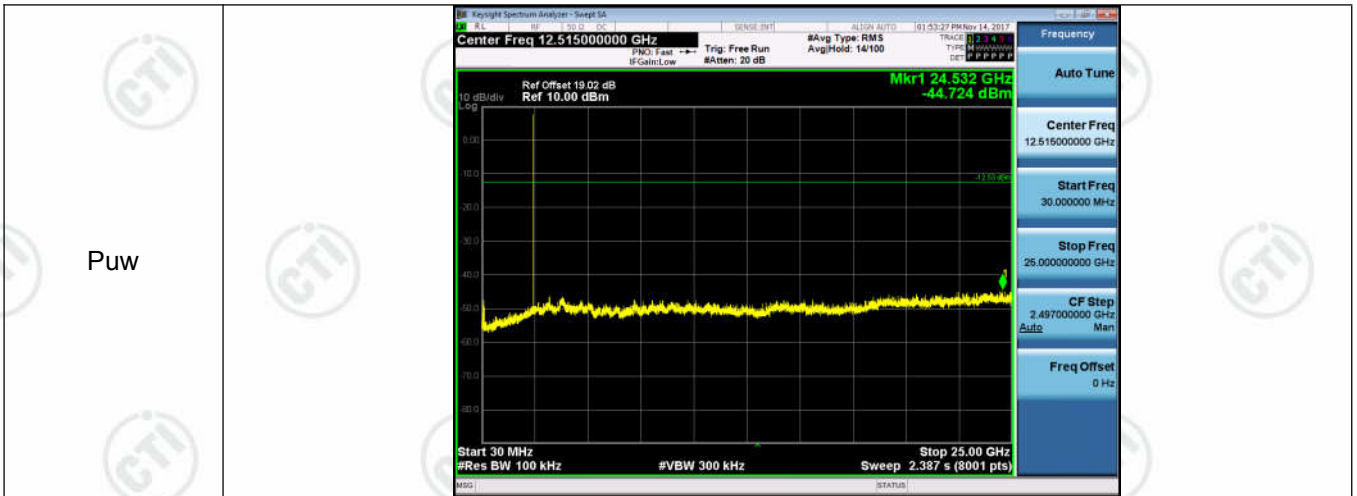



**GFSK\_HCH\_Graphs**

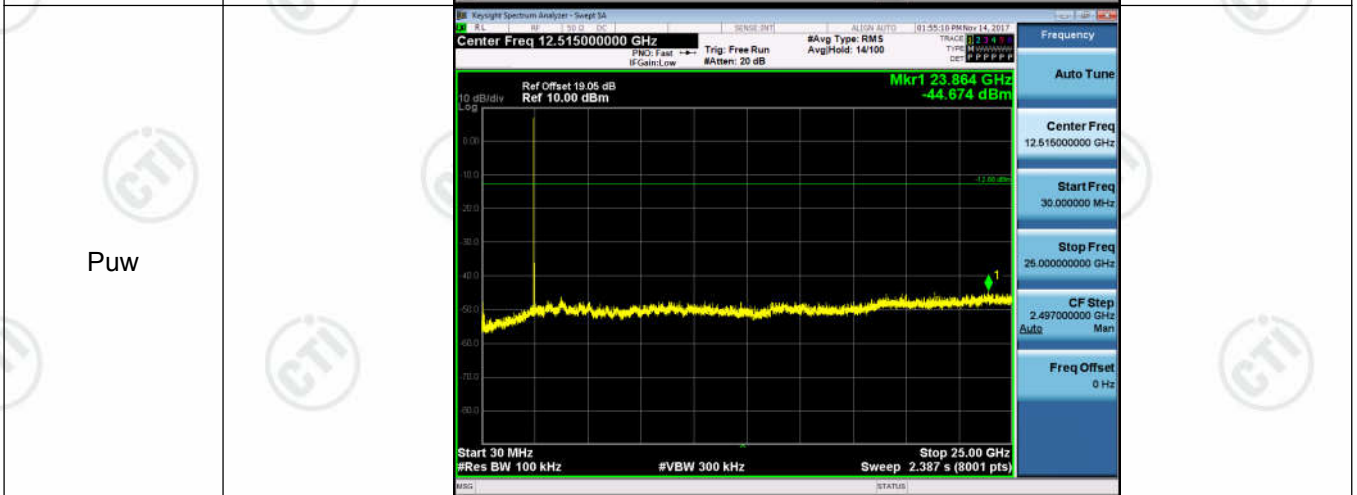



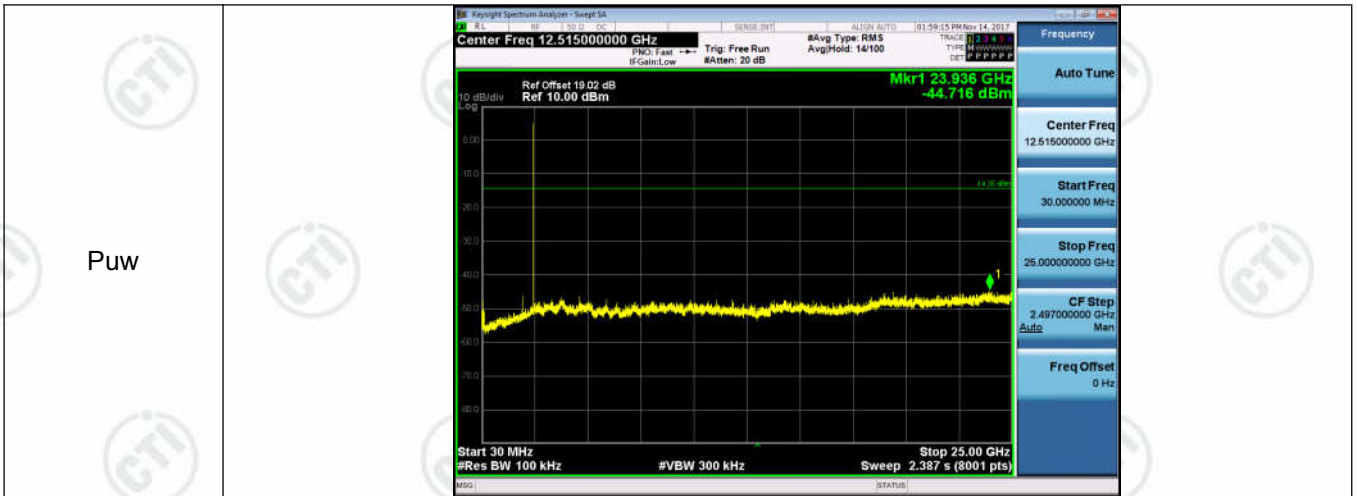


$\pi/4$ DQPSK\_HCH\_Graphs

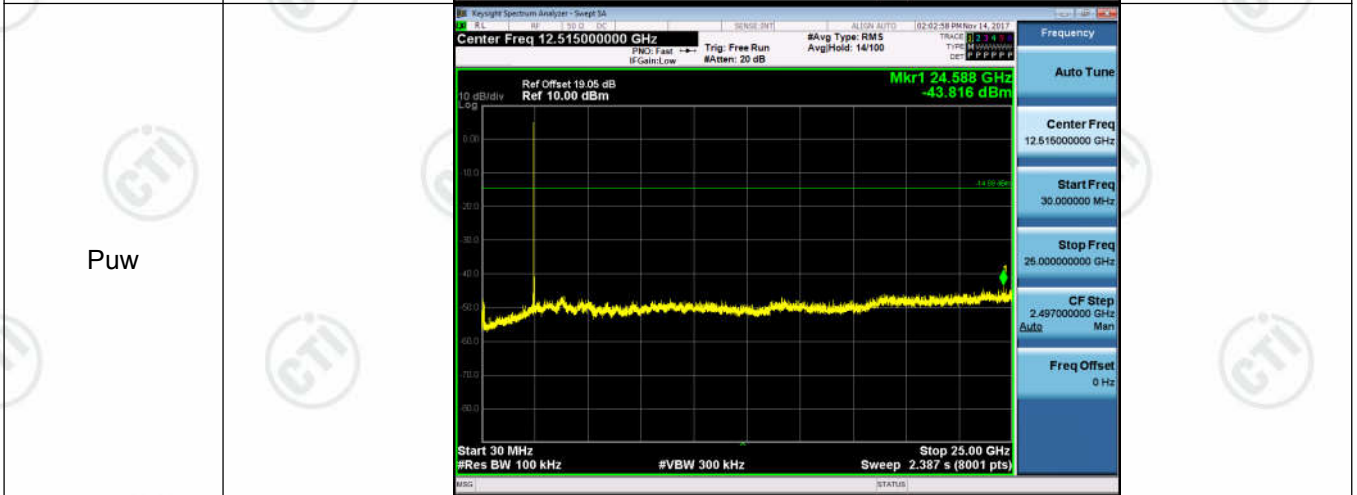
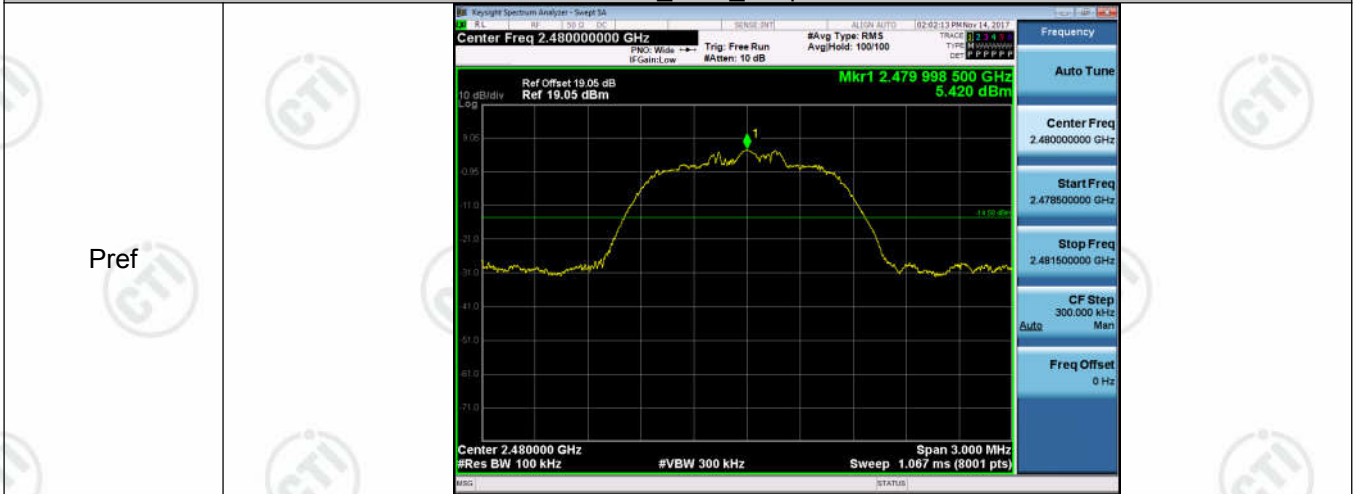








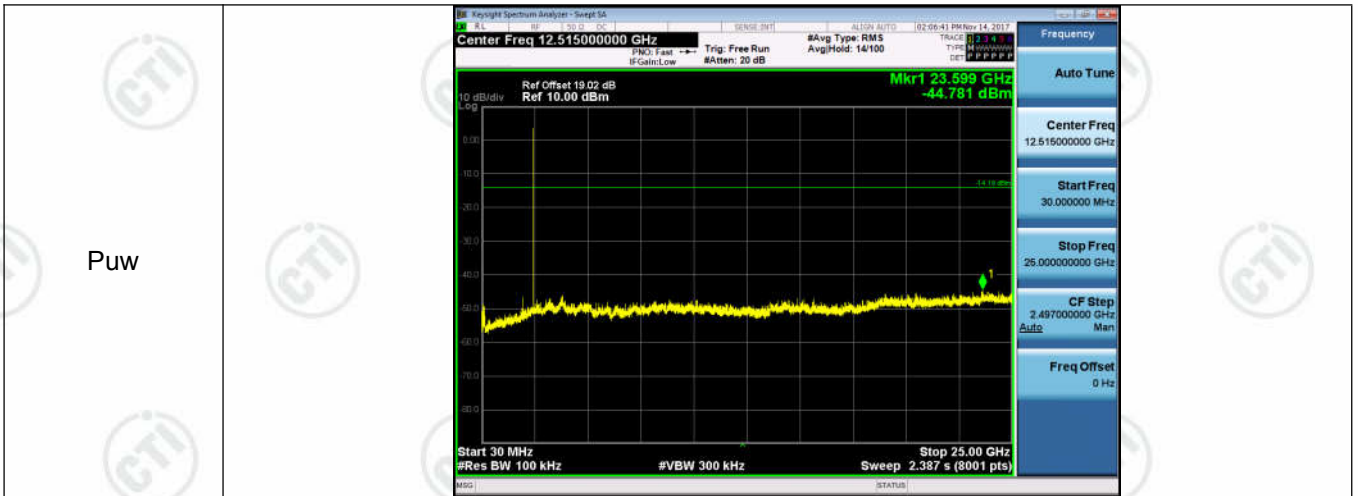

8DPSK\_HCH\_Graphs

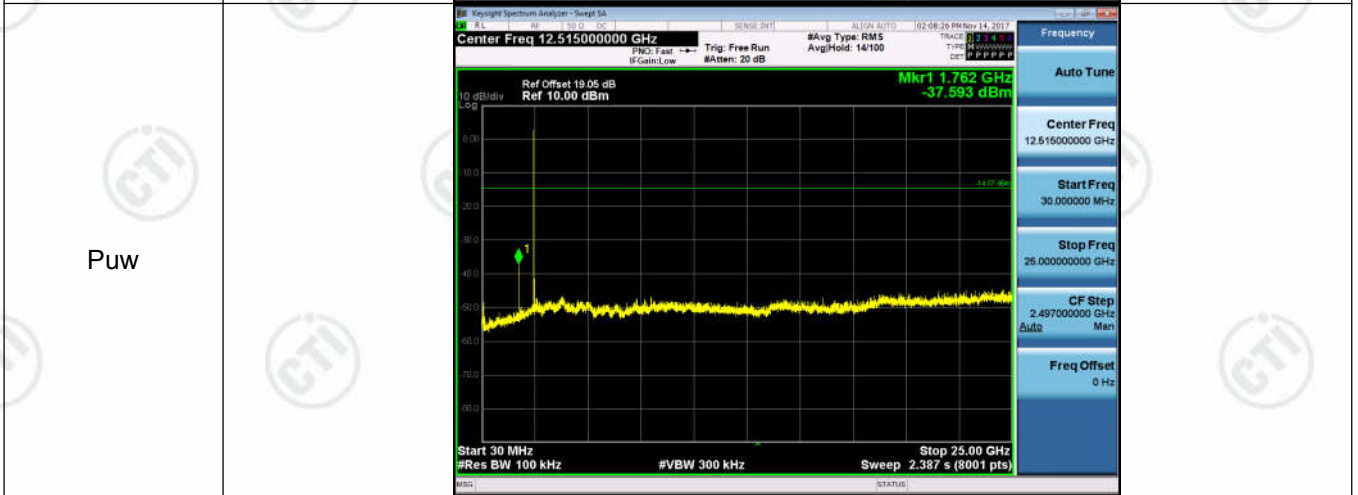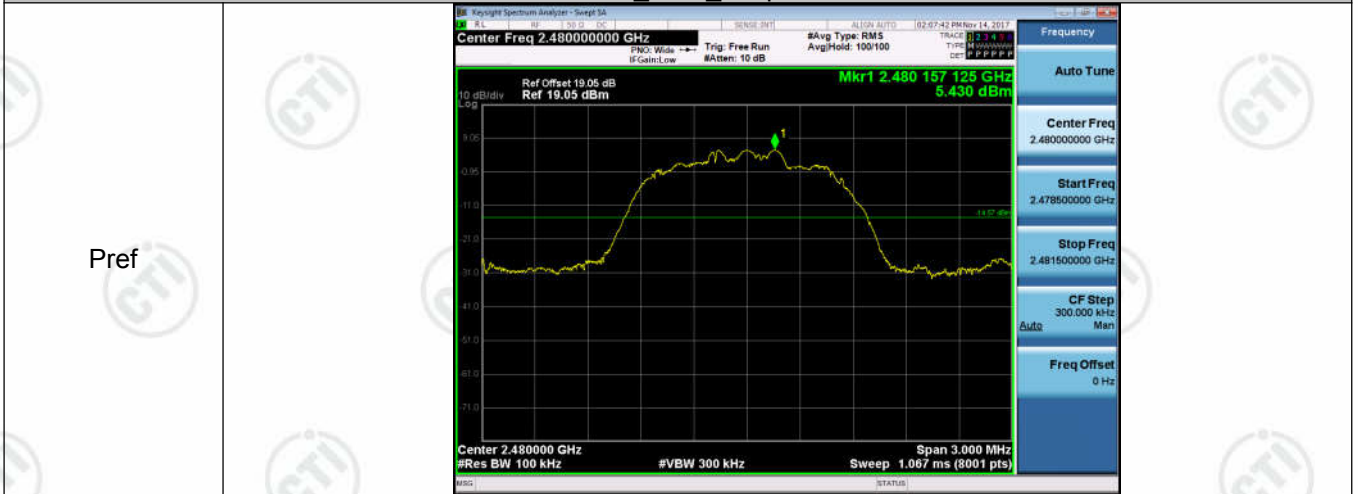

## Appendix H): Pseudorandom Frequency Hopping Sequence
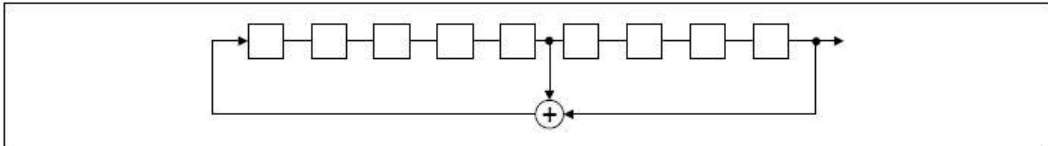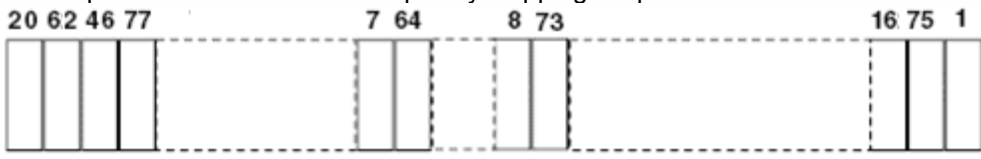
<b>Test Requirement:</b>	<b>47 CFR Part 15C Section 15.247 (a)(1) requirement:</b>
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
<p><b>EUT Pseudorandom Frequency Hopping Sequence</b></p>	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p>	
<ul style="list-style-type: none"> <li>• Number of shift register stages: 9</li> <li>• Length of pseudo-random sequence: <math>2^9 - 1 = 511</math> bits</li> <li>• Longest sequence of zeros: 8 (non-inverted signal)</li> </ul>	
	
<p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p>	
<p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p>	
	
<p>Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>	
<p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p>	

## Appendix I): Antenna Requirement


### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:

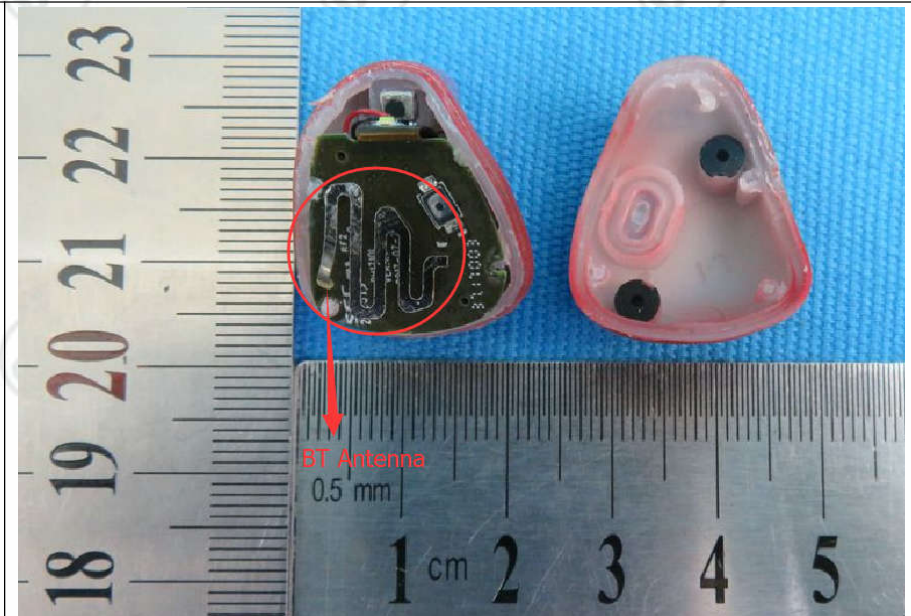

The antenna is Monopole antenna and no consideration of replacement. The best case gain of the antenna is 0dBi.


## Appendix J): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p><b>Below 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> </ol> <p><b>Above 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).</li> <li>b. Test the EUT in the lowest channel , the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>				
Limit:	Frequency	Limit (dB $\mu$ V/m @3m)	Remark		
	30MHz-88MHz	40.0	Quasi-peak Value		
	88MHz-216MHz	43.5	Quasi-peak Value		
	216MHz-960MHz	46.0	Quasi-peak Value		
	960MHz-1GHz	54.0	Quasi-peak Value		
	Above 1GHz	54.0	Average Value		
		74.0	Peak Value		




**Test plot as follows:**

Worse case mode:	GFSK(1-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

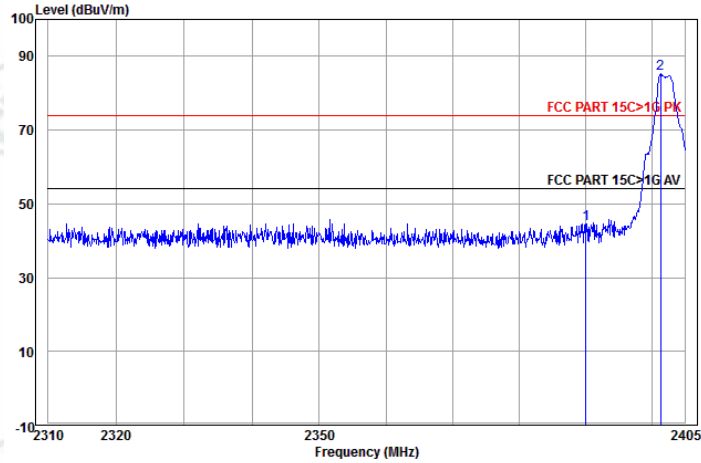


	Ant Freq	Ant Factor	Cable Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	44.03	52.90	44.47	74.00	-29.53	Horizontal	Peak
2 pp	2401.320	32.56	3.07	44.04	93.63	85.22	74.00	11.22	Horizontal	Peak

Worse case mode:	GFSK(1-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

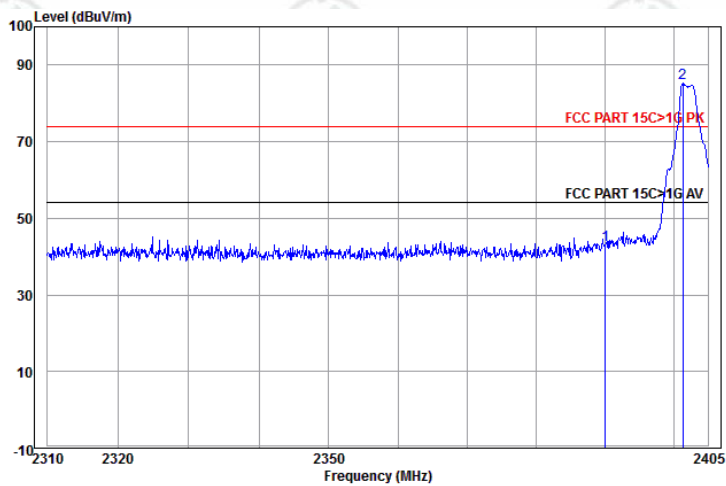


	Ant Freq	Ant Factor	Cable Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	44.03	51.61	43.18	74.00	-30.82	Vertical	Peak
2 pp	2401.320	32.56	3.07	44.04	93.73	85.32	74.00	11.32	Vertical	Peak

Worse case mode:	GFSK(1-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

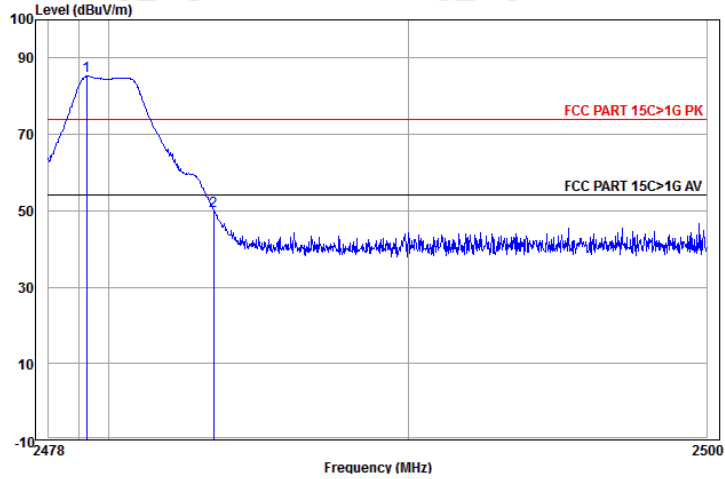


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.271	32.71	3.12	44.14	93.55	85.24	74.00	11.24 Horizontal Peak
2	2483.500	32.71	3.12	44.14	58.12	49.81	74.00	-24.19 Horizontal Peak

Worse case mode:	GFSK(1-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

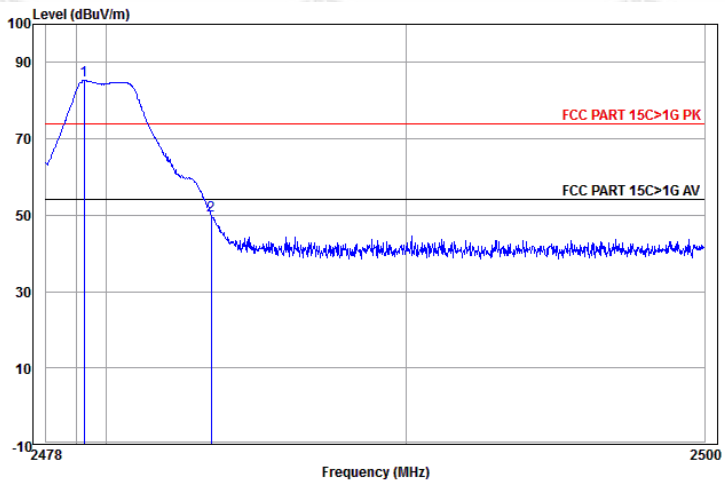


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.271	32.71	3.12	44.14	93.56	85.25	74.00	11.25 Vertical Peak
2	2483.500	32.71	3.12	44.14	58.40	50.09	74.00	-23.91 Vertical Peak

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

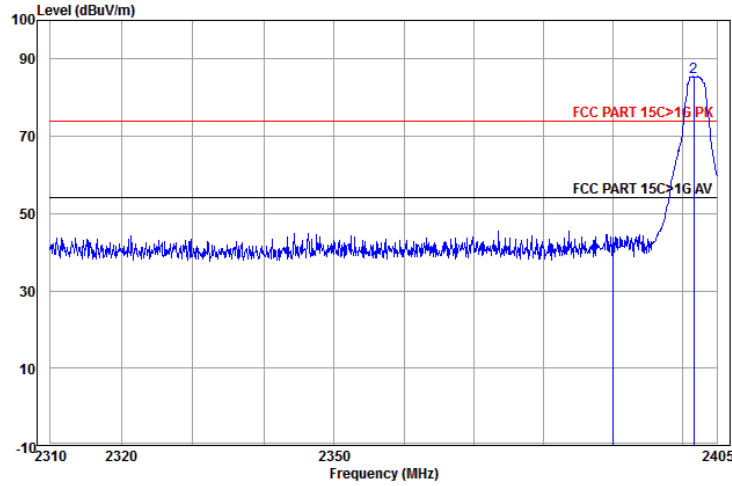


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.07	44.03	47.21	38.78	74.00	-35.22	Horizontal Peak
2 pp	2401.707	32.56	3.07	44.04	93.85	85.44	74.00	11.44	Horizontal Peak

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

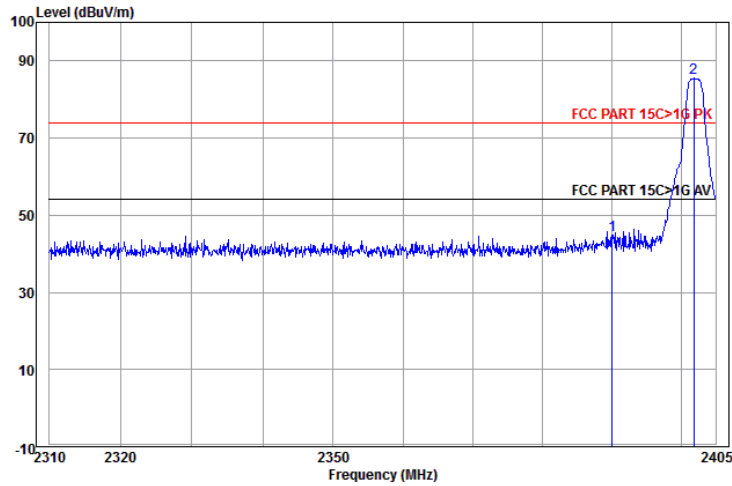


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.07	44.03	53.33	44.90	74.00	-29.10	Vertical Peak
2 pp	2401.803	32.56	3.07	44.04	94.01	85.60	74.00	11.60	Vertical Peak

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

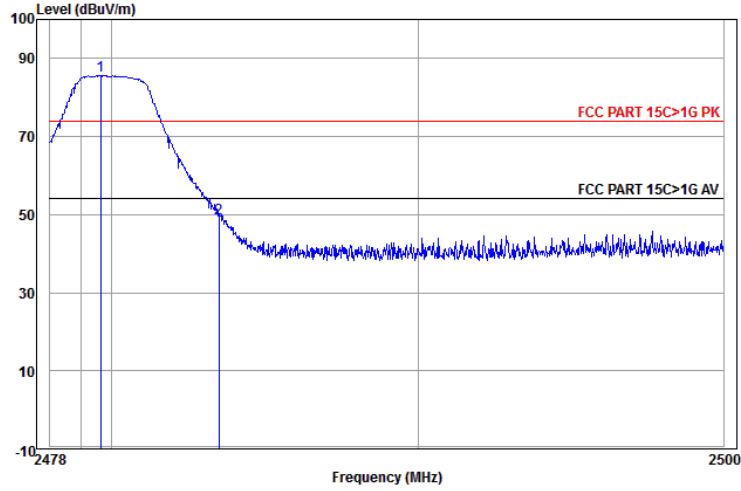

	Ant Freq	Ant Factor	Cable Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	pp 2479.643	32.71	3.12	44.14	93.90	85.59	74.00	11.59	Horizontal	Peak
2	2483.500	32.71	3.12	44.14	57.50	49.19	74.00	-24.81	Horizontal	Peak


Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

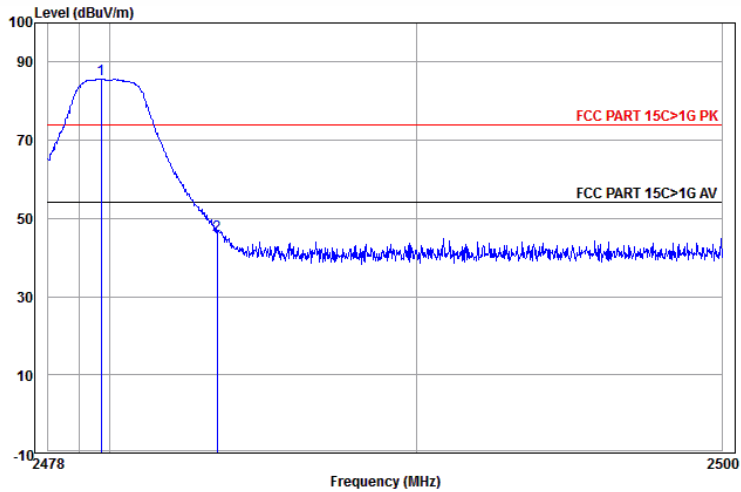

	Ant Freq	Ant Factor	Cable Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	pp 2479.731	32.71	3.12	44.14	93.87	85.56	74.00	11.56	Vertical	Peak
2	2483.500	32.71	3.12	44.14	54.20	45.89	74.00	-28.11	Vertical	Peak




Worse case mode:	8DPSK(3-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

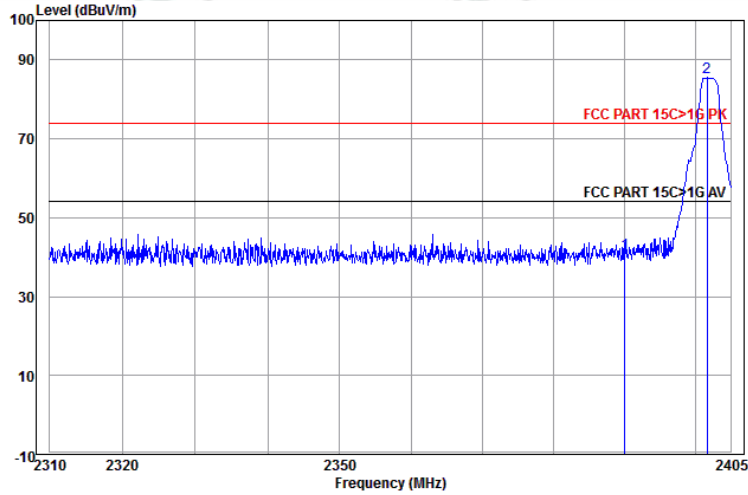


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dB	
1	2390.000	32.53	3.07	44.03	49.26	40.83	74.00	-33.17 Horizontal Peak
2 pp	2401.707	32.56	3.07	44.04	93.90	85.49	74.00	11.49 Horizontal Peak

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

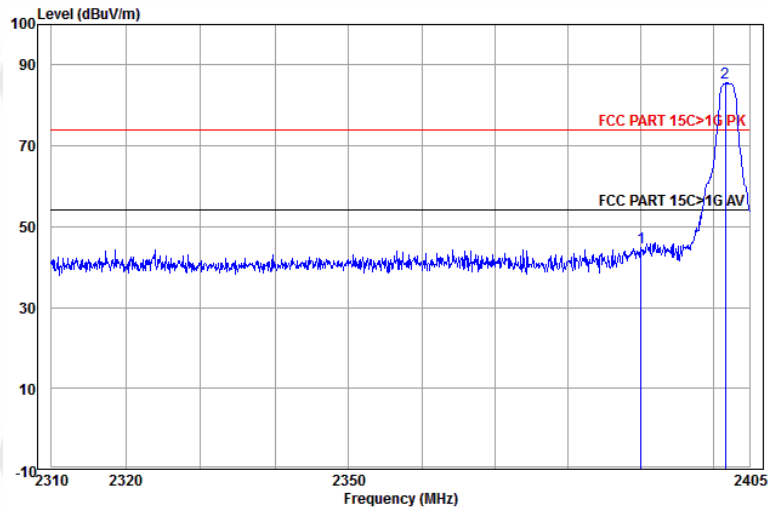


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dB	
1	2390.000	32.53	3.07	44.03	53.21	44.78	74.00	-29.22 Vertical Peak
2 pp	2401.707	32.56	3.07	44.04	93.93	85.52	74.00	11.52 Vertical Peak

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

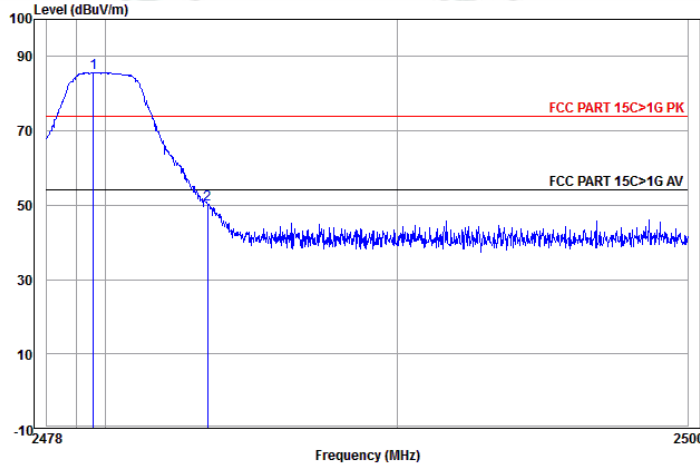

	Ant Freq	Ant Factor	Cable Loss	Preamp Factor	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.599	32.71	3.12	44.14	93.95	85.64	74.00	11.64	Horizontal Peak
2	2483.500	32.71	3.12	44.14	58.65	50.34	74.00	-23.66	Horizontal Peak

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

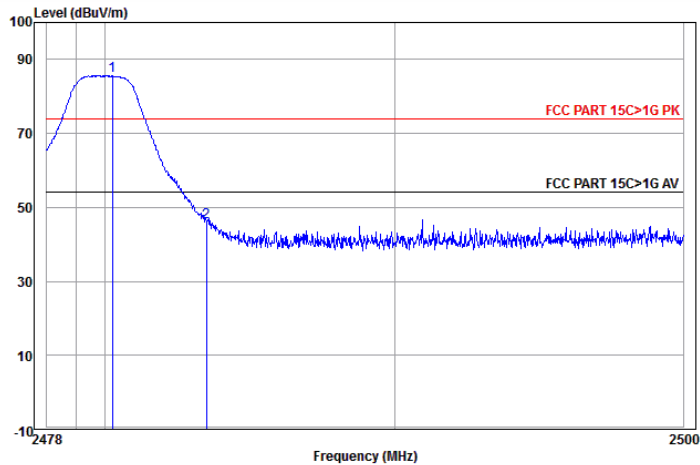

	Ant Freq	Ant Factor	Cable Loss	Preamp Factor	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2480.257	32.71	3.12	44.14	93.80	85.49	74.00	11.49	Vertical
2 pk	2483.500	32.71	3.12	44.14	54.42	46.11	74.00	-27.89	Vertical Peak

**Note:**

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of  $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor


Correct Factor = Pre-amplifier Factor - Antenna Factor - Cable Factor

### Appendix K): Radiated Spurious Emissions

<b>Receiver Setup:</b>	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
<b>Test Procedure:</b>					
<b>Below 1GHz test procedure as below:</b>					
<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>					
<b>Above 1GHz test procedure as below:</b>					
<p>g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).</p> <p>h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>					
<b>Limit:</b>	Frequency	Field strength (microvolt/meter)	Limit (dBµV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					

**Radiated Spurious Emissions test Data:  
Radiated Emission below 1GHz**


30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

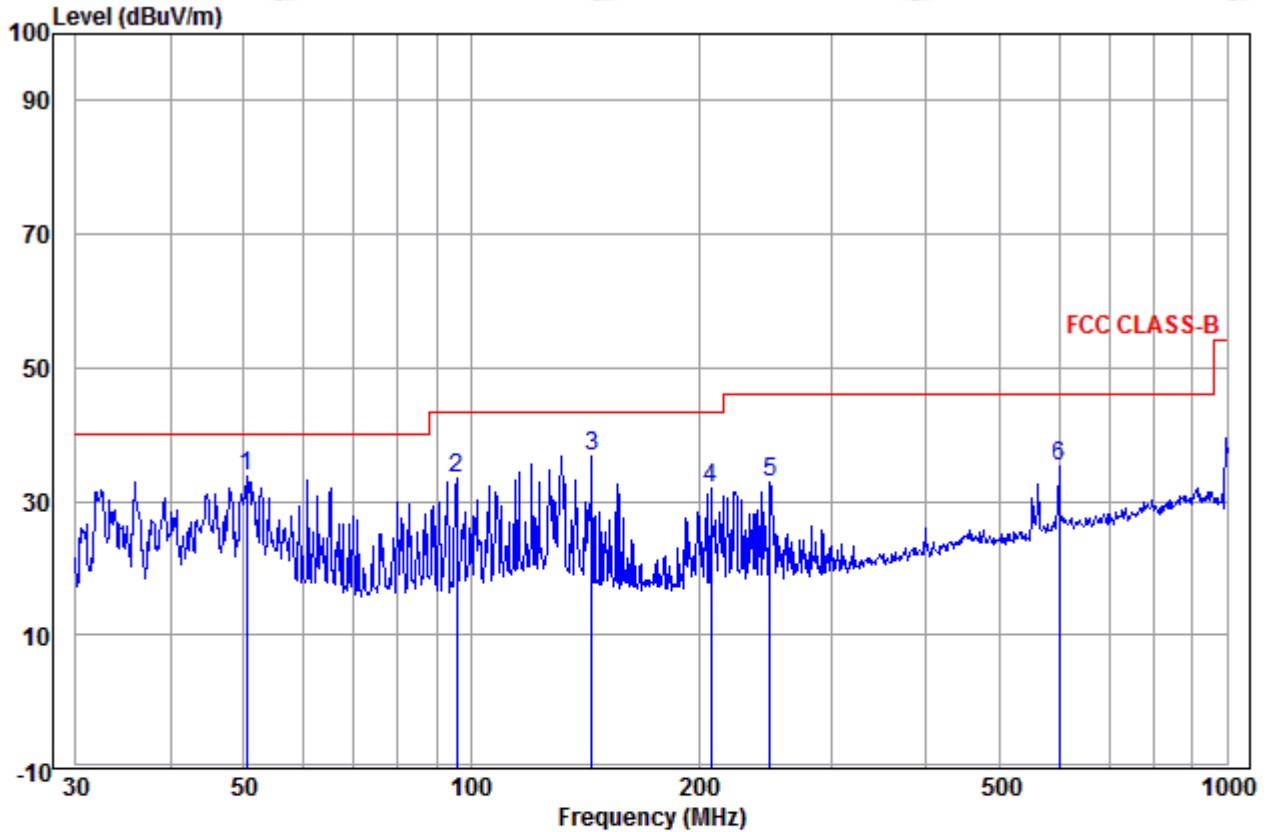

	Ant Freq	Ant Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	50.409	14.53	0.11	19.21	33.85	40.00	-6.15	Vertical	QP
2	95.762	11.84	0.51	21.14	33.49	43.50	-10.01	Vertical	QP
3	144.335	9.15	0.61	27.09	36.85	43.50	-6.65	Vertical	QP
4	207.850	11.69	1.14	19.14	31.97	43.50	-11.53	Vertical	QP
5	248.552	12.57	1.33	18.82	32.72	46.00	-13.28	Vertical	QP
6	599.321	18.69	1.83	14.88	35.40	46.00	-10.60	Vertical	QP



Test mode:	Transmitting	Horizontal
------------	--------------	------------

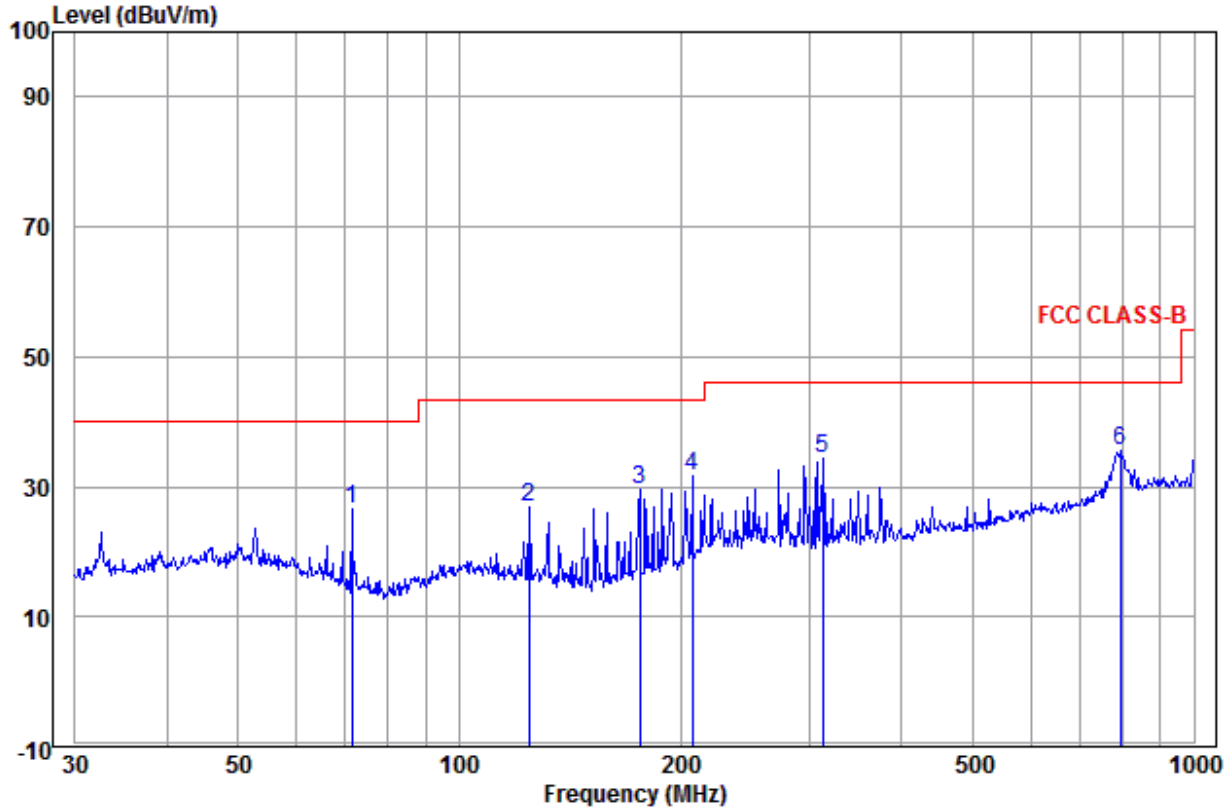

	Ant Freq	Ant Factor	Cable Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dB		
1	71.330	10.15	0.27	16.28	26.70	40.00	-13.30	Horizontal QP
2	124.569	10.50	0.60	15.77	26.87	43.50	-16.63	Horizontal QP
3	176.269	10.31	0.88	18.37	29.56	43.50	-13.94	Horizontal QP
4	207.850	11.69	1.14	18.93	31.76	43.50	-11.74	Horizontal QP
5	312.179	13.66	1.13	19.54	34.33	46.00	-11.67	Horizontal QP
6 pp	793.396	19.76	2.47	13.31	35.54	46.00	-10.46	Horizontal QP

**Transmitter Emission above 1GHz**

Worse case mode:		GFSK(1-DH5)		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Level (dB $\mu$ V/m)	Limit Line (dB $\mu$ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1286.606	30.43	1.99	44.26	46.68	34.84	74.00	-39.16	Pass	H
1613.749	31.08	2.43	43.87	46.10	35.74	74.00	-38.26	Pass	H
3766.785	32.97	4.02	44.62	48.31	40.68	74.00	-33.32	Pass	H
4804.000	34.69	5.98	44.60	43.96	40.03	74.00	-33.97	Pass	H
7206.000	36.42	6.97	44.77	44.02	42.64	74.00	-31.36	Pass	H
9608.000	37.88	6.98	45.58	43.33	42.61	74.00	-31.39	Pass	H
1195.049	30.21	1.85	44.39	45.17	32.84	74.00	-41.16	Pass	V
1545.405	30.96	2.35	43.95	45.76	35.12	74.00	-38.88	Pass	V
3738.129	32.99	3.99	44.62	47.40	39.76	74.00	-34.24	Pass	V
4804.000	34.69	5.98	44.60	43.08	39.15	74.00	-34.85	Pass	V
7206.000	36.42	6.97	44.77	43.61	42.23	74.00	-31.77	Pass	V
9608.000	37.88	6.98	45.58	42.52	41.80	74.00	-32.20	Pass	V

Worse case mode:		GFSK(1-DH5)		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Level (dB $\mu$ V/m)	Limit Line (dB $\mu$ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1141.528	30.08	1.76	44.47	47.67	35.04	74.00	-38.96	Pass	H
1510.402	30.89	2.30	43.99	45.61	34.81	74.00	-39.19	Pass	H
3776.385	32.96	4.02	44.62	46.52	38.88	74.00	-35.12	Pass	H
4882.000	34.85	6.14	44.60	45.66	42.05	74.00	-31.95	Pass	H
7323.000	36.43	6.85	44.87	43.06	41.47	74.00	-32.53	Pass	H
9764.000	38.05	7.12	45.55	45.19	44.81	74.00	-29.19	Pass	H
1296.469	30.45	2.01	44.25	45.36	33.57	74.00	-40.43	Pass	V
1800.416	31.40	2.64	43.68	45.62	35.98	74.00	-38.02	Pass	V
3786.010	32.95	4.03	44.62	47.75	40.11	74.00	-33.89	Pass	V
4882.000	34.85	6.14	44.60	45.47	41.86	74.00	-32.14	Pass	V
7323.000	36.43	6.85	44.87	42.95	41.36	74.00	-32.64	Pass	V
9764.000	38.05	7.12	45.55	44.84	44.46	74.00	-29.54	Pass	V

Worse case mode:		GFSK(1-DH5)		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Level (dB $\mu$ V/m)	Limit Line (dB $\mu$ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1141.528	30.08	1.76	44.47	46.40	33.77	74.00	-40.23	Pass	H
1521.981	30.91	2.32	43.97	46.76	36.02	74.00	-37.98	Pass	H
3738.129	32.99	3.99	44.62	46.36	38.72	74.00	-35.28	Pass	H
4960.000	35.02	6.29	44.60	43.43	40.14	74.00	-33.86	Pass	H
7440.000	36.45	6.73	44.97	44.52	42.73	74.00	-31.27	Pass	H
9920.000	38.22	7.26	45.52	43.97	43.93	74.00	-30.07	Pass	H
1340.089	30.54	2.07	44.19	44.43	32.85	74.00	-41.15	Pass	V
1651.146	31.15	2.47	43.83	44.57	34.36	74.00	-39.64	Pass	V
4181.159	33.26	4.62	44.60	43.07	36.35	74.00	-37.65	Pass	V
4960.000	35.02	6.29	44.60	42.97	39.68	74.00	-34.32	Pass	V
7440.000	36.45	6.73	44.97	43.22	41.43	74.00	-32.57	Pass	V
9920.000	38.22	7.26	45.52	44.73	44.69	74.00	-29.31	Pass	V

Worse case mode:		$\pi$ /4DQPSK(2-DH5)		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Level (dB $\mu$ V/m)	Limit Line (dB $\mu$ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1296.469	30.45	2.01	44.25	46.10	34.31	74.00	-39.69	Pass	H
1711.050	31.25	2.54	43.77	45.21	35.23	74.00	-38.77	Pass	H
3738.129	32.99	3.99	44.62	46.94	39.30	74.00	-34.70	Pass	H
4804.000	34.69	5.98	44.60	43.36	39.43	74.00	-34.57	Pass	H
7206.000	36.42	6.97	44.77	43.62	42.24	74.00	-31.76	Pass	H
9608.000	37.88	6.98	45.58	43.36	42.64	74.00	-31.36	Pass	H
1207.279	30.24	1.87	44.37	45.80	33.54	74.00	-40.46	Pass	V
1502.732	30.88	2.29	43.99	45.83	35.01	74.00	-38.99	Pass	V
3757.208	32.97	4.01	44.62	47.45	39.81	74.00	-34.19	Pass	V
4804.000	34.69	5.98	44.60	43.68	39.75	74.00	-34.25	Pass	V
7206.000	36.42	6.97	44.77	43.32	41.94	74.00	-32.06	Pass	V
9608.000	37.88	6.98	45.58	43.98	43.26	74.00	-30.74	Pass	V

Worse case mode:		$\pi/4$ DQPSK(2-DH5)		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Level (dB $\mu$ V/m)	Limit Line (dB $\mu$ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1254.268	30.35	1.94	44.31	45.89	33.87	74.00	-40.13	Pass	H
1689.410	31.21	2.52	43.79	47.20	37.14	74.00	-36.86	Pass	H
3776.385	32.96	4.02	44.62	46.75	39.11	74.00	-34.89	Pass	H
4960.000	35.02	6.29	44.60	43.67	40.38	74.00	-33.62	Pass	H
7440.000	36.45	6.73	44.97	43.62	41.83	74.00	-32.17	Pass	H
9920.000	38.22	7.26	45.52	43.92	43.88	74.00	-30.12	Pass	H
1309.737	30.48	2.03	44.23	46.60	34.88	74.00	-39.12	Pass	V
1537.557	30.94	2.34	43.96	46.33	35.65	74.00	-38.35	Pass	V
3757.208	32.97	4.01	44.62	48.10	40.46	74.00	-33.54	Pass	V
4960.000	35.02	6.29	44.60	43.64	40.35	74.00	-33.65	Pass	V
7440.000	36.45	6.73	44.97	43.36	41.57	74.00	-32.43	Pass	V
9920.000	38.22	7.26	45.52	44.31	44.27	74.00	-29.73	Pass	V

Worse case mode:		$\pi/4$ DQPSK(2-DH5)		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Level (dB $\mu$ V/m)	Limit Line (dB $\mu$ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1263.883	30.38	1.96	44.29	45.76	33.81	74.00	-40.19	Pass	H
1630.264	31.11	2.45	43.85	44.98	34.69	74.00	-39.31	Pass	H
4107.316	33.07	4.45	44.60	45.92	38.84	74.00	-35.16	Pass	H
4960.000	35.02	6.29	44.60	42.46	39.17	74.00	-34.83	Pass	H
7440.000	36.45	6.73	44.97	42.96	41.17	74.00	-32.83	Pass	H
9920.000	38.22	7.26	45.52	43.43	43.39	74.00	-30.61	Pass	H
1313.075	30.49	2.03	44.23	46.67	34.96	74.00	-39.04	Pass	V
1837.456	31.46	2.68	43.65	45.39	35.88	74.00	-38.12	Pass	V
3776.385	32.96	4.02	44.62	46.85	39.21	74.00	-34.79	Pass	V
4960.000	35.02	6.29	44.60	42.73	39.44	74.00	-34.56	Pass	V
7440.000	36.45	6.73	44.97	43.13	41.34	74.00	-32.66	Pass	V
9920.000	38.22	7.26	45.52	43.99	43.95	74.00	-30.05	Pass	V



Worse case mode:		8DPSK(3-DH5)		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1188.980	30.20	1.84	44.40	45.74	33.38	74.00	-40.62	Pass	H
1601.472	31.06	2.41	43.88	46.06	35.65	74.00	-38.35	Pass	H
3883.622	32.88	4.10	44.61	47.38	39.75	74.00	-34.25	Pass	H
4804.000	34.69	5.98	44.60	43.76	39.83	74.00	-34.17	Pass	H
7206.000	36.42	6.97	44.77	42.85	41.47	74.00	-32.53	Pass	H
9608.000	37.88	6.98	45.58	43.16	42.44	74.00	-31.56	Pass	H
1232.117	30.30	1.91	44.34	46.75	34.62	74.00	-39.38	Pass	V
1685.115	31.21	2.51	43.80	44.83	34.75	74.00	-39.25	Pass	V
3757.208	32.97	4.01	44.62	48.24	40.60	74.00	-33.40	Pass	V
4804.000	34.69	5.98	44.60	43.84	39.91	74.00	-34.09	Pass	V
7206.000	36.42	6.97	44.77	43.89	42.51	74.00	-31.49	Pass	V
9608.000	37.88	6.98	45.58	43.36	42.64	74.00	-31.36	Pass	V

Worse case mode:		8DPSK(3-DH5)		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1138.626	30.07	1.76	44.48	45.82	33.17	74.00	-40.83	Pass	H
1545.405	30.96	2.35	43.95	45.73	35.09	74.00	-38.91	Pass	H
3738.129	32.99	3.99	44.62	46.41	38.77	74.00	-35.23	Pass	H
4882.000	34.85	6.14	44.60	44.48	40.87	74.00	-33.13	Pass	H
7323.000	36.43	6.85	44.87	43.50	41.91	74.00	-32.09	Pass	H
9764.000	38.05	7.12	45.55	44.06	43.68	74.00	-30.32	Pass	H
1263.883	30.38	1.96	44.29	45.31	33.36	74.00	-40.64	Pass	V
1573.189	31.01	2.38	43.92	47.62	37.09	74.00	-36.91	Pass	V
4096.875	33.05	4.42	44.60	46.58	39.45	74.00	-34.55	Pass	V
4882.000	34.85	6.14	44.60	44.51	40.90	74.00	-33.10	Pass	V
7323.000	36.43	6.85	44.87	43.31	41.72	74.00	-32.28	Pass	V
9764.000	38.05	7.12	45.55	44.64	44.26	74.00	-29.74	Pass	V

Worse case mode:		8DPSK(3-DH5)		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Level (dB $\mu$ V/m)	Limit Line (dB $\mu$ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1232.117	30.30	1.91	44.34	46.62	34.49	74.00	-39.51	Pass	H
1676.558	31.19	2.50	43.81	44.94	34.82	74.00	-39.18	Pass	H
3883.622	32.88	4.10	44.61	45.76	38.13	74.00	-35.87	Pass	H
4960.000	35.02	6.29	44.60	42.58	39.29	74.00	-34.71	Pass	H
7440.000	36.45	6.73	44.97	43.73	41.94	74.00	-32.06	Pass	H
9920.000	38.22	7.26	45.52	43.17	43.13	74.00	-30.87	Pass	H
1319.777	30.50	2.04	44.22	45.57	33.89	74.00	-40.11	Pass	V
1837.456	31.46	2.68	43.65	46.33	36.82	74.00	-37.18	Pass	V
3757.208	32.97	4.01	44.62	47.53	39.89	74.00	-34.11	Pass	V
4960.000	35.02	6.29	44.60	42.87	39.58	74.00	-34.42	Pass	V
7440.000	36.45	6.73	44.97	43.78	41.99	74.00	-32.01	Pass	V
9920.000	38.22	7.26	45.52	43.81	43.77	74.00	-30.23	Pass	V

**Note:**

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of  $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

## PHOTOGRAPHS OF TEST SETUP

Test model No.: V100LR




**Radiated spurious emission Test Setup-1(Below 30MHz)**



**Radiated spurious emission Test Setup-2(30MHz-1G)**



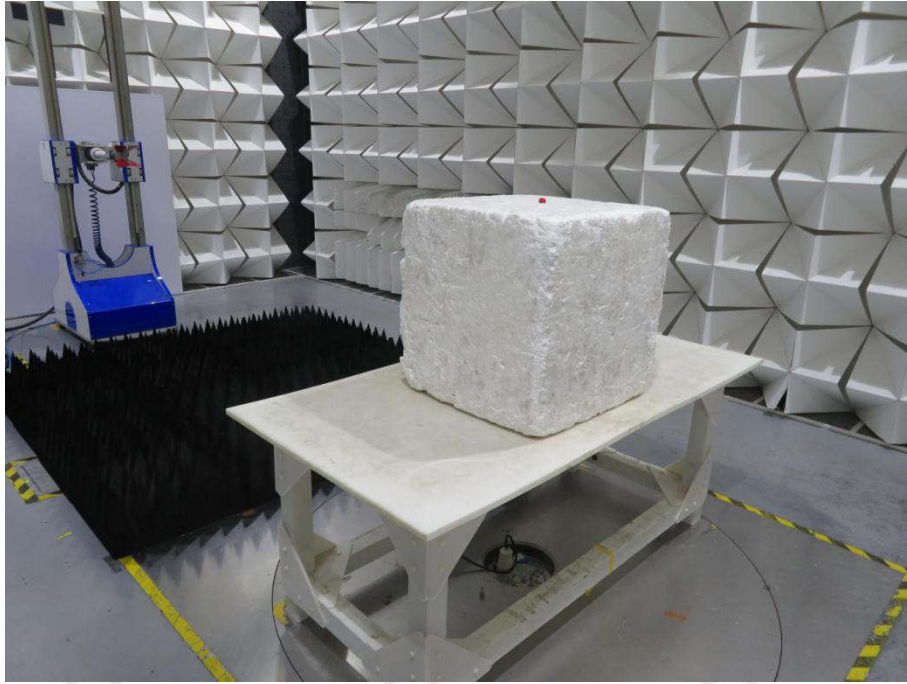

**Radiated spurious emission Test Setup-3(Above 1GHz)**




**Radiated spurious emission Test Setup for close-up**



## PHOTOGRAPHS OF EUT Constructional Details


Test model No.: V100LR

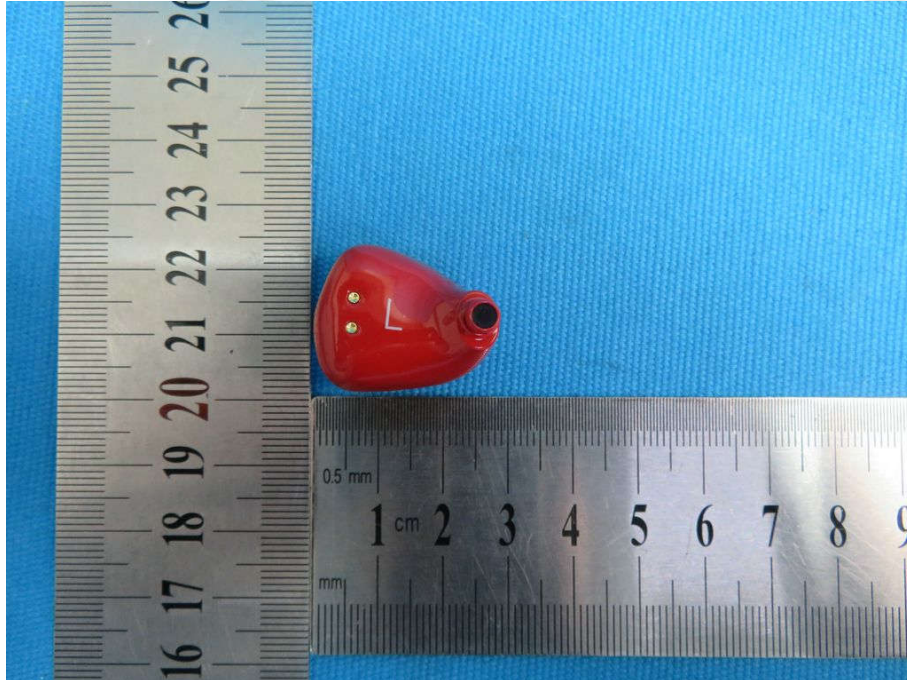


View of Product-1



View of Product-2

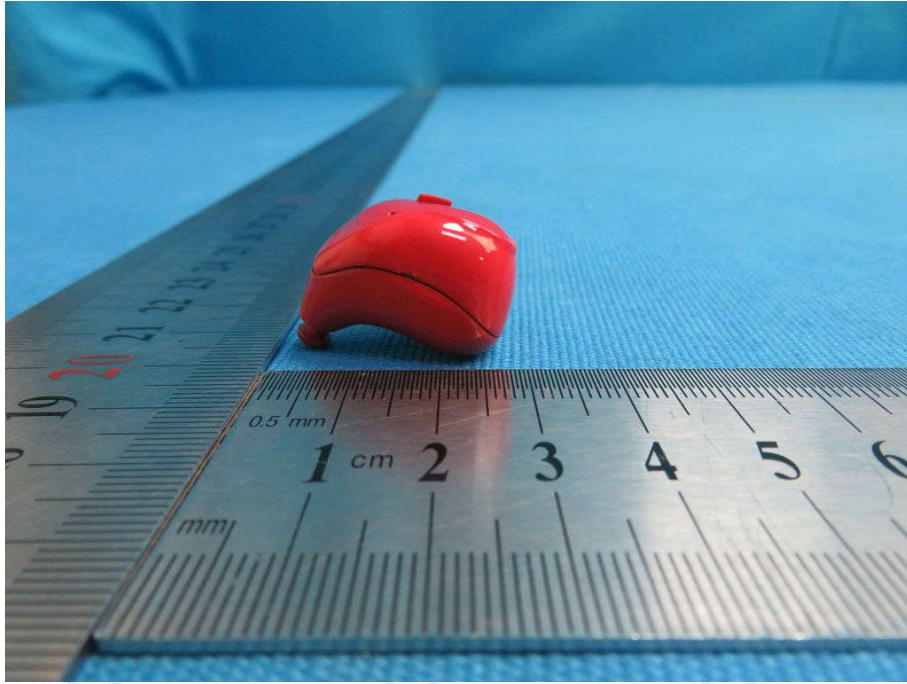


View of Product-3

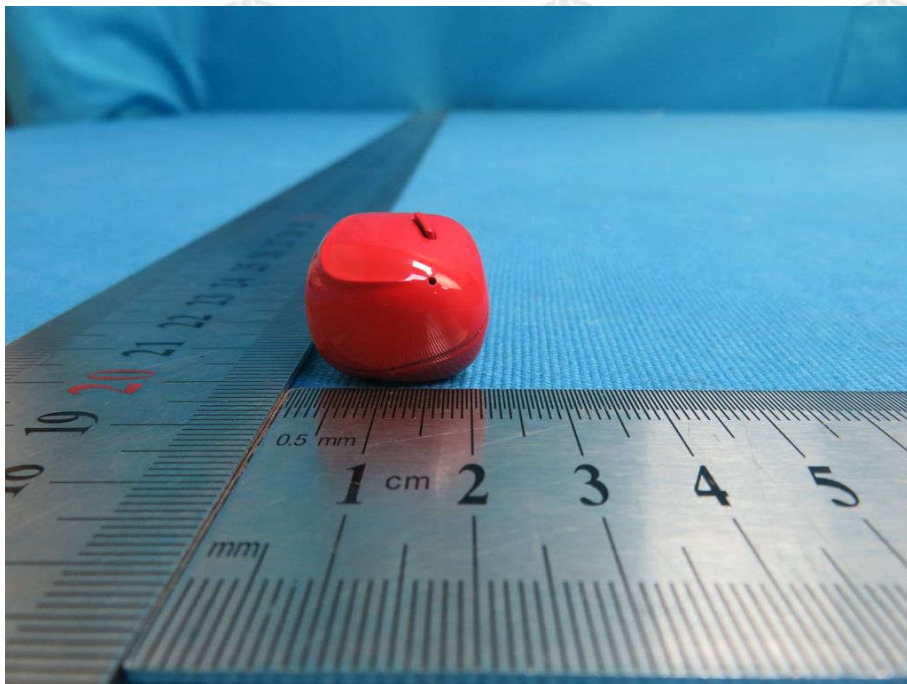


View of Product-4



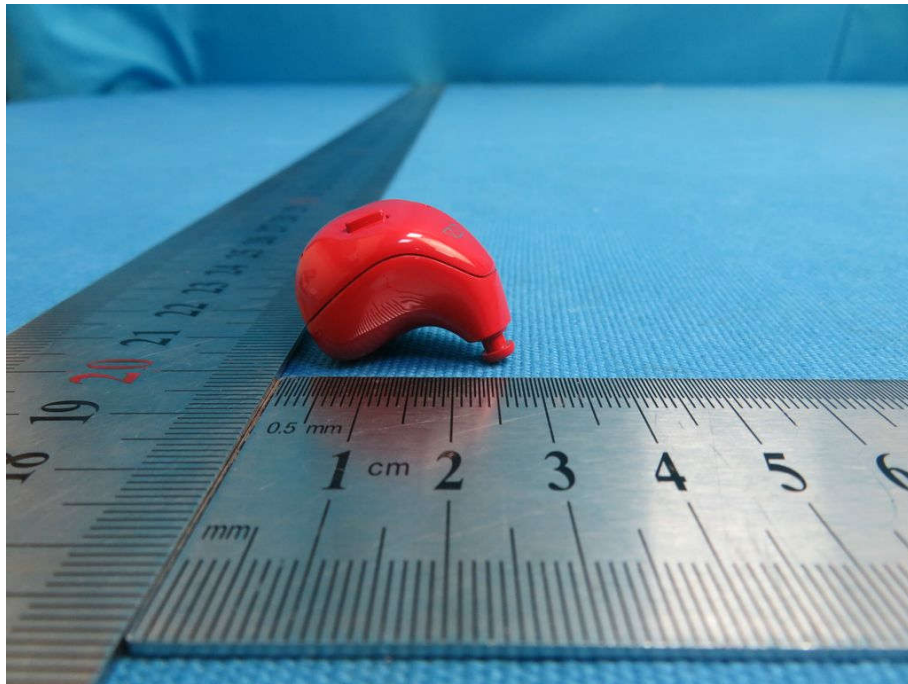


View of Product-5

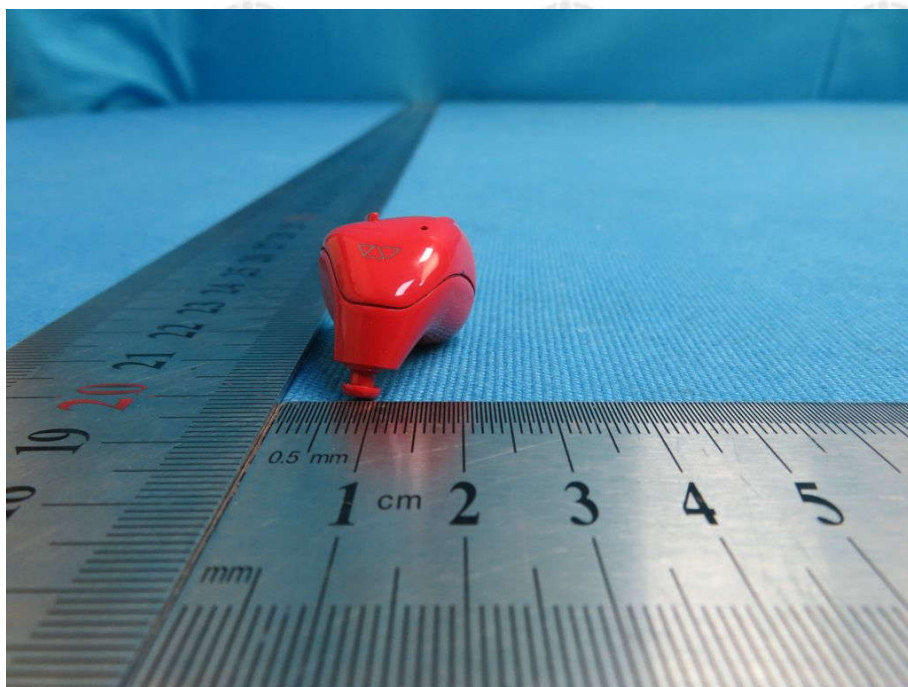

View of Product-6




View of Product-7

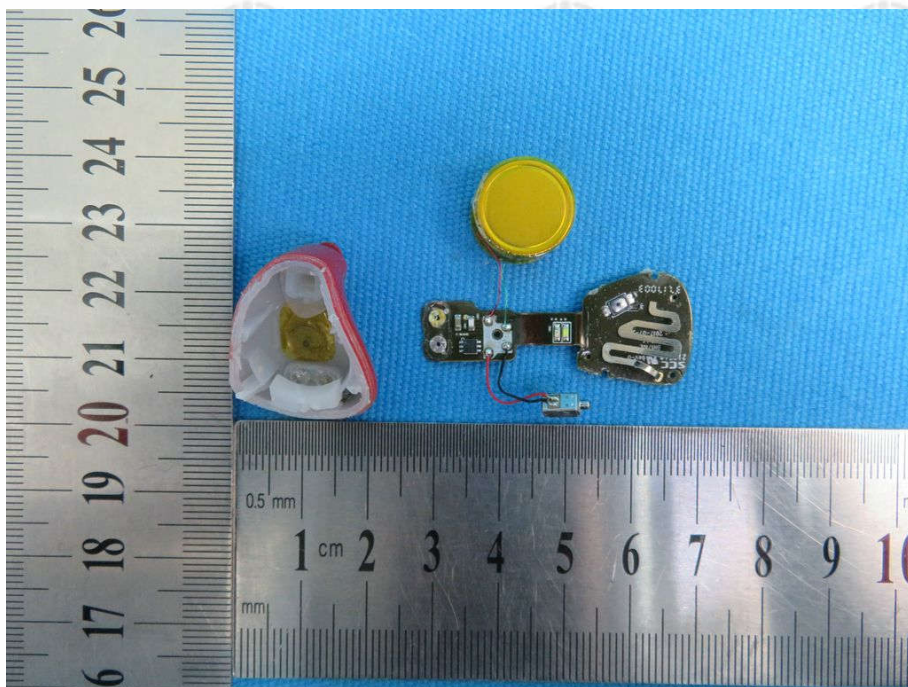


View of Product-8




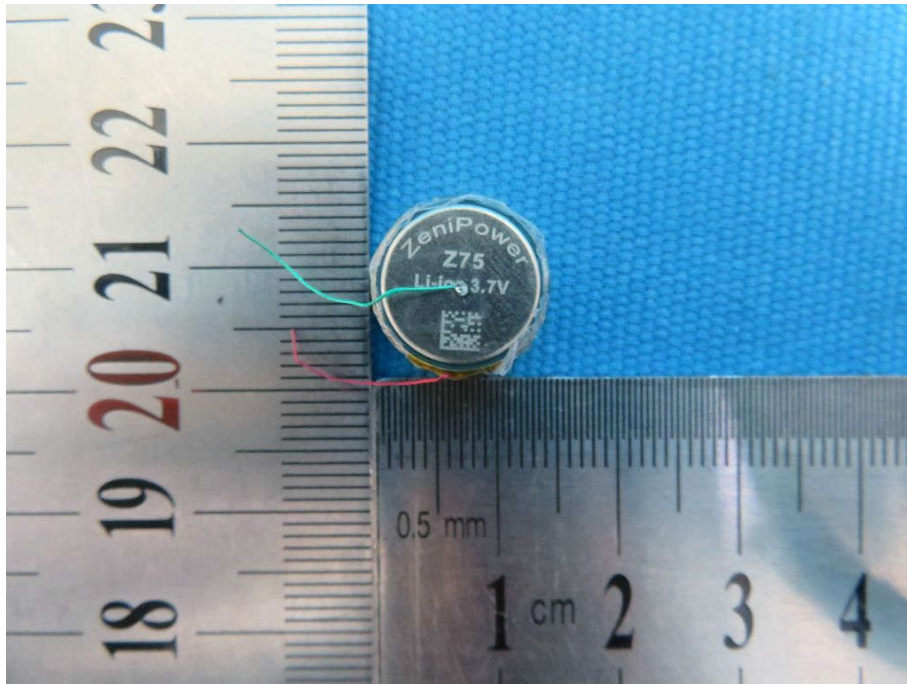


View of Product-9

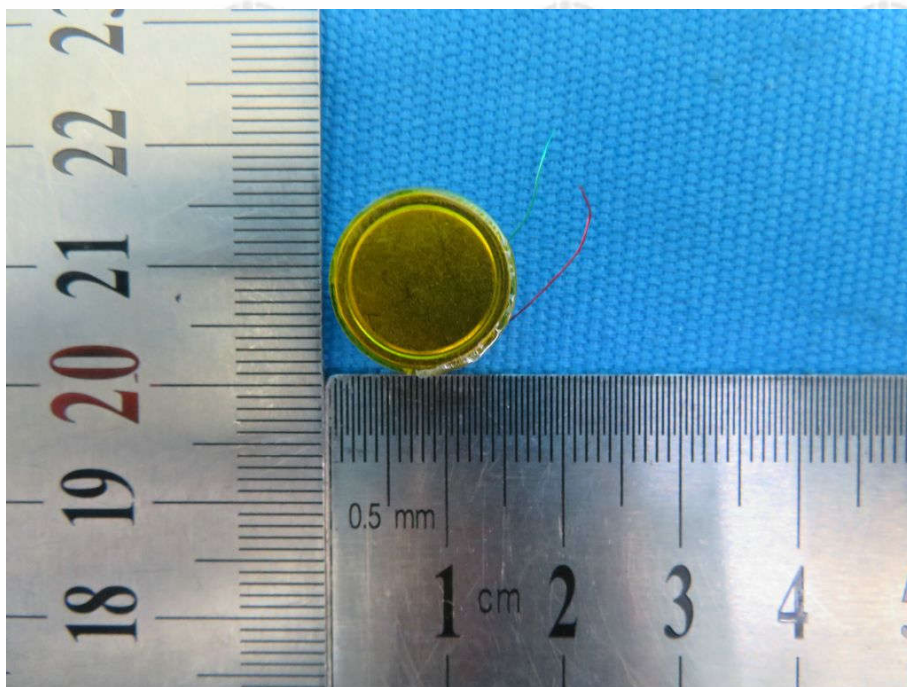

View of Product-10

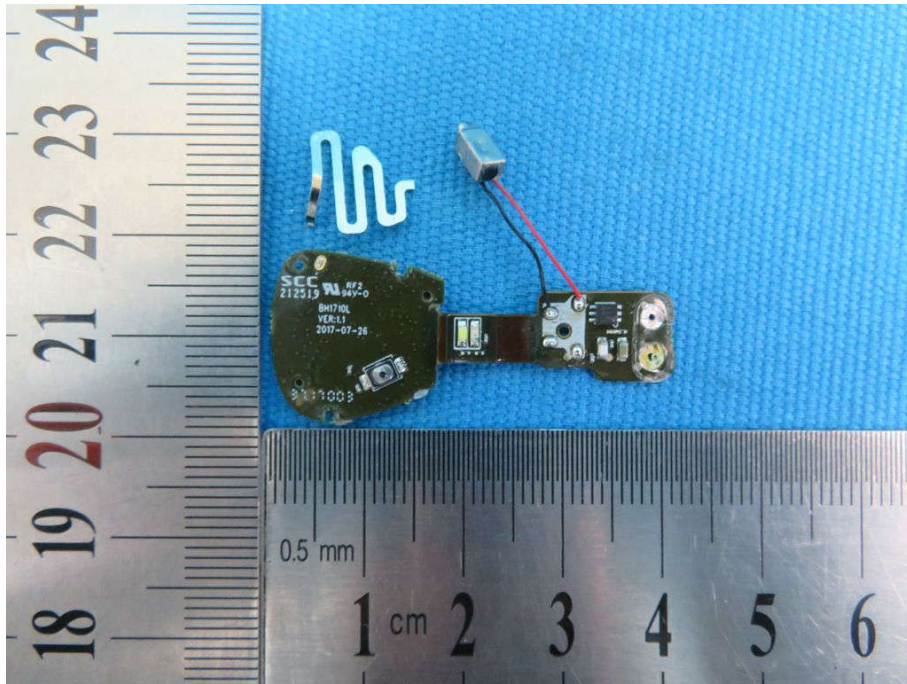

View of Product-11

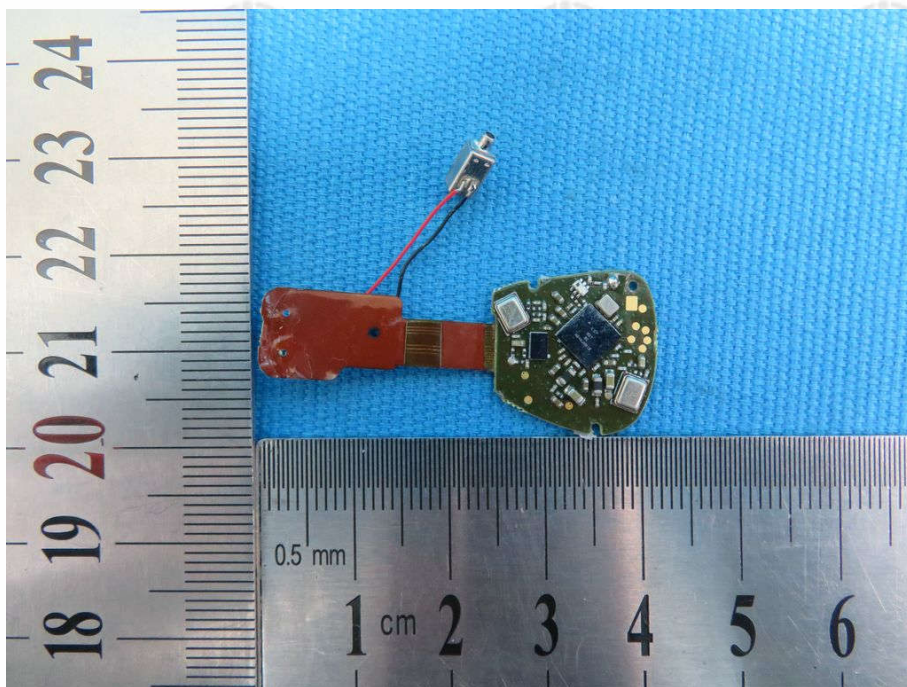

View of Product-12

\*\*\* End of Report \*\*\*

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.