


TEST REPORT

Product : Pilot Translating Earpiece
Trade mark :  **WAVERLYLABS**
Model/Type reference : V100RR,V100RB,V100RW
Serial Number : N/A
Report Number : EED32J00237204
FCC ID : 2AN4B-WLABSV1PR
Date of Issue : Nov. 22, 2017
Test Standards : 47 CFR Part 15Subpart C
Test result : PASS

Prepared for:

Waverly Labs Inc.

19 Morris Ave Brooklyn New York United States 11205

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

Tom chen

Tom chen (Test Project)

Compiled by:

Kevin lan

Kevin lan (Project Engineer)

Reviewed by:

Kevin yang

Kevin yang (Reviewer)

Approved by:

Sheek Luo

Sheek Luo (Lab supervisor)

Date:

Nov. 22, 2017

Check No.: 2392114011



2 Version

Version No.	Date	Description
00	Nov. 22, 2017	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15Subpart C Section 15.207	ANSI C63.10-2013	N/A
Maximum Conducted Average Output Power	47 CFR Part 15Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013 KDB 558074 D01v04	PASS
6dB Occupied Bandwidth	47 CFR Part 15Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013 KDB 558074 D01v04	PASS
Power Spectral Density	47 CFR Part 15Subpart C Section 15.247 (e)	ANSI C63.10-2013 KDB 558074 D01v04	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15Subpart C Section 15.247(d)	ANSI C63.10-2013 KDB 558074 D01v04	PASS
RF Conducted Spurious Emissions	47 CFR Part 15Subpart C Section 15.247(d)	ANSI C63.10-2013 KDB 558074 D01v04	PASS
Radiated Spurious Emissions	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

N/A:The device is only battery operated, the conducted emission at AC mains is not applicable.

Model No.: V100RR,V100RB,V100RW

Only the model V100RR was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being color of appearance and model name.

4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP.....	5
5.1.1 For Radiated Emissions test setup.....	5
5.2 TEST ENVIRONMENT.....	5
5.3 TEST CONDITION.....	5
6 GENERAL INFORMATION	6
6.1 CLIENT INFORMATION.....	6
6.2 GENERAL DESCRIPTION OF EUT.....	6
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	6
6.4 DESCRIPTION OF SUPPORT UNITS.....	7
6.5 TEST LOCATION.....	7
6.6 DEVIATION FROM STANDARDS.....	7
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	7
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	7
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	7
7 EQUIPMENT LIST	8
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	10
Appendix A): 6dB Occupied Bandwidth.....	11
Appendix B): Maximum Conducted Average Output Power.....	13
Appendix C): Band-edge for RF Conducted Emissions.....	14
Appendix D): RF Conducted Spurious Emissions.....	16
Appendix E): Power Spectral Density.....	19
Appendix F): Antenna Requirement.....	21
Appendix G): Restricted bands around fundamental frequency (Radiated).....	22
Appendix H): Radiated Spurious Emissions.....	25
PHOTOGRAPHS OF TEST SETUP	30
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	32

5 Test Requirement

5.1 Test setup

5.1.1 For Radiated Emissions test setup

Radiated Emissions setup:

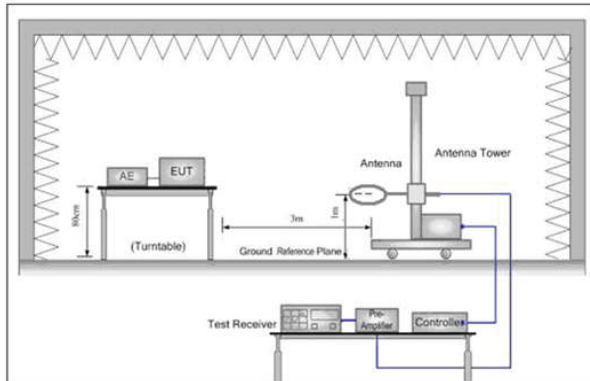


Figure 1. Below 30MHz

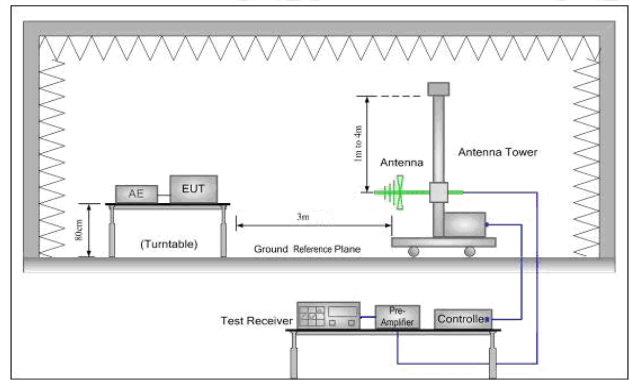


Figure 2. 30MHz to 1GHz

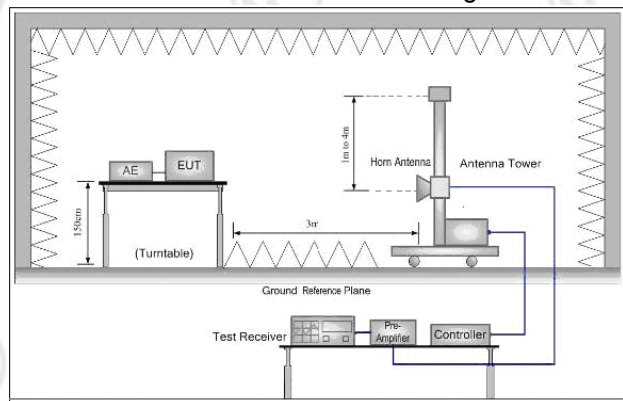


Figure 3. Above 1GHz

5.2 Test Environment

Operating Environment:	
Temperature:	24.6 °C
Humidity:	55 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test channel:


Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK	2402MHz ~2480 MHz	Channel 1	Channel 20	Channel 40
		2402MHz	2440MHz	2480MHz
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.			

6 General Information

6.1 Client Information

Applicant:	Waverly Labs Inc.
Address of Applicant:	19 Morris Ave Brooklyn New York United States 11205
Manufacturer:	Waverly Labs Inc.
Address of Manufacturer:	19 Morris Ave Brooklyn New York United States 11205
Factory:	ShengHai Electronics (Shenzhen) Ltd.
Address of Factory:	Block 17-19, Hui Ming Ying Industry, Yan Chuan, Song Gang, Baoan County, Shenzhen, China 518105

6.2 General Description of EUT

Product Name:	Pilot Translating Earpiece
Model No.(EUT):	V100RR,V100RB,V100RW
Add Model No.:	V100RR
Trade mark:	 WAVERLY LABS
EUT Supports Radios application:	BT4.1 Dual mode, 2402-2480MHz
Power Supply:	Lithium-ion button cell:1x3.7V(Z55)=3.7V
Sample Received Date:	Oct. 25, 2017
Sample tested Date:	Oct. 25, 2017 Nov. 21, 2017

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	4.1
Modulation Technique:	DSSS
Modulation Type:	GFSK
Number of Channel:	40
Sample Type:	Portable production
Test Power Grade:	Class 1(manufacturer declare)
Test Software of EUT:	Blue Suite 2.4.8 (manufacturer declare)
Antenna Type and Gain:	Type: Monopole antenna and Gain: 0dBi
Test Voltage:	Lithium-ion button cell:1x3.7V(Z55)=3.7V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

6.4 Description of Support Units

The EUT has been tested independently.

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-14-2017	03-13-2018
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-14-2017	03-13-2018
Signal Generator	Keysight	N5182B	MY53051549	03-14-2017	03-13-2018
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-11-2017	01-10-2018
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA09C L12-0395-001	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA08C L12-0393-001	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA04C L12-0396-002	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA03C L12-0394-001	---	01-11-2017	01-10-2018
DC Power	Keysight	E3642A	MY54436035	03-14-2017	03-13-2018
PC-1	Lenovo	R4960d	---	04-01-2017	03-31-2018
power meter & power sensor	R&S	OSP120	101374	03-14-2017	03-13-2018
RF control unit	JS Tonscend	JS0806-2	158060006	03-14-2017	03-13-2018
BT&WI-FI Automatic test software	JS Tonscend	JS1120-2	---	03-14-2017	03-13-2018

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-05-2016	06-05-2019
TRILOG Broadband Antenna	SCHWARZBEC K	VULB9163	9163-484	05-23-2017	05-22-2018
Microwave Preamplifier	Agilent	8449B	3008A02425	02-16-2017	02-15-2018
Horn Antenna	ETS-LINDGREN	3117	00057407	07-20-2015	07-18-2018
Loop Antenna	ETS	6502	00071730	06-22-2017	06-21-2019
Microwave Preamplifier	A.H.SYSTEMS	PAP-1840-60	6041.6042	06-30-2015	06-28-2018
Horn Antenna	A.H.SYSTEMS	SAS-574 374	---	06-30-2015	06-28-2018
Spectrum Analyzer	R&S	FSP40	100416	06-13-2017	06-12-2018
Receiver	R&S	ESCI	100435	06-14-2017	06-13-2018
Multi device Controller	matur	NCD/070/10711 112	---	01-11-2017	01-10-2018
LISN	schwarzbeck	NNBM8125	81251547	06-13-2017	06-12-2018
LISN	schwarzbeck	NNBM8125	81251548	06-13-2017	06-12-2018
Signal Generator	Agilent	E4438C	MY45095744	03-14-2017	03-13-2018
Signal Generator	Keysight	E8257D	MY53401106	03-14-2017	03-13-2018
Temperature/ Humidity Indicator	TAYLOR	1451	1905	05-08-2017	05-07-2018
Cable line	Fulai(7M)	SF106	5219/6A	01-11-2017	01-10-2018
Cable line	Fulai(6M)	SF106	5220/6A	01-11-2017	01-10-2018
Cable line	Fulai(3M)	SF106	5216/6A	01-11-2017	01-10-2018
Cable line	Fulai(3M)	SF106	5217/6A	01-11-2017	01-10-2018
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-11-2017	01-10-2018
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	---	01-11-2017	01-10-2018

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(2)	ANSI C63.10/ KDB 558074	6dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (b)(3)	ANSI C63.10/ KDB 558074	Maximum Conducted Average Output Power	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10/ KDB 558074	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10/ KDB 558074	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10/ KDB 558074	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	N/A	N/A
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix H)

**Appendix A): 6dB Occupied Bandwidth
Test Result**

Mode	Channel	6dB Bandwidth [MHz]	99% OBW[MHz]	Verdict	Remark
BLE	LCH	0.6934	1.0420	PASS	Peak detector
BLE	MCH	0.6908	1.0463	PASS	
BLE	HCH	0.6914	1.0482	PASS	

Test Graphs



**Appendix B): Maximum Conducted Average Output Power
Test Result**

Mode	Channel	Duty cycle	Duty cycle Correction Factor(dB)	Read Value [dBm]	Average Output Power[dBm]	Verdict
BLE	LCH	67.46%	1.71	4.98	6.69	PASS
BLE	MCH	66.67%	1.76	5.90	7.66	PASS
BLE	HCH	66.67%	1.76	6.11	7.87	PASS
Note:Output Power=Read Value+Duty cycle Correction Factor,and the Read Value was Read by power meter						

Appendix C): Band-edge for RF Conducted Emissions
Result Table

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BLE	LCH	6.089	-60.660	-13.91	PASS
BLE	HCH	7.719	-48.341	-12.28	PASS

Test Graphs



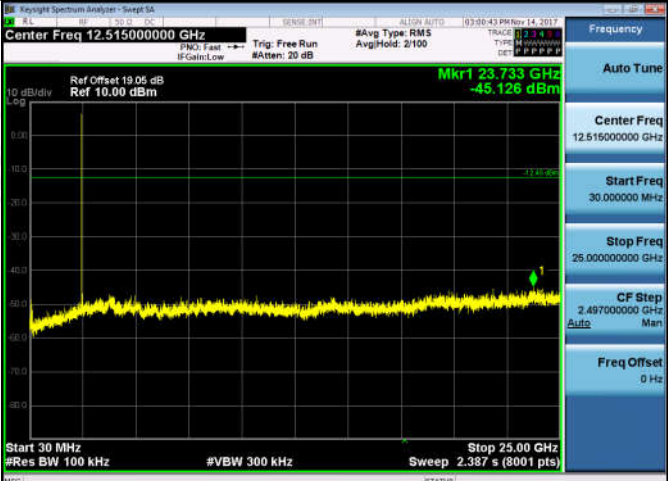


Appendix D): RF Conducted Spurious Emissions Result Table

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
BLE	LCH	5.989	<Limit	PASS
BLE	MCH	7.199	<Limit	PASS
BLE	HCH	7.552	<Limit	PASS

Test Graphs


BLE_LCH_Graphs	
Pref/BLE/LCH	<p>Key: Keysight Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 19.08 dB Ref 20.00 dBm Mkr1 2.4019980 GHz 5.989 dBm Span 4.000 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms (8001 pts)</p>
Puw/BLE/LCH	<p>Key: Keysight Spectrum Analyzer - Swept SA Center Freq 12.51500000 GHz Ref Offset 19.08 dB Ref 10.00 dBm Mkr1 24.370 GHz -44.516 dBm Start 30 MHz Stop 25.00 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.387 s (8001 pts)</p>
BLE_MCH_Graphs	
Pref/BLE/MCH	<p>Key: Keysight Spectrum Analyzer - Swept SA Center Freq 2.44000000 GHz Ref Offset 19.02 dB Ref 20.00 dBm Mkr1 2.4400020 GHz 7.199 dBm Span 4.000 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms (8001 pts)</p>
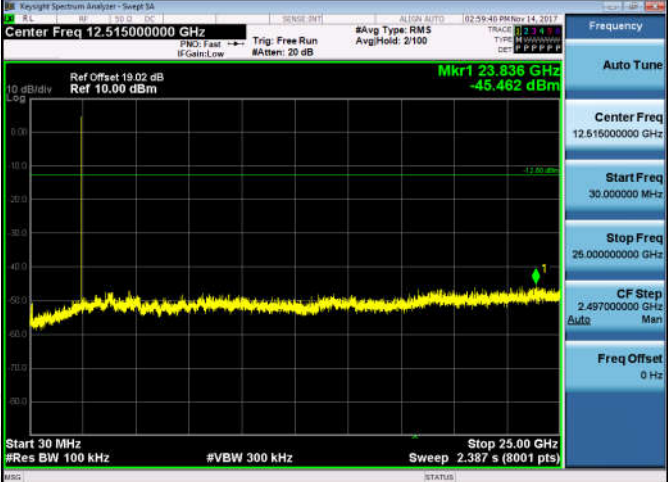
<p>Puw/BLE/MCH</p>	
<p>BLE_HCH_Graphs</p>	
<p>Pref/BLE/HCH</p>	
<p>Puw/BLE/HCH</p>	

Appendix E): Power Spectral Density Result Table

Mode	Channel	PSD [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE	LCH	-8.091	8	PASS
BLE	MCH	-8.201	8	PASS
BLE	HCH	-7.889	8	PASS

Test Graphs

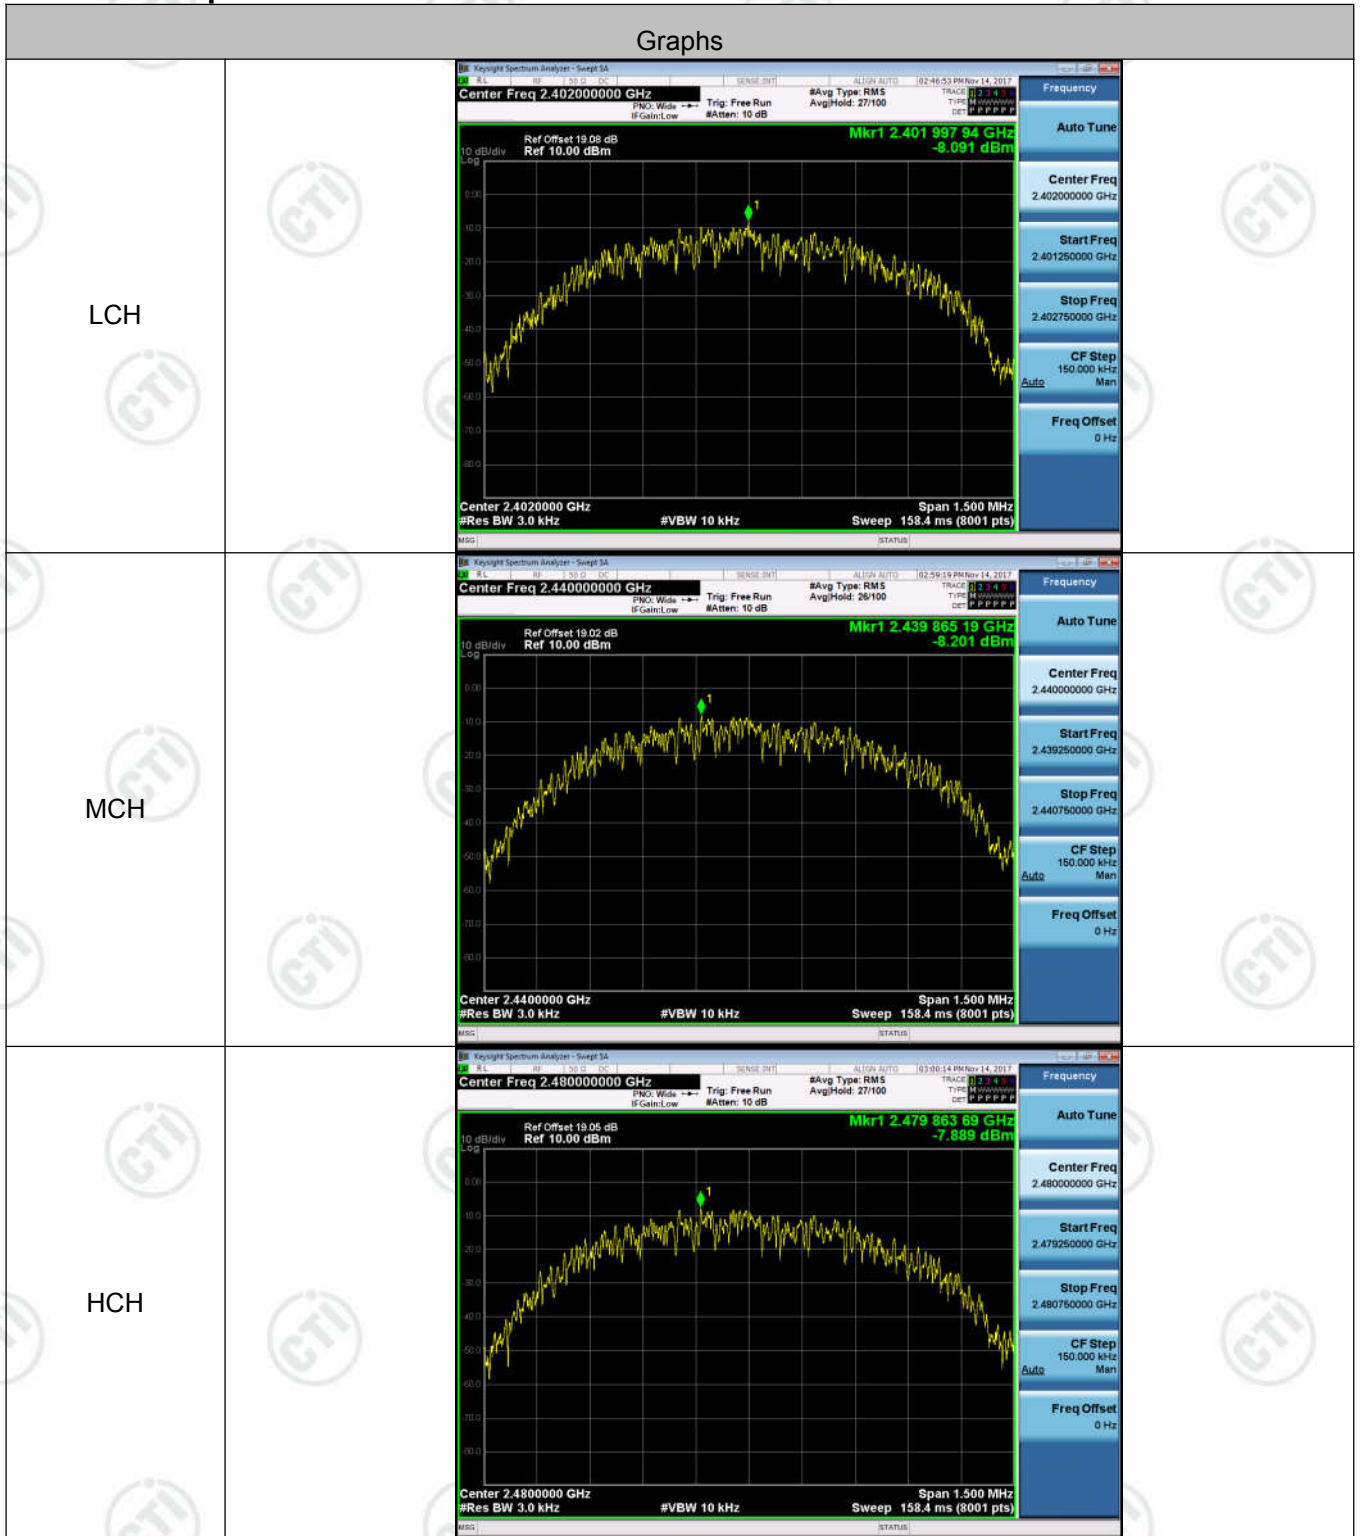

Appendix F): Antenna Requirement


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

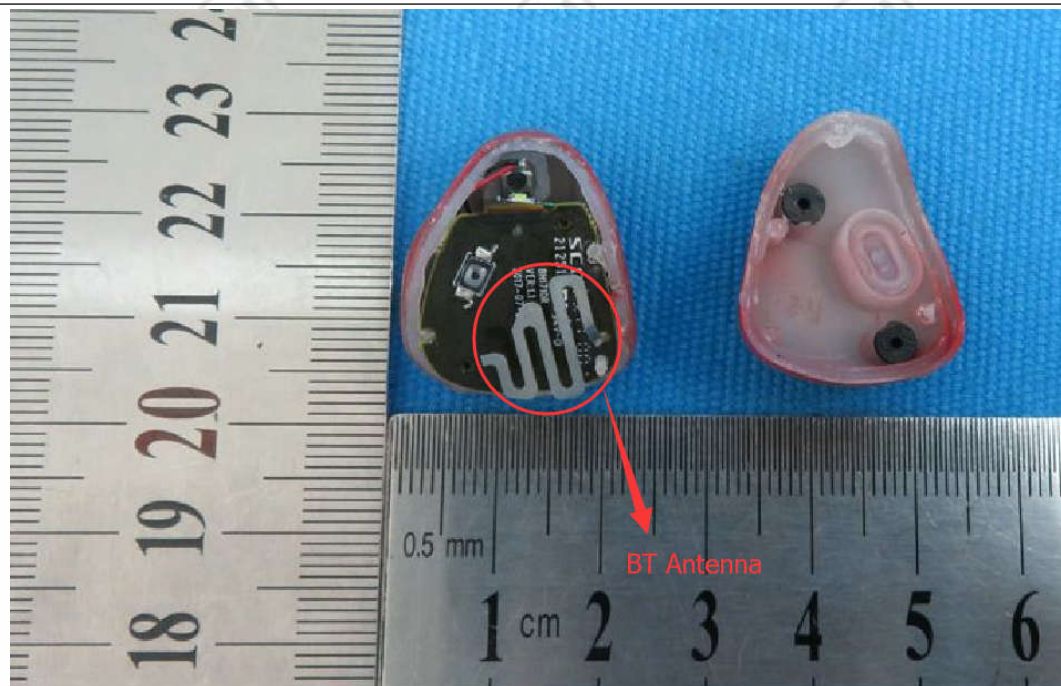


The antenna is Monopole antenna and no consideration of replacement. The best case gain of the antenna is 0dBi.

Appendix G): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120kHz</td> <td>300kHz</td> <td>Quasi-peak</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak	Above 1GHz	Peak	1MHz	3MHz	Peak	Peak	1MHz	10Hz	Average	
Frequency	Detector	RBW	VBW	Remark																	
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak																	
Above 1GHz	Peak	1MHz	3MHz	Peak																	
	Peak	1MHz	10Hz	Average																	
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). . Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 																				
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBμV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>54.0</td> <td>Average Value</td> </tr> <tr> <td>74.0</td> <td>Peak Value</td> </tr> </tbody> </table>	Frequency	Limit (dB μ V/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dB μ V/m @3m)	Remark																			
30MHz-88MHz	40.0	Quasi-peak Value																			
88MHz-216MHz	43.5	Quasi-peak Value																			
216MHz-960MHz	46.0	Quasi-peak Value																			
960MHz-1GHz	54.0	Quasi-peak Value																			
Above 1GHz	54.0	Average Value																			
	74.0	Peak Value																			


Test plot as follows:

Worse case mode:	GFSK		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

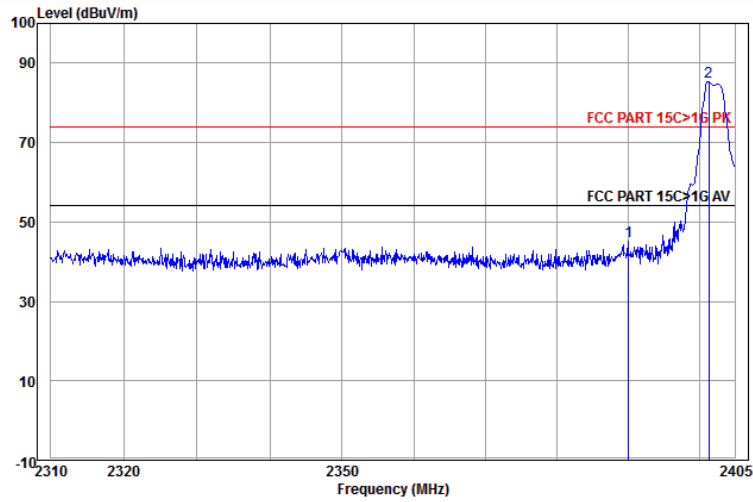


	Ant Freq	Cable Factor	Preamp Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	44.03	53.52	45.09	74.00	-28.91	Horizontal	Peak
2 pp	2401.320	32.56	3.07	44.04	93.76	85.35	74.00	11.35	Horizontal	Peak

Worse case mode:	GFSK		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

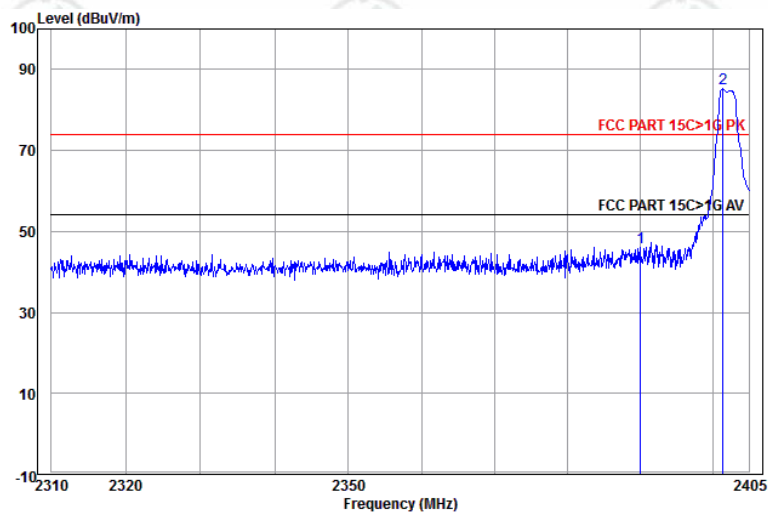


	Ant Freq	Cable Factor	Preamp Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	44.03	54.42	45.99	74.00	-28.01	Vertical	Peak
2 pp	2401.416	32.56	3.07	44.04	93.65	85.24	74.00	11.24	Vertical	Peak

Worse case mode:	GFSK		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

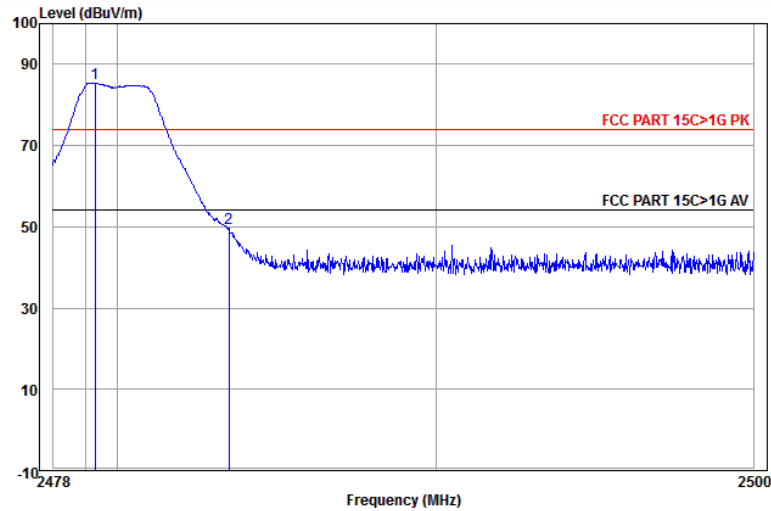

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 2479.314	32.71	3.12	44.14	93.52	85.21	74.00	11.21	Horizontal Peak
2	2483.500	32.71	3.12	44.14	57.86	49.55	74.00	-24.45	Horizontal Peak

Worse case mode:	GFSK		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

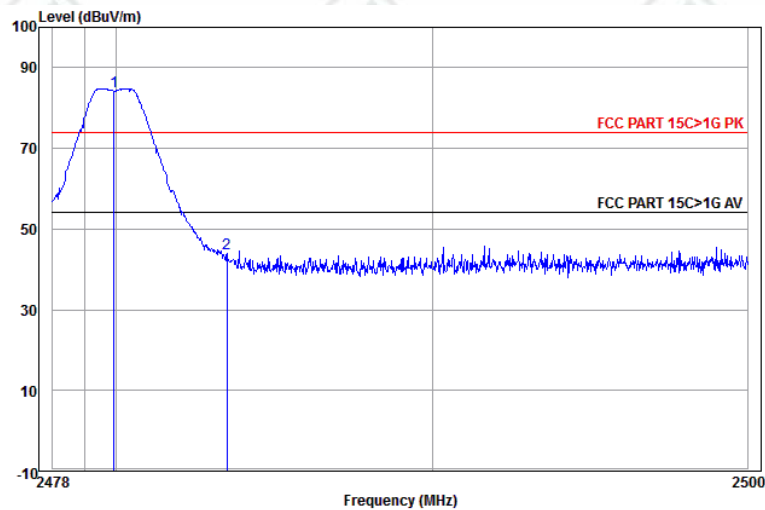

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 2479.928	32.71	3.12	44.14	92.39	84.08	74.00	10.08	Vertical Peak
2	2483.500	32.71	3.12	44.14	52.15	43.84	74.00	-30.16	Vertical Peak

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix H): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

Test Procedure:

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.
- Repeat above procedures until all frequencies measured was complete.

Limit:	Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.


**Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz**

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

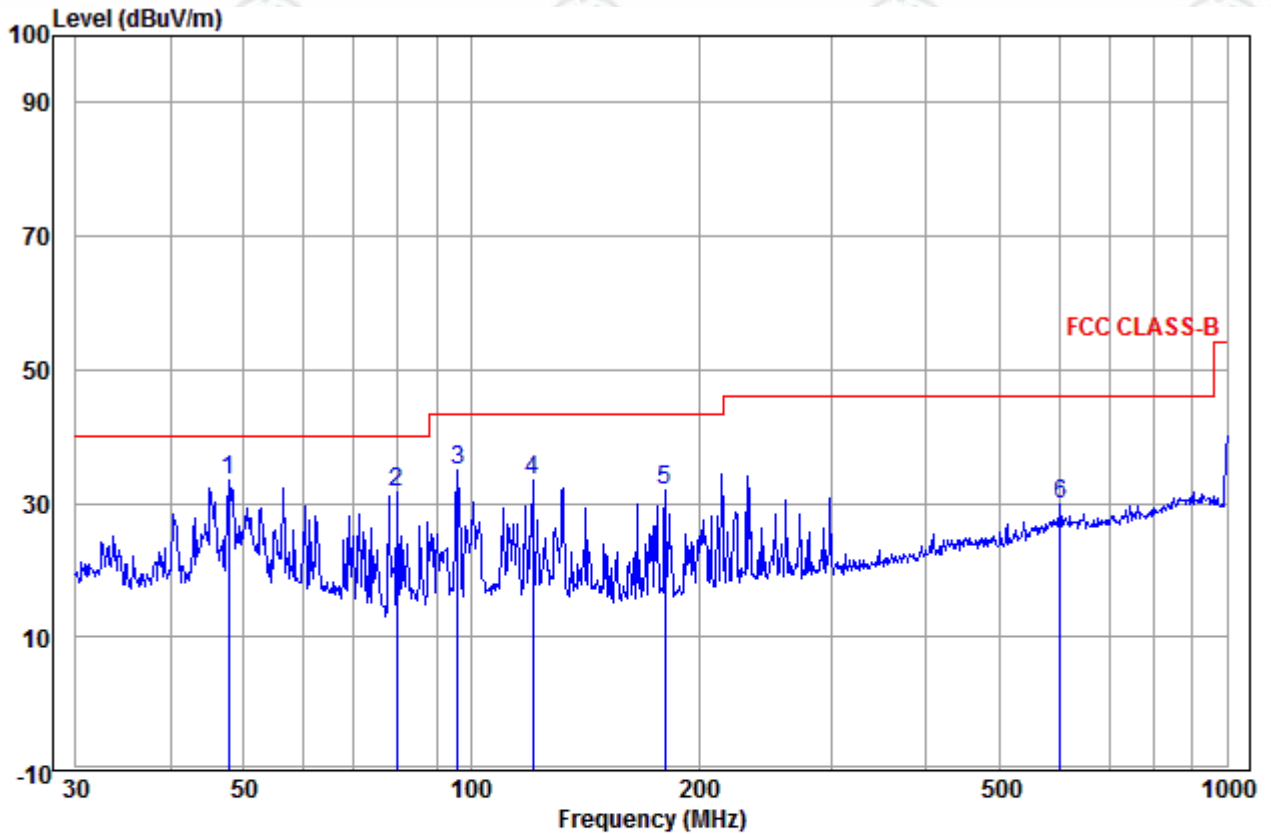

	Ant Freq	Ant Factor	Cable Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	47.826	14.44	0.10	18.98	33.52	40.00	-6.48	Vertical QP
2	79.800	8.63	0.42	22.60	31.65	40.00	-8.35	Vertical QP
3	96.099	11.90	0.52	22.63	35.05	43.50	-8.45	Vertical QP
4	120.699	10.78	0.60	22.14	33.52	43.50	-9.98	Vertical QP
5	180.649	10.54	0.93	20.55	32.02	43.50	-11.48	Vertical QP
6	601.427	18.71	1.83	9.23	29.77	46.00	-16.23	Vertical QP

Test mode:	Transmitting	Horizontal
------------	--------------	------------

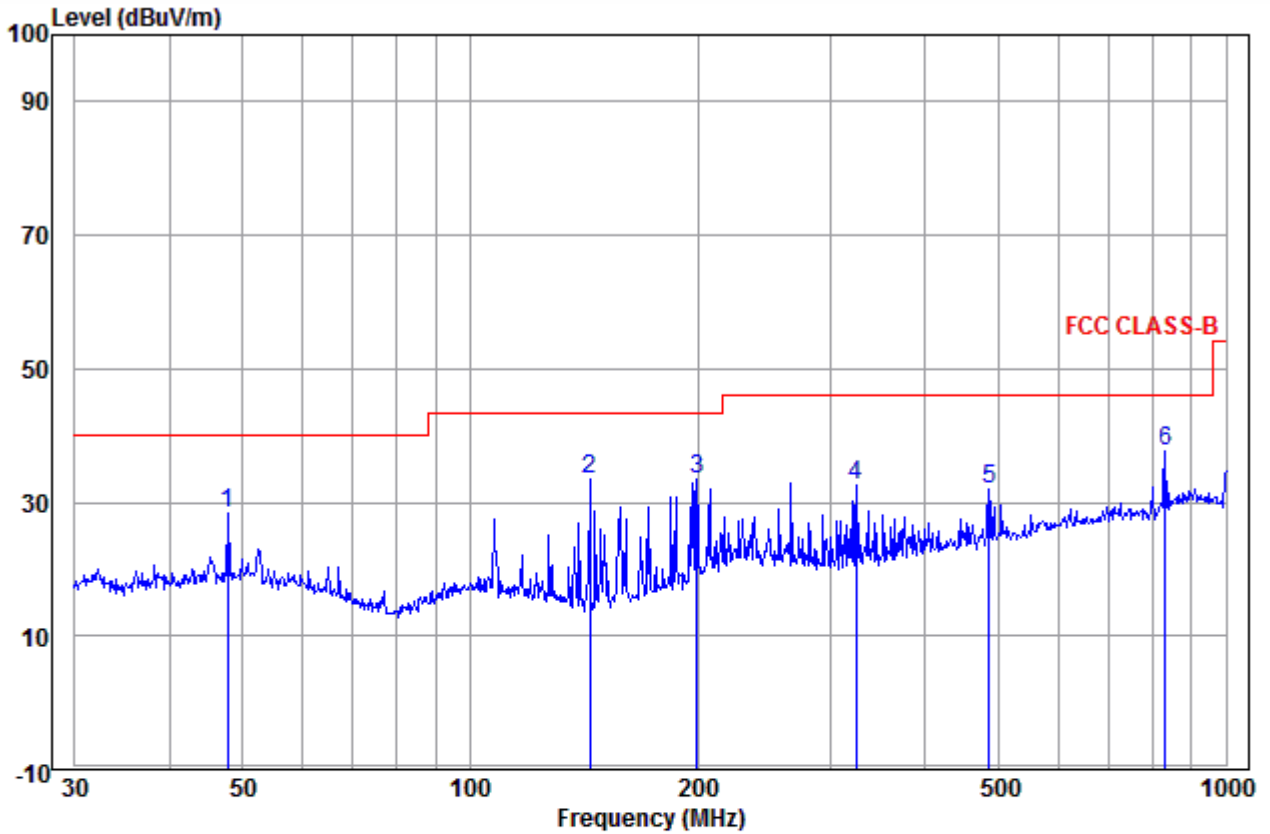

	Ant Freq	Ant Factor	Cable Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	47.826	14.44	0.10	13.69	28.23	40.00	-11.77	Horizontal QP
2	143.830	9.18	0.61	23.71	33.50	43.50	-10.00	Horizontal QP
3	199.286	11.47	1.09	21.01	33.57	43.50	-9.93	Horizontal QP
4	324.456	13.91	1.20	17.33	32.44	46.00	-13.56	Horizontal QP
5	485.609	16.71	1.51	13.62	31.84	46.00	-14.16	Horizontal QP
6 pp	830.400	20.72	2.45	14.49	37.66	46.00	-8.34	Horizontal QP

Transmitter Emission above 1GHz

Worse case mode:		GFSK		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1276.818	30.41	1.98	44.28	46.45	34.56	74.00	-39.44	Pass	H
1565.200	30.99	2.37	43.92	47.26	36.70	74.00	-37.30	Pass	H
3786.010	32.95	4.03	44.62	47.20	39.56	74.00	-34.44	Pass	H
4804.000	34.69	5.98	44.60	52.04	48.11	74.00	-25.89	Pass	H
7206.000	36.42	6.97	44.77	44.14	42.76	74.00	-31.24	Pass	H
9608.000	37.88	6.98	45.58	42.78	42.06	74.00	-31.94	Pass	H
1244.726	30.33	1.93	44.32	45.50	33.44	74.00	-40.56	Pass	V
1541.476	30.95	2.34	43.95	45.40	34.74	74.00	-39.26	Pass	V
3786.010	32.95	4.03	44.62	47.14	39.50	74.00	-34.50	Pass	V
4804.000	34.69	5.98	44.60	48.83	44.90	74.00	-29.10	Pass	V
7206.000	36.42	6.97	44.77	44.27	42.89	74.00	-31.11	Pass	V
9608.000	37.88	6.98	45.58	43.73	43.01	74.00	-30.99	Pass	V

Worse case mode:		GFSK		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1273.572	30.40	1.97	44.28	46.79	34.88	74.00	-39.12	Pass	H
1630.264	31.11	2.45	43.85	45.24	34.95	74.00	-39.05	Pass	H
4107.316	33.07	4.45	44.60	46.51	39.43	74.00	-34.57	Pass	H
4880.000	34.85	6.13	44.60	54.00	50.38	74.00	-23.62	Pass	H
7320.000	36.43	6.85	44.87	42.29	40.70	74.00	-33.30	Pass	H
9760.000	38.05	7.12	45.55	43.19	42.81	74.00	-31.19	Pass	H
1176.935	30.17	1.82	44.42	45.72	33.29	74.00	-40.71	Pass	V
1537.557	30.94	2.34	43.96	45.09	34.41	74.00	-39.59	Pass	V
4880.000	34.85	6.13	44.60	54.43	50.81	74.00	-23.19	Pass	V
5806.408	35.76	7.25	44.52	44.34	42.83	74.00	-31.17	Pass	V
7320.000	36.43	6.85	44.87	43.15	41.56	74.00	-32.44	Pass	V
9760.000	38.05	7.12	45.55	43.10	42.72	74.00	-31.28	Pass	V

Worse case mode:		GFSK		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1276.818	30.41	1.98	44.28	47.11	35.22	74.00	-38.78	Pass	H
1711.050	31.25	2.54	43.77	45.39	35.41	74.00	-38.59	Pass	H
3757.208	32.97	4.01	44.62	47.23	39.59	74.00	-34.41	Pass	H
4960.000	35.02	6.29	44.60	54.07	50.78	74.00	-23.22	Pass	H
7440.000	36.45	6.73	44.97	43.90	42.11	74.00	-31.89	Pass	H
9920.000	38.22	7.26	45.52	43.19	43.15	74.00	-30.85	Pass	H
1192.011	30.21	1.85	44.40	44.72	32.38	74.00	-41.62	Pass	V
1597.401	31.05	2.41	43.89	45.21	34.78	74.00	-39.22	Pass	V
3200.502	33.42	3.55	44.68	52.72	45.01	74.00	-28.99	Pass	V
4960.000	35.02	6.29	44.60	52.03	48.74	74.00	-25.26	Pass	V
7440.000	36.45	6.73	44.97	44.39	42.60	74.00	-31.40	Pass	V
9920.000	38.22	7.26	45.52	43.65	43.61	74.00	-30.39	Pass	V

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor


2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

PHOTOGRAPHS OF TEST SETUP

Test model No.: V100RR



Radiated spurious emission Test Setup-1(Below 30MHz)

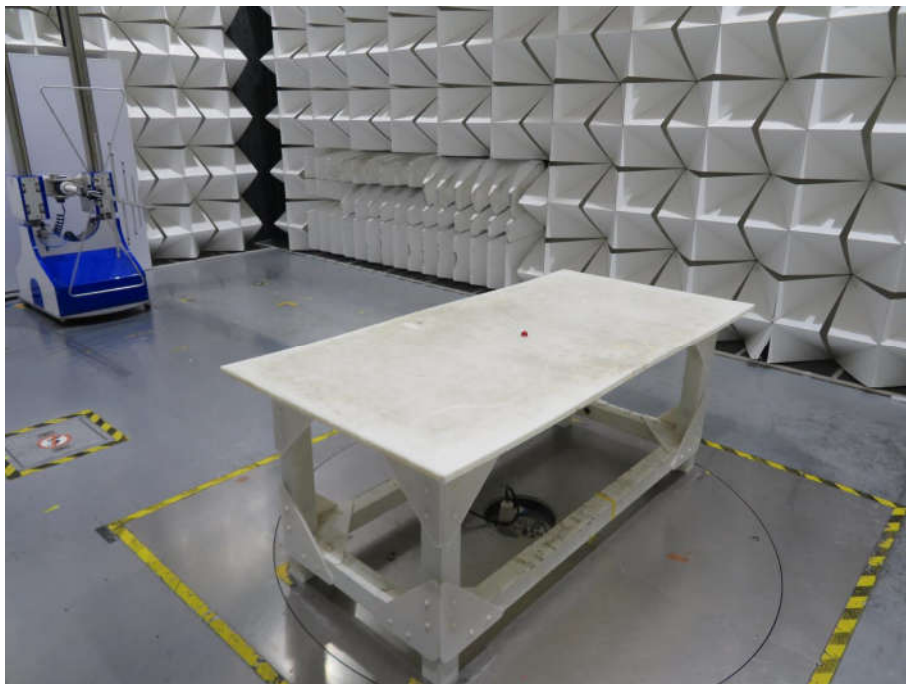

Radiated spurious emission Test Setup-2(30MHz-1GHz)



Radiated spurious emission Test Setup-3(Above 1GHz)



Radiated spurious emission Test Setup for close-up

PHOTOGRAPHS OF EUT Constructional Details

Refer to Report No.EED32J00237203 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.