

# **FCC Test Report**

Report No.: AGC00408221201FE08

FCC ID : 2A3DR-G2

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: 5G Smart phone

**BRAND NAME** : AGM

MODEL NAME

AGM G2, AGM G2 Pro, AGM G2 Guardian, AGM G2 1KM,

Glory G2

**APPLICANT**: AGM MOBILE LIMITED

**DATE OF ISSUE** : Feb. 23, 2023

**STANDARD(S)** : FCC Part 15 Subpart C §15.247

**REPORT VERSION**: V1.0


Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 67

# REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Feb. 23, 2023	Valid	Initial Release





# **TABLE OF CONTENTS**

1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION  2.2. TABLE OF CARRIER FREQUENCYS  2.3. RELATED SUBMITTAL(S)/GRANT(S)  2.4. TEST METHODOLOGY  2.5. SPECIAL ACCESSORIES  2.6. EQUIPMENT MODIFICATIONS  2.7. ANTENNA REQUIREMENT	
3. MEASUREMENT UNCERTAINTY	8
4. DESCRIPTION OF TEST MODES	g
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF TESTED SYSTEM	10
6. TEST FACILITY	11
7. PEAK OUTPUT POWER	12
7.1. MEASUREMENT PROCEDURE	12
8. BANDWIDTH	17
8.1. MEASUREMENT PROCEDURE	17 
9. CONDUCTED SPURIOUS EMISSION	24
9.1. MEASUREMENT PROCEDURE  9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)  9.3. MEASUREMENT EQUIPMENT USED  9.4. LIMITS AND MEASUREMENT RESULT	2 <sup>2</sup>
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	36
10.1. MEASUREMENT PROCEDURE  10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)  10.3. MEASUREMENT EQUIPMENT USED  10.4. LIMITS AND MEASUREMENT RESULT	36 36
11. RADIATED EMISSION	40
11.1. MEASUREMENT PROCEDURE  11.2. TEST SETUP  11.3. LIMITS AND MEASUREMENT RESULT	41

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/



Report No.: AGC00408221201FE08 Page 4 of 67

.....42

11.4. TEST RESULT	42
12. LINE CONDUCTED EMISSION TEST	61
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	61
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	61
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	62
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	62
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	62
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	67
APPENDIX B: PHOTOGRAPHS OF EUT	67



Page 5 of 67

#### 1. VERIFICATION OF COMPLIANCE

AGM MOBILE LIMITED
FLAT/RM 2253 22/F HOI TAI FACTORY ESTATE TSING YEUNG CIRCUIT TUEN MUN NT HONG KONG
Shenzhen AlJIEMO Technology Company Limited
1st Floor 101 and 2nd Floor 201, Building A2, Huafeng Century Technology Park, Nanchang Community, Xixiang, Baoan District, Shenzhen, China
Shenzhen AlJIEMO Technology Company Limited
1st Floor 101 and 2nd Floor 201, Building A2, Huafeng Century Technology Park, Nanchang Community, Xixiang, Baoan District, Shenzhen, China
5G Smart phone
AGM
AGM G2
AGM G2 Pro, AGM G2 Guardian, AGM G2 1KM, Glory G2
All the same except the model name
Dec. 28, 2022
Dec. 28, 2022~Feb. 23, 2023
No any deviation from the test method
Normal
Pass
AGCRT-US-BLE/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Reviewed By

Bibo Zhang
(Project Engineer)

Calvin Liu
(Reviewer)

Feb. 23, 2023

Approved By

Max Zhang
Authorized Officer

Feb. 23, 2023



Page 6 of 67

#### 2. GENERAL INFORMATION

# 2.1. PRODUCT DESCRIPTION

The EUT is designed as a "5G Smart phone". It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

-,		
Operation Frequency	2.402 GHz to 2.480GHz	
RF Output Power	1Mbps: 4.188dBm 2Mbps: 4.082dBm	
Bluetooth Version	V5.2	
Modulation	BR □GFSK, EDR □π /4-DQPSK, □8DPSK BLE □GFSK 1Mbps □GFSK 2Mbps	
Number of channels	40 Channel	
Antenna Designation	PIFA Antenna (Comply with requirements of the FCC part 15.203)	
Antenna Gain	0.62dBi	
Hardware Version	V1.00	
Software Version	N2060.6.01.00.00	
Power Supply	DC 3.85V by battery	

#### 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2402 MHz
	1	2404 MHz
2400~2483.5MHz	:	:
	38	2478 MHz
	39	2480 MHz



Page 7 of 67

# 2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2A3DR-G2** filing to comply with the FCC Part 15.247 requirements.

#### 2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

#### 2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

#### 2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

#### 2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.




Page 8 of 67

#### 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$






#### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX_CH00_1Mbps
2	Middle channel TX_CH19_1Mbps
3	High channel TX_CH39_1Mbps
4	Low channel TX_CH00_2Mbps
5	Middle channel TX_CH19_2Mbps
6	High channel TX_CH39_2Mbps

#### Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

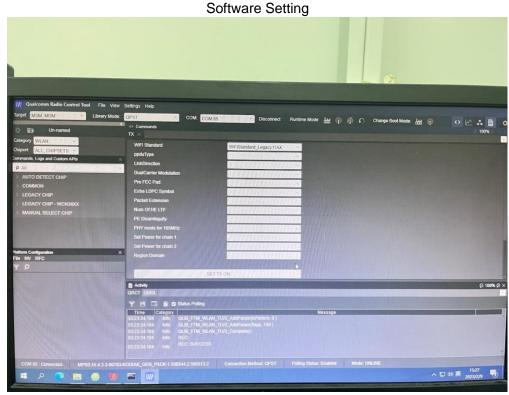




Page 10 of 67

# 5. SYSTEM TEST CONFIGURATION

#### **5.1. CONFIGURATION OF TESTED SYSTEM**

Radiated Emission Configure:



Conducted Emission Configure:

EUT	AE

# **5.2. EQUIPMENT USED IN TESTED SYSTEM**

Item	Equipment	Model No.	ID or Specification	Remark
1	5G Smart phone	AGM G2	2A3DR-G2	EUT
2	Adapter	U312QC1801	Input: AC 100-240V 50/60Hz,	AE
3	Battery	Glory G2	DC 3.85V 7000mAh	AE
4	USB Cable	N/A	N/A	AE

#### 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant
15.207	Conducted Emission	Compliant



Page 11 of 67

#### 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA

#### **TEST EQUIPMENT OF CONDUCTED EMISSION TEST**

1201 24011 INIZITE OF CONTROL ZIMICONON 1201					
Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Mar. 28, 2022	Mar. 27, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 09, 2021	Jun. 08, 2022
Test software	R&S	ES-K1	Ver.V1.71	N/A	N/A

# **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	N/A	N/A
Attenuator	ZHINAN	E-002	N/A	Sep. 01, 2022	Aug. 31, 2023
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 01, 2022	Aug. 31, 2023
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 07, 2021	Jan. 06, 2023
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 05, 2023	Jan. 04, 2025
Test software	Tonscend	JS32-RE	Ver.2.5	N/A	N/A



Page 12 of 67

#### 7. PEAK OUTPUT POWER


#### 7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW ≥ DTS bandwidth
- 3. VBW≥3\*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

# 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

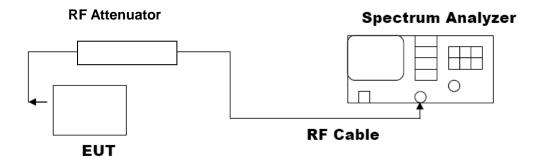




Page 13 of 67

#### 7.3. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power					
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail	
	2402	3.366	≤30	Pass	
GFSK 1Mbps	2440	4.188	≤30	Pass	
	2480	3.184	≤30	Pass	
	2402	3.243	≤30	Pass	
GFSK 2Mbps	2440	4.082	≤30	Pass	
	2480	3.308	≤30	Pass	


**Test Graphs of Conducted Output Power** 











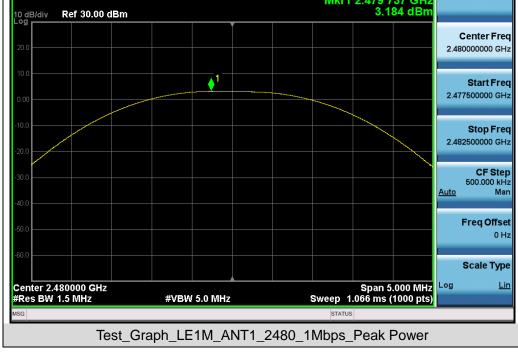







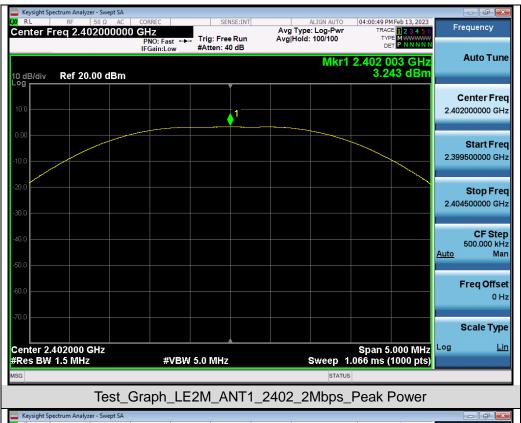







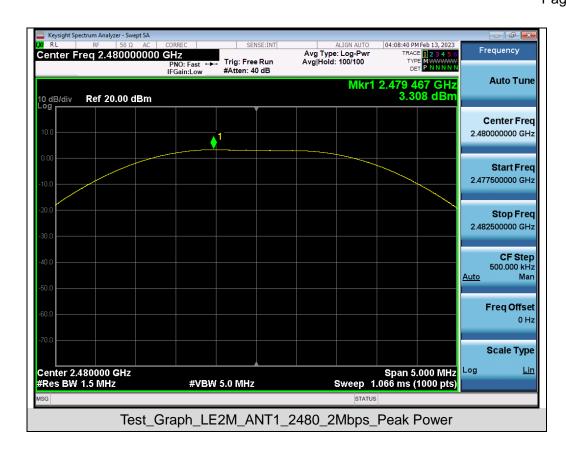



Page 17 of 67

#### 8. BANDWIDTH

#### 8.1. MEASUREMENT PROCEDURE

#### 6dB bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW ≥ 3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

#### Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
  The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
  bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.


**Note:** The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

#### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.


#### 8.3. LIMITS AND MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and DTS Bandwidth						
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail	
GFSK 1Mbps	2402	1.019	0.745	≥0.5	Pass	
	2440	1.019	0.743	≥0.5	Pass	
	2480	1.021	0.746	≥0.5	Pass	
GFSK 2Mbps	2402	2.006	1.142	≥0.5	Pass	
	2440	2.005	1.155	≥0.5	Pass	
	2480	2.005	1.153	≥0.5	Pass	














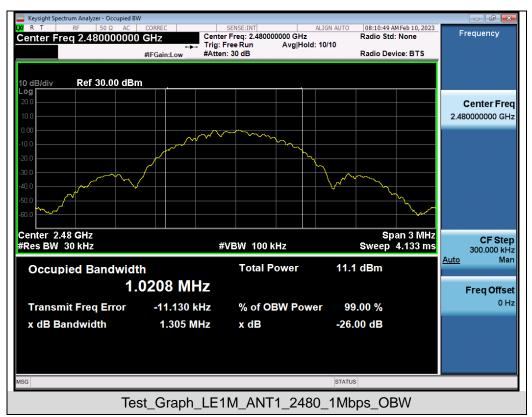

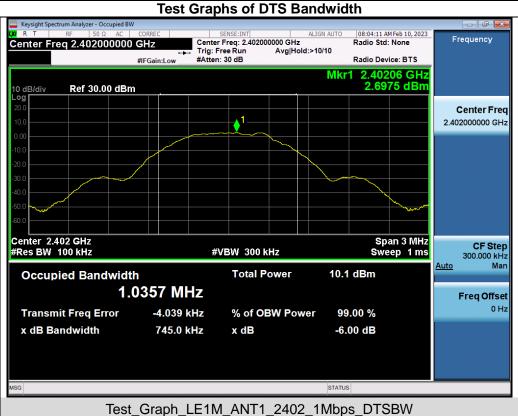








Test\_Graph\_LE1M\_ANT1\_2480\_1Mbps\_DTSBW







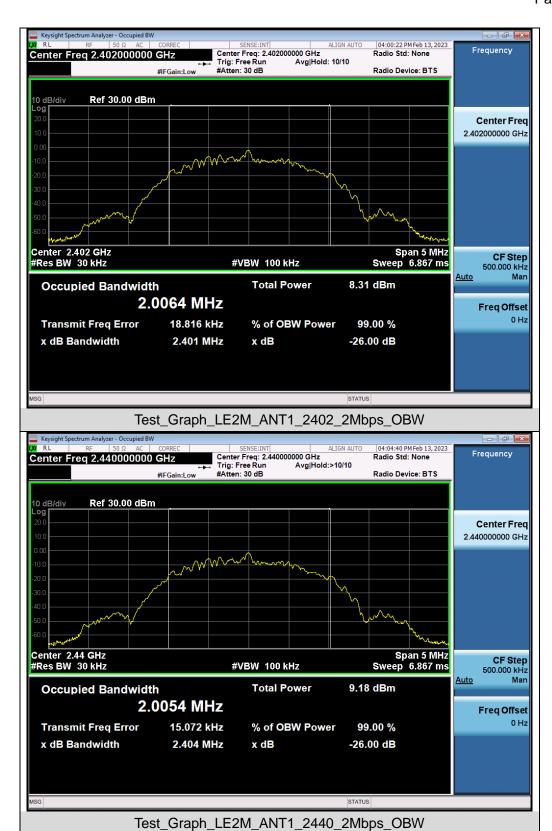






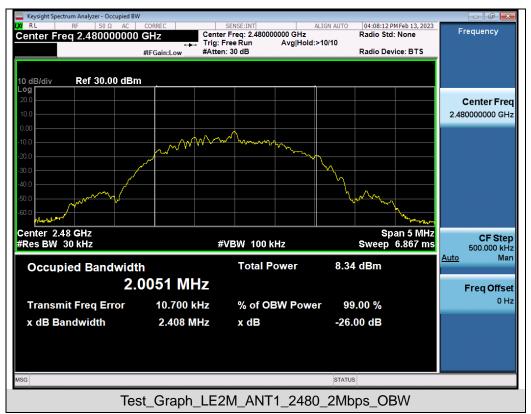

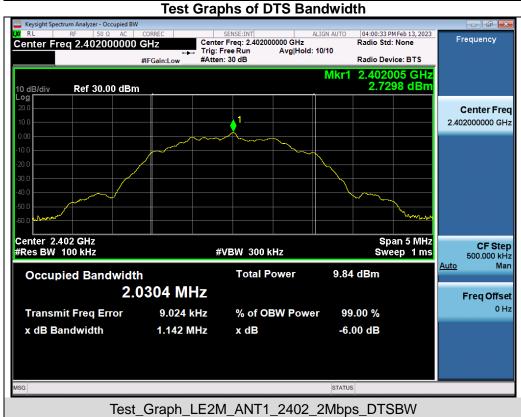







Test\_Graph\_LE2M\_ANT1\_2480\_2Mbps\_DTSBW



Page 24 of 67

#### 9. CONDUCTED SPURIOUS EMISSION

#### 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

# 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.

#### 9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

#### 9.4. LIMITS AND MEASUREMENT RESULT

5.4. EIIII TO AND MEAGOREMENT REGGET					
LIMITS AND MEASUREMENT RESULT					
Applicable Limite	Measurement Result				
Applicable Limits	Test Data	Criteria			
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS			



**Scale Type** 

<u>Lin</u>

Stop 2.390 GHz Sweep 226.0 ms (30000 pts)



Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands Avg Type: Log-Pwr Avg|Hold: 10/10 Frequency TYPE MWWW Center Freq 2.402000000 GHz Trig: Free Run #Atten: 30 dB IFGain:Low **Auto Tune** Mkr1 2.402 057 8 GHz 2.742 dBm 10 dB/div Ref 20.00 dBm Center Freq 2.402000000 GHz Start Freq 2.400500000 GHz Stop Freq 2.403500000 GHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz **Scale Type** Log Center 2.402000 GHz #Res BW 100 kHz Span 3.000 MHz Sweep 2.000 ms (30000 pts) <u>Lin</u> #VBW 300 kHz Test\_Graph\_LE1M\_ANT1\_2402\_1Mbps\_Reference Level Center Freq 1.210000000 GHz Frequency Avg Type: Log-Pwr Avg|Hold: 10/10 PNO: Fast ---IFGain:Low Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr1 2.203 24 GHz -57.135 dBm Ref 20.00 dBm 10 dB/div Center Frea 1.210000000 GHz Start Freq 30.000000 MHz Stop Freq 2 390000000 GHz CF Step 236.000000 MHz <u>Auto</u> Freq Offset 0 Hz

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test\_Graph\_LE1M\_ANT1\_2402\_1Mbps\_Lower Band Emissions

#VBW 300 kHz

Start 0.030 GHz #Res BW 100 kHz





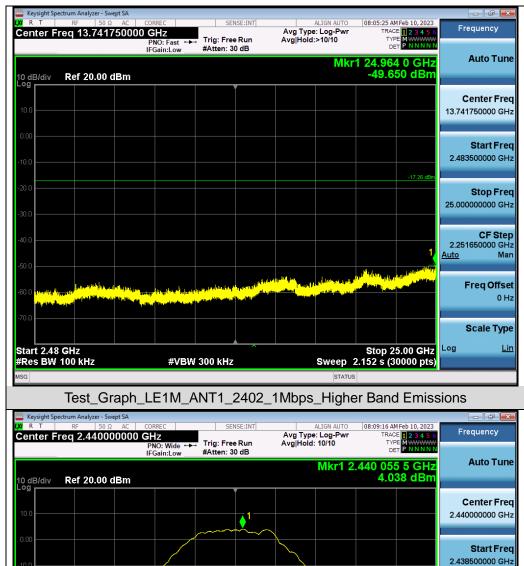

Center Freq 2.440000000 GHz

Start Freq 2.439500000 GHz

Stop Freq 2.441500000 GHz

Stop Freq 2.441500000 GHz


CF Step 300.000 kHz

Was Span 3.000 MHz

Scale Type

Log Lin


Test\_Graph\_LE1M\_ANT1\_2440\_1Mbps\_Reference Level

















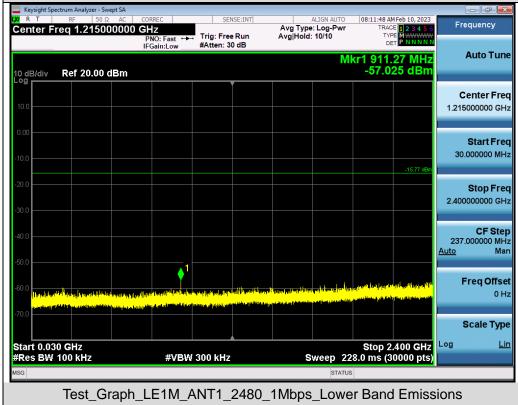












Test\_Graph\_LE2M\_ANT1\_2402\_2Mbps\_Reference Level





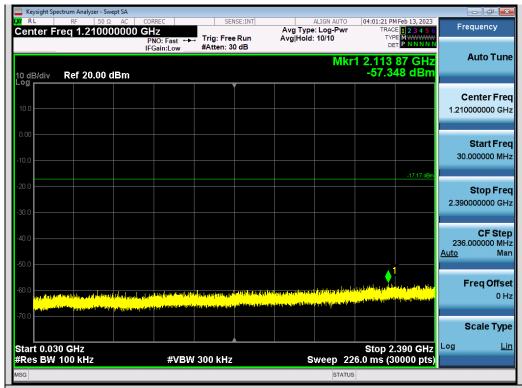










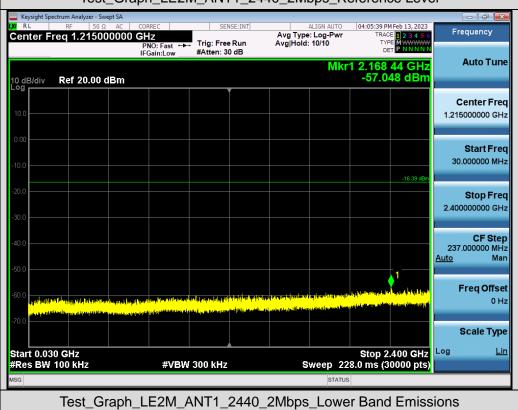

















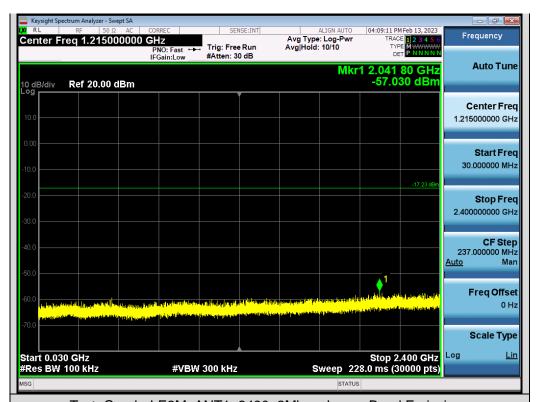










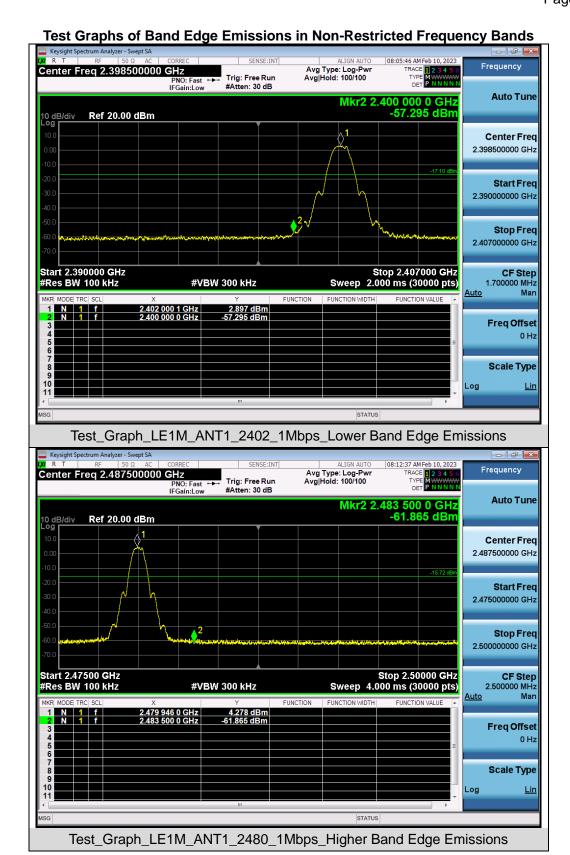





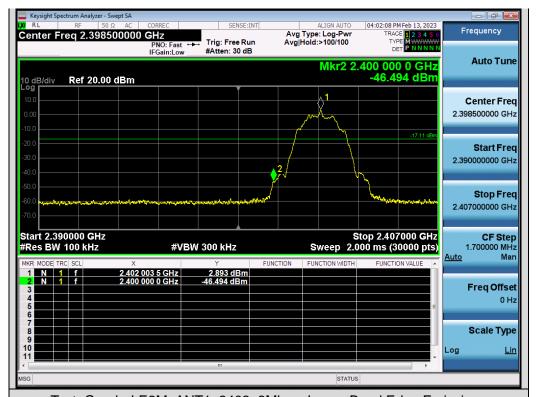

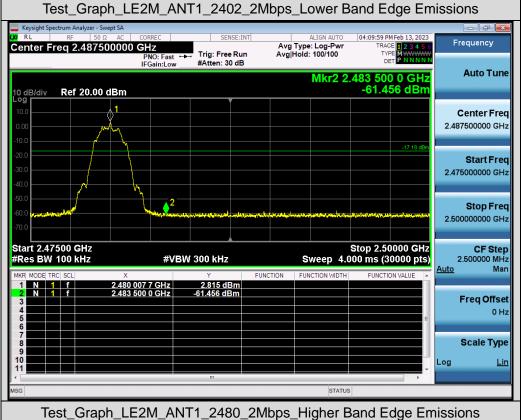



Page 36 of 67

#### 10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

#### 10.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 8.4 was used in this testing.

# 10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


Refer to Section 7.2.

#### 10.3. MEASUREMENT EQUIPMENT USED


Refer to Section 6.


#### 10.4. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power Spectral Density					
Test Mode	Test Channel (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail	
	2402	-11.498	<b>≤8</b>	Pass	
GFSK 1Mbps	2440	-10.724	≪8	Pass	
	2480	-11.720	<b>≤8</b>	Pass	
	2402	-14.275	<b>≤8</b>	Pass	
GFSK 2Mbps	2440	-13.440	<b>≤8</b>	Pass	
	2480	-14.329	<b>≤8</b>	Pass	





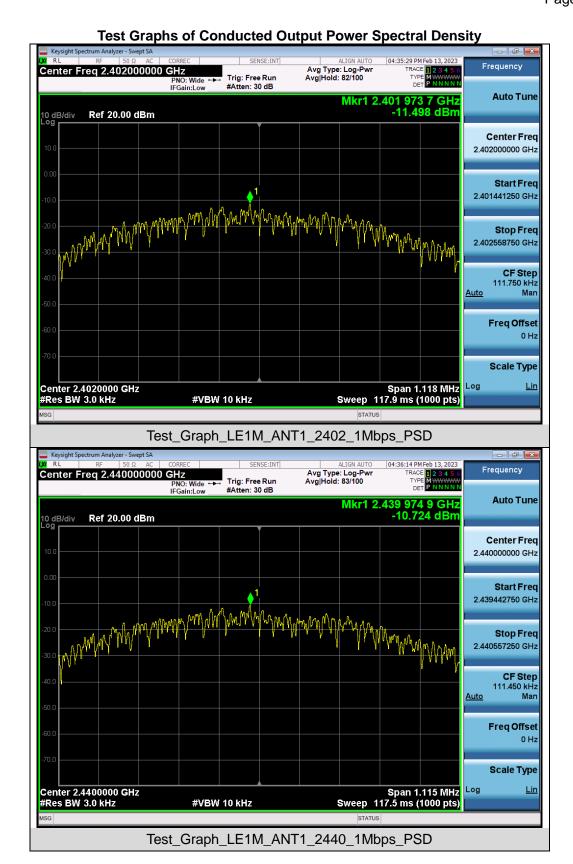




Freq Offset

Scale Type

Lin

Span 1.713 MHz Sweep 180.6 ms (1000 pts)



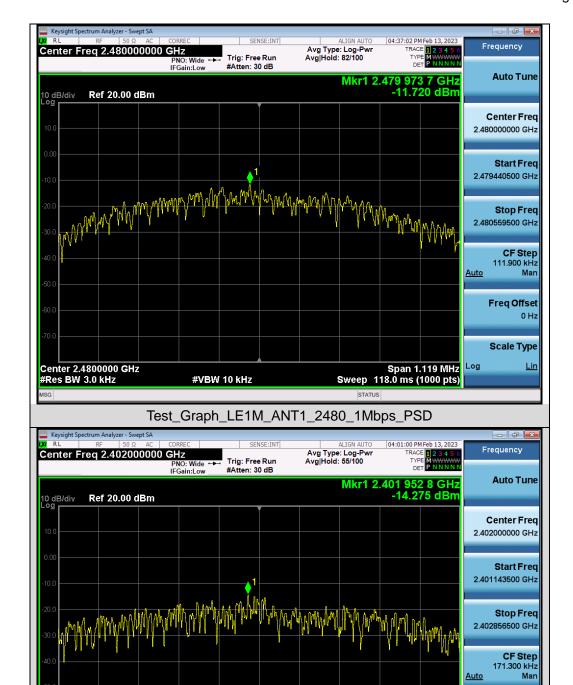


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test\_Graph\_LE2M\_ANT1\_2402\_2Mbps\_PSD


#VBW 10 kHz

Center 2.4020000 GHz #Res BW 3.0 kHz





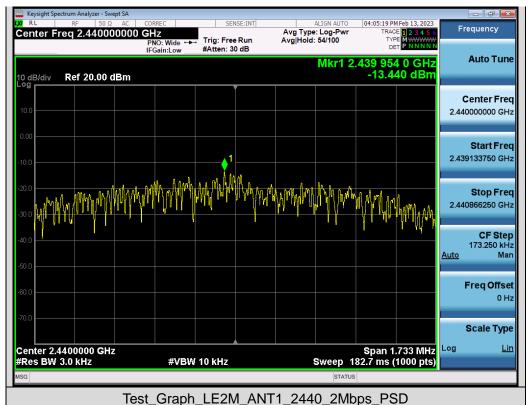

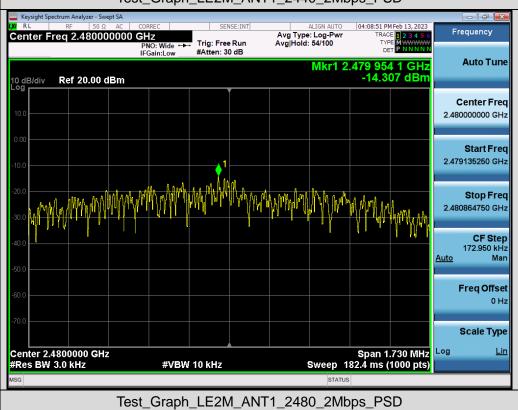



Page 40 of 67

## 11. RADIATED EMISSION


#### 11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




## 11.2. TEST SETUP


## Radiated Emission Test-Setup Frequency Below 30MHz

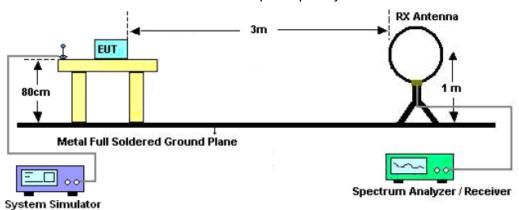

## RADIATED EMISSION TEST SETUP 30MHz-1000MHz

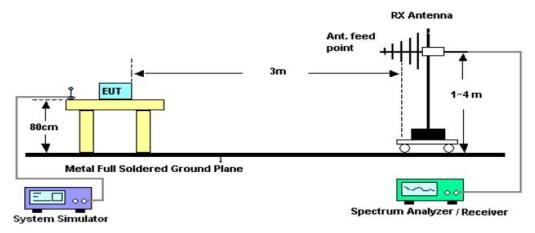

## RADIATED EMISSION TEST SETUP ABOVE 1000MHz

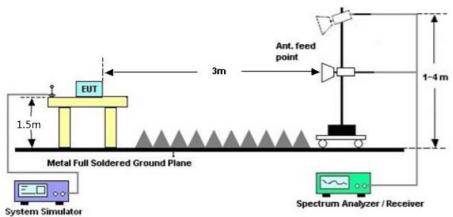

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 42 of 67

## 11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

## 11.4. TEST RESULT

## Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Report No.: AGC00408221201FE08 Page 43 of 67


Radiated emission from 30MHz to 1000MHz-1Mpbs

EUT	5G Smart phone	Model Name	AGM G2
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

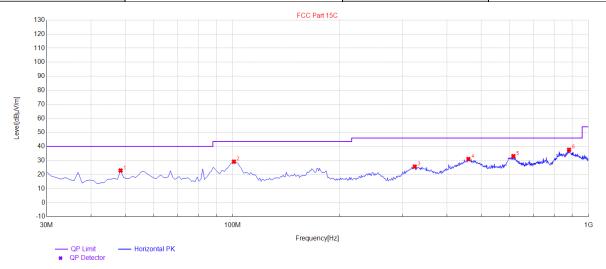


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	48.43	22.87	10.78	40.00	17.13	100	356	Horizontal
2	100.81	29.19	21.07	43.50	14.31	100	1	Horizontal
3	324.88	25.64	21.21	46.00	20.36	100	210	Horizontal
4	459.71	31.05	26.62	46.00	14.95	100	215	Horizontal
5	614.91	33.11	28.16	46.00	12.89	100	300	Horizontal
6	881.66	37.67	33.14	46.00	8.33	100	178	Horizontal

**RESULT: PASS** 





EUT	5G Smart phone	Model Name	AGM G2
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

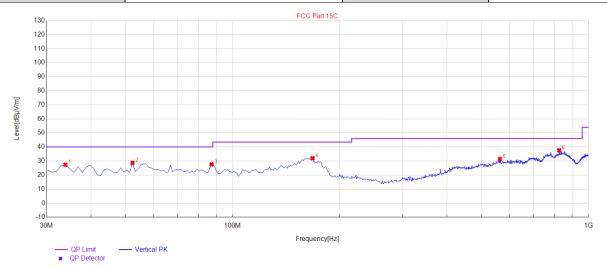

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.88	27.34	10.57	40.00	12.66	100	204	Vertical
2	52.31	28.67	13.69	40.00	11.33	100	262	Vertical
3	87.23	27.59	12.41	40.00	12.41	100	124	Vertical
4	167.74	32.03	19.23	43.50	11.47	100	358	Vertical
5	563.5	31.43	25.46	46.00	14.57	100	209	Vertical
6	827.34	37.65	31.92	46.00	8.35	100	359	Vertical


**RESULT: PASS** 



Report No.: AGC00408221201FE08 Page 45 of 67

Radiated emission from 30MHz to 1000MHz-2Mpbs

		<u> </u>	
EUT	5G Smart phone	Model Name	AGM G2
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

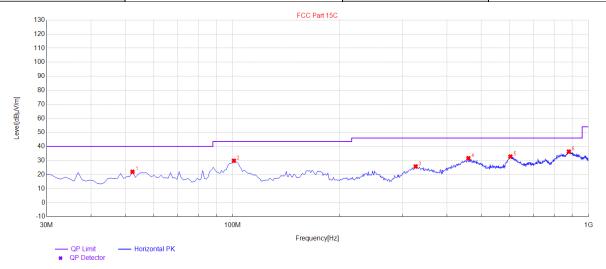


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	52.31	21.99	11.50	40.00	18.01	100	360	Horizontal
2	100.81	29.85	21.07	43.50	13.65	100	113	Horizontal
3	326.82	25.79	21.16	46.00	20.21	100	359	Horizontal
4	459.71	31.66	26.62	46.00	14.34	100	357	Horizontal
5	603.27	32.83	28.60	46.00	13.17	100	359	Horizontal
6	880.69	36.37	33.22	46.00	9.63	100	29	Horizontal

**RESULT: PASS** 



Report No.: AGC00408221201FE08 Page 46 of 67

EUT	5G Smart phone	Model Name	AGM G2
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

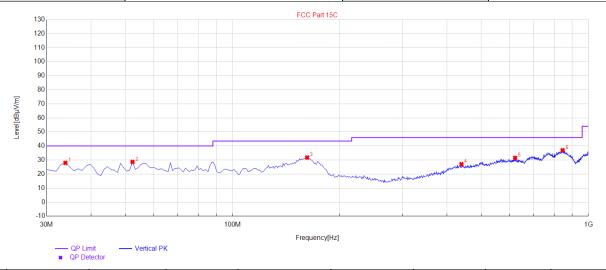

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.88	27.93	10.57	40.00	12.07	100	352	Vertical
2	52.31	28.65	13.69	40.00	11.35	100	161	Vertical
3	161.92	31.77	21.27	43.50	11.73	100	336	Vertical
4	439.34	27.05	21.98	46.00	18.95	100	0	Vertical
5	621.7	31.57	26.50	46.00	14.43	100	140	Vertical
6	845.77	36.99	32.36	46.00	9.01	100	178	Vertical

# RESULT: PASS Note:

- 1. Factor=Antenna Factor + Cable loss, Margin= Limit-Measurement.
- 2. All test modes had been tested. The mode 3 is the worst case and recorded in the report.



Page 47 of 67

# Radiated emission above 1GHz-1Mbps

EUT	5G Smart phone	Model Name	AGM G2
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.011	50.63	0.08	50.71	74.00	-23.29	peak
4804.011	42.48	0.08	42.56	54.00	-11.44	AVG
7206.022	48.21	2.21	50.42	74.00	-23.58	peak
7206.022	40.11	2.21	42.32	54.00	-11.68	AVG
Remark:						
Factor = Anter	na Factor + Cabl	e Loss – Pre-a	amplifier.			

Factor = Antenna Factor + Cable Loss – Pre-amplifier.
---

EUT	5G Smart phone	Model Name	AGM G2
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.011	49.85	0.08	49.93	74.00	-24.07	peak
4804.011	41.74	0.08	41.82	54.00	-12.18	AVG
7206.022	47.52	2.21	49.73	74.00	-24.27	peak
7206.022	40.41	2.21	42.62	54.00	-11.38	AVG
Remark:	!					1
Factor = Anter	na Factor + Cabl	e Loss – Pre-a	mplifier.			



Report No.: AGC00408221201FE08 Page 48 of 67

EUT	5G Smart phone	Model Name	AGM G2
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4880.005	48.95	0.14	49.09	74.00	-24.91	peak
4880.005	42.31	0.14	42.45	54.00	-11.55	AVG
7320.140	46.28	2.36	48.64	74.00	-25.36	peak
7320.140	40.62	2.36	42.98	54.00	-11.02	AVG
Remark:						
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.	·		

EUT	5G Smart phone	Model Name	AGM G2
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4880.050	50.12	0.14	50.26	74.00	-23.74	peak
4880.050	43.71	0.14	43.85	54.00	-10.15	AVG
7320.080	48.25	2.36	50.61	74.00	-23.39	peak
7320.080	40.35	2.36	42.71	54.00	-11.29	AVG
Remark: Factor = Anter	nna Factor + Cabl	e Loss – Pre-al	mplifier.		<u> </u>	



Page 49 of 67

EUT	5G Smart phone	Model Name	AGM G2
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4960.012	50.87	0.22	51.09	74.00	-22.91	peak
4960.012	40.16	0.22	40.38	54.00	-13.62	AVG
7440.027	48.59	2.64	51.23	74.00	-22.77	peak
7440.027	39.13	2.64	41.77	54.00	-12.23	AVG
Remark:						
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			

EUT	5G Smart phone	Model Name	AGM G2
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4960.013	49.52	0.22	49.74	74	-24.26	peak
4960.013	40.18	0.22	40.40	54	-13.60	AVG
7440.027	46.37	2.64	49.01	74	-24.99	peak
7440.027	38.46	2.64	41.10	54	-12.90	AVG
Remark:						
Factor = Anten	na Factor + Cabl	e Loss – Pre-a	mplifier.			



Report No.: AGC00408221201FE08 Page 50 of 67

## Radiated emission above 1GHz-2Mbps

EUT	5G Smart phone	Model Name	AGM G2
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4804.011	51.36	0.08	51.44	74.00	-22.56	peak
4804.011	43.15	0.08	43.23	54.00	-10.77	AVG
7206.022	49.85	2.21	52.06	74.00	-21.94	peak
7206.022	39.25	2.21	41.46	54.00	-12.54	AVG
Remark:						
actor = Anter	na Factor + Cabl	e Loss – Pre-a	amplifier.			

EUT	5G Smart phone	Model Name	AGM G2
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.011	50.15	0.08	50.23	74.00	-23.77	peak
4804.011	42.33	0.08	42.41	54.00	-11.59	AVG
7206.022	46.34	2.21	48.55	74.00	-25.45	peak
7206.022	41.12	2.21	43.33	54.00	-10.67	AVG
Remark:			•		!	•
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			



**EUT** 

Report No.: AGC00408221201FE08 Page 51 of 67

EUT	5G Smart phone	Model Name	AGM G2
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.005	47.25	0.14	47.39	74.00	-26.61	peak
4880.005	43.31	0.14	43.45	54.00	-10.55	AVG
7320.140	45.28	2.36	47.64	74.00	-26.36	peak
7320.140	41.33	2.36	43.69	54.00	-10.31	AVG
emark:						

•	5G Smart phone	Model Name	AGM G2
perature	25° C	Relative Humidity	55.4%

Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.050	50.12	0.14	50.26	74.00	-23.74	peak
4880.050	40.15	0.14	40.29	54.00	-13.71	AVG
7320.080	49.34	2.36	51.70	74.00	-22.30	peak
7320.080	39.51	2.36	41.87	54.00	-12.13	AVG
Remark:						
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.					



Page 52 of 67

EUT	5G Smart phone	Model Name	AGM G2
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.012	48.87	0.22	49.09	74.00	-24.91	peak
4960.012	40.25	0.22	40.47	54.00	-13.53	AVG
7440.027	47.21	2.64	49.85	74.00	-24.15	peak
7440.027	39.52	2.64	42.16	54.00	-11.84	AVG
Remark:						
actor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.			

EUT	5G Smart phone	Model Name	AGM G2
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4960.013	51.96	0.22	52.18	74	-21.82	peak	
4960.013	39.77	0.22	39.99	54	-14.01	AVG	
7440.027	48.47	2.64	51.11	74	-22.89	peak	
7440.027	39.41	2.64	42.05	54	-11.95	AVG	
Remark:							
Factor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.				


# **RESULT: PASS**

#### Note

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.


The "Factor" value can be calculated automatically by software of measurement system.







Test result for band edge emission at restricted bands

EUT	5G Smart phone	Model Name	AGM G2
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal




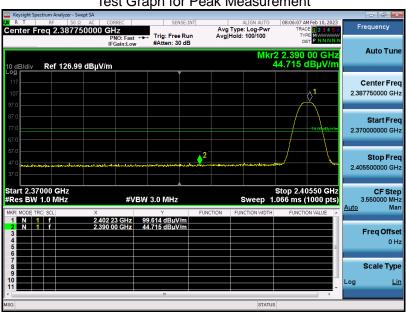



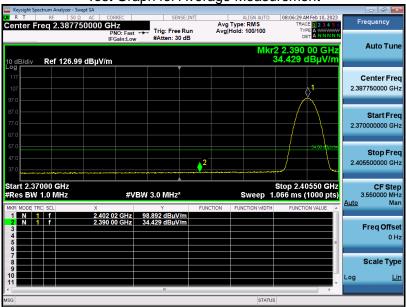


**RESULT: PASS** 







EUT	5G Smart phone	Model Name	AGM G2
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Test Graph for Peak Measurement

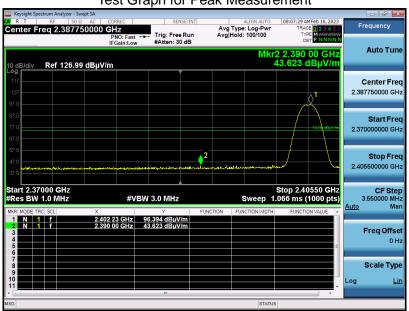

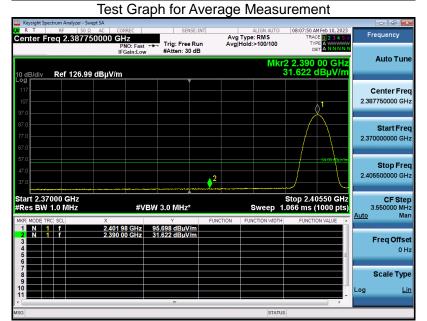


**RESULT: PASS** 






**EUT Model Name** AGM G2 5G Smart phone 25° C **Temperature Relative Humidity** 55.4% 960hPa **Test Voltage** Normal Voltage **Pressure Test Mode** Mode 3 **Antenna** Horizontal


Test Graph for Peak Measurement

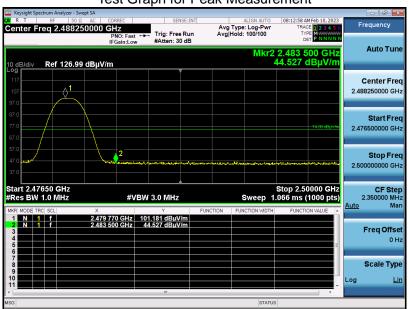



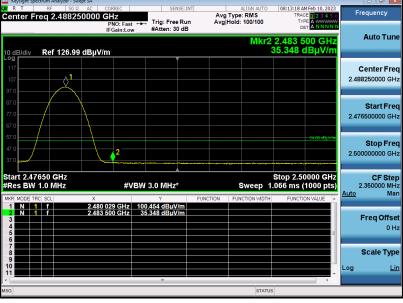


**RESULT: PASS** 






**EUT Model Name** AGM G2 5G Smart phone 25° C **Temperature Relative Humidity** 55.4% 960hPa **Test Voltage** Normal Voltage **Pressure Test Mode** Mode 3 **Antenna** Vertical


Test Graph for Peak Measurement

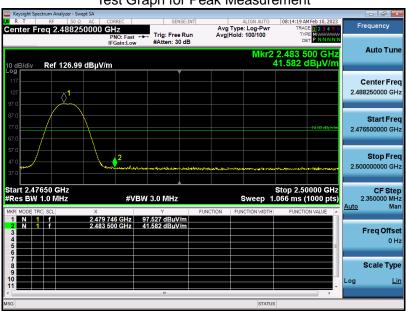





**RESULT: PASS** 







Test result for band edge emission at restricted bands-2Mbps

EUT	5G Smart phone	Model Name	AGM G2
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Horizontal


Test Graph for Peak Measurement

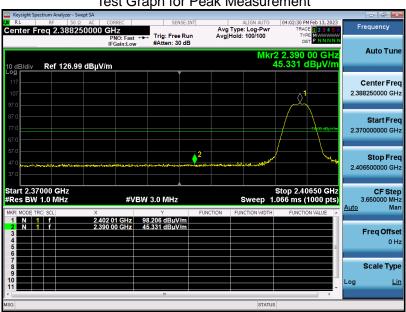



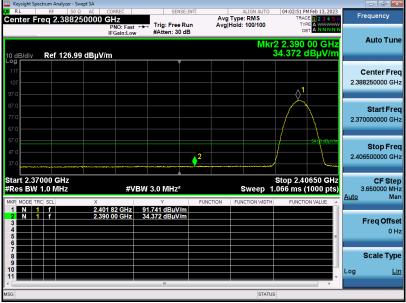


**RESULT: PASS** 







EUT	5G Smart phone	Model Name	AGM G2
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Vertical

Test Graph for Peak Measurement

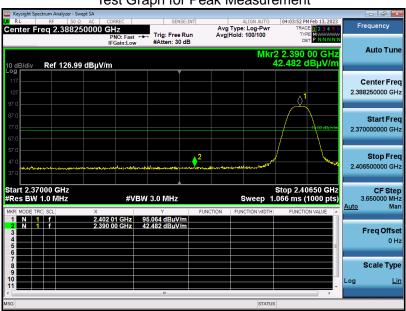

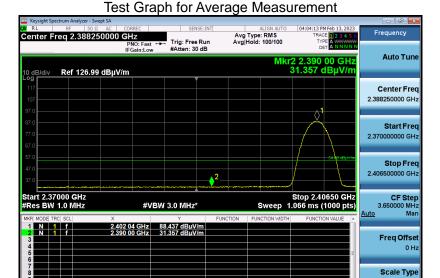


**RESULT: PASS** 






EUT	5G Smart phone	Model Name	AGM G2
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Horizontal


Test Graph for Peak Measurement

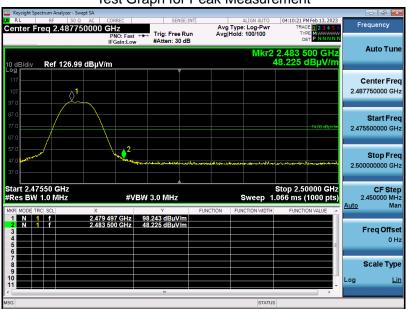



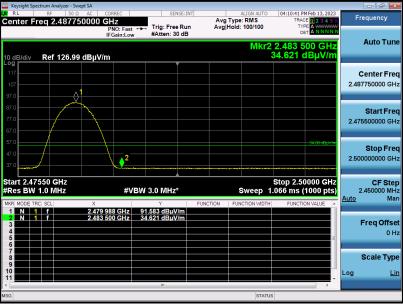


**RESULT: PASS** 






**EUT** AGM G2 5G Smart phone **Model Name** 25° C **Temperature Relative Humidity** 55.4% 960hPa Normal Voltage **Pressure Test Voltage Test Mode** Mode 6 **Antenna** Vertical

Test Graph for Peak Measurement

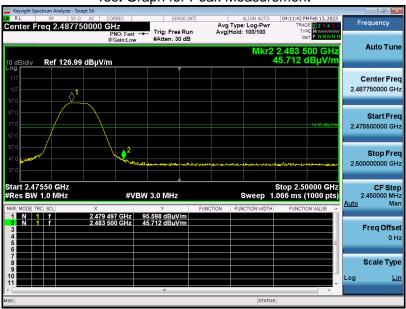



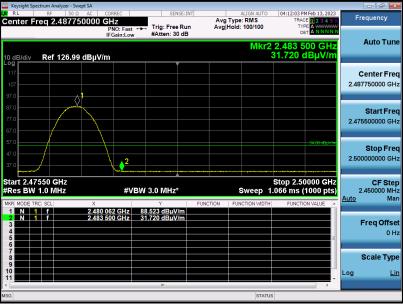

## **RESULT: PASS**

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



Page 61 of 67

## 12. LINE CONDUCTED EMISSION TEST

## 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage		
	Q.P.( dBuV)	Average( dBuV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

## Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

## 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

