



ANTENNA PASSIVE TEST REPORT

Applicant: Grandsun
Product Name: 233621 ZEN II
Model No.(EUT): 233621 ZEN II
Date of Receipt: 2021-08-28
Date of Test: 2021-08-28

Tested by: Max.Chen
Made by: Max.Chen
Checked by: Noki.Ho



REVISION HISTORY

Revision Record		
Version	Date	Reason for change
V0.1	2017-05-20	First edition



CONTENTS

1. GENERAL INFORMATION.....	4
1.1 Test Location.....	4
1.2 Test item and results.....	4
1.3 Laboratory Environment.....	4
1.4 Test Equipments List.....	4
1.5 Measurement Uncertainty.....	4
2. OTA MEASUREMENTS SYSTEM CONFIGURATION.....	5
3. TEST RESULTS.....	6
3.1 Efficiency & Gain.....	6
3.2 2-D antenna pattern.....	6
3.3 3-D antenna pattern.....	7
3.4 Passive pattern.....	8
4. APPENDIX A THE EUT AND TEST CONFIGURATION.....	10
5. Conclusion.....	10



1. GENERAL INFORMATION

1.1 Test Location

Company: Shenzhen Grandsun Electronics Co.,Ltd.
Address: Gaoqiao Industry Zone,Pingdi Town,Longgang District,Shenzhen,China
Post code: 518117
Telephone: +86-755-89234568

1.2 Test item and results

Test detailed items/section as below:

NO	Items
1	Gain
2	Efficiency
3	2-D/β-D pattern

1.3 Laboratory Environment

Temperature	Min.=18℃	Max.=24℃
Relative humidity	Min.=30%	Max.=70℃
Shield effect	0.5-10GHZ	> 100dB
Ground resistance	<0.4 Ω	

1.4 Test Equipments List

Equipment Name	Model NO.	Manufacture	Calibration	Valid Period
Network Analyzer	E5071C	Keysight	2021-04-20	One year
Chamber	AMS-8923-195	EST-LINDGERN	2021-04-20	One year


1.5 Measurement Uncertainty

Item	2.4GHZ-2.5GHZ(dB)
Gain	0.3
Efficiency	0.3



2. OTA MEASUREMENTS SYSTEM CONFIGURATION

The system is designed for fully-compliant radiated wireless antenna measurements over the frequency range from 700 MHz to 6 GHz with a 1.95-meter path length. The system includes a multi-antenna array with twenty-three (23) dual-polarized measurement antennas spaced every 15°, The chamber size is 5m*5m*5m

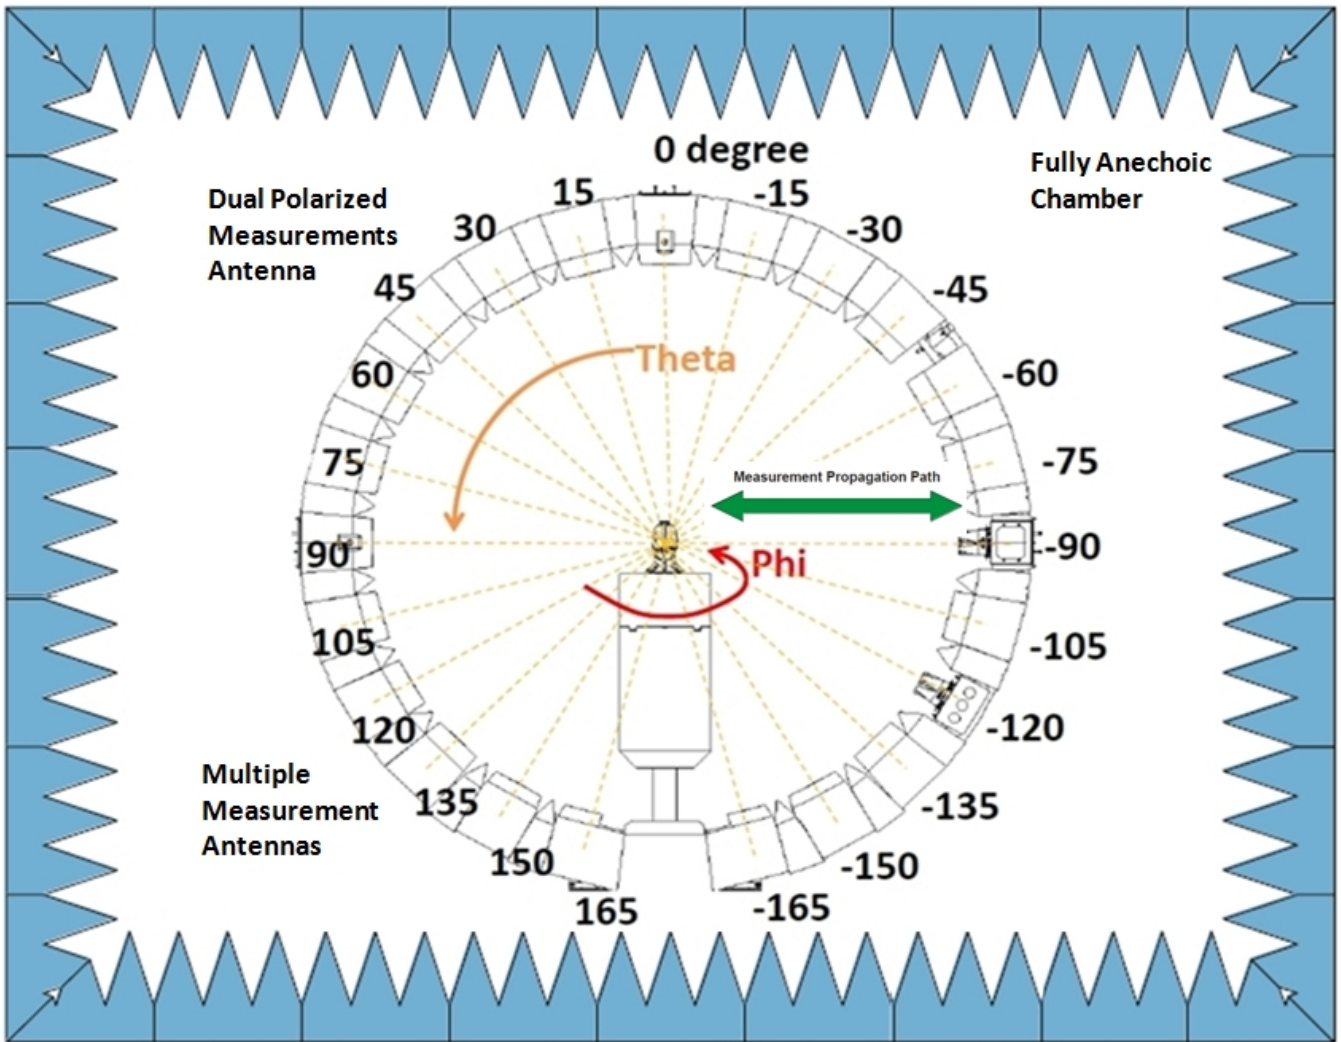

OTA measurement System Configuration

Note: Phi(The turntable) is from 0~180°, Theta(the ring, multiple antennas) is from -165° ~165°, Rotate the AUT and multi-antenna array record the data, the step of rotation is 15 degree.




3. TEST RESULTS

3.1 Efficiency & Gain


Frequency (Mhz)	Efficiency (dB)	Efficiency (%)	Gain (dBi)
2400	-4.67	34.1	-1.44
2410	-4.41	36.1	-1.37
2420	-4.31	37.0	-1.04
2430	-4.15	38.4	-0.91
2440	-4.05	39.3	-0.73
2450	-3.90	40.7	-0.63
2460	-4.20	37.9	-0.82
2470	-4.23	37.6	-0.98
2480	-4.39	36.3	-1.04
2490	-4.54	35.1	-1.03
2500	-4.77	33.3	-1.20


3.2 2-D antenna pattern (Phi=90°)

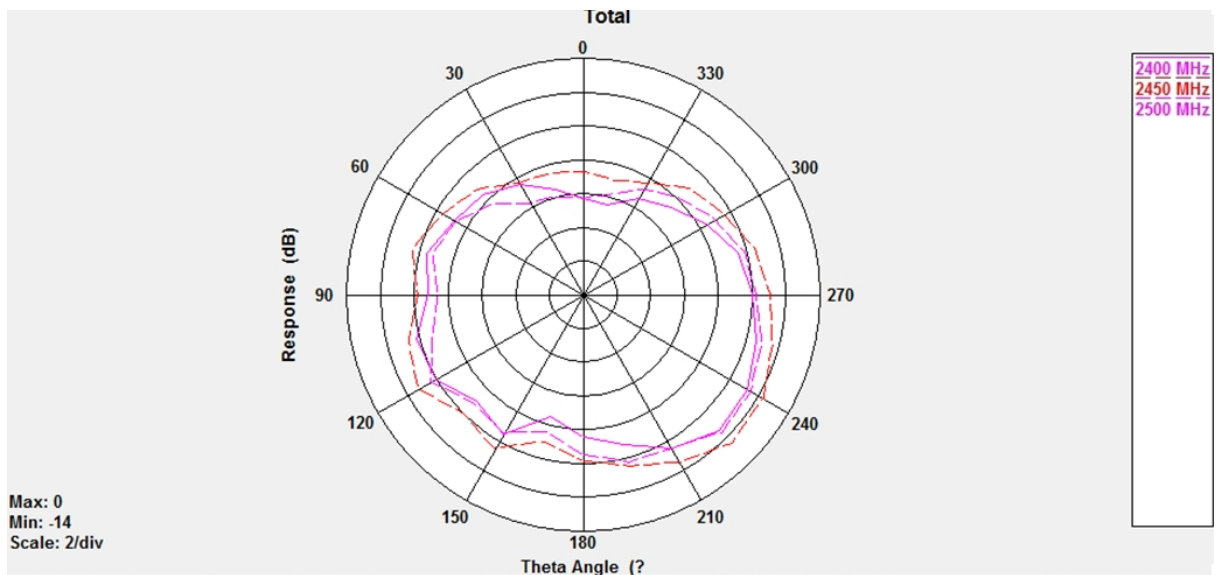




3.3 3-D antenna pattern

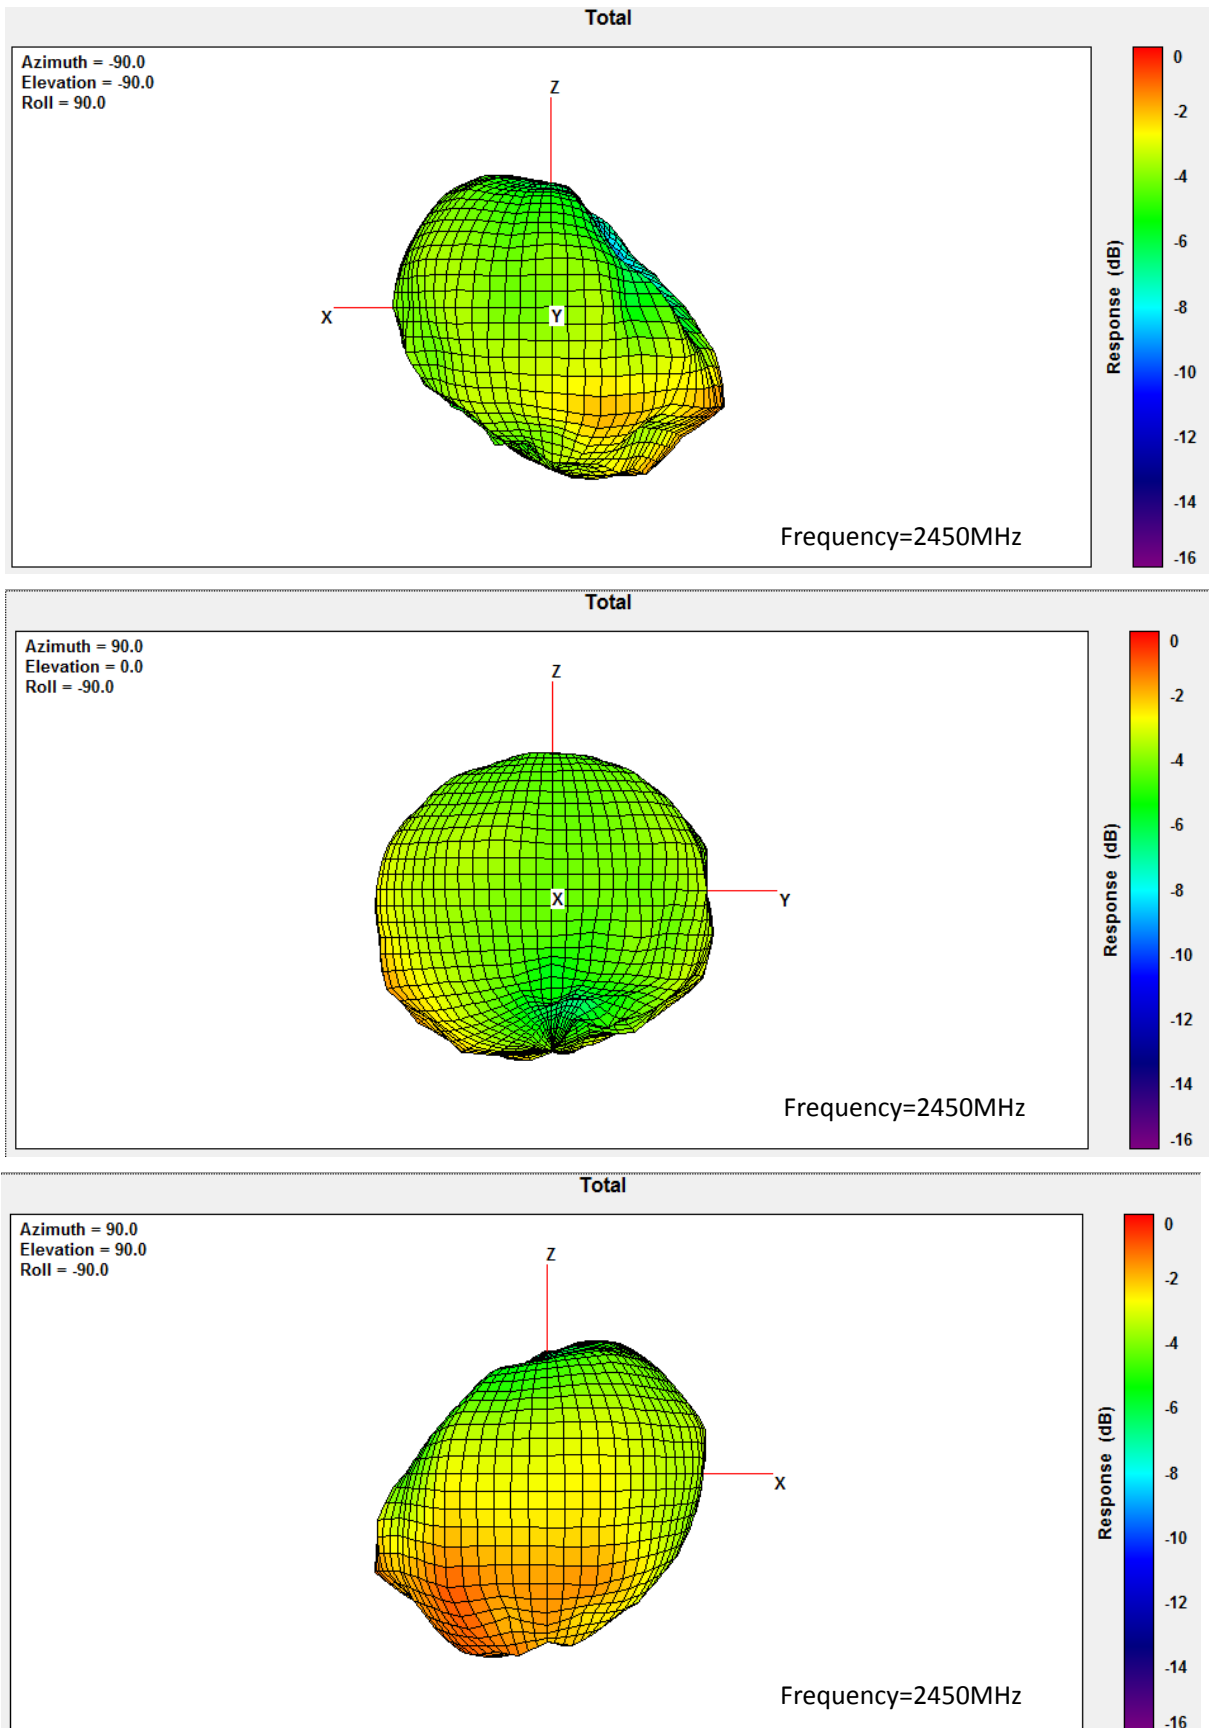

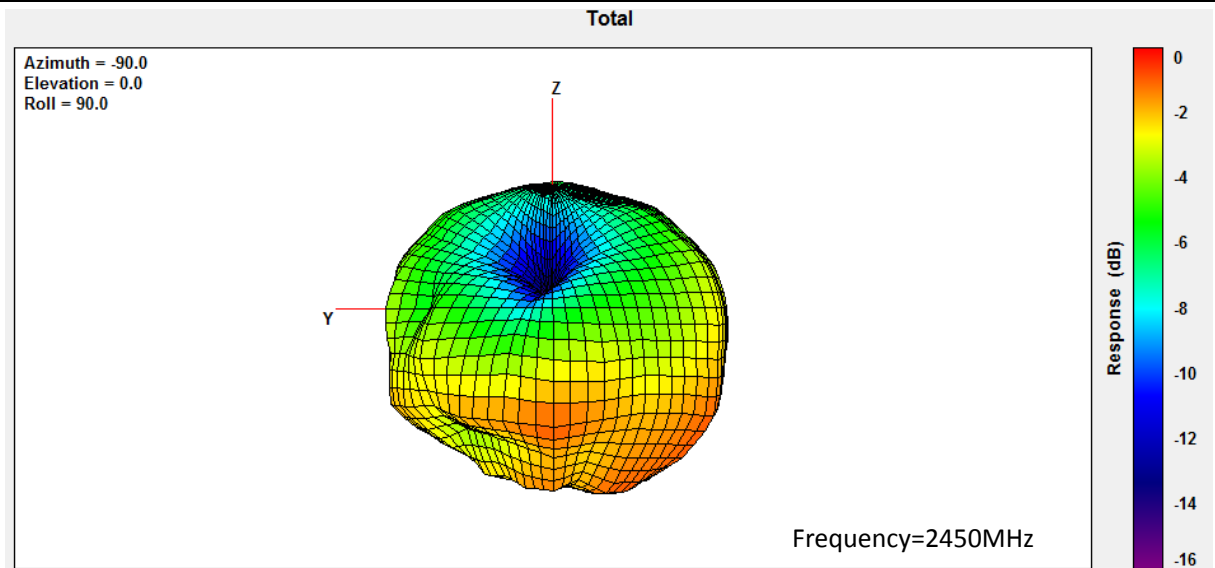


3.4 Passive pattern

3.4.1 VSWR

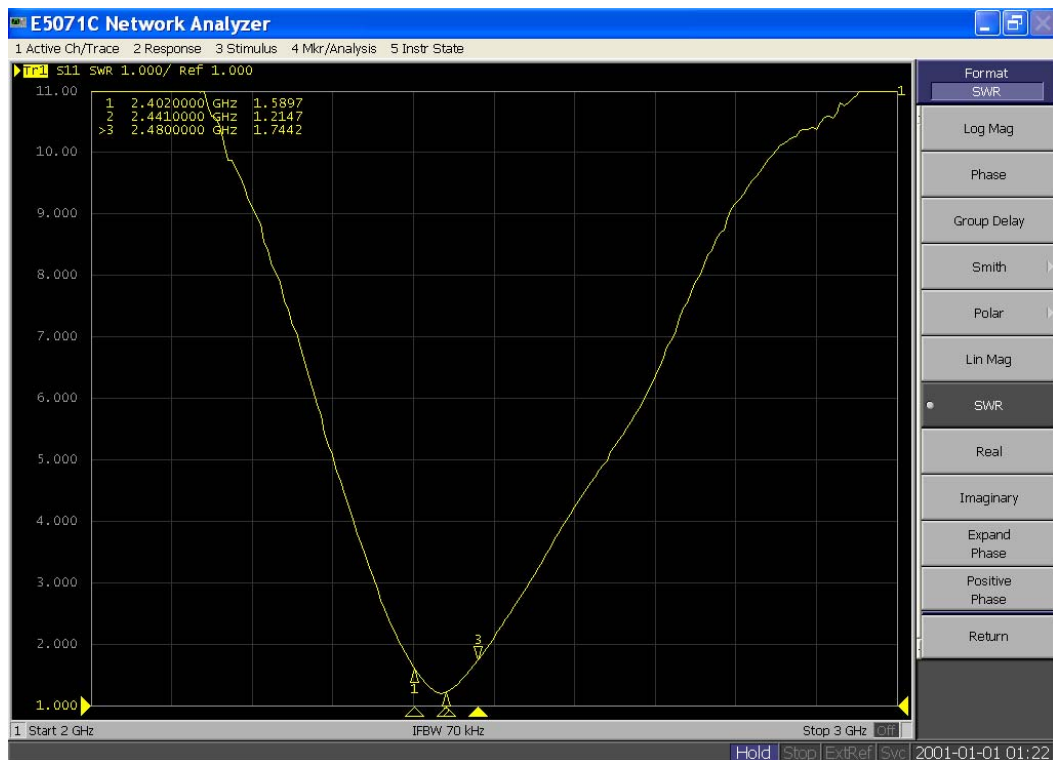




3.4.2 Return loss

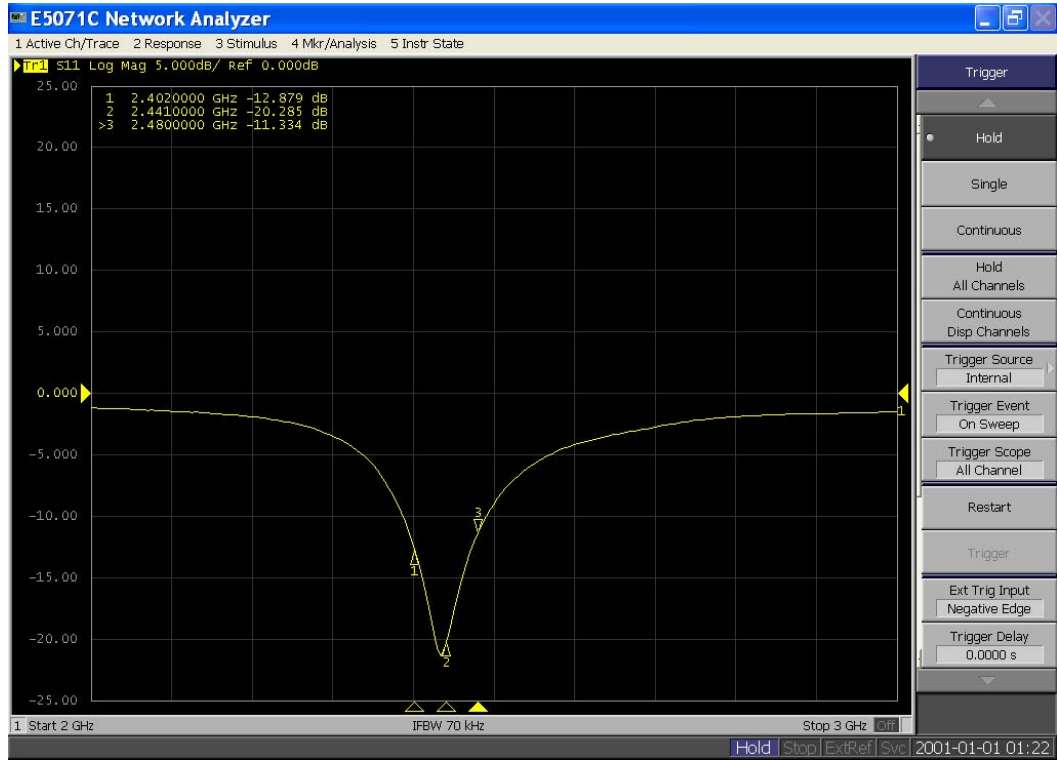



4.APPENDIX A THE EUT AND TEST CONFIGURATION

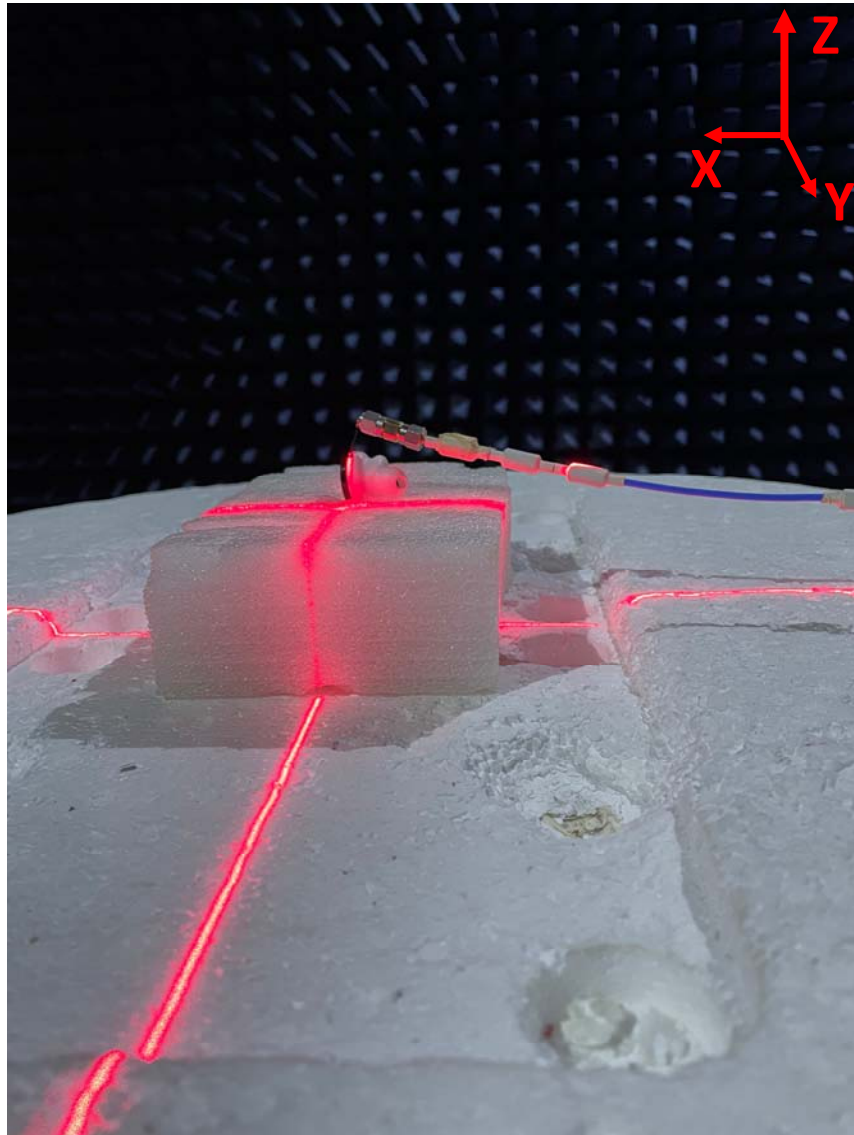

5. Conclusion

1. Earbuds_R and Earbuds_L are the same design, So their performance is the same.

