



Page 146 of 190

Test Laboratory: AGC Lab Date: Apr. 26, 2023

LTE Band 7 Mid-Body-Back (1RB#0)

DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=2.29 Frequency: 2535MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.95 \text{ mho/m}$; $\epsilon r = 40.17$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.1, Liquid temperature ($^{\circ}$): 20.9

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ LTE BAND 7 Mid-Body-Back /Area Scan: Measurement grid: dx=10mm, y=10mm Configuration/ LTE BAND 7 Mid-Body-Back /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE BAND 7
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

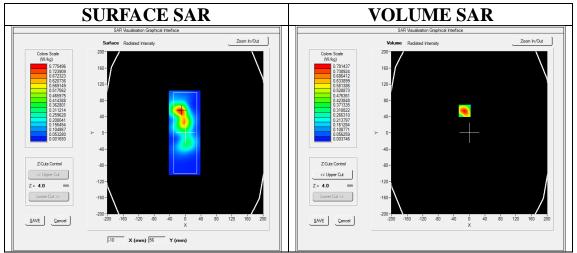



Maximum location: X=-12.00, Y=54.00 SAR Peak: 1.31 W/kg

	0
SAR 10g (W/Kg)	0.371311
SAR 1g (W/Kg)	0.739948





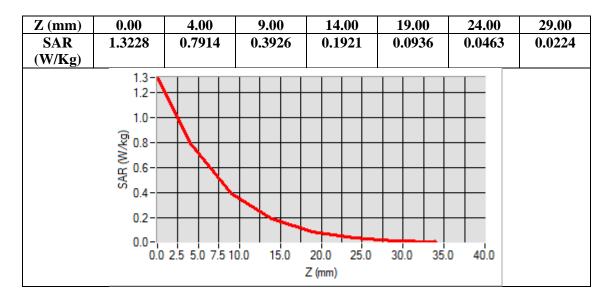

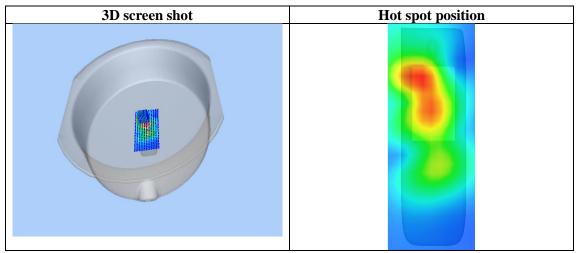



Page 148 of 190

Test Laboratory: AGC Lab Date: May 03, 2023

LTE Band 12 Mid-Touch-Left (1 RB#0)

DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=2.10 Frequency: 707.5 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.88$ mho/m; $\epsilon = 44.13$; $\rho = 1000$ kg/m³;

Phantom section: Left Section

Ambient temperature ($^{\circ}$): 21.5, Liquid temperature ($^{\circ}$): 21.2

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 12 Mid- Touch-Left /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 12 Mid- Touch-Left /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 12
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

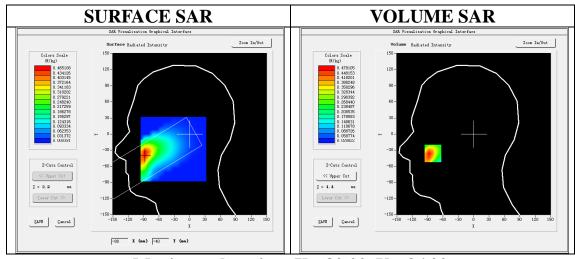


Maximum location: X=-80.00, Y=-36.00


SAR Peak: 0.62 W/kg

SAR 10g (W/Kg)	0.308012
SAR 1g (W/Kg)	0.462137





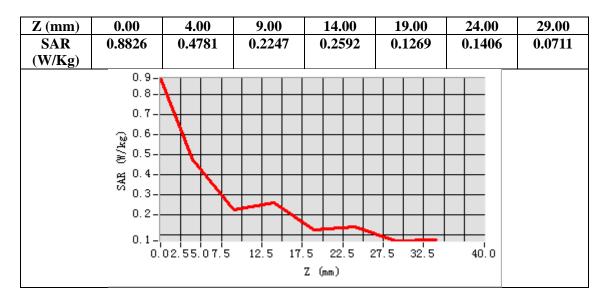

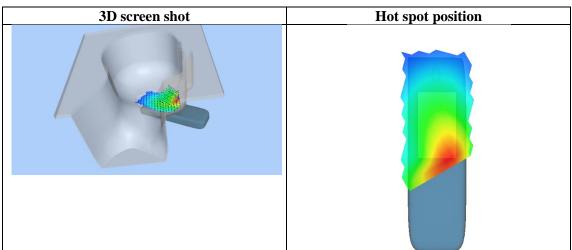



Page 150 of 190

Test Laboratory: AGC Lab Date: May 03, 2023

LTE Band 12 Mid-Body-Back (1 RB#0)

DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=2.10; Frequency: 707.5 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.88$ mho/m; $\epsilon = 44.13$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.5, Liquid temperature ($^{\circ}$): 21.2

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 12 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 12 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 12
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

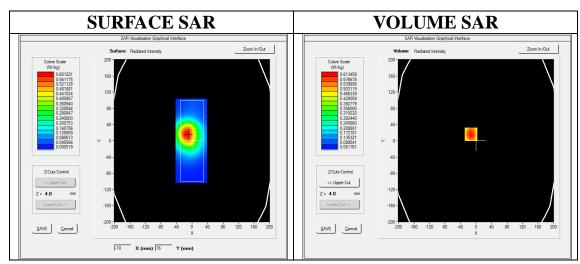



Maximum location: X=-13.00, Y=16.00 SAR Peak: 0.79 W/kg

SAR 10g (W/Kg)	0.434127
SAR 1g (W/Kg)	0.625582





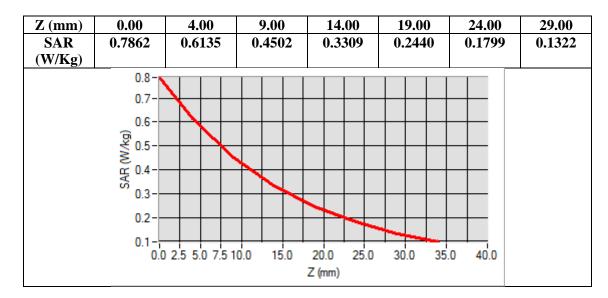

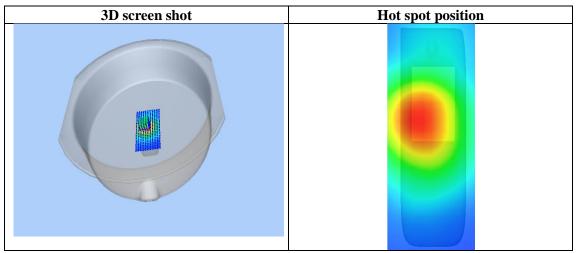



Page 152 of 190

Test Laboratory: AGC Lab Date: May 03, 2023

LTE Band 13 Mid-Touch- Right (1 RB#0)

DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: LTE; Communication System Band: LTE Band 13; Duty Cycle:1:1; Conv.F=2.10 Frequency: 782 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.95$ mho/m; $\epsilon = 41.37$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

Ambient temperature ($^{\circ}$): 21.5, Liquid temperature ($^{\circ}$): 21.2

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 13 Mid- Touch- Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 13 Mid- Touch- Right /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 13
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

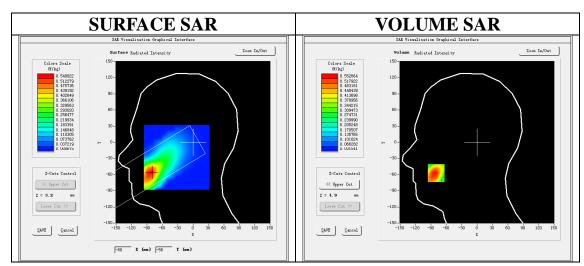


Maximum location: X=-80.00, Y=-57.00


SAR Peak: 0.79 W/kg

SAR 10g (W/Kg)	0.353143
SAR 1g (W/Kg)	0.544708





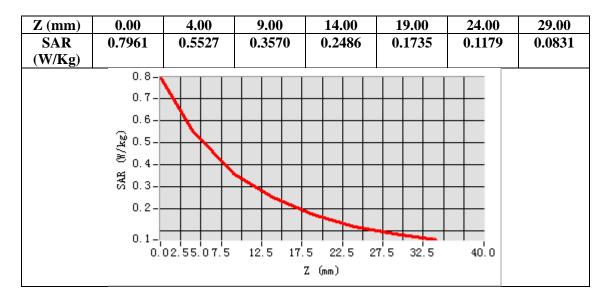

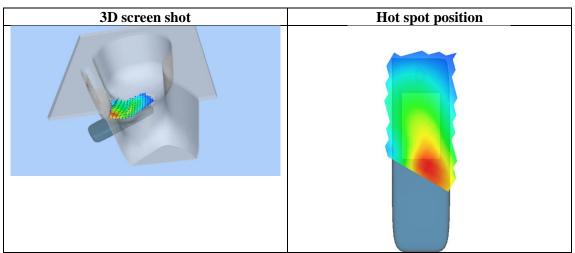



Page 154 of 190

Test Laboratory: AGC Lab Date: May 03, 2023

LTE Band 13 Mid-Body-Back (1 RB#0)

DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: LTE; Communication System Band: LTE Band 13; Duty Cycle:1:1; Conv.F=2.10; Frequency: 782 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.95$ mho/m; $\epsilon = 41.37$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.5, Liquid temperature ($^{\circ}$): 21.2

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 13 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 13 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 13
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

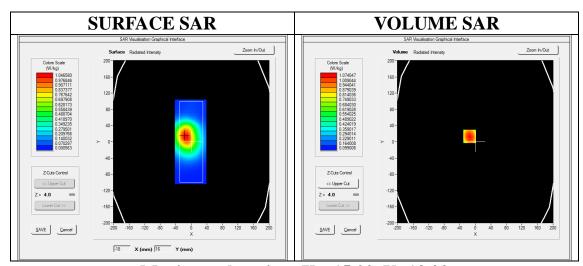



Maximum location: X=-15.00, Y=13.00 SAR Peak: 1.40 W/kg

SAR 10g (W/Kg) 0.714782 SAR 1g (W/Kg) 1.036118





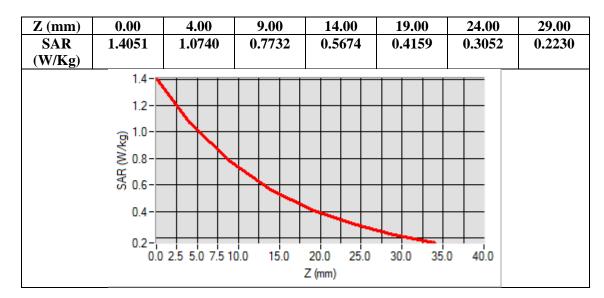

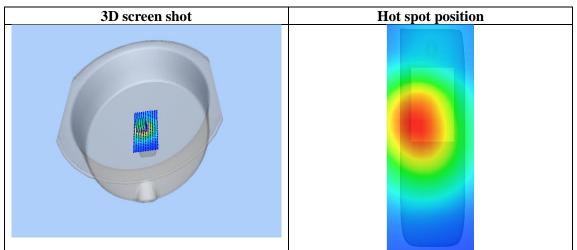



Page 156 of 190

Test Laboratory: AGC Lab Date: May 03, 2023

LTE Band 17 Mid-Touch- Right (1 RB#0)

DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: LTE; Communication System Band: LTE Band 17; Duty Cycle:1:1; Conv.F=2.10 Frequency: 710 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.90$ mho/m; $\epsilon = 43.27$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

Ambient temperature ($^{\circ}$): 21.5, Liquid temperature ($^{\circ}$): 21.2

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 17 Mid- Touch- Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 17 Mid- Touch- Right /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Seen	dy Omm dy Omm h E 00 mm
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 17
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

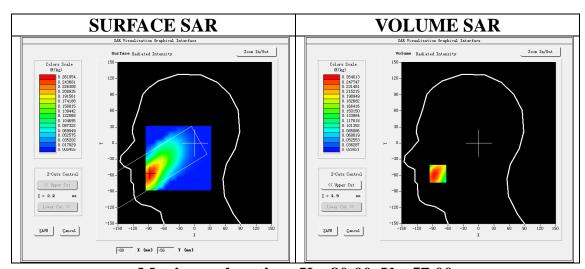


Maximum location: X=-80.00, Y=-57.00


SAR Peak: 0.34 W/kg

SAR 10g (W/Kg)	0.179652
SAR 1g (W/Kg)	0.261101





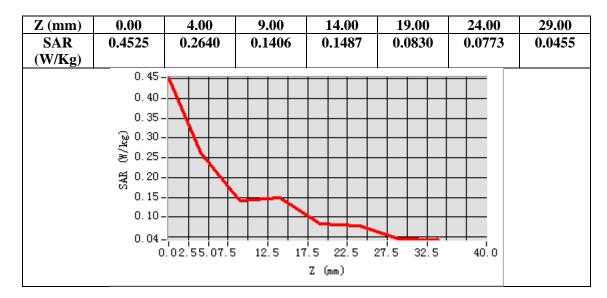

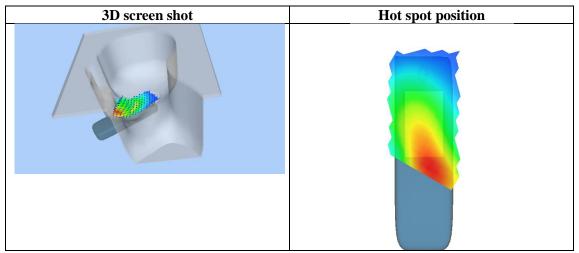



Page 158 of 190

Test Laboratory: AGC Lab Date: May 03, 2023

LTE Band 17 Mid-Body-Back (1 RB#0)

DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: LTE; Communication System Band: LTE Band 17; Duty Cycle:1:1; Conv.F=2.10; Frequency: 710 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.90$ mho/m; $\epsilon = 43.27$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 21.5, Liquid temperature ($^{\circ}$ C): 21.2

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 17 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 17 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 17
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

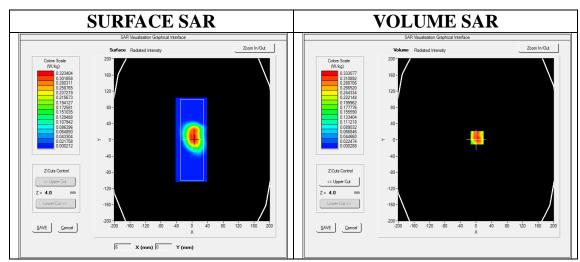



Maximum location: X=3.00, Y=5.00 SAR Peak: 0.50 W/kg

SAR 10g (W/Kg)	0.172675
SAR 1g (W/Kg)	0.327900





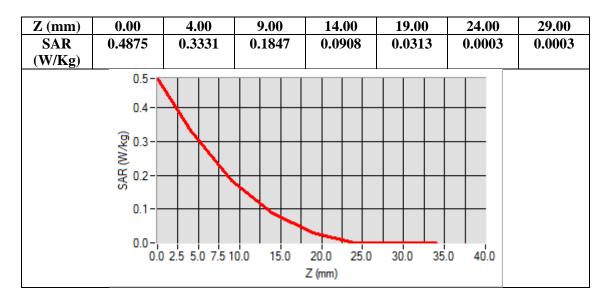

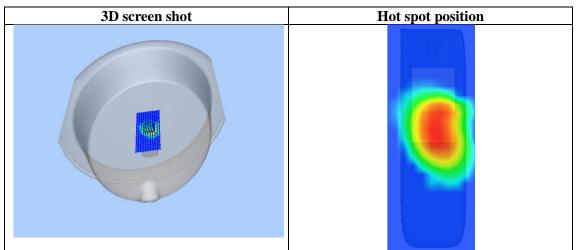



Page 160 of 190

Test Laboratory: AGC Lab Date: Apr. 30, 2023

LTE Band 26 Mid-Touch-Left (1 RB#0)

DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: LTE; Communication System Band: LTE Band 26; Duty Cycle:1:1; Conv.F=2.13 Frequency: 831.5 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.86$ mho/m; $\epsilon = 41.33$; $\rho = 1000$ kg/m³;

Phantom section: Left Section

Ambient temperature ($^{\circ}$ C): 20.4, Liquid temperature ($^{\circ}$ C): 20.1

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4 02 35


Configuration/ LTE Band 26 Mid- Touch-Left /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 26 Mid- Touch-Left /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 26
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

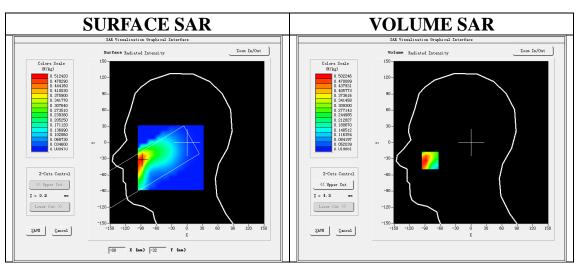



Maximum location: X=-80.00, Y=-33.00 SAR Peak: 0.68 W/kg

	0
SAR 10g (W/Kg)	0.309720
SAR 1g (W/Kg)	0.479680





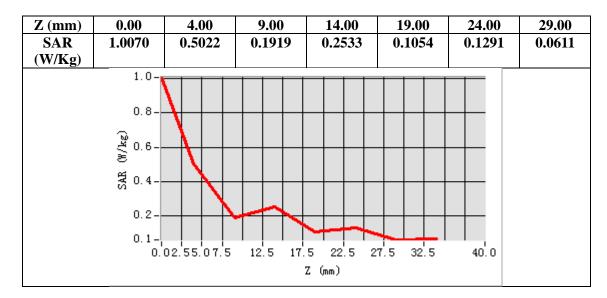

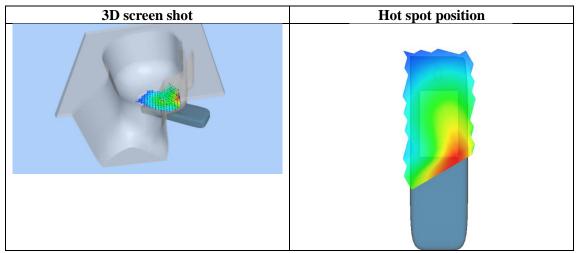



Page 162 of 190

Test Laboratory: AGC Lab Date: Apr. 30, 2023

LTE Band 26 High-Body-Back (1 RB#0)

DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: LTE; Communication System Band: LTE Band 26; Duty Cycle:1:1; Conv.F=2.13 Frequency:841.5 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.91$ mho/m; $\epsilon = 38.91$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 20.4, Liquid temperature ($^{\circ}$): 20.1

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 26 High -Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 26 High -Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 26
Channels	High
Signal	OFDM (Crest factor: 1.0)

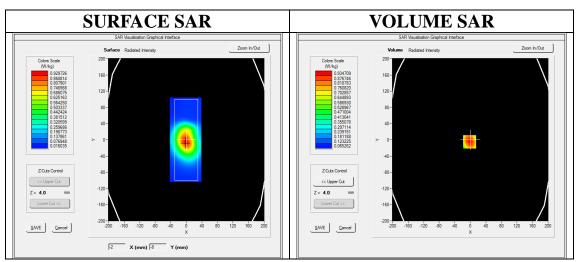


Maximum location: X=-2.00, Y=-5.00 SAR Peak: 1.23 W/kg


SAR 10g (W/Kg)	0.605308
SAR 1g (W/Kg)	0.896660


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





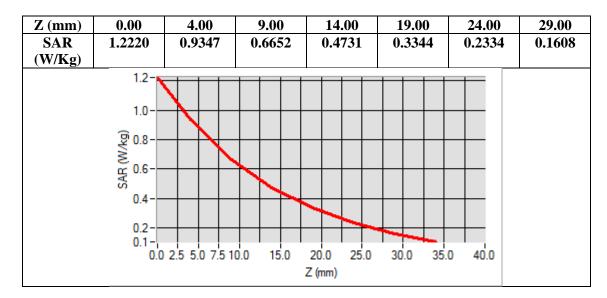

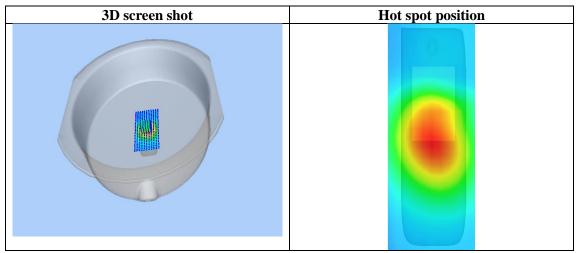



Page 164 of 190

Test Laboratory: AGC Lab Date: Apr. 29, 2023

LTE Band 66 High-Touch-Right (1 RB#0)
DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=2.32; Frequency:1770 MHz; Medium parameters used: f = 1750 MHz; $\sigma = 1.47$ mho/m; $\epsilon r = 38.69$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

Ambient temperature ($^{\circ}$): 20.8, Liquid temperature ($^{\circ}$): 20.5

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 66 High-Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 66 High-Touch-Right /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 66
Channels	High
Signal	OFDM (Crest factor: 1.0)

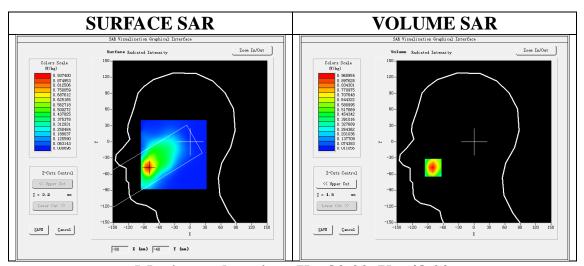



Maximum location: X=-80.00, Y=-48.00 SAR Peak: 1.54 W/kg

SAR 10g (W/Kg)	0.492822
SAR 1g (W/Kg)	0.928271





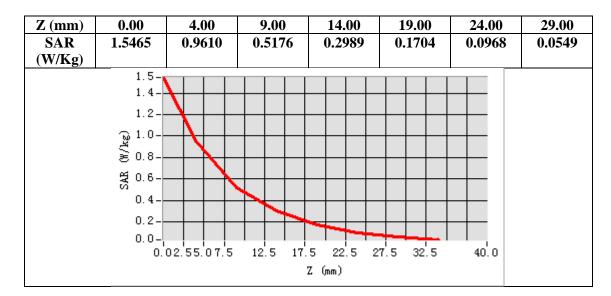

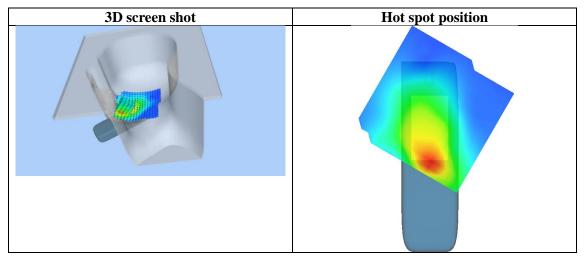



Page 166 of 190

Test Laboratory: AGC Lab Date: Apr. 29, 2023

LTE Band 66 High-Body-Back (1 RB#0)

DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=2.32; Frequency:1770 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.47$ mho/m; $\epsilon r = 38.69$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 20.8, Liquid temperature ($^{\circ}$): 20.5

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 66 High -Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 66 High -Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 66
Channels	High
Signal	OFDM (Crest factor: 1.0)

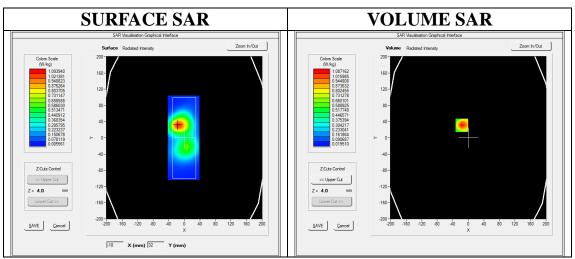


Maximum location: X=-17.00, Y=31.00


SAR Peak: 1.68 W/kg

SAR 10g (W/Kg)	0.572129
SAR 1g (W/Kg)	1.035798





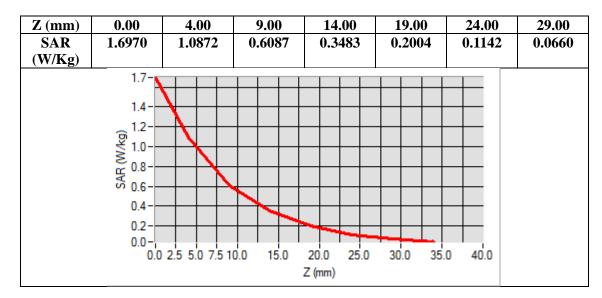

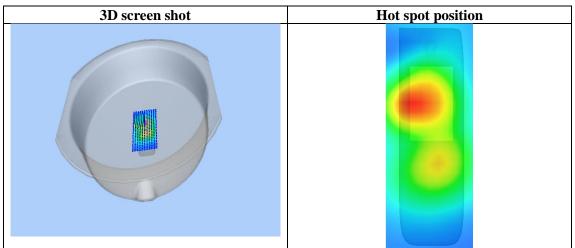



Page 168 of 190

Repeated SAR

Test Laboratory: AGC Lab Date: Apr. 30, 2023

GSM 850 High- Body- Back (MS)<SIM 1> DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3; Conv.F=2.13; Frequency: 848.8 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.90$ mho/m; $\epsilon r = 39.26$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 20.4, Liquid temperature (°C): 20.1

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4 02 35

Configuration/GSM 850 High -Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/GSM 850 High -Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	ELLI
Device Position	Body Back
Band	GSM 850
Channels	High
Signal	TDMA (Crest factor: 8.0)

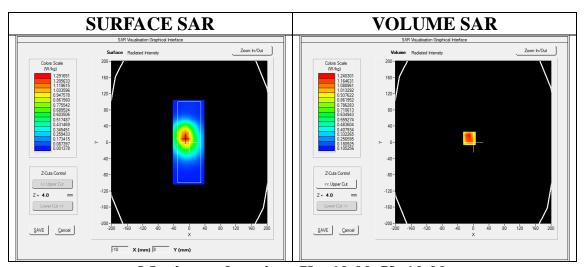


Maximum location: X=-10.00, Y=10.00

SAR Peak: 1.79 W/kg


SAR 10g (W/Kg)	0.790512
SAR 1g (W/Kg)	1.191174


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





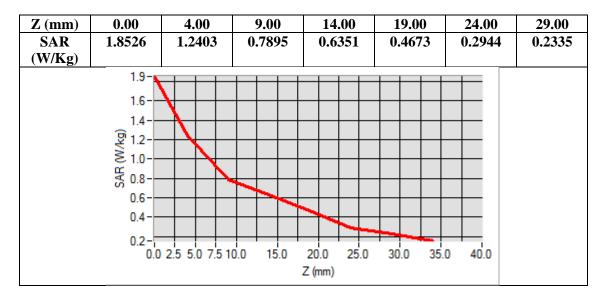

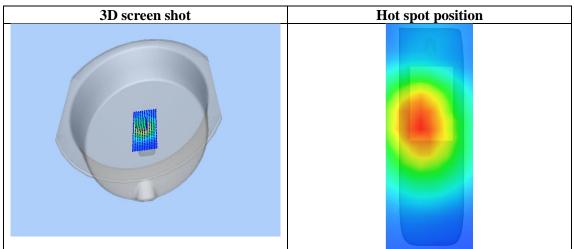



Page 170 of 190

Test Laboratory: AGC Lab Date: Apr. 28, 2023

PCS 1900 Low-Touch- Left <SIM 1>

DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=2.32; Frequency: 1850.2 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.29 \text{ mho/m}$; $\epsilon = 43.92$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Left Section

Ambient temperature (°C): 20.9, Liquid temperature (°C): 20.6

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/PCS1900 Low-Touch-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm **Configuration/PCS1900 Low-Touch-Left/Zoom Scan:** Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	PCS 1900
Channels	Low
Signal	TDMA (Crest factor: 8.0)

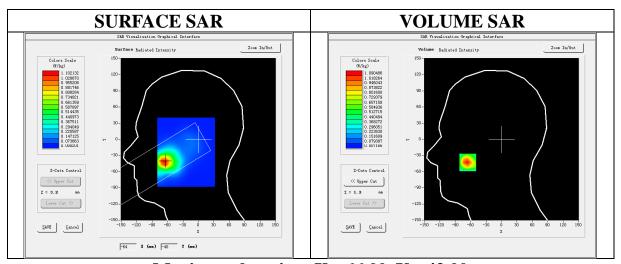



Maximum location: X=-66.00, Y=-43.00 SAR Peak: 1.76 W/kg

SAR 10g (W/Kg)	0.523983
SAR 1g (W/Kg)	1.042136





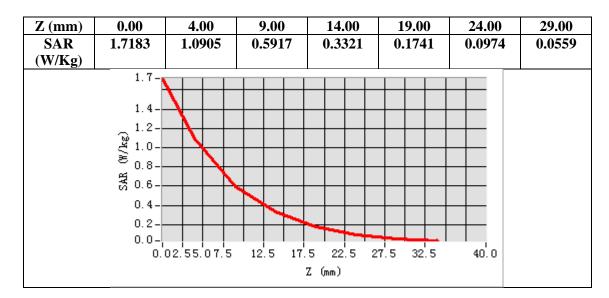

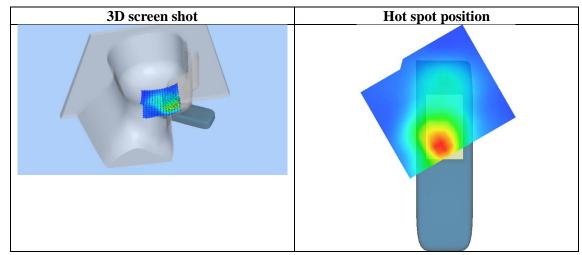



Page 172 of 190

Test Laboratory: AGC Lab Date: Apr. 28, 2023

WCDMA Band II Low-Touch-Left (RMC)
DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=2.32; Frequency: 1852.4 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.32$ mho/m; $\epsilon r = 43.26$; $\rho = 1000$ kg/m³;

Phantom section: Left Section

Ambient temperature (°C): 20.9, Liquid temperature (°C): 20.6

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ WCDMA Band II Low -Touch-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ WCDMA Band II Low -Touch-Left/Zoom Scan: Measurement grid:dx=8mm,dy=8mm,dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	WCDMA Band II
Channels	Low
Signal	CDMA (Crest factor: 1.0)

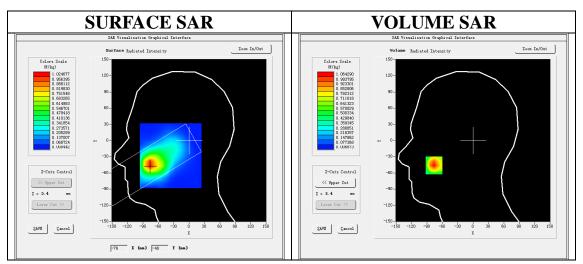



Maximum location: X=-76.00, Y=-46.00 SAR Peak: 1.71 W/kg

SAR 10g (W/Kg)	0.530048
SAR 1g (W/Kg)	1.013589





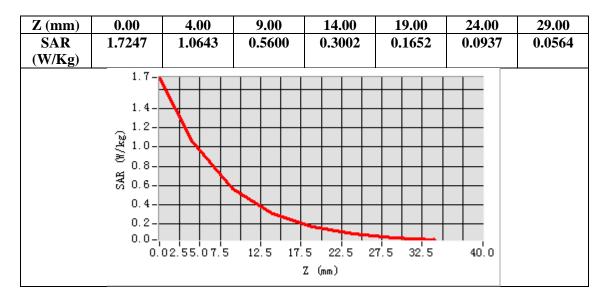

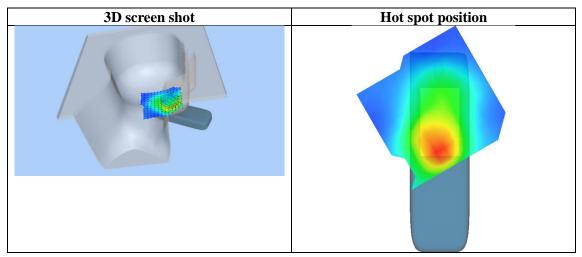



Page 174 of 190

Test Laboratory: AGC Lab Date: Apr. 30, 2023

WCDMA Band V High-Body-Towards Grounds (RMC)
DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: UMTS; Communication System Band: BAND V UTRA/FDD; Duty Cycle:1: 1; Conv.F=2.13; Frequency: 846.6 MHz; Medium parameters used: f = 835MHz; $\sigma = 0.90$ mho/m; $\epsilon r = 39.26$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 20.4, Liquid temperature (°C): 20.1

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ WCDMA Band V High -Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ WCDMA Band V High -Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	ELLI
Device Position	Body Back
Band	WCDMA Band V
Channels	High
Signal	CDMA (Crest factor: 1.0)

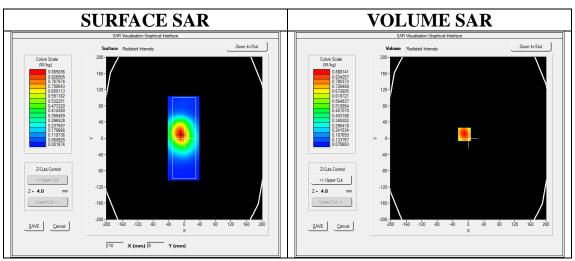



Maximum location: X=-10.00, Y=10.00 SAR Peak: 1.15 W/kg

SAR 10g (W/Kg)	0.589270
SAR 1g (W/Kg)	0.852954





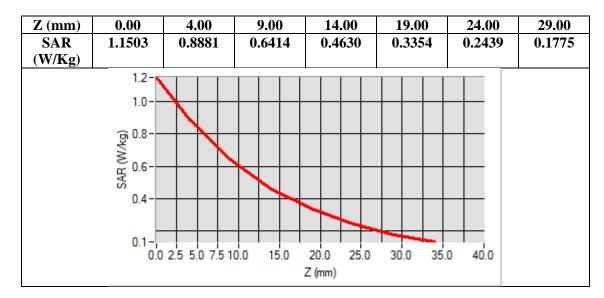

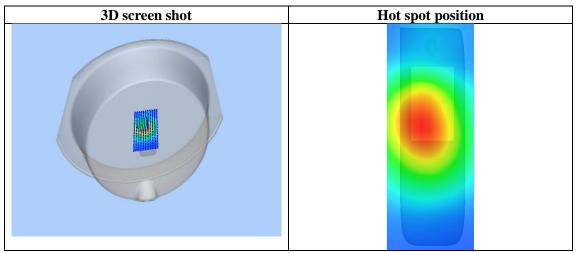



Page 176 of 190

Test Laboratory: AGC Lab Date: Apr. 28, 2023

LTE Band 2 Low-Body-Back (1 RB#0)

DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: LTE; Communication System Band: LTE Band 2; Duty Cycle:1:1; Conv.F=2.32; Frequency:1860MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.37 \text{ mho/m}$; $\epsilon = 42.67$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 20.9, Liquid temperature ($^{\circ}$ C): 20.6

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 2 Low -Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 2 Low -Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 2
Channels	Low
Signal	OFDM (Crest factor: 1.0)

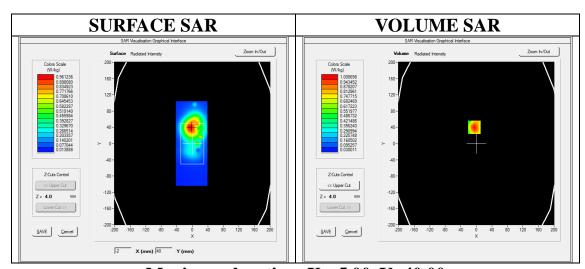


Maximum location: X=-5.00, Y=40.00

SAR Peak: 1.58 W/kg


SAR 10g (W/Kg)	0.521392
SAK 10g (W/Kg)	0.321392
SAR 1g (W/Kg)	0.957055


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





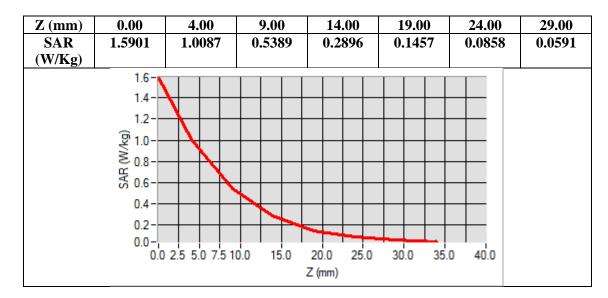

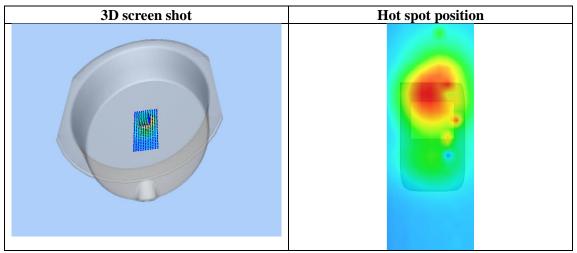



Page 178 of 190

Test Laboratory: AGC Lab Date: Apr. 29, 2023

LTE Band 4 Mid-Touch-Right (1 RB#0)

DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=2.32; Frequency:1732.5 MHz; Medium parameters used: f = 1750 MHz; $\sigma = 1.39$ mho/m; $\epsilon r = 41.27$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

Ambient temperature ($^{\circ}$): 20.8, Liquid temperature ($^{\circ}$): 20.5

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 4 Mid- Touch- Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 4 Mid- Touch- Right /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

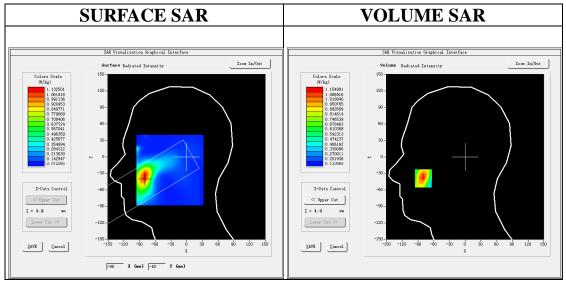


Maximum location: X=-80.00, Y=-39.00


SAR Peak: 1.34 W/kg

SAR 10g (W/Kg)	0.820628
SAR 1g (W/Kg)	1.101096





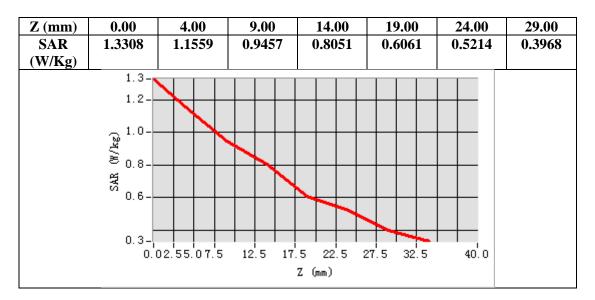

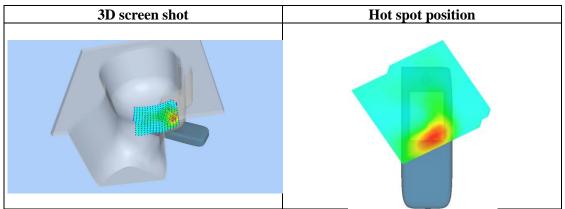



Page 180 of 190

Test Laboratory: AGC Lab Date: Apr. 30, 2023

LTE Band 5 Low-Body-Back (1 RB#0)

DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1; Conv.F=2.13 Frequency:829 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.85$ mho/m; $\epsilon r = 41.67$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 20.4, Liquid temperature ($^{\circ}$ C): 20.1

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 5 Low -Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 5 Low -Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 5
Channels	Low
Signal	OFDM (Crest factor: 1.0)

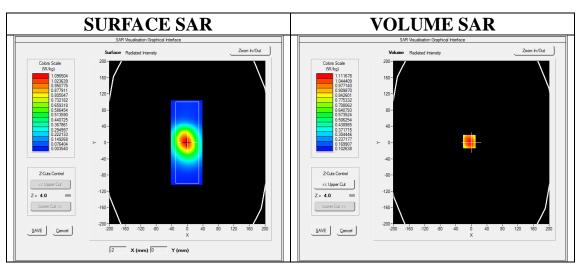


Maximum location: X=-5.00, Y=2.00


SAR Peak: 1.45 W/kg

SAR 10g (W/Kg)	0.744145
SAR 1g (W/Kg)	1.074781





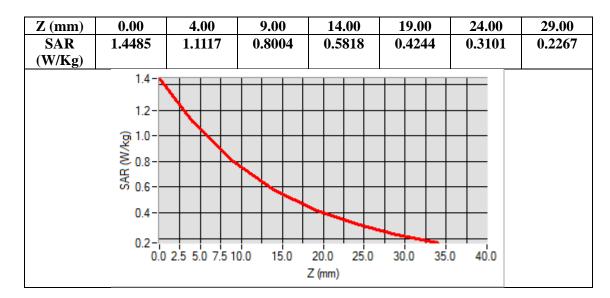

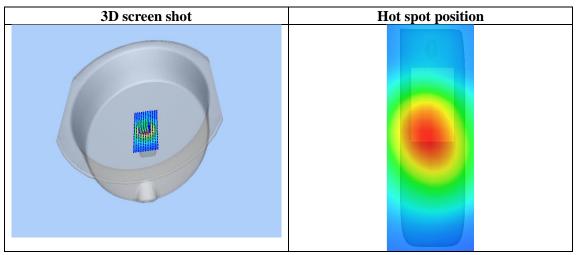



Page 182 of 190

Test Laboratory: AGC Lab Date: Apr. 26, 2023

LTE Band 7 Mid-Touch-Left (1RB#0)

DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=2.29 Frequency: 2535MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.95 \text{ mho/m}$; $\epsilon r = 40.17$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Left Section

Ambient temperature (°C): 21.1, Liquid temperature (°C): 20.9

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 7 Mid-Touch-Left/Area Scan: Measurement grid: dx=8mm, y=8mm Configuration/ LTE BAND 7 Mid-Touch-Left/Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE BAND 7
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

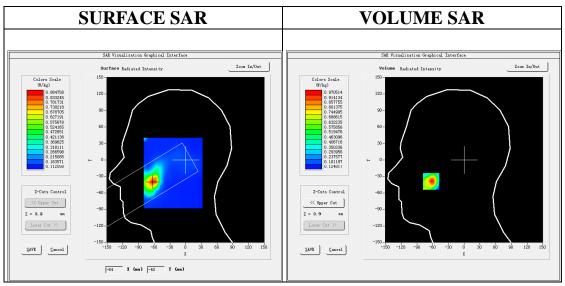



Maximum location: X=-63.00, Y=-39.00 SAR Peak: 1.25 W/kg

SAR 10g (W/Kg)	0.516205
SAR 1g (W/Kg)	0.871751





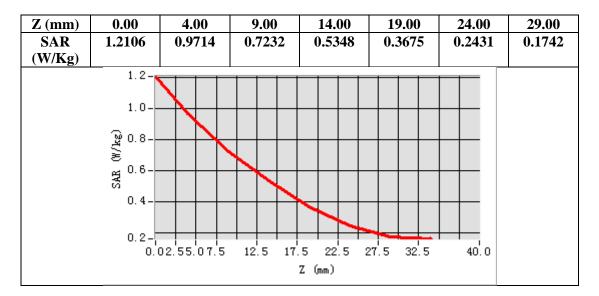

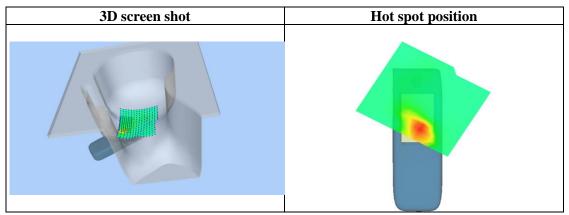



Page 184 of 190

Test Laboratory: AGC Lab Date: May 03, 2023

LTE Band 13 Mid-Body-Back (1 RB#0)

DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: LTE; Communication System Band: LTE Band 13; Duty Cycle:1:1; Conv.F=2.10; Frequency: 782 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.95$ mho/m; $\epsilon = 41.37$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.5, Liquid temperature ($^{\circ}$): 21.2

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 13 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 13 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 13
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

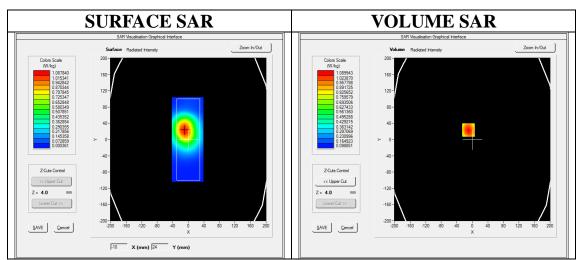


Maximum location: X=-10.00, Y=23.00

SAR Peak: 1.42 W/kg


SAR 10g (W/Kg)	0.724360
SAR 1g (W/Kg)	1.051551


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





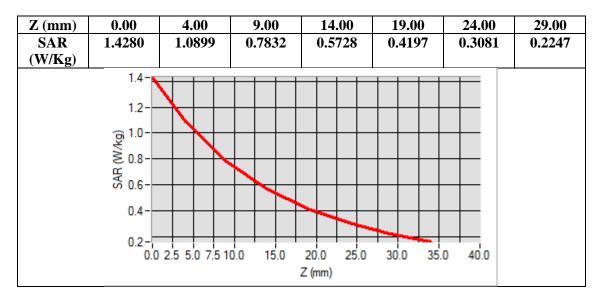

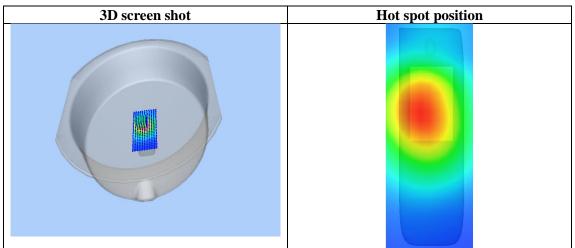



Page 186 of 190

Test Laboratory: AGC Lab Date: Apr. 30, 2023

LTE Band 26 High-Body-Back (1 RB#0)

DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: LTE; Communication System Band: LTE Band 26; Duty Cycle:1:1; Conv.F=2.13 Frequency:841.5 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.91$ mho/m; $\epsilon = 38.91$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 20.4, Liquid temperature ($^{\circ}$): 20.1

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 26 High -Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 26 High -Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 26
Channels	High
Signal	OFDM (Crest factor: 1.0)

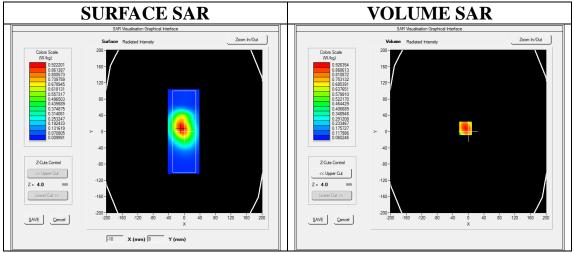



Maximum location: X=-7.00, Y=8.00 SAR Peak: 1.22 W/kg

SAR 10g (W/Kg)	0.598299
SAR 1g (W/Kg)	0.889843





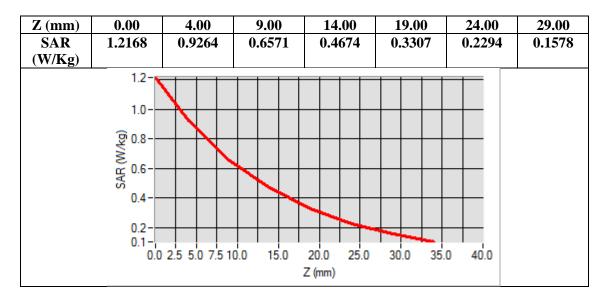

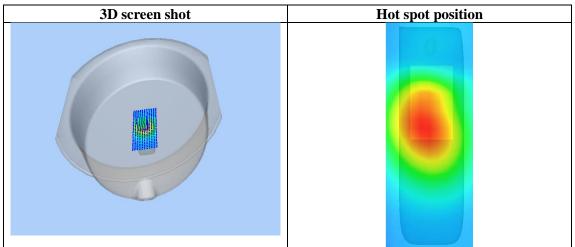



Page 188 of 190

Test Laboratory: AGC Lab Date: Apr. 29, 2023

LTE Band 66 High-Body-Back (1 RB#0)

DUT: 4G Mobile Phone; Type: AGM_M8_FLIP

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=2.32; Frequency:1770 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.47$ mho/m; $\epsilon r = 38.69$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 20.8, Liquid temperature ($^{\circ}$): 20.5

SATIMO Configuration:

Probe: SSE2; Calibrated: Dec. 02, 2022; Serial No.: SN 45/22 EPGO391


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 66 High -Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 66 High -Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 66
Channels	High
Signal	OFDM (Crest factor: 1.0)

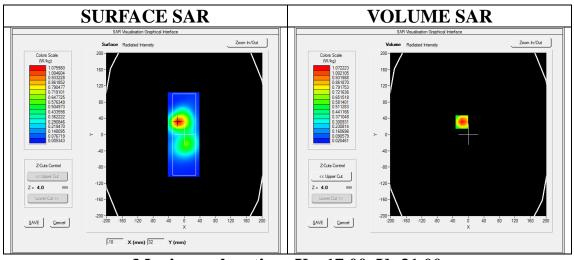


Maximum location: X=-17.00, Y=31.00


SAR Peak: 1.66 W/kg

SAR 10g (W/Kg)	0.565962
SAR 1g (W/Kg)	1.024099





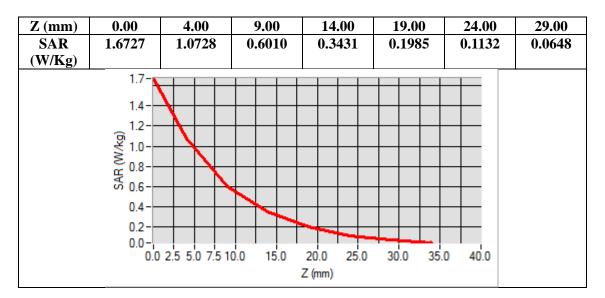

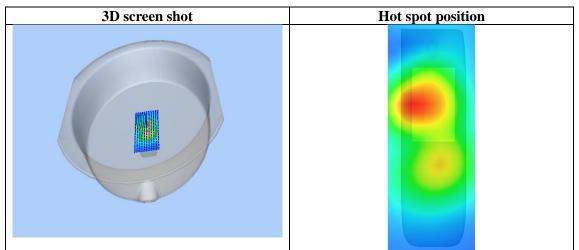



Page 190 of 190

APPENDIX C. TEST SETUP PHOTOGRAPHS

Refer to Attached files.

APPENDIX D. CALIBRATION DATA

Refer to Attached files.

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.