

DEVIALET

PRODUCT SPECIFICATION

**Wi-Fi (11ac/b/g/n 2Tx2R) + BT (V4.1 LE) M.2 Type 1216
LGA Module**

DVTRF001

WCBN3507A-D6

DEVIALET Model name: DVTRF001

QCA NFA324A-50

** This document contains confidential proprietary information and is property of LTC. The contents of the document should not be disclosed to unauthorized persons without the written consent of LTC.*

CONTENT

PRODUCT FEATURES	3
BT FEATURES:	3
Wi-Fi FEATURES:.....	3
COMMON FEATURES:	3
PRODUCT SPECIFICATIONS.....	4
MAIN CHIPSET	4
FUNCTIONAL SPECIFICATIONS	4
FEDERAL COMMUNICATION COMMISSION INTERFERENCE STATEMENT	7
INDUSTRY CANADA STATEMENT:	9
低功率電波輻射性電機管理辦法.....	13
INTRODUCTION AND USAGE	14

PRODUCT FEATURES

BT FEATURES:

- Bluetooth V4.1, V4.0 LE, V3.0+HS, Bluetooth V2.1+EDR system, backward compatible with BT version of 1.1, 1.2 and 2.0
- Supports Class 1 (TX power maximum to +10dBm)
- BT transmission speed including 1M, 2M and 3Mbps EDR operations
- Supports for Simple Pairing (SP) and Enhanced Inquiry Response (EIR) function
- HCI USB interface to work with Windows upper layer stack

WI-FI FEATURES:

- Operates at ISM frequency Band(2.4/ 5 GHz)
- IEEE Standards Supports 802.11ac, 802.11a, 802.11b, 802.11g and 802.11n
- Wi-Fi using Low power PCIe (w/ L1 sub-state) interface
- Enterprise level security supporting:
HW : 64/128-bit WEP, CKIP, TKIP and AES-CCMP encryption
SW : WPA, WPA2, IEEE 802.1x, FIPS140-2
- Support 2 transmission and 2 receiving, transmission rate can up to 867Mbps (Physical Rate) in downstream and upstream
- Additional features include maximal likelihood (ML) decoding, low-density parity check(LDPC), maximum ratio combining(MRC), Rx space time block code(STBC), MU-MIMO and transmit beam forming

COMMON FEATURES:

- Form Factor: M.2(NGFF) LGA Type 1216
- Supports for BT & WLAN Co-existence
- RoHS compliance
- Halogen Free compliance

PRODUCT SPECIFICATIONS

MAIN CHIPSET

Qualcomm QCA6174A-50

FUNCTIONAL SPECIFICATIONS

BT Function	
Standard	Bluetooth V4.1 LE, V4.0LE, V3.0+HS, V2.1+EDR
Bus Interface	USB 1.1
Data Rate	1 Mbps, 2Mbps and 3Mbps
Modulation Scheme	LE, GFSK, $\pi/4$ -DQPSK and 8-DPSK
Frequency Range	2.402~2.480 GHz
Transmit Output Power	0dBm≤Output Power ≤ +10dBm ; Class 1 Device
Receive Sensitivity	< 0.1% BER at -70dBm
Software	Bluetooth Suite
Wi-Fi Function	
Standard	IEEE802.11ac, IEEE802.11a , IEEE802.11b , IEEE 802.11g , IEEE 802.11n
Bus Interface	Low power PCI Express
Data Rate	<p>802.11a: 54, 48, 36, 24, 18, 12, 9, 6 Mbps</p> <p>802.11b: 11, 5.5, 2, 1 Mbps</p> <p>802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps</p> <p>802.11n: MCS 0 to 15 for HT20MHz MCS 0 to 15 for HT40MHz</p> <p>802.11ac: MCS 0 to 8 for HT20MHz MCS 0 to 9 for HT40MHz MCS 0 to 9 for HT80MHz</p>
Media Access Control	CSMA/CA with ACK
Modulation Techniques	<p>802.11ac: 256QAM, 64QAM, 16QAM, QPSK, BPSK</p> <p>802.11a: 64QAM, 16QAM, QPSK, BPSK</p> <p>802.11b: CCK, DQPSK, DBPSK</p> <p>802.11g: 64QAM, 16QAM, QPSK, BPSK</p> <p>802.11n:</p>

	64QAM, 16QAM, QPSK, BPSK
Transmit Output Power – 2x2 (Tolerance: ±1.5dBm@2.4GHz ±2dBm@5GHz)	<p>802.11b / CCK : 18 dBm</p> <p>802.11a : 13 dBm @ 6,24,36Mbps 12 dBm @ 48Mbps 10.5 dBm @ 54Mbps</p> <p>802.11g / OFDM: 18 dBm@6,9,12,18,24Mbps 17 dBm@36Mbps 16 dBm@48Mbps 15 dBm@54Mbps</p> <p>2.4G:</p> <p>802.11n / HT20: 18 dBm@MCS0 15 dBm@MCS7</p> <p>802.11n / HT40: 17 dBm@MCS0 15 dBm@MCS7</p> <p>5G:</p> <p>802.11n / HT20: 12.5 dBm@MCS0 10 dBm@MCS7</p> <p>802.11n / HT40: 11.5 dBm@MCS0 10 dBm@MCS7</p> <p>AC:</p> <p>HT20: 10 dBm@MCS7 9 dBm@MCS8</p> <p>HT40: 8 dBm@MCS8 7 dBm@MCS9</p> <p>HT80: 7 dBm@MCS8 6 dBm@MCS9</p>
Receiver Sensitivity	<p>802.11b: Less than IEEE Standard -76dBm</p> <p>802.11g / 802.11a: Less than IEEE Standard -82dBm @ 6Mbps Less than IEEE Standard -65dBm @ 54Mbps</p> <p>802.11n:</p> <p>HT20: Less than IEEE Standard -82dBm @ MCS0 Less than IEEE Standard -64dBm @ MCS7</p> <p>HT40: Less than IEEE Standard -79dBm @ MCS0 Less than IEEE Standard -61dBm @ MCS7</p> <p>802.11ac:</p> <p>HT80: Less than IEEE Standard -51dBm @ MCS9</p>
Security	HW : 64/128-bit WEP, CKIP, TKIP and AES-CCMP encryption SW : WPA, WPA2, IEEE 802.1x, FIPS140-2
Common Function	
Operating Voltage	3.3 V ±9% I/O supply voltage

OS Supported	Google Chrome & Microsoft Windows
Power Consumption (In Average)	<i>TX Mode:</i> 610mA <i>Maximum power current(bi-direction):</i> 750mA <i>RX Mode:</i> 285mA <i>Associated Idle:</i> 54mA <i>Unassociated Idle:</i> 8mA <i>Radio Off(w/ LISS enable):</i> 2.4mA
Antenna Type	RF on PADs

FEDERAL COMMUNICATION COMMISSION INTERFERENCE STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

This device meets all the other requirements specified in Part 15E, Section 15.407 of the FCC Rules.

Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This device is intended only for OEM integrators under the following conditions:

- 1) The antenna must be installed such that 20 cm is maintained between the

antenna and users, and

- 2) The transmitter module may not be co-located with any other transmitter or antenna.

As long as **2** conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed

IMPORTANT NOTE: In the event that these conditions can not be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid and the FCC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

End Product Labeling

This transmitter module is authorized only for use in device where the antenna may be installed such that 20 cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following: "Contains FCC ID: **2AN9V-DVTRF001**". The grantee's FCC ID can be used only when all FCC compliance requirements are met.

Manual Information To the End User

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module.

The end user manual shall include all required regulatory information/warning as show in this manual.

INDUSTRY CANADA STATEMENT:

This device complies with ISED's licence-exempt RSSs. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme aux CNR d' ISED applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) le dispositif ne doit pas produire de brouillage préjudiciable, et (2) ce dispositif doit accepter tout brouillage reçu, y compris un brouillage susceptible de provoquer un fonctionnement indésirable.

Déclaration d'exposition aux radiations:

Le produit est conforme aux limites d'exposition pour les appareils portables RF pour les Etats-Unis et le Canada établies pour un environnement non contrôlé.

Le produit est sûr pour un fonctionnement tel que décrit dans ce manuel. La réduction aux expositions RF peut être augmentée si l'appareil peut être conservé aussi loin que possible du corps de l'utilisateur ou que le dispositif est réglé sur la puissance de sortie la plus faible si une telle fonction est disponible.

Radiation Exposure Statement:

This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements ISED établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

This device is intended only for OEM integrators under the following conditions: (For module device use)

- 1) The antenna must be installed such that 20 cm is maintained between the antenna and users, and
- 2) The transmitter module may not be co-located with any other transmitter or antenna.

As long as **2** conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

Cet appareil est conçu uniquement pour les intégrateurs OEM dans les conditions suivantes: (Pour utilisation de dispositif module)

- 1) L'antenne doit être installée de telle sorte qu'une distance de 20 cm est respectée entre l'antenne et les utilisateurs, et 2) Le module émetteur peut ne pas être coimplanté

avec un autre émetteur ou antenne.

Tant que les **2** conditions ci-dessus sont remplies, des essais supplémentaires sur l'émetteur ne seront pas nécessaires. Toutefois, l'intégrateur OEM est toujours responsable des essais sur son produit final pour toutes exigences de conformité supplémentaires requis pour ce module installé.

IMPORTANT NOTE:

In the event that these conditions can not be met (for example certain laptop configurations or co-location with another transmitter), then the Canada authorization is no longer considered valid and the IC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate Canada authorization.

NOTE IMPORTANTE:

Dans le cas où ces conditions ne peuvent être satisfaites (par exemple pour certaines configurations d'ordinateur portable ou de certaines co-localisation avec un autre émetteur), l'autorisation du Canada n'est plus considéré comme valide et l'ID IC ne peut pas être utilisé sur le produit final. Dans ces circonstances, l'intégrateur OEM sera chargé de réévaluer le produit final (y compris l'émetteur) et l'obtention d'une autorisation distincte au Canada.

End Product Labeling

This transmitter module is authorized only for use in device where the antenna may be installed such that 20 cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following: "Contains IC: 23355-DVTRF001".

Plaque signalétique du produit final

Ce module émetteur est autorisé uniquement pour une utilisation dans un dispositif où l'antenne peut être installée de telle sorte qu'une distance de 20cm peut être maintenue entre l'antenne et les utilisateurs. Le produit final doit être étiqueté dans un endroit visible avec l'inscription suivante: "Contient des IC: 23355- DVTRF001".

Manual Information To the End User

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module.

The end user manual shall include all required regulatory information/warning as show in this manual.

Manuel d'information à l'utilisateur final

L'intégrateur OEM doit être conscient de ne pas fournir des informations à l'utilisateur final quant à la façon d'installer ou de supprimer ce module RF dans le manuel de l'utilisateur du produit final qui intègre ce module.

Le manuel de l'utilisateur final doit inclure toutes les informations réglementaires

requises et avertissements comme indiqué dans ce manuel.

Caution :

- (i) the device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;
- (ii) the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
- (iii) the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits specified for point-to-point and non-point-to-point operation as appropriate; and
- (iv) the worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in Section 6.2.2(3) shall be clearly indicated.
- (v) Users should also be advised that high-power radars are allocated as primary users (i.e. priority users) of the bands 5250-5350 MHz and 5650-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.

Avertissement:

Le guide d'utilisation des dispositifs pour réseaux locaux doit inclure des instructions précises sur les restrictions susmentionnées, notamment :

- (i) les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux;
- (ii) le gain maximal d'antenne permis pour les dispositifs utilisant les bandes de 5250 à 5 350 MHz et de 5470 à 5725 MHz doit être conforme à la limite de la p.i.r.e;
- (iii) le gain maximal d'antenne permis (pour les dispositifs utilisant la bande de 5 725 à 5 850 MHz) doit être conforme à la limite de la p.i.r.e. spécifiée pour l'exploitation point à point et l'exploitation non point à point, selon le cas;
- (iv) les pires angles d'inclinaison nécessaires pour rester conforme à l'exigence de la p.i.r.e. applicable au masque d'élévation, et énoncée à la section 6.2.2 3), doivent être clairement indiqués.
- (v) De plus, les utilisateurs devraient aussi être avisés que les utilisateurs de radars de haute puissance sont désignés utilisateurs principaux (c.-à-d., qu'ils ont la priorité) pour les bandes 5250-5350 MHz et 5650-5850 MHz et que ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.

DETACHABLE ANTENNA USAGE

This radio transmitter (IC: 23355- DVTRF001 / Model: DVTRF001) has been approved by ISED to operate with the antenna type listed below with maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device. Le présent émetteur radio (IC: 23355- DVTRF001 / Model: DVTRF001) a été approuvé par ISED pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal. Les types d'antenne non inclus dans cette liste, et dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

Approved antenna(s) list

Antenna set 1									
Transmitter Circuit	Brand	Model	Antenna Type	2.4GHz Gain with cable loss (dBi)	5GHz Gain with cable loss (dBi)	2.4GHz Cable Loss (dB)	5G Cable Loss (dB)	Connector Type	Cable Length (mm)
Chain (0)	WNC	81-EBJ15.005	PIFA	3.62	Band 1&2: 3.08 Band 3: 4.78 Band 4: 4.78	1.15	Band 1&2: 1.70 Band 3: 1.74 Band 4: 1.79	IPEX	300
Chain (1)	WNC	81-EBJ15.005	PIFA	3.62	Band 1&2: 3.08 Band 3: 4.78 Band 4: 4.78	1.15	Band 1&2: 1.70 Band 3: 1.74 Band 4: 1.79	IPEX	300
Antenna set 2									
Transmitter Circuit	Brand	Model	Antenna Type	2.4GHz Gain with cable loss (dBi)	5GHz Gain with cable loss (dBi)	Cable Loss (dB)	Connector Type	Cable Length (mm)	
Chain (0)	Tongda	T-543-8201044-A (Ant 1)	PIFA	3.572	Band 1&2: 3.002 Band 3: 4.546 Band 4: 4.416	NA	IPEX	77	
Chain (1)	Tongda	T-543-8201044-A (Ant 2)	PIFA	3.325	Band 1&2: 2.942 Band 3: 4.622 Band 4: 4.586	NA	IPEX	61	
Antenna set 3									
Transmitter Circuit	Brand	Model	Antenna Type	2.4GHz Gain with cable loss (dBi)	5GHz Gain with cable loss (dBi)	Cable Loss (dB)	Connector Type		
Chain (0)	ethertronics	M830520	chip	1.1	3.2	NA	IPEX		
Chain (1)	ethertronics	M830520	chip	1.1	3.2	NA	IPEX		
Antenna set 4									
Transmitter Circuit	Brand	Model	Antenna Type	2.4GHz Gain with cable loss (dBi)	5GHz Gain with cable loss (dBi)	Cable Loss (dB)	Connector Type		
Chain (0)	ethertronics	1002298	PIFA	3.6	5.1	NA	IPEX		
Chain (1)	ethertronics	1002298	PIFA	3.6	5.1	NA	IPEX		

低功率電波輻射性電機管理辦法

第十二條 經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

第十四條 低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。
前項合法通信，指依電信法規定作業之無線電通信。

低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

1. 使用此產品時應避免影響附近雷達系統之操作。
2. 高增益指向性天線只得應用於固定式點對點系統。

模組認證：

1. 本模組於取得認證後將依規定於模組本體標示審驗合格標籤。
2. 系統廠商應於平台上標示「本產品內含射頻模組：
 XXXyyyLPDzzzz-x」字樣。

INTRODUCTION AND USAGE


The **DVTRF001** is a device that allows you connect your computer to a wireless local area network (LAN). A wireless LAN allows your system to use wireless Radio Frequency (RF) technology to transmit and receive data without physically attaching to the network. The Wireless protocols that come with this product ensure data security and isolation from interference generated by other radio frequencies.

This card also allows you to take full advantage of your computer's mobility with access to real-time information and online services anytime and anywhere. In addition, this device eliminates the bother of pulling cable through walls and under furniture. It even allows you to place your system in locations where cabling is impossible. Modifying and augmenting networks has never been so easy.


Wireless Network Options

The Peer-to-Peer Network

This network installation lets you set a small wireless workgroup easily and quickly. Equipped with wireless PC Cards or wireless PCI, you can share files and printers between each PC and laptop.

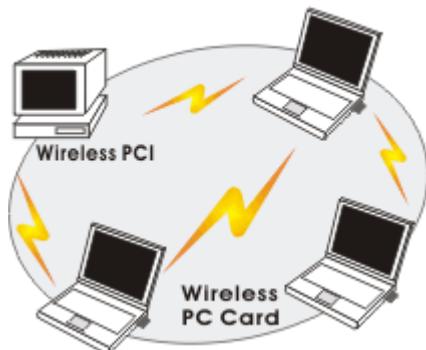


You can also use one computer as an Internet Server to connect to a wired global network and share files and information with other computers via a wireless LAN.

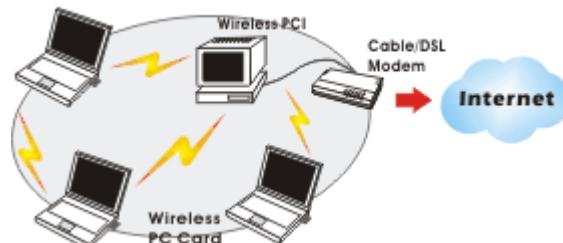

The Access Point Network

The network installation allows you to share files, printers, and Internet access much more convenient. With Wireless LAN Cards, you can connect wireless LAN to a wired global network via an **Access Point**.

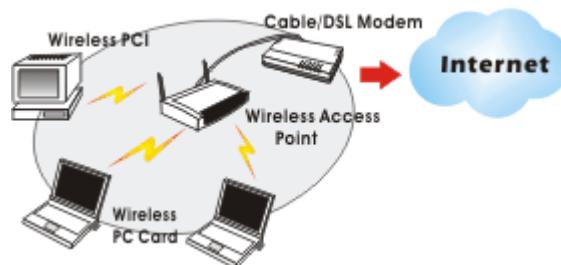


NETWORK CONNECTION

Once the device driver is well installed, a network setting described in the following should be also established.

- 1.Click the Wireless icon to enable Windows Zero Configure.



- 2.Select the AP then click the **Connect**

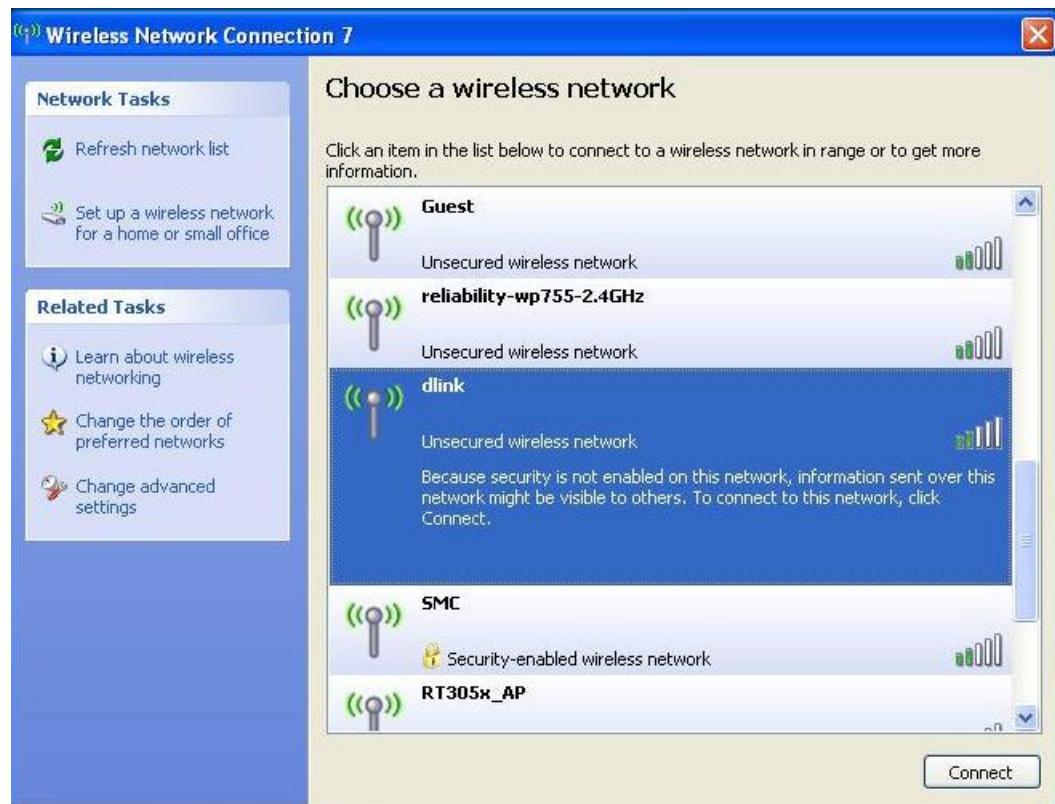

3. Surfing the Internet after completing connection.

