

**FIRO**Bluetooth headset  
S05INSTRUCTION  
MANUAL**FIRO****Operating instructions:**

**Power on:** long press multifunction button 3 seconds till green LED light flashing  
**Power off:** long press multifunction button 3 seconds till red LED light flashing  
**Pairing:** press multifunction button 6-8 seconds till red and green led light flashing  
**Volume +/-:** short press volume button once  
**Previous/forward song:** long press volume button "+/-"  
**Play/pause:** press multifunction button once  
**Answer/end calls:** short press multifunction button  
**Reject calls:** double press multifunction button  
**Mute:** during the call, double press multifunction button  
**Voice dial:** press multifunction button 2 seconds after connected  
**Clearing pairing records:** press multifunction button 6 seconds when headset charging on power off

1

**FIRO****About your headset**

Talk time: 7 hrs  
 Music time: 6 hrs  
 Standby time: 250 hrs  
 Bluetooth version: 4.1  
 Support: A2DP/HFP/HSP/AVRCP  
 Chipset: CSR  
 Noise reduction: CVC 6.0 noise cancelling  
 Transmission range: 10m  
 Weight: 15.7g

2

**FIRO****Multifunction button**

Answer or end calls (press button once)  
 Active voice dial (press button for 2 seconds, mobile phone need support voice dial)  
 Step into pairing mode (press button for 5 seconds)

**Use of power on button**

Turn on (flash green light)  
 Turn off (flash red light)

**Being ready for using bluetooth headset**

Reading manual carefully so that learn how to use function buttons.  
 Ensure the bluetooth headset battery reserve, the headset should be charged at least 1 hour before first time using.

**Step into pairing mode**

1.Turning on bluetooth headset and bluetooth device in mobile phone, you can search headset mode number and pair with mobile phone  
 2.If phone lost the bluetooth connection or you want to connect other phone, press the call key for 5 seconds into pairing mode.  
 3.Turn off other bluetooth device so that avoid interference

3


**FIRO****Smart voice prompt**

Power on: korea language  
 Power off: korea language  
 Connected: korea language  
 Pairing: korea language  
 Battery low: korea language


**LED indication**

Low battery: green led change to red led  
 Charging: red led light up, after full charge, green led light up  
 Connected: green led flashing slow  
 Disconnected: green led flashing fast  
 Pairing mode: red and green led flash alternately

4

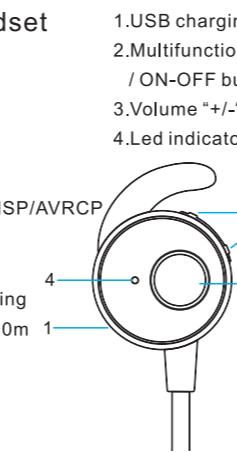**FIRO****Paring with mobile phone**

1. Activate the bluetooth device in your phone then use the phone add/search/discover new bluetooth device
2. Select the headset S05 which shows on your phone of the list of bluetooth devices. If the phone ask for a password, please enter four zeros(0000) and you will see \*\*\*\* showing on the screen.
3. Different phone have different menus to select from:  
 iPhone: setting>general>bluetooth>on (start to search the devices)  
 Smartphone: setting>options>bluetooth: on>search for devices  
 (note: keep the device when pairing within a distance of 0.3m)

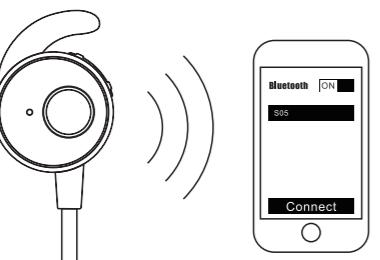

5

**FIRO****Connect with mobile phone:**

After the successful pairing, we can personalized choose custom mobile audio and the audio media to use the bluetooth headset connection. Mobile phone can intelligently connect the headphones, which the display for the green led light flashing. (some phone need to confirm connection)

**Bluetooth headset: control of answering calls**


When the bell of mobile phone rang, you can answer the phone by press the call button once or reject the call by press the call button for 2 seconds. After answering, you can short press the function key to end the call.



6

**FIRO****Connect with two mobile phones**

1. Pairing and connecting bluetooth headset with A mobile phone and then turn off bluetooth device of mobile A
2. Turning off the headset, and then turn on it again
3. Pairing and connecting the headset with mobile phone B
4. Turning on mobile A and then the headset has connected with 2 mobile phones

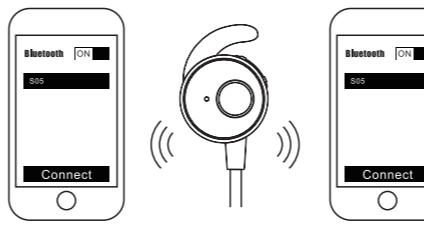

7

**FIRO**

Bluetooth has working range with 10 meter between the bluetooth headset and phone, if beyond, the audio quality would decline or the device would lose the connection

When headset charging with USB cable, please do not charge more than 2 hours

**Understand the tones you heard**

When you are using the bluetooth headset and heard a rhythmic tip, which reminds you pay attention to the battery is low and need to charge

**Learn how to reconnect**

Step into the scope of use, your headset will try to reconnect a lost bluetooth connection, if it can't, please press the call button once or manually reconnect via the phone's bluetooth device menu

**Auto redial**

Double click the multifunction button then you can redial the last phone number

8

**FIRO****FCC Statement**

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-- Reorient or relocate the receiving antenna.  
 -- Increase the separation between the equipment and receiver.

-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



WeChat public no.



Subscriptions



www.firoch.com