





Test Graphs of Conducted Output Power Spectral Density for band 5.725-5.85 GHz




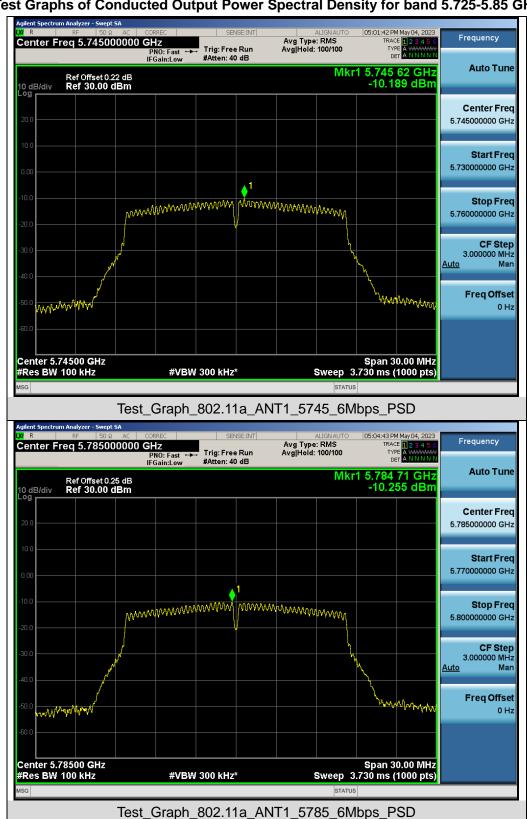





Test Graph 802.11n20 ANT1 5745 MCS0 PSD




Freq Offset

ᠰᠰᠰᠰᠰᠰ

Span 30.00 MHz Sweep 3.730 ms (1000 pts)



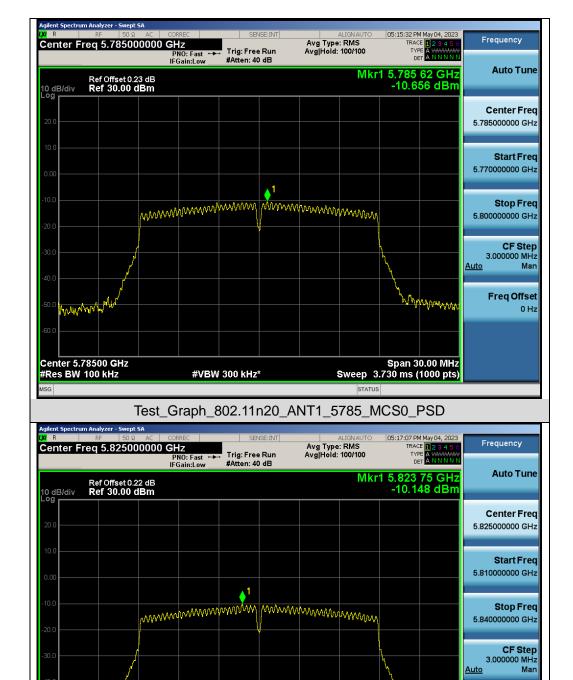


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test Graph 802.11n20 ANT1 5825 MCS0 PSD


#VBW 300 kHz*


Center 5.82500 GHz #Res BW 100 kHz





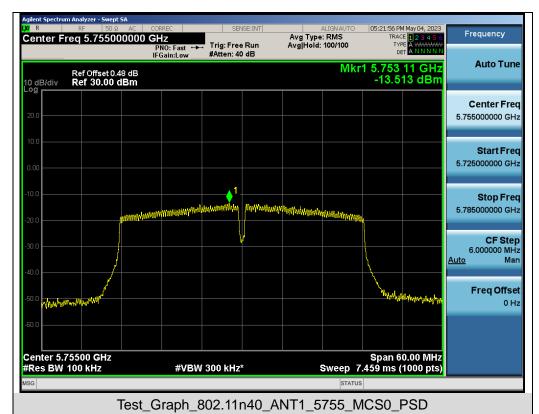

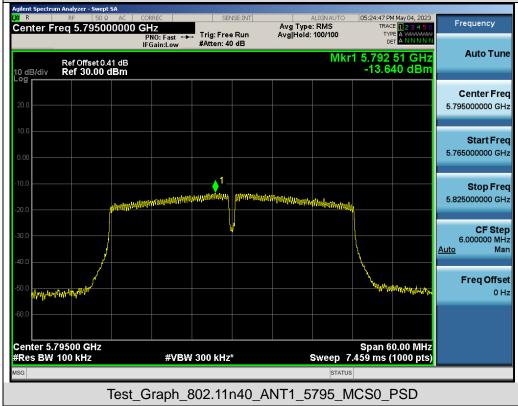








Test Graph 802.11ac20 ANT1 5785 MCS0 PSD


#VBW 300 kHz*

Span 30.00 MHz Sweep 3.730 ms (1000 pts)

Center 5.78500 GHz #Res BW 100 kHz





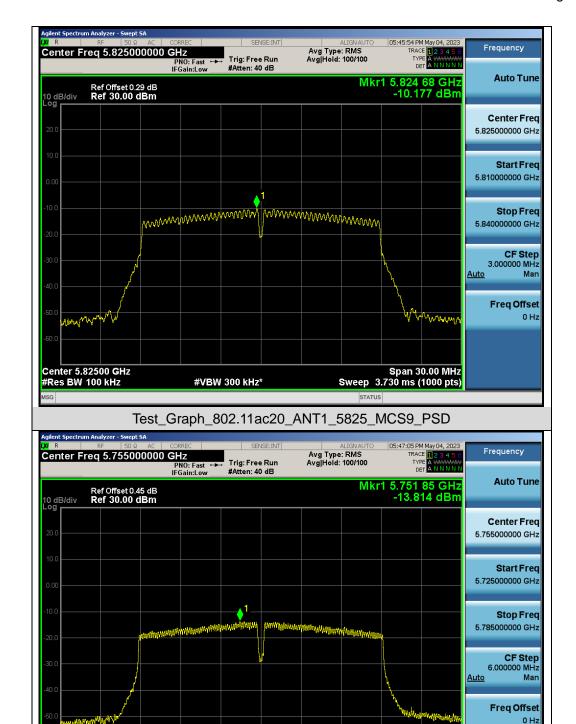


Test Graph 802.11ac40 ANT1 5755 MCS9 PSD

#VBW 300 kHz*


Span 60.00 MHz Sweep 7.459 ms (1000 pts)

Center 5.75500 GHz #Res BW 100 kHz



Stop Freq 5.835000000 GHz



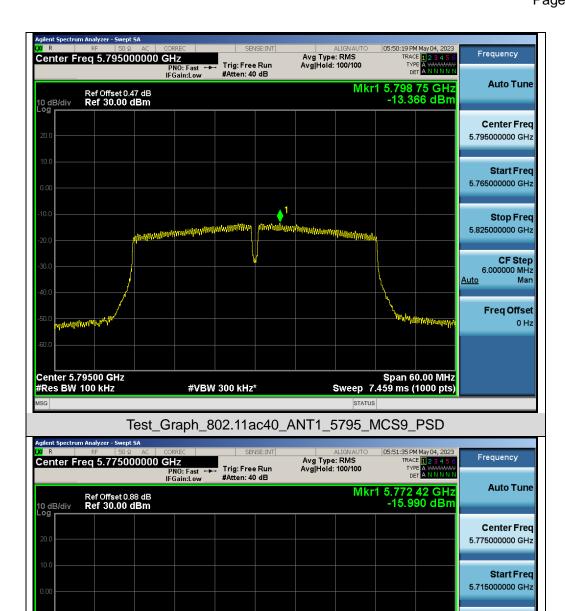

CF Step 12.000000 MHz
Auto Man

Freq Offset
0 Hz

Center 5.77500 GHz
#Res BW 100 kHz #VBW 300 kHz* Sweep 14.85 ms (1000 pts)

Test_Graph_802.11ac80_ANT1_5775_MCS9_PSD



9. CONDUCTED SPURIOUS EMISSION

9.1 MEASUREMENT LIMIT

	Applicable to	Limit	
Restricted bands	789033 D02 General UNII Test Procedures New Rules v02r01	Field strength at 3m (dBuV/m)	
		PK: 74	AV: 54
Out of the restricted bands	Applicable to	EIRP Limit (dBm/MHz)	Equivalent field Strength at 3m (dBuV/m)
	FCC 15.407(b)(1)	PK: -27	PK: 68.2
	15.407(b)(2)		
	15.407(b)(3)		
	15.407(b)(4)	See Note 2	

Note 1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:


E =
$$\frac{1000000 \sqrt{30 P}}{2}$$
 µV/m, where P is the eirp (Watts).

Note 2: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

9.2 MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
- 4. RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.(Test frequency below 1GHz)
- 5. RBW = 1 MHz; VBW= 3 MHz; Sweep = auto; Detector function = peak.(Test frequency Above 1GHz)
- 6. Set SPA Trace 1 Max hold, then View.
- 7. Mark the maximum useless stray point and compare it with the limit value to record the result.


9.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

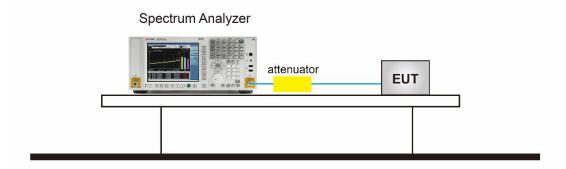





9.4 MEASUREMENT RESULTS


Test Graphs of Spurious Emissions outside of the 5.15-5.25 GHz band for transmitters operating in the 5.15-5.25 GHz band

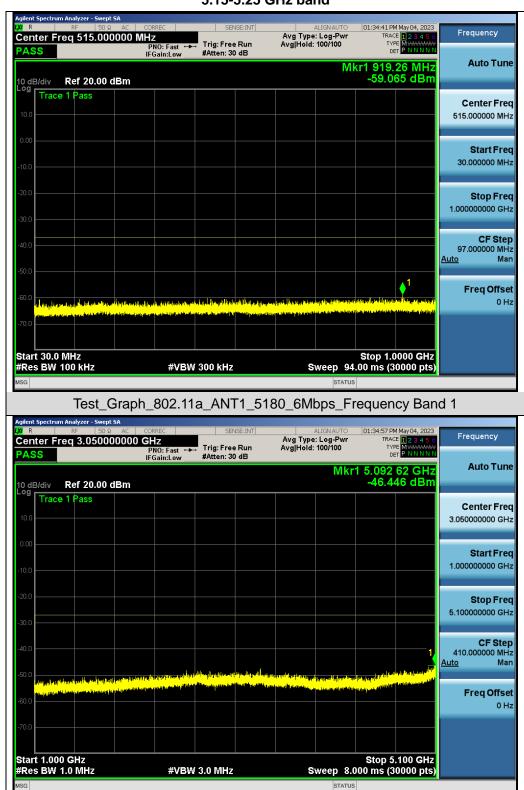







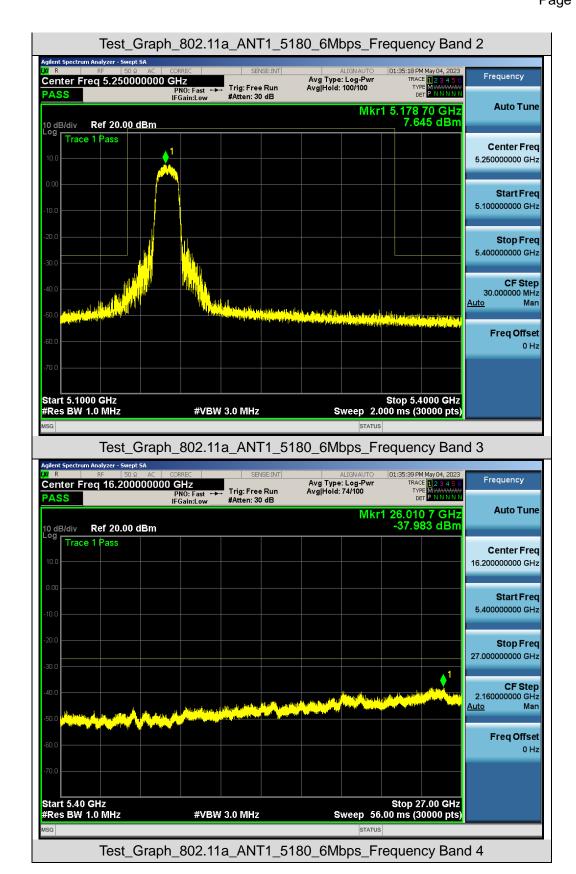







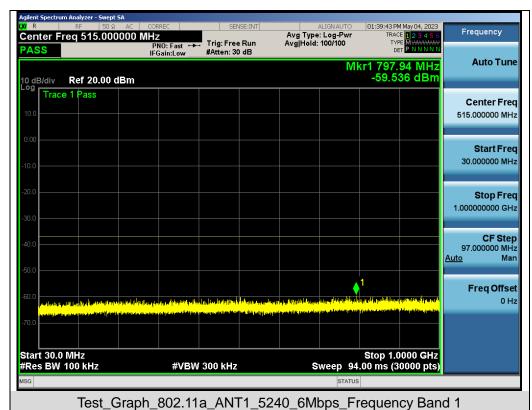


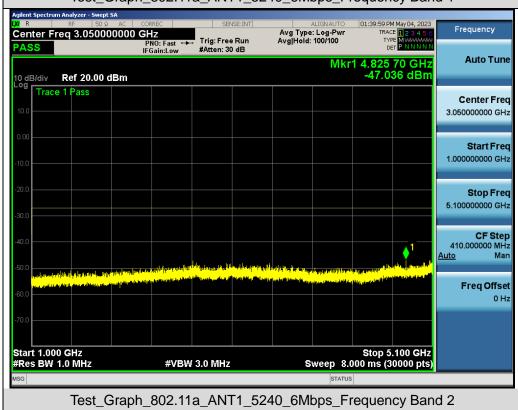






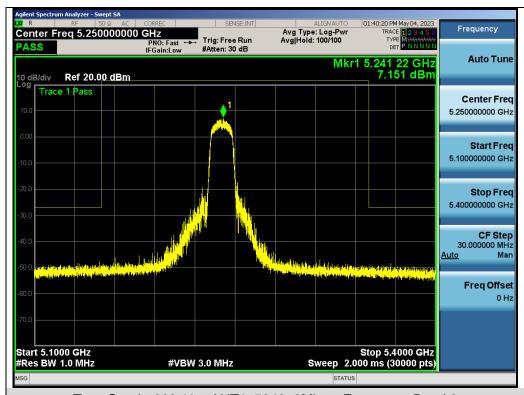

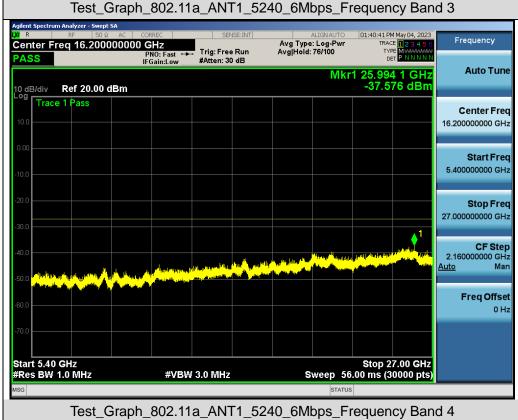






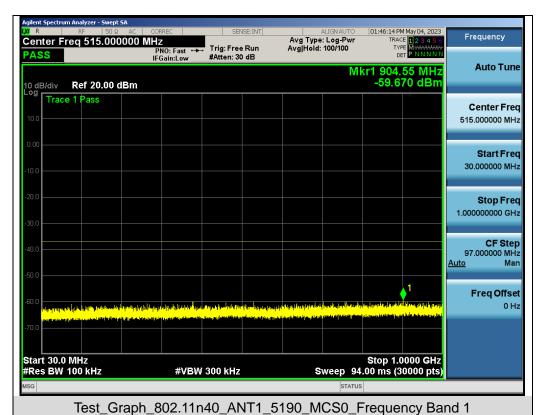










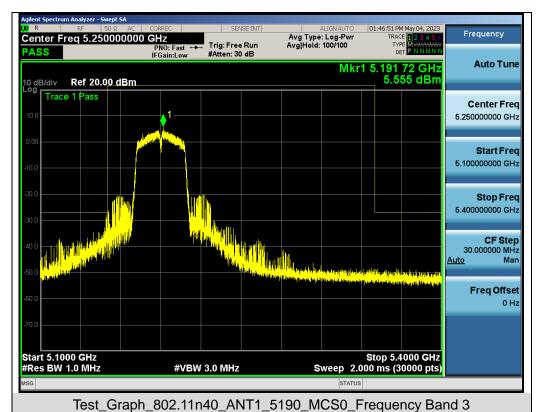

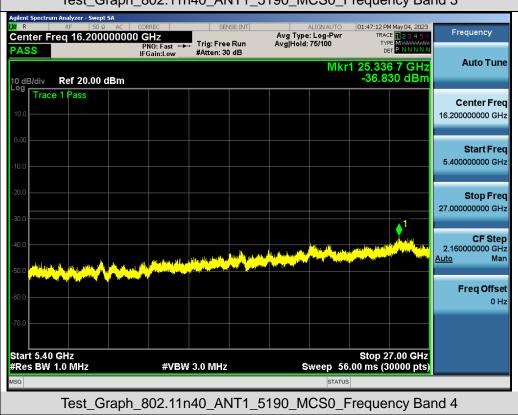







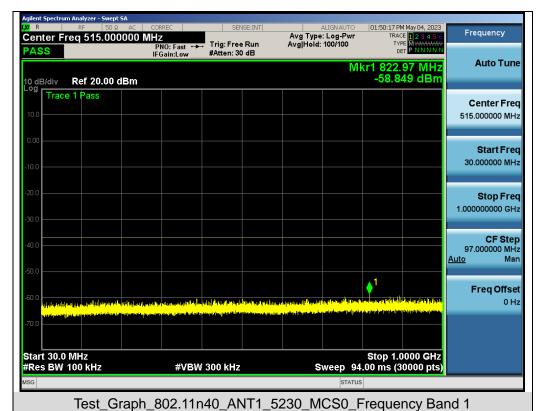









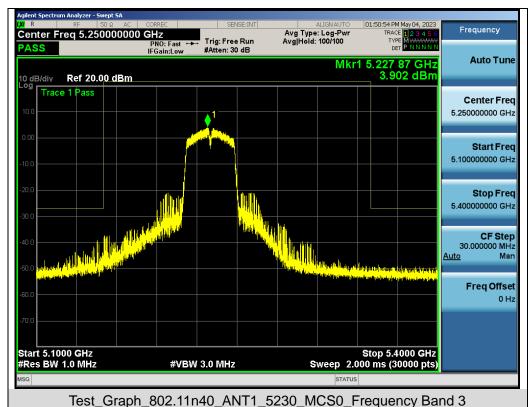









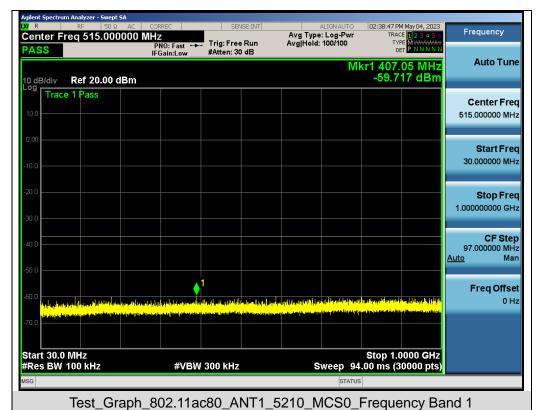








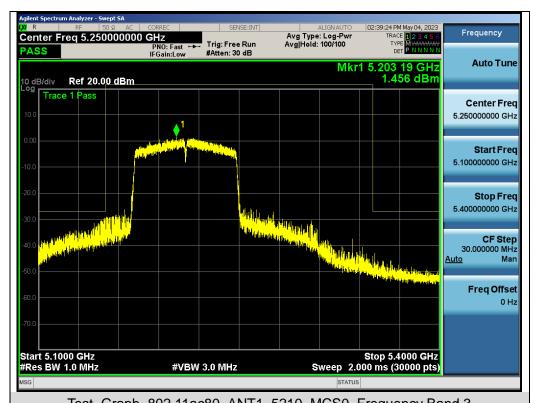










Test Graphs of Spurious Emissions outside of the 5.25-5.35 GHz band for transmitters operating in the 5.25-5.35 GHz band

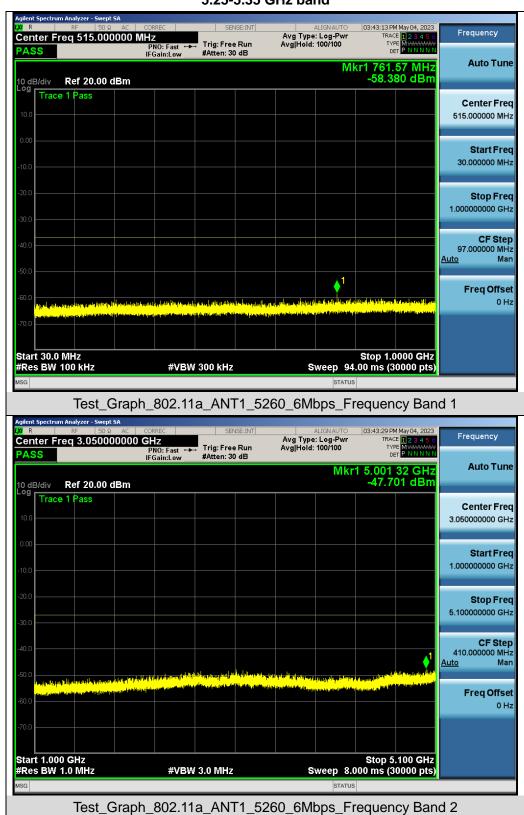





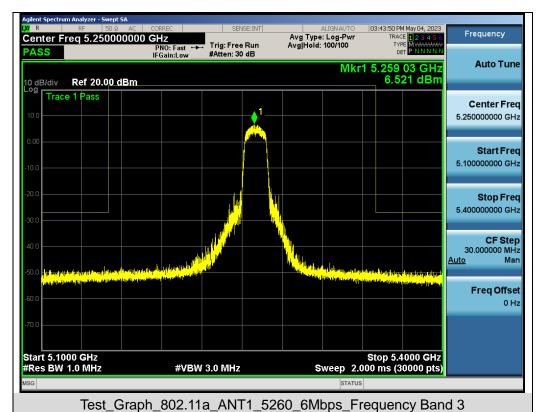



















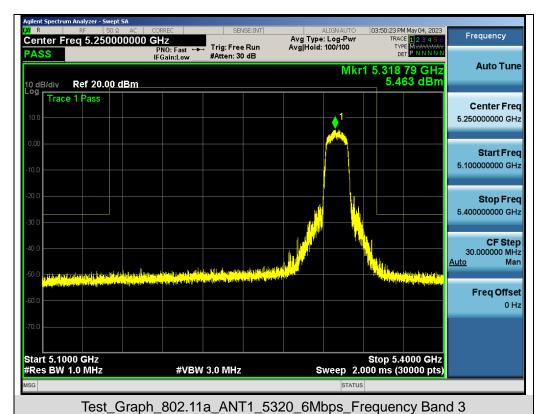









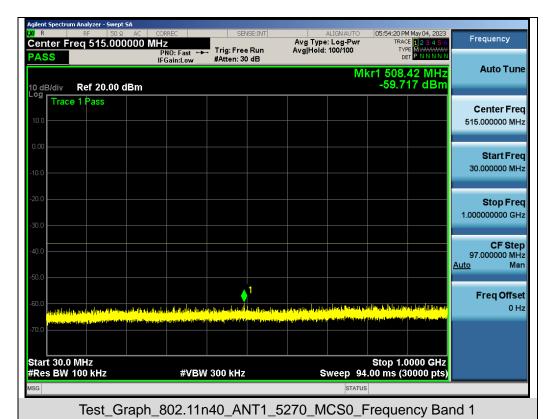








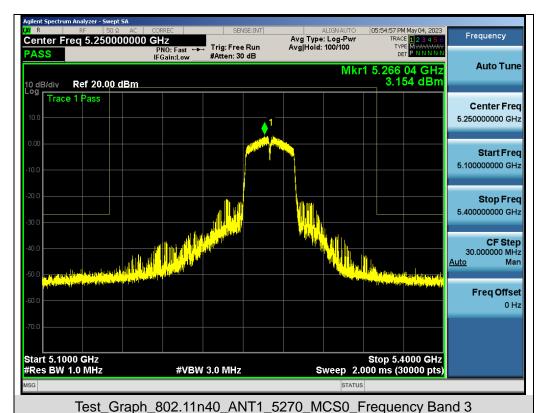




















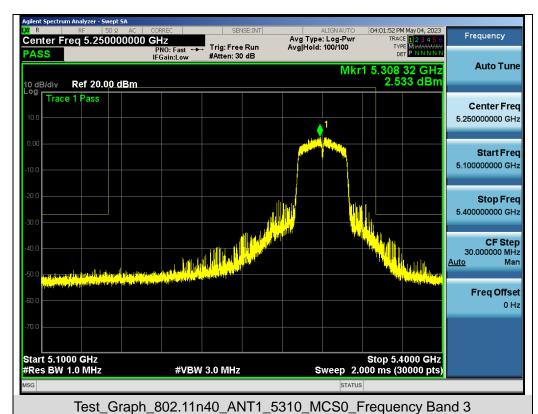

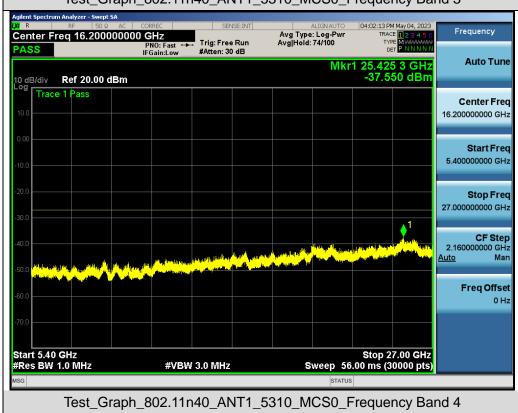






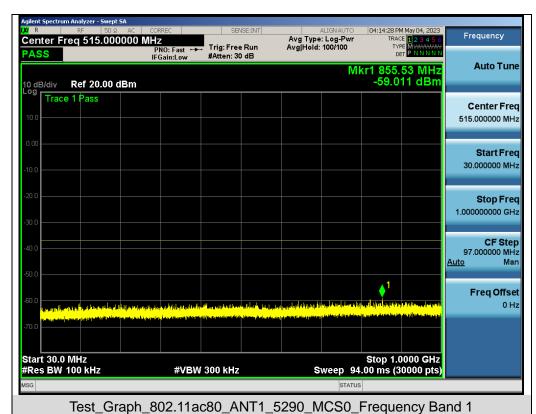












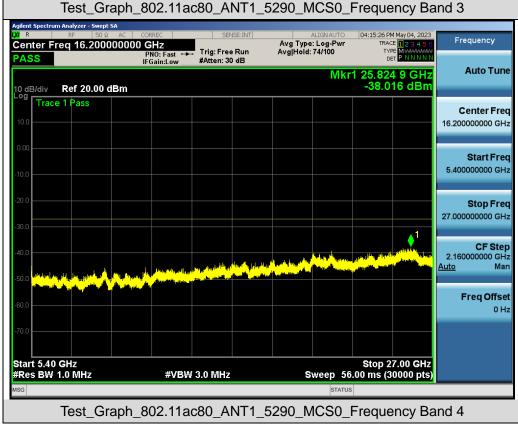








Test Graphs of Spurious Emissions outside of the 5.470-5.725 GHz band for transmitters operating in the 5.470-5.725 GHz band

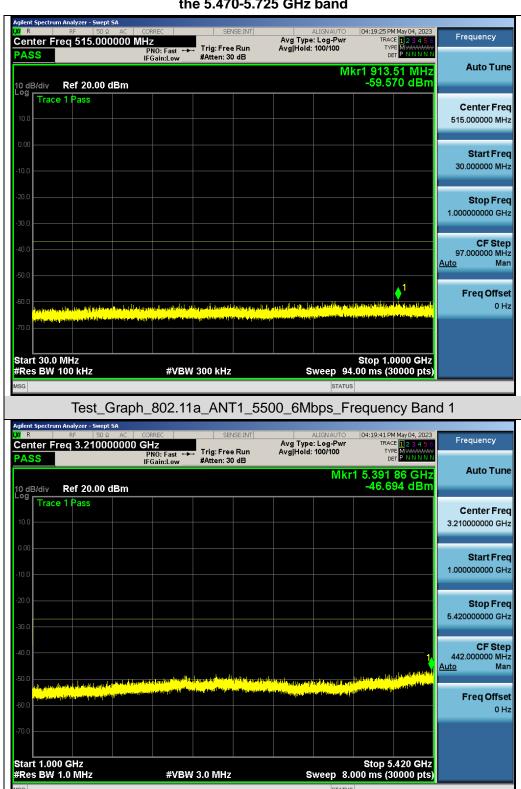







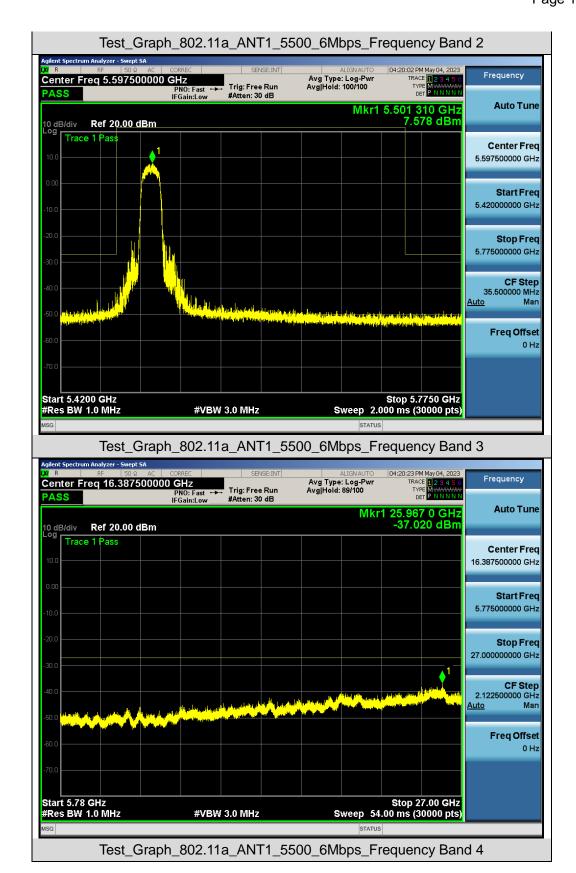







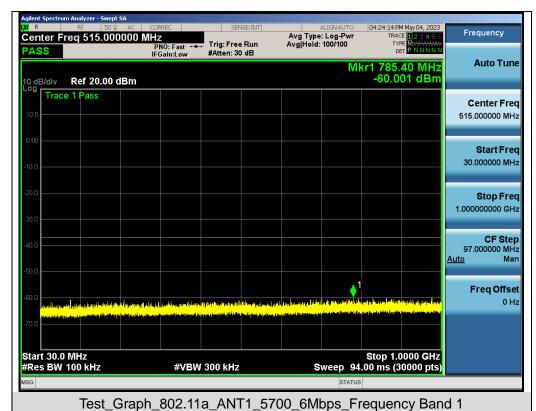


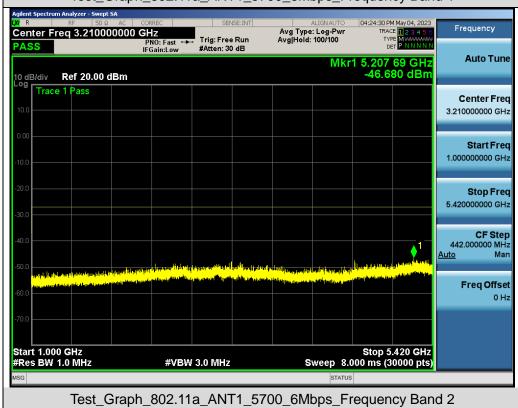







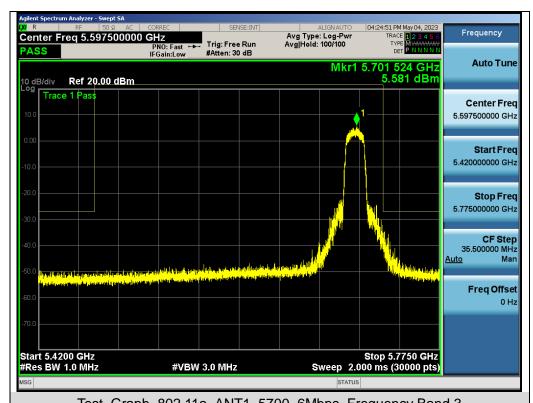

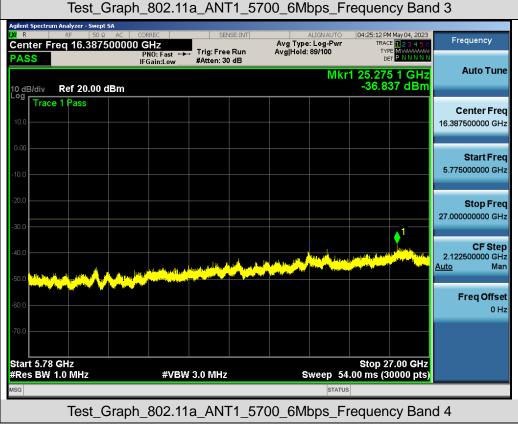







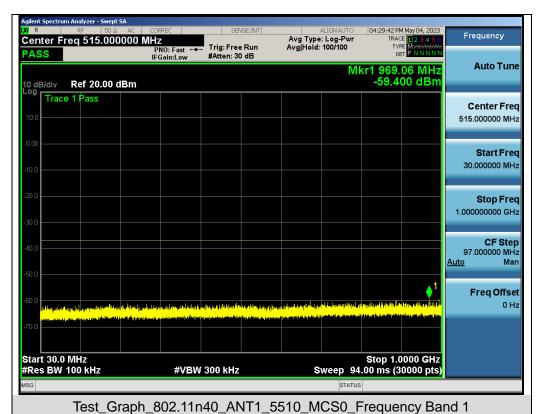








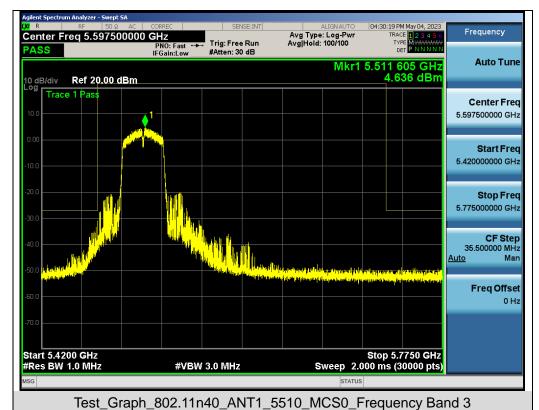













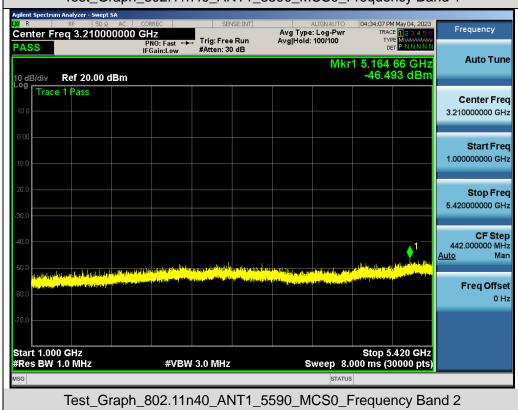







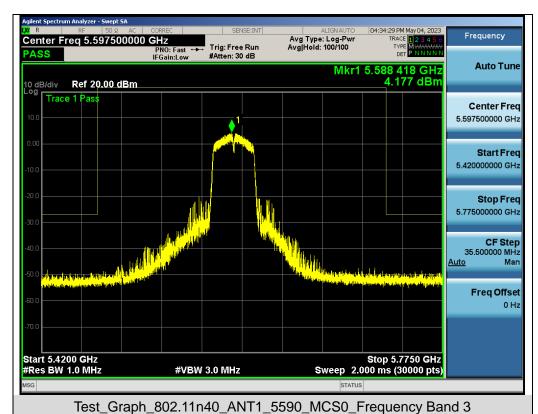

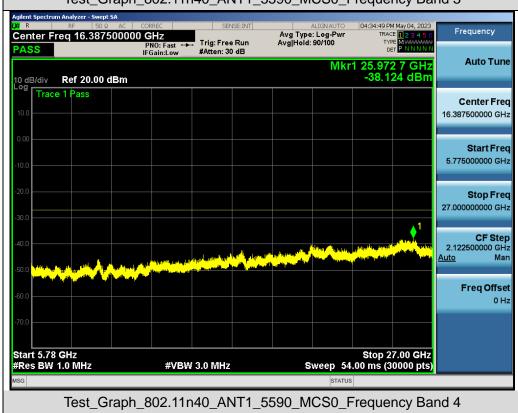







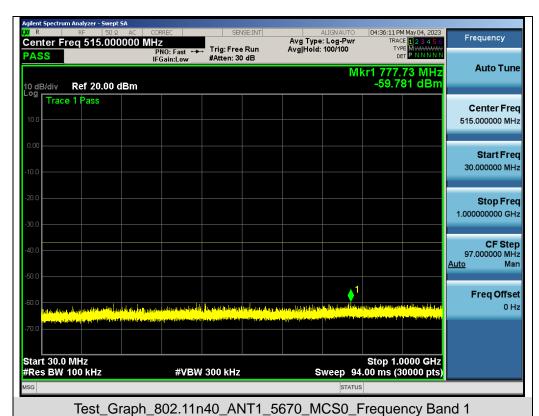










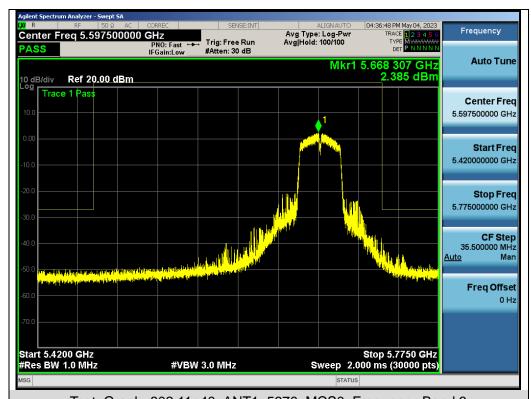


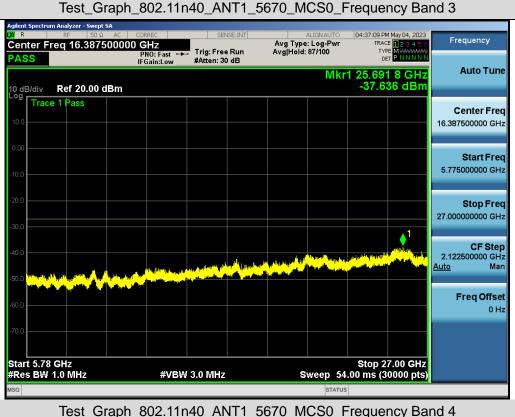







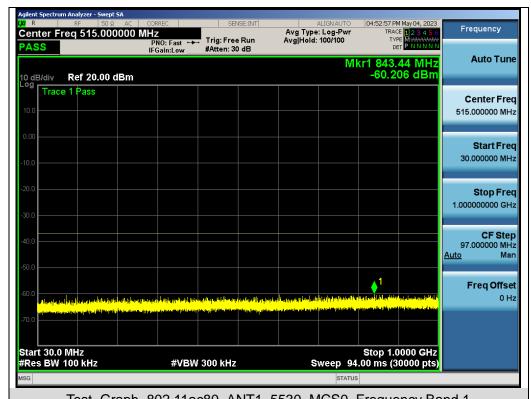

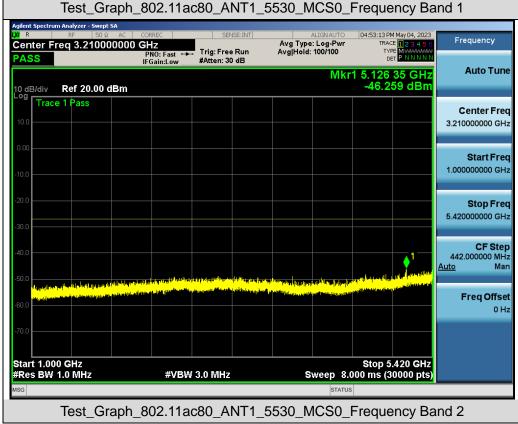






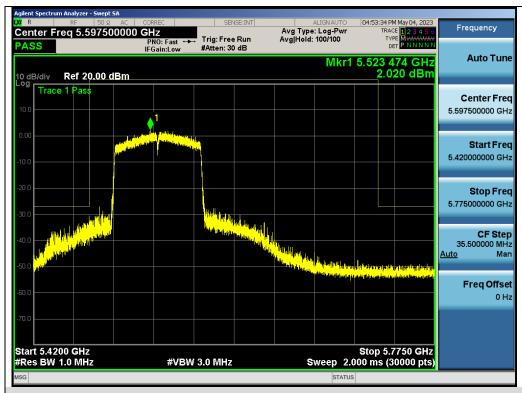





















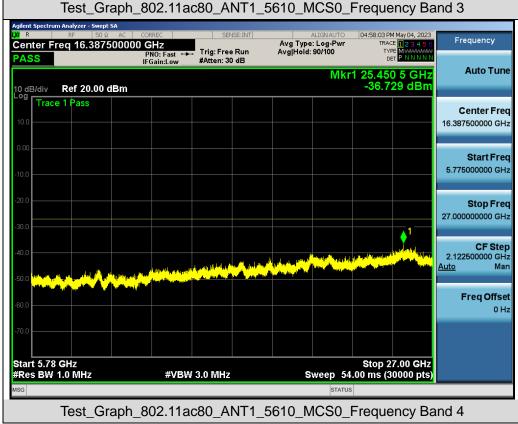








Test Graphs of Spurious Emissions outside of the 5.725-5.85 GHz band for transmitters operating in the 5.725-5.85 GHz band

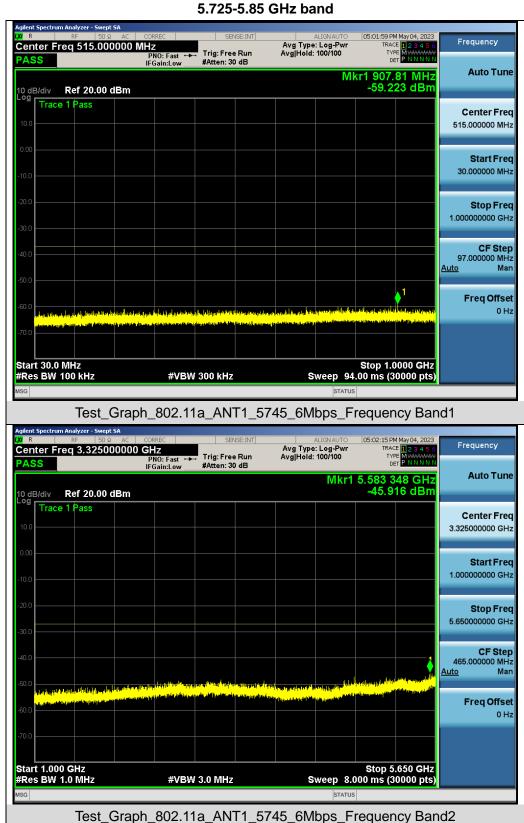







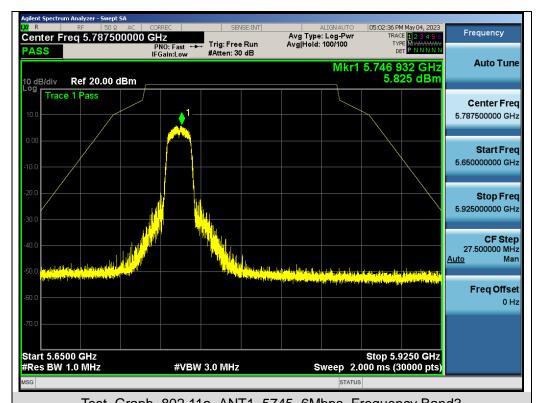

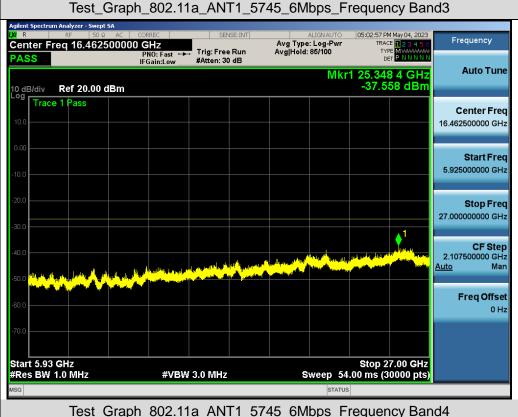







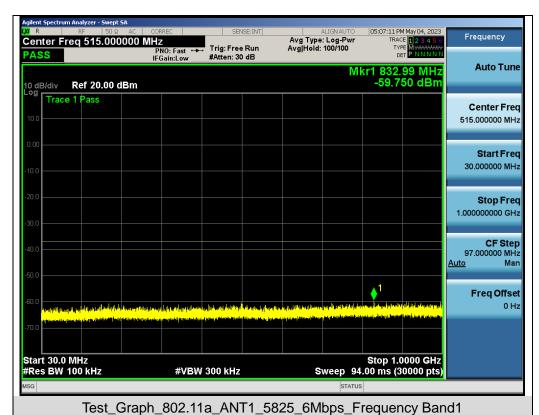










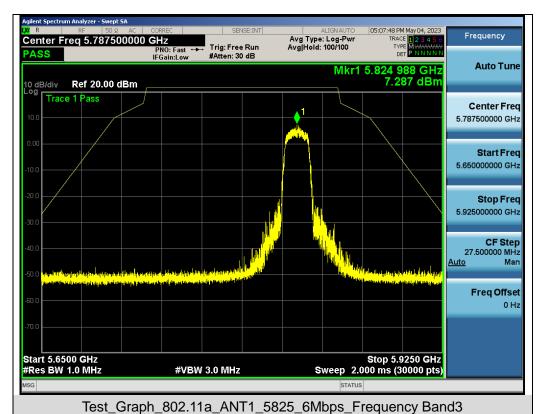

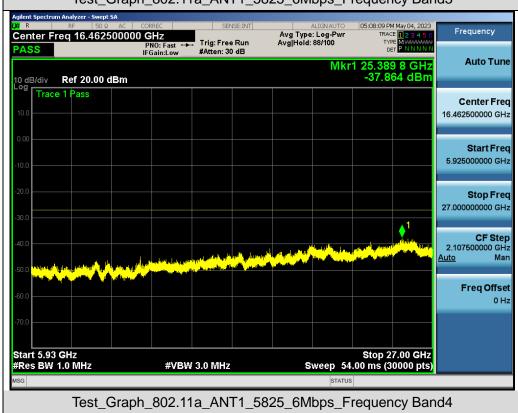







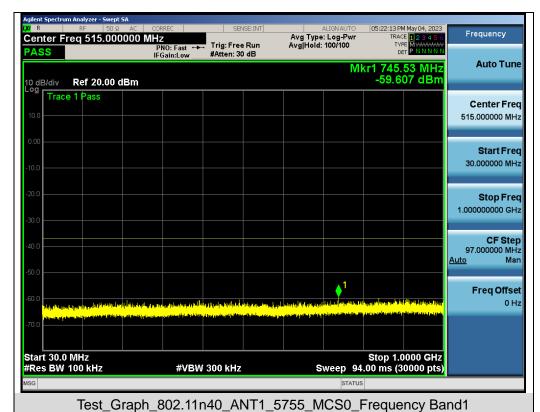










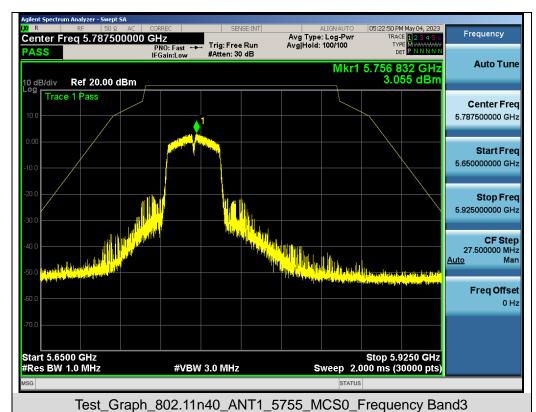

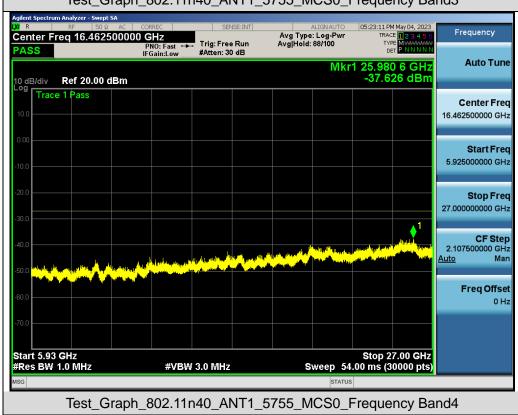







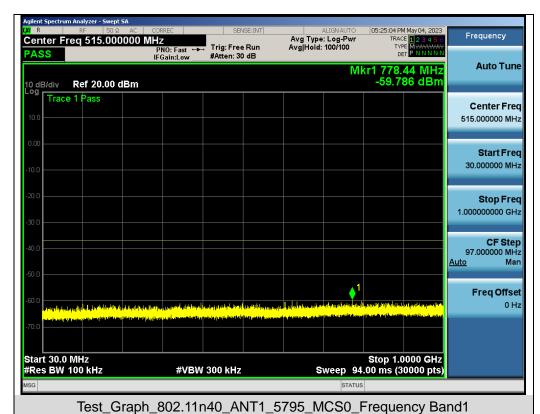









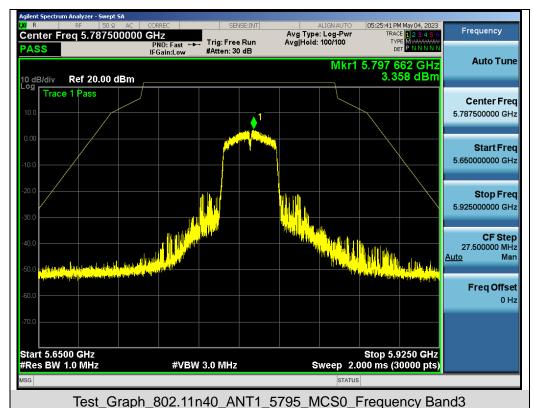

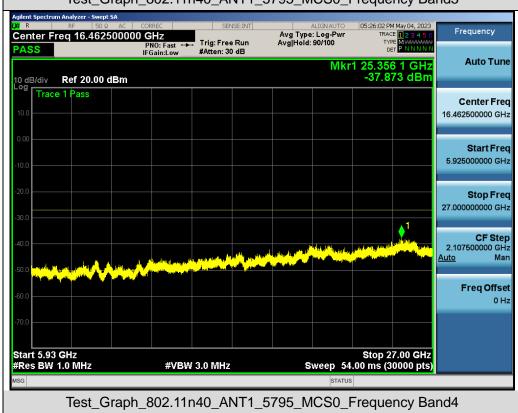
















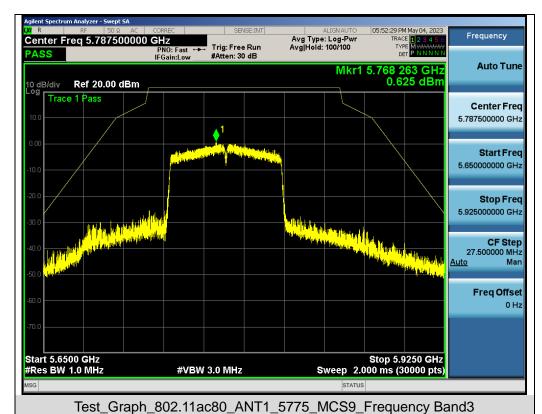

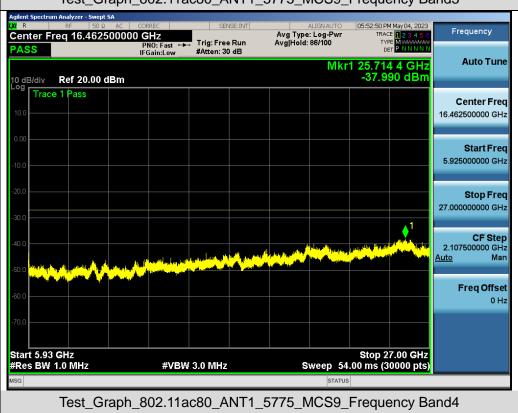



10. RADIATED EMISSION

10.1 LIMITS OF RADIATED EMISSION TEST

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

NOTE:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dBuV/m) = 20 \log Emission level (uV/m)$.
- For frequencies above 1000MHz, the field strength limits are based on average detector, however, the
 peak field strength of any emission shall not exceed the maximum permitted average limits, specified
 above by more than 20dB under any condition of modulation.

	Applicable to	Limit			
Restricted	789033 D02 General UNII Test	Field stre	ength at 3m (dBuV/m)		
bands	Procedures New Rules v02r01	PK: 74	AV: 54		
	Applicable to	EIRP Limit (dBm/MHz)	Equivalent field Strength at 3m (dBuV/m)		
Out of the	FCC 15.407(b)(1)		PK: 68.2		
restricted bands	15.407(b)(2)	PK: -27			
	15.407(b)(3)				
	15.407(b)(4)	See Note 2			

Note 1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

E =
$$\frac{1000000 \sqrt{30 P}}{3}$$
 µV/m, where P is the eirp (Watts).

Note 2: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



Page 142 of 184

10.2 MEASUREMENT PROCEDURE

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Page 143 of 184

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz:

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz:

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz:

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


(4) Procedures for Average Unwanted Emissions Measurements Above 1000MHz:

- RBW = 1 MHz
- VBW = 3 MHz Detector = power averaging (rms), set span/(# of points in sweep) ≥ RBW/2.
- Averaging type = power averaging (RMS)
- The correction factor shall be offset is 10 $\log (1/x)$, where x is the duty cycle.




10.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)


RADIATED EMISSION TEST SETUP 9KHz-30MHz

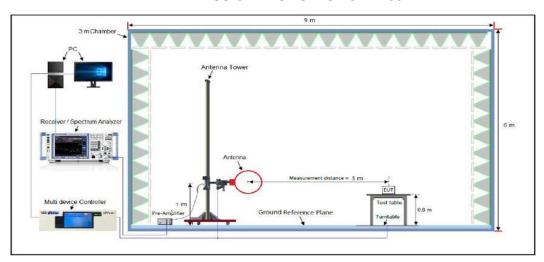

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

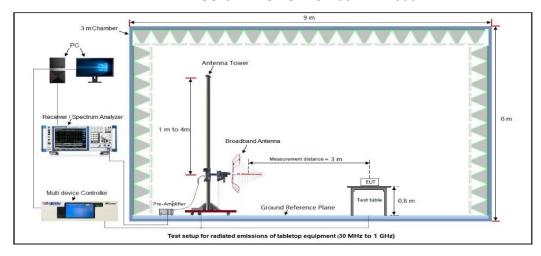

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

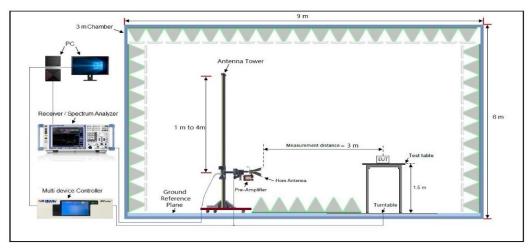

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



10.4 MEASUREMENT RESULT

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated emission from 30MHz to 1000MHz

EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal




NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	98.87	25.01	20.81	43.50	18.49	100	290	Horizontal
2	141.55	25.36	14.80	43.50	18.14	100	200	Horizontal
3	348.16	25.82	20.24	46.00	20.18	100	50	Horizontal
4	464.56	31.57	27.21	46.00	14.43	100	10	Horizontal
5	609.09	33.96	28.38	46.00	12.04	100	290	Horizontal
6	881.66	38.27	33.14	46.00	7.73	100	100	Horizontal


RESULT: PASS



EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

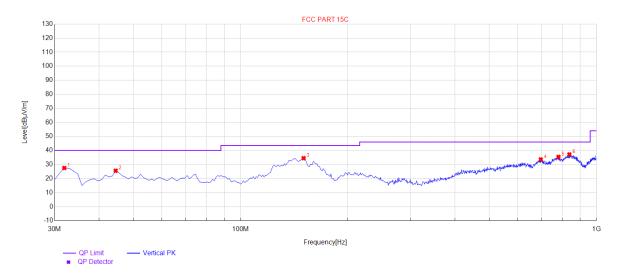


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	31.94	27.53	10.21	40.00	12.47	100	90	Vertical
2	44.55	25.59	12.46	40.00	14.41	100	230	Vertical
3	150.28	34.52	20.91	43.50	8.98	100	330	Vertical
4	697.36	33.62	28.91	46.00	12.38	100	190	Vertical
5	781.75	35.43	30.83	46.00	10.57	100	150	Vertical
6	838.98	37.20	32.48	46.00	8.80	100	300	Vertical






Radiated emission from 30MHz to 1000MHz

EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5745MHz	Antenna	Horizontal

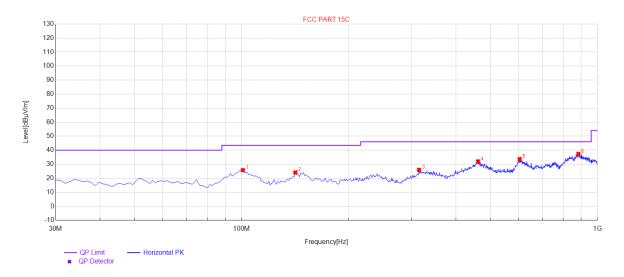


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	100.81	25.78	21.07	43.50	17.72	100	60	Horizontal
2	141.55	24.12	14.80	43.50	19.38	100	240	Horizontal
3	315.18	25.99	20.20	46.00	20.01	100	250	Horizontal
4	461.65	32.01	27.49	46.00	13.99	100	200	Horizontal
5	604.24	33.66	28.57	46.00	12.34	100	340	Horizontal
6	883.6	37.33	32.99	46.00	8.67	100	70	Horizontal

RESULT: PASS





EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5745MHz	Antenna	Vertical

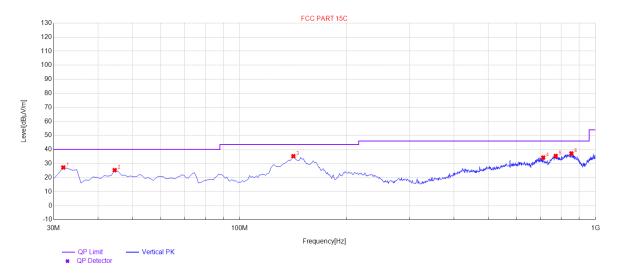

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	31.94	27.19	10.21	40.00	12.81	100	210	Vertical
2	44.55	25.27	12.46	40.00	14.73	100	200	Vertical
3	141.55	35.24	20.04	43.50	8.26	100	240	Vertical
4	712.88	34.25	28.06	46.00	11.75	100	100	Vertical
5	773.02	35.40	30.79	46.00	10.60	100	260	Vertical
6	855.47	37.23	32.11	46.00	8.77	100	220	Vertical

Note: All test channels had been tested. The 802.11a20 at 5180MHz is the worst case and recorded in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.



Page 149 of 184

Radiated emission above 1GHz

EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
10360.042	48.99	9.14	58.13	68.20	-10.07	peak			
15540.063	42.28	10.22	52.50	74.00	-21.50	peak			
15540.063	33.05	10.22	43.27	54.00	-10.73	AVG			
Remark:	Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									
		_							

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
10360.042	48.37	9.14	57.51	68.20	-10.69	peak	
15540.063	41.89	10.22	52.11	74.00	-21.89	peak	
15540.063	32.25	10.22	42.47	54.00	-11.53	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							



Page 150 of 184

EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5200MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type			
10400.042	47.51	9.14	56.65	68.20	-11.55	peak			
15600.063	43.25	10.22	53.47	74.00	-20.53	peak			
15600.063	33.51	10.22	43.73	54.00	-10.27	AVG			
Remark:	 Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
10400.042	48.78	9.14	57.92	68.20	-10.28	peak	
15600.063	42.97	10.22	53.19	74.00	-20.81	peak	
15600.063	32.89	10.22	43.11	54.00	-10.89	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							



Page 151 of 184

EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5240MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
10480.042	48.74	9.27	58.01	68.20	-10.19	peak			
15720.063	42.11	10.38	52.49	74.00	-21.51	peak			
15720.063	32.54	10.38	42.92	54.00	-11.08	AVG			
Remark:	 Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

RADIATED EMISSION ABOVE 1GHZ-Vertical

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
47.97	9.27	57.24	68.20	-10.96	peak		
42.58	10.38	52.96	74.00	-21.04	peak		
33.15	10.38	43.53	54.00	-10.47	AVG		
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							
<u> </u>	47.97 42.58 33.15	47.97 9.27 42.58 10.38 33.15 10.38	47.97 9.27 57.24 42.58 10.38 52.96 33.15 10.38 43.53	47.97 9.27 57.24 68.20 42.58 10.38 52.96 74.00 33.15 10.38 43.53 54.00	47.97 9.27 57.24 68.20 -10.96 42.58 10.38 52.96 74.00 -21.04 33.15 10.38 43.53 54.00 -10.47		



Page 152 of 184

Radiated emission above 1GHz

EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5260MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
10520.051	47.36	9.31	56.67	68.20	-11.53	peak			
15780.033	41.18	10.42	51.60	74.00	-22.40	peak			
15780.033	32.76	10.42	43.18	54.00	-10.82	AVG			
Remark:	Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
10520.051	46.98	9.31	56.29	68.20	-11.91	peak	
15780.033	40.56	10.42	50.98	74.00	-23.02	peak	
15780.033	33.09	10.42	43.51	54.00	-10.49	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							



Page 153 of 184

EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5300MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
10600.025	48.36	9.33	57.69	74.00	-16.31	peak			
10600.025	32.87	9.33	42.20	54.00	-11.80	AVG			
15900.036	47.39	10.44	57.83	74.00	-16.17	peak			
15900.036	33.05	10.44	43.49	54.00	-10.51	AVG			
Remark:	Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10600.025	47.14	9.33	56.47	74.00	-17.53	peak
10600.025	33.25	9.33	42.58	54.00	-11.42	AVG
15900.036	48.26	10.44	58.70	74.00	-15.30	peak
15900.036	32.14	10.44	42.58	54.00	-11.42	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Page 154 of 184

EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5320MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
10640.055	48.74	9.35	58.09	74.00	-15.91	peak			
10640.055	33.69	9.35	43.04	54.00	-10.96	AVG			
15960.042	41.56	10.46	52.02	74.00	-21.98	peak			
15960.042	30.87	10.46	41.33	54.00	-12.67	AVG			
Remark:	Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10640.055	44.89	9.35	54.24	74.00	-19.76	peak
10640.055	30.15	9.35	39.50	54.00	-14.50	AVG
15960.042	40.21	10.46	50.67	74.00	-23.33	peak
15960.042	31.59	10.46	42.05	54.00	-11.95	AVG
Remark:						L
Factor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			



Page 155 of 184

Radiated emission above 1GHz

EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5500MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
11000.024	47.63	9.38	57.01	74.00	-16.99	peak			
11000.024	32.51	9.38	41.89	54.00	-12.11	AVG			
16500.033	48.05	10.51	58.56	68.20	-9.64	peak			
Remark:	Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									
		_							

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
11000.024	49.36	9.38	58.74	74.00	-15.26	peak	
11000.024	34.15	9.38	43.53	54.00	-10.47	AVG	
16500.033	50.02	10.51	60.53	68.20	-7.67	peak	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							



Page 156 of 184

EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5600MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type	
11200.035	46.69	9.38	56.07	74.00	-17.93	peak	
11200.035	32.18	9.38	41.56	54.00	-12.44	AVG	
16800.041	41.55	10.51	52.06	68.20	-16.14	peak	
Remark:	•				•		
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
11200.035	43.36	9.38	52.74	74.00	-21.26	peak			
11200.035	33.81	9.38	43.19	54.00	-10.81	AVG			
16800.041	42.51	10.51	53.02	68.20	-15.18	peak			
Remark:	Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									
_									



Page 157 of 184

EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5700MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
11400.058	46.25	9.41	55.66	74.00	-18.34	peak			
11400.058	33.52	9.41	42.93	54.00	-11.07	AVG			
17100.042	45.05	10.50	55.55	68.20	-12.65	peak			
Remark:	Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

RADIATED EMISSION ABOVE 1GHZ-Vertical

	Factor	Emission Level	Limits	Margin	Value Type		
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
45.96	9.41	55.37	74.00	-18.63	peak		
34.11	9.41	43.52	54.00	-10.48	AVG		
46.15	10.50	56.65	68.20	-11.55	peak		
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							
	45.96 34.11 46.15	45.96 9.41 34.11 9.41 46.15 10.50	45.96 9.41 55.37 34.11 9.41 43.52 46.15 10.50 56.65	45.96 9.41 55.37 74.00 34.11 9.41 43.52 54.00 46.15 10.50 56.65 68.20	45.96 9.41 55.37 74.00 -18.63 34.11 9.41 43.52 54.00 -10.48 46.15 10.50 56.65 68.20 -11.55		



Page 158 of 184

EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5745MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type			
11490.042	48.36	9.42	57.78	74.00	-16.22	peak			
11490.042	31.79	9.42	41.21	54.00	-12.79	AVG			
17253.063	35.84	10.51	46.35	68.20	-21.85	peak			
Remark:	Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									
		_							

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11490.042	48.36	9.42	57.78	74.00	-16.22	peak
11490.042	33.51	9.42	42.93	54.00	-11.07	AVG
17253.063	39.15	10.51	49.66	68.20	-18.54	peak
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Page 159 of 184

EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5785MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
11570.042	46.58	9.42	56.00	74.00	-18.00	peak			
11570.042	33.52	9.42	42.94	54.00	-11.06	AVG			
17355.063	33.56	10.51	44.07	68.20	-24.13	peak			
Remark:	Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
11570.042	48.52	9.42	57.94	74.00	-16.06	peak	
11570.042	34.15	9.42	43.57	54.00	-10.43	AVG	
17355.063	41.06	10.51	51.57	68.20	-16.63	peak	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							



Page 160 of 184

EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5825MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
11650.042	48.15	9.62	57.77	74.00	-16.23	peak
11650.042	31.59	9.62	41.21	54.00	-12.79	AVG
17475.063	37.59	10.75	48.34	68.20	-19.86	peak
Remark:					•	-
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11650.042	48.97	9.62	58.59	74.00	-15.41	peak
11650.042	32.05	9.62	41.67	54.00	-12.33	AVG
17475.063	37.69	10.75	48.44	68.20	-19.76	peak
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Note:


- 1. All test channels had been tested. The 802.11a20 is the worst case and recorded in the test report.
- 2. Other frequencies radiation emission from 1GHz to 40GHz at least have 20dB margin and not recorded in the test report.
- 3. Factor = Antenna Factor + Cable loss Amplifier gain, Margin= Limit-Level.
- 4. The "Factor" value can be calculated automatically by software of measurement system.




Test result for band edge emission at restricted bands 5.150GHz~5.250GHz

EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal


Test Graph for Peak Measurement

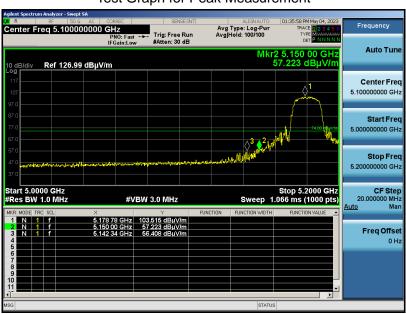

Test Graph for Average Measurement

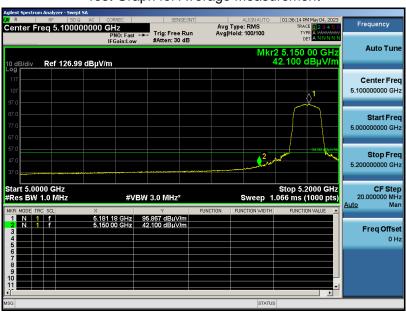


RESULT: PASS







EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

Test Graph for Peak Measurement

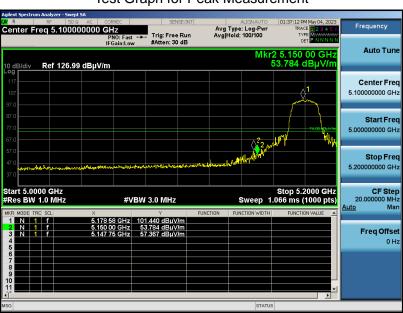

Test Graph for Average Measurement

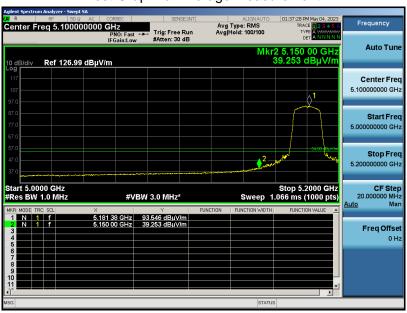








EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Horizontal

Test Graph for Peak Measurement

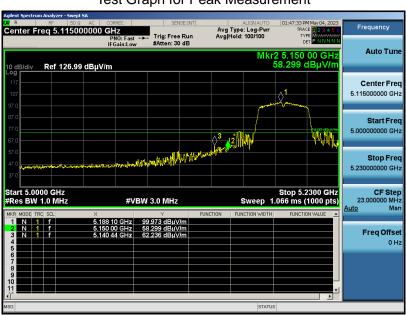

Test Graph for Average Measurement

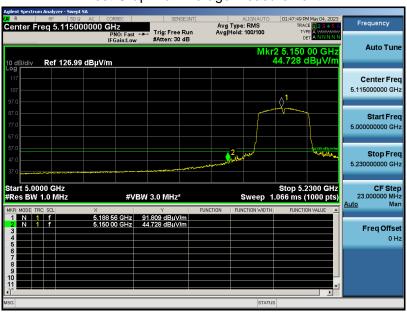







EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

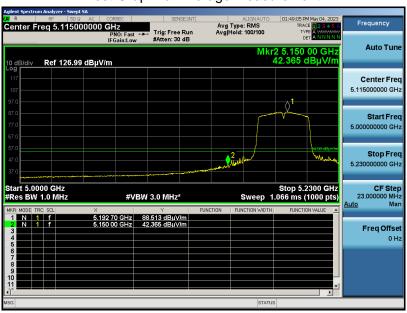






EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5210MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5210MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

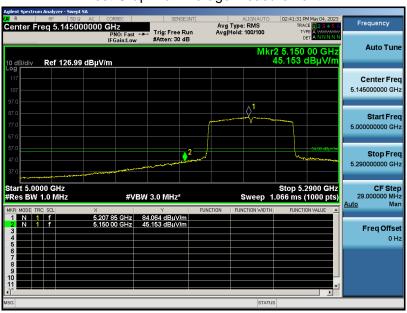



Test result for band edge emission at restricted bands 5.25GHz~5.35GHz

EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5320MHz	Antenna	Horizontal


Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS





EUT	Smart tablet	Model Name	AGM_PAD_P1
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5320MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

