

TEST REPORT

Product Name Model Numbe FCC ID	-	: Mobile Digital Video Recorder : 4816-NVR : 2ANKU-4816-NVR
Prepared for Address	:	SAFETY VISION, LLC 6100 W SAM HOUSTON PKWY N HOUSTON, TX 77041-5113, UNITED STATES OF AMERICA
Prepared by : Address :		EMTEK (SHENZHEN) CO., LTD. Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China
		Tel: (0755) 26954280 Fax: (0755) 26954282
•		ES210118030W02

- Date(s) of Tests : Jan. 25, 2021 to Feb. 27, 2021
- Date of issue : Mar. 3, 2021



TEST RESULT CERTIFICATION 1

Applicant	: SAFETY VISION, LLC
Address	E 6100 W SAM HOUSTON PKWY N HOUSTON, TX 77041-5113, UNITED STATES OF AMERICA
Manufacturer	: SAFETY VISION, LLC
Address	E 6100 W SAM HOUSTON PKWY N HOUSTON, TX 77041-5113, UNITED STATES OF AMERICA
EUT	: Mobile Digital Video Recorder
Model Name	: 4816-NVR
Trademark	: SAFETY VISION

Measurement Procedure Used:

APPLICABLE STANDARDS			
STANDARD TEST RESULT			
FCC 47 CFR Part 15, Subpart E	PASS		

The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Part 15.407

The test results of this report relate only to the tested sample identified in this report.

Date of Test :

Reviewer:

Prepared by:

Jan. 25, 2021 to Feb. 27, 2021 Seventrus

Sewen Guo /Editor

foe Xia

Joe Xia /Supervisor 🍰



Approve & Authorized Signer :

Lisa Wang/Manager



TABLE OF CONTENTS

1	TES	ST RESULT CERTIFICATION	2
2	EUT	TECHNICAL DESCRIPTION	4
3	SUN	IMARY OF TEST RESULT	5
4	TES	T METHODOLOGY	6
	4.1 4.2 4.3	GENERAL DESCRIPTION OF APPLIED STANDARDS MEASUREMENT EQUIPMENT USED DESCRIPTION OF TEST MODES	6
5	FAC	CILITIES AND ACCREDITATIONS	9
	5.1 5.2	FACILITIES LABORATORY ACCREDITATIONS AND LISTINGS	9
6		ST SYSTEM UNCERTAINTY	
7	SET	UP OF EQUIPMENT UNDER TEST	
	7.1 7.2 7.3 7.4 7.5	RADIO FREQUENCY TEST SETUP RADIO FREQUENCY TEST SETUP CONDUCTED EMISSION TEST SETUP BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	11 13 14 14
8	TES	T REQUIREMENTS	
	8.1 8.2 8.3 8.4 8.5 8.6 8.7	BANDWIDTH MEASUREMENT	40 44 62 67 86



Characteristics	Description				
Product	Mobile Digital Video Recorder				
Model Number	4816-NVR				
Sample number	1#				
Wifi Type	ifi Type UNII-1: 5150MHz-5250MHz Band UNII-3 with 5725MHz-5850MHz Band				
WLAN Supported	802.11n(40MHz channel b 802.11ac(20MHz channel 802.11ac(40MHz channel	 ⊠802.11a ⊠802.11n(20MHz channel bandwidth) ⊠802.11n(40MHz channel bandwidth) ⊠802.11ac(20MHz channel bandwidth) ⊠802.11ac(40MHz channel bandwidth) ⊠802.11ac(80MHz channel bandwidth) 			
Data Rate	802.11a:54/48/36/24/18/12/9/6Mbps 802.11n:up to 300 Mbps 802.11ac:up to 867Mbps				
Modulation		OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/n;			
	UNII-1: 5150MHz-5250MHz Band				
Frequency Range	S180-5240MHz for 802.11a; S180-5240MHz for 802.11n(HT20); S180-5240MHz for 802.11ac(HT20);		 ∑5190-5230MHz for 802.11n(HT40); ∑5190-5230MHz for 802.11ac(HT40); ∑5210MHz for 802.11ac(HT80); 		
Frequency Range	UNII-3 with 5725MHz-585	UNII-3 with 5725MHz-5850MHz Band			
	 ⊠5745-5825MHz for 802.11a; ⊠5745-5825MHz for 802.11n(HT20); ⊠5745-5825MHz for 802.11ac(HT20); 		 □ 5755-5795MHz for 802.11n(HT40); □ 5755-5795MHz for 802.11ac(HT40); □ 5775MHz for 802.11ac(HT80); 		
TPC Function	Applicable		⊠Not Applicable		
Antenna Type	External Antennna				
Antenna Gain 2 dBi					
Transmit Power	Output Power (Max.) for UNII-1	13.91dBm			
	Output Power (Max.) for UNII-3	13.06dBm			
Power supply	DC 8-36V				

2 EUT TECHNICAL DESCRIPTION

Note: for more details, please refer to the User's manual of the EUT.

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

Report No. ES210118030W02



3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark		
15.407 (a)	99% , 6dB and 26dB Bandwidth	PASS			
15.407 (e)	35%, OUD and 200D Bandwidth	FA00			
15.407 (a)	Maximum Conducted Output Power	PASS			
15.407 (a)	Peak Power Spectral Density	PASS			
15.407 (b)	Radiated Spurious Emission	PASS			
15.407(g)	Frequency Stability	PASS			
15.407 (b)(6)	Power Line Conducted Emission	PASS			
15.207		FA35			
15.407(a)	Antenna Application	PASS			
15.203		FA00			
NOTE1: N/A (Not	Applicable)				
Remark: The test method refers to KDB 789033 and FCC 47 CFR Part 2, Subpart J					

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2ANKU-4816-NVR filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.



4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 15, Subpart E

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT	MFR	MODEL	SERIAL	LASTCAL.	DUE CAL.
TYPE		NUMBER	NUMBER		
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/16/2020	05/15/2021
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/16/2020	05/15/2021
50Ω Coaxial Switch	Anritsu	MP59B	M20531	05/16/2020	05/15/2021
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/16/2020	05/15/2021
Voltage Probe	Rohde & Schwarz	TK9416	N/A	05/16/2020	05/15/2021
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	05/16/2020	05/15/2021

4.2.2 Radiated Emission Test Equipment

EQUIPMENT	MFR	MODEL	SERIAL	LAST CAL.	DUE CAL.
TYPE		NUMBER	NUMBER		
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/16/2020	05/15/2021
Pre-Amplifier	HP	8447D	2944A07999	05/16/2020	05/15/2021
Bilog Antenna	Schwarzbeck	VULB9163	142	05/16/2020	05/15/2021
Loop Antenna	ARA	PLA-1030/B	1029	05/16/2020	05/15/2021
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/16/2020	05/15/2021
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/16/2020	05/15/2021
Cable	Schwarzbeck	AK9513	ACRX1	05/16/2020	05/15/2021
Cable	Rosenberger	N/A	FP2RX2	05/16/2020	05/15/2021
Cable	Schwarzbeck	AK9513	CRPX1	05/16/2020	05/15/2021
Cable	Schwarzbeck	AK9513	CRRX2	05/16/2020	05/15/2021

4.2.3 Radio Frequency Test Equipment

EQUIPMENT	MFR	MODEL	SERIAL	LASTCAL.	DUE CAL.
TYPE		NUMBER	NUMBER		
Spectrum Analyzer	Agilent	E4407B	88156318	05/16/2020	05/15/2021
Signal Analyzer	Agilent	N9010A	My53470879	05/16/2020	05/15/2021
Power meter	Anritsu	ML2495A	0824006	05/16/2020	05/15/2021
Power sensor	Anritsu	MA2411B	0738172	05/16/2020	05/15/2021
Temperature & Humidity Chamber	YINHE	SDH0525F	2003003	05/16/2020	05/15/2021

Remark: Each piece of equipment is scheduled for calibration once a year.



4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Wifi 5G with U-NII - 1

Frequency and Channel list for 802.11a/n (HT20)/802.11ac (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220		
40	5200	48	5240		

Frequency and Channel list for 802.11n (HT40)/ 802.11ac (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190				
46	5230				

Frequency and Channel list for 802.11ac Wave2 (HT80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210				

Test Frequency and Channel for 802.11a/n (HT20)/802.11ac (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5200	48	5240

Test Frequency and channel for 802.11n (HT40)/ 802.11ac (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	N/A	N/A	46	5230

Test Frequency and channel for 802.11ac Wave2 (HT80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	N/A	N/A	N/A	N/A

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

Report No. ES210118030W02



🛛 Wifi 5G with U-NII -3

Frequency and Channel list for 802.11a/n (HT20)/802.11ac (HT20):

r requeries and								
Channel	Frequency	Channel	Frequency	Channel	Frequency			
	(MHz)	Channel	(MHz)	Channel	(MHz)			
149	5745	157	5785	165	5825			
153	5765	161	5805					

Frequency and Channel list for 802.11n (HT40)/ 802.11ac (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755				
159	5795				

Frequency and Channel list for 802.11ac (HT80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775				

Test Frequency and Channel for 802.11a/n (HT20)/802.11ac (HT20):

Lowest Frequency		Middle F	Middle Frequency		st Frequency
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825

Test Frequency and channel for 802.11n (HT40)/ 802.11ac (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	N/A	N/A	159	5795

Test Frequency and channel for 802.11ac (HT80):

Lowest Frequency		Middle F	Middle Frequency		st Frequency
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775				, ,



5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Building 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description	
EMC Lab.	: Accredited by CNAS
	The Certificate Registration Number is L2291.
	The Laboratory has been assessed and proved to be in compliance with
	CNAS-CL01 (identical to ISO/IEC 17025:2017)
	Accredited by FCC
	Designation Number: CN1204
	Test Firm Registration Number: 882943
	Accredited by A2LA
	The Certificate Number is 4321.01.
	Accredited by Industry Canada
	The Conformity Assessment Body Identifier is CN0008
Name of Firm	: EMTEK (SHENZHEN) CO., LTD.
Site Location	: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China



6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	±1x10^-5
Maximum Peak Output Power Test	±1.0dB
Conducted Emissions Test	±2.0dB
Radiated Emission Test	±2.0dB
Power Density	±2.0dB
Occupied Bandwidth Test	±1.0dB
Band Edge Test	±3dB
All emission, radiated	±3dB
Antenna Port Emission	±3dB
Temperature	±0.5°C
Humidity	±3%


Measurement Uncertainty for a level of Confidence of 95%



7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m.The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


Above 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:

(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

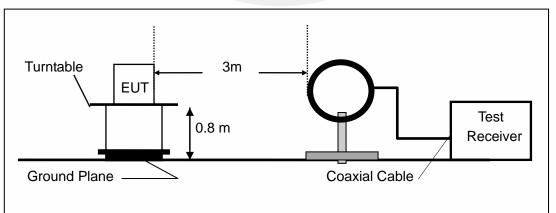

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn


Report No. ES210118030W02



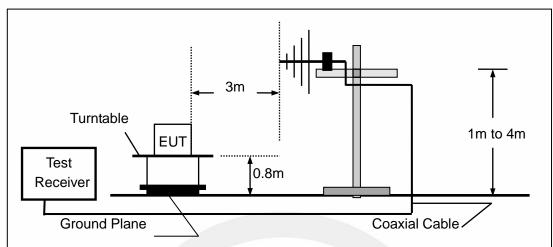

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

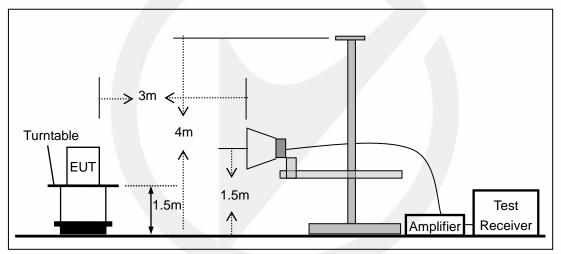




7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.


Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

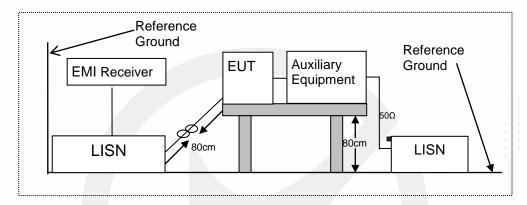



7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

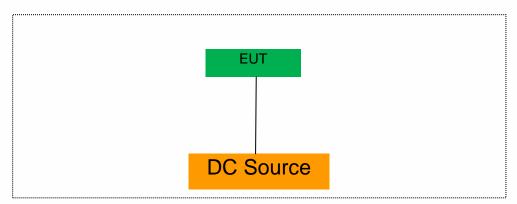

7.5 SUPPORT EQUIPMENT

EUT Cable List and Details						
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite			
1	1	1	/			

Auxiliary Cable List and De	tails		
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	1	/

Auxiliary Equipment List ar	nd Details		
Description	Manufacturer	Model	Serial Number
Notebook	acer	ZR1	LXTECOCO76643158 372500

Notes:

1.All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.

2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



8 TEST REQUIREMENTS 8.1 BANDWIDTH MEASUREMENT

8.1.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C According to FCC Part 15.407(a)(3) for UNII Band III According to FCC Part 15.407(e) for UNII Band III According to 789033 D02 Section II(C) According to 789033 D02 Section II(D)

8.1.2 Conformance Limit

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.1.4 Test Procedure

According to 789033 D02 v02r01 section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.

e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋网址:Http://www.emtek.com.cn邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

a) Set RBW = 100 kHz.

b) Set the video bandwidth (VBW) \geq 3 \times RBW.

c) Detector = Peak.

d) Trace mode = max hold.

e) Sweep = auto couple.

f) Allow the trace to stabilize.

g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v01r02 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.

2. Set span = 1.5 times to 5.0 times the OBW.

3. Set RBW = 1 % to 5 % of the OBW

4. Set VBW \geq 3 • RBW

5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.

6. Use the 99 % power bandwidth function of the instrument (if available).

7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.




8.1.5 Test Results


5150-5250MHz


Test Mode		hannel Hz	26 dB Bandwidth MHz	99% Bandwidth MHz	Verdict
	CH36	5180	21.96	16.886	Pass
802.11a	CH40	5200	23.69	16.955	Pass
	CH48	5240	21.95	16.918	Pass
	CH36	5180	27.33	17.903	Pass
802.11n-HT20	CH40	5200	21.86	17.896	Pass
	CH48	5240	25.43	17.902	Pass
	CH36	5180	22.55	17.843	Pass
802.11ac(HT20)	CH40	5200	22.23	17.810	Pass
	CH48	5240	23.48	17.844	Pass
000 44 a LIT 40	CH38	5190	62.02	36.649	Pass
802.11n-HT40	CH46	5230	70.11	37.188	Pass
802 11 co(UT 40)	CH38	5190	65.10	36.778	Pass
802.11ac(HT40)	CH46	5230	73.89	37.172	Pass
802.11ac(HT80)	CH42	5210	136.0	76.664	Pass



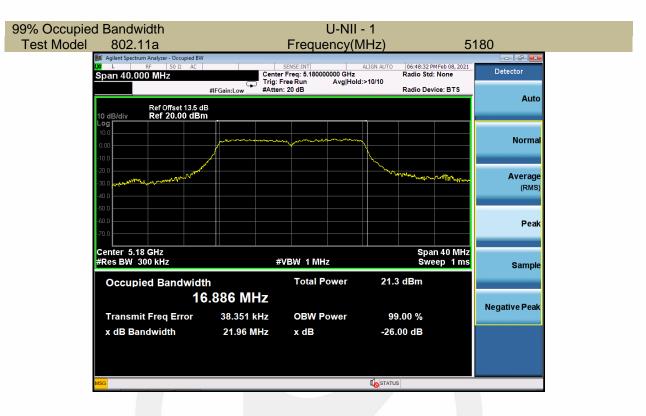

99% Occupied Bandwidth Test Model 802.11a



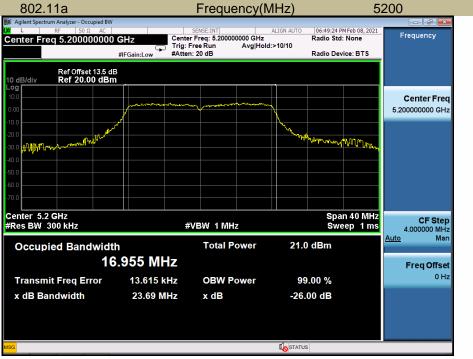



深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

Report No. ES210118030W02

Page 18 of 88



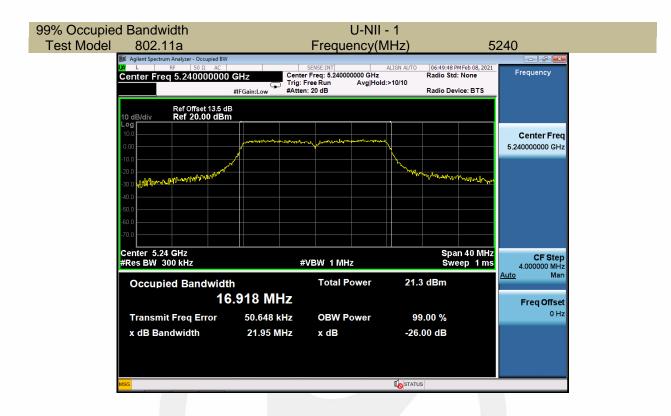

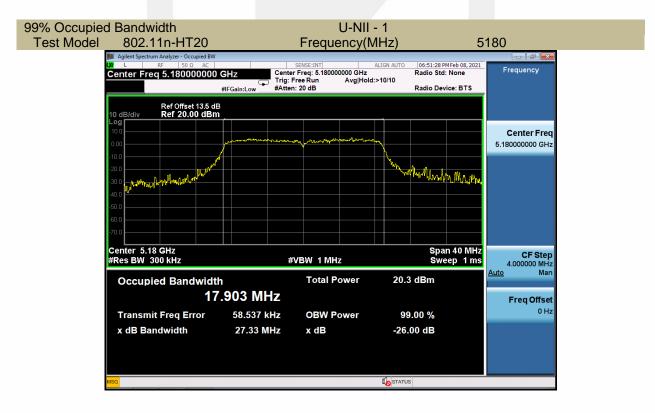


Report No. ES210118030W02

Page 19 of 88






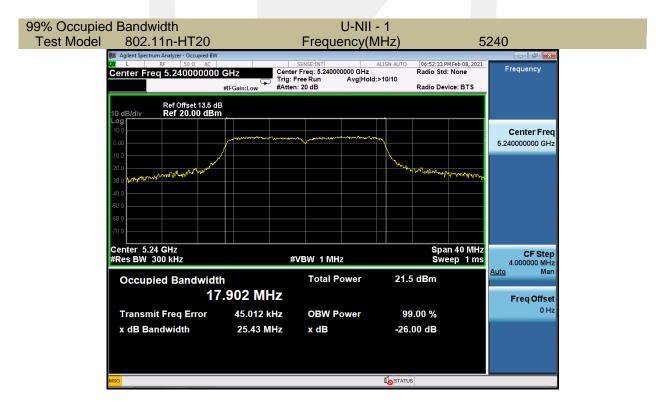


Report No. ES210118030W02


Page 20 of 88



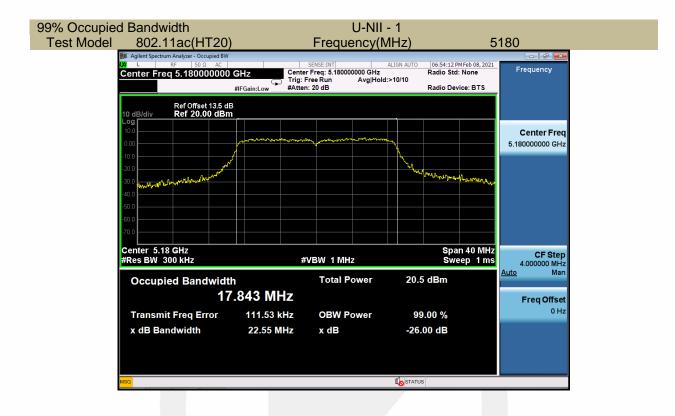

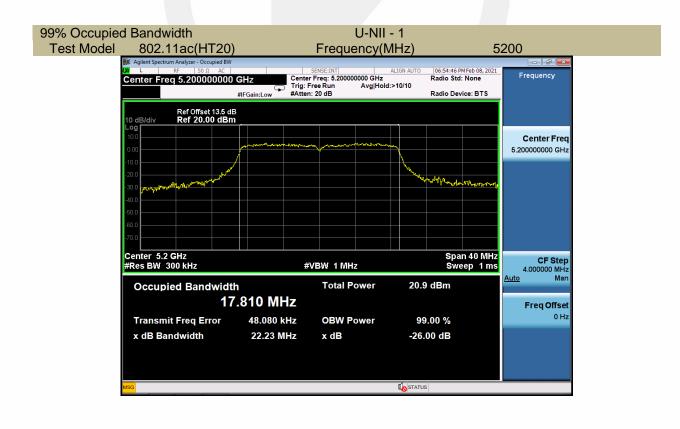




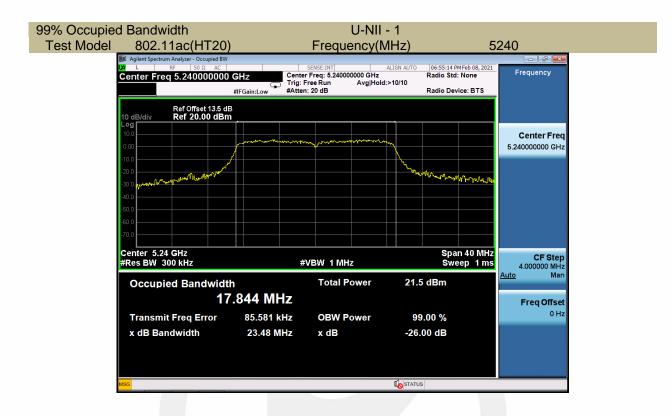


ie al Deus alvuialth		LINU	4		1
ccupied Bandwidth Model 802.11n-HT40	h	U-NII Frequency(N		5.	190
Agilent Spectrum Analyzer - Occupie		T Tequency(ii	vii i <i>z)</i>	5	190 - J - E
び L RF 50 Ω / VBW 2.0000 MHz	Cente	SENSE:INT Freq: 5.190000000 GHz	Radio	31 PM Feb 08, 2021 Std: None	BW
		Free Run Avg Hold n: 20 dB		Device: BTS	Res BV
Ref Offset 13					510.00 kH Auto <u>Mar</u>
10 dB/div Ref 20.00 d Log	IBm				
10.0		when when a shaffer to all all all and	mu		Video BV 2.0000 MH
-10.0					Auto <u>Ma</u> i
-20.0	Kent		www.unulumurma	and approximation	
30.0					
-40.0					
-60.0					
-70.0					
Center 5.19 GHz #Res BW 510 kHz	#	VBW 2 MHz		pan 80 MHz weep 1 ms	Filter Type
Occupied Bandw	idth	Total Power	22.6 dBm		Gaussian
	36.649 MHz				
Transmit Freq Error	151.76 kHz	OBW Power	99.00 %		
x dB Bandwidth	62.02 MHz	x dB	-26.00 dB		
MSG			STATUS		



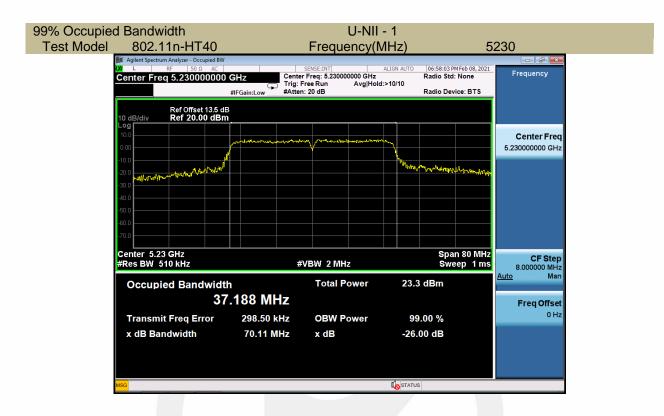

st Model 802.11ac(HT40) Frequency(MHz) 5190	Occupied Bandwidth	U-NII - 1		
With Line Ref SP & SNGENTIT ALLOR AUTO 06:59:25 PMEeb 08:2021 Center Freq 5.190000000 GHz Center freq 5.19000000 GHz Radio Std: None Trig: Free Run Avg Hold:>10/10 Radio Device: BTS Ref Offset 13.5 dB Center freq 5.19000000 GHz Center Free S0.9 Action Std: None 10 dB/div Ref Offset 13.5 dB Center Free S0.9 Action Std: None 10 dB/div Ref Offset 13.5 dB Center Free S0.9 Action Std: None 10 dB/div Ref Offset 13.5 dB Center Free S0.9 Action Std: None 10 dB/div Ref Offset 13.5 dB Std: None 10 Genter free S0.9 Action Std: None Std: None 10 Genter S0.9 Action Std: None Std: None 10.0 Genter S0.9 Action Std: None Std: None			:) 5	190
10 dB/div Ref 20.00 dBm 20 db/div Ref 20.00 dBm	M L RF 50 Ω AC Center Freq 5.190000000 GHz	Center Freq: 5.190000000 GHz Trig: Free Run Avg Hold:>10/10	Radio Std: None	Frequency
Image: Constraint of the second state of the second sta	10 dB/div Ref 20.00 dBm	the main and a second of the s		Center Freq 5.19000000 GHz
200 Center 5.19 GHz Span 80 MHz Span 80 MHz #Res BW 510 kHz #VBW 2 MHz Sweep 1 ms Occupied Bandwidth Total Power 23.0 dBm 36.778 MHz Freq Offset Transmit Freq Error 206.55 kHz OBW Power 99.00 %	-20.0 -20.0 -30.0 -40.0		Martal Andrew State Control Shares	
Occupied Bandwidth Total Power 23.0 dBm 36.778 MHz Freq Offset Transmit Freq Error 206.55 kHz OBW Power 99.00 %	-70.0 Center 5.19 GHz	#VBW 2 MHz		CF Step 8.00000 MHz
Transmit Fred Error 200.55 KHZ OBW Power 99.00%	36.778	3 MHz		Freq Offset
x dB Bandwidth 65.10 MHz x dB -26.00 dB				0112
MSG	MSG		STATUS	



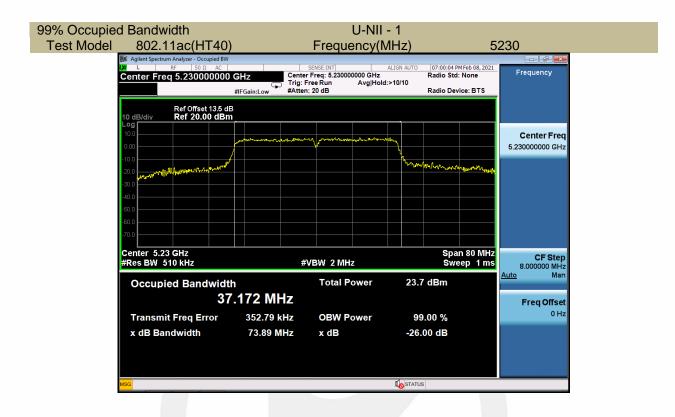


Occupie	ed&26dB E	Emission Ba	andwidth		U-NII - 1			
est Model	802.1	1ac 80		Freque	ency(MH	z)	5	210
			Trig	SENSE:INT nter Freq: 5.21000 g: Free Run ten: 20 dB		Radio 9 /10	19 AM Feb 09, 2021 Std: None Device: BTS	Trace/Detector
	10 dB/div	Ref Offset 13.5 dB Ref 20.00 dBm						
	Log 10.0 0.00	r	and the state of t	mar and a second				Clear Write
	-10.0 -20.0	montallipulation				-	mannan	
	-30.0							Average
	-50.0 -60.0							Max Hold
	-70.0 Center 5.21						an 160 MHz	
	#Res BW 11	d Bandwidth		#VBW 3 MH: Total P		25.0 dBm	weep 1ms	Min Hold
			664 MHz					Detector Peak▶
	Transmit	Freq Error	593.01 kHz	OBW P	ower	99.00 %		Auto <u>Man</u>
	x dB Ban	dwidth	136.0 MHz	x dB		-26.00 dB		
	MSG				Ľ.	STATUS		




5725-5850MHz


Test Mode		Shannel Hz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit kHz
	CH149	5745	16.35	16.793	≥500
802.11a	CH157	5785	16.34	16.732	≥500
	CH165	5825	16.35	16.838	≥500
	CH149	5745	17.13	17.795	≥500
802.11n-HT20	CH157	5785	17.29	17.771	≥500
	CH165	5825	17.09	17.774	≥500
	CH149	5745	17.10	17.898	≥500
802.11ac(HT20)	CH157	5785	16.70	17.780	≥500
	CH165	5825	17.35	17.887	≥500
000 11 m LIT 40	CH151	5755	35.36	36.470	≥500
802.11n-HT40	CH159	5795	35.53	36.496	≥500
902 11 cc/UT 40)	CH151	5755	35.42	36.581	≥500
802.11ac(HT40)	CH159	5795	35.45	36.543	≥500
802.11ac(HT80)	CH155	5775	75.37	75.798	≥500



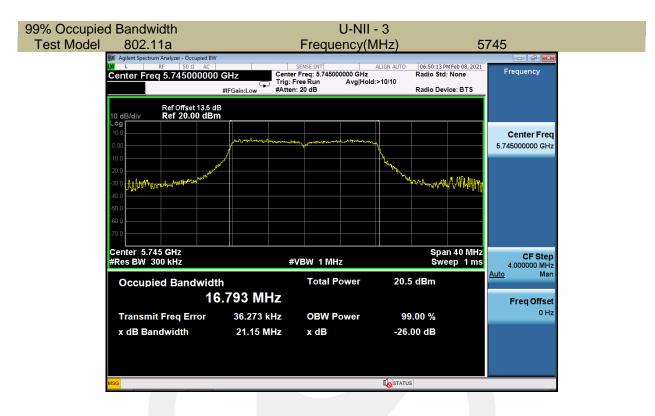

99% Occupied Bandwidth Test Model 802.11a




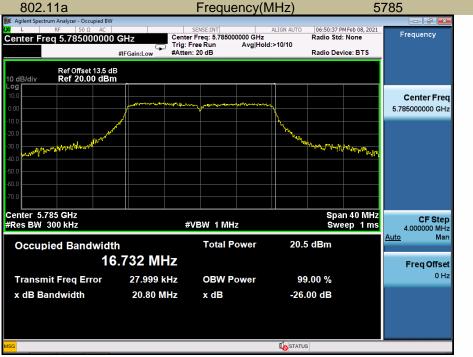


深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

Report No. ES210118030W02



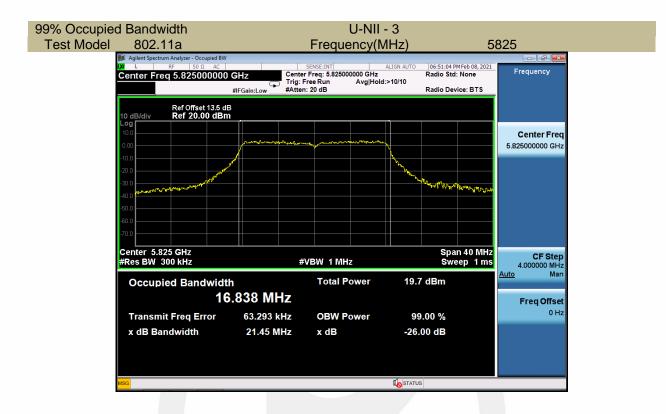

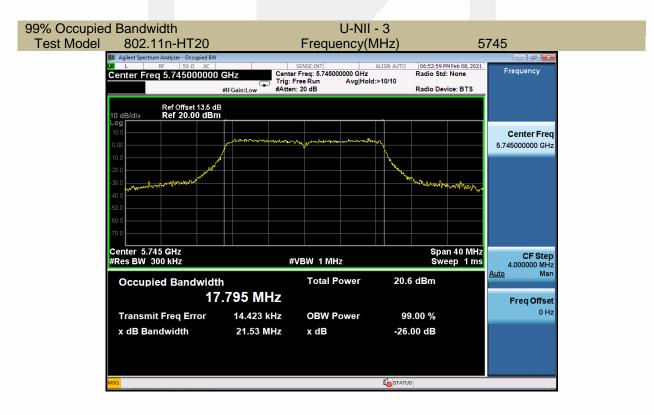






% Occupied Bandwidth Test Model 802.11n-HT20		U-NII Frequency(N		58	25
Marian Agrient Spectrum Analyzer - Occupied BW Maria L RF 50Ω AC Center Freq 5.8250000000	Trig: I	SENSE:INT r Freq: 5.825000000 GHz Free Run Avg Hold n: 20 dB	Radio S :>10/10	4 PM Feb 08, 2021 td: None evice: BTS	Frequency
Ref Offset 13.5 dE 10 dB/div Ref 20.00 dBm 10 0 0.00					Center Freq 5.82500000 GHz
-10.0 -20.0 -30.0 -40.0 -50.0 -60.0			A A A A A A A A A A A A A A A A A A A	un north	
-70.0 Center 5.825 GHz #Res BW 300 kHz	#	VBW 1 MHz	Sp St	oan 40 MHz weep 1 ms	CF Step 4.000000 MHz Auto Man
Occupied Bandwidt	ո .774 MHz	Total Power	19.7 dBm		Freq Offset
Transmit Freq Error x dB Bandwidth	73.673 kHz 21.87 MHz	OBW Power x dB	99.00 % -26.00 dB		0 Hz
MSG			STATUS		

Report No. ES210118030W02




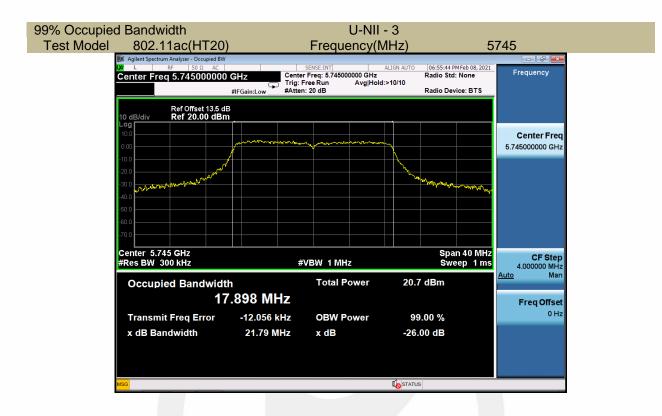

Occupied Bandwidth		U-NII	- 3		
Model 802.11ac(HT20)		Frequency(MHz)	5	785
Gillent Spectrum Analyzer - Occupied BW K L R F So A Center Freq 5.785000000 €	Trig: F	SENSE:INT Freq: 5.785000000 GHz Free Run Avg Hold : 20 dB	Rac d:>10/10	:56:13 PM Feb 08, 2021 dio Std: None dio Device: BTS	Frequency
Ref Offset 13.5 dB 10 dB/div Ref 20.00 dBm					Center Freq
0.00 -10.0 -20.0	and the second s	and a second	where the second s		5.785000000 GHz
-30.0 -40.0 -50.0				Manage Hanned Bliver	
600				Span 40 MHz	
#Res BW 300 kHz	#	VBW 1 MHz		Sweep 1 ms	CF Step 4.000000 MHz
Occupied Bandwidth 17.	780 MHz	Total Power	20.7 dE	3m	<u>Auto</u> Man Freq Offset
Transmit Freq Error x dB Bandwidth	25.902 kHz 21.97 MHz	OBW Power x dB	99.00 -26.00 d		0 Hz
MSG			To STATUS		


Report No. ES210118030W02



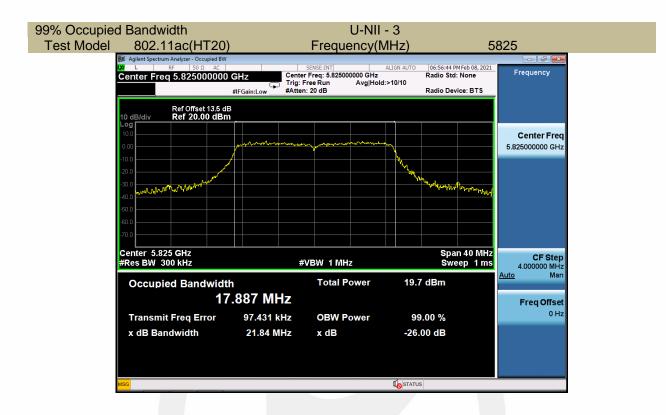


💓 Agilent S LXI L	2.11n-HT40 pectrum Analyzer - Occupied BW RF 50 Ω AC Freq 5.7550000000	Trig: I	Frequency(N sense:INT r Freq: 5.755000000 GHz Free Run Avg Hold n: 20 dB	ALIGN AUTO	06:58:29 PM Feb 08, 2021 Radio Std: None Radio Device: BTS	Frequency
10 dB/di Log 10.0	Ref Offset 13.5 dB	a and a second and a second and a second	m juana mana ang kala	- m		Center Freq 5.755000000 GHz
-10.0 -20.0 -30.0 -40.0 -50.0 -60.0 -70.0	Well-Weney-Nation News				hannhalistennatur	
	5.755 GHz W 510 kHz	#	VBW 2 MHz		Span 80 MHz Sweep 1 ms	8.000000 MHz
Occ	upied Bandwidth 36	י .470 MHz	Total Power	22.7	dBm	<u>Auto</u> Man Freq Offset
	smit Freq Error Bandwidth	107.52 kHz 46.14 MHz	OBW Power x dB		.00 % 00 dB	0 Hz
MSG				I ostatus	6	



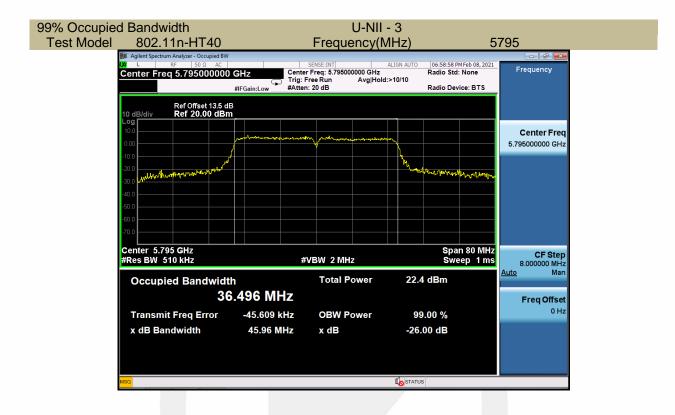


% Occupie	ed Bandwidth		U-NII	- 3		
Test Model	802.11ac(HT40)		Frequency(N	MHz)	57	755
	Agilent Spectrum Analyzer - Occupied BW					- 6 -
	Center Freq 5.755000000 G	Hz Center	SENSE:INT r Freq: 5.755000000 GHz	Ra	7:00:36 PM Feb 08, 2021 dio Std: None	Frequency
		Trig: F	Free Run Avg Hold a: 20 dB		dio Device: BTS	
	Ref Offset 13.5 dB					
	10 dB/div Ref 20.00 dBm					
	10.0					Center Freq
	0.00	manhanta	montenan	~~		5.755000000 GHz
	-10.0			- <u>\</u>		
	-20.0			J. Vieweller Lains	when when the the	
	-30.0					
	-40.0					
	-50.0					
	-70.0					
	Center 5.755 GHz				0 00 MU-	
	#Res BW 510 kHz	#	VBW 2 MHz		Span 80 MHz Sweep 1 ms	CF Step 8.00000 MHz
	Occupied Bandwidth		Total Power	23.1 di	Зm	<u>Auto</u> Man
		581 MHz		2011 41		
						Freq Offset 0 Hz
	Transmit Freq Error	40.893 kHz	OBW Power	99.00		JHZ
	x dB Bandwidth	56.91 MHz	x dB	-26.00	dB	
	MSG			STATUS		



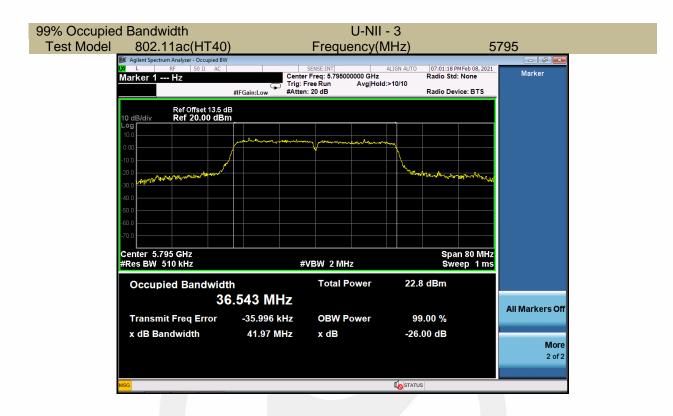



ccupied Bandwidth		U-NII	- 3		
Model 802.11ac 80		Frequency(M	/Hz)	57	775
Milent Spectrum Analyzer - Occupied BV (μ L RF 50 Ω AC Center Freq 5.775000000	0 GHz Center Trig: F	SENSE:INT Freq: 5.775000000 GHz ree Run Avg Hold : 20 dB	Radio St :>10/10	B PM Feb 09, 2021 td: None evice: BTS	Frequency
Ref Offset 13.5 10 dB/div Ref 20.00 dB		1 1			
	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	a for the second			Center Freq 5.775000000 GHz
-10.0 -20.0 -30.0			Law Martin Martillery Merel	Magnah dan Marina	
-40.0					
-60.0					
Center 5.775 GHz #Res BW 1 MHz	#	/BW 3 MHz		n 160 MHz veep 1 ms	<b>CF Step</b> 16.000000 MHz
Occupied Bandwid	th 5.798 MHz	Total Power	24.6 dBm		<u>Auto</u> Man Freq Offset
Transmit Freq Error	-34.491 kHz	OBW Power	99.00 %		0 Hz
x dB Bandwidth	116.2 MHz	x dB	-26.00 dB		
MSG			STATUS		



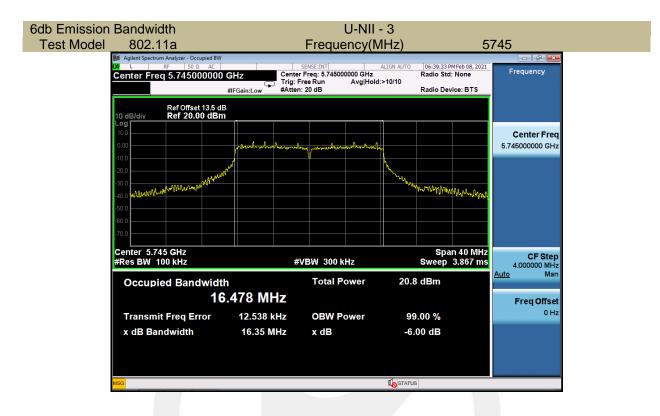

6db Emission Bandwidth Test Model 802.11a



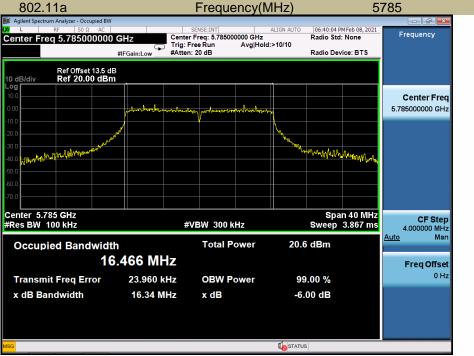


**深圳信测标准技术服务股份有限公司** 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

Report No. ES210118030W02

Page 33 of 88




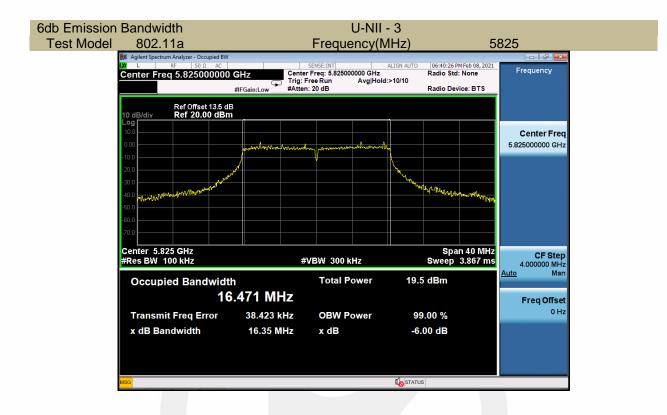

6db Emission	Bandwidth		U-NII -	3		
est Model	802.11n-HT20				745	
	Agilent Spectrum Analyzer - Occupied BW Δ L RF 50 Ω AC Center Freq 5.745000000 G #		Freq: 5.745000000 GHz ee Run Avg Hold::	Radio 8	5 PM Feb 08, 2021 itd: None Device: BTS	Frequency
	Ref Offset 13.5 dB 10 dB/div Ref 20.00 dBm					
	Log 10.0 0.00	water land moutand	y portrained and and and a			Center Freq 5.745000000 GHz
	-10.0 -20.0 -30.0 -40.0 -40.0			And a start of the	Munupalati	
	Center 5.745 GHz				oan 40 MHz	CF Step
	#Res BW 100 kHz	#VBW 300 kHz			Sweep 3.867 ms 4.00	
	Occupied Bandwidth		Total Power 21.1 dBm			<u>Auto</u> Man
	17.0	616 MHz				Freq Offset
	Transmit Freq Error	11.474 kHz	OBW Power	99.00 %		0 Hz
	x dB Bandwidth	17.13 MHz	x dB	-6.00 dB		
	MSG			STATUS		

Report No. ES210118030W02



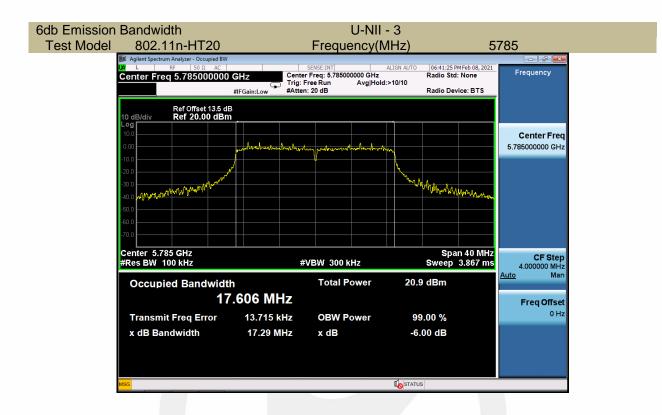


Emission Bandwidth	U-N	ll - 3					
t Model 802.11n-HT20	Frequency	(MHz)	5825				
Agilent Spectrum Analyzer - Occupied BW           W         L         RF         [50 Ω         AC         L           Center Freq 5.825000000         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E         E <td< td=""><td>GHz Center Freq: 5.82500000 G Trig: Free Run Avg #IFGain:Low #Atten: 20 dB</td><td>ALIGN AUTO 06:41:52 PM Feb 08, 2 fz Radio Std: None iold:&gt;10/10 Radio Device: BTS</td><td>Frequency</td></td<>	GHz Center Freq: 5.82500000 G Trig: Free Run Avg #IFGain:Low #Atten: 20 dB	ALIGN AUTO 06:41:52 PM Feb 08, 2 fz Radio Std: None iold:>10/10 Radio Device: BTS	Frequency				
10 dB/div Ref Offset 13.5 df 10 dB/div Ref 20.00 dBm 10.0			Center Freq				
0.00 -10.0 -20.0	andredbarden and a prostalland	-Au	5.825000000 GHz				
-30.0 -40.0 asyl-yll-yll-yll-yll-yll-yll-yll-yll-yll-		and the second s	<b>m</b> n				
-60.0 -70.0 Center 5.825 GHz		Span 40 M					
#Res BW 100 kHz	#VBW 300 kHz	Sweep 3.867 r	Auto Man				
Occupied Bandwidt	h Total Power 7.594 MHz	20.1 dBm	Freq Offset				
Transmit Freq Error	40.582 kHz OBW Power	99.00 %	0 Hz				
x dB Bandwidth	17.09 MHz x dB	-6.00 dB					
	sg Line Line Line Line Line Line Line Line						






mission Bandwidth Model 802.11ac(HT20)		U-NII Frequency(I		5	785	
Agilent Spectrum Analyzer - Occupied BW     Agilent Spectrum Analyzer - Occupied BW     W L RF   50 Ω AC       Center Freq 5.785000000	GHz Center Trig: F	SENSE:INT Freq: 5.785000000 GHz Free Run Avg Hol	ALIGN AUTO	06:43:29 PM Feb 08, 2021 Radio Std: None Radio Device: BTS	Frequency	
Ref Offset 13.5 d 10 dB/div Ref 20.00 dBn Log 0.00	B n	m purtue draw to a star	L.		Center Freq 5.78500000 GHz	
-10.0 -20.0 -30.0 -40.0	/		And the second s	whenne White when		
60.0 60.0 770.0 Center 5.785 GHz				Span 40 MHz	CF Step	
#Res BW 100 kHz Occupied Bandwidt 17				Sweep 3.867 ms dBm	4.000000 MHz Auto Man Freq Offset	
Transmit Freq Error x dB Bandwidth	14.524 kHz 16.70 MHz	OBW Power x dB		00 % 0 dB	0 Hz	
MSG	sa 🚺 Status					



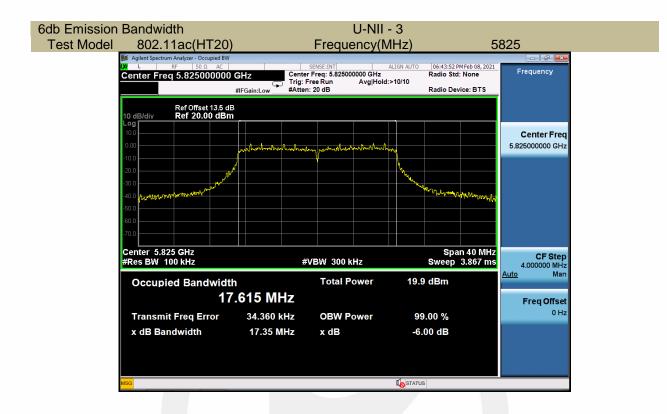


802.11n-HT40		SENSE:INT			PM Feb 08, 2021	755 Export Data
Span 80.000 MHz		enter Freq: 5.755000 rig: Free Run Atten: 20 dB	000 GHz Avg Hold:>10/10	Radio Sto Radio De	d: None vice: BTS	Amplitude Correction
Ref Offset 13.5 df 10 dB/div Ref 20.00 dBm Log						Correction 1
0.00	J. h. hadred and the second states	haladway pumbalahalah	Arnenther the test			Trace
-10.0 -20.0 -30.0 -40.0				w.	hevelowayerana	Limit 1
-60.0 -60.0 -70.0						Meas Results
Center 5.755 GHz #Res BW 100 kHz		#VBW 300 ki	lz		an 80 MHz 7.667 ms	
Occupied Bandwidt	^h 5.119 MHz	Total Po	ower 23	8.5 dBm		
Transmit Freq Error	5.866 kHz			99.00 %		
x dB Bandwidth	35.36 MHz	xdB		6.00 dB		Save As
MSG			In STA	TUS		



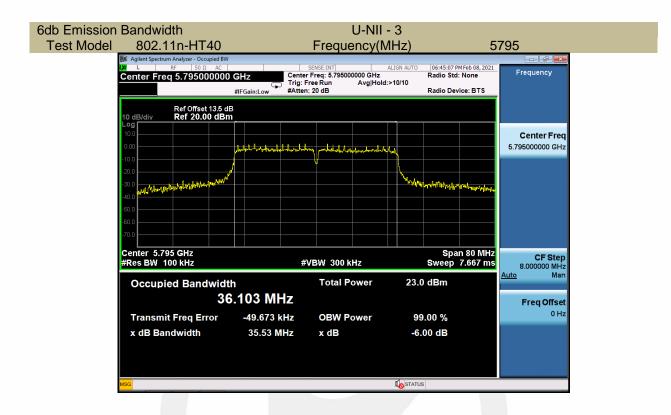

Emission	n Bandwidth		U-NII	- 3		
est Model	802.11ac(HT40	)	Frequency(M	ЛHz)	57	'55
	Agilent Spectrum Analyzer - Occupied BW					- 7
	🗱 L RF 50Ω AC Span 80.000 MHz	Center	SENSE:INT Freq: 5.755000000 GHz	Radio	41 PM Feb 08, 2021 Std: None	Span
		#IFGain:Low #Atten	ree Run Avg Hold :20 dB		Device: BTS	Span
	D. COM. MAR					80.000 MHz
	Ref Offset 13.5 d 10 dB/div Ref 20.00 dBr	B N				
	Log 10.0					
	0.00	1 delowdata I.I. hateles				
	-10.0					
	-20.0	/				
	-30.0 word on the month of the second			* mound held have so	himle harrist	Full Span
	-40.0					
	-50.0					
	-60.0					
	Center 5.755 GHz #Res BW 100 kHz	#1	/BW 300 kHz	S	pan 80 MHz p 7.667 ms	
	WRCS DW TOO KHZ	#				Last Span
	Occupied Bandwidt	h	Total Power	23.5 dBm		
	30	6.154 MHz				
	Transmit Freq Error	17.436 kHz	<b>OBW Power</b>	99.00 %		
	x dB Bandwidth	35.42 MHz	x dB	-6.00 dB		
				0.00 42		
	MSG			STATUS		



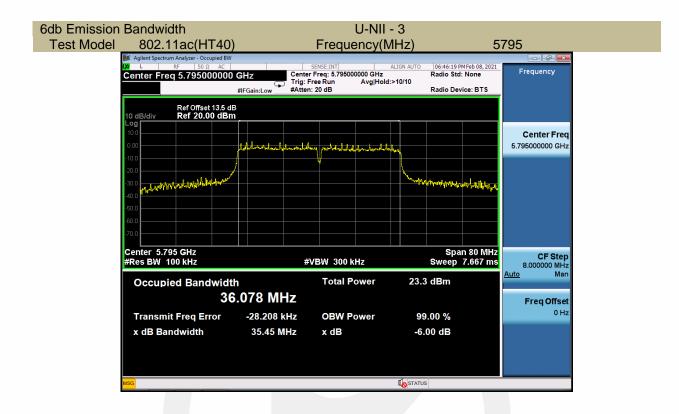

			_							1
b Emission	Bandwidt	h				U-NII	- 3			
Test Model	802.11	ac 80			Frequ	ency(N	/Hz)	)	5	775
	🎉 Agilent Spectrum A									- 7 ×
	Center Freq		GHz	Center	SENSE:INT Freq: 5.7750	00000 GHz	ALIGN AU	DTO 06:47:04 Radio St	PM Feb 08, 2021 d: None	Frequency
			#IFGain:Low		ree Run : 20 dB	Avg Hold	:>10/10	Radio De	evice: BTS	
		Ref Offset 13.5 dl Ref 20.00 dBn								
	Log 10.0									0
	0.00			And the	th Market					Center Freq 5.775000000 GHz
	-10.0		Prod and the		poly and the second	In the second second	ULWH			
	-20.0							h h d at at a m		
	-30.0 annallatalata	Murageliteration						hand and a perhaps of the	where with respect for	
	-40.0									
	-50.0									
	-60.0									
	-70.0									
	Center 5.775								n 160 MHz	CF Step
	#Res BW 100	kHz		#	VBW 300	кНz		Sweep	15.33 ms	16.000000 MHz
	Occupied	l Bandwidt	h		Total F	ower	2	.1 dBm		<u>Auto</u> Man
			5.804 N	/H7						
										Freq Offset 0 Hz
	Transmit F		22.46		OBW F	ower		99.00 %		0112
	x dB Band	width	75.37	MHz	x dB			-6.00 dB		
	MSG						<b>Г</b> о sт	SUITAT		
							<b>10</b> 51	IN US		



# 8.2 MAXIMUM CONDUCTED OUTPUT POWER

### 8.2.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C According to FCC Part 15.407(a)(3) for UNII Band III According to 789033 D02 Section II(E)

### 8.2.2 Conformance Limit

### ■ For the band 5.15-5.25 GHz,

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

(a) (2) The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### For the band 5.725-5.85 GHz

(a) (3) for the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30

**深圳信测标准技术服务股份有限公司** 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations

### 8.2.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

### 8.2.4 Test Procedure

The maximum average conducted output power can be measured using Method PM-G (Measurement using a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

- a. The Transmitter output (antenna port) was connected to the power meter.
- b. Turn on the EUT and power meter and then record the power value.
- c. Repeat above procedures on all channels needed to be tested.

### 8.2.5 Test Results



5150-5250MHz:
---------------

🖂 802.11a mode								
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict			
	CH36	5180	13.02	24	Pass			
U-NII - 1	CH40	5200	13.22	24	Pass			
	CH48	5240	13.91	24	Pass			

$\square$	802.	11n-	HT20

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
	CH36	5180	12.82	24	Pass
U-NII - 1	CH40	5200	13.05	24	Pass
	CH48	5240	13.79	24	Pass

# 802.11 ac (HT20)

		/			
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
	CH36	5180	12.84	24	Pass
U-NII - 1	CH40	5200	13.13	24	Pass
	CH48	5240	13.71	24	Pass

⊠ 802.11n-HT40								
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict			
U-NII - 1	CH38	5190	12.43	24	Pass			
U-INII - 1	CH46	5230	13.14	24	Pass			

🛛 802.11 ac	(HT40)
-------------	--------

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII - 1	CH38	5190	12.39	24	Pass
	CH46	5230	13.02	24	Pass

⊠ 802.11 ac (HT80)								
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict			
U-NII - 1	CH42	5210	10.23	24	Pass			



•									
	🛛 802.11a mode								
	Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict			
		CH149	5745	13.02	30	Pass			
	U-NII – 3	CH157	5785	13.06	30	Pass			
		CH165	5825	12.28	30	Pass			

## 5725-5850MHz:

# 🛛 802.11n-HT20

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
	CH149	5745	12.91	30	Pass
U-NII – 3	CH157	5785	12.92	30	Pass
	CH165	5825	11.96	30	Pass

# 802.11 ac (HT20)

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
	CH149	5745	12.64	30	Pass
U-NII – 3	CH157	5785	12.93	30	Pass
	CH165	5825	11.90	30	Pass

⊠ 802.11n-HT40								
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict			
U-NII – 3	CH151	5755	12.06	30	Pass			
0-111-5	CH159	5795	11.93	30	Pass			

⊠ 802.11 ac (HT40)								
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict			
U-NII – 3	CH151	5755	12.17	30	Pass			
0-1111 - 5	CH159	5795	12.09	30	Pass			

🛛 802.11 ac (HT80)							
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict		
U-NII – 3	CH155	5775	9.45	30	Pass		

**深圳值测标准技术服务股份有限公司** 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



# 8.3 MAXIMUM PEAK POWER DENSITY

### 8.3.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C According to FCC Part 15.407(a)(3) for UNII Band III According to 789033 D02 Section II(F)

### 8.3.2 Conformance Limit

### ■ For the band 5.15-5.25 GHz,

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

(b) (2) The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### For the band 5.725-5.85 GHz

(a) (3) for the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30

**深圳信测标准技术服务股份有限公司** 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations

### 8.3.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.3.4 Test Procedure

Methods refer to FCC KDB 789033

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

a) Set RBW  $\geq$  1/T, where T is defined in section II.B.I.a).

b) Set VBW  $\geq$  3 RBW.

c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add 10log(500kHz/RBW) to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add 10log(1MHz/RBW) to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.

e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections

5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.



# 8.3.5 Test Results

5150-5250MHz

Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
	5180	1.287	11
802.11a	5200	1.979	11
	5240	2.806	11
	5180	1.655	11
802.11n-HT20	5200	1.826	11
	5240	-1.723	11
	5180	1.479	11
802.11ac(HT20)	5200	2.110	11
	5240	-1.687	11
802.11n-HT40	5190	-2.008	11
802.1111-1140	5230	-1.037	11
902 11 co(UT 10)	5190	-1.219	11
802.11ac(HT40)	5230	-1.667	11
802.11ac(HT80)	5210	-4.914	11






Power Spectral Density Test Model 802.11 U-NII - 1



深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



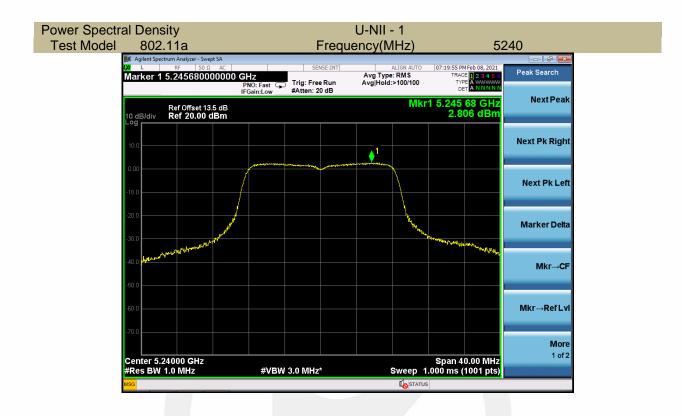



Report No. ES210118030W02

Page 48 of 88












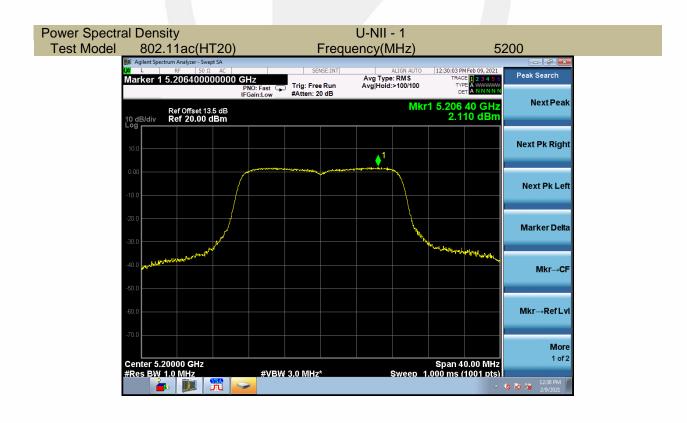

Report No. ES210118030W02

Page 50 of 88







Report No. ES210118030W02

Page 51 of 88







Report No. ES210118030W02

Page 52 of 88







Report No. ES210118030W02


Page 53 of 88




## 5725-5850MHz


Operating mode	perating mode Test Channel		Limit ( dBm/500kHz)
	5745	-0.348	30
802.11a	5785	0.049	30
	5825	-0.940	30
	5745	-0.584	30
802.11n-HT20	5785	-0.270	30
	5825	-1.571	30
	5745	-0.638	30
802.11ac(HT20)	5785	-0.267	30
	5825	-0.975	30
802.11n-HT40	5755	-4.463	30
802.111-H140	5795	-4.159	30
802 41ac(UT40)	5755	-4.212	30
802.11ac(HT40)	5795	-3.992	30
802.11ac(HT80)	5775	-9.665	30




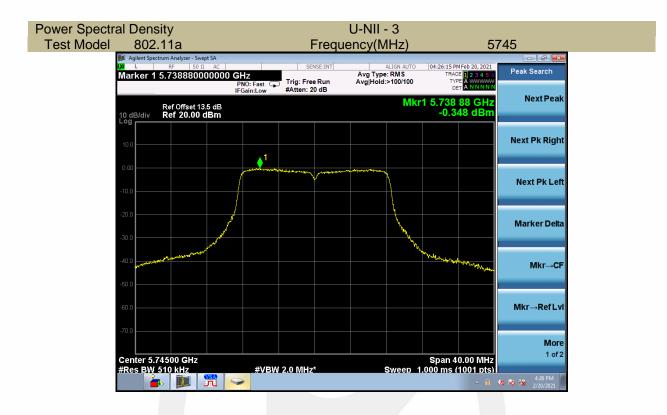

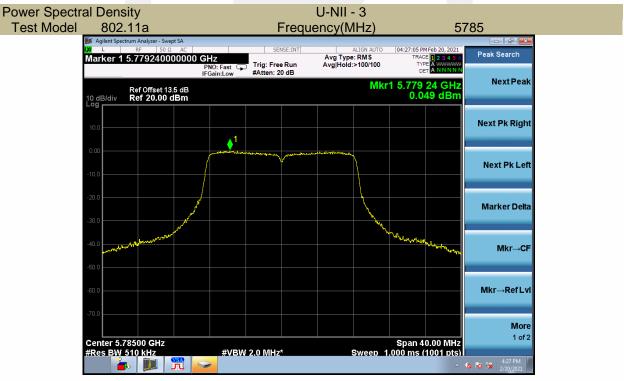



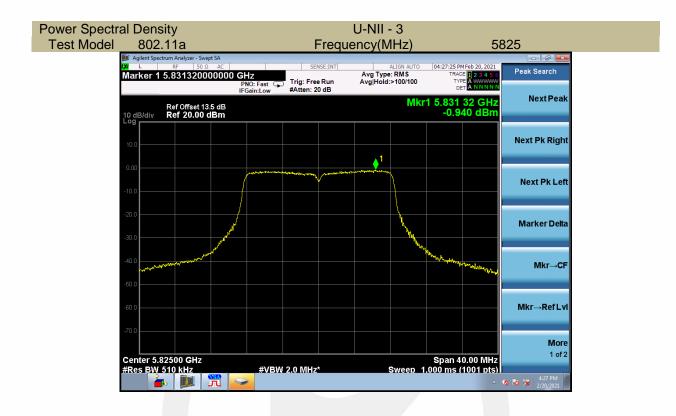

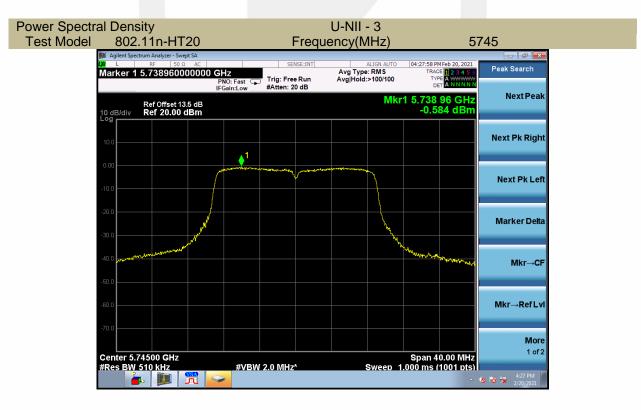










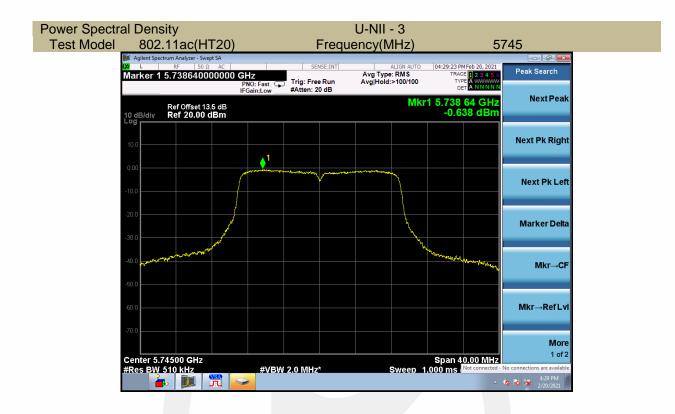





深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



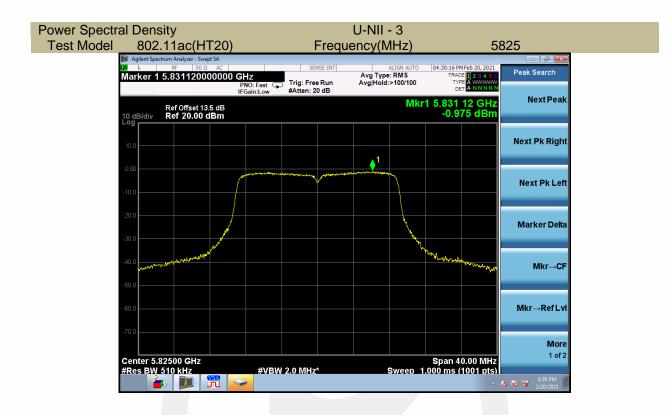

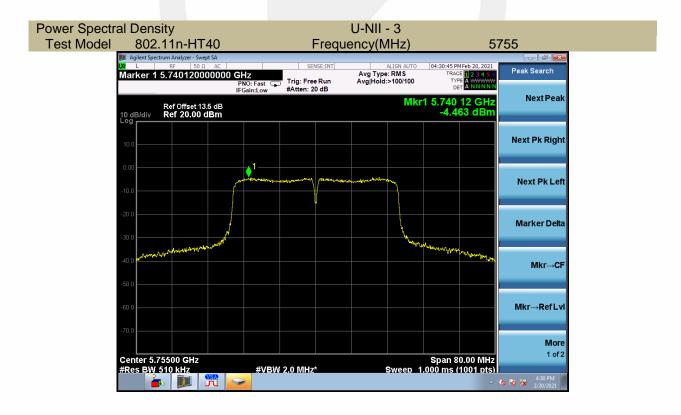


Report No. ES210118030W02


Page 59 of 88






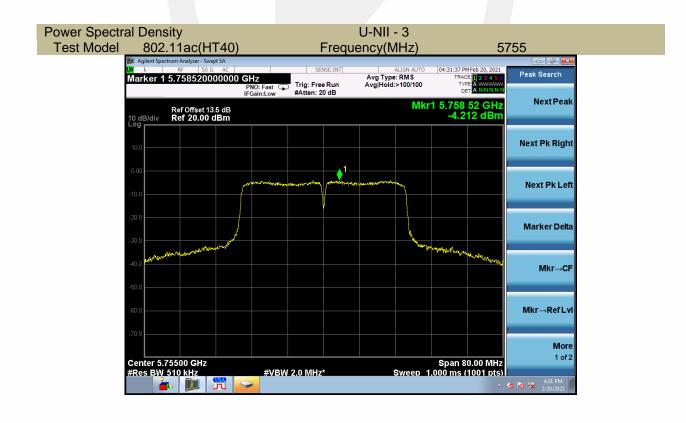



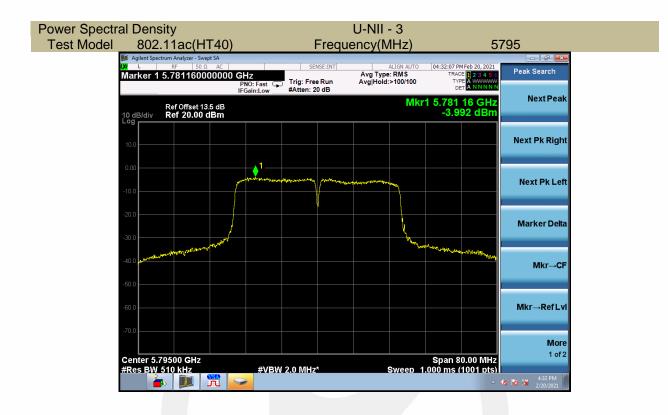

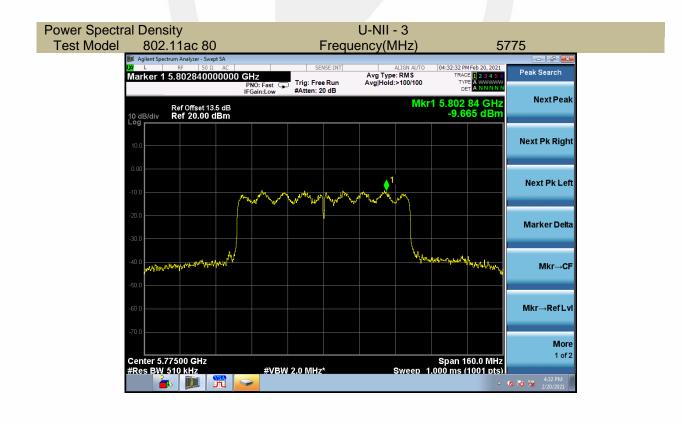



# **8.4 FREQUENCY STABILITY**

8.4.1 Applicable Standard

According to FCC Part 15.407(g) ANSI C63.10 Section 6.8

8.4.2 Conformance Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

8.4.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.4.4 Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 10 kHz.

Set Span= Entire absence of modulation emissions band

Set the video bandwidth (VBW) =30 kHz. width

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

Beginning at each temperature level specified in user manual, the frequency shall be measured within one minute after application of primary power to the transmitter and at intervals of no more than one minute thereafter until ten minutes have elapsed or until sufficient measurements are obtained to indicate clearly that the frequency has stabilized within the applicable tolerance, whichever time period is greater. During each test, the ambient temperature shall not be allowed to rise more than 10° centigrade above the respective beginning ambient temperature level Measure and record the results in the test report.

8.4.5 Test Results

**深圳信测标准技术服务股份有限公司**地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



	5180						
Voltage(V)	Temp(℃)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict			
	-20	5180.0002	0.2	Pass			
	-10	5180.0004	0.4	Pass			
	0	5180.0002	0.2	Pass			
Vnom	10	5180.0004	0.4	Pass			
VIIOIII	20	5180.0003	0.3	Pass			
	30	5180.0005	0.5	Pass			
	40	5180.0002	0.2	Pass			
	55	5180.0005	0.5	Pass			
85% Vnom	25	5180.0004	0.4	Pass			
115% Vnom	25	5180.0001	0.1	Pass			

Voltage(V)	Temp(℃)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
	-20	5200.0003	0.3	Pass
	-10	5200.0003	0.3	Pass
	0	5200.0004	0.4	Pass
Vnom	10	5200.0004	0.4	Pass
VIIOIII	20	5200.0002	0.2	Pass
	30	5200.0005	0.5	Pass
	40	5200.0001	0.1	Pass
	55	5200.0003	0.3	Pass
85% Vnom	25	5200.0001	0.1	Pass
115% Vnom	25	5200.0004	0.4	Pass

# 5240

Voltage(V)	Temp(℃)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
	-20	5240.0004	0.4	Pass
	-10	5240.0001	0.1	Pass
	0	5240.0001	0.1	Pass
Vnom	10	5240.0003	0.3	Pass
VHOM	20	5240.0004	0.4	Pass
	30	5240.0004	0.4	Pass
	40	5240.0005	0.5	Pass
	55	5240.0004	0.4	Pass
85% Vnom	25	5240.0002	0.2	Pass
115% Vnom	25	5240.0002	0.2	Pass

**深圳值测标准技术服务股份有限公司** 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



Voltage(V)	Temp(℃)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
	-20	5190.0001	0.1	Pass
	-10	5190.0003	0.3	Pass
	0	5190.0002	0.2	Pass
Vnom	10	5190.0002	0.2	Pass
VIIOIII	20	5190.0001	0.1	Pass
	30	5190.0002	0.2	Pass
	40	5190.0002	0.2	Pass
	55	5190.0002	0.2	Pass
85% Vnom	25	5190.0004	0.4	Pass
115% Vnom	25	5190.0001	0.1	Pass

### 5230

Voltage(V)	Temp(℃)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
	-20	5230.0003	0.3	Pass
	-10	5230.0005	0.5	Pass
	0	5230.0001	0.1	Pass
Vnom	10	5230.0003	0.3	Pass
VIIOIII	20	5230.0001	0.1	Pass
	30	5230.0004	0.4	Pass
	40	5230.0004	0.4	Pass
	55	5230.0005	0.5	Pass
85% Vnom	25	5230.0001	0.1	Pass
115% Vnom	25	5230.0002	0.2	Pass

### 5210

Voltage(V)	Temp(℃)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
	-20	5210.0001	0.1	Pass
	-10	5210.0003	0.3	Pass
	0	5210.0001	0.1	Pass
Vnom	10	5210.0004	0.4	Pass
VIIOIII	20	5210.0001	0.1	Pass
	30	5210.0003	0.3	Pass
	40	5210.0005	0.5	Pass
	55	5210.0003	0.3	Pass
85% Vnom	25	5210.0002	0.2	Pass
115% Vnom	25	5210.0005	0.5	Pass

**深圳值测标准技术服务股份有限公司** 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



		Test Frequency	Max. Deviation	
Voltage(V)	Temp(℃)	(MHz)	(KHz)	Verdict
	-20	5745.0002	0.2	Pass
	-10	5745.0002	0.2	Pass
	0	5745.0004	0.4	Pass
Vnom	10	5745.0004	0.4	Pass
VIIOIII	20	5745.0004	0.4	Pass
	30	5745.0004	0.4	Pass
	40	5745.0003	0.3	Pass
	55	5745.0004	0.4	Pass
85% Vnom	25	5745.0003	0.3	Pass
115% Vnom	25	5745.0003	0.3	Pass

## 5785

Voltage(V)	Temp(℃)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
	-20	5785.0003	0.3	Pass
	-10	5785.0005	0.5	Pass
	0	5785.0002	0.2	Pass
Vnom	10	5785.0003	0.3	Pass
VIIOIII	20	5785.0005	0.5	Pass
	30	5785.0004	0.4	Pass
	40	5785.0003	0.3	Pass
	55	5785.0002	0.2	Pass
85% Vnom	25	5785.0004	0.4	Pass
115% Vnom	25	5785.0002	0.2	Pass

# 5825

Voltage(V)	Temp(℃)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
	-20	5825.0003	0.3	Pass
	-10	5825.0003	0.3	Pass
	0	5825.0002	0.2	Pass
Vnom	10	5825.0002	0.2	Pass
VIIOIII	20	5825.0005	0.5	Pass
	30	5825.0003	0.3	Pass
	40	5825.0002	0.2	Pass
	55	5825.0002	0.2	Pass
85% Vnom	25	5825.0004	0.4	Pass
115% Vnom	25	5825.0001	0.1	Pass

**深圳信测标准技术服务股份有限公司** 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



Voltage(V)	Temp(℃)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
	-20	5755.0002	0.2	Pass
	-10	5755.0001	0.1	Pass
	0	5755.0004	0.4	Pass
Vnom	10	5755.0004	0.4	Pass
VIIOIII	20	5755.0002	0.2	Pass
	30	5755.0001	0.1	Pass
	40	5755.0005	0.5	Pass
	55	5755.0002	0.2	Pass
85% Vnom	25	5755.0001	0.1	Pass
115% Vnom	25	5755.0001	0.1	Pass

## 5795

Voltage(V)	Temp(℃)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
	-20	5795.0004	0.4	Pass
	-10	5795.0003	0.3	Pass
	0	5795.0001	0.1	Pass
Vnom	10	5795.0003	0.3	Pass
VIIOIII	20	5795.0002	0.2	Pass
	30	5795.0001	0.1	Pass
	40	5795.0002	0.2	Pass
	55	5795.0003	0.3	Pass
85% Vnom	25	5795.0003	0.3	Pass
115% Vnom	25	5795.0001	0.1	Pass

#### 5775

Voltage(V)	Temp(℃)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
	-20	5775.0001	0.1	Pass
	-10	5775.0003	0.3	Pass
	0	5775.0003	0.3	Pass
Vnom	10	5775.0005	0.5	Pass
VIIOIII	20	5775.0001	0.1	Pass
	30	5775.0001	0.1	Pass
	40	5775.0002	0.2	Pass
	55	5775.0002	0.2	Pass
85% Vnom	25	5775.0003	0.3	Pass
115% Vnom	25	5775.0003	0.3	Pass

**深圳信测标准技术服务股份有限公司**地址:广东省深圳市南山区马家龙工业区69栋网址:Http://www.emtek.com.cn邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



# 8.5 UNDESIRABLE RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.407 (b) According to 789033 D02 Section II(G)

### 8.5.2 Conformance Limit

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209 The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Restricted	Field Strength (µV/m)	Field Strength	Measurement
Frequency(MHz)		(dBµV/m)	Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

The provisions of §15.205 apply to intentional radiators operating under this section, 15.205 Restricted bands of operation

banus or operation			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

### Remark: 1. Emission level in dBuV/m=20 log (uV/m)



2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of  $\xi$ 

15.205, and the emissions located in restricted bands also comply with 15.209 limit.

# 8.5.3 Test Configuration

Test according to clause 6.2 radio frequency test setup

### 8.5.4 Test Procedure

Unwanted Emissions Measurements below 1000 MHz

Compliance shall be demonstrated using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

The EUT was placed on a turn table which is 0.8m above ground plane.

And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

Repeat above procedures until all frequency measured was complete.

We use software control the EUT, Let EUT hopping on and transmit with highest power, All the modes have been tested and the worst result was reported.

Use the following spectrum analyzer settings:

Set RBW=120kHz for f < 1 GHz(30MHz to 1GHz), 200Hz for f<150KHz(9KHz to 150KHz), 9KHz for <30MHz

(150KHz to 30KHz).

Set the VBW > RBW.

Detector = Peak.

Trace mode = max hold.

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Repeat above procedures until all frequency measured was complete.

Unwanted Maximum peak Emissions Measurements above 1000 MHz

Maximum emission levels are measured by setting the analyzer as follows:

RBW = 1 MHz.

VBW ≥ 3 MHz.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately 1/x, where x is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

Unwanted Average Emissions Measurements above 1000 MHz

Method VB (Averaging using reduced video bandwidth): Alternative method.

RBW = 1 MHz.

Video bandwidth. • If the EUT is configured to transmit with duty cycle  $\geq$  98 percent, set VBW  $\leq$  RBW/100 (i.e., 10 kHz) but not less than 10 Hz.

• If the EUT duty cycle is < 98 percent, set VBW  $\ge$  1/T, where T is defined in section II.B.1.a). Video bandwidth mode or display mode • The instrument shall be set to ensure that video filtering is applied in the power domain. Typically, this requires setting the detector mode to RMS and setting the Average-VBW Type to Power (RMS).

• As an alternative, the analyzer may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some analyzers require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode.

Detector = Peak.

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

**深圳信测标准技术服务股份有限公司**地址:广东省深圳市南山区马家龙工业区69栋网址:Http://www.emtek.com.cn邮箱:cs.rep@emtek.com.cn



Sweep time = auto.

Trace mode = max hold.

Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of 1/x, where x is the duty cycle. For example, use at least 200 traces if the duty cycle is 25 percent. (If a specific emission is demonstrated to be continuous—i.e., 100 percent duty cycle—rather than turning on and off with the transmit cycle, at least 50 traces shall be averaged.)

### Band edge measurements.

Unwanted band-edge emissions may be measured using either of the special band-edge measurement techniques (the marker-delta or integration methods) described below. Note that the marker-delta method is primarily a radiated measurement technique that requires the 99% occupied bandwidth edge to be within 2 MHz of the authorized band edge, whereas the integration method can be used in either a radiated or conducted measurement without any special requirement with regards to the displacement of the unwanted emission(s) relative to the authorized bandwidth.

Marker-Delta Method.

The marker-delta method, as described in ANSI C63.10, can be used to perform measurements of the radiated unwanted emissions level of emissions provided that the 99% occupied bandwidth of the fundamental is within 2 MHz of the authorized band-edge.

### 8.5.5 Test Results

The voltage 120V &240V and the modes 802.11a/n/ac has been tested and the worst result recorded as below



Kor Undesirable radiated Spurious Emission in U-NII – 1
 All the modes 802.11a/n/ac has been tested and the worst result 802.11a recorded as below:
 Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Test mode:	802.	11a Frequ	ency(MHz): 5180		
Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
8298.10	V	51.39	-43.81	-27	-16.81
11032.55	V	56.99	-38.21	-27	-11.21
17994.90	V	65.07	-30.13	-27	-3.13
7023.95	Н	51.04	-44.16	-27	-17.16
11863.00	Н	56.32	-38.88	-27	-11.88
17982.15	Н	65.19	-30.01	-27	-3.01

Test mode:	802.	11a Frequ	ency(MHz): 5200		
Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
8383.95	V	51.18	-44.02	-27	-17.02
12101.85	V	56.52	-38.68	-27	-11.68
17936.25	V	65.97	-29.23	-27	-2.23
7414.95	H	52.76	-42.44	-27	-15.44
11149.85	Н	55.81	-39.39	-27	-12.39
17994.90	Н	64.58	-30.62	-27	-3.62

Test mode:	802.	11a Frequ	Frequency(MHz): 5240		
Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
7052.00	V	51.8	-43.4	-27	-16.4
10514.90	V	55.61	-39.59	-27	-12.59
17999.15	V	66.01	-29.19	-27	-2.19
7002.70	Н	51.04	-44.16	-27	-17.16
12339.85	Н	57.04	-38.16	-27	-11.16
17973.65	Н	65.81	-29.39	-27	-2.39

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3)EIRP[dBm] = E[dBµV/m] + 20 log(d[meters]) - 104.77

d is the measurement distance in 3 meters



Frequency: 5180								
Freq.	Ant.Pol.		ssion dBuV/m)	Limit 3m(	(dBuV/m)	Marg	in (dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV	
8298.10	V	51.39	35.67	74	54	-22.61	-18.33	
11032.55	V	56.99	40.27	74	54	-17.01	-13.73	
17994.90	V	65.07	43.65	74	54	-8.93	-10.35	
7023.95	Н	51.04	35.09	74	54	-22.96	-18.91	
11863.00	Н	56.32	40.34	74	54	-17.68	-13.66	
17982.15	Н	65.19	42.89	74	54	-8.81	-11.11	

Frequency: 5200								
Freq.	Ant.Pol.		ssion dBuV/m)	Limit 3m(dBuV/m)		Margin (dB)		
(MHz)	H/V	PK	AV	PK	AV	PK	AV	
8383.95	V	51.18	36.04	74	54	-22.82	-17.96	
12101.85	V	56.52	40.76	74	54	-17.48	-13.24	
17936.25	V	65.97	43.16	74	54	-8.03	-10.84	
7414.95	н	52.76	35.14	74	54	-21.24	-18.86	
11149.85	н	55.81	40.08	74	54	-18.19	-13.92	
17994.90	Н	64.58	43.31	74	54	-9.42	-10.69	

Frequency: 5240								
Freq.	Ant.Pol.		ssion dBuV/m)	Limit 3m(	(dBuV/m)	Marg	in (dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV	
7052.00	V	51.80	35.63	74	54	-22.20	-18.37	
10514.90	V	55.61	40.28	74	54	-18.39	-13.72	
17999.15	V	66.01	43.34	74	54	-7.99	-10.66	
7002.70	Н	51.04	34.55	74	54	-22.96	-19.45	
12339.85	Н	57.04	40.29	74	54	-16.96	-13.71	
17973.65	Н	65.81	43.47	74	54	-8.19	-10.53	

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Correct Factor +Cable Loss.

(3) Correct Factor= Ant_F + Cab_L - Preamp

(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Test mode:	802.11a	Frequenc	cy(MHz): 5180		
Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5142.800	Н	59.81	-35.39	-27	Pass
5149.300	V	60.28	-34.92	-27	Pass

# Image: Second Seco

Test mode:	802.11a	Frequenc	sy(MHz): 5240		
Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5350.700	Н	62.2	-33	-27	Pass
5355.100	V	60.74	-34.46	-27	Pass

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Correct Factor +Cable Loss.

- (3) Correct Factor= Ant_F + Cab_L Preamp
- (4) EIRP[dBm] = E[dBµV/m] + 20 log(d[meters]) 104.77
  - d is the measurement distance in 3 meters

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
5142.800	V	59.81	74	39.63	54
5149.300	Н	60.28	74	40.28	54

Test mode:

802.11a

Frequency(MHz): 5240

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
5350.700	V	62.20	74	41.68	54
5355.100	Н	60.74	74	40.52	54


**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Correct Factor +Cable Loss.


(3) Correct Factor= Ant_F + Cab_L - Preamp

(4)Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



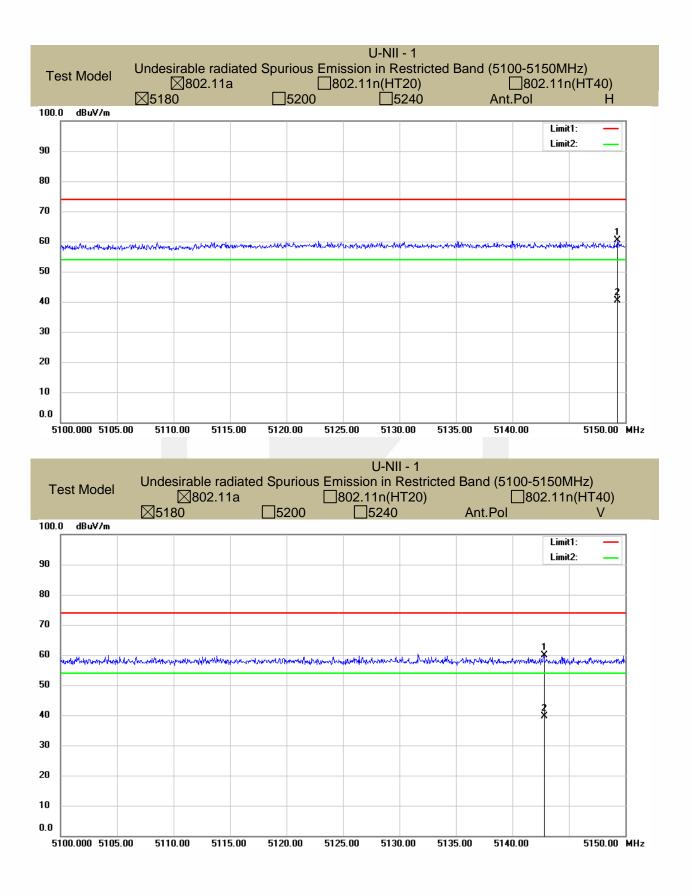



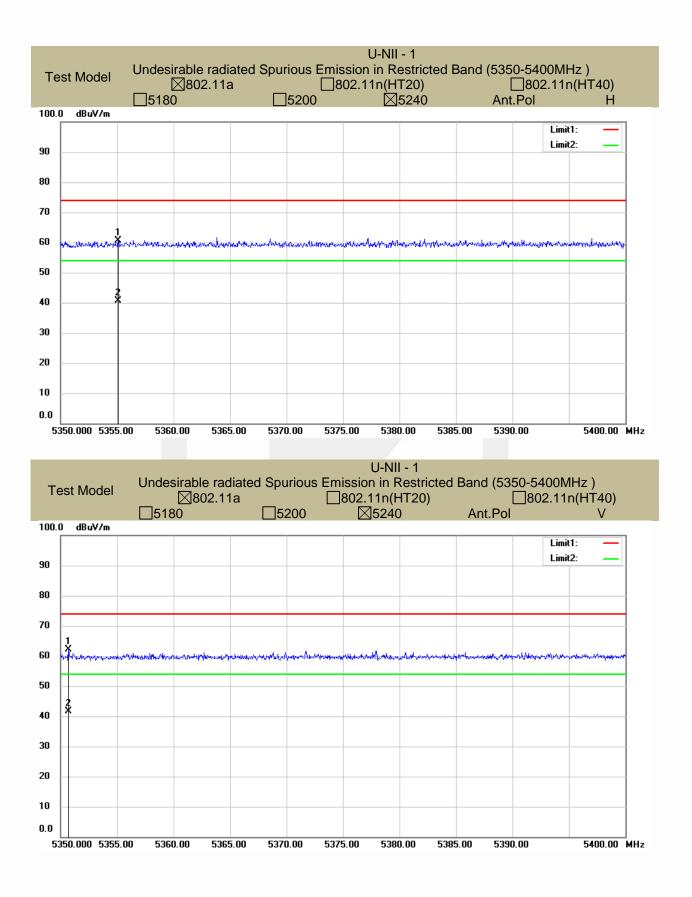



■ SFor Undesirable radiated Spurious Emission in U-NII -3

All the modes 802.11a/n/ac has been tested and the worst result 802.11a recorded as below:

•	Undesirable	radiated Spurious	Emission Above	1GHz (1Gł	Hz to 40GHz)
		000 11	_		

Test mode:	802.11a	Frequ	ency(MHz): 5745		
Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
7046.90	V	51.32	-43.88	-27	-16.88
12412.10	V	56.27	-38.93	-27	-11.93
17966.00	V	65.38	-29.82	-27	-2.82
7887.55	Н	51.36	-43.84	-27	-16.84
11667.50	Н	56.04	-39.16	-27	-12.16
17973.65	Н	65.19	-30.01	-27	-3.01

Test mode:	802.11a	Frequ	Frequency(MHz): 5785					
Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)			
7164.20	V	51.18	-44.02	-27	-17.02			
12263.35	V	56.07	-39.13	-27	-12.13			
17969.40	V	65.14	-30.06	-27	-3.06			
7887.55	H	51.36	-43.84	-27	-16.84			
11667.50	H	56.04	-39.16	-27	-12.16			
17973.65	Н	65.19	-30.01	-27	-3.01			

Test mode:	802.11a	Frequ	ency(MHz): 5825		
Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
8080.50	V	51.74	-43.46	-27	-16.46
11710.00	V	56.51	-38.69	-27	-11.69
17996.60	V	65.26	-29.94	-27	-2.94
7834.85	Н	51.48	-43.72	-27	-16.72
11042.75	Н	55.84	-39.36	-27	-12.36
17994.05	Н	65.67	-29.53	-27	-2.53

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3)EIRP[dBm] = E[dB $\mu$ V/m] + 20 log(d[meters]) - 104.77

d is the measurement distance in 3 meters



Frequency: 8	302.11a			Frequency(MH	z): 5745		
Freq.	Ant.Pol.	Emission Level(dBuV/m) PK AV		Limit 3m(dE	BuV/m)	Margin (dB)	
(MHz)	H/V			PK	AV	PK	AV
7046.90	V	51.32	34.69	74	54	-22.68	-19.31
12412.10	V	56.27	40.21	74	54	-17.73	-13.79
17966.00	V	65.38	42.87	74	54	-8.62	-11.13
7887.55	Н	51.36	35.63	74	54	-22.64	-18.37
11667.50	Н	56.04	41.01	74	54	-17.96	-12.99
17973.65	Н	65.19	43.08	74	54	-8.81	-10.92

Frequency: 8	802.11a			Frequency(MH	z): 5785			
Freq.	Ant.Pol.	Emission Level(dBuV/m) PK AV		Limit 3m(dE	BuV/m)	Margin (dB)		
(MHz)	H/V			PK	AV	PK	AV	
7164.20	V	51.18	35.26	74	54	-22.82	-18.74	
12263.35	V	56.07	40.66	74	54	-17.93	-13.34	
17969.40	V	65.14	43.04	74	54	-8.86	-10.96	
7887.55	н	51.36	35.64	74	54	-22.64	-18.36	
11667.50	н	56.04	40.14	74	54	-17.96	-13.86	
17973.65	Н	65.19	43.69	74	54	-8.81	-10.31	

Frequency: 8	02.11a		Frequency(MHz): 5825									
Freq.	Ant.Pol.	Emission Level(dBuV/m) PK AV		Limit 3m(dE	BuV/m)	Margin (dB)						
(MHz)	H/V			PK	AV	PK	AV					
8080.50	V	51.74	35.27	74	54	-22.26	-18.73					
11710.00	V	56.51	40.15	74	54	-17.49	-13.85					
17996.60	V	65.26	43.26	74	54	-8.74	-10.74					
7834.85	Η	51.48	35.32	74	54	-22.52	-18.68					
11042.75	Н	55.84	40.16	74	54	-18.16	-13.84					
17994.05	Н	65.67	43.22	74	54	-8.33	-10.78					

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Correct Factor +Cable Loss.

(3) Correct Factor= Ant_F + Cab_L - Preamp

(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Test mode:	802.11a	Frequenc	ey: 5745		
Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5716.375	V	60.70	-34.50	14.59	PASS
5716.375	Н	60.68	-34.52	14.59	PASS

### Image: Second Seco

Test mode:	802.11a	Frequenc	y: 5825		
Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5850.5	V	60.51	-34.69	26.78	PASS
5858.25	Н	60.02	-35.18	14.69	PASS

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).


(2) Emission Level= Reading Level+Correct Factor +Cable Loss.

(3) Correct Factor= Ant_F + Cab_L - Preamp


(4) EIRP[dBm] = E[dBµV/m] + 20 log(d[meters]) - 104.77

d is the measurement distance in 3 meters



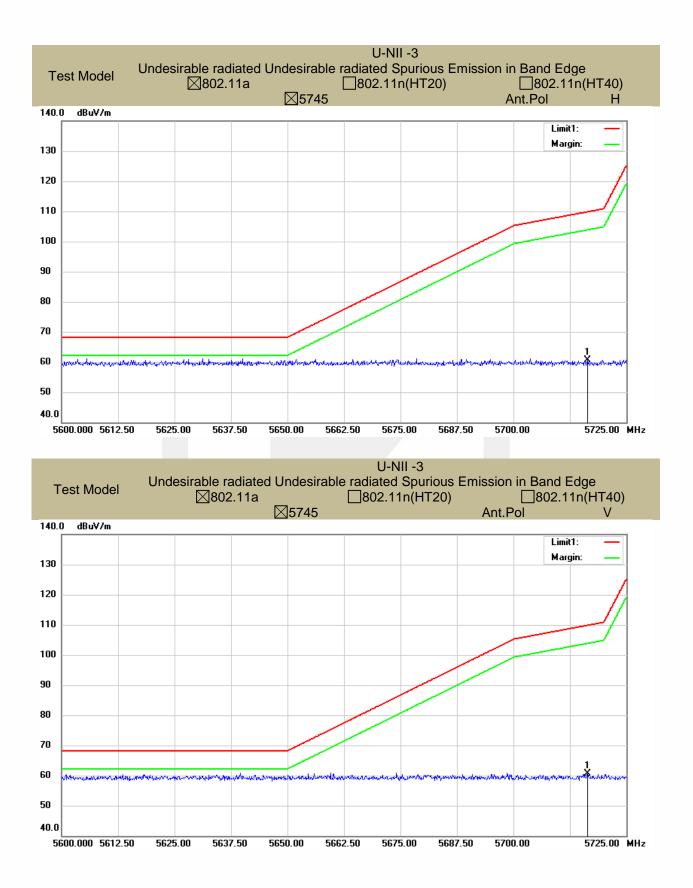




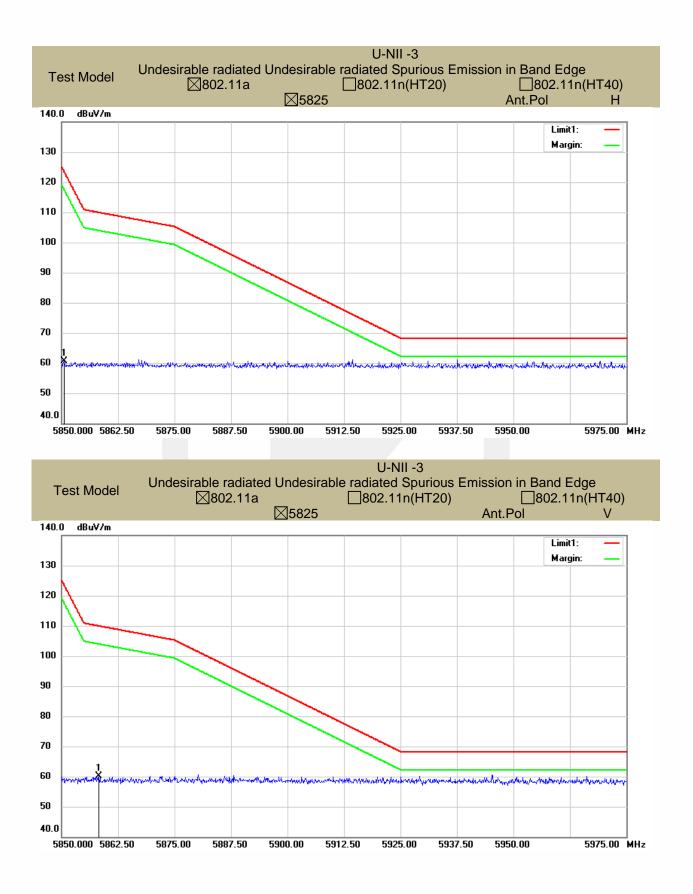




Undesirable radiated Spurious Emission below 1GHz (30MHz to 1GHz)
 All the modes 802.11a/n/ac has been tested and the worst result 802.11ac recorded as below:

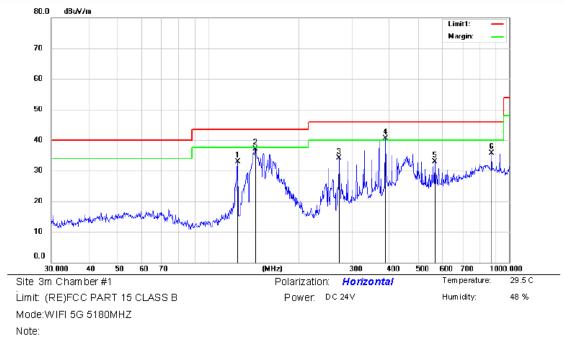

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- m ent	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		125.0065	47.29	-14.39	32.90	43.50	-10.60	QP			
2		143.3890	51.37	-14.27	37.10	43.50	-6.40	QP			
3	:	272.2776	44.37	-10.28	34.09	46.00	-11.91	QP			
4	* ;	389.1842	47.37	-6.77	40.60	46.00	-5.40	QP			
5	;	568.1144	36.54	-3.61	32.93	46.00	-13.07	QP			
6	1	875.2470	34.04	1.76	35.80	46.00	-10.20	QP			




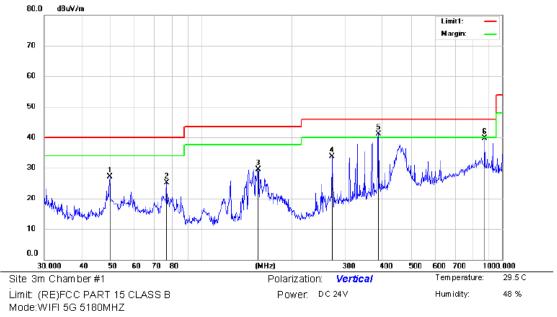

Note:


No.	Mk.	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		49.5545	39.16	-12.11	27.05	40.00	-12.95	QP			
2		76.5790	39.50	-14.42	25.08	40.00	-14.92	QP			
3		154.2785	43.39	-13.90	29.49	43.50	-14.01	QP			
4		272.1583	44.04	-10.29	33.75	46.00	-12.25	QP			
5	*	388.6728	47.87	-6.78	41.09	46.00	-4.91	QP			
6		875.2470	37.90	1.76	39.66	46.00	-6.34	QP			



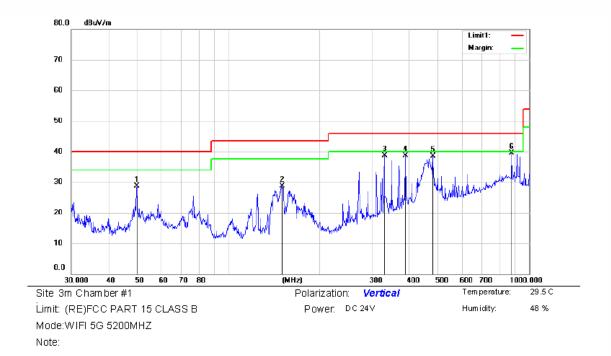


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MH z	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		49.5328	40.86	-12.12	28.74	40.00	-11.26	QP			
2		150.9341	42.51	-13.79	28.72	43.50	-14.78	QP			
3		330.3396	46.97	-8.25	38.72	46.00	-7.28	QP			
4		388.6728	45.55	-6.78	38.77	46.00	-7.23	QP			
5		480.1065	44.04	-5.48	38.56	46.00	-7.44	QP			
6	*	875.2470	37.84	1.76	39.60	46.00	-6.40	QP			



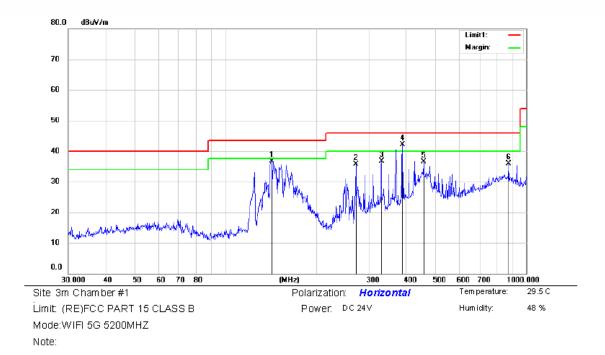

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		142.3868	51.02	-14.32	36.70	43.50	-6.80	QP			
2		271.9198	45.96	-10.30	35.66	46.00	-10.34	QP			
3		330.1948	44.98	-8.26	36.72	46.00	-9.28	QP			
4	*	388.5024	48.95	-6.79	42.16	46.00	-3.84	QP			
5		456.1057	42.34	-5.85	36.49	46.00	-9.51	QP			
6		875.2470	34.19	1.76	35.95	46.00	-10.05	QP			




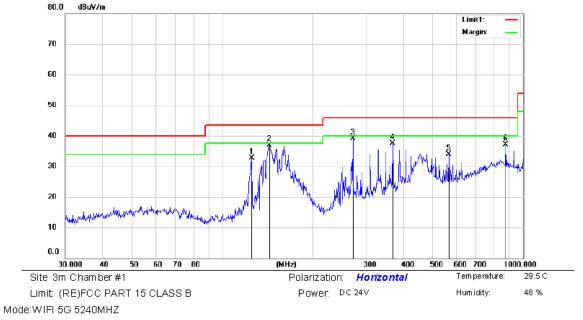

Note:

No. N	Иk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MH z	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	1:	25.0065	47.06	-14.39	32.67	43.50	-10.83	QP			
2 *	* 14	43.3890	51.17	-14.27	36.90	43.50	-6.60	QP			
3	2	71.9198	49.35	-10.30	39.05	46.00	-6.95	QP			
4	36	68.9192	44.69	-7.25	37.44	46.00	-8.56	QP			
5	56	68.1144	37.56	-3.61	33.95	46.00	-12.05	QP			
6	8	75.2470	35.26	1.76	37.02	46.00	-8.98	QP			



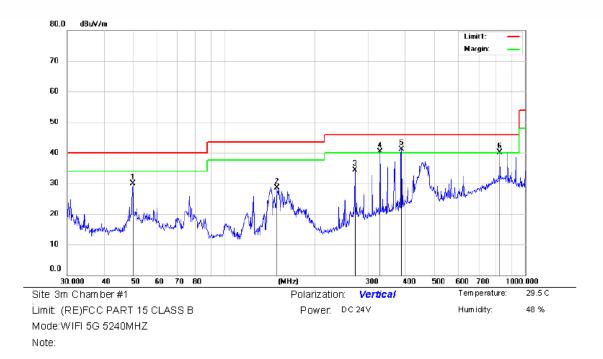

No.	Mł	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		49.5762	42.10	-12.11	29.99	40.00	-10.01	QP			
2		149.7480	42.33	-13.79	28.54	43.50	-14.96	QP			
3		271.6815	44.65	-10.32	34.33	46.00	-11.67	QP			
4	ļ	329.9055	48.65	-8.26	40.39	46.00	-5.61	QP			
5	*	387.9920	47.82	-6.81	41.01	46.00	-4.99	QP			
6	İ	826.0438	37.83	2.26	40.09	46.00	-5.91	QP			

Undesirable radiated Spurious Emission below 30MHz (9KHz to 30MHz)

Freq.	Level	Over Limit	Remark
(MHz)	(dBuV)	(dB)	
-	-	-	See Note

#### Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.



## **8.6 POWER LINE CONDUCTED EMISSIONS**

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Conducted Emission Limit						
Quasi-peak	Average					
66-56	56-46					
56	46					
60	50					
	Quasi-peak 66-56 56					

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 8.6.3 Test Configuration

Test according to clause 6.3 conducted emission test setup

#### 8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results

Not Applicable



# **8.7 ANTENNA APPLICATION**

#### 8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

#### 8.7.2 Result

PASS.

The EUT has antennas: an External Antennna for WIFI 5G, the antenna gain is 2 dBi; Note: Antennas use a permanently attached antenna which is not replaceable. 

- $\boxtimes$ 
  - Not using a standard antenna jack or electrical connector for antenna replacement
- The antenna has to be professionally installed (please provide method of installation)  $\square$

Which in accordance to section 15.203, please refer to the internal photos.



Detail of factor for ra		1	F	
Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	١	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

#### Detail of factor for radiated emission

----- END OF REPORT ------