


**Conducted output power**

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
EGPRS1900 1 Slot	512	1850.2	27.24	PASS
EGPRS1900 1 Slot	661	1880	27.85	PASS
EGPRS1900 1 Slot	810	1909.8	28.74	PASS
EGPRS1900 2 Slot	512	1850.2	26.65	PASS
EGPRS1900 2 Slot	661	1880	26.89	PASS
EGPRS1900 2 Slot	810	1909.8	27.55	PASS
EGPRS1900 3 Slot	512	1850.2	24.48	PASS
EGPRS1900 3 Slot	661	1880	24.84	PASS
EGPRS1900 3 Slot	810	1909.8	24.92	PASS
EGPRS1900 4 Slot	512	1850.2	23.10	PASS
EGPRS1900 4 Slot	661	1880	23.32	PASS
EGPRS1900 4 Slot	810	1909.8	24.01	PASS
EGPRS850 1 Slot	128	824.2	27.36	PASS
EGPRS850 1 Slot	189	836.4	28.37	PASS
EGPRS850 1 Slot	251	848.8	27.29	PASS
EGPRS850 2 Slot	128	824.2	26.48	PASS
EGPRS850 2 Slot	189	836.4	26.48	PASS
EGPRS850 2 Slot	251	848.8	26.37	PASS
EGPRS850 3 Slot	128	824.2	24.31	PASS
EGPRS850 3 Slot	189	836.4	24.22	PASS
EGPRS850 3 Slot	251	848.8	24.00	PASS
EGPRS850 4 Slot	128	824.2	22.70	PASS
EGPRS850 4 Slot	189	836.4	23.37	PASS
EGPRS850 4 Slot	251	848.8	22.88	PASS


**Peak-to-Average Ratio**

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
EGPRS1900	512	1850.2	7.35	13.00	PASS
EGPRS1900	661	1880	6.95	13.00	PASS
EGPRS1900	810	1909.8	5.91	13.00	PASS
EGPRS850	128	824.2	8.08	13.00	PASS
EGPRS850	189	836.4	8.09	13.00	PASS
EGPRS850	251	848.8	8.41	13.00	PASS


EGPRS1900 Channel=512

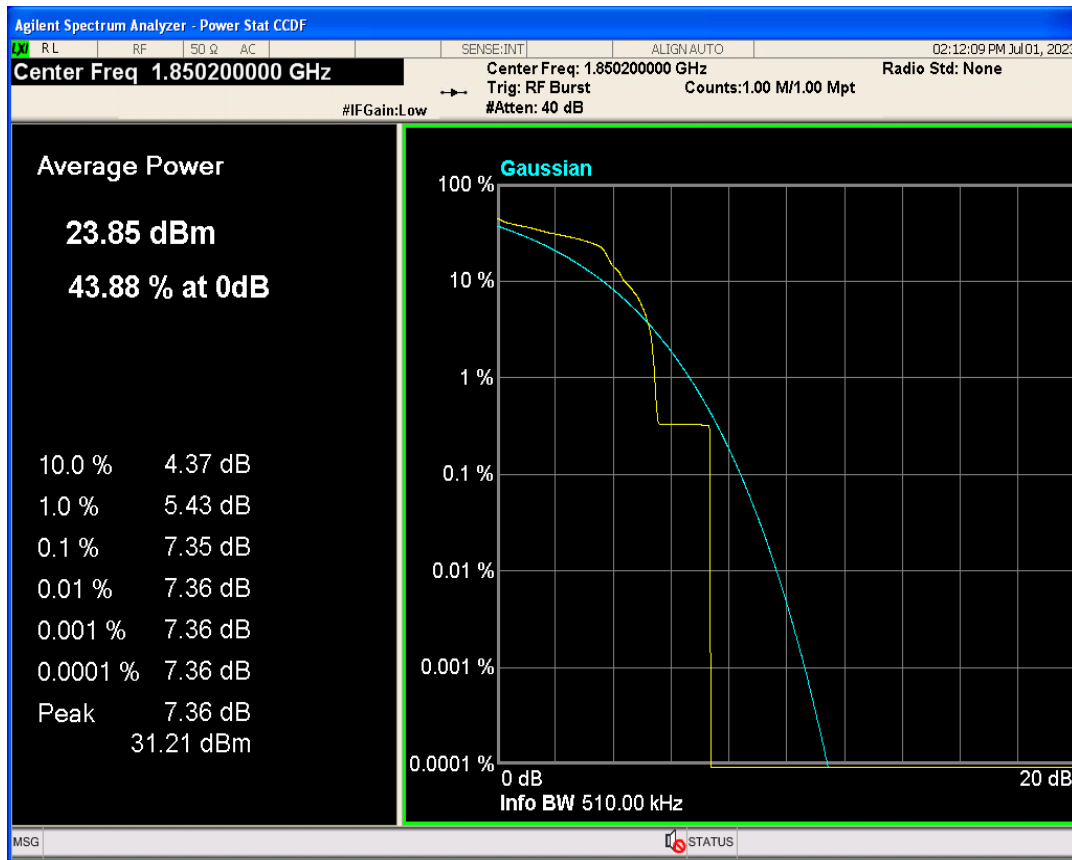


EGPRS1900 Channel=661

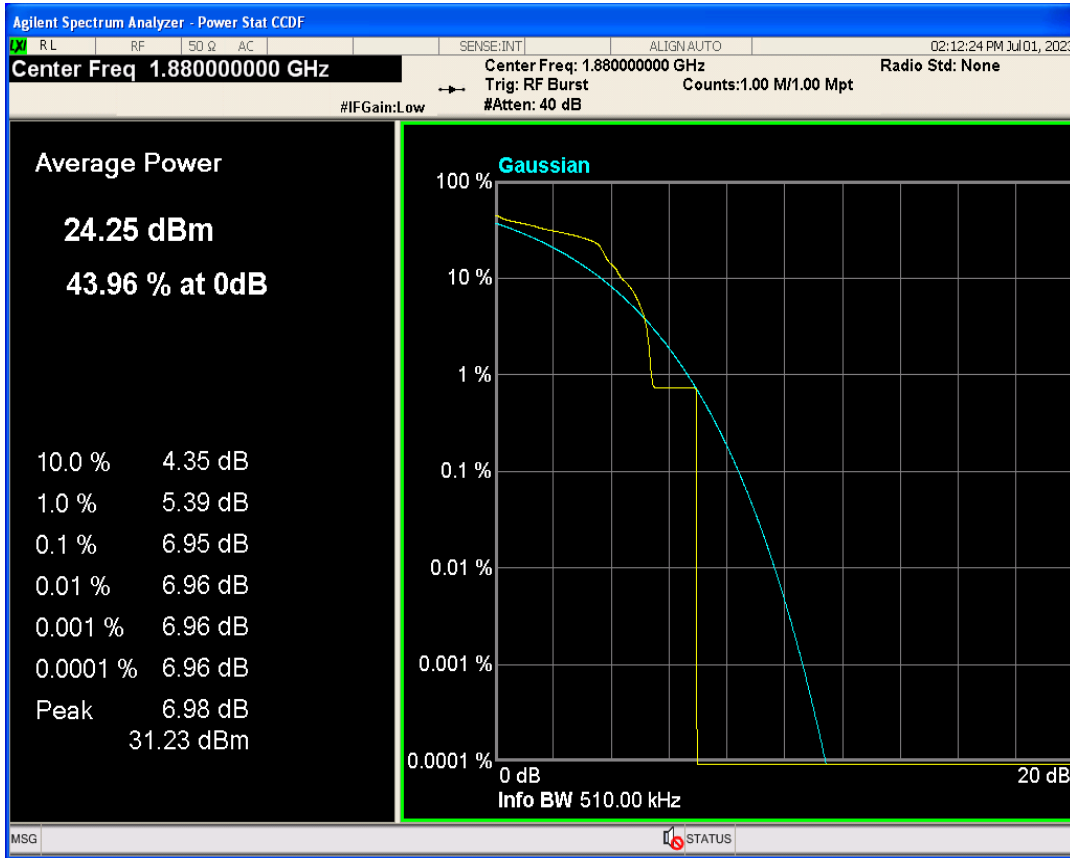


EGPRS1900 Channel=810

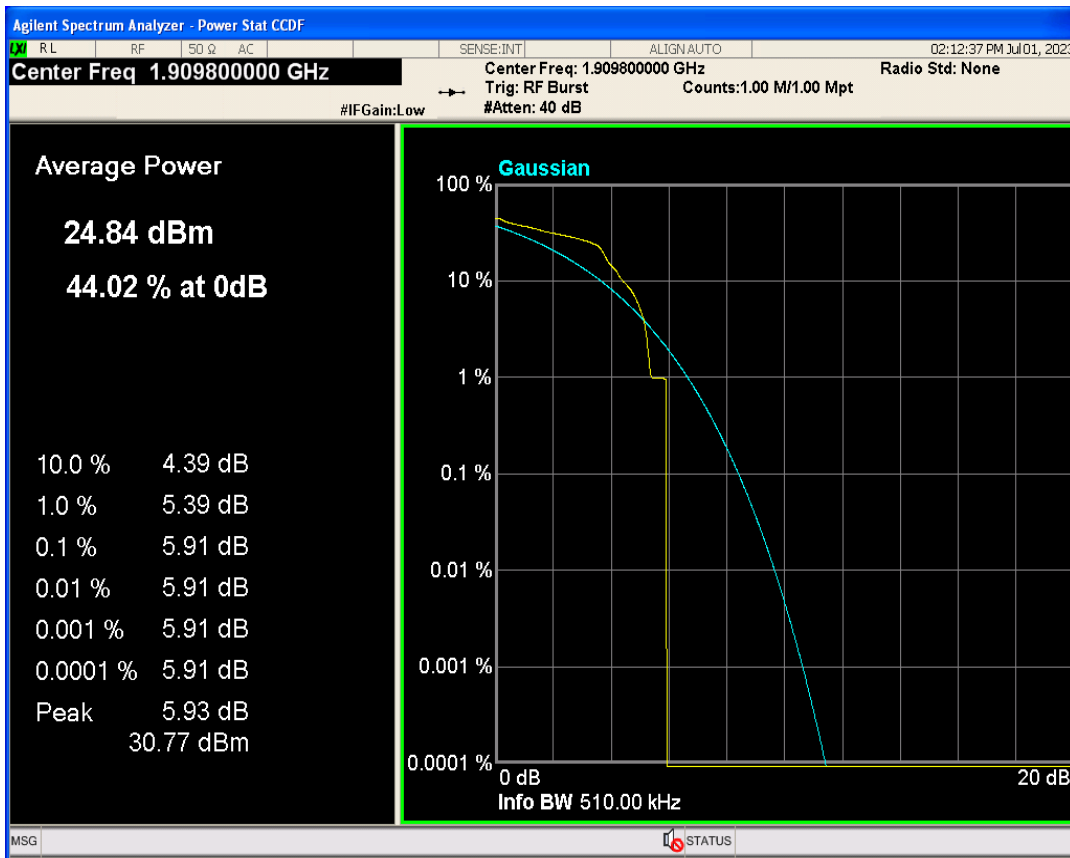


EGPRS850 Channel=128

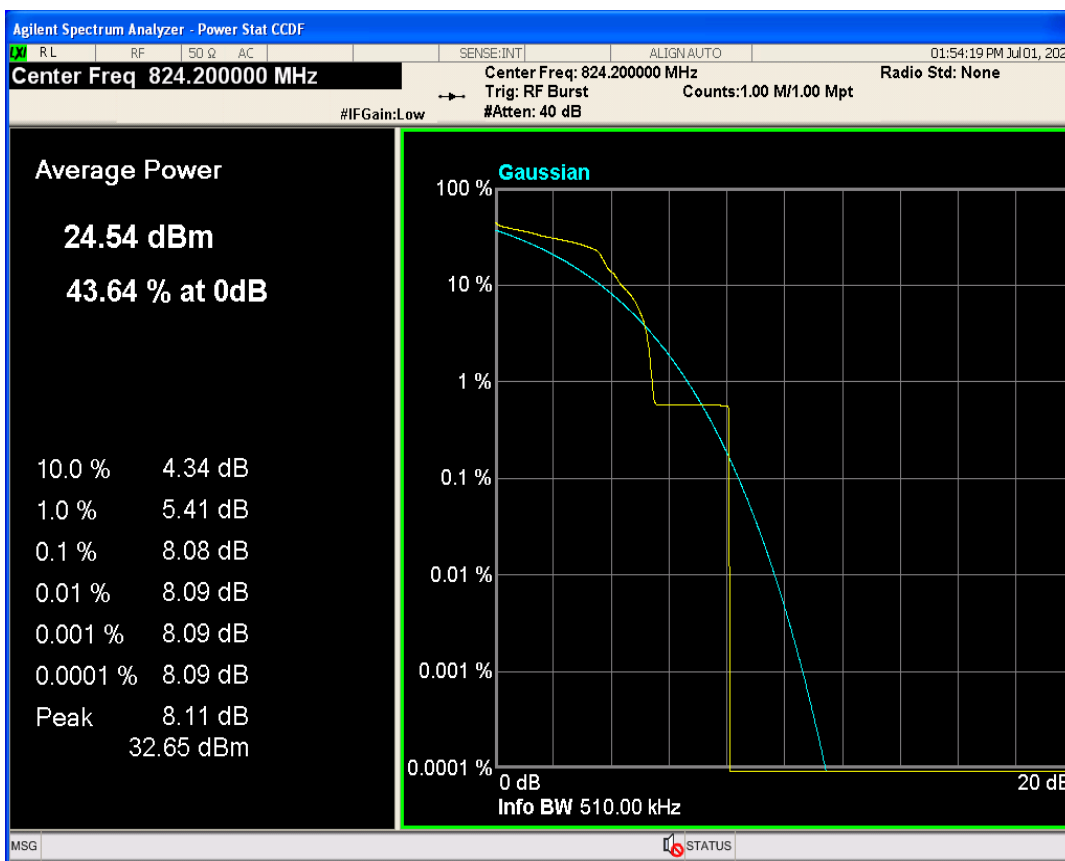

EGPRS850 Channel=189

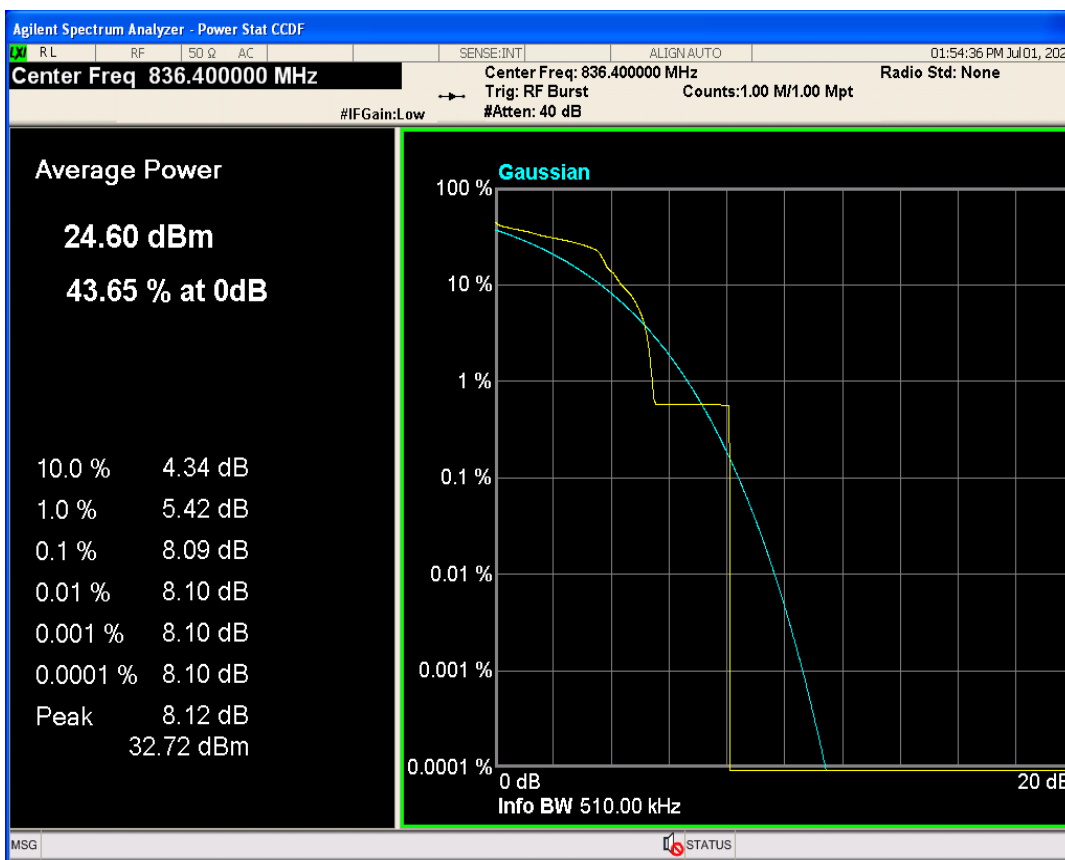


EGPRS850 Channel=251

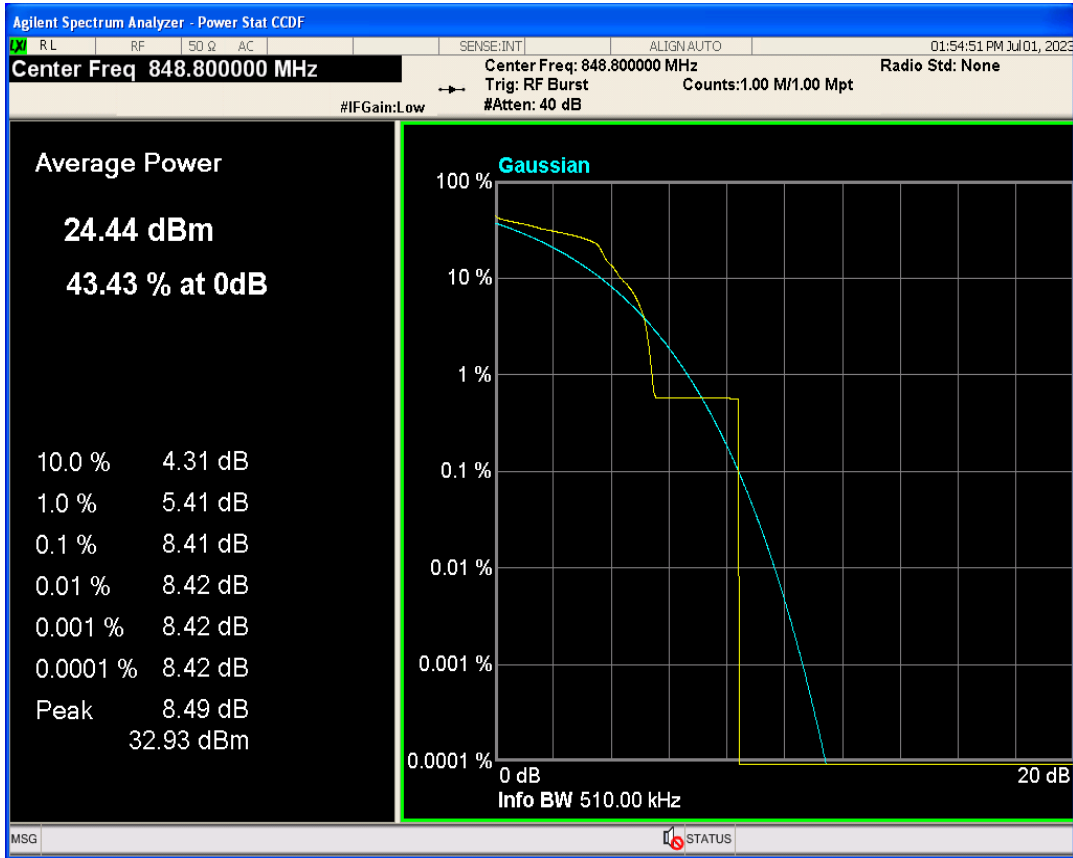


**Occupied bandwidth**

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
EGPRS1900	512	1850.2	251.808	314.944	PASS
EGPRS1900	661	1880	249.139	317.365	PASS
EGPRS1900	810	1909.8	254.652	323.292	PASS
EGPRS850	128	824.2	251.742	325.326	PASS
EGPRS850	189	836.4	252.313	303.157	PASS
EGPRS850	251	848.8	241.741	304.286	PASS


EGPRS1900 Channel=512

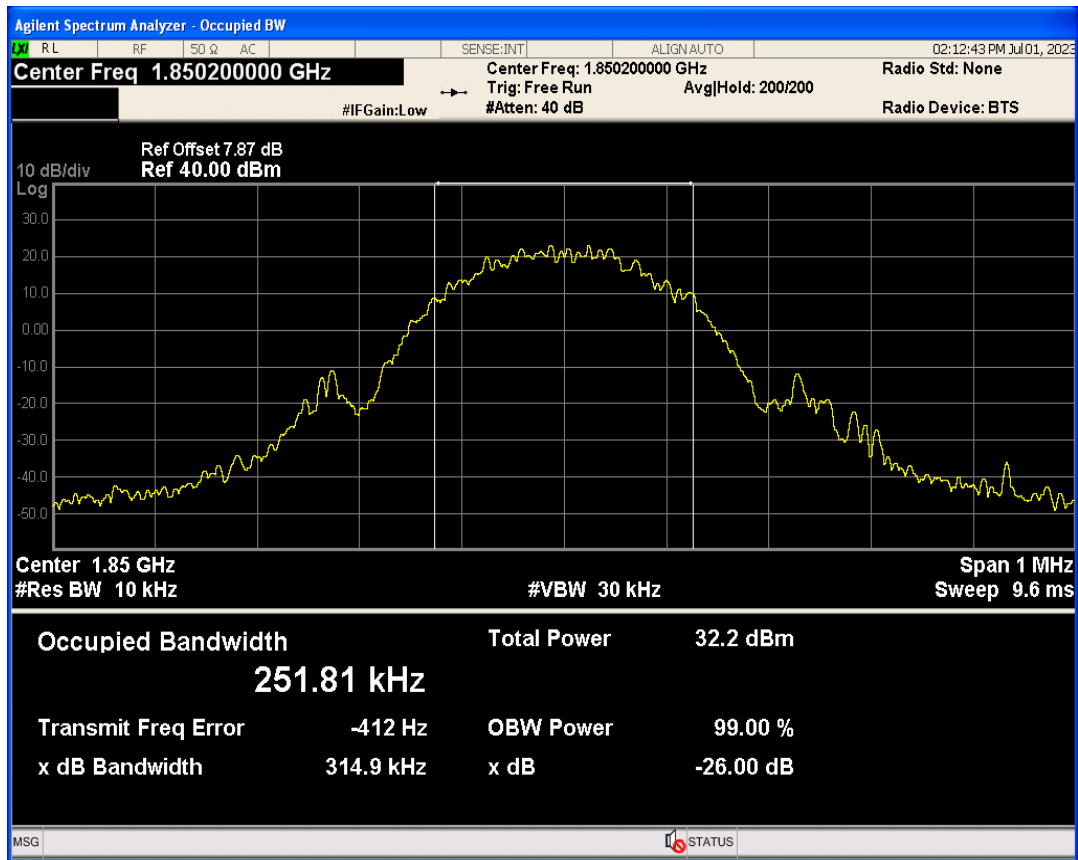


EGPRS1900 Channel=661

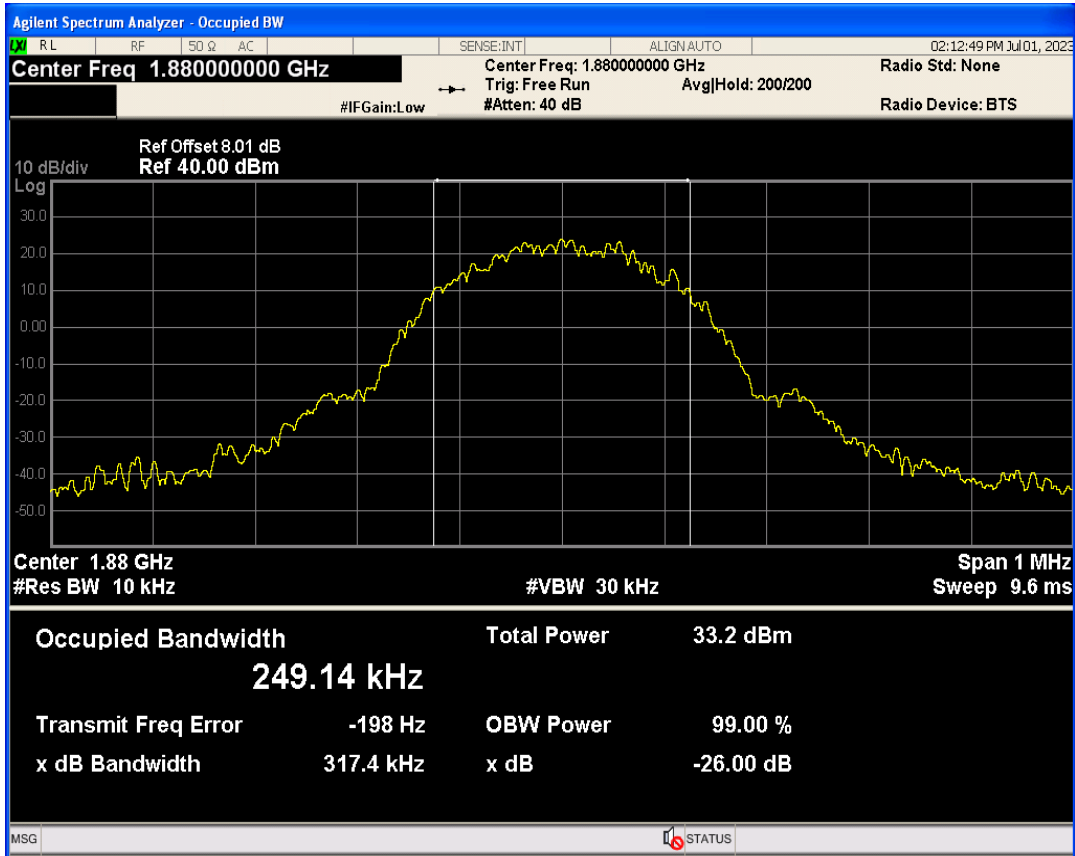


EGPRS1900 Channel=810

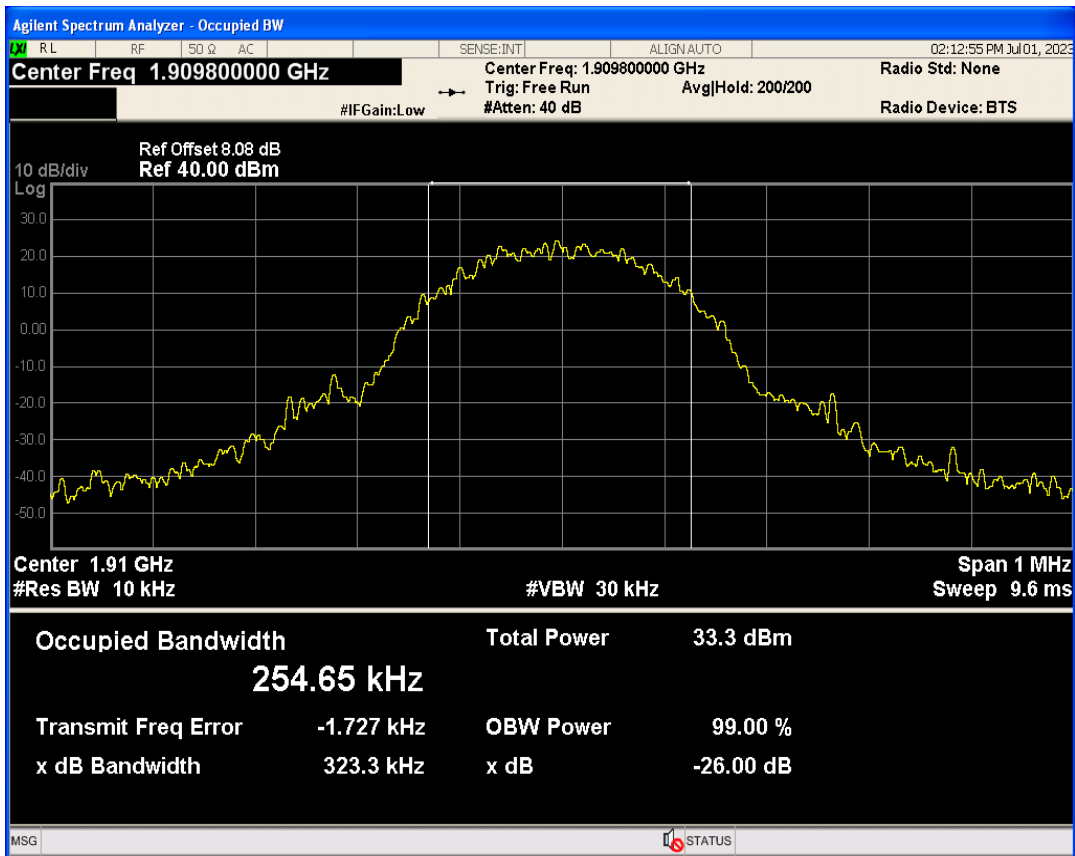

EGPRS850 Channel=128

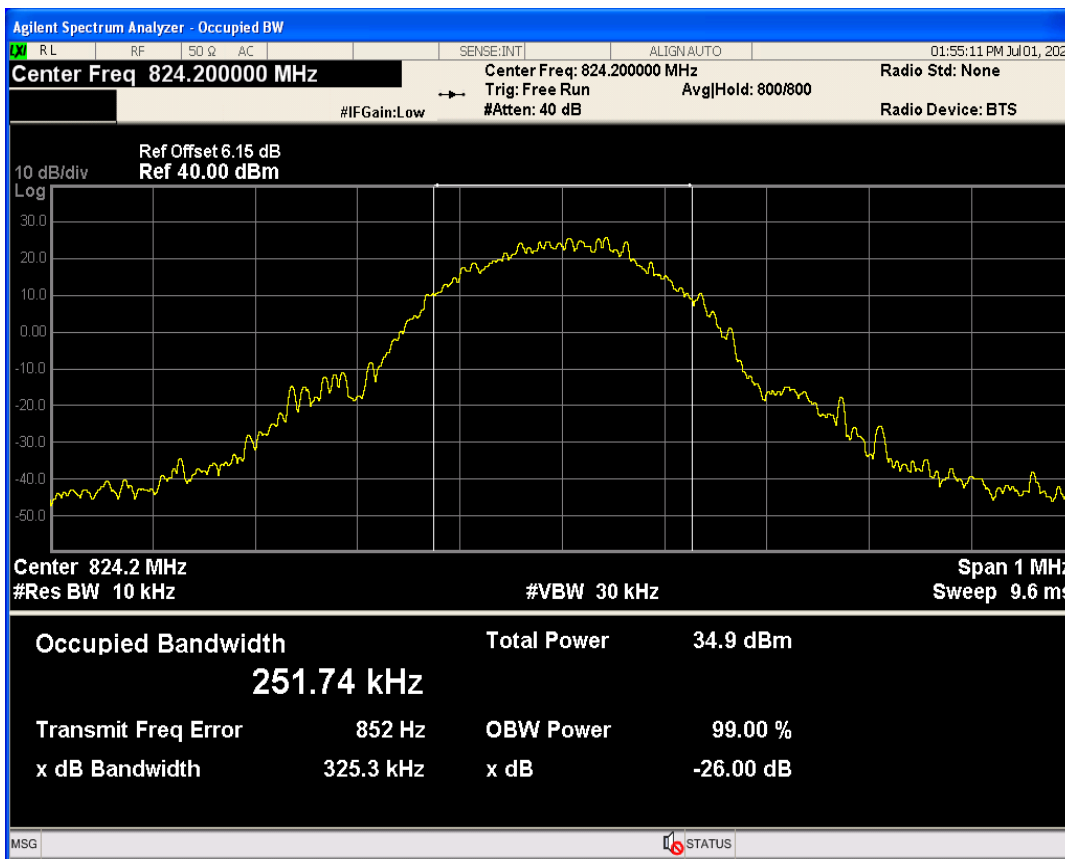


EGPRS850 Channel=251

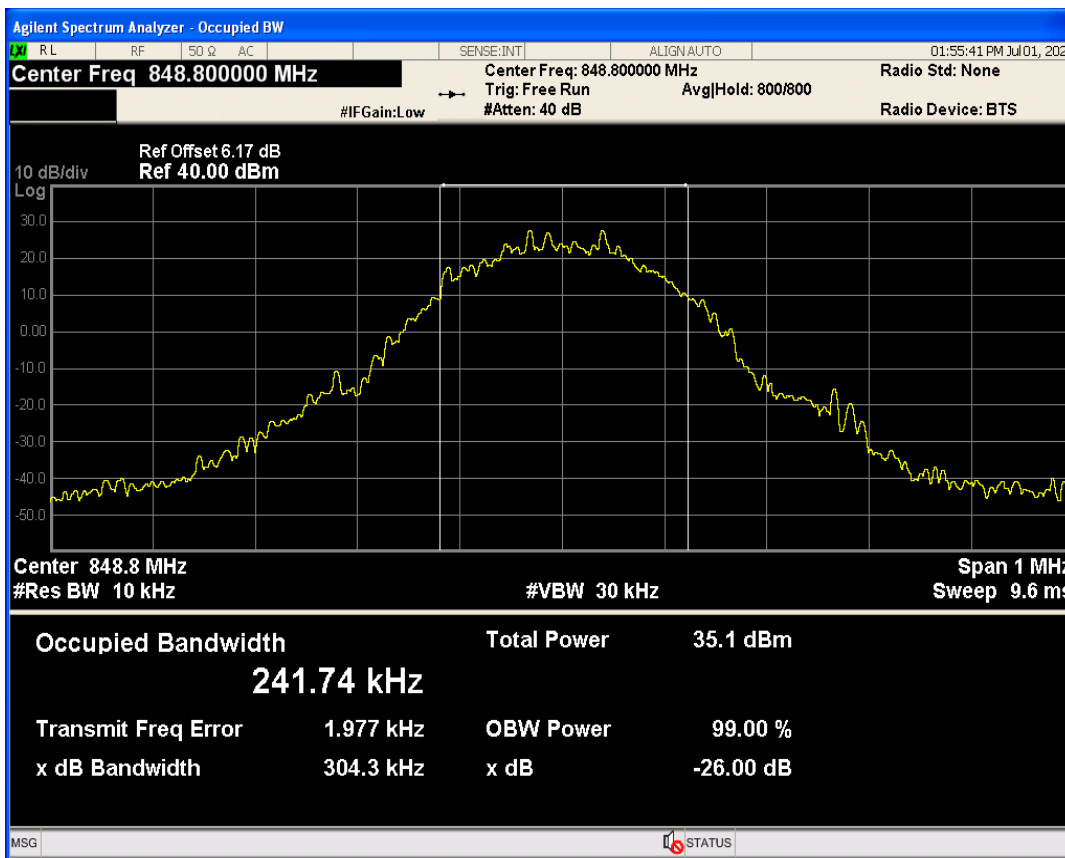

EGPRS850 Channel=189




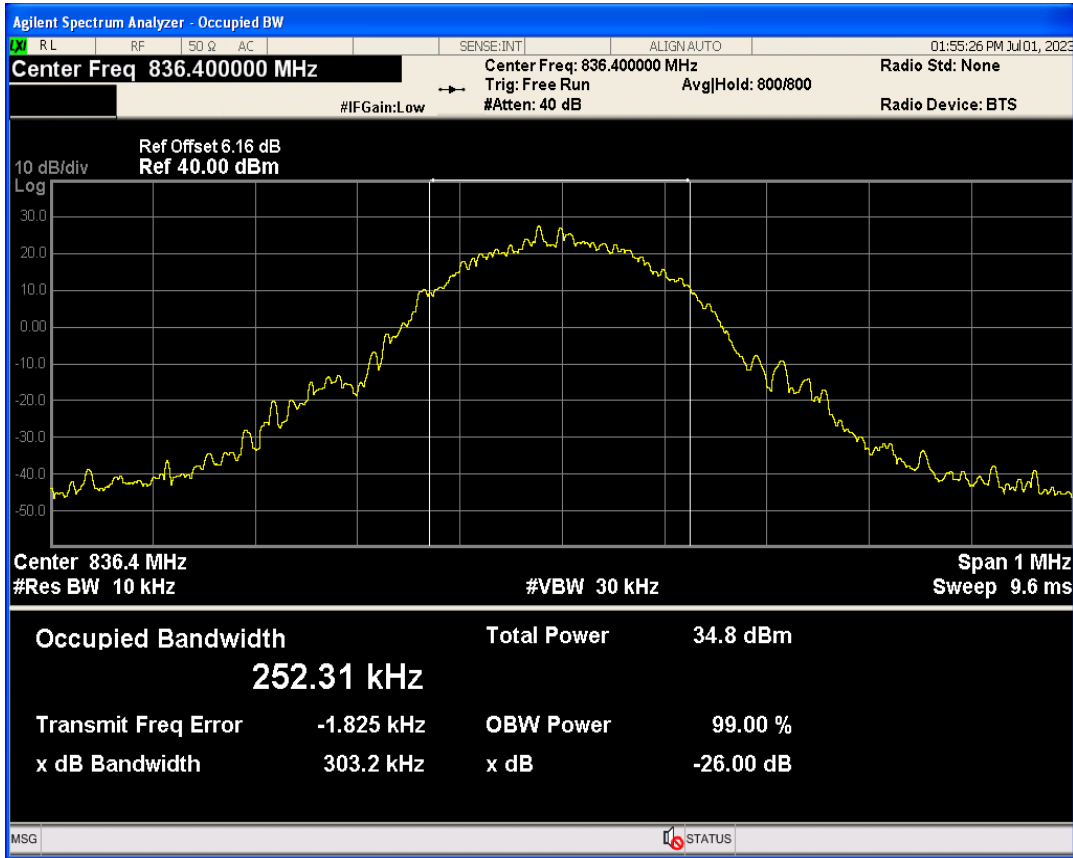


**Band edge**

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	1849.99	-38.35	-13	PASS
EGPRS1900	810	1909.8	1910.01	-36.15	-13	PASS
EGPRS850	128	824.2	823.98	-36.17	-13	PASS
EGPRS850	251	848.8	849.03	-35.65	-13	PASS


EGPRS1900 Channel=810

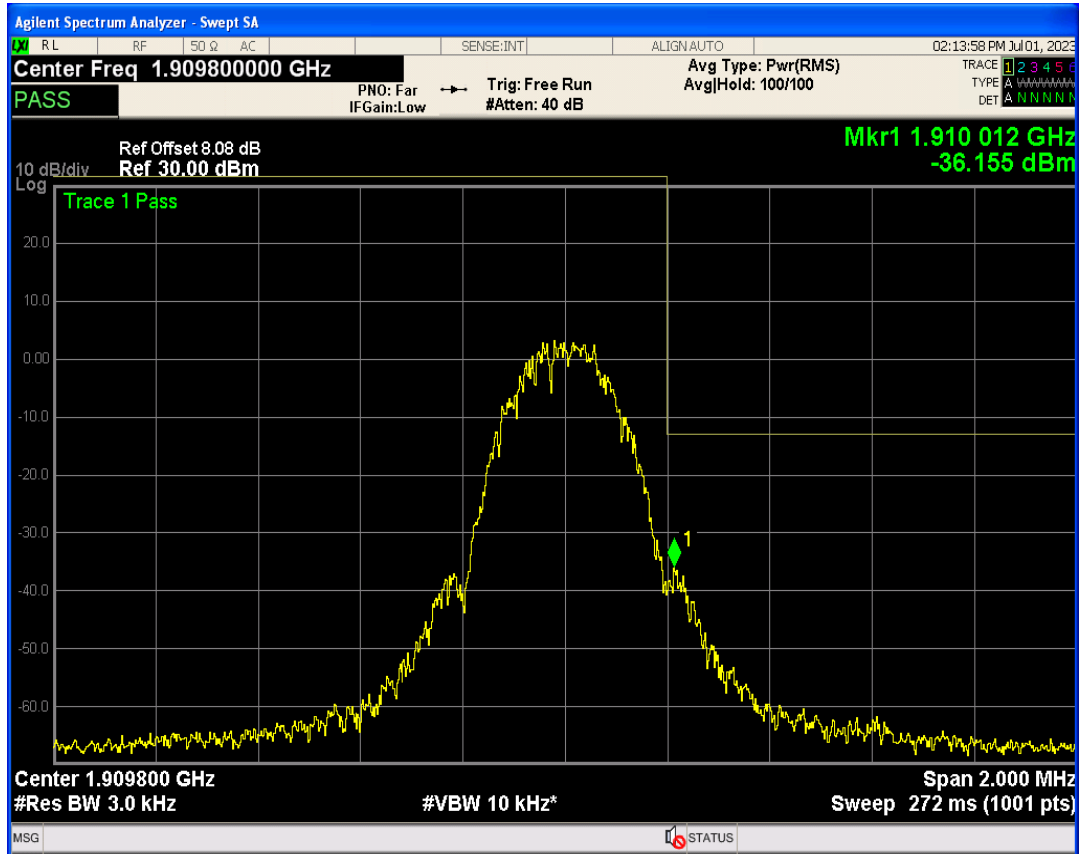


EGPRS1900 Channel=512

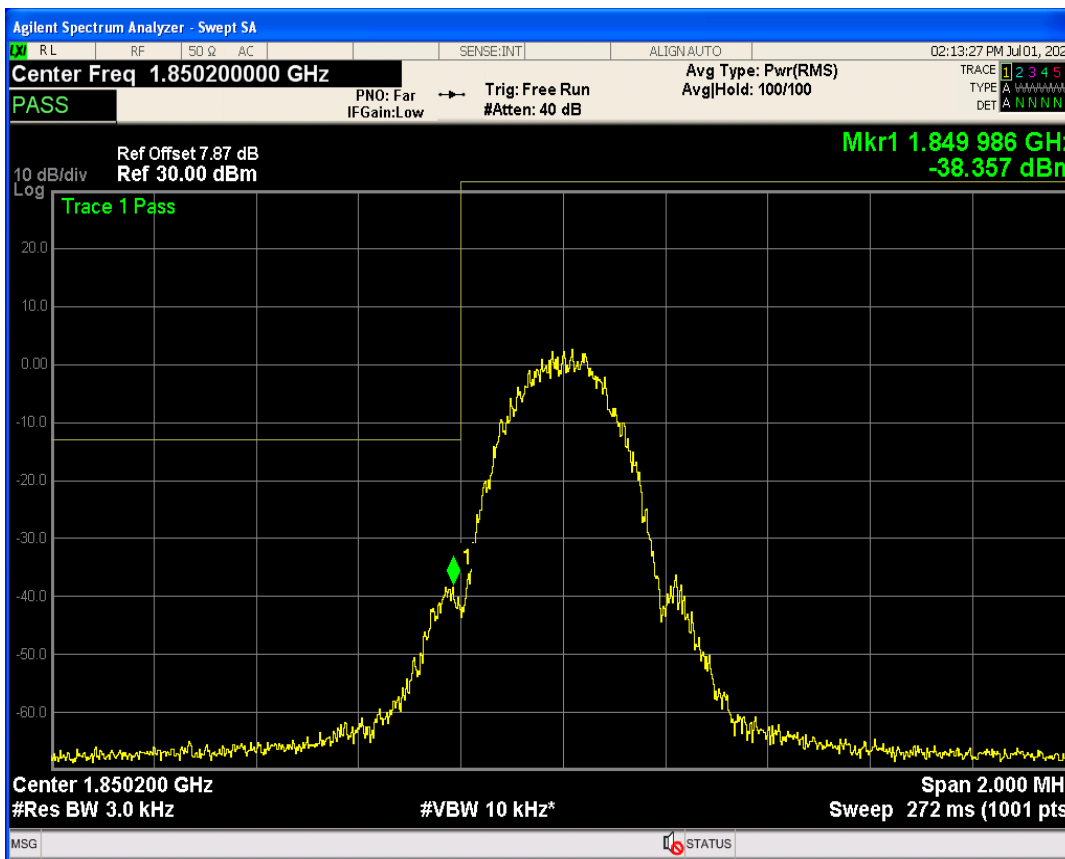

EGPRS850 Channel=128

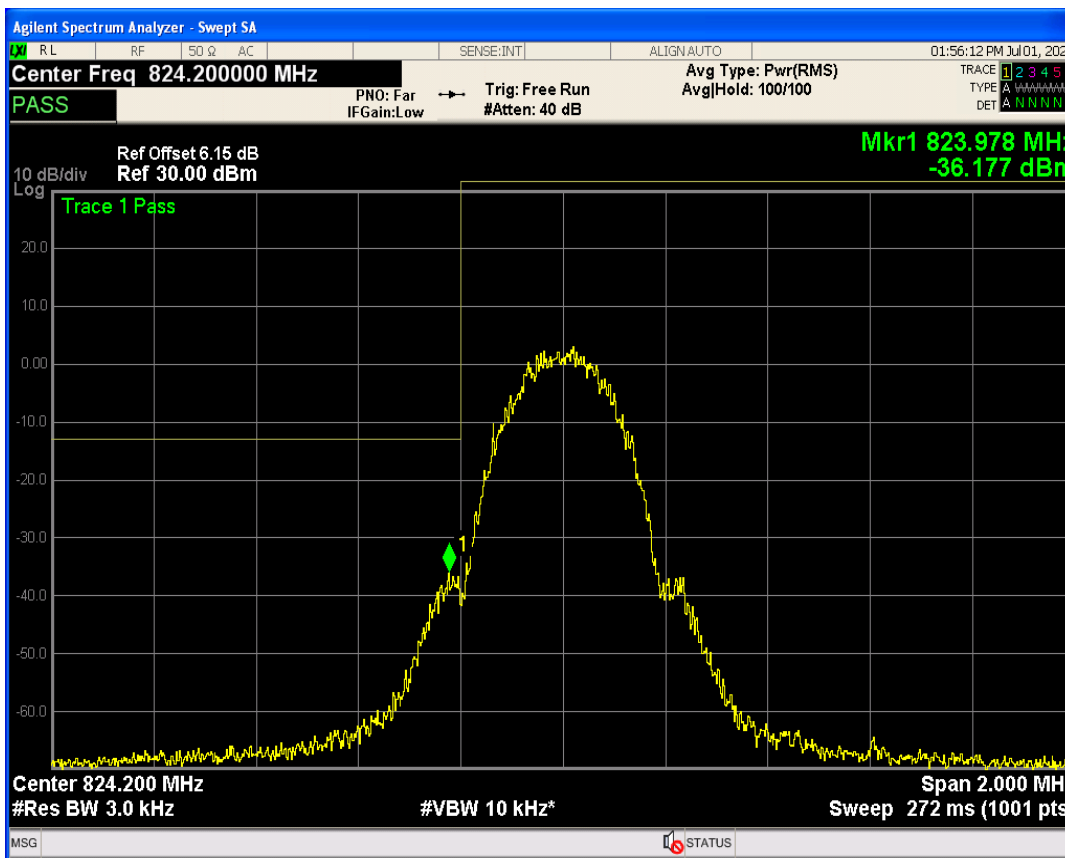


EGPRS850 Channel=251

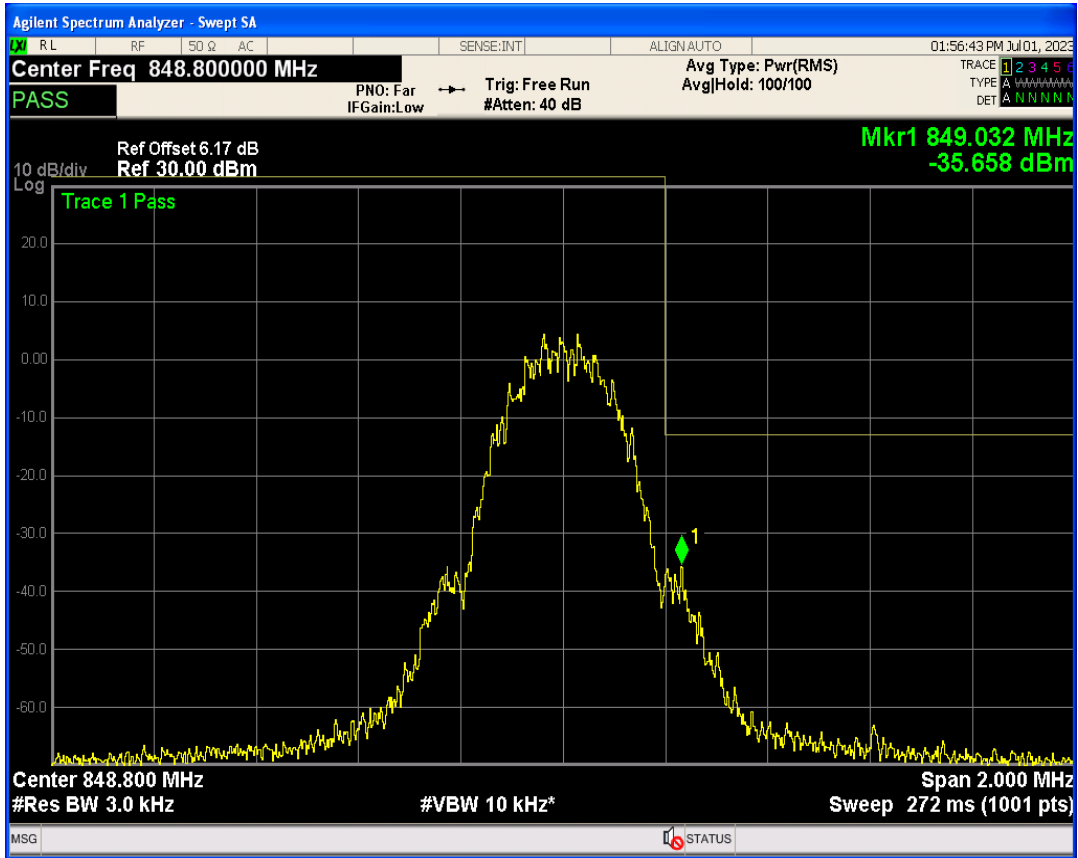


**Out-of-band emissions**

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	26229.34	-18.89	-13	PASS
EGPRS1900	661	1880	25985.82	-18.69	-13	PASS
EGPRS1900	810	1909.8	25476.27	-18.36	-13	PASS
EGPRS850	128	824.2	26005.01	-20.41	-13	PASS
EGPRS850	189	836.4	26023.54	-20.03	-13	PASS
EGPRS850	251	848.8	26156.55	-19.86	-13	PASS


EGPRS1900 Channel=512

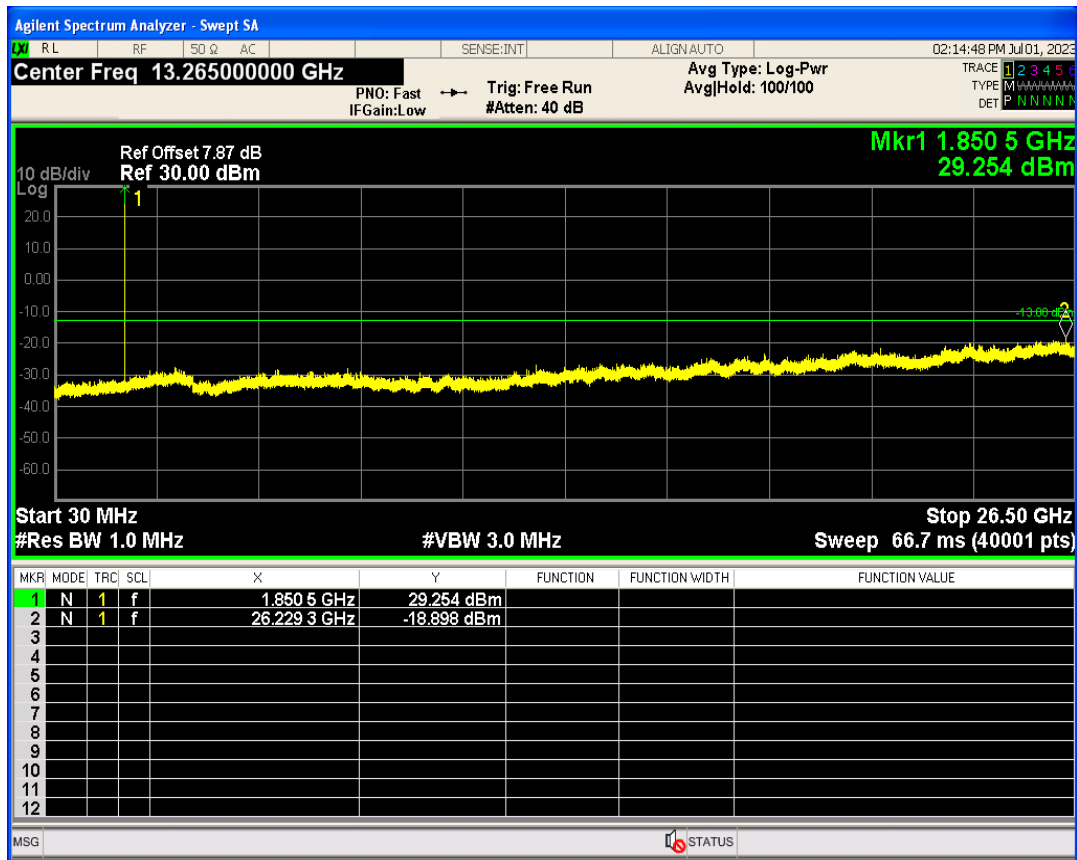


EGPRS1900 Channel=661

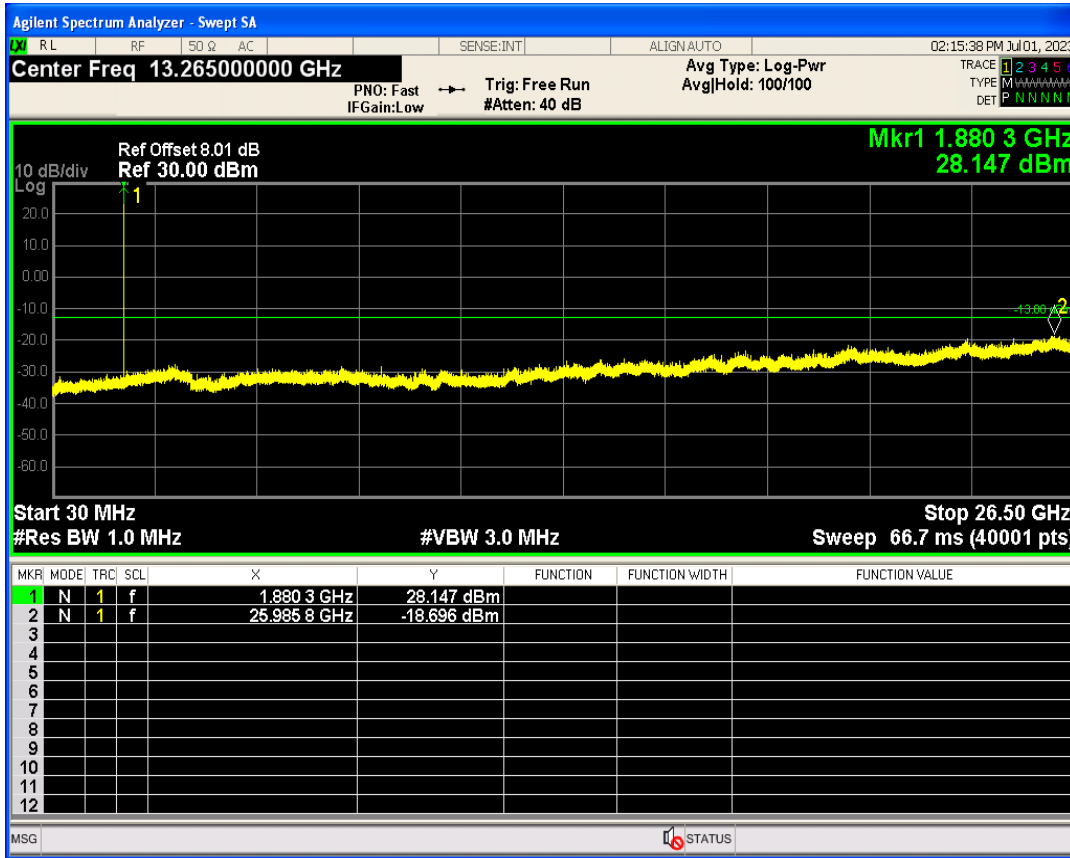


EGPRS1900 Channel=810

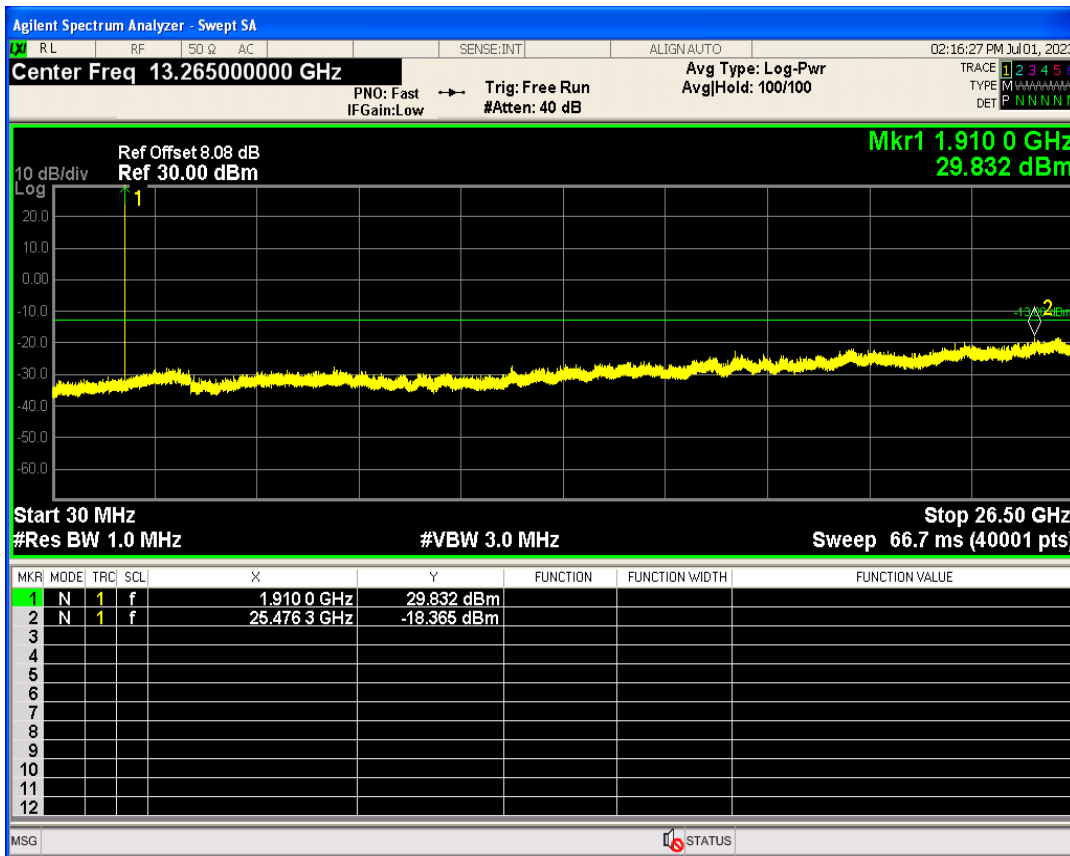


EGPRS850 Channel=189

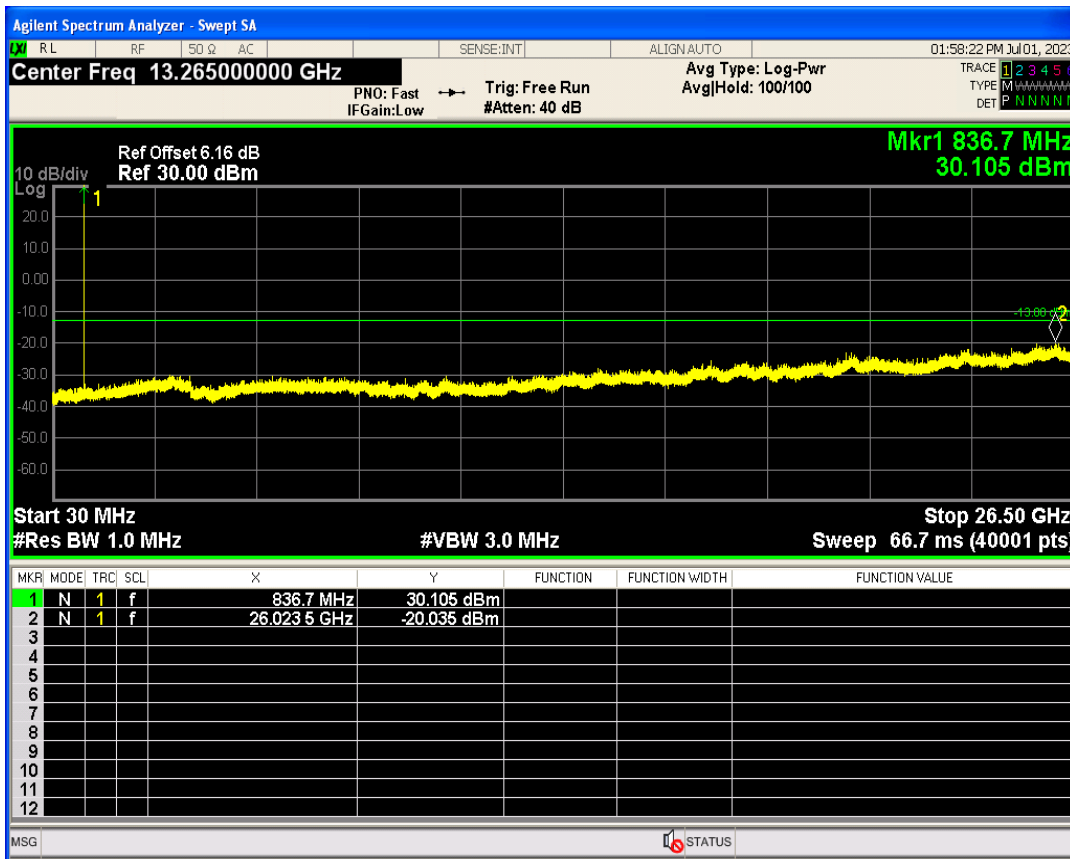

EGPRS850 Channel=128

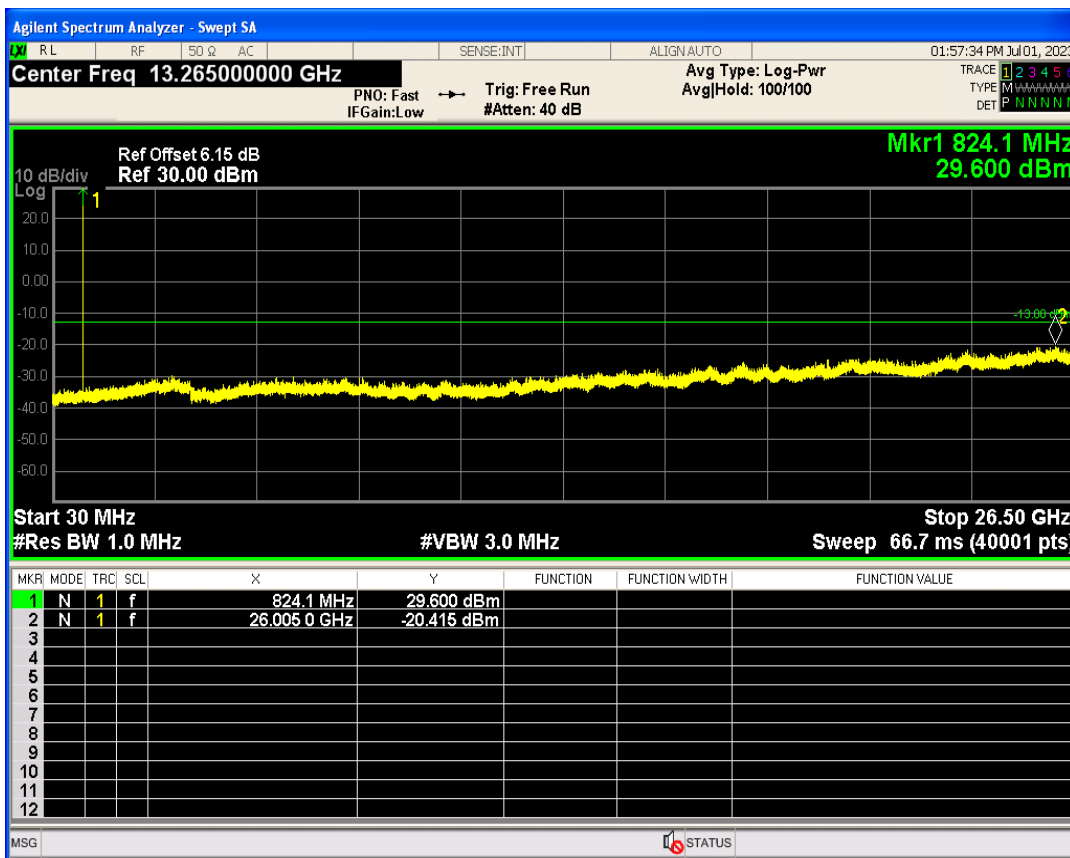

EGPRS850 Channel=251

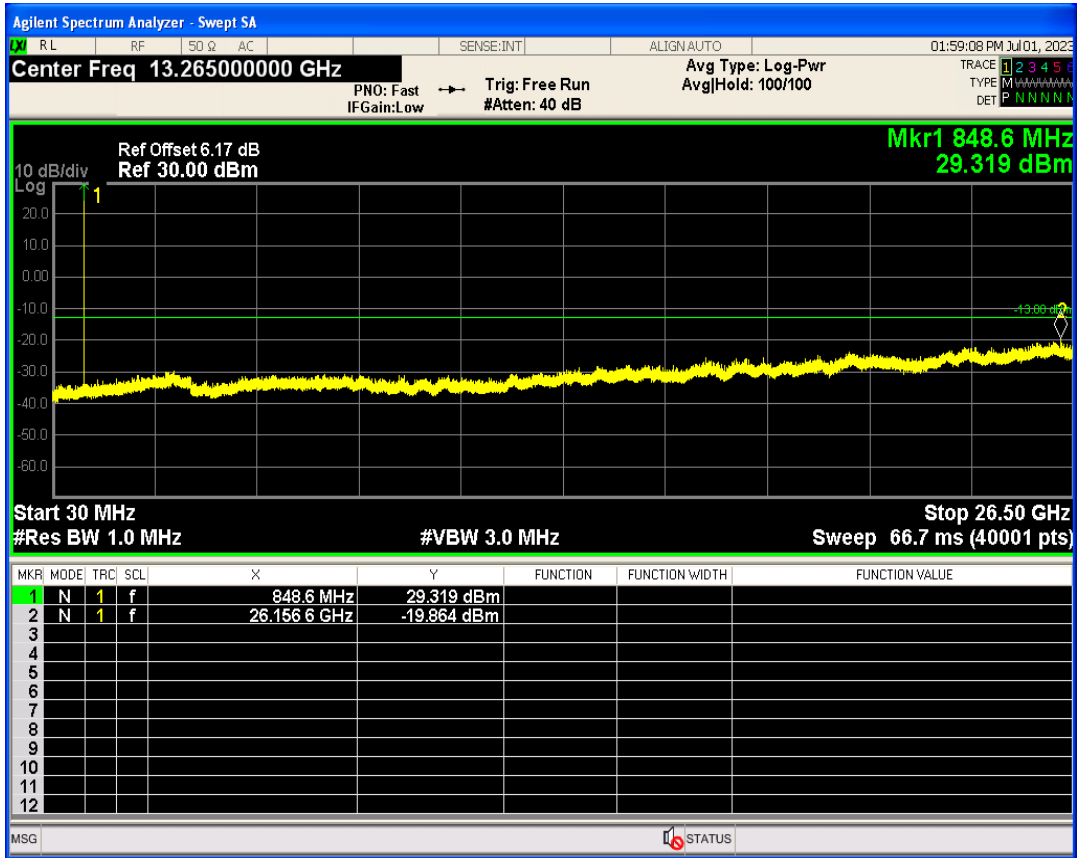




**Conducted output power**

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
GPRS1900 1 Slot	512	1850.2	32.08	PASS
GPRS1900 1 Slot	661	1880	32.11	PASS
GPRS1900 1 Slot	810	1909.8	31.81	PASS
GPRS1900 2 Slot	512	1850.2	31.19	PASS
GPRS1900 2 Slot	661	1880	31.18	PASS
GPRS1900 2 Slot	810	1909.8	30.90	PASS
GPRS1900 3 Slot	512	1850.2	29.16	PASS
GPRS1900 3 Slot	661	1880	29.14	PASS
GPRS1900 3 Slot	810	1909.8	28.89	PASS
GPRS1900 4 Slot	512	1850.2	28.11	PASS
GPRS1900 4 Slot	661	1880	28.15	PASS
GPRS1900 4 Slot	810	1909.8	27.89	PASS
GPRS850 1 Slot	128	824.2	33.48	PASS
GPRS850 1 Slot	189	836.4	33.43	PASS
GPRS850 1 Slot	251	848.8	33.49	PASS
GPRS850 2 Slot	128	824.2	32.74	PASS
GPRS850 2 Slot	189	836.4	32.69	PASS
GPRS850 2 Slot	251	848.8	32.76	PASS
GPRS850 3 Slot	128	824.2	30.98	PASS
GPRS850 3 Slot	189	836.4	30.97	PASS
GPRS850 3 Slot	251	848.8	31.05	PASS
GPRS850 4 Slot	128	824.2	29.85	PASS
GPRS850 4 Slot	189	836.4	29.87	PASS
GPRS850 4 Slot	251	848.8	29.94	PASS


**Peak-to-Average Ratio**

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.66	13.00	PASS
GPRS1900	661	1880	2.67	13.00	PASS
GPRS1900	810	1909.8	2.63	13.00	PASS
GPRS850	128	824.2	2.66	13.00	PASS
GPRS850	189	836.4	2.68	13.00	PASS
GPRS850	251	848.8	2.67	13.00	PASS


GPRS1900 Channel=512

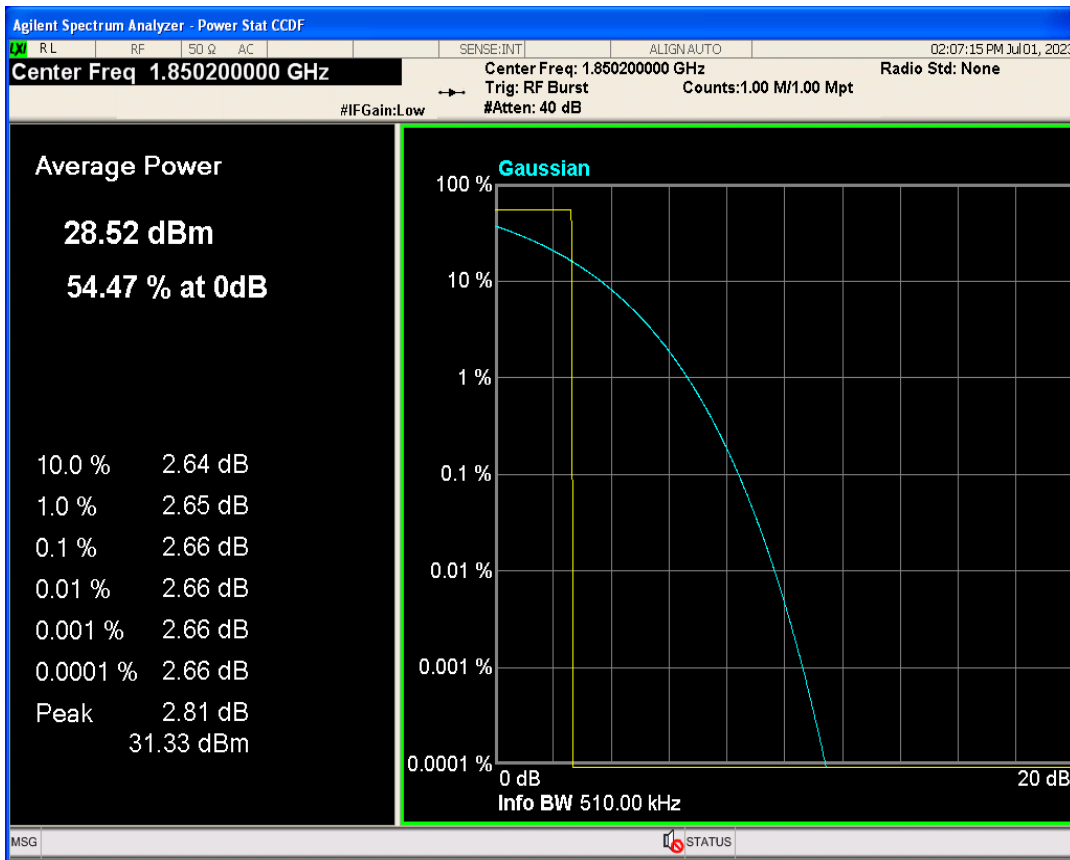


GPRS1900 Channel=661

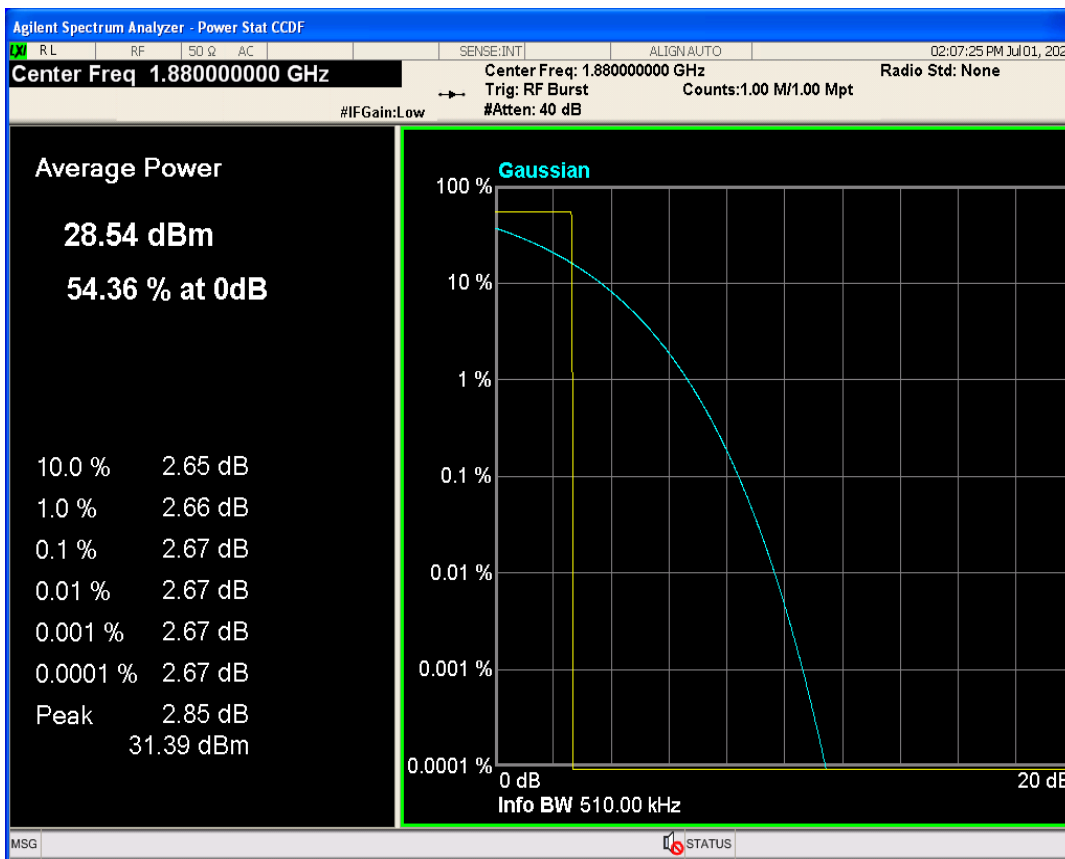

GPRS1900 Channel=810

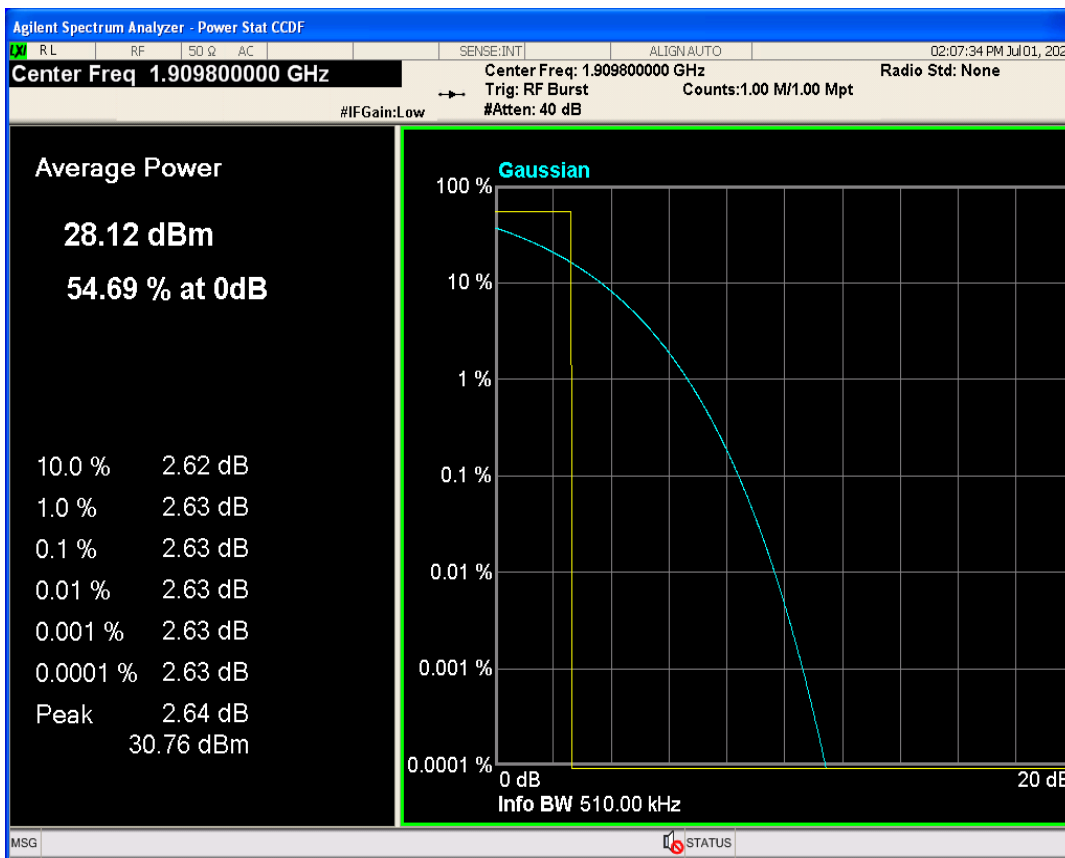


GPRS850 Channel=128

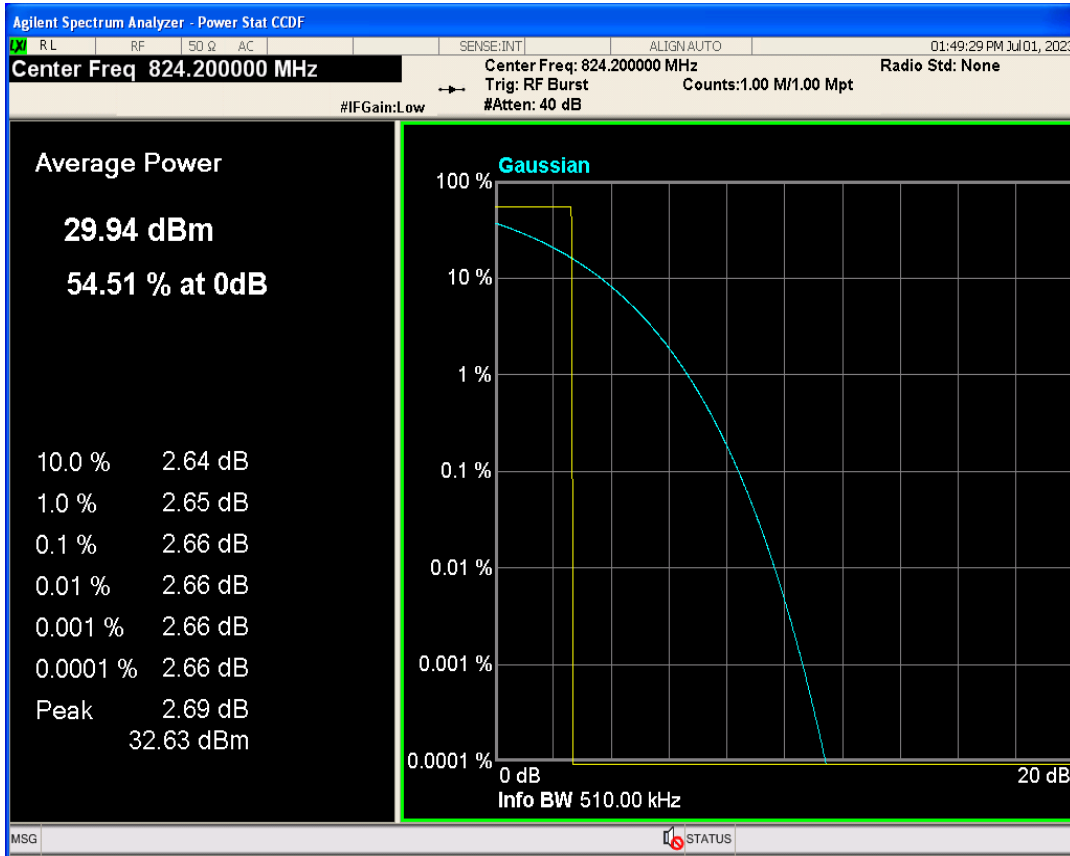

GPRS850 Channel=251




GPRS850 Channel=189

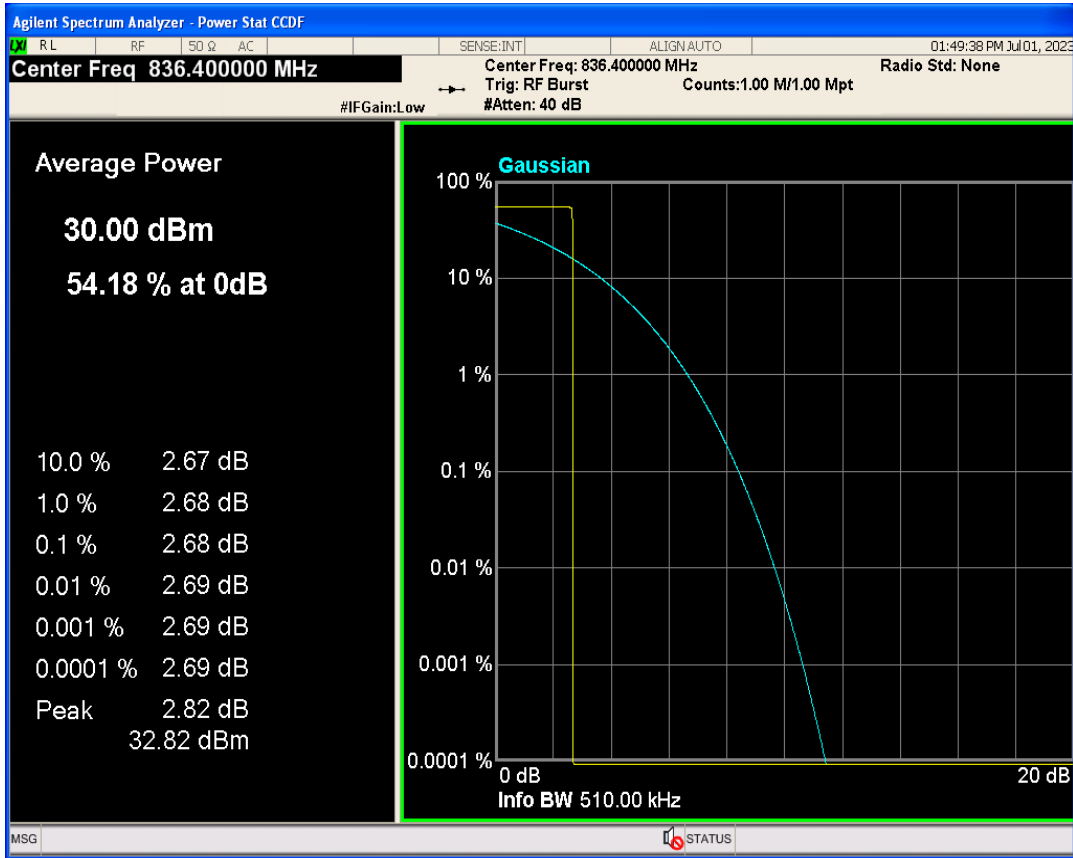


**Occupied bandwidth**

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	242.914	310.154	PASS
GPRS1900	661	1880	245.304	318.389	PASS
GPRS1900	810	1909.8	245.596	313.546	PASS
GPRS850	128	824.2	248.717	315.219	PASS
GPRS850	189	836.4	247.476	321.218	PASS
GPRS850	251	848.8	251.591	316.803	PASS


GPRS1900 Channel=512

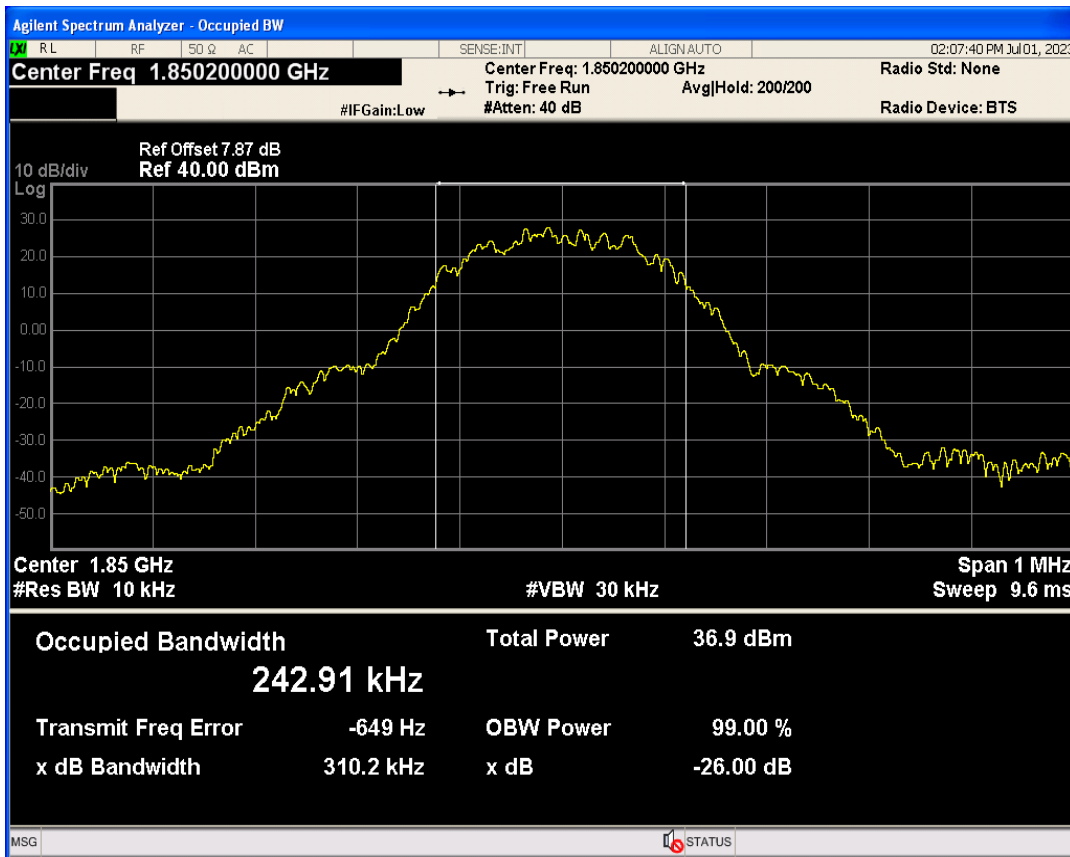


GPRS1900 Channel=810

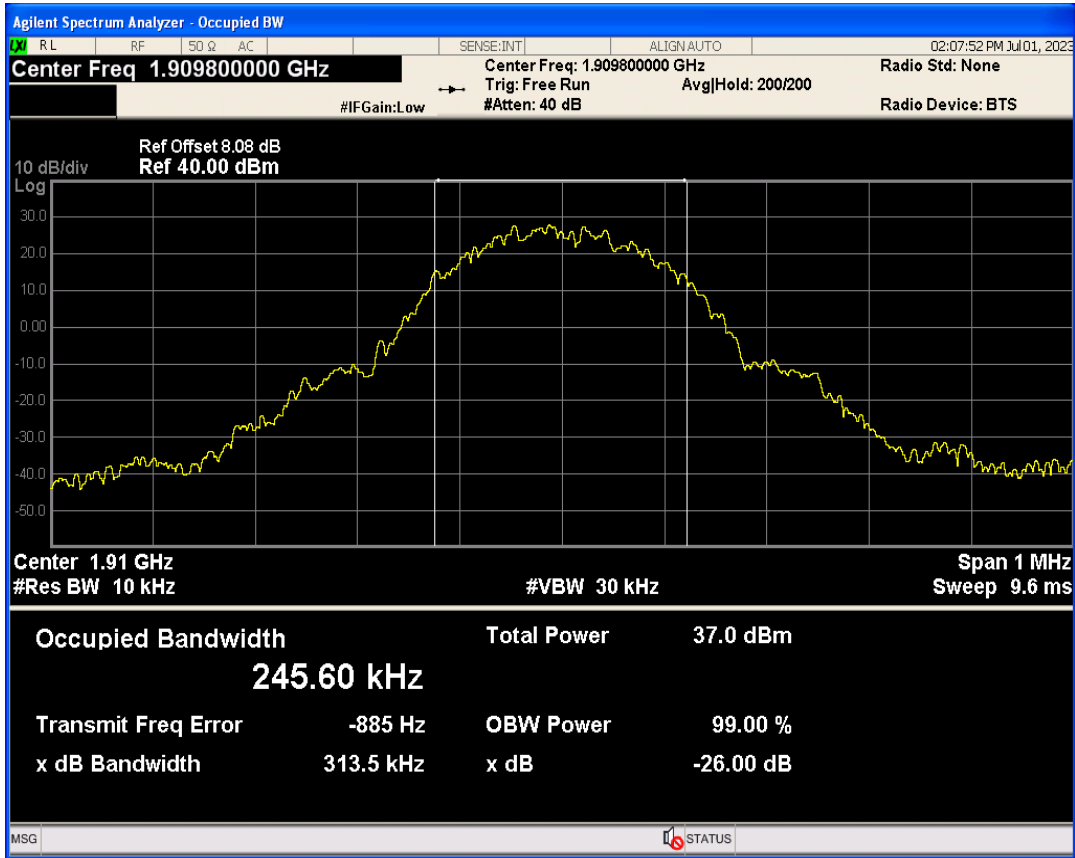


GPRS1900 Channel=661

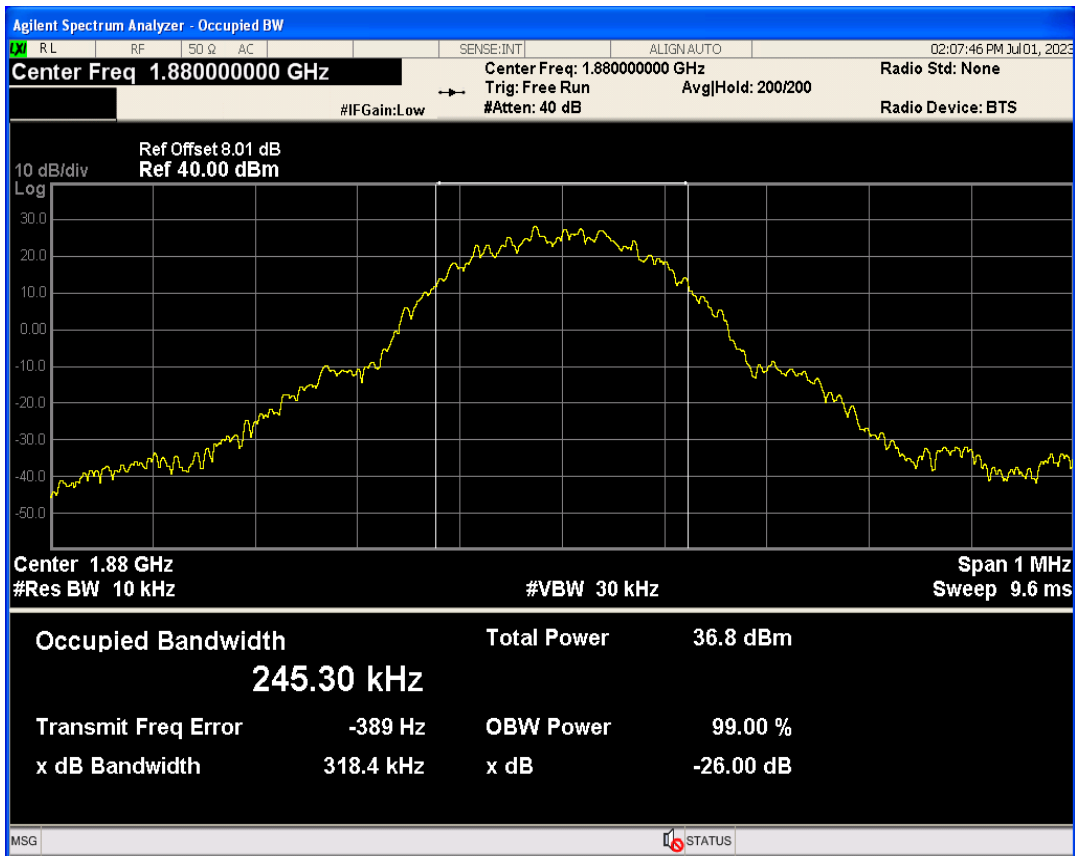

GPRS850 Channel=128

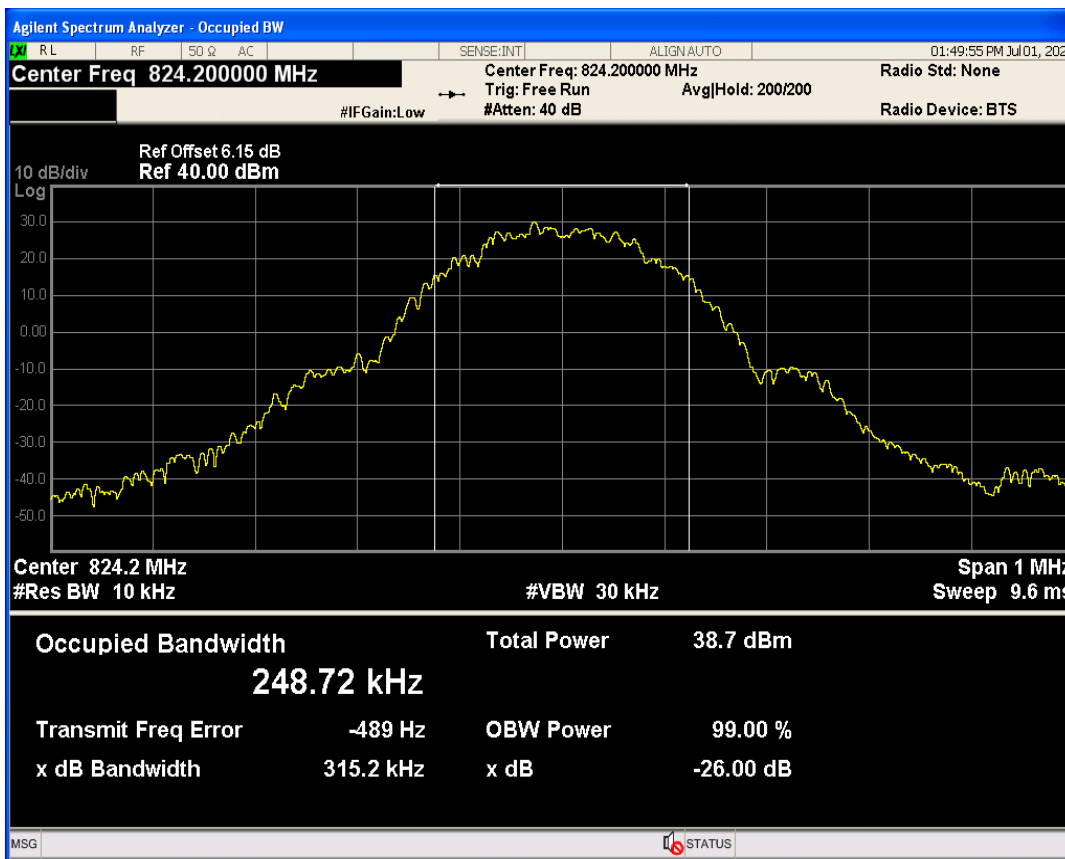


GPRS850 Channel=189

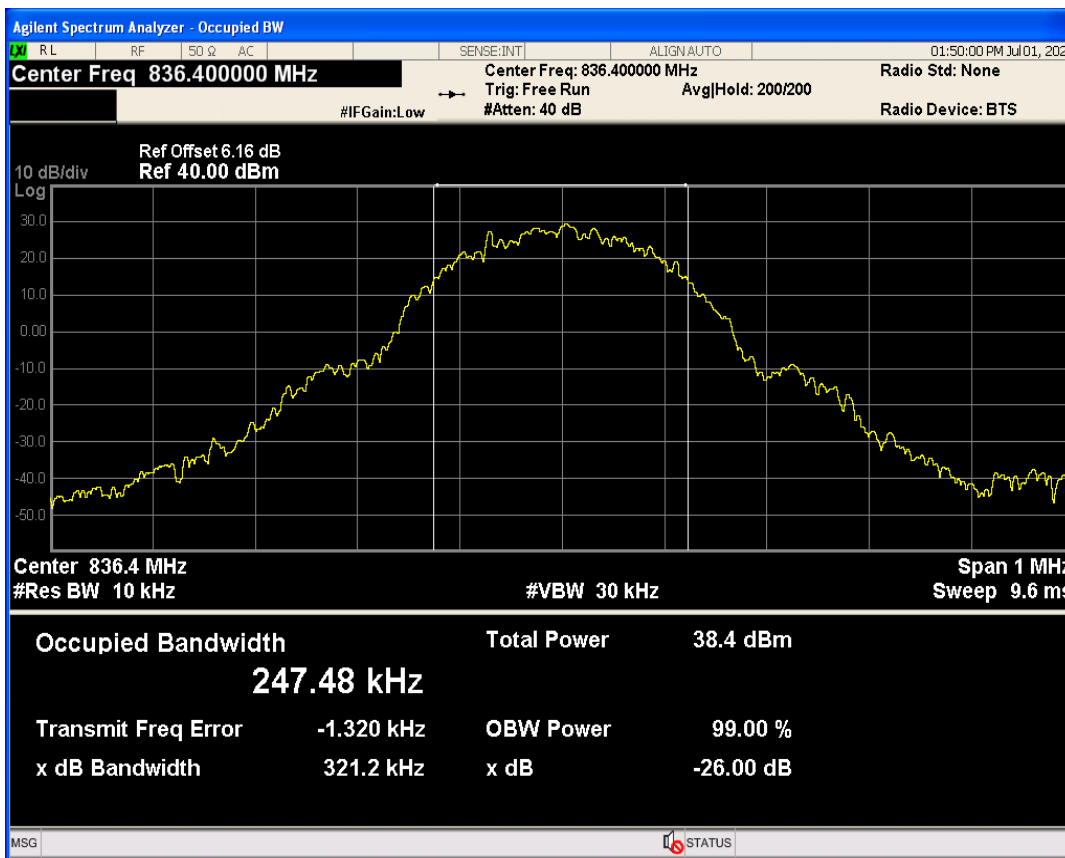

GPRS850 Channel=251




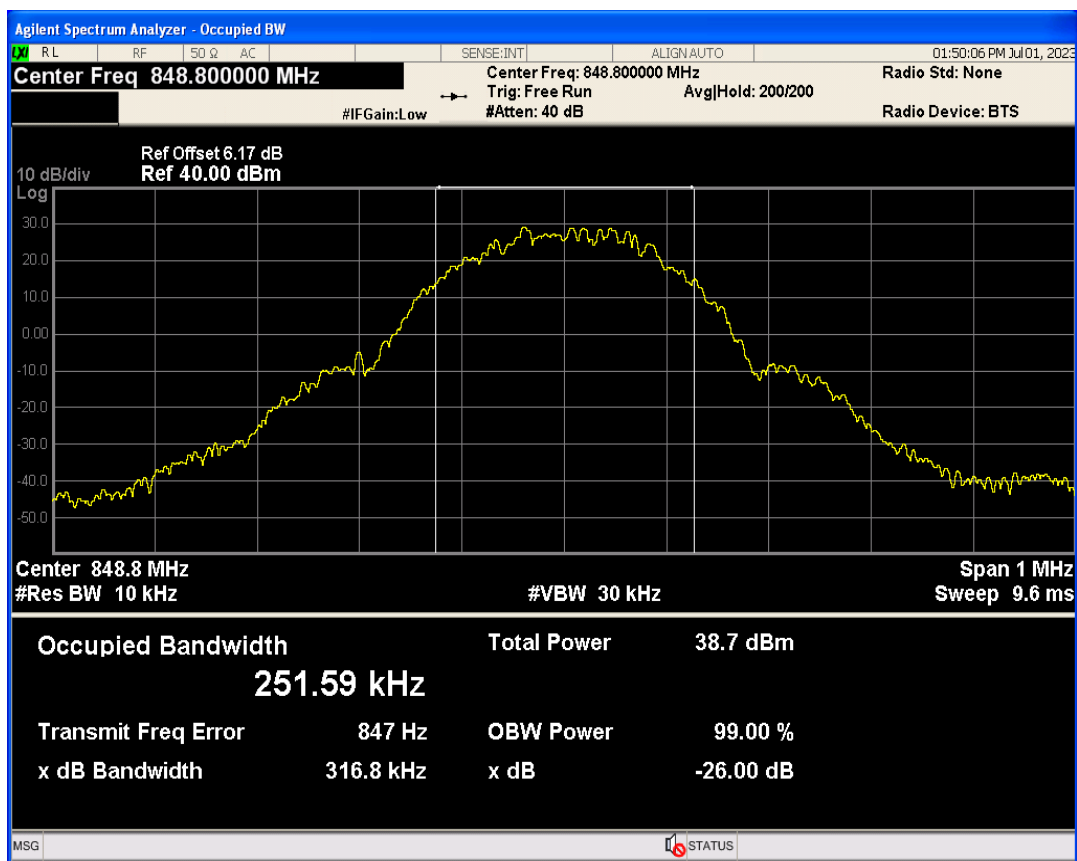


**Band edge**

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1849.98	-29.18	-13	PASS
GPRS1900	810	1909.8	1910.03	-29.67	-13	PASS
GPRS850	128	824.2	823.98	-28.68	-13	PASS
GPRS850	251	848.8	849.02	-27.13	-13	PASS


GPRS1900 Channel=512

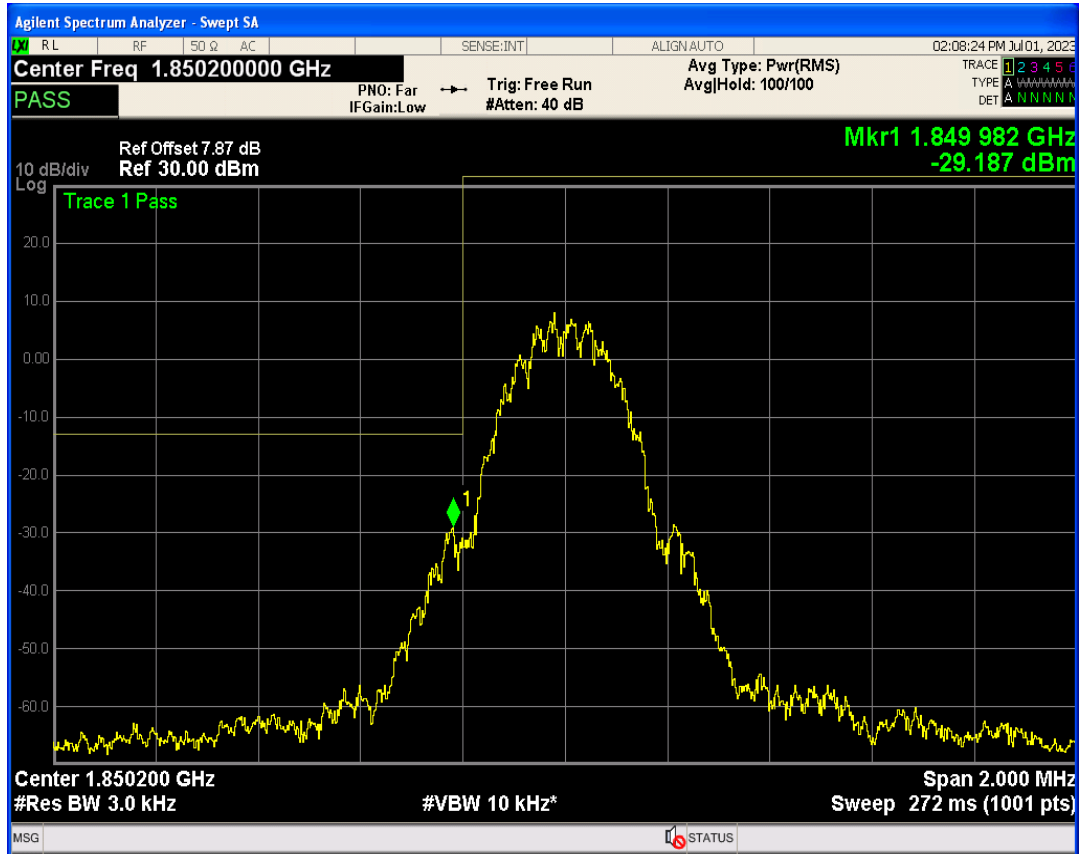


GPRS1900 Channel=810

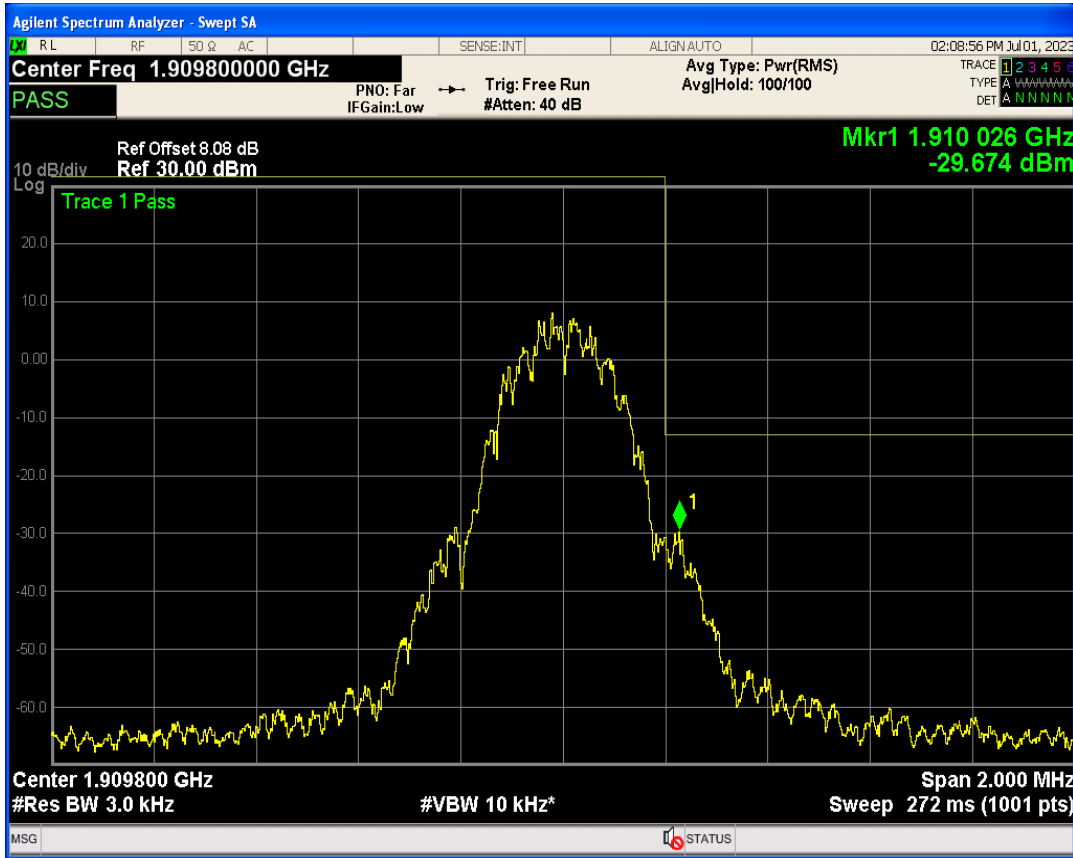

GPRS850 Channel=128

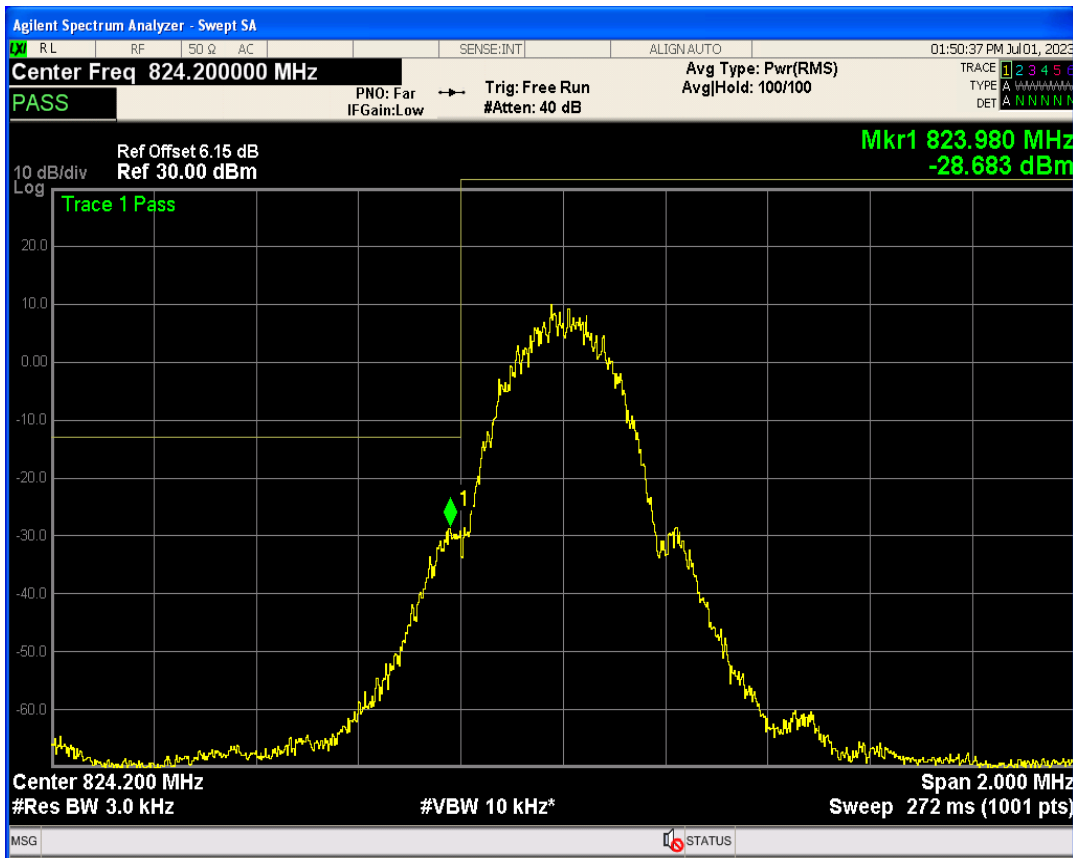


GPRS850 Channel=251

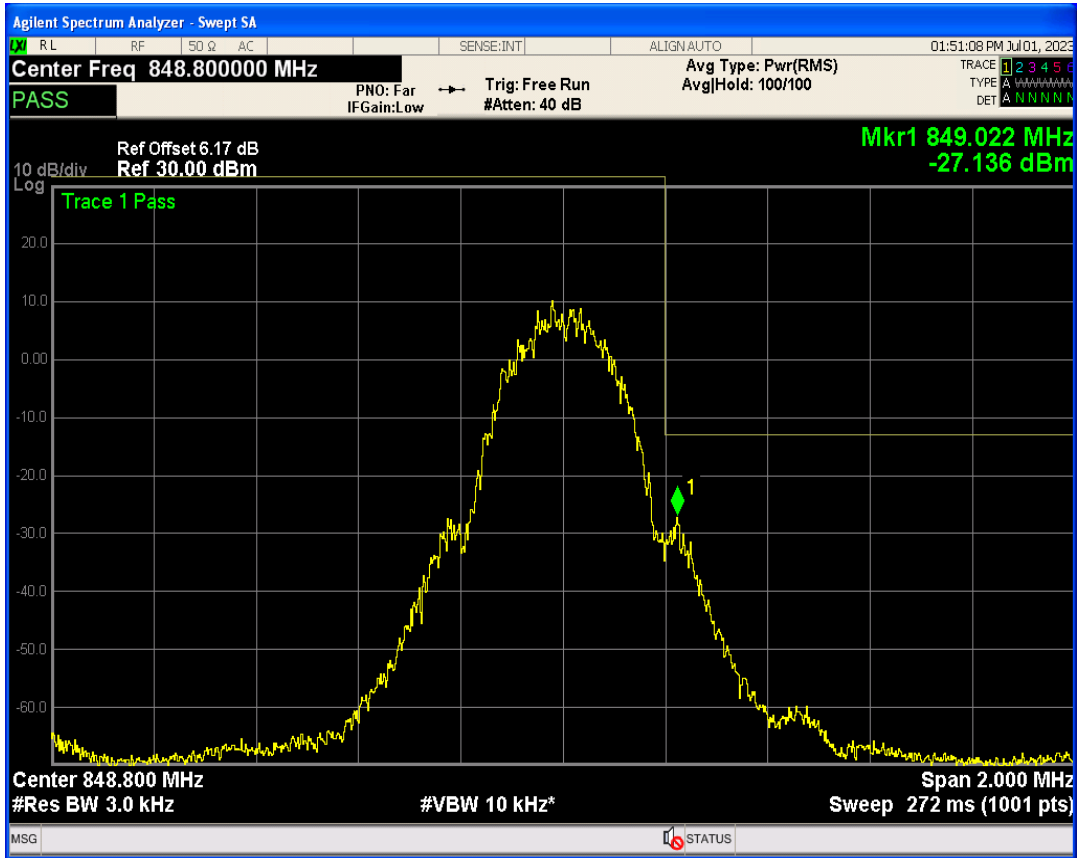


**Out-of-band emissions**

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	25997.07	-18.18	-13	PASS
GPRS1900	661	1880	26053.32	-18.73	-13	PASS
GPRS1900	810	1909.8	26070.52	-17.64	-13	PASS
GPRS850	128	824.2	26010.31	-20.48	-13	PASS
GPRS850	189	836.4	26020.23	-20.30	-13	PASS
GPRS850	251	848.8	25975.23	-20.13	-13	PASS


GPRS1900 Channel=512

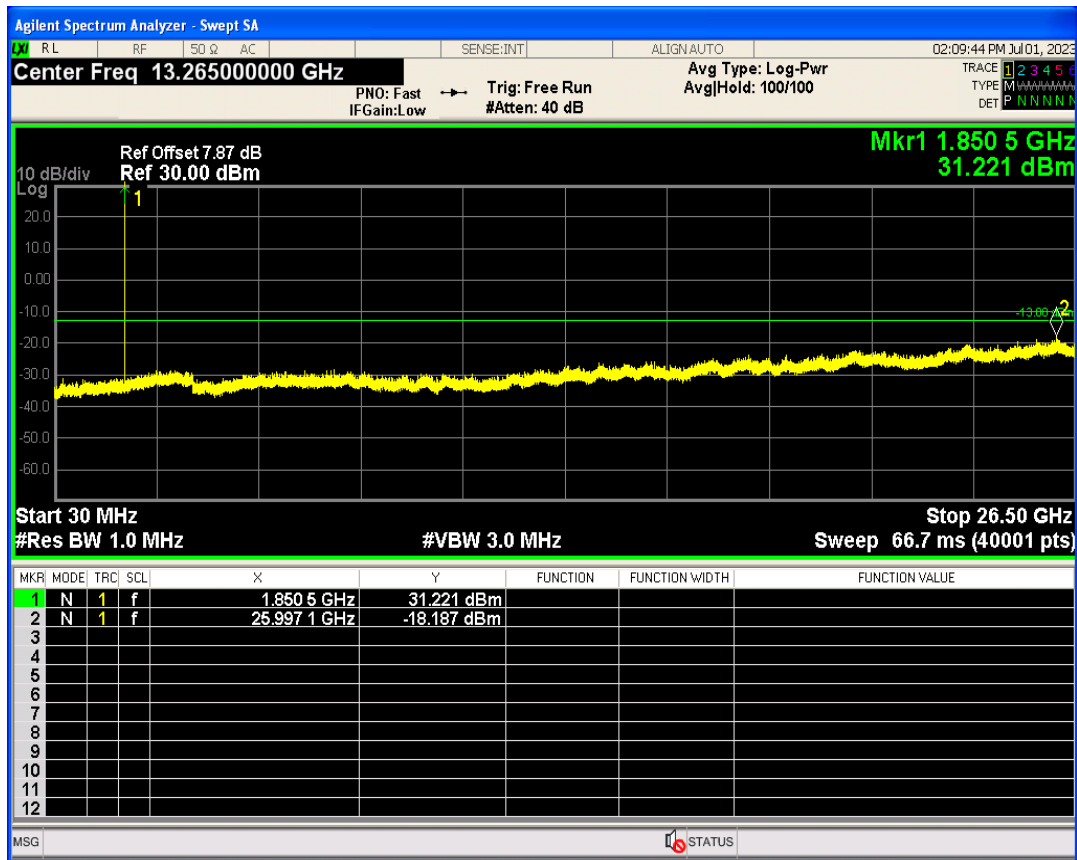


GPRS1900 Channel=661

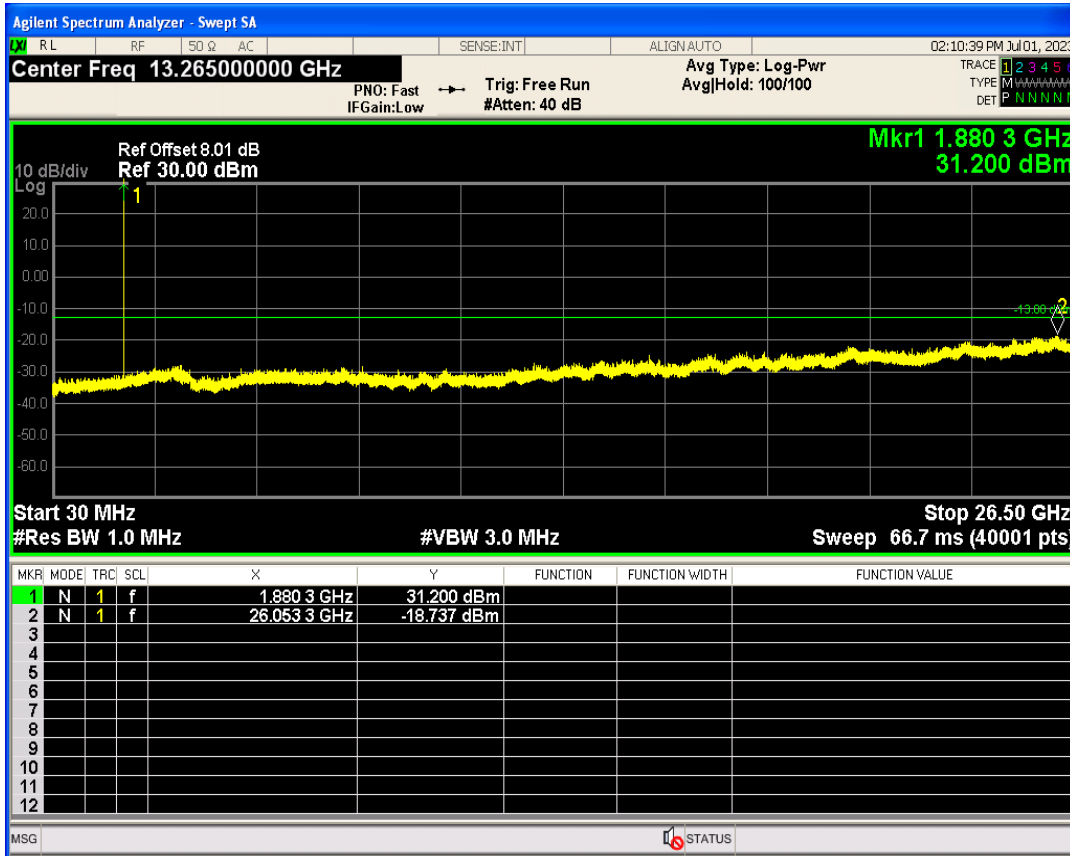


GPRS1900 Channel=810

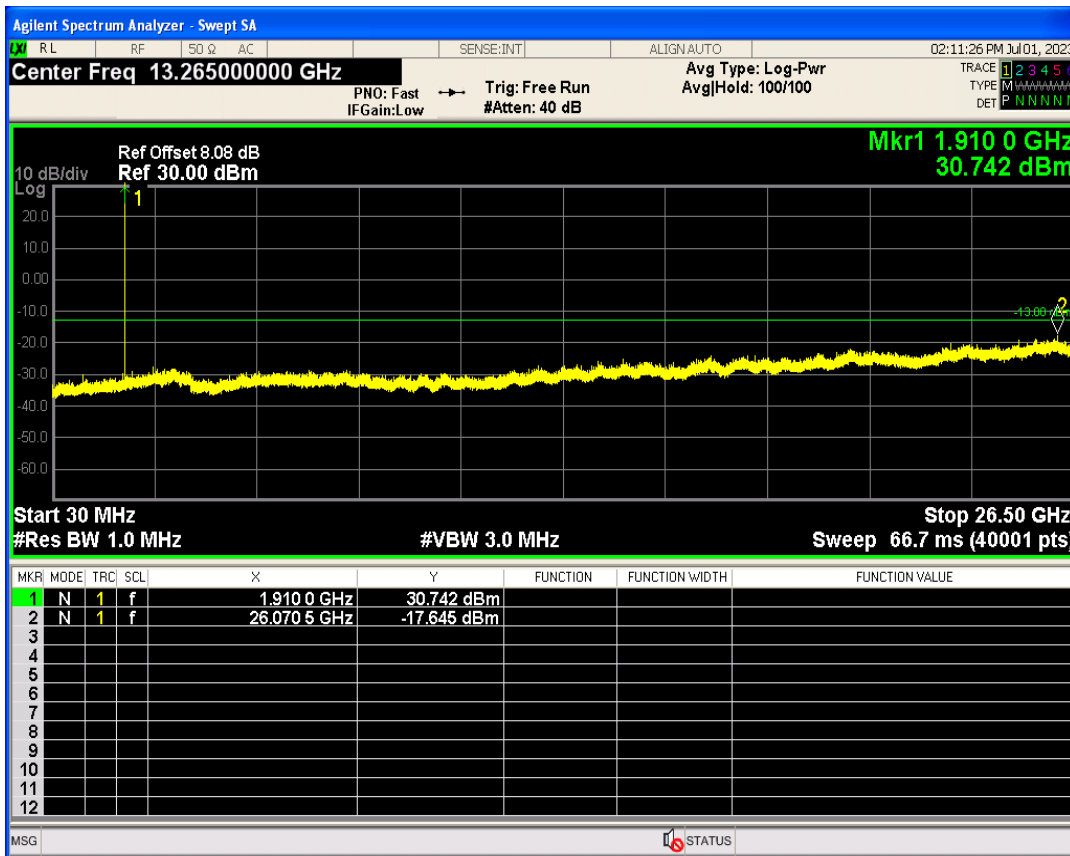


GPRS850 Channel=128

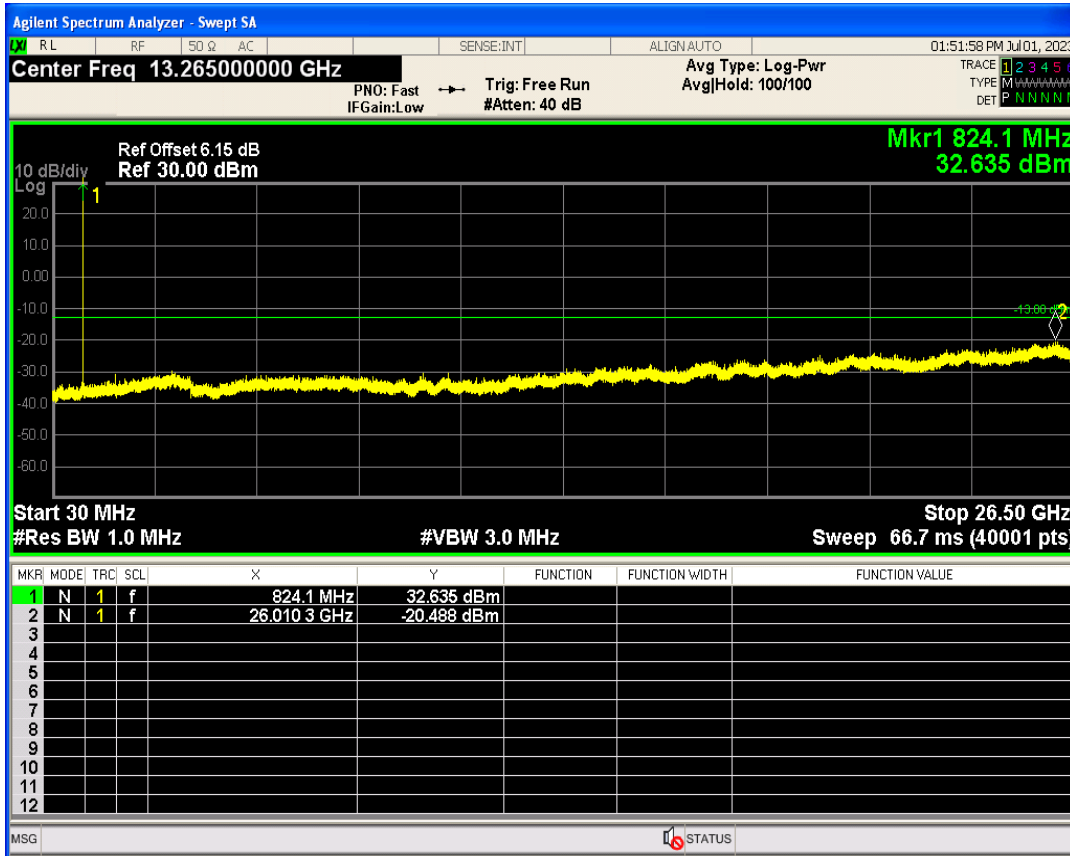

GPRS850 Channel=189

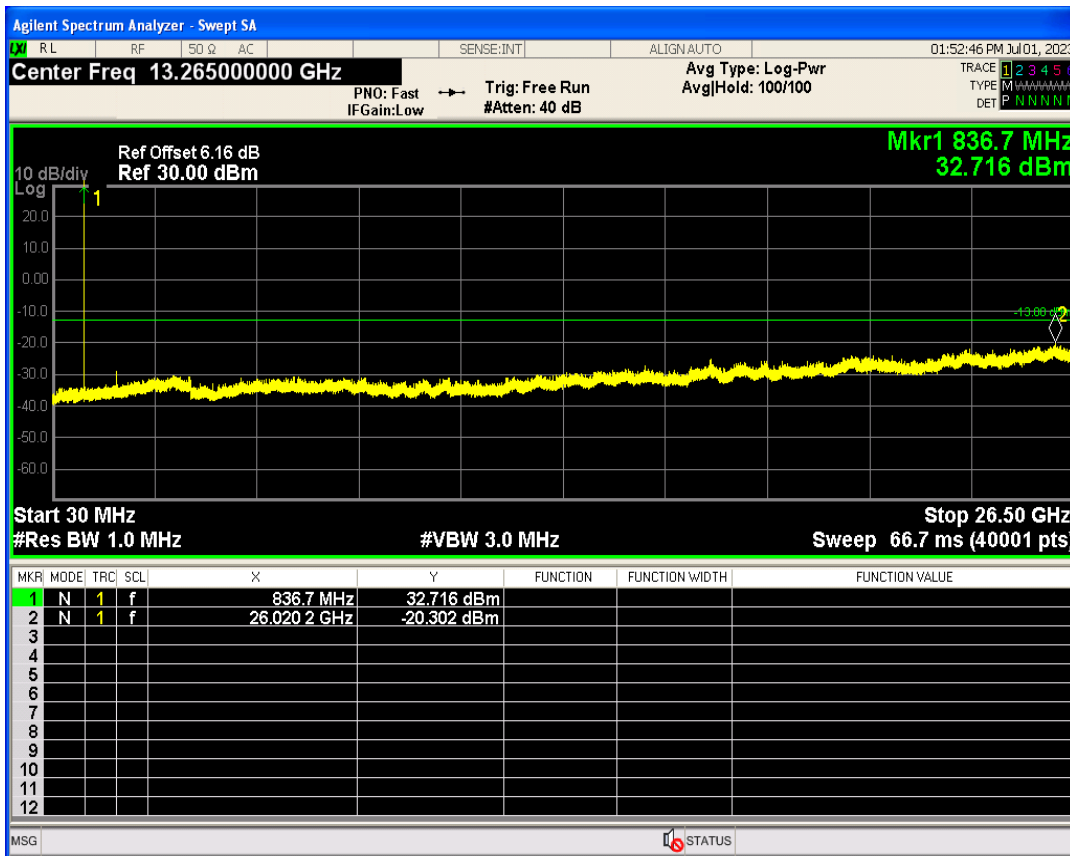

GPRS850 Channel=251

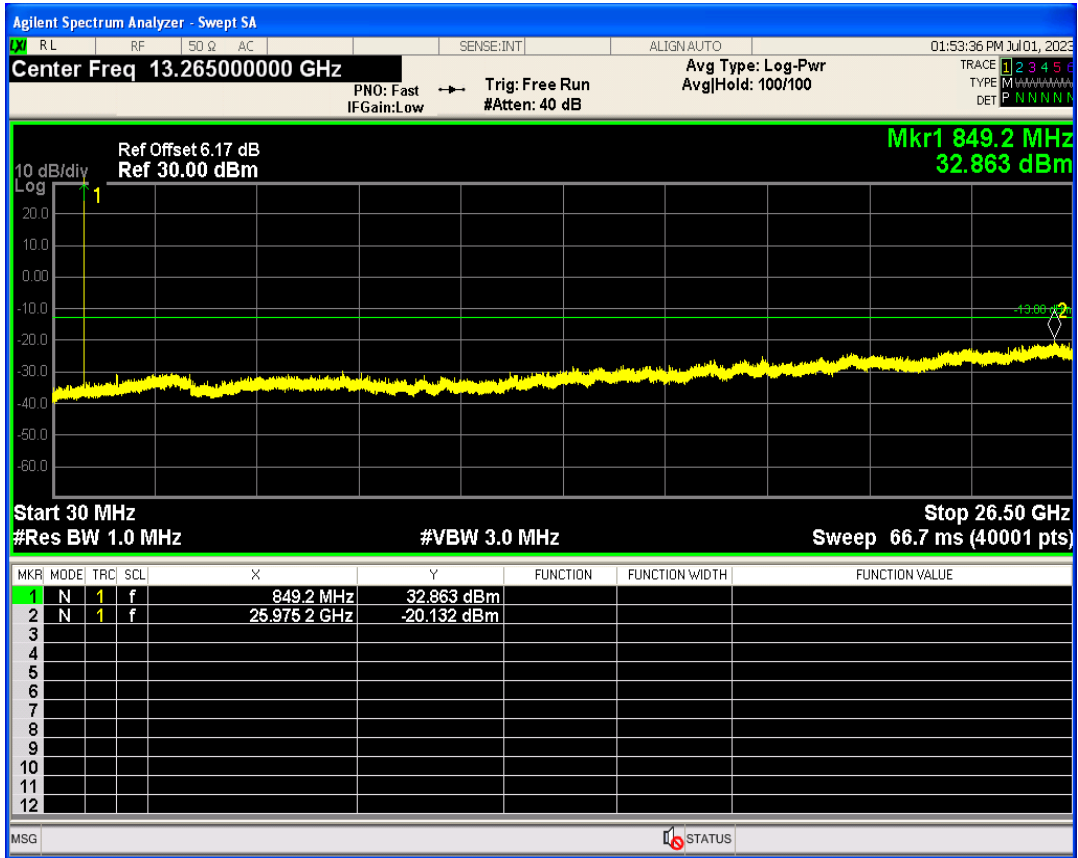




**Conducted output power**

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
GSM1900	512	1850.2	32.11	PASS
GSM1900	661	1880	32.11	PASS
GSM1900	810	1909.8	31.83	PASS
GSM850	128	824.2	33.31	PASS
GSM850	189	836.4	33.27	PASS
GSM850	251	848.8	33.33	PASS


**Peak-to-Average Ratio**

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GSM1900	512	1850.2	2.62	13	PASS
GSM1900	661	1880	2.63	13	PASS
GSM1900	810	1909.8	2.63	13	PASS
GSM850	128	824.2	2.84	13	PASS
GSM850	189	836.4	2.68	13	PASS
GSM850	251	848.8	2.63	13	PASS

GSM1900 Channel=512

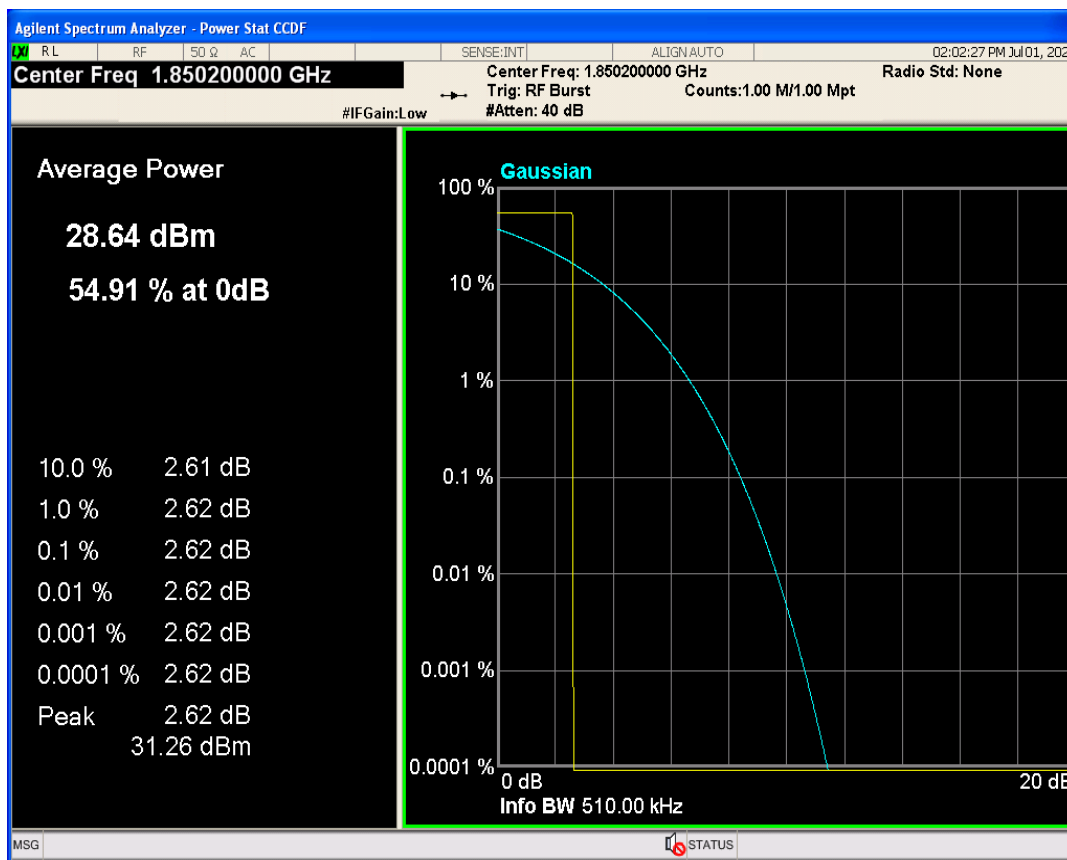


GSM1900 Channel=661

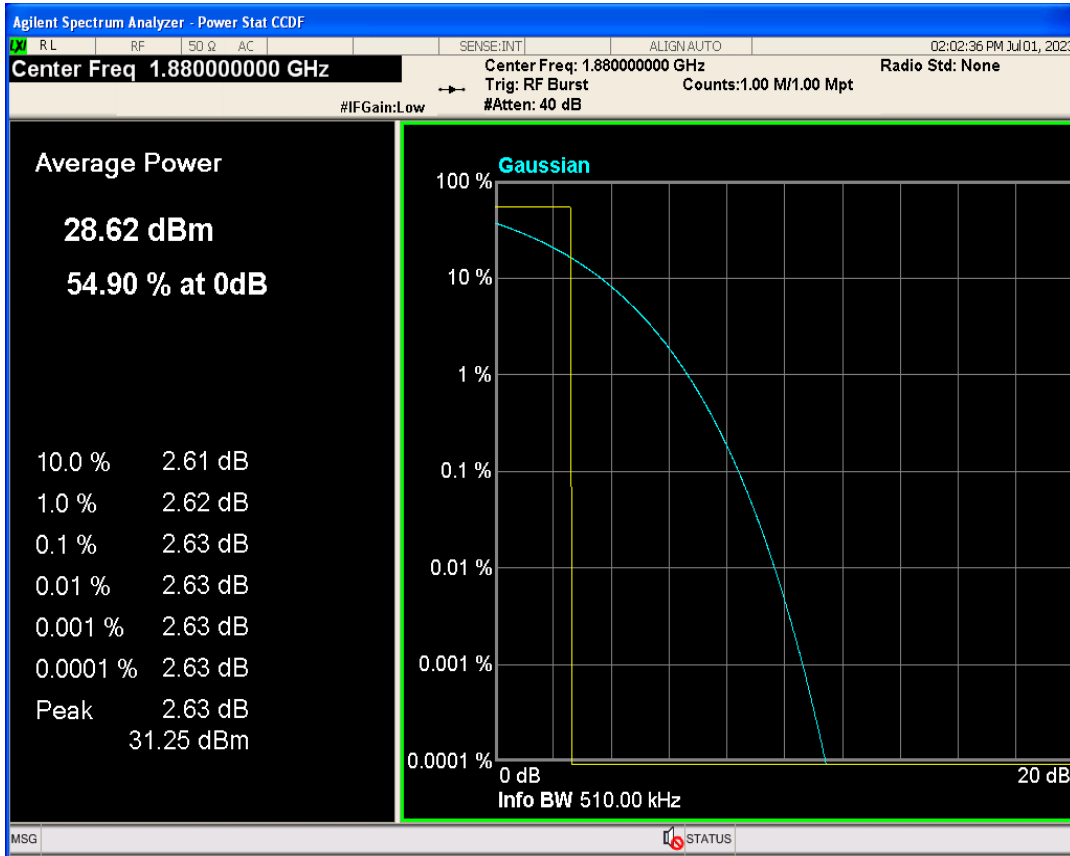




GSM850 Channel=189

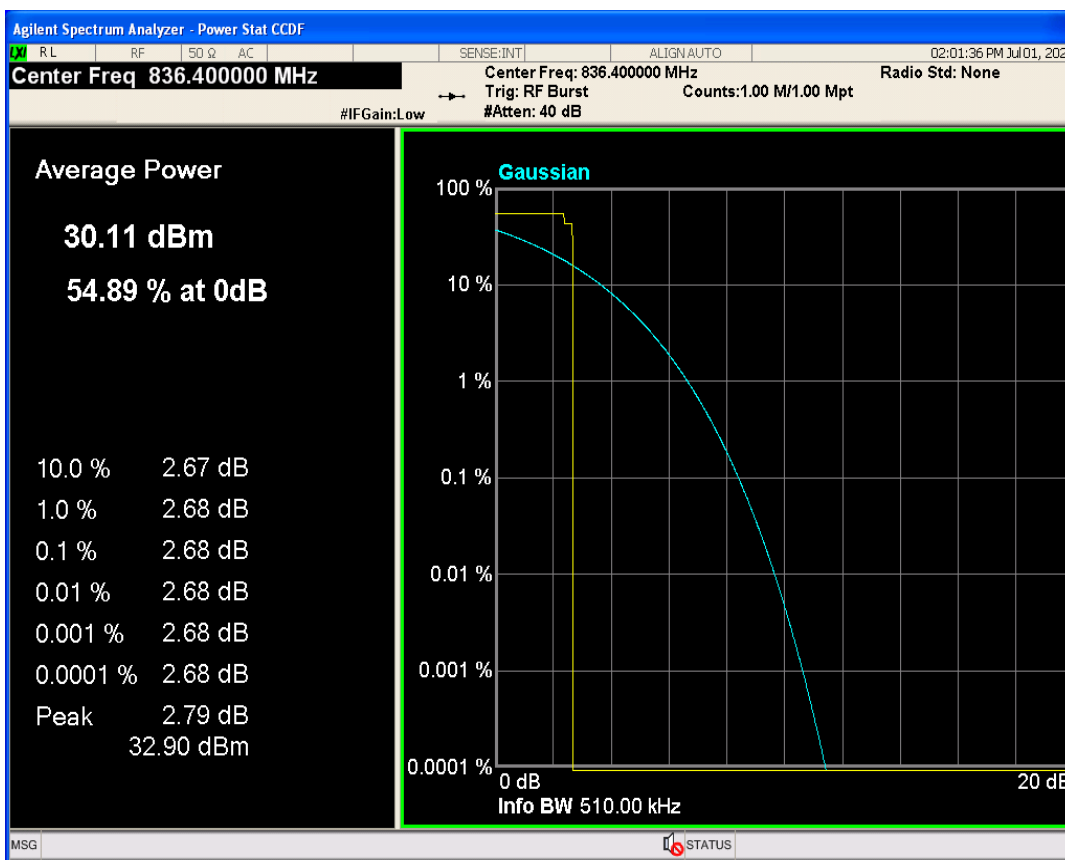


GSM850 Channel=251

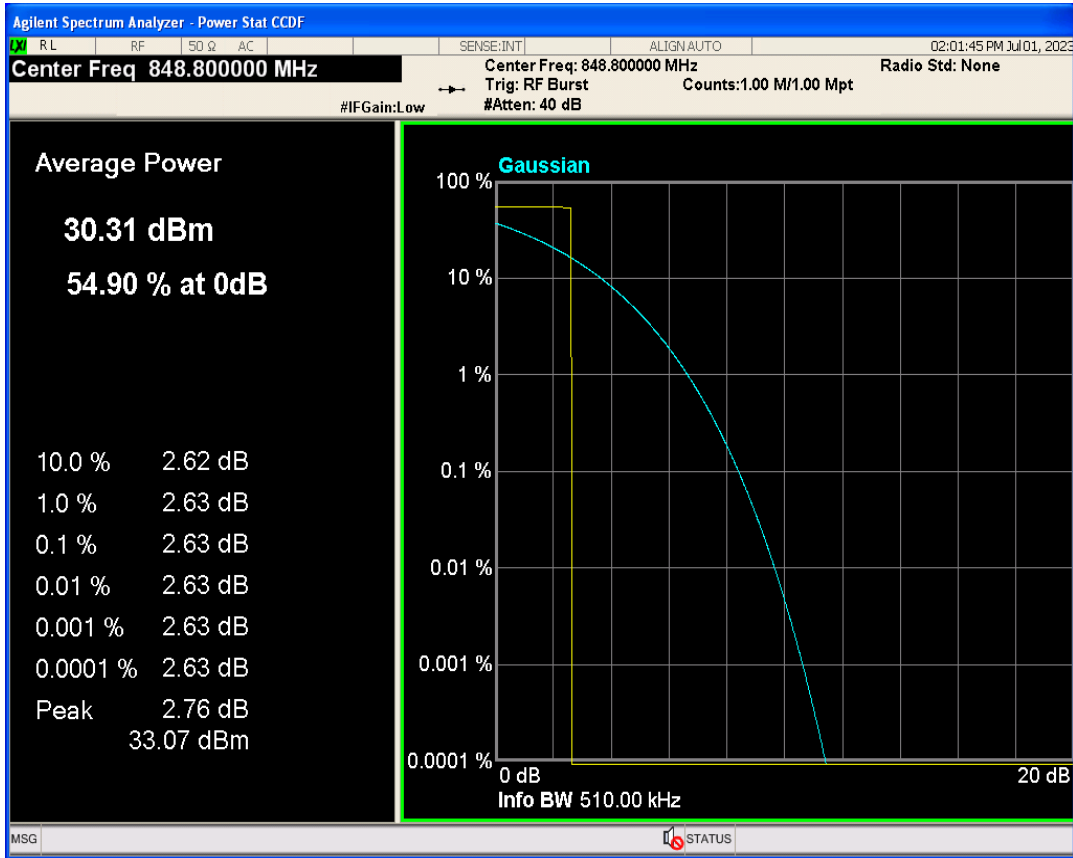


**Occupied bandwidth**

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GSM1900	512	1850.2	246.320	312.326	PASS
GSM1900	661	1880	245.683	317.407	PASS
GSM1900	810	1909.8	245.170	313.349	PASS
GSM850	128	824.2	241.077	314.593	PASS
GSM850	189	836.4	244.446	314.625	PASS
GSM850	251	848.8	240.613	315.976	PASS


GSM1900 Channel=512

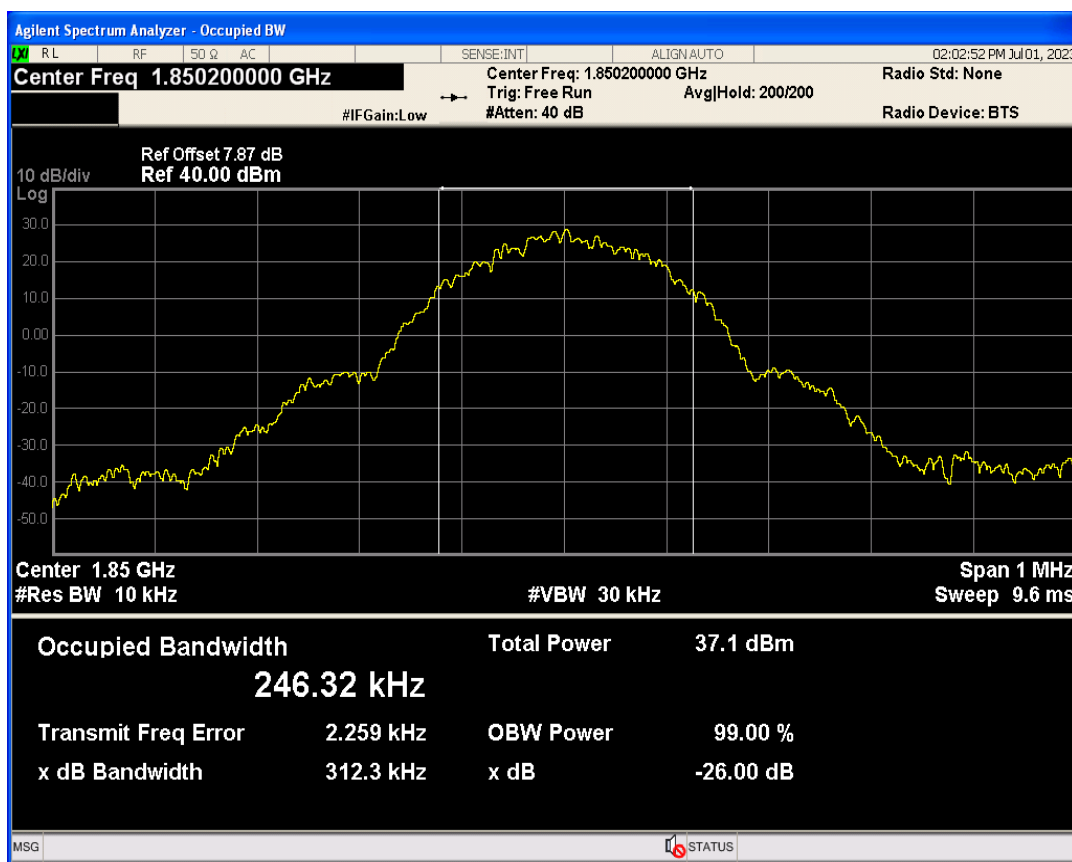


GSM1900 Channel=661

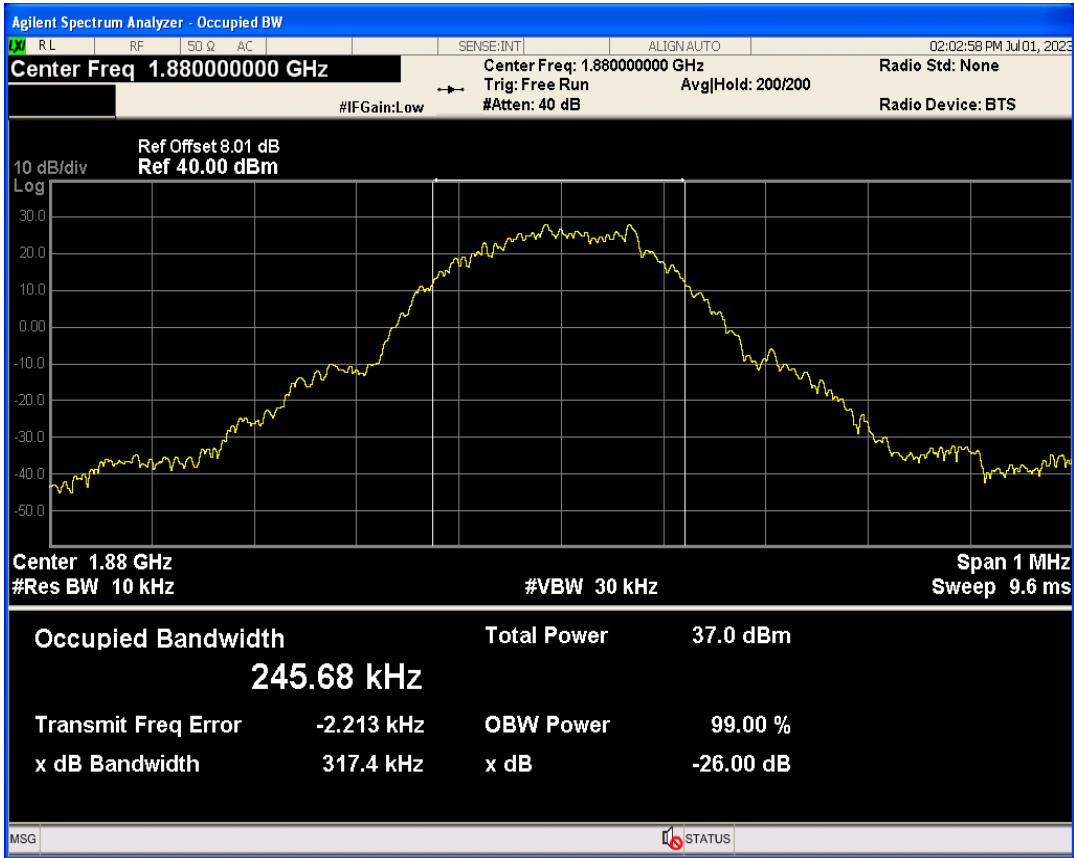


GSM1900 Channel=810

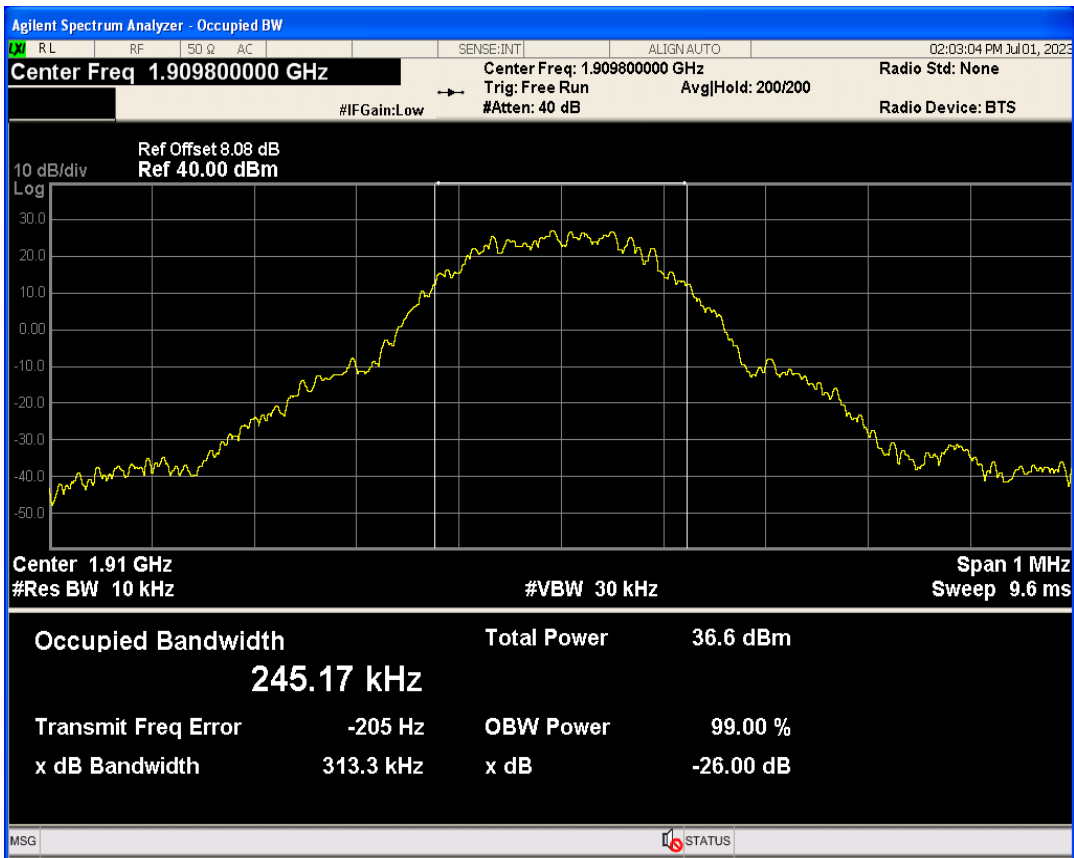


GSM850 Channel=128

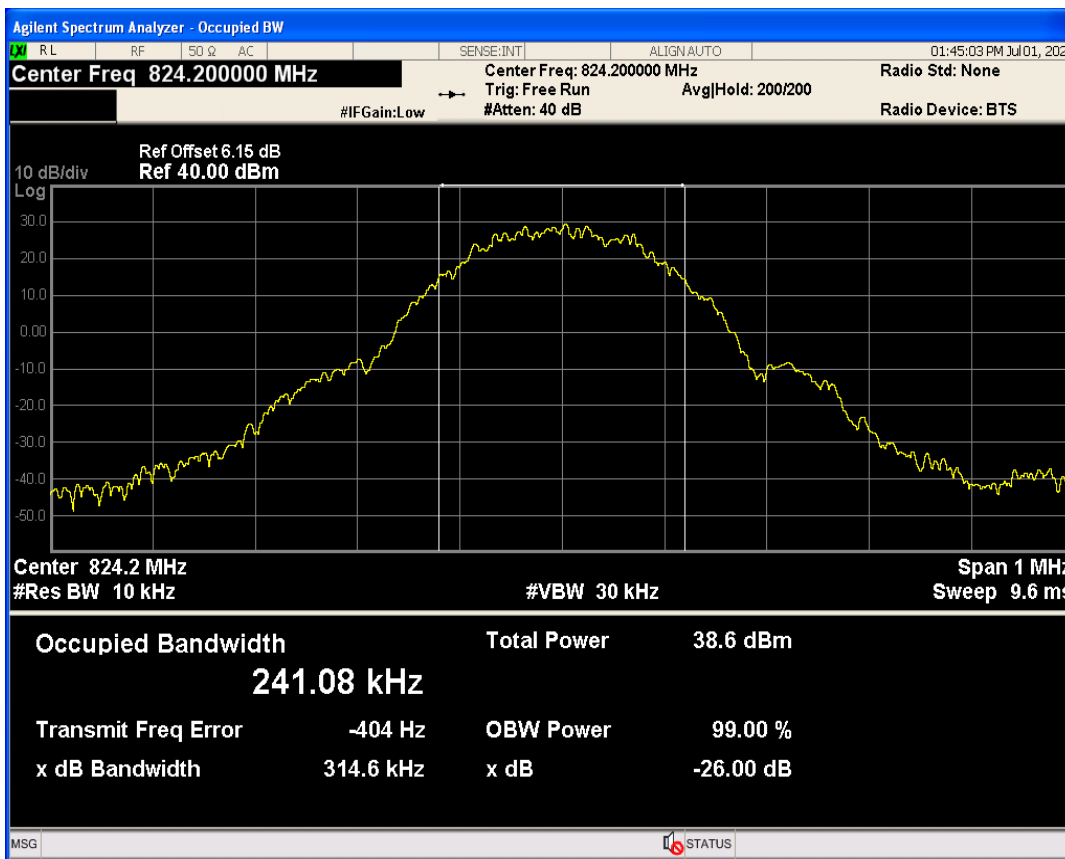

GSM850 Channel=189

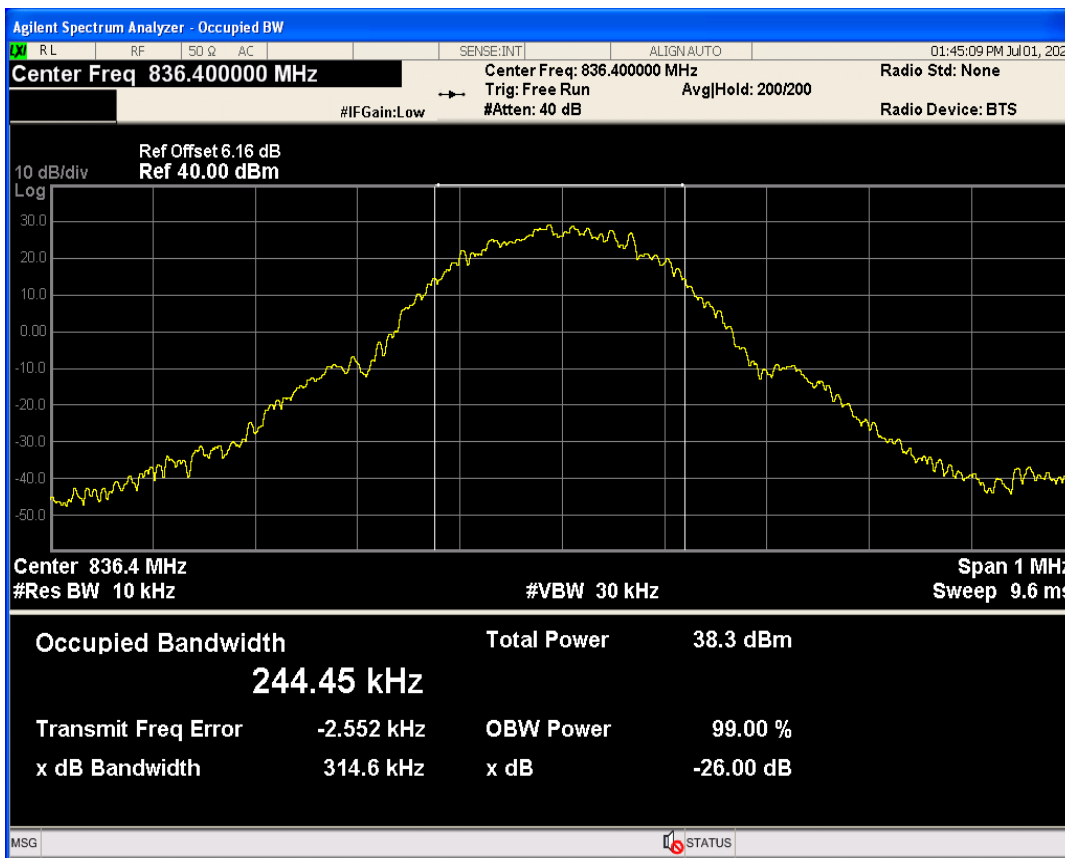

GSM850 Channel=251

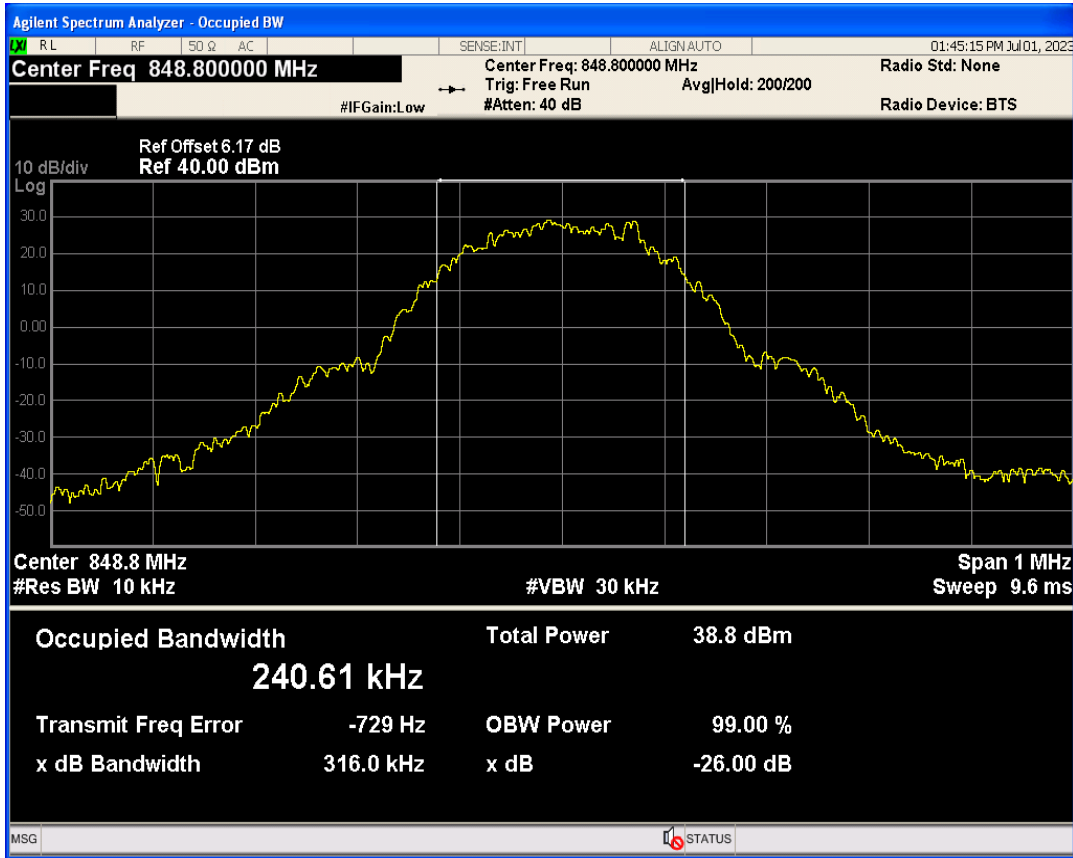





**Band edge**

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	1849.98	-26.72	-13	PASS
GSM1900	810	1909.8	1910.02	-26.96	-13	PASS
GSM850	128	824.2	823.99	-26.88	-13	PASS
GSM850	251	848.8	849.02	-25.75	-13	PASS


GSM1900 Channel=512

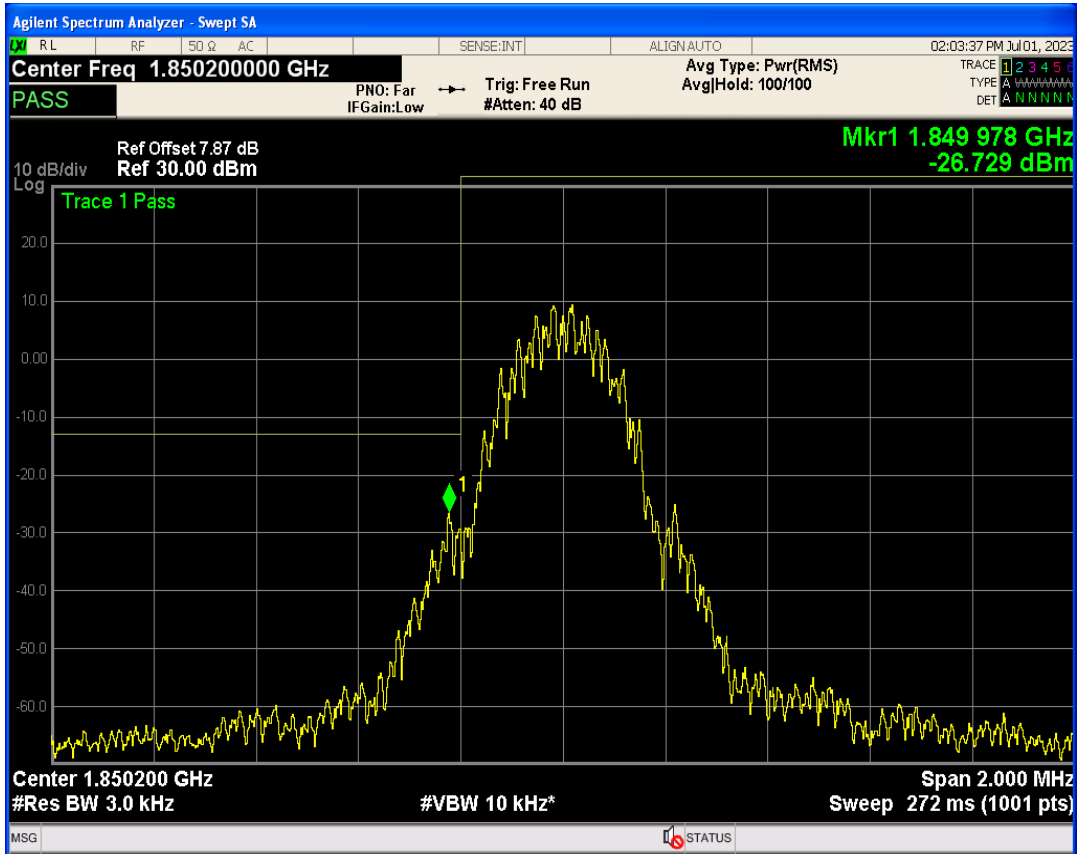


GSM1900 Channel=810

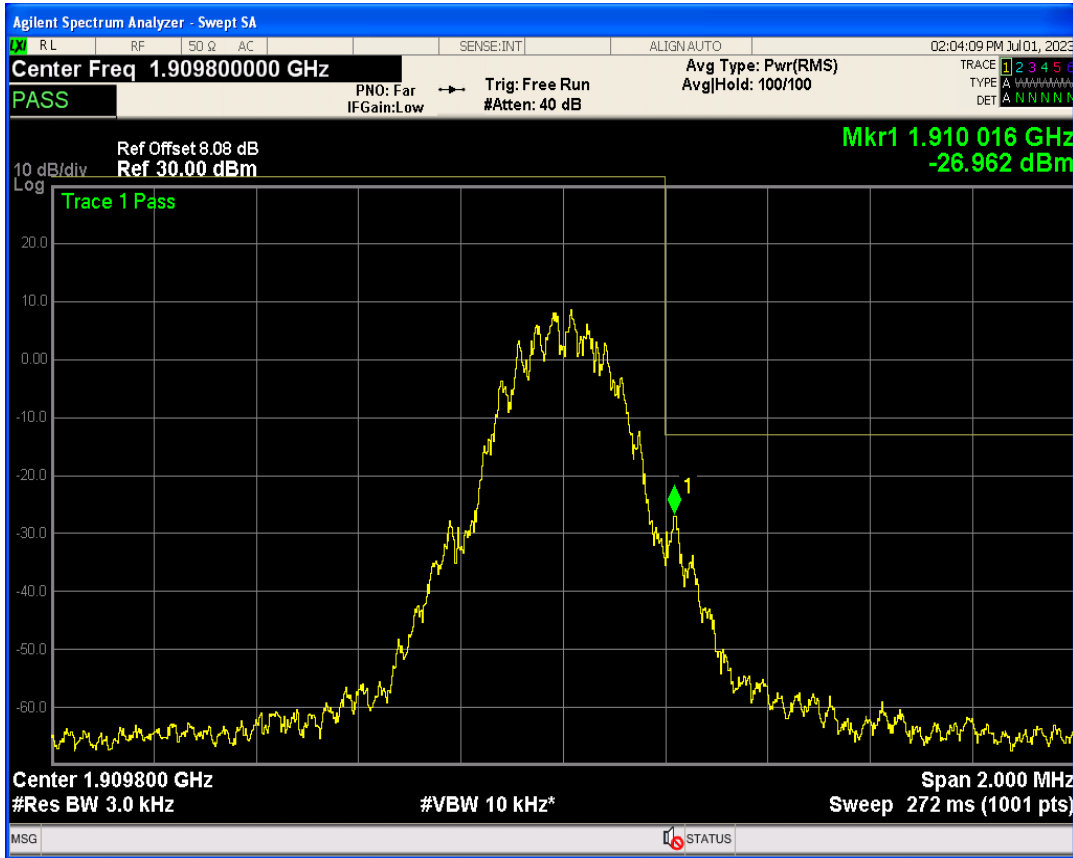

GSM850 Channel=128

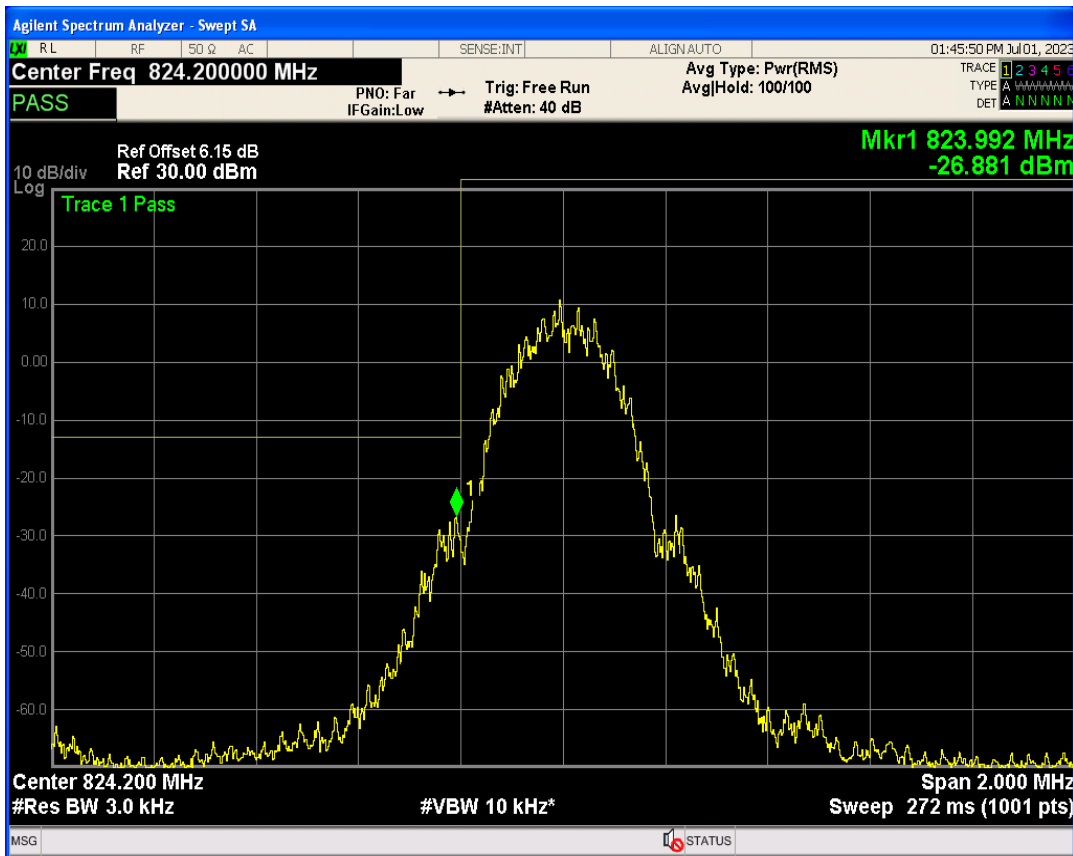


GSM850 Channel=251

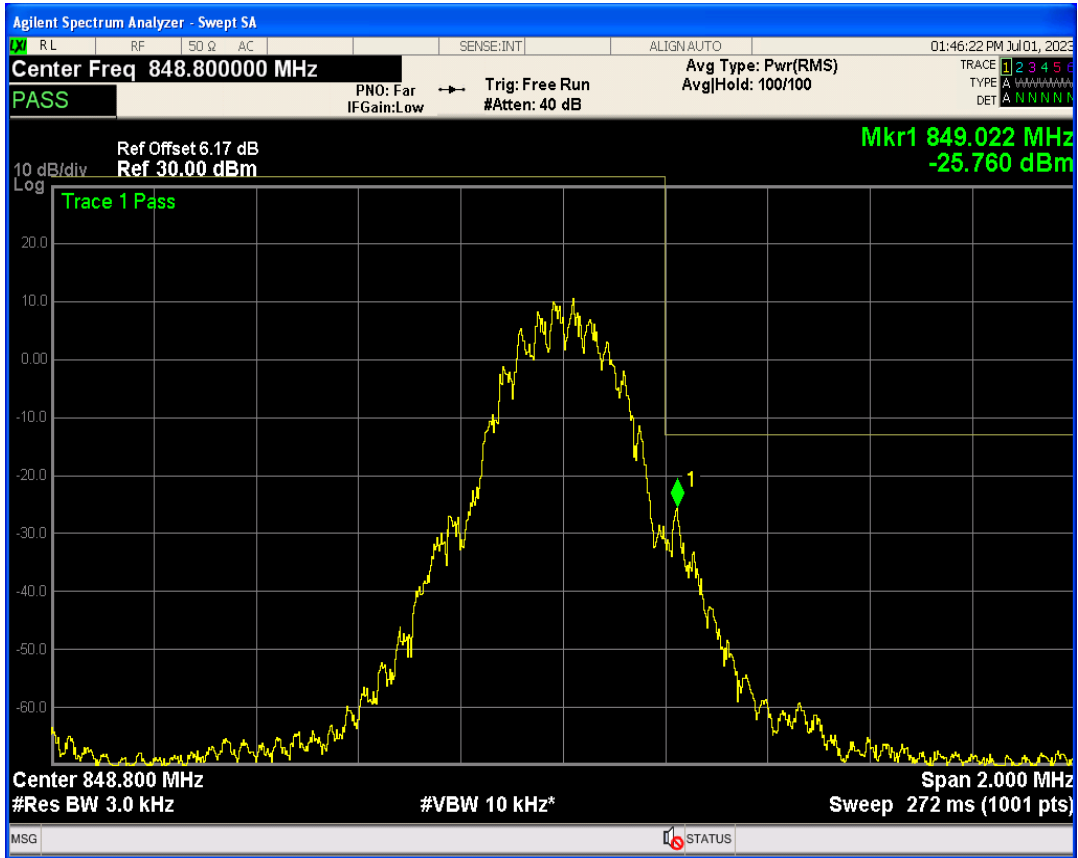


**Out-of-band emissions**

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	25966.63	-18.86	-13	PASS
GSM1900	661	1880	26095.01	-18.43	-13	PASS
GSM1900	810	1909.8	25615.90	-18.32	-13	PASS
GSM850	128	824.2	25758.84	-20.59	-13	PASS
GSM850	189	836.4	26024.20	-19.62	-13	PASS
GSM850	251	848.8	26053.98	-20.13	-13	PASS


GSM1900 Channel=512

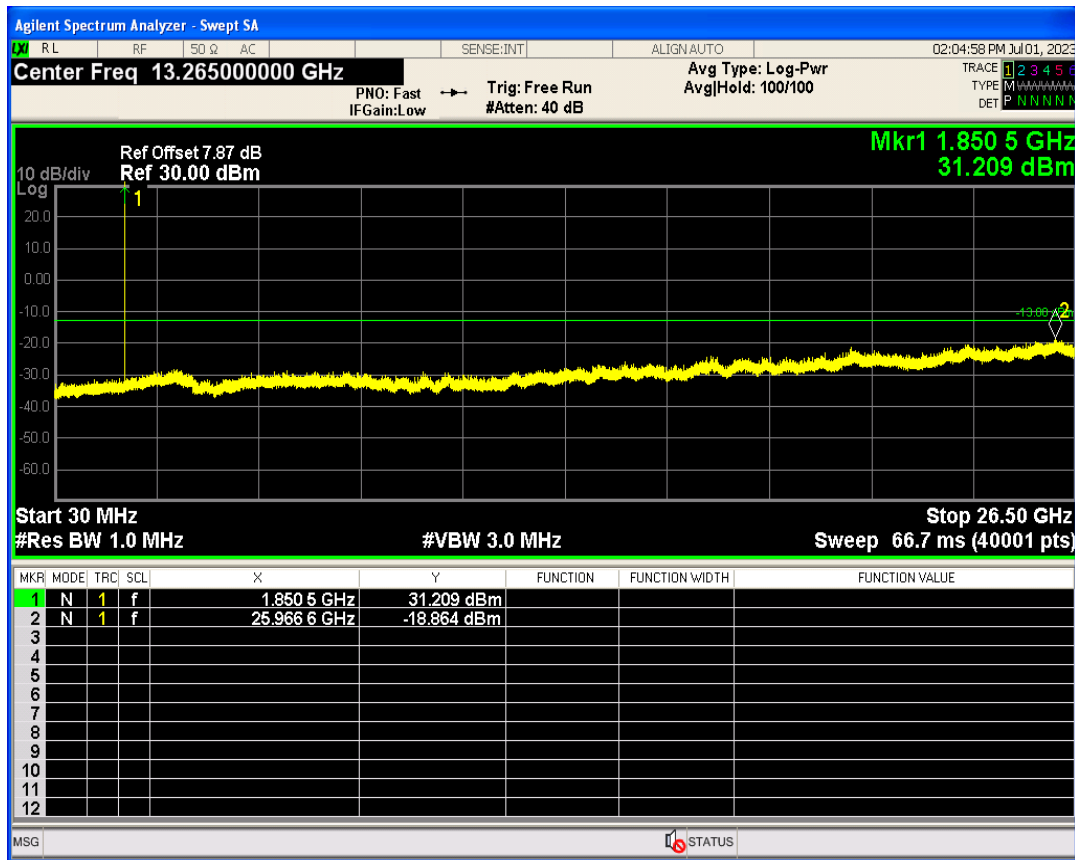


GSM1900 Channel=661

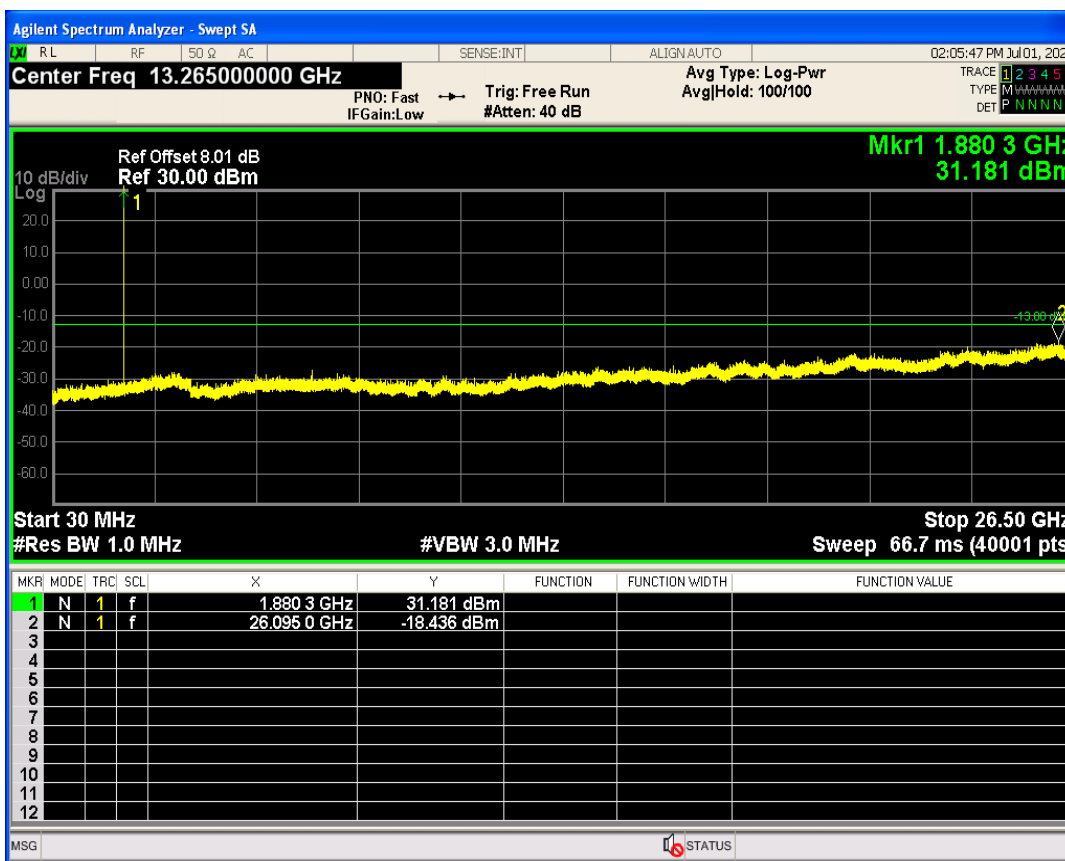


GSM1900 Channel=810

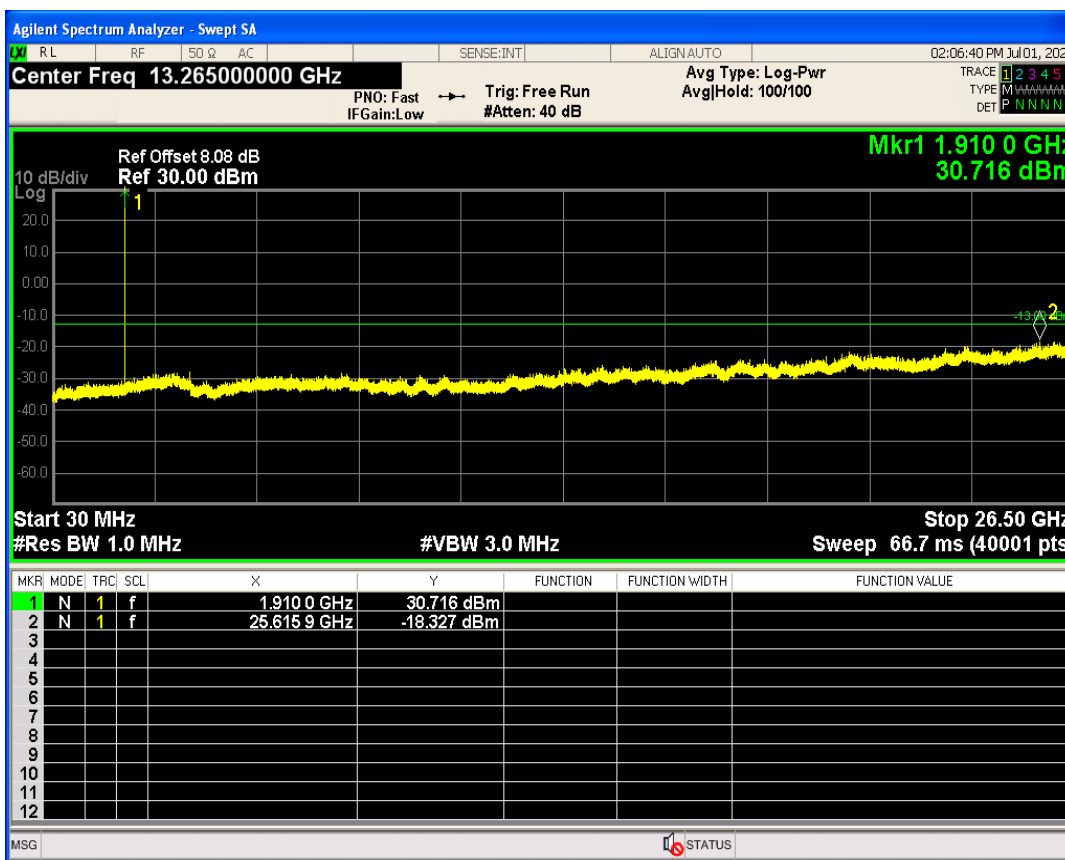

GSM850 Channel=128

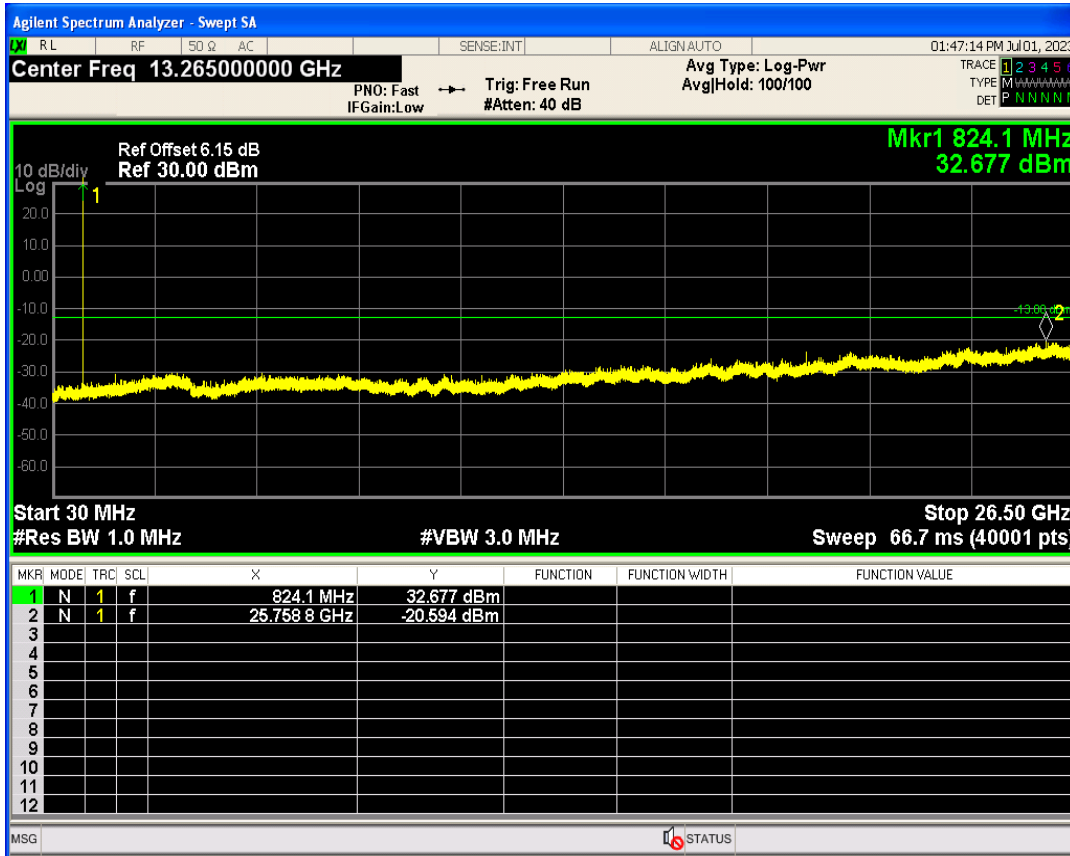

GSM850 Channel=189

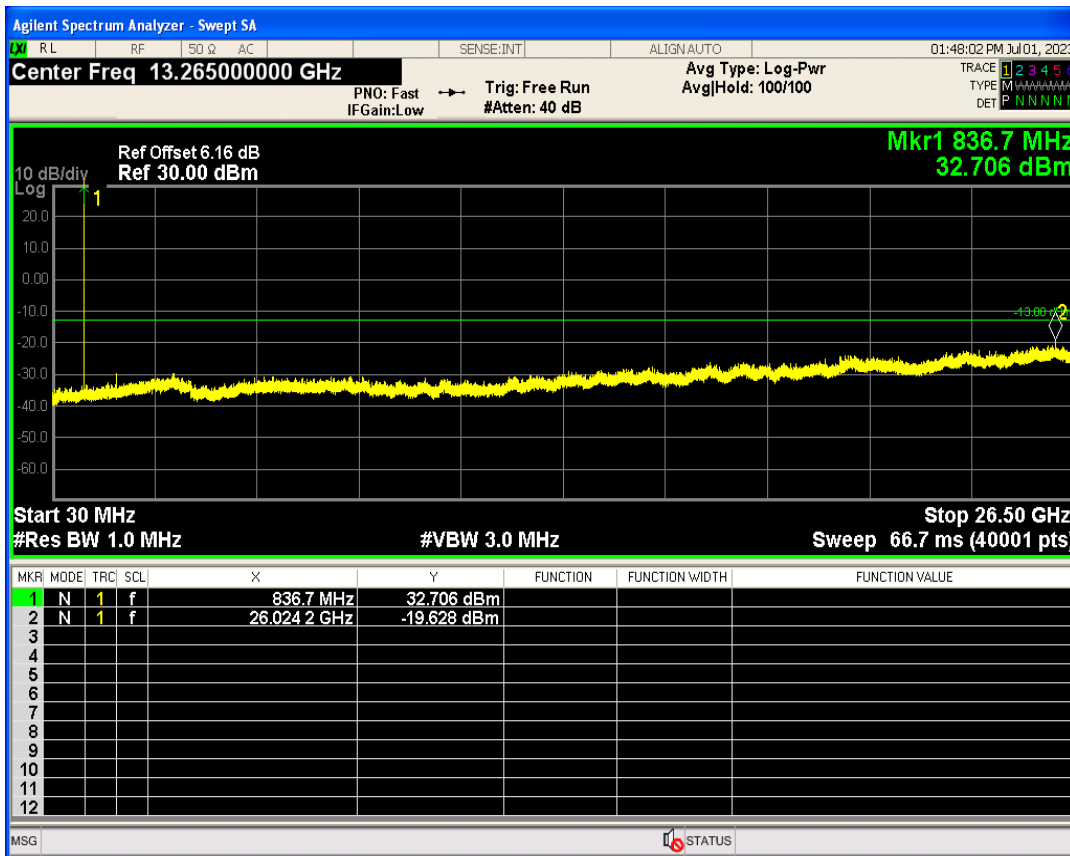

GSM850 Channel=251

