

TEST REPORT

Report No. : CHTEW21100148 Report Verification: 

Project No..... : SHT2108044901EW

FCC ID..... : 2A3E5-EYEONG

Applicant's name : EyeTech Digital Systems, Inc.

Address..... : 2141 E Broadway Rd, Ste 202, Tempe, AZ 85282, United States of America

Test item description : EyeOn Go

Trade Mark : EyeOn

Model/Type reference..... : EyeOn-10NE

Listed Model(s) : -

Standard : FCC CFR Title 47 Part 15 Subpart E Section 15.407

Date of receipt of test sample..... : Sep.06, 2021

Date of testing..... : Sep.07, 2021-Oct.19, 2021

Date of issue..... : Oct.21, 2021

Result..... : PASS

Compiled by
(Position+Printed name+Signature): File administrator Fanghui Zhu

Fanghui Zhu

Supervised by
(Position+Printed name+Signature): Project Engineer Cheng Xiao

Cheng Xiao

Approved by
(Position+Printed name+Signature): RF Manager Hans Hu

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd.

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road,
Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	5
3.4.	Testing Laboratory Information	6
<u>4.</u>	<u>TEST CONFIGURATION</u>	<u>7</u>
4.1.	Test frequency list	7
4.2.	Descriptions of Test mode	7
4.3.	Test mode	7
4.4.	Support unit used in test configuration and system	8
4.5.	Testing environmental condition	8
4.6.	Measurement uncertainty	8
4.7.	Equipment Used during the Test	9
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>11</u>
5.1.	Antenna Requirement	11
5.2.	AC Conducted Emission	12
5.3.	Maximum Conducted Output Power	15
5.4.	Power Spectral Density	17
5.5.	26dB bandwidth and 99% Occupy bandwidth	19
5.6.	6dB Bandwidth	20
5.7.	Band edge	21
5.8.	Radiated Spurious Emissions	30
5.9.	Frequency stability	35
<u>6.</u>	<u>TEST SETUP PHOTOS.....</u>	<u>36</u>
<u>7.</u>	<u>EXTERANAL AND INTERNAL PHOTOS</u>	<u>37</u>
<u>8.</u>	<u>APPENDIX REPORT</u>	<u>37</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

- [FCC Rules Part 15.407](#): General technical requirements.
- [ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices
- [KDB789033 D02 v02r01](#): GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

1.2. Report version

Revision No.	Date of issue	Description
N/A	2021-10-21	Original

2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result
5.1	Antenna Requirement	15.203/15.247(c)	PASS
5.2	AC Conducted Emission	15.207	PASS
5.3	Maximum Conducted Output Power	15.407(a)	PASS
5.4	Maximum Power Spectral Density	15.407(a)	PASS
5.5	26dB Bandwidth and 99% Occupancy bandwidth	15.407(a)	PASS
5.6	6dB Bandwidth	15.407(a)	PASS
5.7	Band edge	15.407(b)	PASS
5.8	Radiated Spurious Emissions	15.209	PASS
5.9	Frequency Stability	15.407(g)	PASS

Note:

- The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	EyeTech Digital Systems, Inc.
Address:	2141 E Broadway Rd, Ste 202, Tempe, AZ 85282, United States of America
Manufacturer:	Shenzhen Chuangwei Electronic Appliance Tech Co.,Ltd.
Address:	4F&6F, Overseas plant south, Skyworth Industrial Park, Shiyao Street, Bao'an District, Shenzhen, Guangdong, P.R. China
Factory:	Shenzhen Chuangwei Electronic Appliance Tech Co.,Ltd.
Address:	4F&6F, Overseas plant south, Skyworth Industrial Park, Shiyao Street, Bao'an District, Shenzhen, Guangdong, P.R. China

3.2. Product Description

Name of EUT:	EyeOn Go
Trade Mark:	EyeOn
Model No.:	EyeOn-10NE
Listed Model(s):	-
Power supply:	DC3.8V from battery
Hardware version:	TO116K_MB_V4.0
Software version:	TO116K_Y10_V3.0.0_20210923

3.3. Radio Specification Description

5G WIFI			
Support type ^{*1}	☒ 802.11a ☒ 802.11ac(HT20)	☒ 802.11n(HT20) ☒ 802.11ac(HT40)	☒ 802.11n(HT40) ☒ 802.11ac(HT80)
Function:	☐ Outdoor AP ☒ Client	☐ Indoor AP	☐ Fixed P2P
DFS type:	☐ master devices	☐ Slave devices with radar detection	☒ Slave devices without radar detection
Modulation:	BPSK, QPSK, 16QAM, 64QAM		
Operation frequency:	☒ Band I:	5150MHz~5250MHz	
	☒ Band II:	5250MHz~5350MHz	
	☒ Band III:	5470MHz~5725MHz	
	☒ Band IV:	5725MHz~5850MHz	
Supported Bandwidth	20MHz:	802.11n, 802.11a,802.11ac	
	40MHz:	802.11n,802.11ac	
	80MHz:	802.11n,802.11ac	
Antenna type:	PIFA		
Antenna gain:	1.45dBi		

Note:

*1: only show the RF function associated with this report.

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Connect information:	Phone: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC	762235

4. TEST CONFIGURATION

4.1. Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channels which were tested. The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the below .

Band	Test Channel	20MHz		40MHz		80MHz	
		Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
I	CH _L	36	5180	38	5190	-	-
	CH _M	44	5220	-	-	42	5210
	CH _H	48	5240	46	5230	-	-
II	CH _L	52	5260	54	5270	-	-
	CH _M	56	5280	-	-	58	5290
	CH _H	64	5320	62	5310	-	-
III	CH _L	100	5500	102	5510	106	5530
	CH _M	120	5600	118	5590	122	5610
	CH _H	140	5700	134	5670	138	5690
IV	CH _L	149	5745	151	5755	-	-
	CH _M	157	5785	-	-	155	5775
	CH _H	165	5825	159	5795	-	-

4.2. Descriptions of Test mode

Preliminary tests were performed in different data rates, final test modes are considering the modulation and worse data rates as below table.

Modulation	Data rate
802.11a	6Mbps
802.11n(HT20)/ 802.11ac(HT20)	MCS0
802.11n(HT40)/ 802.11ac(HT40)	MCS0
802.11ac(HT80)	MCS0

4.3. Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.

4.4. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?					
✓ No					
Item	Equipement	Trade Name	Model No.	FCC ID	Power cord
1					
2					

4.5. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

4.6. Measurement uncertainty

Test Item	Measurement Uncertainty
AC Conducted Emission (150kHz~30MHz)	3.02 dB
Radiated Emission (30MHz~1000MHz)	4.90 dB
Radiated Emissions (1GHz~25GHz)	4.96 dB
Peak Output Power	0.51 dB
Power Spectral Density	0.51 dB
Conducted Spurious Emission	0.51 dB
6dB Bandwidth	70 Hz
Frequency error	70 Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.7. Equipment Used during the Test

● Conducted Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	HTWE0114	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2021/9/14	2022/9/13
●	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2021/9/17	2022/9/16
●	Pulse Limiter	R&S	HTWE0033	ESH3-Z2	100499	2021/9/13	2022/9/12
●	RF Connection Cable	HUBER+SUHNER	HTWE0113-02	ENVIROFLEX 142	EF-NM-BNCM-2M	2021/9/17	2022/9/16
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-6th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2018/09/30	2022/09/29
●	EMI Test Receiver	R&S	HTWE0099	ESCI	100900	2021/9/14	2022/9/13
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2021/04/06	2022/04/05
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0123	VULB9163	538	2021/04/06	2022/04/05
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	N/A	2020/11/13	2021/11/12
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-01	N/A	N/A	2021/02/26	2022/02/25
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-02	SUCOFLEX104	501184/4	2021/02/26	2022/02/25
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-7th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/27	2022/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2021/9/13	2022/9/12
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2020/04/01	2023/03/31
●	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2020/4/27	2023/4/27
●	Pre-amplifier	CD	HTWE0071	PAP-0102	12004	2020/11/13	2021/11/12
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2021/03/05	2022/03/04
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-01	6m 18GHz S Serisa	N/A	2021/02/26	2022/02/25
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-02	6m 3GHz RG Serisa	N/A	2021/02/26	2022/02/25
●	RF Connection Cable	HUBER+SUHNER	HTWE0119-05	6m 3GHz RG Serisa	N/A	2021/02/26	2022/02/25
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-04	6m 3GHz RG Serisa	N/A	2021/02/26	2022/02/25
●	RF Connection Cable	HUBER+SUHNER	HTWE0121-01	6m 18GHz S Serisa	N/A	2021/02/26	2022/02/25
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

● RF Conducted Method						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	FSV40	100048	2021/9/13	2022/9/12
●	Spectrum Analyzer	Agilent	N9020A	MY50510187	2021/9/13	2022/9/12
●	Power Meter	Anritsu	ML249A	N/A	2021/9/13	2022/9/12
○	Radio communication tester	R&S	CMW500	137688-Lv	2021/9/13	2022/9/12

5. TEST CONDITIONS AND RESULTS

5.1. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

TEST RESULT

☒ **Passed** ☐ **Not Applicable**

The antenna type is a PIFA antenna, the directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.



5.2. AC Conducted Emission


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

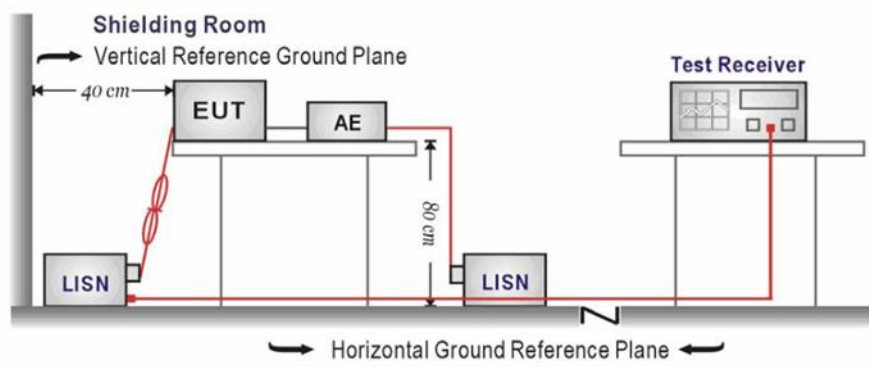

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:


Please refer to the clause 4.3

TEST RESULT

☒ Passed ☐ Not Applicable

Test Line:

L

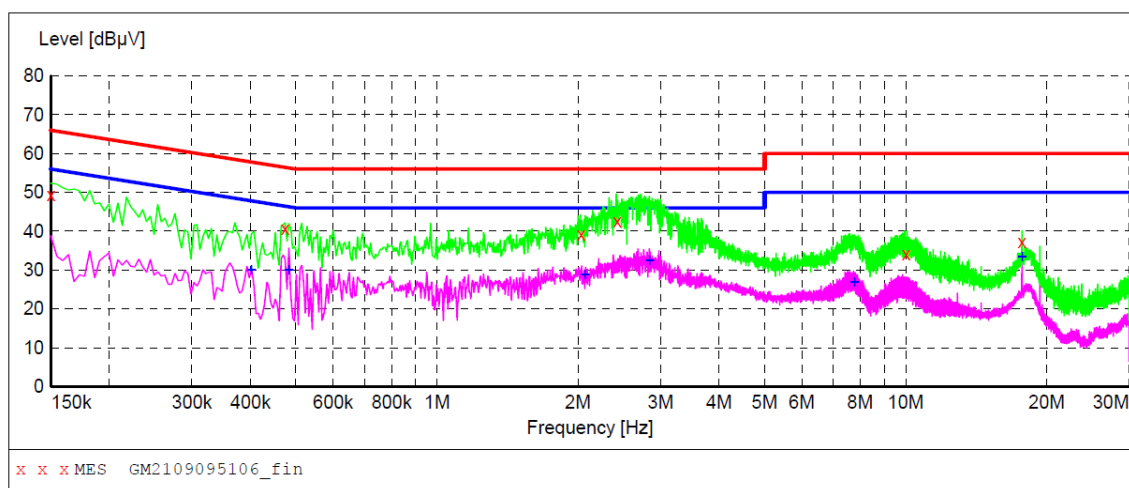**MEASUREMENT RESULT: "GM2109095106_fin"**

9/9/2021 5:45PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	49.30	10.2	66	16.7	QP	L1	GND
0.474000	40.70	10.2	56	15.7	QP	L1	GND
2.031000	39.20	10.2	56	16.8	QP	L1	GND
2.427000	42.50	10.2	56	13.5	QP	L1	GND
10.023000	34.20	10.3	60	25.8	QP	L1	GND
17.713500	37.30	10.3	60	22.7	QP	L1	GND


MEASUREMENT RESULT: "GM2109095106_fin2"

9/9/2021 5:45PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.402000	30.10	10.2	48	17.7	AV	L1	GND
0.483000	29.90	10.2	46	16.4	AV	L1	GND
2.067000	28.70	10.2	46	17.3	AV	L1	GND
2.841000	32.50	10.2	46	13.5	AV	L1	GND
7.773000	26.80	10.2	50	23.2	AV	L1	GND
17.713500	33.40	10.3	50	16.6	AV	L1	GND

Test Line:

N

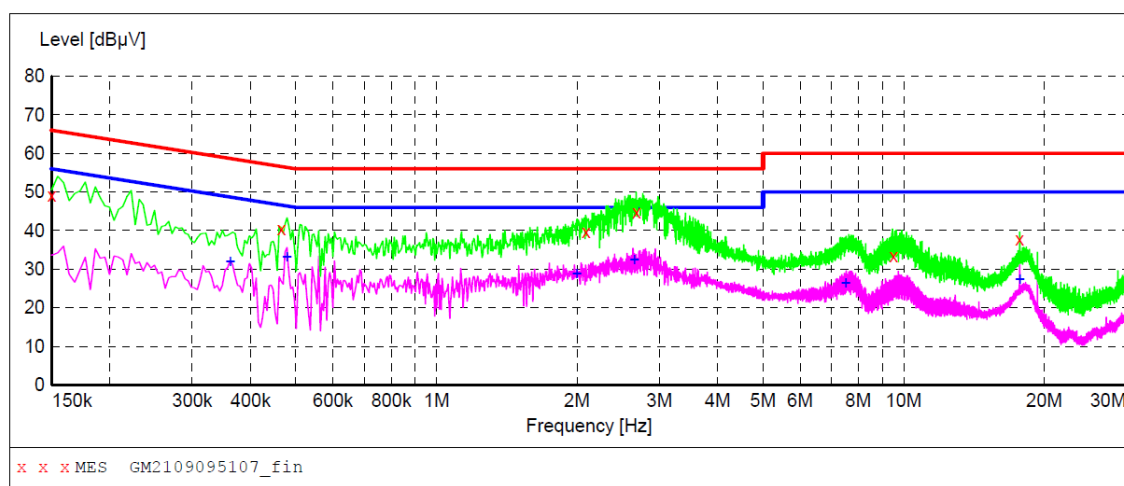**MEASUREMENT RESULT: "GM2109095107_fin"**

9/9/2021 5:48PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	49.20	10.2	66	16.8	QP	N	GND
0.465000	40.50	10.2	57	16.1	QP	N	GND
2.089500	39.70	10.2	56	16.3	QP	N	GND
2.679000	44.70	10.2	56	11.3	QP	N	GND
9.510000	33.30	10.3	60	26.7	QP	N	GND
17.709000	37.70	10.3	60	22.3	QP	N	GND

MEASUREMENT RESULT: "GM2109095107_fin2"

9/9/2021 5:48PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.361500	31.90	10.2	49	16.8	AV	N	GND
0.478500	33.10	10.2	46	13.3	AV	N	GND
1.995000	28.80	10.2	46	17.2	AV	N	GND
2.647500	32.50	10.2	46	13.5	AV	N	GND
7.512000	26.50	10.2	50	23.5	AV	N	GND
17.718000	27.30	10.3	50	22.7	AV	N	GND

5.3. Maximum Conducted Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart E Section 15.407(a):

For the 5.15~5.25GHz band:

- Outdoor AP
The maximum conducted output power (P_{out}) shall not exceed the lesser of 1W (30dBm).
if $G_{TX} > 6\text{dBi}$, then $P_{out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees $\leq 125\text{mW}$ (21dBm)
- Indoor AP
The maximum conducted output power (P_{out}) shall not exceed the lesser of 1W (30dBm).
if $G_{TX} > 6\text{dBi}$, then $P_{out} = 30 - (G_{TX} - 6)$.
- Point-to-point AP
The maximum conducted output power (P_{out}) shall not exceed the lesser of 1W (30dBm).
if $G_{TX} > 23\text{dBi}$, then $P_{out} = 30 - (G_{TX} - 23)$.
- Client devices
The maximum conducted output power (P_{out}) shall not exceed the lesser of 250W (24dBm).
if $G_{TX} > 6\text{dBi}$, then $P_{out} = 24 - (G_{TX} - 6)$.

For the 5.25~5.35GHz band:

The maximum conducted output power (P_{out}) shall not exceed the lesser of 250mW (24dBm) or 11dBm+10 log B, where B is the 26dB emission bandwidth in MHz.
if $G_{TX} > 6\text{dBi}$, then $P_{out} = 24 - (G_{TX} - 6)$.


For the 5.47~5.725GHz band:

The maximum conducted output power (P_{out}) shall not exceed the lesser of 250mW (24dBm) or 11dBm+10 log B, where B is the 26dB emission bandwidth in MHz.
if $G_{TX} > 6\text{dBi}$, then $P_{out} = 24 - (G_{TX} - 6)$.

For the 5.725~5.85GHz band:

- Point-to-multipoint systems (P2M)
The maximum conducted output power (P_{out}) shall not exceed the lesser of 1W (30dBm).
if $G_{TX} > 6\text{dBi}$, then $P_{out} = 30 - (G_{TX} - 6)$.
- Point-to-point systems (P2P)
The maximum conducted output power (P_{out}) shall not exceed the lesser of 1W (30dBm).

TEST CONFIGURATION

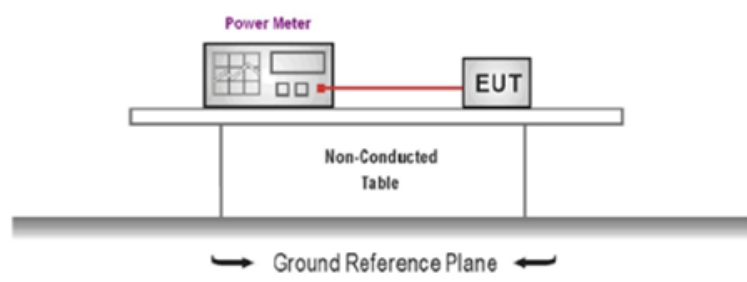

TEST PROCEDURE

1. The EUT was tested according to KDB789033 Section E-3-b)
2. The maximum conducted output power may be measured using a broadband AVG RF power meter.
3. Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor.
4. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.
5. Record the measurement data.

6. TEST MODE:

Please refer to the clause 4.3

TEST RESULT

☒ **Passed** ☐ **Not Applicable**

TEST Data

Please refer to appendix A on the appendix report

5.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart E Section 15.407(a):

For the 5.15~5.25GHz band:

- Outdoor AP
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.
if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 17 - (G_{TX} - 6)$.
- Indoor AP
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.
if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 17 - (G_{TX} - 6)$.
- Point-to-point AP
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.
if $G_{TX} > 23\text{dBi}$, then $\text{PSD} = 17 - (G_{TX} - 23)$.
- Client devices
The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz.
if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 11 - (G_{TX} - 6)$.

For the 5.25~5.35GHz band:

The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz.
if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 11 - (G_{TX} - 6)$.


For the 5.47~5.725GHz band:

The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz.
if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 11 - (G_{TX} - 6)$.

For the 5.725~5.85GHz band:

- Point-to-multipoint systems (P2M)
The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz.
if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 30 - (G_{TX} - 6)$.
- Point-to-point systems (P2P)
The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz.

TEST CONFIGURATION

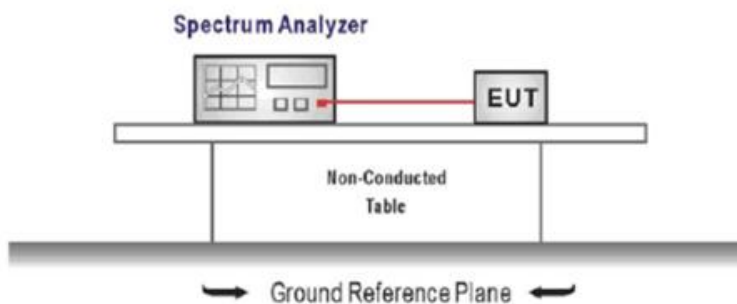

TEST PROCEDURE

1. According KDB 789033 D02 – Section F
2. Analyzer was setting as follow:
Center frequency: test channel
Span was set to encompass the entire emission bandwidth of the signal
RBW=1MHz for devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz
RBW=500kHz for devices operating in the band 5.725-5.85 GHz
VBW ≥ 3 RBW
Number of sweep points $> 2 \times (\text{span}/\text{RBW})$
Sweep time = auto
Detector = Peak
Trigger was set to free run for all modes, trace was averaged over 100 sweeps
3. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

☒ **Passed** ☐ **Not Applicable**

TEST Data


Please refer to appendix B on the appendix report

5.5. 26dB bandwidth and 99% Occupancy bandwidth

LIMIT

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 , and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

TEST CONFIGURATION

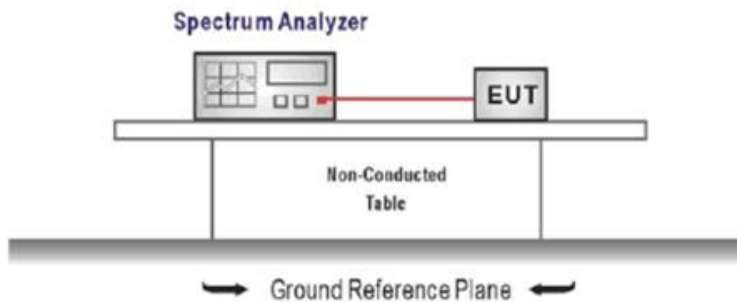

TEST PROCEDURE

1. According KDB 789033 D02 – Section C, 26dB bandwidth test as follow
 - a) Set RBW = approximately 1% of the emission bandwidth.
 - b) Set the VBW > RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
2. According KDB 789033 D02 – Section D, 99% bandwidth test as follow
 - a). Set center frequency to the nominal EUT channel center frequency.
 - b). Set span = 1.5 times to 5.0 times the OBW.
 - c). Set RBW = 1% to 5% of the OBW
 - d). Set $VBW \geq 3 \times RBW$
 - e). Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
 - f). Use the 99% power bandwidth function of the instrument

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

☒ Passed ☐ Not Applicable

TEST Data

Please refer to appendix C and D on the appendix report


5.6. 6dB Bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart E Section 15.407(e)

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz

TEST CONFIGURATION

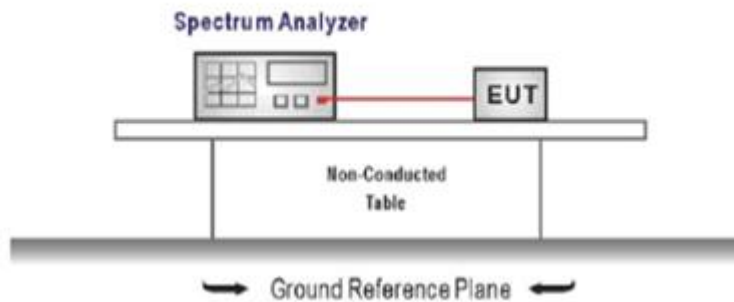

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = test channel center frequency
Span = 2 x emission bandwidth
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

☒ Passed ☐ Not Applicable

TEST Data

Please refer to appendix E on the appendix report

5.7. Band edge

LIMIT

FCC CFR Title 47 Part 15 Subpart E Section 15.407(b)


Un-restricted band emissions above 1GHz			
Operating Band	Frequency	EIRP Limit	Value
5150-5250MHz	Above 1GHz	-27dBm/MHz(68.2dBuV/m)@3m	Peak
5250-5350MHz	Above 1GHz	-27dBm/MHz(68.2dBuV/m)@3m	Peak
5470-5725MHz	Above 1GHz	-27dBm/MHz(68.2dBuV/m)@3m	Peak
5725-5850 MHz	1GHz-5.65GHz	-27 dBm/MHz(68.2dBuV/m)@3m	Peak
	5.65GHz-5.7GHz	-27*dBm/MHz to 10dBm/MHz (68.2* dBuV/m to 105.6dBuV/m)	Peak
	5.7GHz-5.72GHz	10*dBm/MHz to 15.6dBm/MHz (105.6*dBuV/m to 110.8dBuV/m)	Peak
	5.72GHz-5.725GHz	15.6*dBm/MHz to 27dBm/MHz (110.8dBuV/m to* 122.2dBuV/m)	Peak
	5.85GHz-5.855GHz	27dBm/MHz to 15.6*dBm/MHz (122.2dBuV/m to110.8* dBuV/m)	Peak
	5.855GHz-5.875GHz	15.6dBm/MHz to 10*dBm/MHz (110.8dBuV/m to 105.6* dBuV/m)	Peak
	5.875GHz-5.925GHz	10dBm/MHz to -27*dBm/MHz (105.6dBuV/m to 68.2* dBuV/m)	Peak
	Above 5.925GHz	-27 dBm/MHz(68.2dBuV/m)@3m	Peak

* Increase/Decreases with the linearly of the frequency.

For emission above 1GHz and in restricted band, according to FCC KDB 789033 D02 General UNII Test Procedure, all emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit. $E[dBuV/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

TEST CONFIGURATION

Radiated:

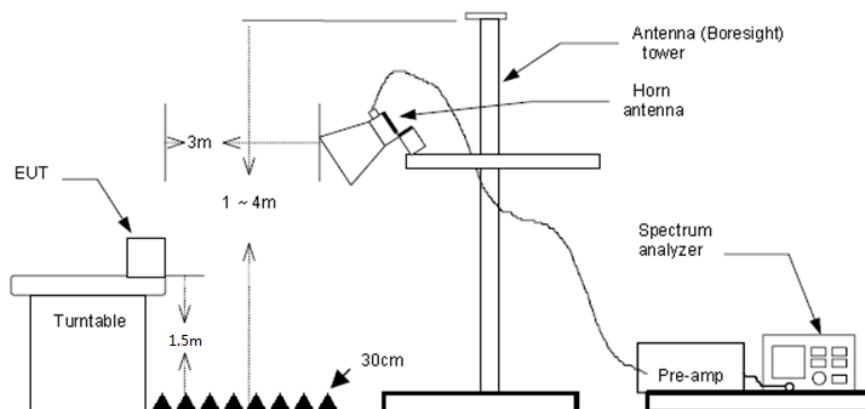

TEST MODE:

Please refer to the clause 4.3

TEST RESULTS☒ Passed ☐ Not Applicable**Radiated Band Edge Test Data**

Band:I&II Test channel:		CH _L	Worst mode:		802.11a(HT20)			Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5058.19	41.31	32.20	8.88	35.40	10.00	56.99	68.20	-11.21	Peak	
2	5150.07	39.92	32.00	8.96	35.44	10.00	55.44	68.20	-12.76	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5082.65	28.26	32.20	8.91	35.45	10.00	43.92	54.00	-10.08	Average	
2	5150.07	29.36	32.00	8.96	35.44	10.00	44.88	54.00	-9.12	Average	

Band:I&II Test channel:		CH _L	Worst mode:		802.11a(HT20)			Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5050.85	41.30	32.20	8.87	35.38	10.00	56.99	68.20	-11.21	Peak	
2	5150.07	39.73	32.00	8.96	35.44	10.00	55.25	68.20	-12.95	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5060.57	27.43	32.20	8.89	35.41	10.00	43.11	54.00	-10.89	Average	
2	5150.07	28.13	32.00	8.96	35.44	10.00	43.65	54.00	-10.35	Average	

Band:I&II Test channel:		CH _H	Worst mode:		802.11a(HT20)			Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5349.93	40.48	31.50	9.45	35.37	10.00	56.06	68.20	-12.14	Peak	
2	5408.01	40.67	31.70	9.38	35.34	10.00	56.41	68.20	-11.79	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5349.93	28.23	31.50	9.45	35.37	10.00	43.81	54.00	-10.19	Average	
2	5390.28	27.28	31.66	9.40	35.29	10.00	43.05	54.00	-10.95	Average	

Band:I&II Test channel:		CH _H	Worst mode:		802.11a(HT20)			Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5349.93	39.13	31.50	9.45	35.37	10.00	54.71	68.20	-13.49	Peak	
2	5399.31	40.56	31.70	9.39	35.31	10.00	56.34	68.20	-11.86	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5349.93	27.23	31.50	9.45	35.37	10.00	42.81	54.00	-11.19	Average	
2	5389.77	27.11	31.66	9.40	35.29	10.00	42.88	54.00	-11.12	Average	

Band:III Test channel:		CH _L	Worst mode:		802.11a(HT20)			Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5460.01	39.80	31.74	9.35	35.39	10.00	55.50	68.20	-12.70	Peak	
2	5468.60	46.81	31.77	9.35	35.37	10.00	62.56	68.20	-5.64	Peak	
3	5470.03	45.67	31.78	9.35	35.37	10.00	61.43	68.20	-6.77	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5460.01	27.26	31.74	9.35	35.39	10.00	42.96	54.00	-11.04	Average	
2	5470.03	28.37	31.78	9.35	35.37	10.00	44.13	54.00	-9.87	Average	

Band:III Test channel:		CH _L	Worst mode:		802.11a(HT20)			Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5460.01	38.79	31.74	9.35	35.39	10.00	54.49	68.20	-13.71	Peak	
2	5469.04	45.76	31.78	9.35	35.37	10.00	61.52	68.20	-6.68	Peak	
3	5470.03	42.30	31.78	9.35	35.37	10.00	58.06	68.20	-10.14	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5460.01	27.32	31.74	9.35	35.39	10.00	43.02	54.00	-10.98	Average	
2	5470.03	28.96	31.78	9.35	35.37	10.00	44.72	54.00	-9.28	Average	

Band: III Test channel:		CH _H	Worst mode:		802.11a(HT20)			Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5725.00	50.68	31.90	9.56	34.87	10.00	67.27	68.20	-0.93	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5725.00	35.54	31.90	9.56	34.87	10.00	52.13	54.00	-1.87	Average	

Band: III Test channel:		CH _H	Worst mode:		802.11a(HT20)			Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5725.00	46.34	31.90	9.56	34.87	10.00	62.93	68.20	-5.27	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5725.00	27.08	31.90	9.56	34.87	10.00	43.67	54.00	-10.33	Average	

Band:IV Test channel:		CH _L	Worst mode:		802.11a(HT20)		Polarity		Horizontal	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Remark	Remark	
5650	38.54	31.9	9.48	34.99	54.93	68.2	-13.27	Peak	Peak	
5699.962	39.89	31.9	9.53	34.91	56.41	105.2	-48.79	Peak	Peak	
5719.957	45.31	31.9	9.55	34.88	61.88	110.8	-48.92	Peak	Peak	

Band:IV Test channel:		CH _L	Worst mode:		802.11a(HT20)		Polarity		Vertical	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Remark	Remark	
5650	40.44	31.9	9.48	34.99	56.83	68.2	-11.37	Peak	Peak	
5699.962	39.65	31.9	9.53	34.91	56.17	68.2	-12.03	Peak	Peak	
5719.957	48.93	31.9	9.55	34.88	65.5	68.2	-2.7	Peak	Peak	

Band: IV Test channel:		CH _H	Worst mode:		802.11a(HT20)			Polarity		Horizontal	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Remark	Remark		
5855.079	46.05	32.21	9.59	34.91	62.94	110.8	-47.86	Peak	Peak		
5875.044	38.53	32.25	9.58	34.97	55.39	105.2	-49.81	Peak	Peak		
5924.992	39.33	32.35	9.58	35.04	56.22	68.2	-11.98	Peak	Peak		

Band: IV Test channel:		CH _H	Worst mode:		802.11a(HT20)			Polarity		Vertical
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Remark	Remark	
5855.079	40.3	32.21	9.59	34.91	57.19	110.8	-53.61	Peak	Peak	
5875.044	38.33	32.25	9.58	34.97	55.19	105.2	-50.01	Peak	Peak	
5924.992	39.8	32.35	9.58	35.04	56.69	68.2	-11.51	Peak	Peak	

Band:I&II Test channel:		CH _L	Worst mode:		802.11n(HT40)			Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamplifier dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5068.91	40.94	32.20	8.90	35.43	10.00	56.61	68.20	-11.59	Peak	
2	5149.87	50.45	32.00	8.96	35.45	10.00	65.96	68.20	-2.24	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamplifier dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5084.64	28.05	32.20	8.91	35.45	10.00	43.71	54.00	-10.29	Average	
2	5150.07	30.08	32.00	8.96	35.44	10.00	45.60	54.00	-8.40	Average	

Band:I&II Test channel:		CH _L	Worst mode:		802.11n(HT40)			Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamplifier dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5058.39	41.15	32.20	8.88	35.41	10.00	56.82	68.20	-11.38	Peak	
2	5150.07	46.63	32.00	8.96	35.44	10.00	62.15	68.20	-6.05	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamplifier dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5060.17	27.42	32.20	8.89	35.41	10.00	43.10	54.00	-10.90	Average	
2	5150.07	30.13	32.00	8.96	35.44	10.00	45.65	54.00	-8.35	Average	

Band:I&II Test channel:		CH _H	Worst mode:		802.11n(HT40)			Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamplifier dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5349.93	44.14	31.50	9.45	35.37	10.00	59.72	68.20	-8.48	Peak	
2	5427.17	41.16	31.70	9.36	35.37	10.00	56.85	68.20	-11.35	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamplifier dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5349.93	29.88	31.50	9.45	35.37	10.00	45.46	54.00	-8.54	Average	
2	5390.45	27.21	31.66	9.40	35.29	10.00	42.98	54.00	-11.02	Average	

Band:I&II Test channel:		CH _H	Worst mode:		802.11n(HT40)			Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamplifier dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5349.93	42.36	31.50	9.45	35.37	10.00	57.94	68.20	-10.26	Peak	
2	5441.06	40.50	31.70	9.36	35.38	10.00	56.18	68.20	-12.02	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamplifier dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5349.93	29.21	31.50	9.45	35.37	10.00	44.79	54.00	-9.21	Average	
2	5396.07	27.12	31.68	9.39	35.30	10.00	42.89	54.00	-11.11	Average	

Band:III Test channel:		CH _L	Worst mode:		802.11n(HT40)		Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5460.01	41.04	31.74	9.35	35.39	10.00	56.74	68.20	-11.46	Peak
2	5464.30	47.38	31.76	9.35	35.38	10.00	63.11	68.20	-5.09	Peak
3	5470.03	45.54	31.78	9.35	35.37	10.00	61.30	68.20	-6.90	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5460.01	28.62	31.74	9.35	35.39	10.00	44.32	54.00	-9.68	Average
2	5470.03	30.95	31.78	9.35	35.37	10.00	46.71	54.00	-7.29	Average

Band:III Test channel:		CH _L	Worst mode:		802.11n(HT40)		Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5460.01	43.84	31.74	9.35	35.39	10.00	59.54	68.20	-8.66	Peak
2	5464.19	46.58	31.76	9.35	35.38	10.00	62.31	68.20	-5.89	Peak
3	5470.03	45.06	31.78	9.35	35.37	10.00	60.82	68.20	-7.38	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5460.01	30.17	31.74	9.35	35.39	10.00	45.87	54.00	-8.13	Average
2	5470.03	32.54	31.78	9.35	35.37	10.00	48.30	54.00	-5.70	Average

Band: III Test channel:		CH _H	Worst mode:		802.11n(HT40)		Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5725.00	46.24	31.90	9.56	34.87	10.00	62.83	68.20	-5.37	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5725.00	29.16	31.90	9.56	34.87	10.00	45.75	54.00	-8.25	Average

Band: III Test channel:		CH _H	Worst mode:		802.11n(HT40)		Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5725.00	41.67	31.90	9.56	34.87	10.00	58.26	68.20	-9.94	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5725.00	27.10	31.90	9.56	34.87	10.00	43.69	54.00	-10.31	Average

Band:IV Test channel:		CH _L	Worst mode:		802.11n(HT40)		Polarity		Horizontal	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Remark	Remark	
5650	39.42	31.9	9.48	34.99	55.81	68.2	-12.39	Peak	Peak	
5700.007	44.91	31.9	9.53	34.91	61.43	105.2	-43.77	Peak	Peak	
5720.045	56.75	31.9	9.55	34.87	73.33	110.8	-37.47	Peak	Peak	

Band:IV Test channel:		CH _L	Worst mode:		802.11n(HT40)		Polarity		Vertical	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Remark	Remark	
5650	39.82	31.9	9.48	34.99	56.21	68.2	-11.99	Peak	Peak	
5700.007	45.76	31.9	9.53	34.91	62.28	105.2	-42.92	Peak	Peak	
5720.045	57.02	31.9	9.55	34.87	73.6	110.8	-37.2	Peak	Peak	

Band: IV Test channel:		CH _H	Worst mode:		802.11n(HT40)			Polarity		Horizontal	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Remark	Remark		
5854.939	43.7	32.21	9.59	34.91	60.59	110.8	-50.21	Peak	Peak		
5874.92	40.1	32.25	9.58	34.97	56.96	105.2	-48.24	Peak	Peak		
5924.966	39.31	32.35	9.58	35.04	56.2	68.2	-12	Peak	Peak		

Band: IV Test channel:		CH _H	Worst mode:		802.11n(HT40)			Polarity		Vertical
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Remark	Remark	
5854.939	39.51	32.21	9.59	34.91	56.4	110.8	-54.4	Peak	Peak	
5874.92	39.17	32.25	9.58	34.97	56.03	105.2	-49.17	Peak	Peak	
5924.966	38.59	32.35	9.58	35.04	55.48	68.2	-12.72	Peak	Peak	

Band:I&II Test channel:		CH _L	Worst mode:		802.11ac(HT80)		Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5146.02	47.99	32.02	8.96	35.45	10.00	63.52	68.20	-4.68	Peak
2	5150.04	45.78	32.00	8.96	35.44	10.00	61.30	68.20	-6.90	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5069.76	27.49	32.20	8.90	35.43	10.00	43.16	54.00	-10.84	Average
2	5150.04	33.27	32.00	8.96	35.44	10.00	48.79	54.00	-5.21	Average

Band:I&II Test channel:		CH _L	Worst mode:		802.11ac(HT80)		Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5145.02	50.16	32.02	8.96	35.45	10.00	65.69	68.20	-2.51	Peak
2	5150.04	50.38	32.00	8.96	35.44	10.00	65.90	68.20	-2.30	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5066.06	27.41	32.20	8.89	35.42	10.00	43.08	54.00	-10.92	Average
2	5150.04	31.87	32.00	8.96	35.44	10.00	47.39	54.00	-6.61	Average

Band:I&II Test channel:		CH _H	Worst mode:		802.11ac(HT80)		Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5350.08	42.83	31.50	9.45	35.37	10.00	58.41	68.20	-9.79	Peak
2	5359.97	44.86	31.54	9.44	35.33	10.00	60.51	68.20	-7.69	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5350.08	28.44	31.50	9.45	35.37	10.00	44.02	54.00	-9.98	Average
2	5390.20	27.23	31.66	9.40	35.29	10.00	43.00	54.00	-11.00	Average

Band:I&II Test channel:		CH _H	Worst mode:		802.11ac(HT80)			Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5350.08	41.16	31.50	9.45	35.37	10.00	56.74	68.20	-11.46	Peak	
2	5356.45	43.71	31.53	9.44	35.35	10.00	59.33	68.20	-8.87	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5350.08	29.74	31.50	9.45	35.37	10.00	45.32	54.00	-8.68	Average	
2	5390.42	27.35	31.66	9.40	35.29	10.00	43.12	54.00	-10.88	Average	

Band:III Test channel:		CH _L	Worst mode:		802.11ac(HT80)			Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5460.00	42.88	31.74	9.35	35.39	10.00	58.58	68.20	-9.62	Peak	
2	5470.01	50.84	31.78	9.35	35.37	10.00	66.60	68.20	-1.60	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5460.00	28.78	31.74	9.35	35.39	10.00	44.48	54.00	-9.52	Average	
2	5470.01	31.51	31.78	9.35	35.37	10.00	47.27	54.00	-6.73	Average	

Band:III Test channel:		CH _L	Worst mode:		802.11ac(HT80)			Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5460.00	44.26	31.74	9.35	35.39	10.00	59.96	68.20	-8.24	Peak	
2	5469.74	51.07	31.78	9.35	35.37	10.00	66.83	68.20	-1.37	Peak	
3	5470.01	48.30	31.78	9.35	35.37	10.00	64.06	68.20	-4.14	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5460.00	29.88	31.74	9.35	35.39	10.00	45.58	54.00	-8.42	Average	
2	5470.01	31.23	31.78	9.35	35.37	10.00	46.99	54.00	-7.01	Average	

Band: III Test channel:		CH _H	Worst mode:		802.11ac(HT80)			Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5724.97	44.47	31.90	9.56	34.87	10.00	61.06	68.20	-7.14	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5724.97	31.37	31.90	9.56	34.87	10.00	47.96	54.00	-6.04	Average	

Band: III Test channel:		CH _H	Worst mode:		802.11ac(HT80)			Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5724.97	42.20	31.90	9.56	34.87	10.00	58.79	68.20	-9.41	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	5724.97	29.84	31.90	9.56	34.87	10.00	46.43	54.00	-7.57	Average	

Band:IV Test channel:		CH _L	Worst mode:		802.11ac(HT80)		Polarity		Horizontal	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Remark		
	5650	43.26	31.9	9.48	34.99	59.65	68.2		-8.55	Peak
	5699.962	51.48	31.9	9.53	34.91	68	105.2		-37.2	Peak
	5720.011	58.76	31.9	9.55	34.87	75.34	110.8		-35.46	Peak
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Remark		
	5854.98	48.17	32.21	9.59	34.91	65.06	110.8		-45.74	Peak
	5875.136	43.94	32.25	9.58	34.97	60.8	105.2		-44.4	Peak
	5925.071	38.88	32.35	9.58	35.04	55.77	68.2		-12.43	Peak

Band:IV Test channel:		CH _L	Worst mode:		802.11ac(HT80)		Polarity		Vertical
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Remark	
5650	43.49	31.9	9.48	34.99	59.88	68.2	-8.32	Peak	
5699.962	49.71	31.9	9.53	34.91	66.23	105.2	-38.97	Peak	
5720.011	56.34	31.9	9.55	34.87	72.92	110.8	-37.88	Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Remark	
5854.98	47.92	32.21	9.59	34.91	64.81	110.8	-45.99	Peak	
5875.136	42.38	32.25	9.58	34.97	59.24	105.2	-45.96	Peak	
5925.071	38.89	32.35	9.58	35.04	55.78	68.2	-12.42	Peak	

Remark:

1. Final Level = Receiver Read level + Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. Test 802.11a, 802.11n, 802.11ac mode, all modulations have been tested, only worst case is reported

5.8. Radiated Spurious Emissions

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209 and Part 15 Subpart E Section 15.407

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak


Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 40*log(300/3)= Limit dBuV/m @300m +80,

Limit dBuV/m @3m = Limit dBuV/m @30m +40*log(30/3)= Limit dBuV/m @30m + 40.


Unwanted emissions below 1GHz and Restricted band emissions above 1GHz		
Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION


- 9KHz ~30MHz

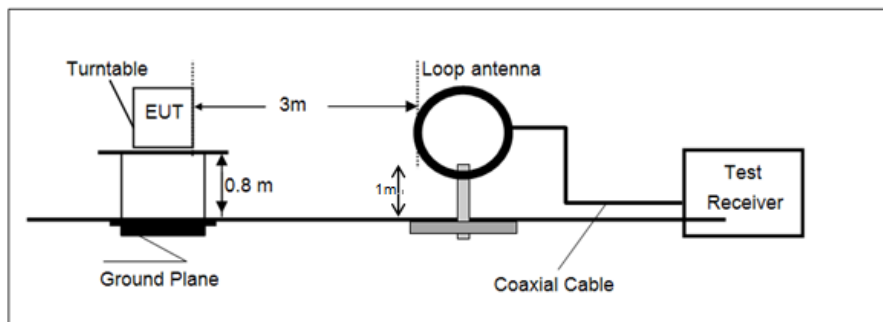

- 30MHz ~ 1GHz

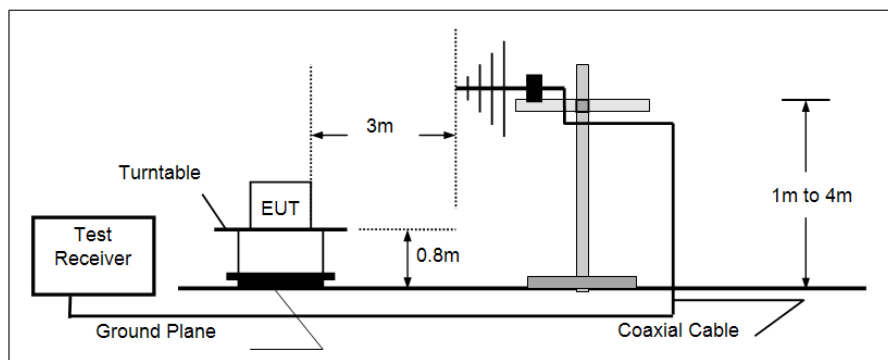

➤ Above 1GHz

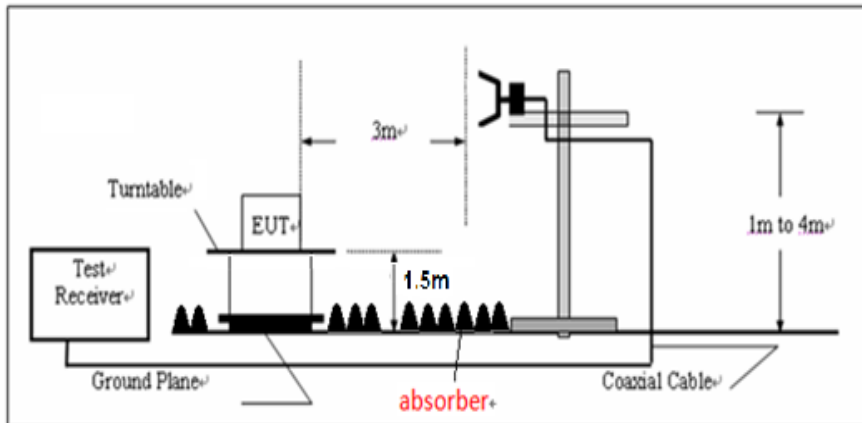**TEST PROCEDURE**

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - a) Span shall wide enough to fully capture the emission being measured;
 - b) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - c) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW=3MHz RMS detector for Average value.

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

☒ Passed ☐ Not Applicable


TEST Data**TEST DATA FOR 9 kHz ~ 30 MHz**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

TEST DATA FOR 30MHz-1GHz

Polarization:

Horizontal

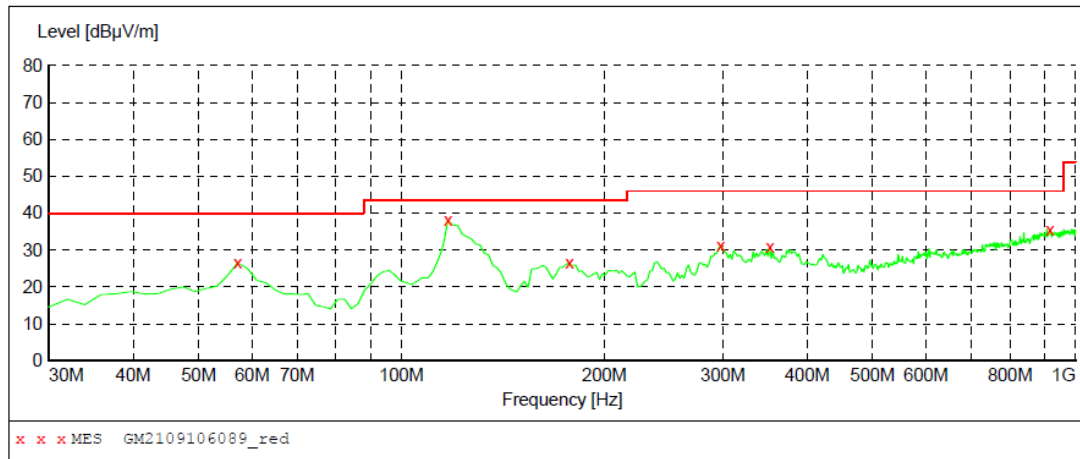
**MEASUREMENT RESULT: "GM2109106089_red"**

9/10/2021 7:13PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
57.160000	26.50	-9.4	40.0	13.5	QP	300.0	126.00	HORIZONTAL
117.300000	38.10	-12.1	43.5	5.4	QP	300.0	0.00	HORIZONTAL
177.440000	26.60	-12.5	43.5	16.9	QP	100.0	254.00	HORIZONTAL
297.720000	31.10	-7.1	46.0	14.9	QP	100.0	152.00	HORIZONTAL
352.040000	30.80	-5.0	46.0	15.2	QP	100.0	100.00	HORIZONTAL
916.580000	35.60	7.7	46.0	10.4	QP	300.0	305.00	HORIZONTAL

Polarization:

Vertical

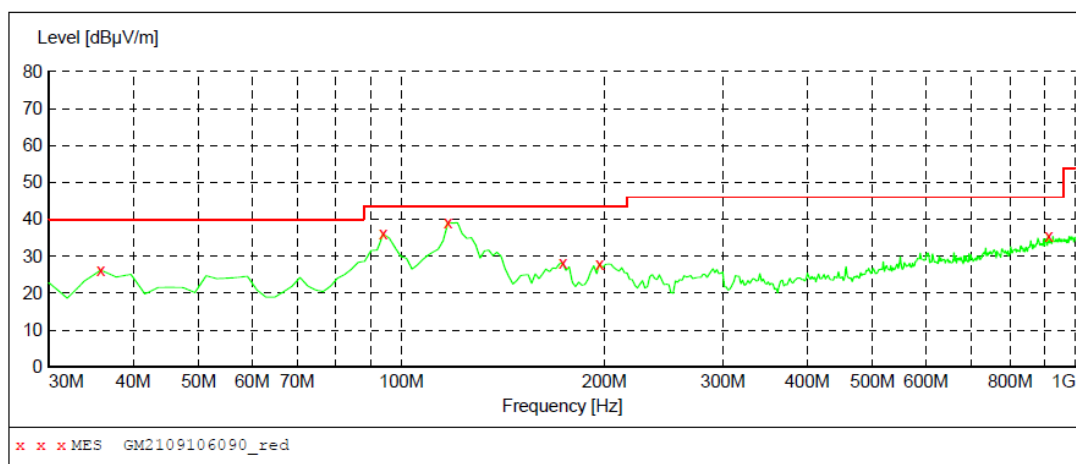**MEASUREMENT RESULT: "GM2109106090_red"**

9/10/2021 7:16PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
35.820000	26.20	-11.2	40.0	13.8	QP	100.0	139.00	VERTICAL
94.020000	36.10	-11.6	43.5	7.4	QP	100.0	152.00	VERTICAL
117.300000	39.10	-12.1	43.5	4.4	QP	100.0	0.00	VERTICAL
173.560000	28.10	-12.6	43.5	15.4	QP	100.0	66.00	VERTICAL
196.840000	28.00	-9.8	43.5	15.5	QP	100.0	360.00	VERTICAL
912.700000	35.60	7.6	46.0	10.4	QP	100.0	13.00	VERTICAL

Remark:

Transd=Cable lose+ Antenna factor- Pre-amplifier; Margin=Limit -Level

TEST DATA FOR Above 1GHz

Band: I		Worst mode: 802.11a			Test channel: CH _L		
Frequency (MHz)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Factor (dB)	Test value	Polarization
1311.38	22.25	16.68	74.00	57.32	-5.57	Vertical	Peak
1843.06	25.14	19.33	74.00	54.67	-5.81	Vertical	Peak
3054.78	30.01	30.13	74.00	43.87	0.12	Vertical	Peak
4846.66	27.03	34.14	74.00	39.86	7.11	Vertical	Peak
1461.19	23.17	17.56	74.00	56.44	-5.61	Horizontal	Peak
4812.88	27.36	34.43	74.00	39.57	7.07	Horizontal	Peak
6062.78	27.34	37.96	74.00	36.04	10.62	Horizontal	Peak
7154.06	28.25	42.98	74.00	31.02	14.73	Horizontal	Peak

Band: I		Worst mode: 802.11a			Test channel: CH _M		
Frequency (MHz)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Factor (dB)	Test value	Polarization
2088.34	23.84	19.75	74.00	54.25	-4.09	Vertical	Peak
4749.72	28.05	34.76	74.00	39.24	6.71	Vertical	Peak
5115.44	28.53	37.36	74.00	36.64	8.83	Vertical	Peak
8126.38	28.88	45.13	74.00	28.87	16.25	Vertical	Peak
1590.44	21.82	15.60	74.00	58.40	-6.22	Horizontal	Peak
3977.16	28.03	30.97	74.00	43.03	2.94	Horizontal	Peak
5222.66	27.75	36.61	74.00	37.39	8.86	Horizontal	Peak
8039.72	28.70	44.95	74.00	29.05	16.25	Horizontal	Peak

Band: I		Worst mode: 802.11a			Test channel: CH _H		
Frequency (MHz)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Factor (dB)	Test value	Polarization
1447.97	21.35	15.75	74.00	58.25	-5.60	Vertical	Peak
2125.06	29.16	25.41	74.00	48.59	-3.75	Vertical	Peak
3514.50	28.69	29.80	74.00	44.20	1.11	Vertical	Peak
5447.38	28.57	37.44	74.00	36.56	8.87	Vertical	Peak
1681.50	21.82	15.69	74.00	58.31	-6.13	Horizontal	Peak
4442.75	28.21	33.31	74.00	40.69	5.10	Horizontal	Peak
6923.47	27.02	41.14	74.00	32.86	14.12	Horizontal	Peak
7447.81	28.60	43.99	74.00	30.01	15.39	Horizontal	Peak

Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. Measuring frequencies from 1 GHz to 40GHz.
4. Test 802.11a, 802.11n, 802.11ac mode, all modulations have been tested, only worst case is reported

5.9. Frequency stability

LIMIT

Within Operation Band

TEST CONFIGURATION

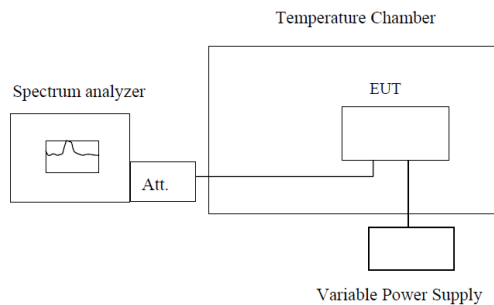

Note : Measurement setup for testing on Antenna connector

TEST PROCEDURE

1. The equipment under test was connected to an external power supply.
2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
3. The EUT was placed inside the temperature chamber.
4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency.
5. Turn EUT off and set the chamber temperature to -20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached..

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

☒ Passed ☐ Not Applicable

Please refer to appendix G on the appendix report

6. TEST SETUP PHOTOS

Radiated Emission



AC Conducted Emission



7. EXTERANAL AND INTERNAL PHOTOS

Reference to the test report No. : CHTEW21100145.

8. APPENDIX REPORT