

Conducted output power


Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
EGPRS1900 1 Slot	512	1850.2	25.87	PASS
EGPRS1900 1 Slot	661	1880	26.28	PASS
EGPRS1900 1 Slot	810	1909.8	26.39	PASS
EGPRS1900 2 Slot	512	1850.2	25.24	PASS
EGPRS1900 2 Slot	661	1880	24.80	PASS
EGPRS1900 2 Slot	810	1909.8	25.19	PASS
EGPRS1900 3 Slot	512	1850.2	22.73	PASS
EGPRS1900 3 Slot	661	1880	22.62	PASS
EGPRS1900 3 Slot	810	1909.8	23.52	PASS
EGPRS1900 4 Slot	512	1850.2	21.67	PASS
EGPRS1900 4 Slot	661	1880	21.88	PASS
EGPRS1900 4 Slot	810	1909.8	21.95	PASS
EGPRS850 1 Slot	128	824.2	26.52	PASS
EGPRS850 1 Slot	189	836.4	26.40	PASS
EGPRS850 1 Slot	251	848.8	26.70	PASS
EGPRS850 2 Slot	128	824.2	25.58	PASS
EGPRS850 2 Slot	189	836.4	25.53	PASS
EGPRS850 2 Slot	251	848.8	25.72	PASS
EGPRS850 3 Slot	128	824.2	23.43	PASS
EGPRS850 3 Slot	189	836.4	23.64	PASS
EGPRS850 3 Slot	251	848.8	23.50	PASS
EGPRS850 4 Slot	128	824.2	22.47	PASS
EGPRS850 4 Slot	189	836.4	22.32	PASS
EGPRS850 4 Slot	251	848.8	22.63	PASS
GPRS1900 1 Slot	512	1850.2	29.35	PASS
GPRS1900 1 Slot	661	1880	29.54	PASS
GPRS1900 1 Slot	810	1909.8	29.69	PASS
GPRS1900 2 Slot	512	1850.2	28.47	PASS
GPRS1900 2 Slot	661	1880	28.62	PASS
GPRS1900 2 Slot	810	1909.8	28.82	PASS
GPRS1900 3 Slot	512	1850.2	26.57	PASS
GPRS1900 3 Slot	661	1880	26.66	PASS
GPRS1900 3 Slot	810	1909.8	26.94	PASS
GPRS1900 4 Slot	512	1850.2	25.27	PASS
GPRS1900 4 Slot	661	1880	25.44	PASS
GPRS1900 4 Slot	810	1909.8	25.67	PASS
GPRS850 1 Slot	128	824.2	32.26	PASS
GPRS850 1 Slot	189	836.4	32.40	PASS
GPRS850 1 Slot	251	848.8	32.22	PASS
GPRS850 2 Slot	128	824.2	31.27	PASS
GPRS850 2 Slot	189	836.4	31.24	PASS

GPRS850 2 Slot	251	848.8	31.21	PASS
GPRS850 3 Slot	128	824.2	29.26	PASS
GPRS850 3 Slot	189	836.4	29.39	PASS
GPRS850 3 Slot	251	848.8	29.21	PASS
GPRS850 4 Slot	128	824.2	28.11	PASS
GPRS850 4 Slot	189	836.4	28.23	PASS
GPRS850 4 Slot	251	848.8	28.00	PASS
GSM1900	512	1850.2	29.49	PASS
GSM1900	661	1880	29.63	PASS
GSM1900	810	1909.8	29.79	PASS
GSM850	128	824.2	32.27	PASS
GSM850	189	836.4	32.41	PASS
GSM850	251	848.8	32.23	PASS

Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
EGPRS1900	512	1850.2	6.19	13	PASS
EGPRS1900	661	1880	6.20	13	PASS
EGPRS1900	810	1909.8	6.06	13	PASS
EGPRS850	128	824.2	7.97	13	PASS
EGPRS850	189	836.4	8.39	13	PASS
EGPRS850	251	848.8	7.97	13	PASS

EGPRS1900 Channel=661

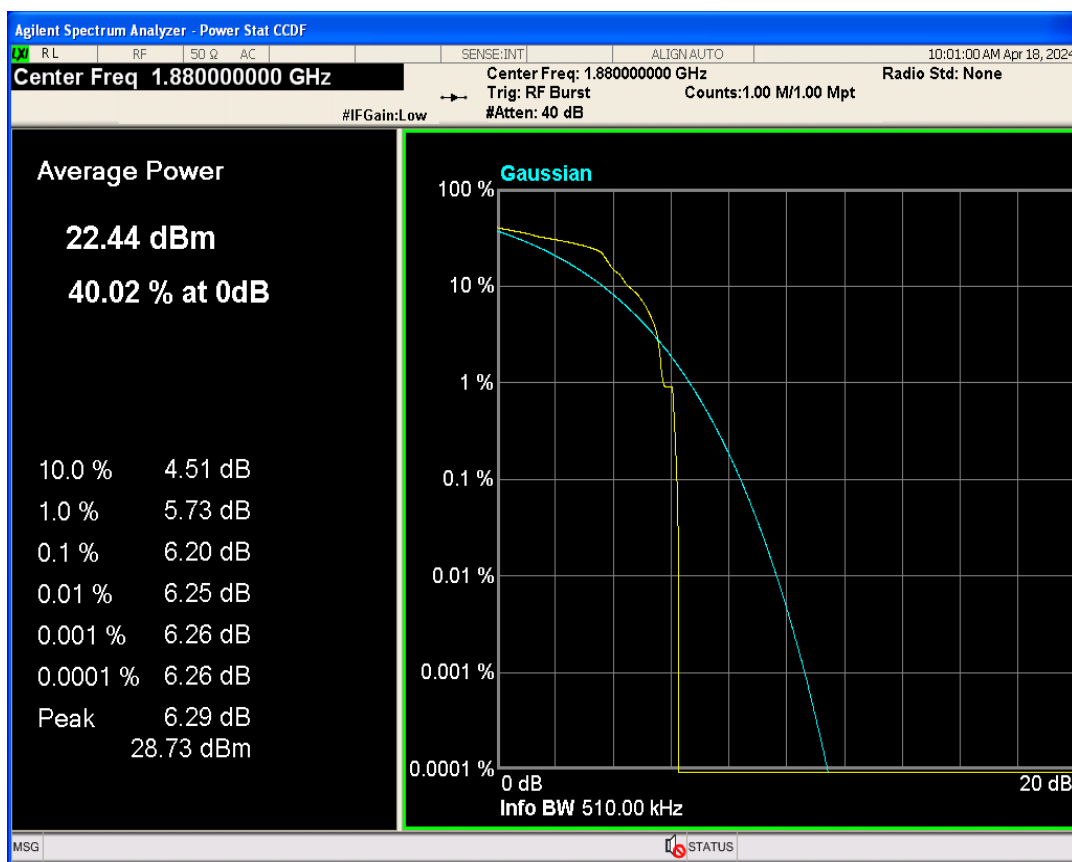


EGPRS1900 Channel=512




EGPRS1900 Channel=810




EGPRS850 Channel=128

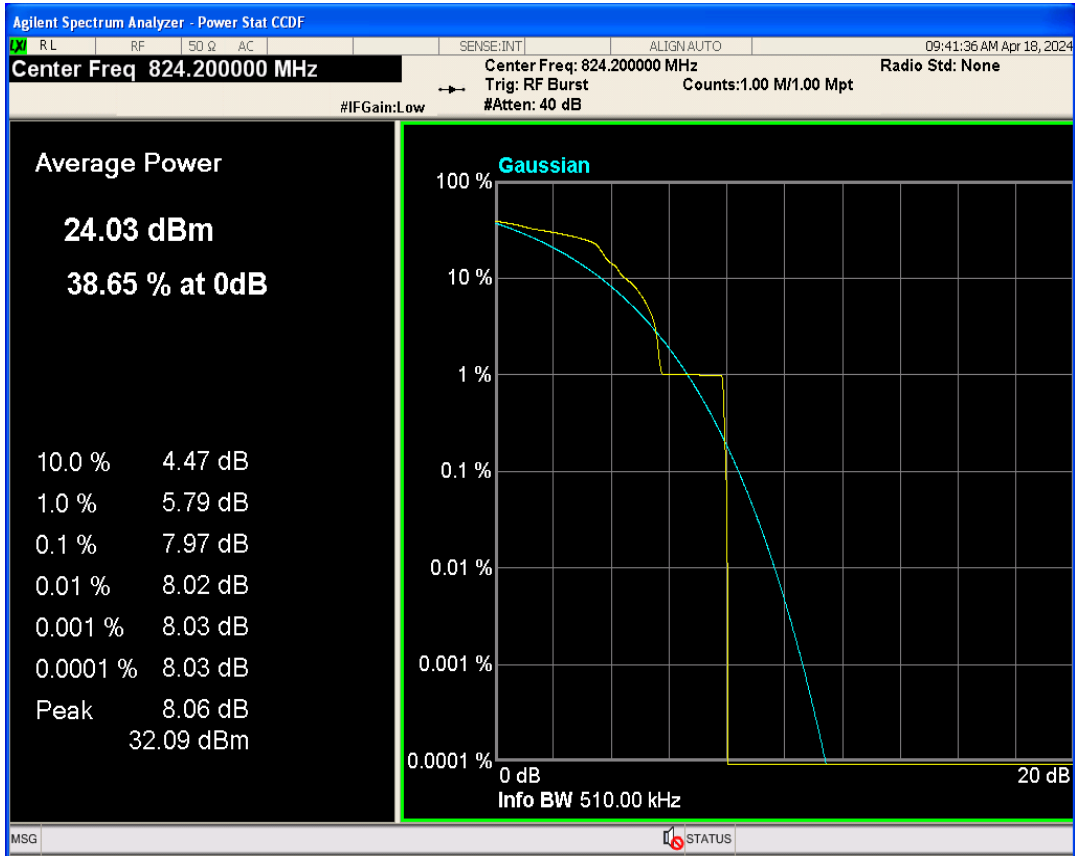

EGPRS850 Channel=189

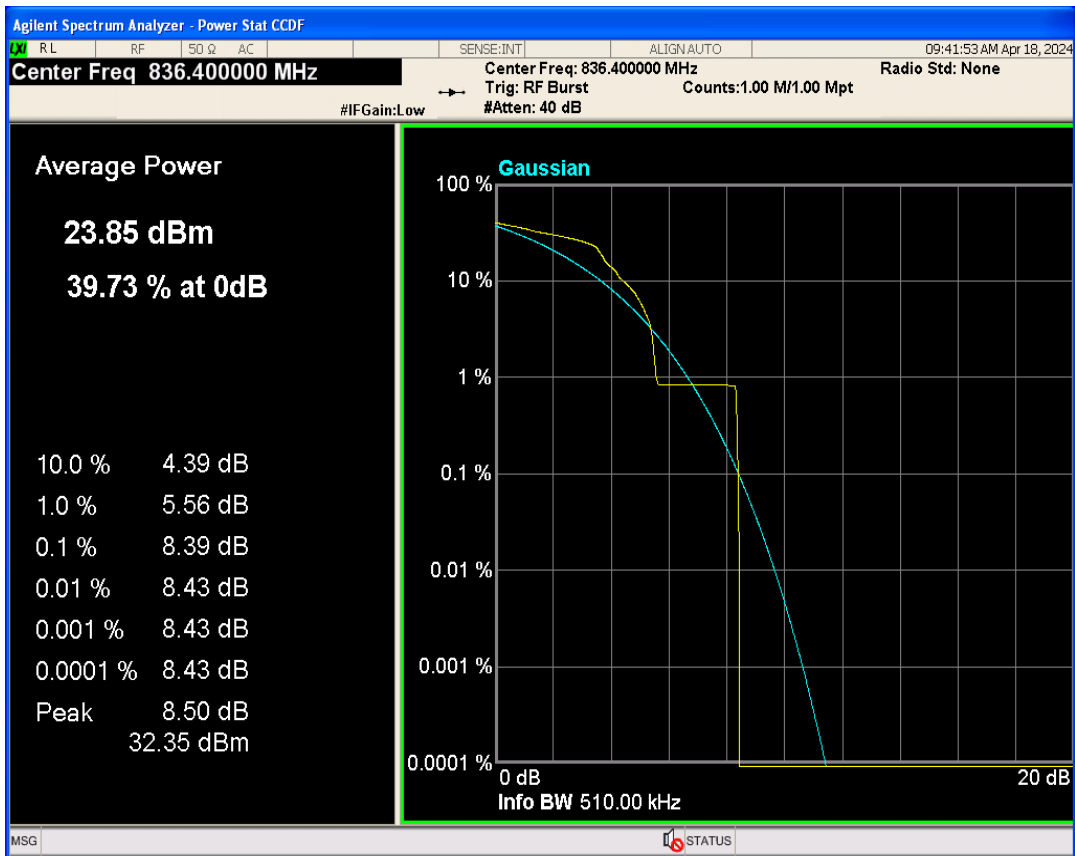


EGPRS850 Channel=251

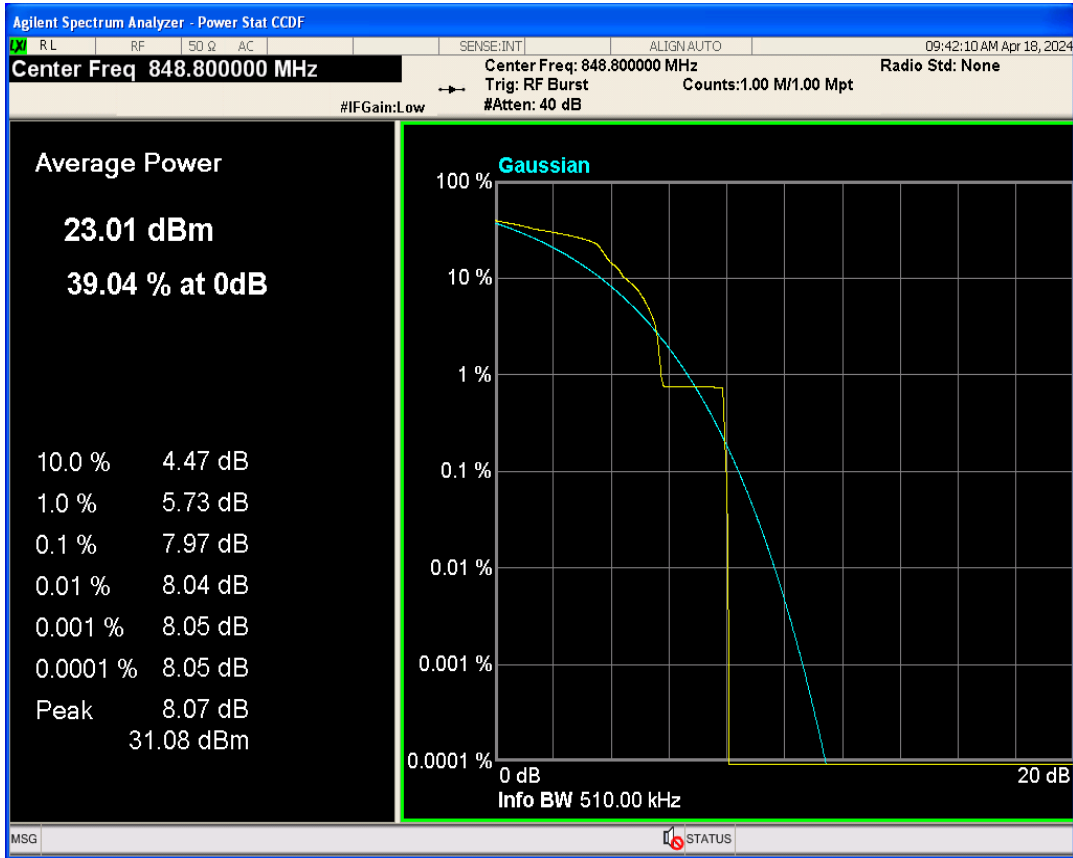


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
EGPRS1900	512	1850.2	247.635	316.583	PASS
EGPRS1900	661	1880	247.132	308.025	PASS
EGPRS1900	810	1909.8	243.144	302.095	PASS
EGPRS850	128	824.2	253.282	317.423	PASS
EGPRS850	189	836.4	253.732	317.149	PASS
EGPRS850	251	848.8	252.196	309.879	PASS


EGPRS1900 Channel=512

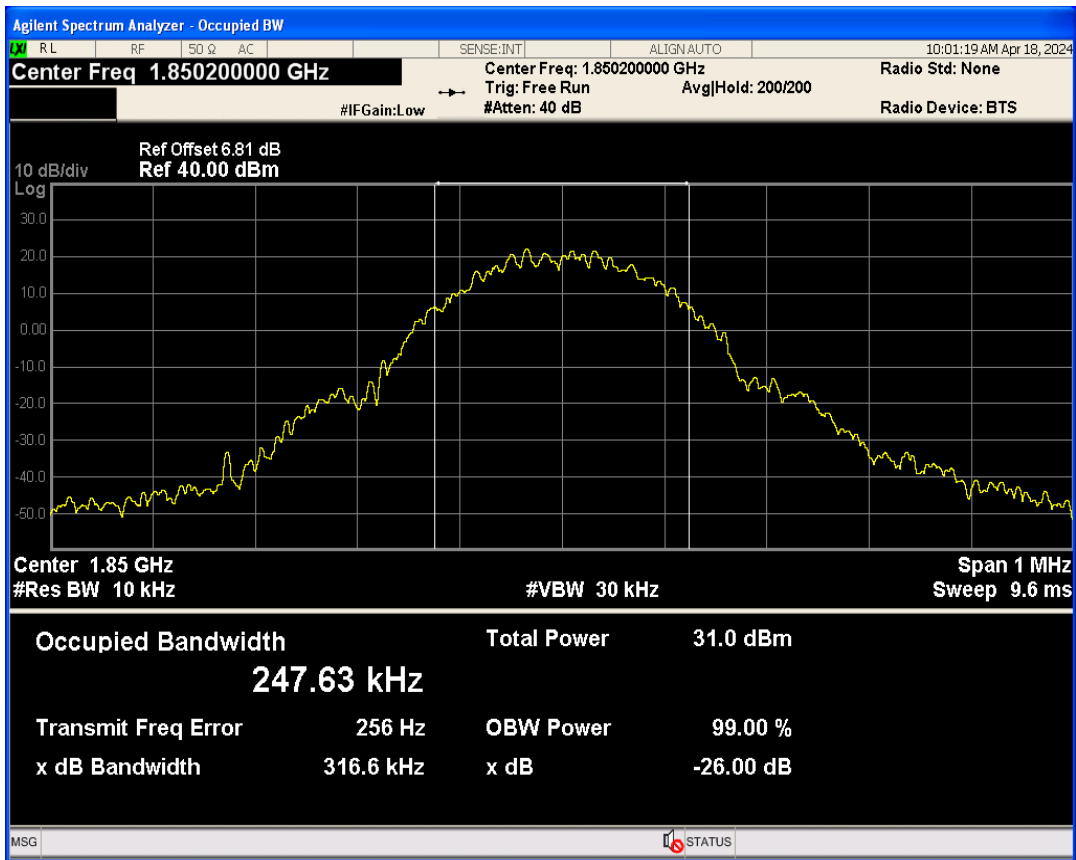


EGPRS1900 Channel=661

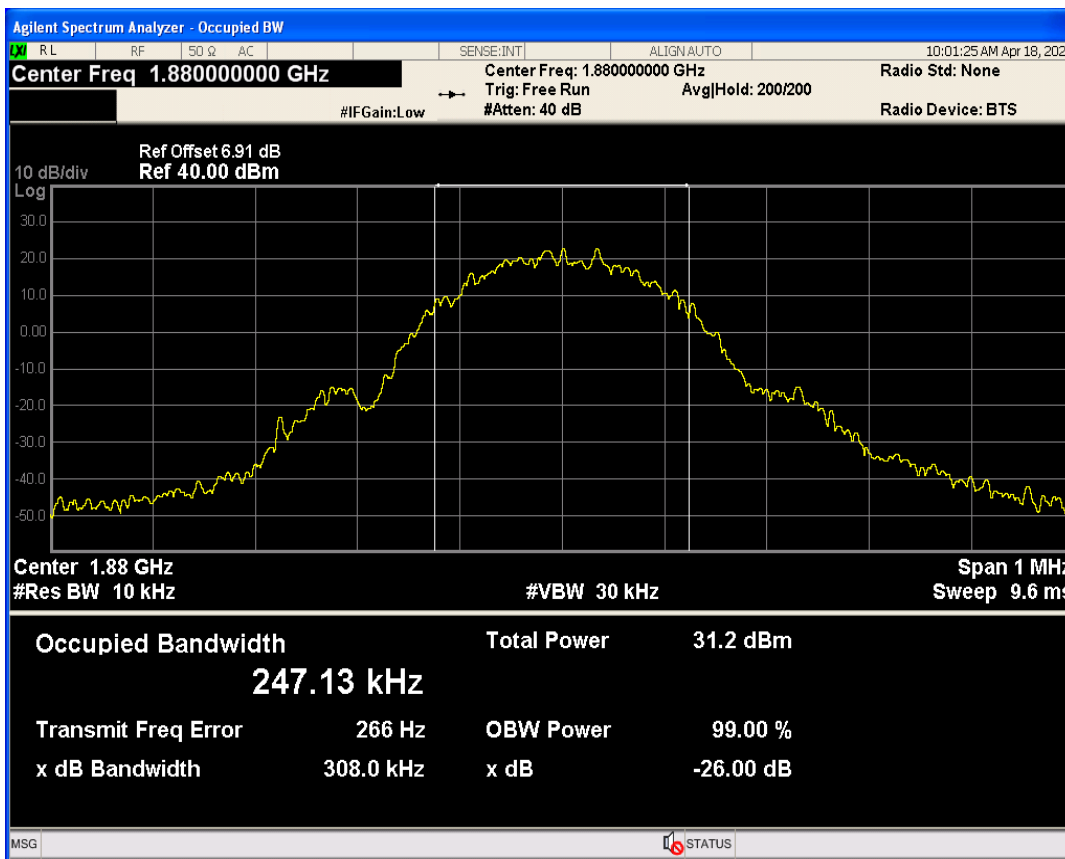


EGPRS1900 Channel=810

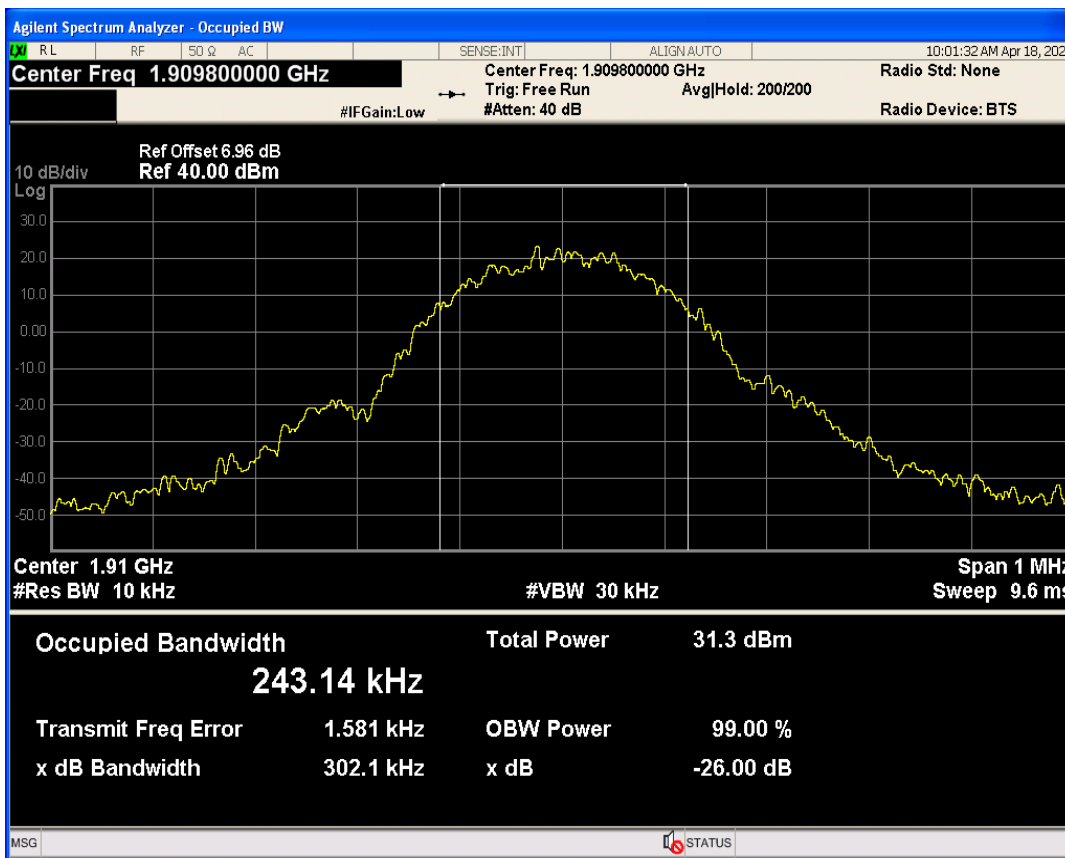


EGPRS850 Channel=189

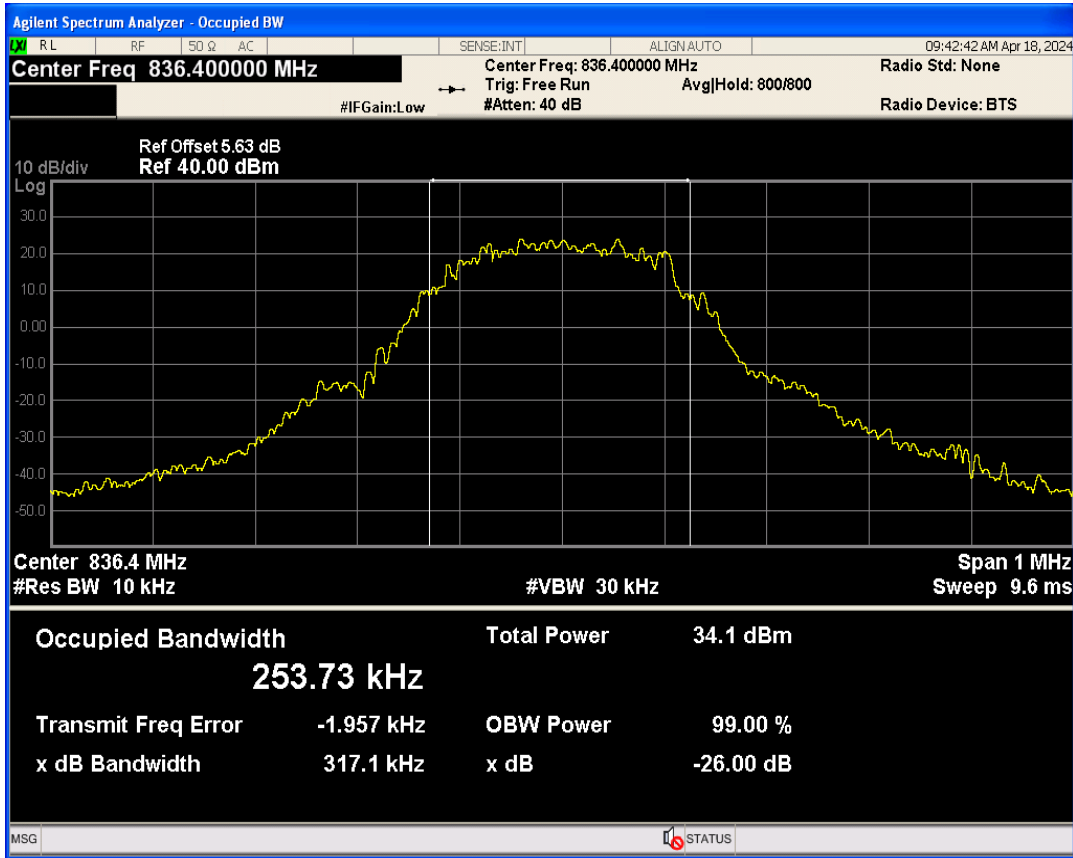

EGPRS850 Channel=128

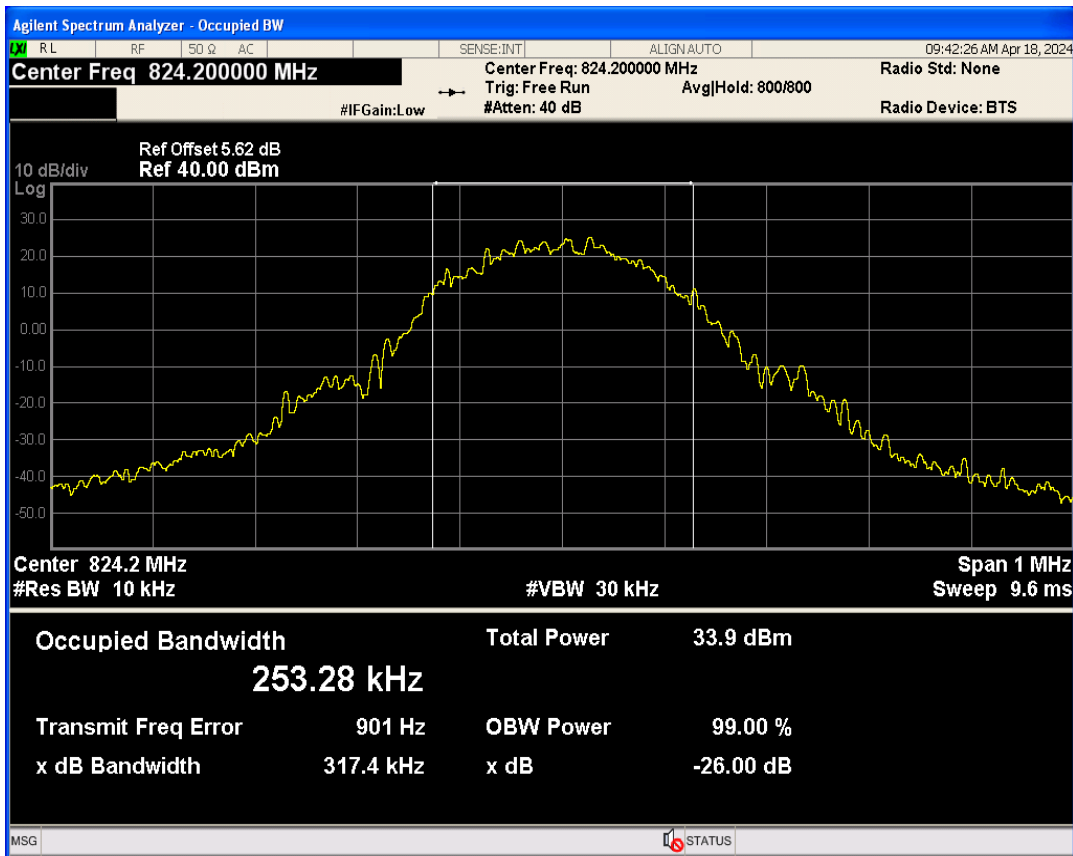


EGPRS850 Channel=251

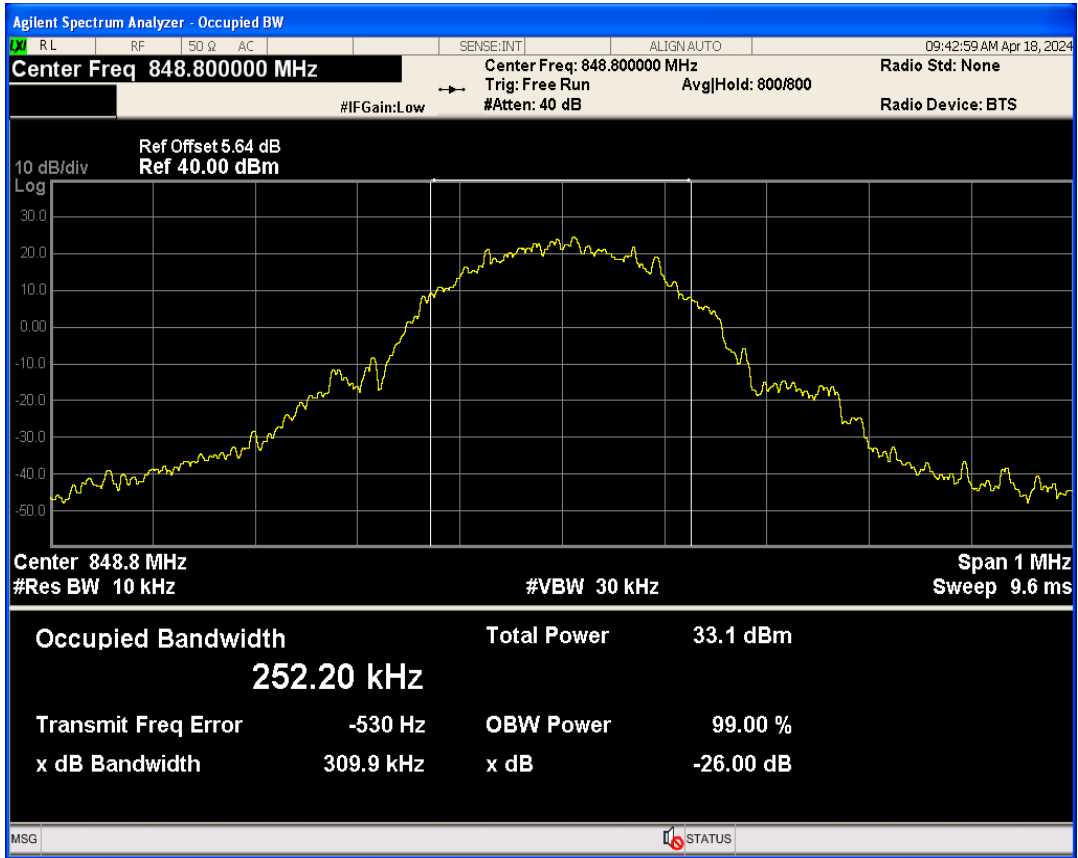


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	1849.97	-36.59	-13	PASS
EGPRS1900	810	1909.8	1910.00	-34.62	-13	PASS
EGPRS850	128	824.2	823.99	-34.92	-13	PASS
EGPRS850	251	848.8	849.02	-36.25	-13	PASS


EGPRS1900 Channel=512

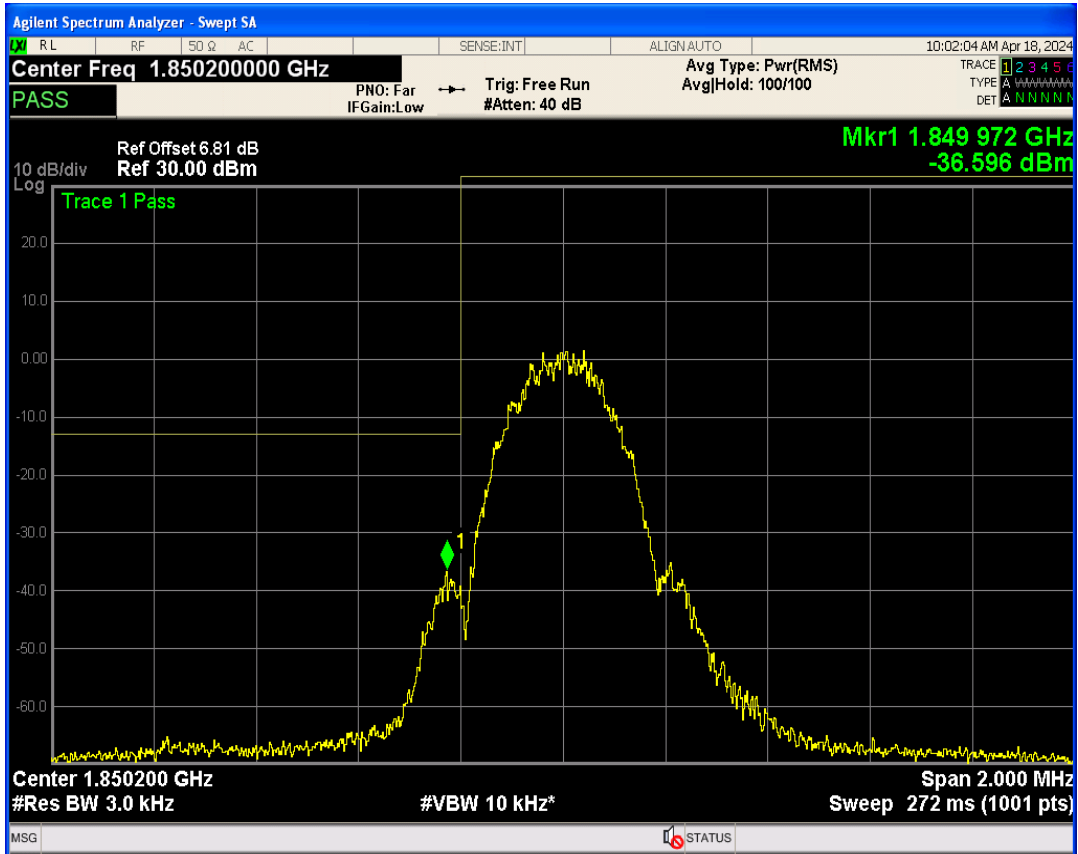


EGPRS1900 Channel=810

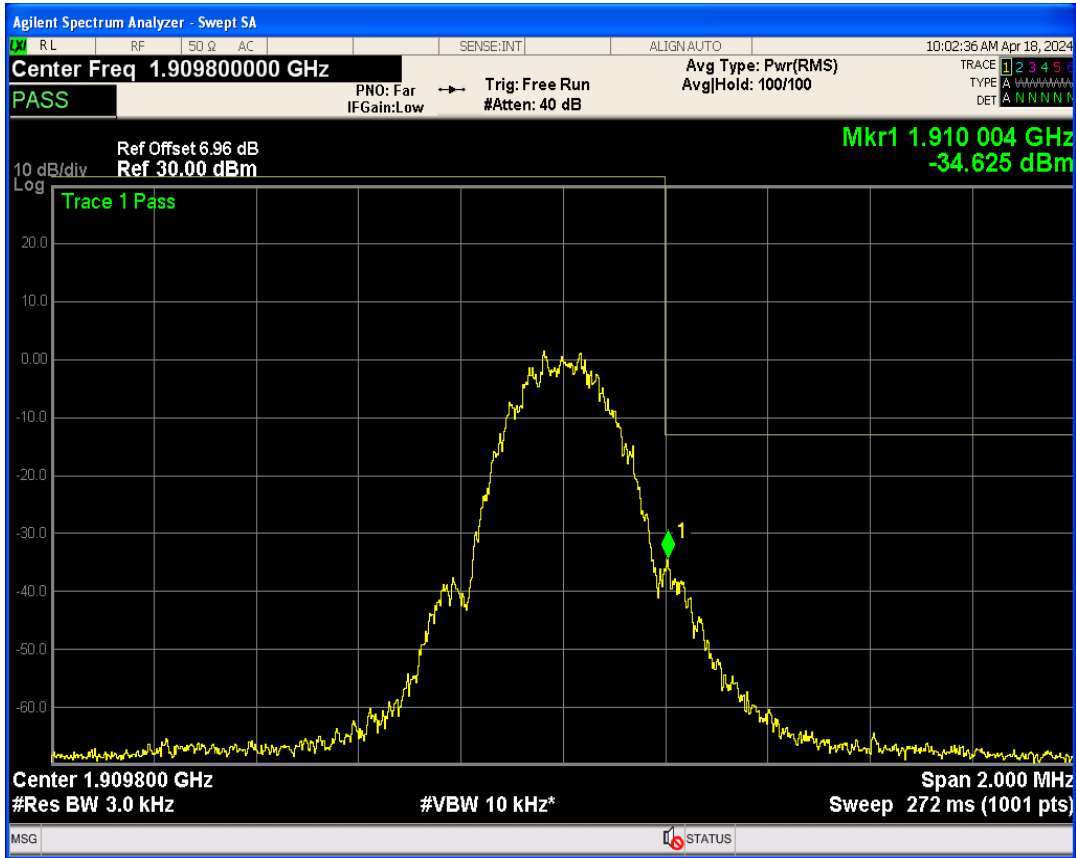

EGPRS850 Channel=128

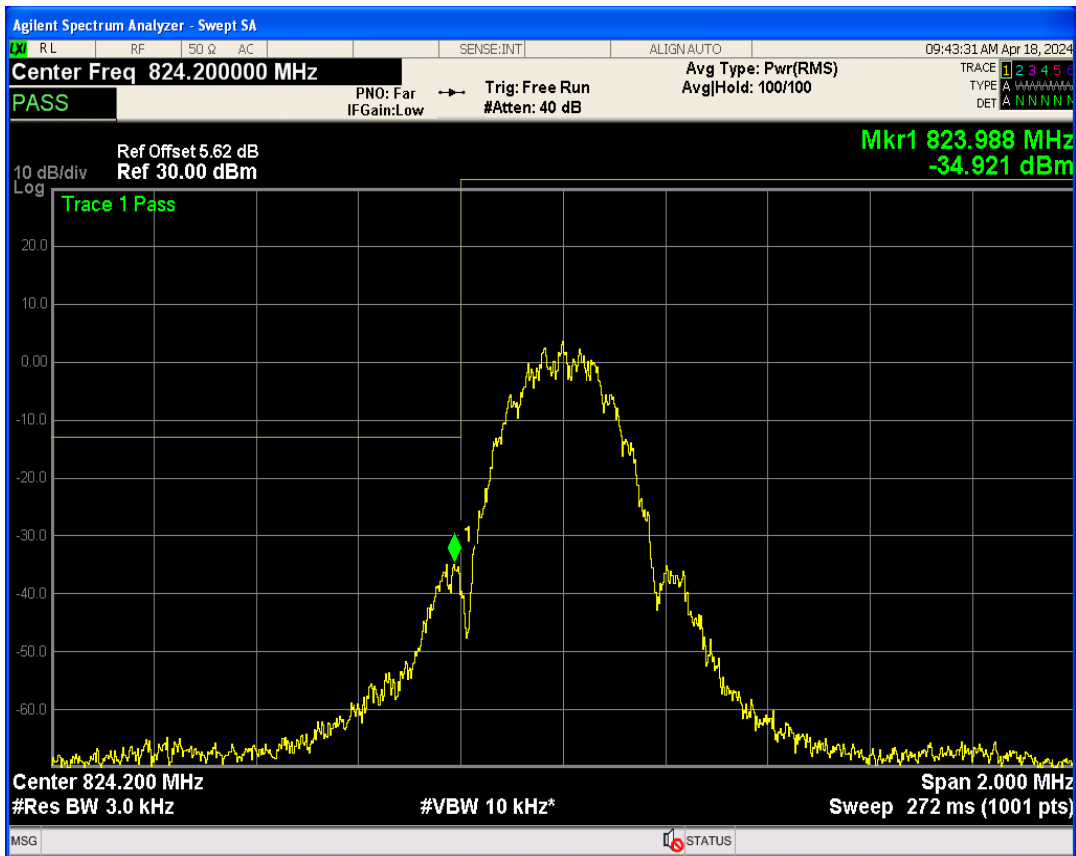


EGPRS850 Channel=251

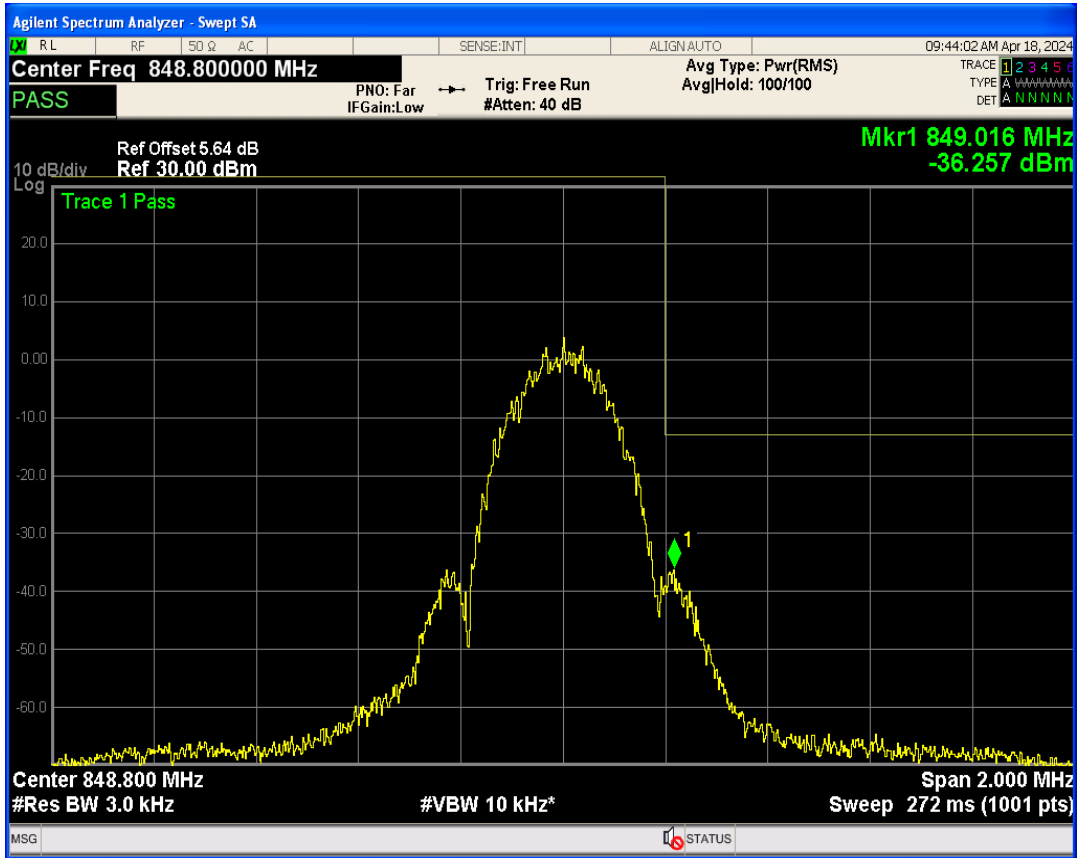


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	26216.11	-19.53	-13	PASS
EGPRS1900	661	1880	26101.63	-18.97	-13	PASS
EGPRS1900	810	1909.8	25981.85	-19.76	-13	PASS
EGPRS850	128	824.2	26010.97	-20.57	-13	PASS
EGPRS850	189	836.4	25425.98	-20.59	-13	PASS
EGPRS850	251	848.8	25479.58	-20.45	-13	PASS


EGPRS1900 Channel=661

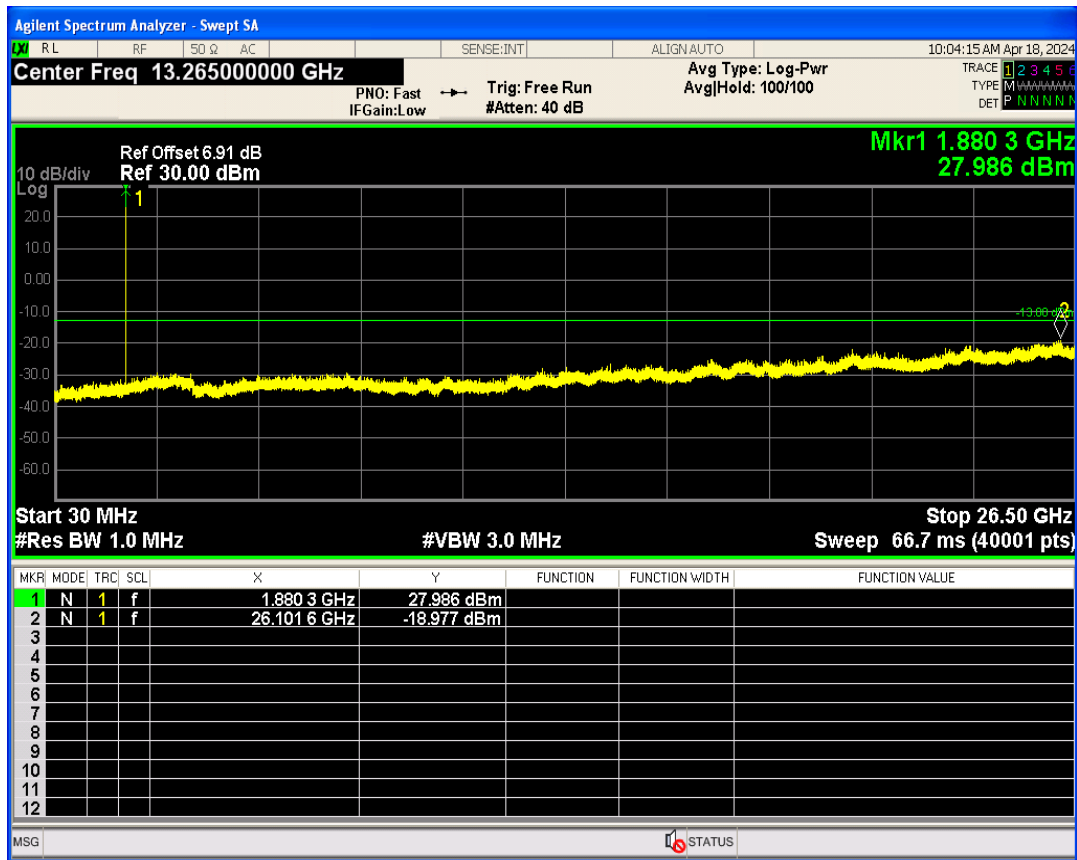


EGPRS1900 Channel=512

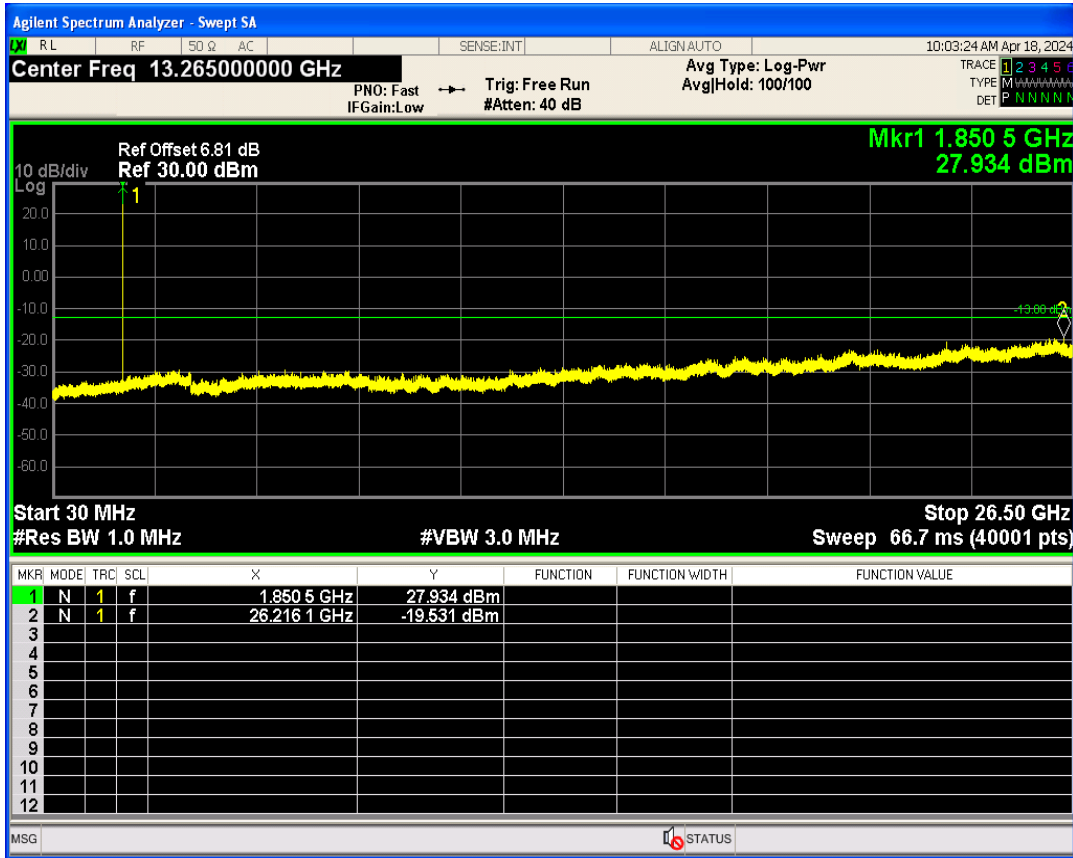


EGPRS1900 Channel=810

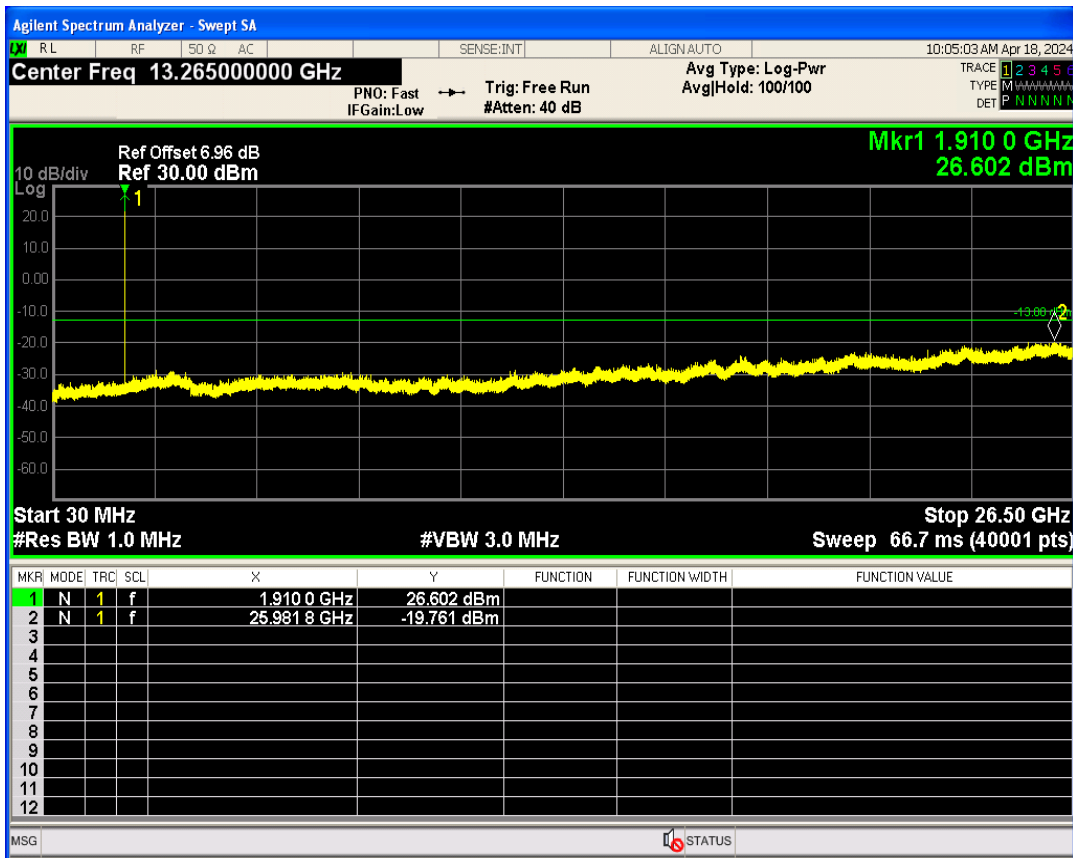


EGPRS850 Channel=128

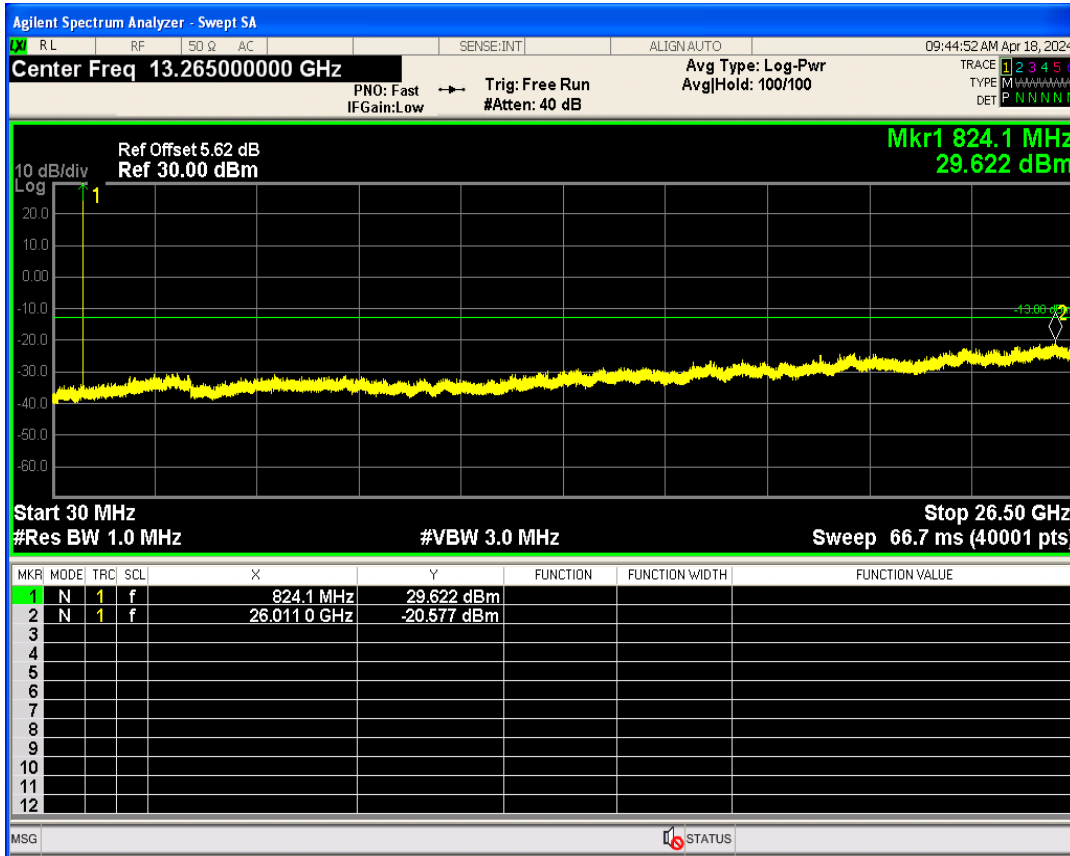

EGPRS850 Channel=189

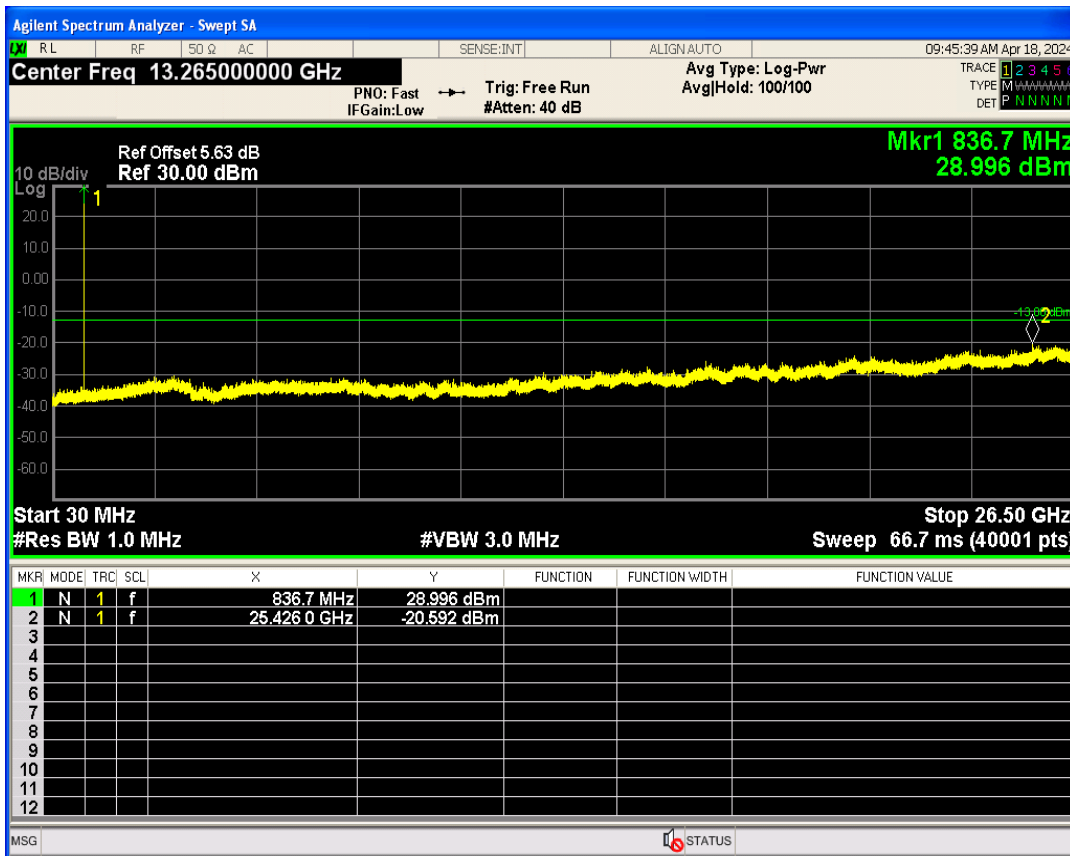


EGPRS850 Channel=251

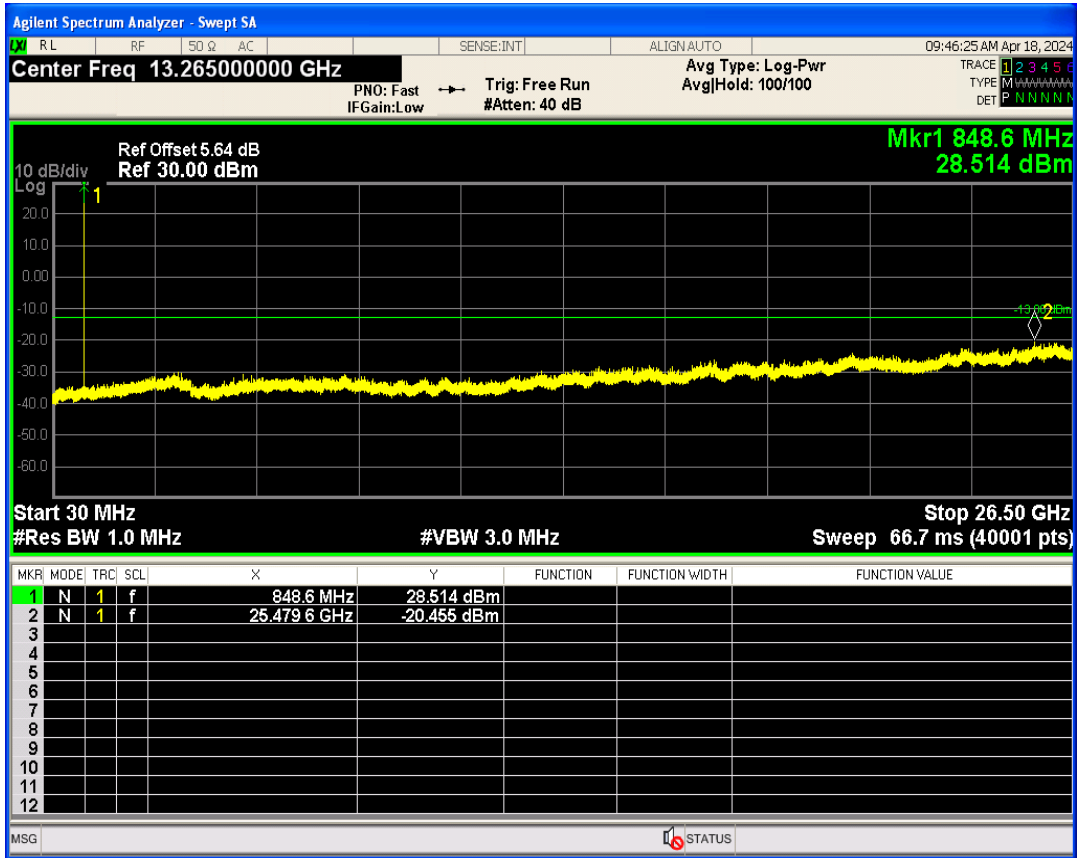


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.82	13	PASS
GPRS1900	661	1880	2.81	13	PASS
GPRS1900	810	1909.8	2.82	13	PASS
GPRS850	128	824.2	2.78	13	PASS
GPRS850	189	836.4	2.71	13	PASS
GPRS850	251	848.8	2.81	13	PASS


GPRS1900 Channel=512

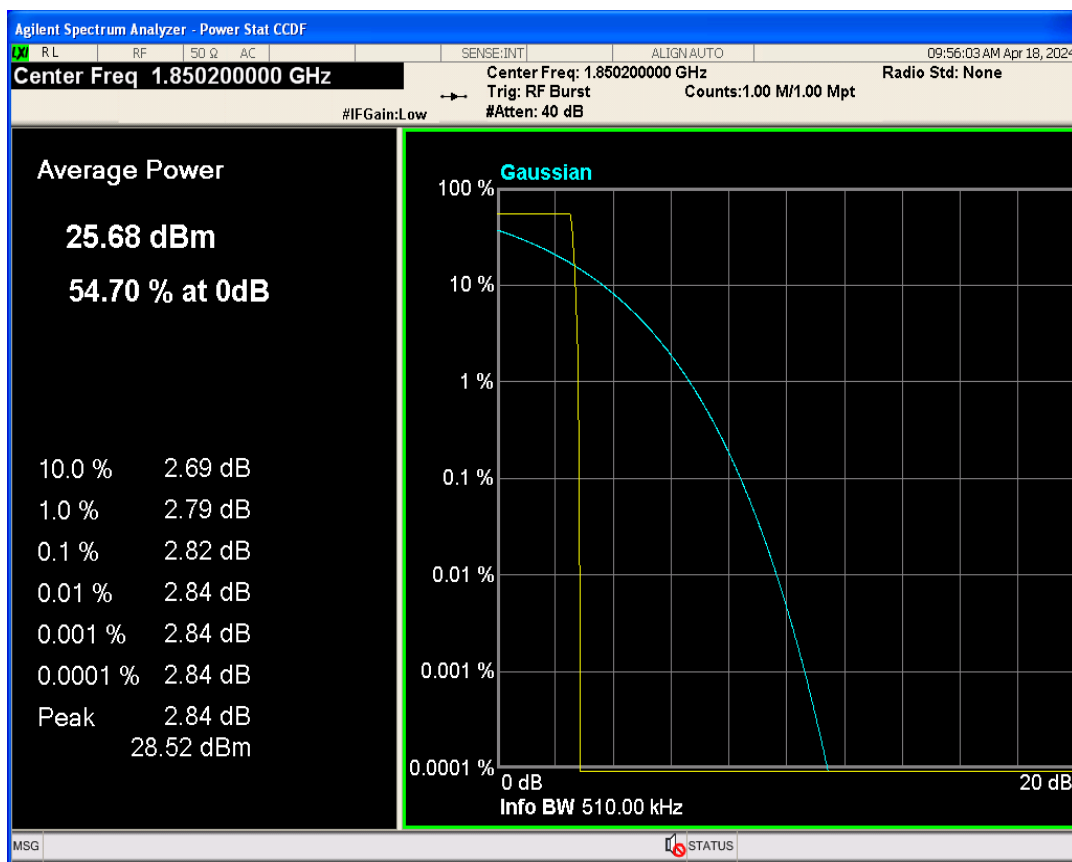


GPRS1900 Channel=661

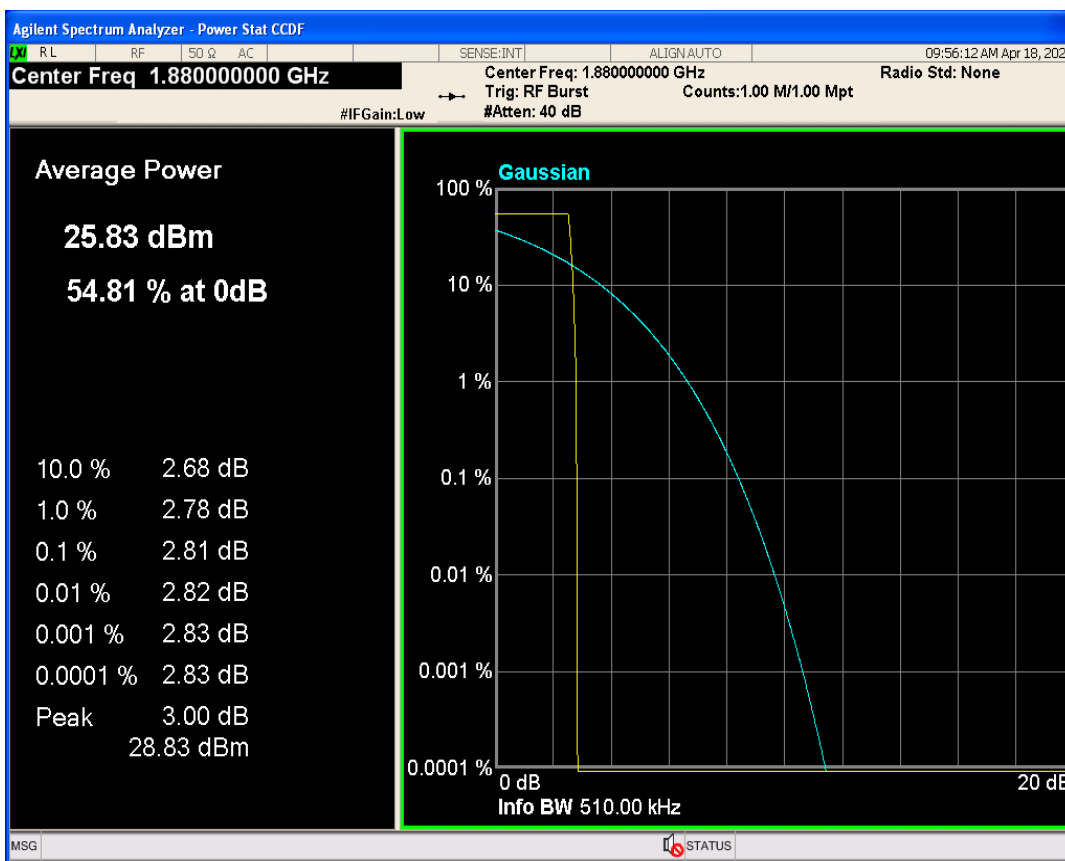


GPRS1900 Channel=810

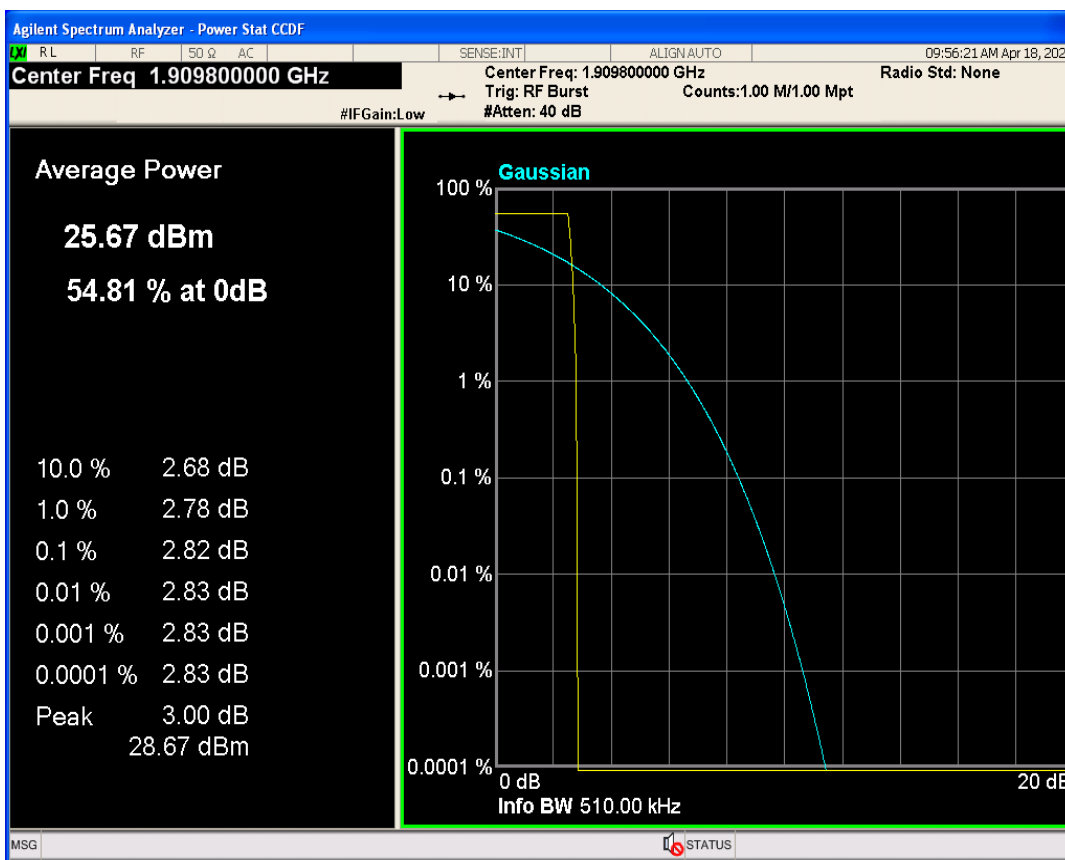


GPRS850 Channel=128

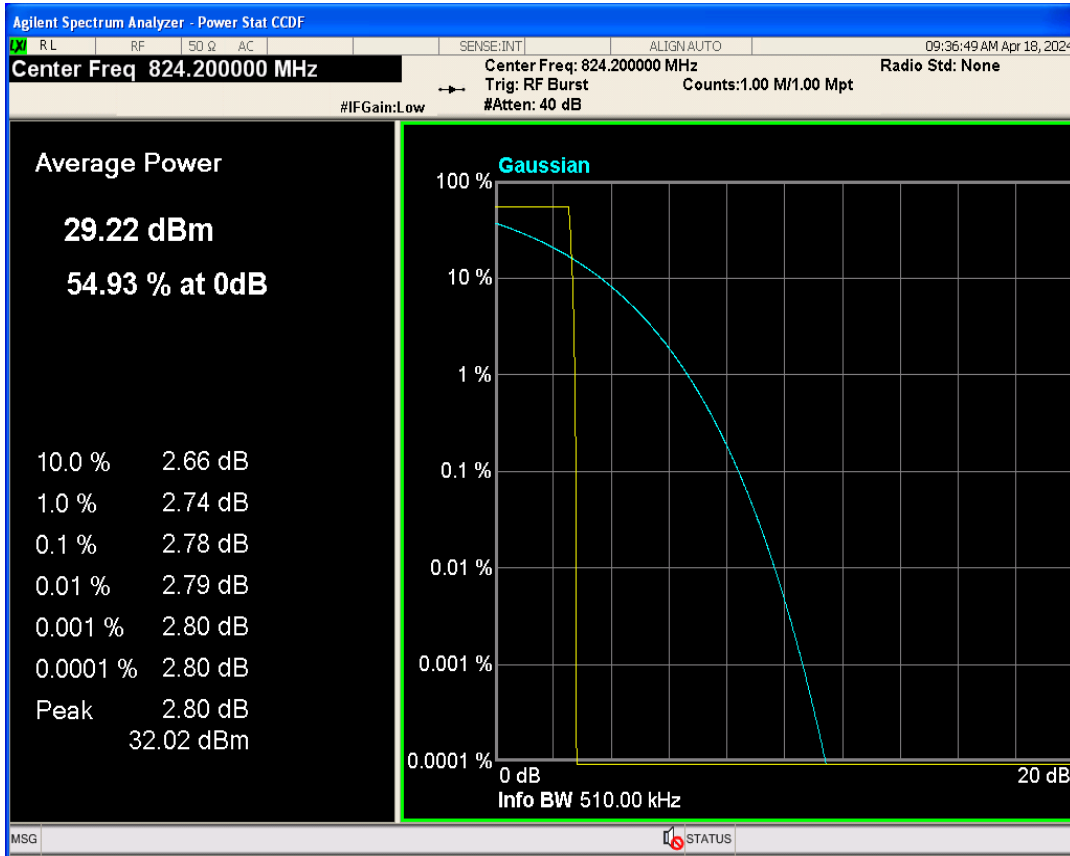

GPRS850 Channel=189

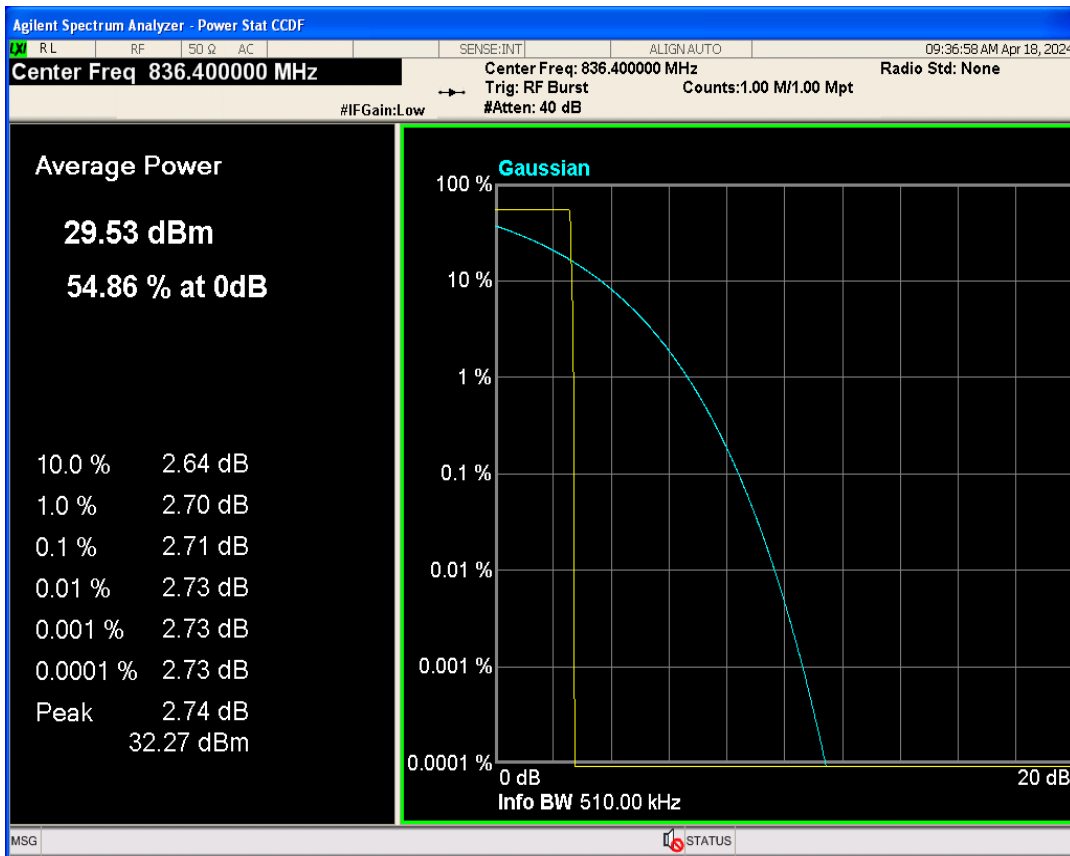


GPRS850 Channel=251

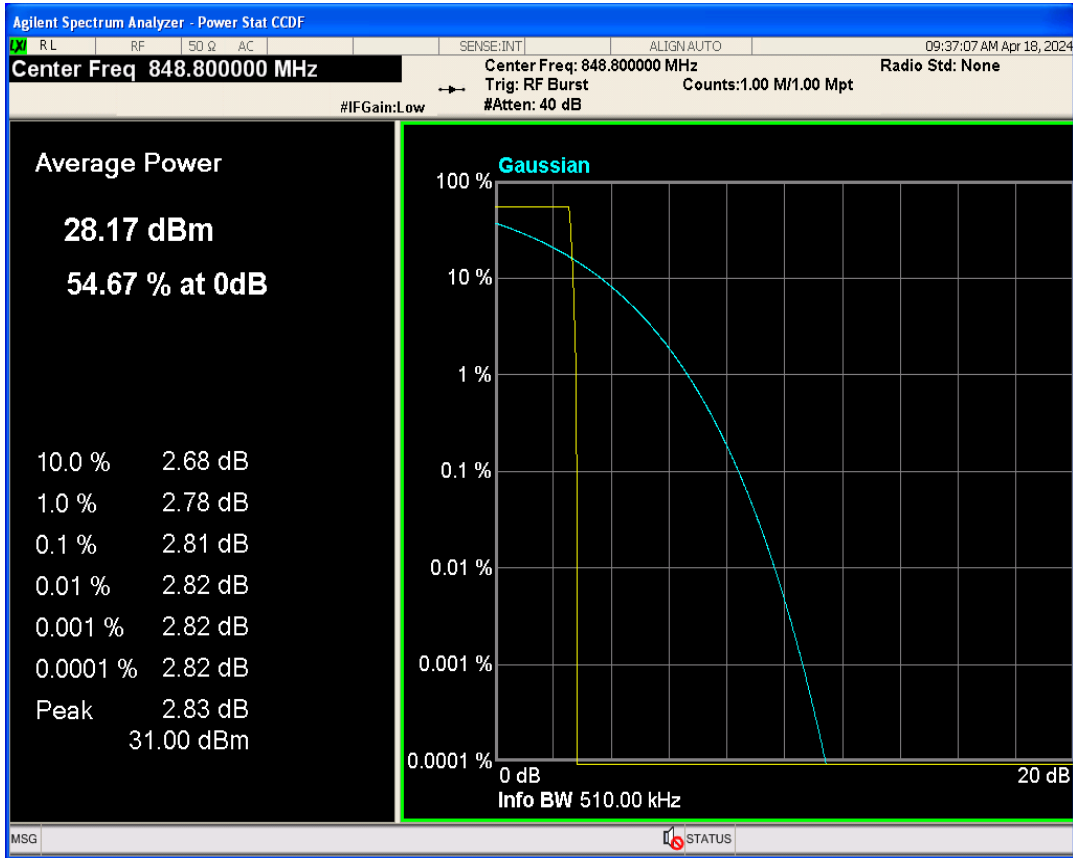


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	248.909	321.560	PASS
GPRS1900	661	1880	242.534	311.388	PASS
GPRS1900	810	1909.8	251.198	317.765	PASS
GPRS850	128	824.2	250.286	317.180	PASS
GPRS850	189	836.4	243.788	318.886	PASS
GPRS850	251	848.8	252.189	319.165	PASS


GPRS1900 Channel=512

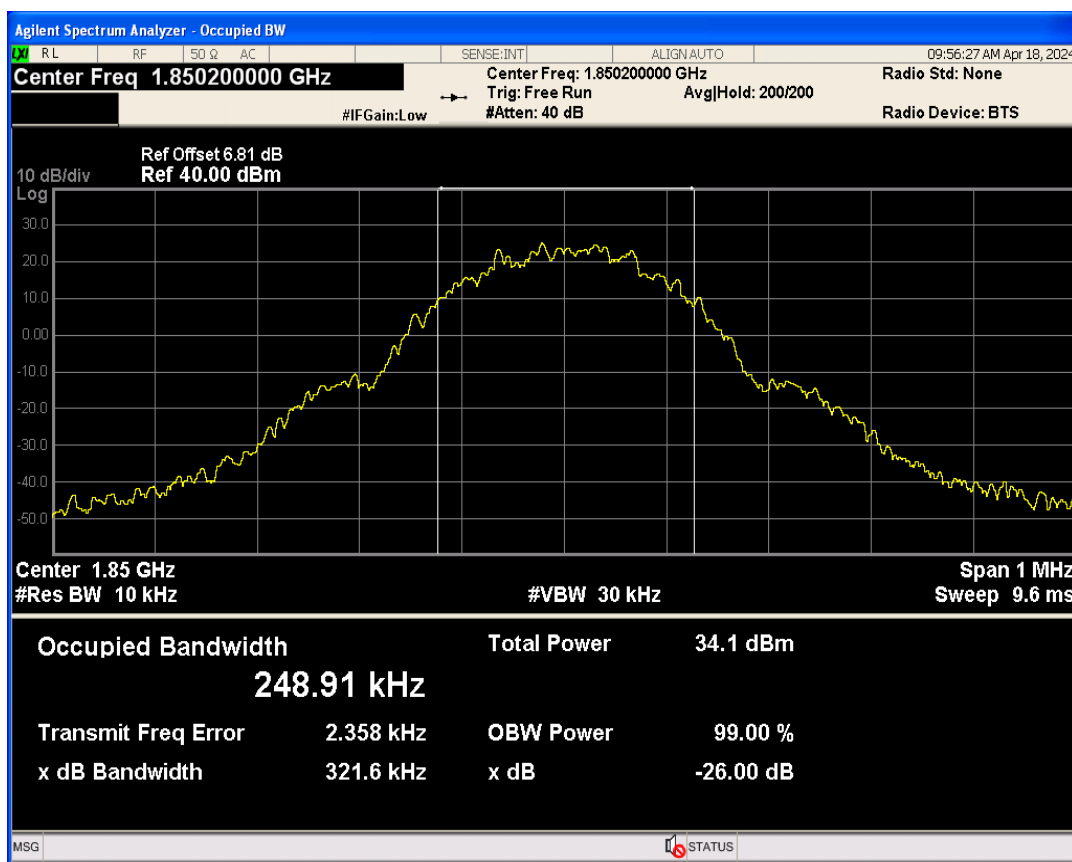


GPRS1900 Channel=661

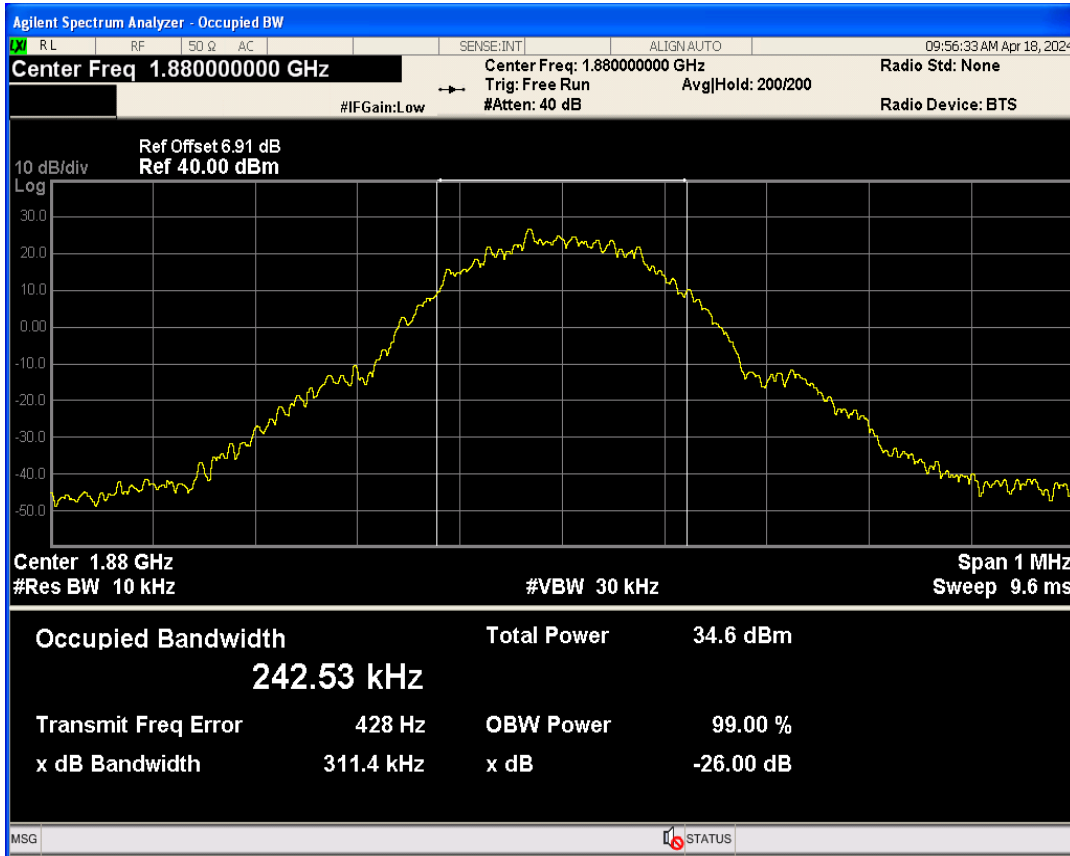


GPRS1900 Channel=810

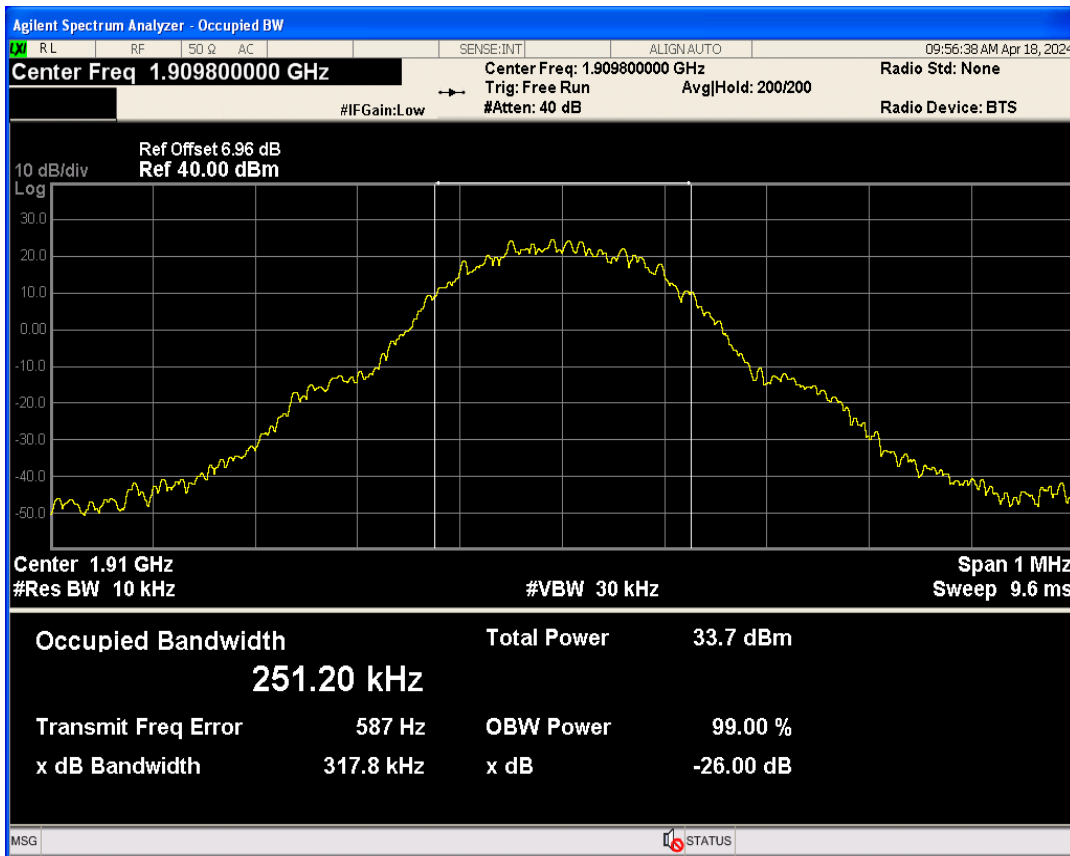


GPRS850 Channel=189

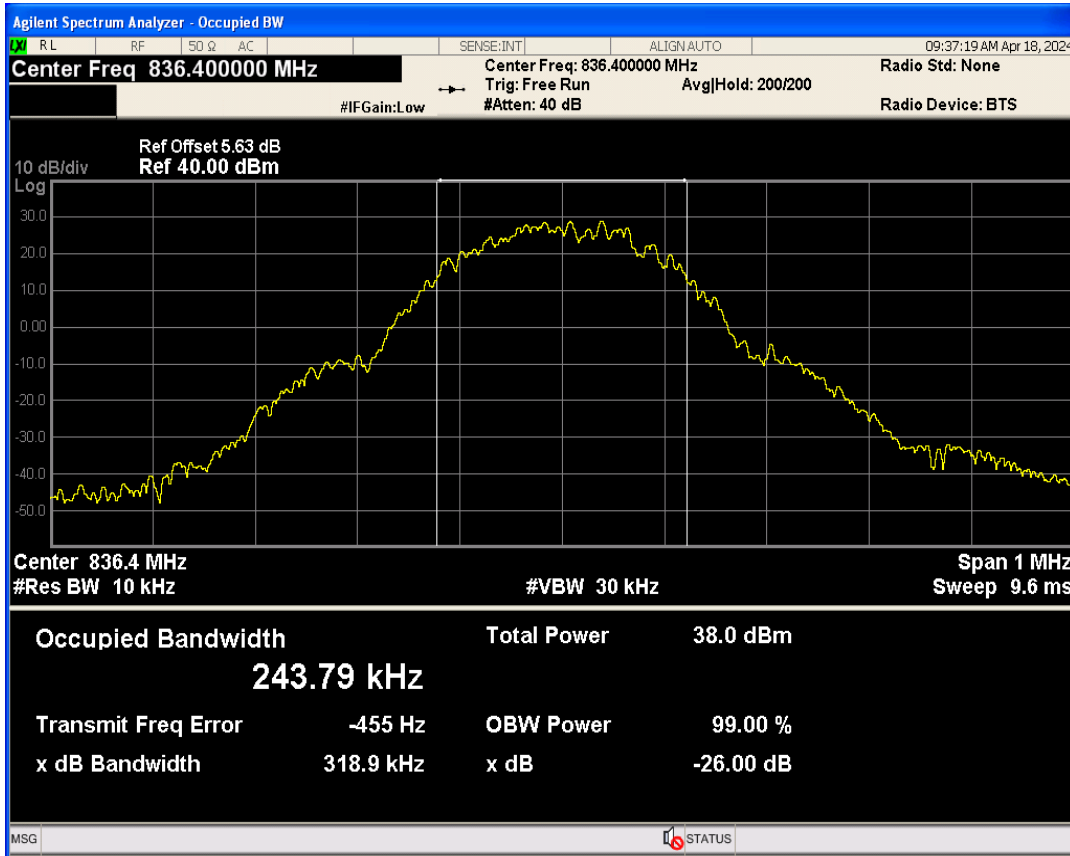

GPRS850 Channel=128

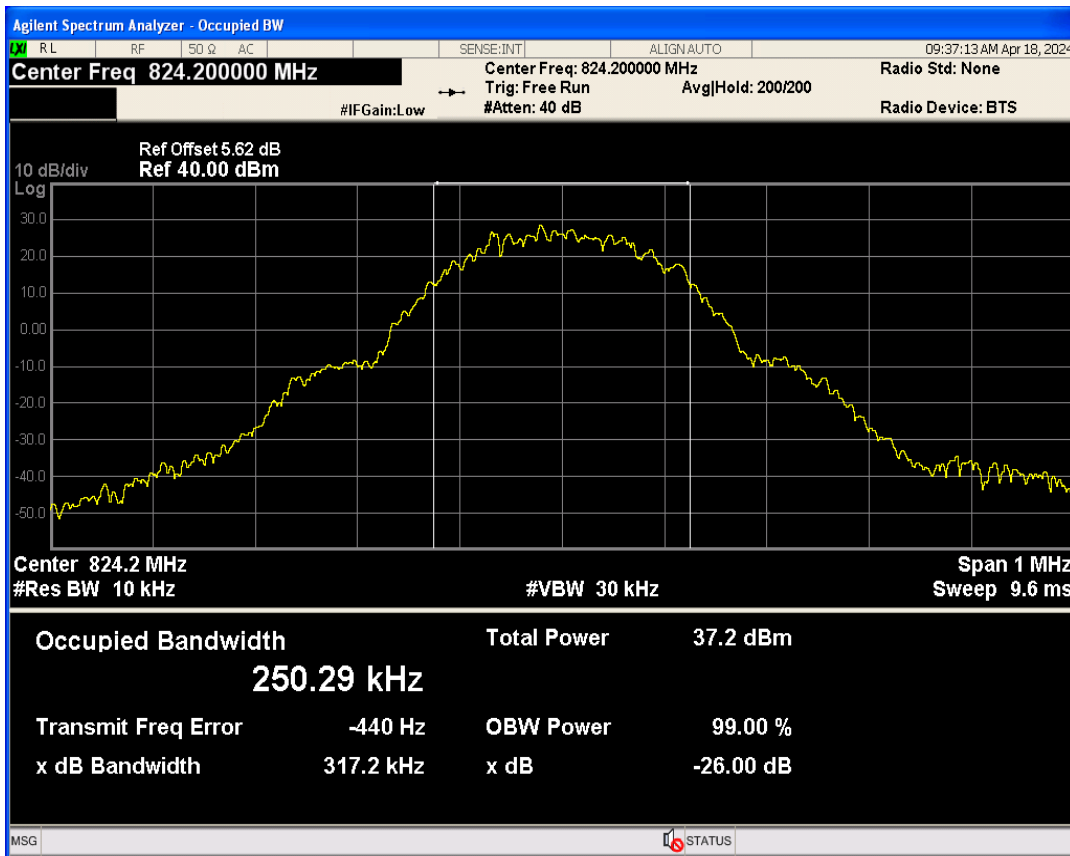


GPRS850 Channel=251

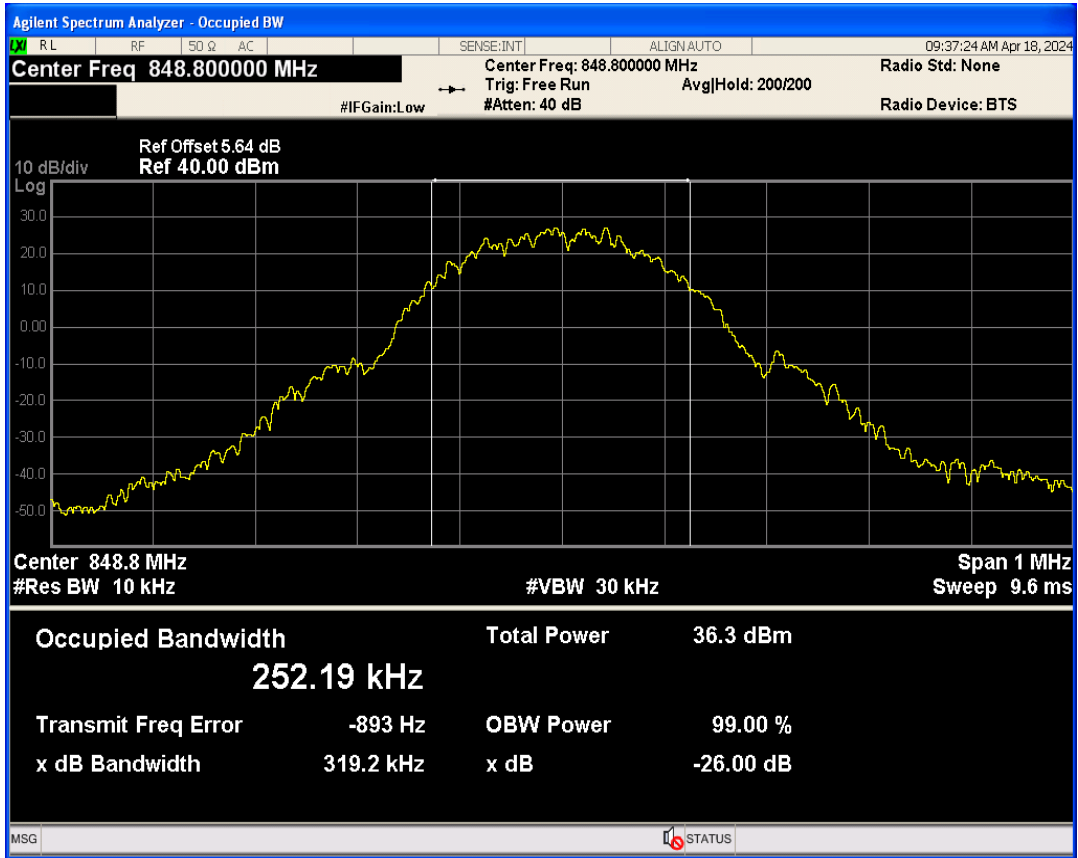


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1849.99	-31.20	-13	PASS
GPRS1900	810	1909.8	1910.02	-28.76	-13	PASS
GPRS850	128	824.2	823.98	-28.43	-13	PASS
GPRS850	251	848.8	849.00	-28.40	-13	PASS


GPRS1900 Channel=512

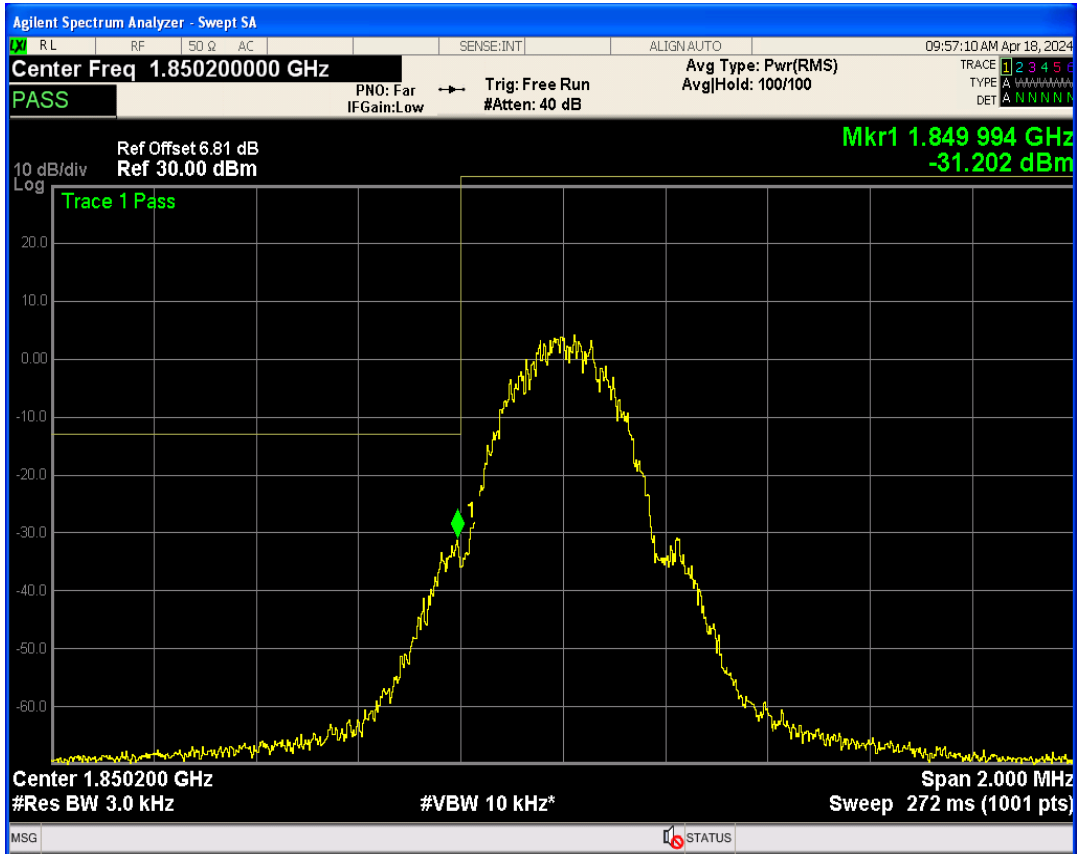


GPRS1900 Channel=810

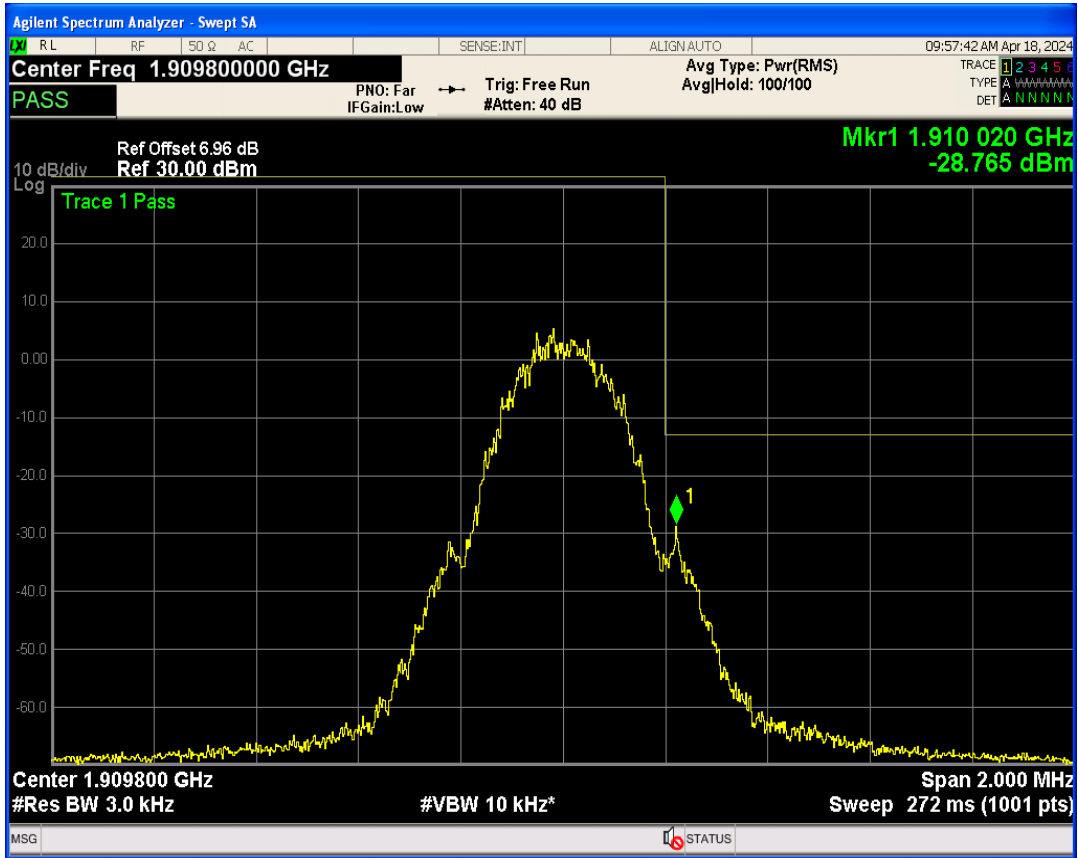

GPRS850 Channel=251

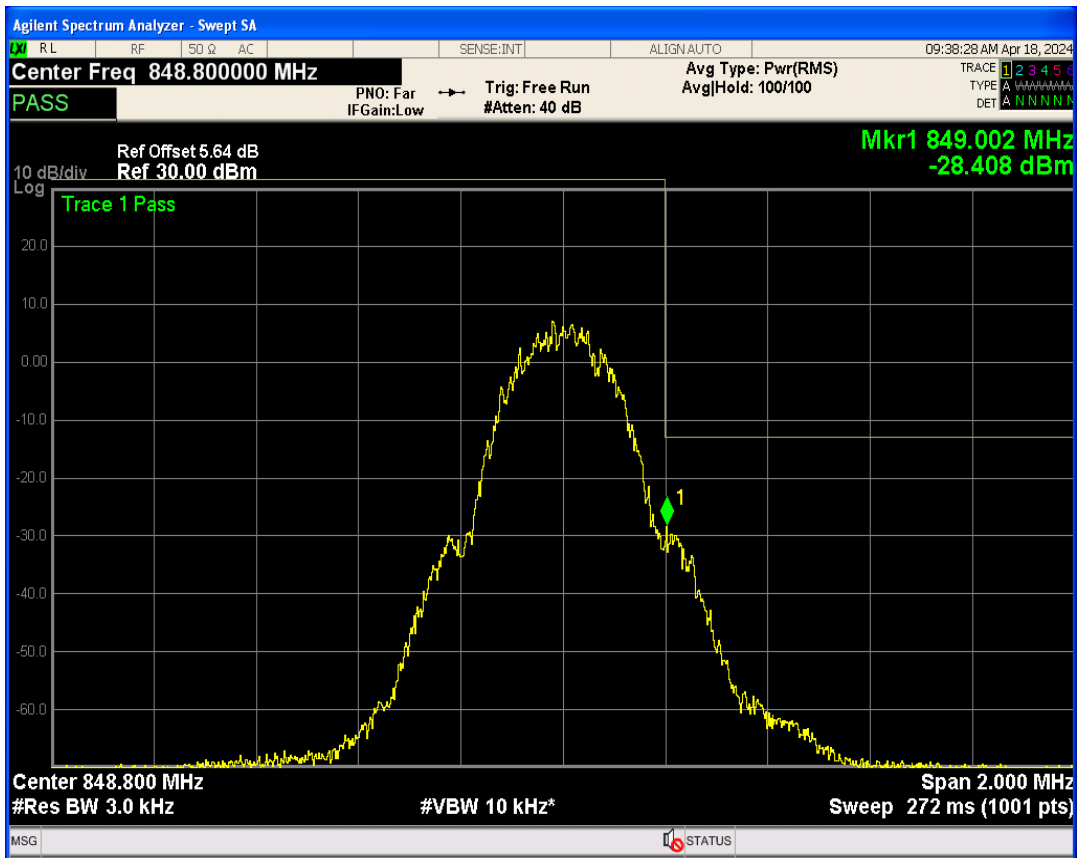


GPRS850 Channel=128

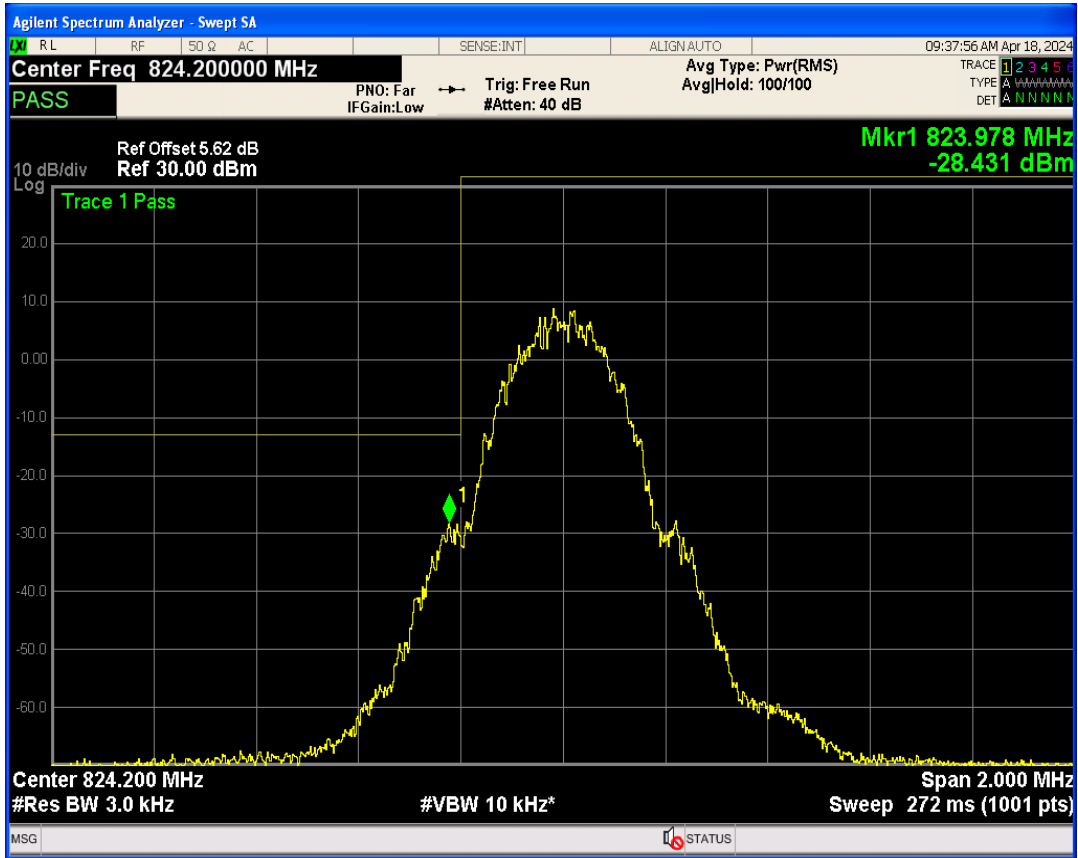


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	25983.17	-18.63	-13	PASS
GPRS1900	661	1880	25991.78	-18.97	-13	PASS
GPRS1900	810	1909.8	25428.63	-19.42	-13	PASS
GPRS850	128	824.2	25825.02	-21.10	-13	PASS
GPRS850	189	836.4	26004.35	-20.72	-13	PASS
GPRS850	251	848.8	26201.55	-20.60	-13	PASS


GPRS1900 Channel=512

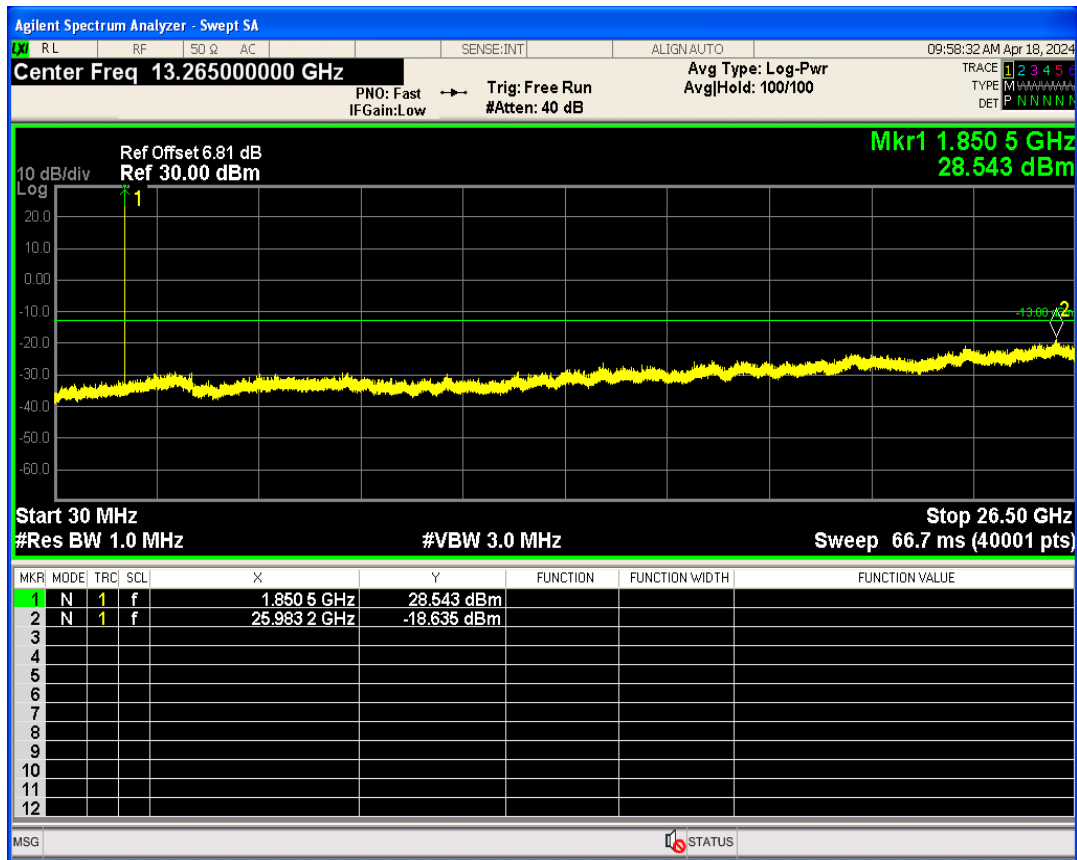


GPRS1900 Channel=810

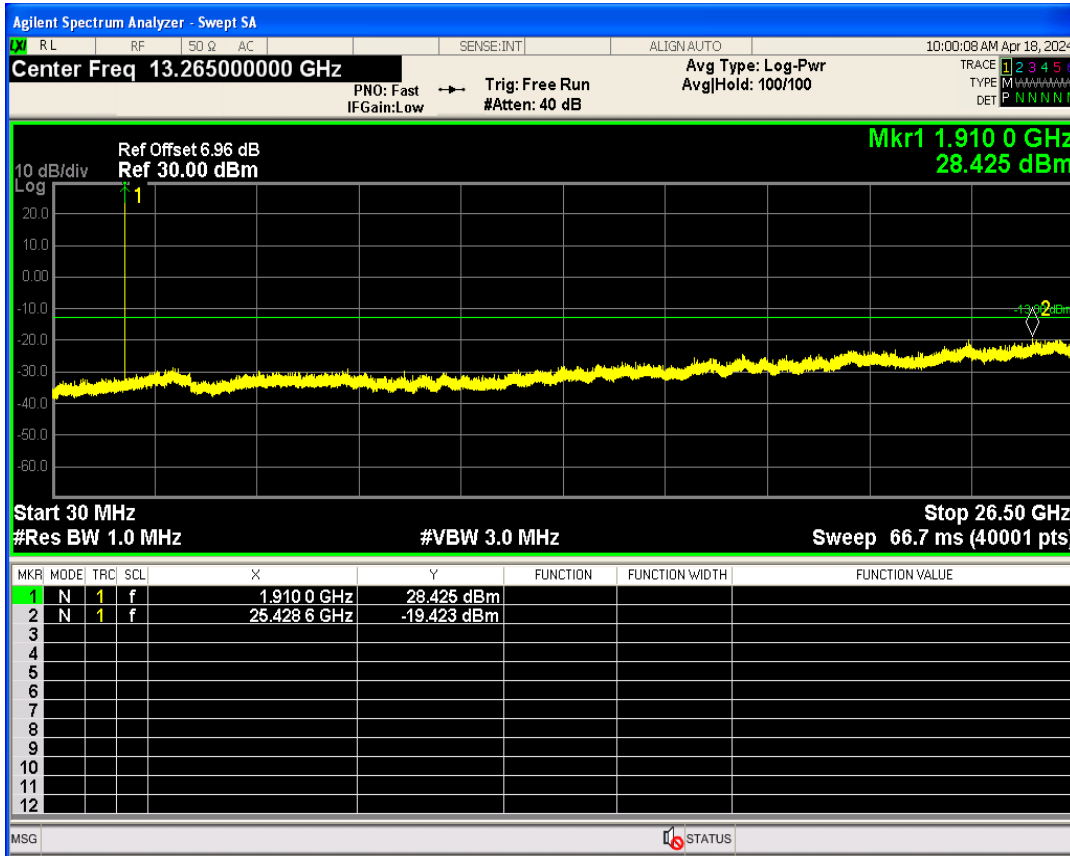


GPRS1900 Channel=661

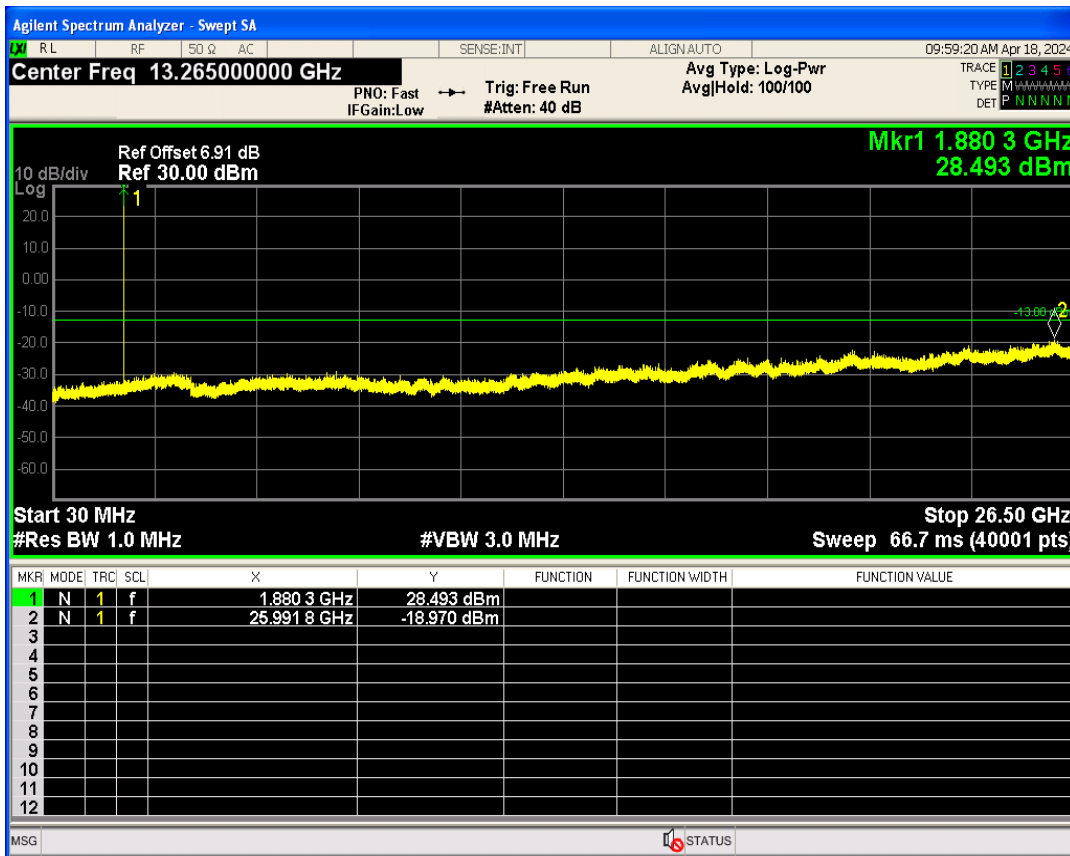


GPRS850 Channel=128

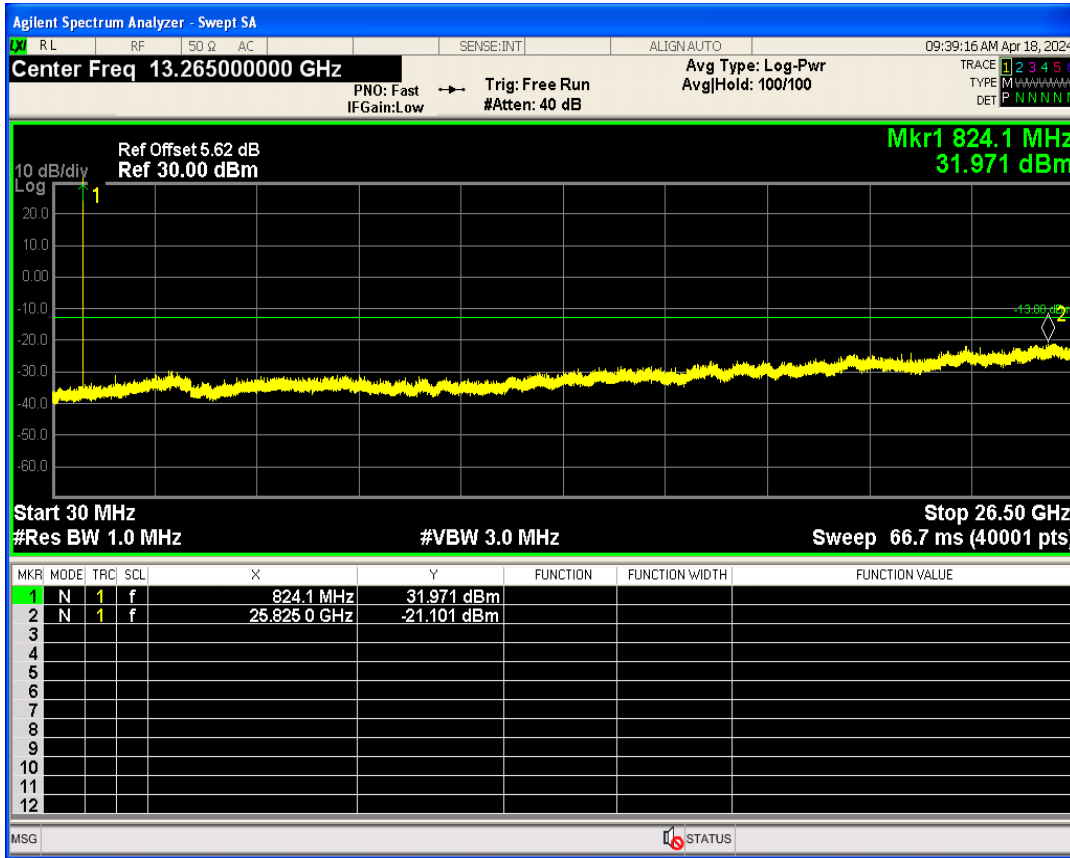

GPRS850 Channel=189

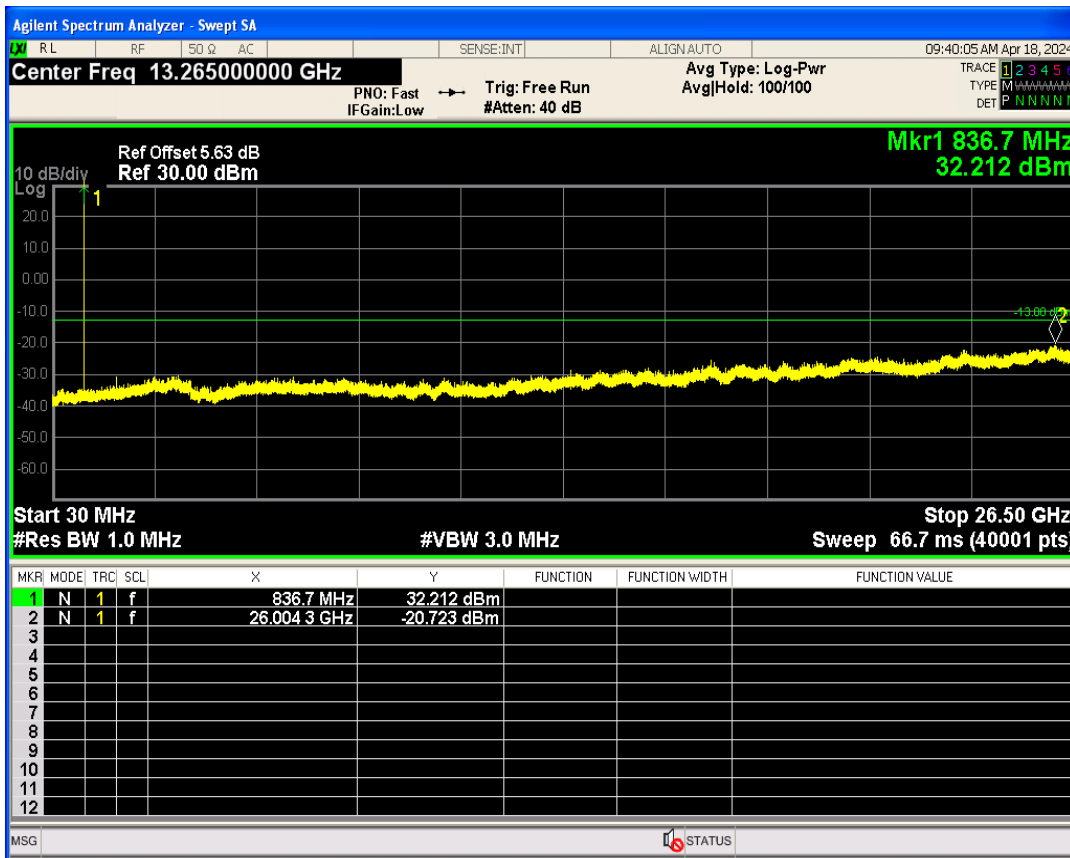


GPRS850 Channel=251

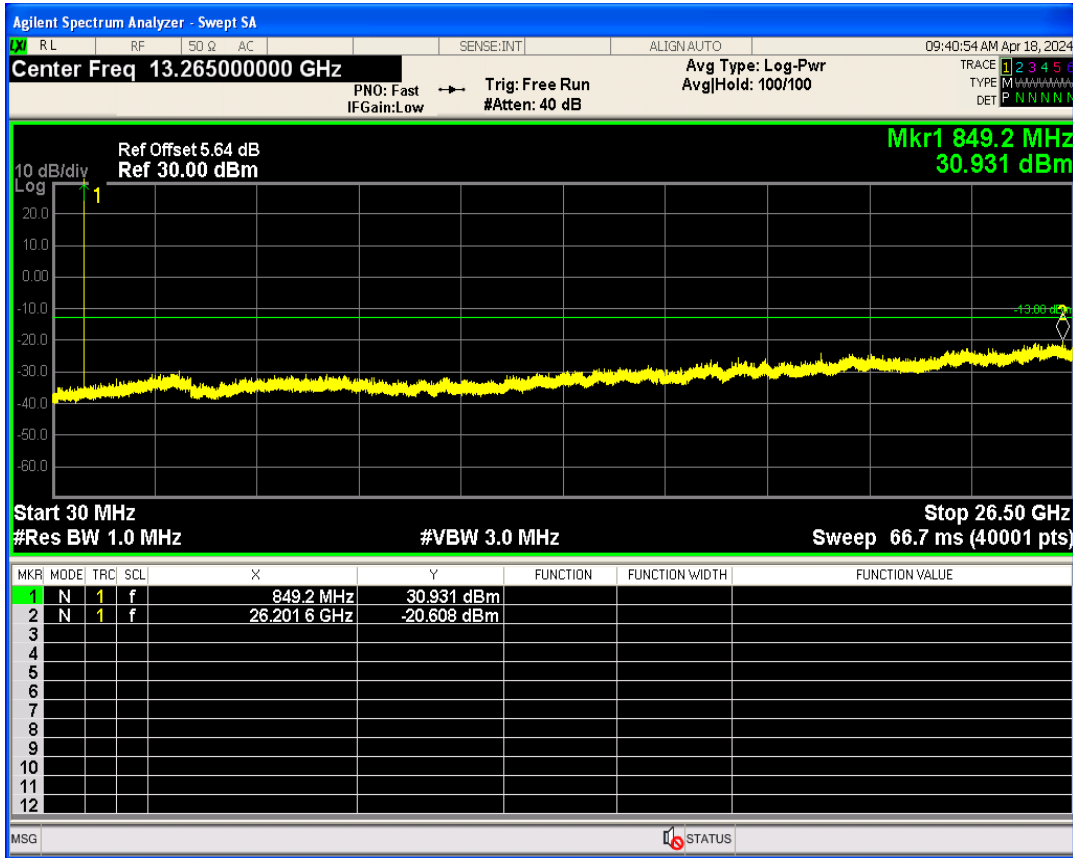


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GSM1900	512	1850.2	2.77	13	PASS
GSM1900	661	1880	2.77	13	PASS
GSM1900	810	1909.8	2.78	13	PASS
GSM850	128	824.2	2.73	13	PASS
GSM850	189	836.4	2.67	13	PASS
GSM850	251	848.8	2.75	13	PASS


GSM1900 Channel=512

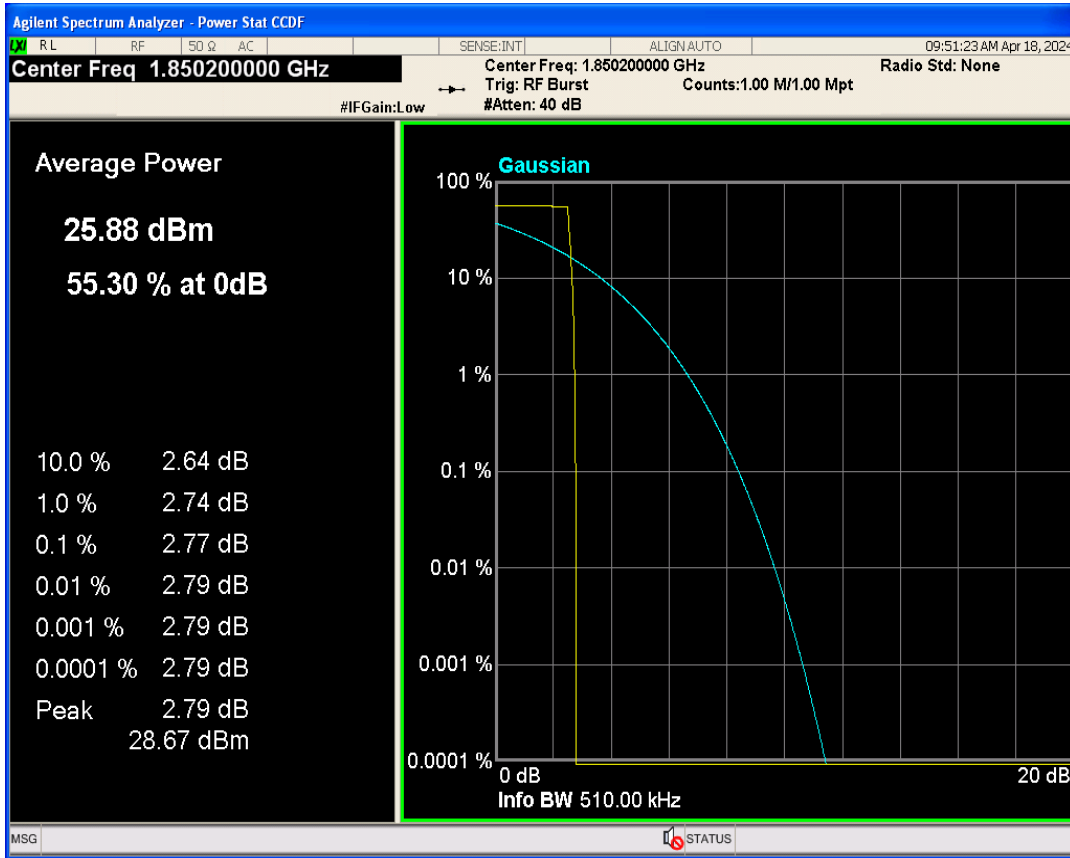


GSM1900 Channel=810

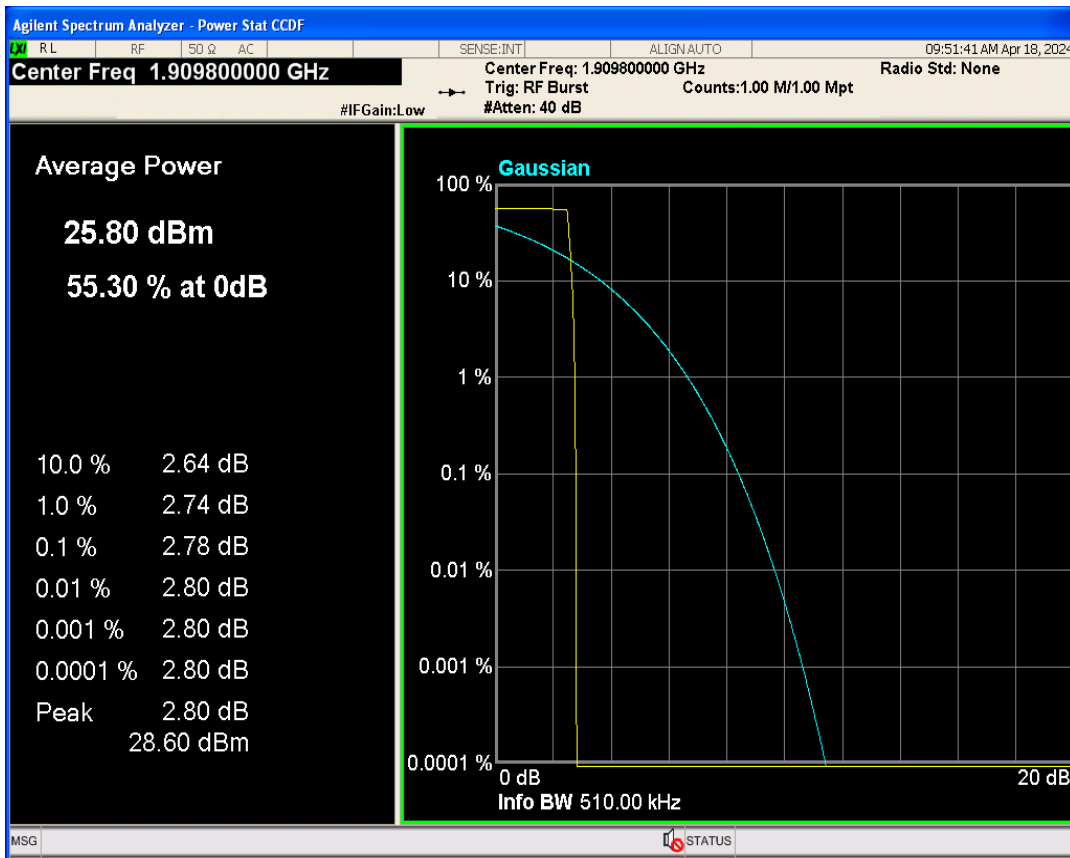


GSM1900 Channel=661

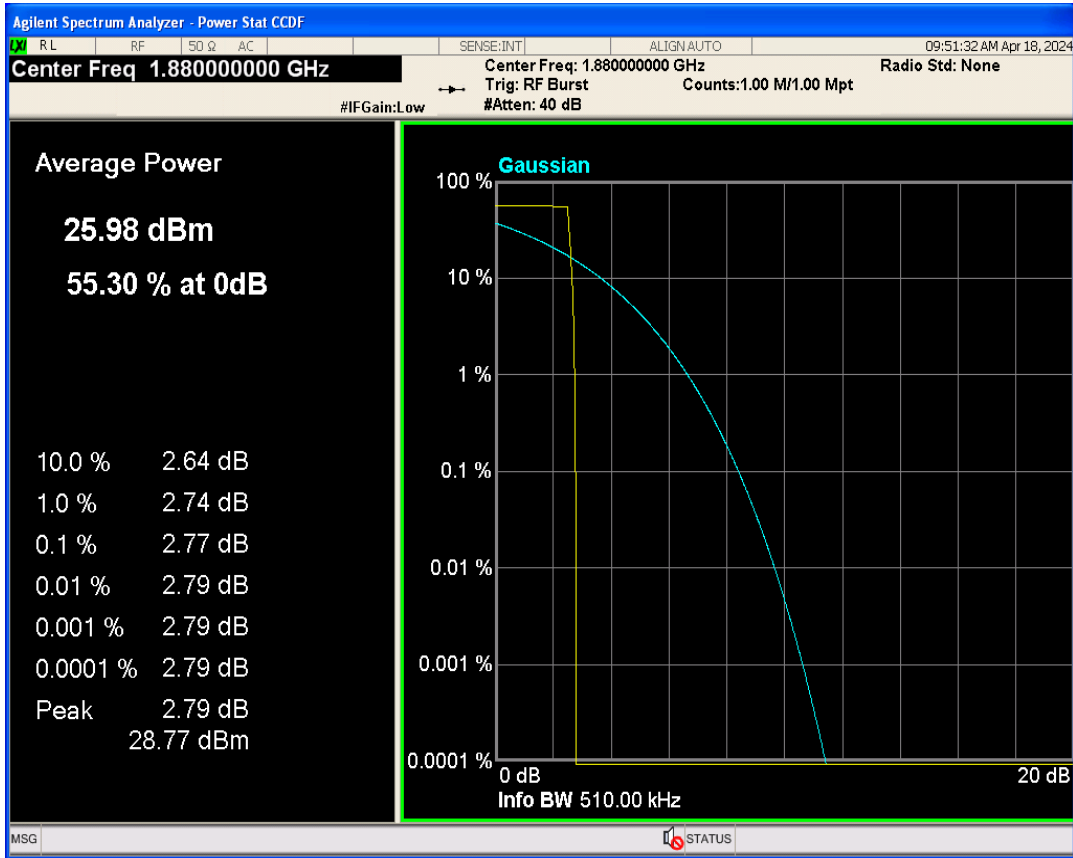


GSM850 Channel=128

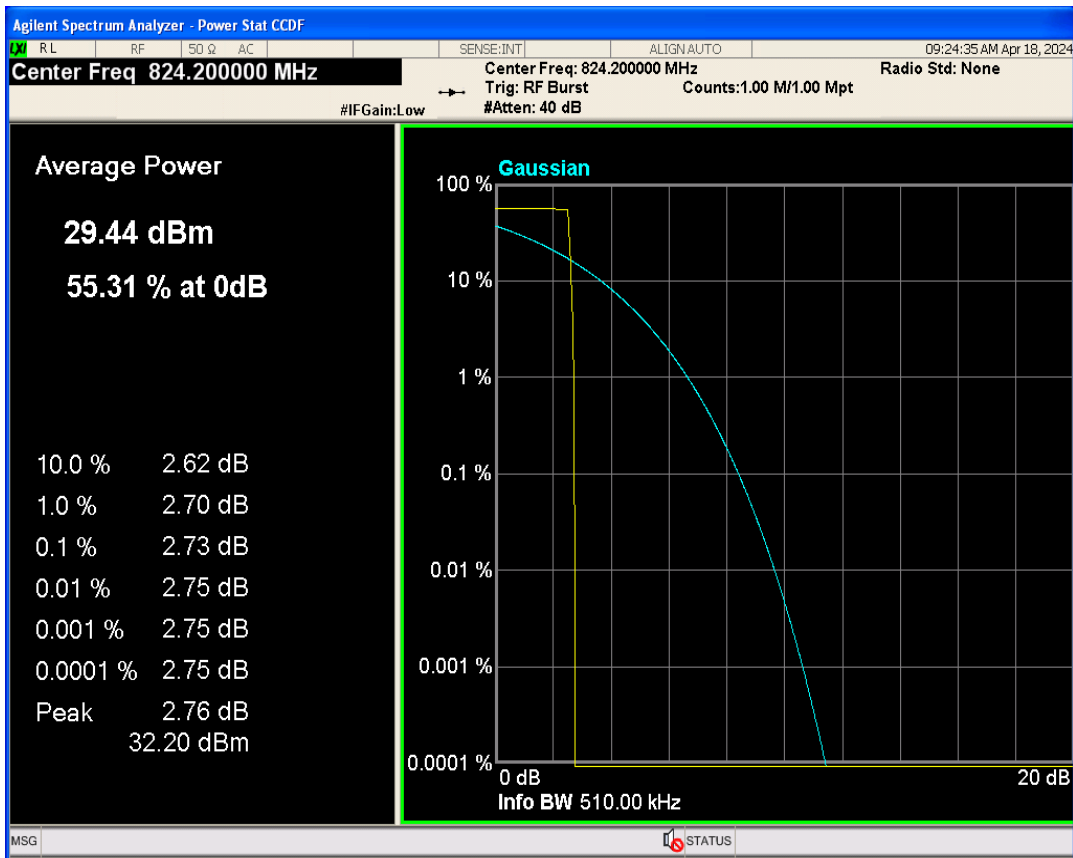

GSM850 Channel=189

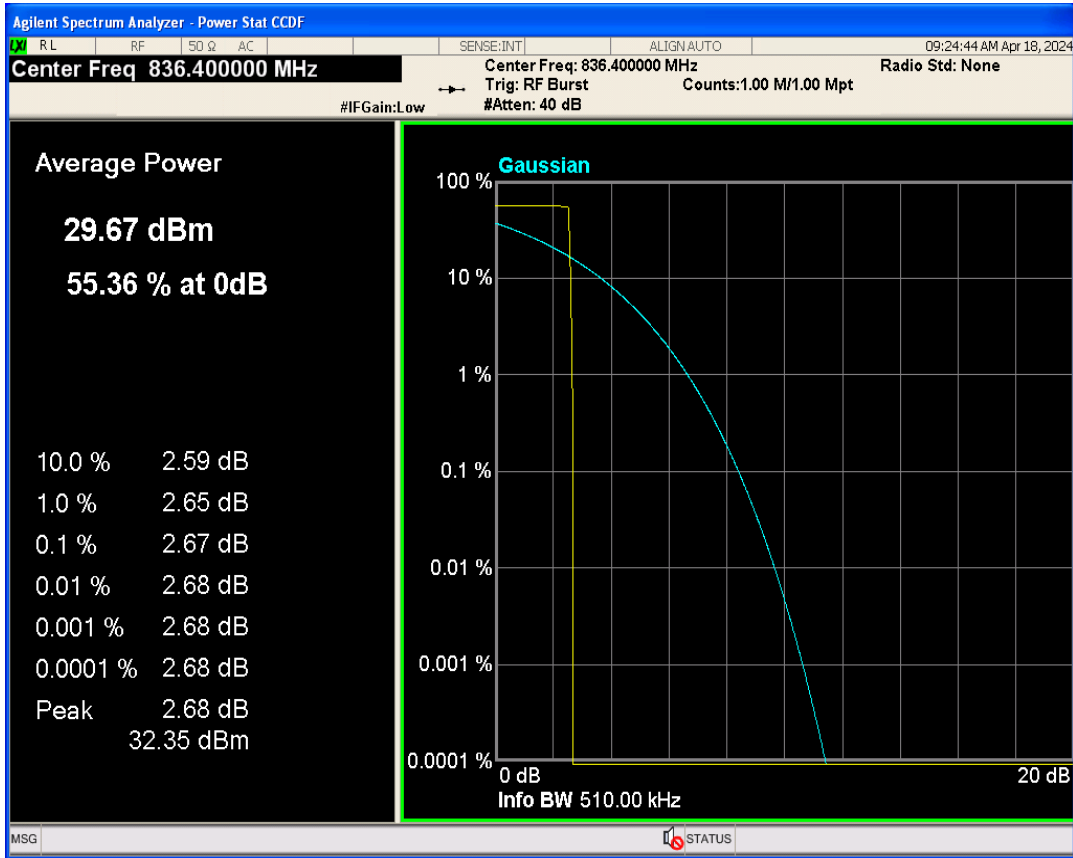


GSM850 Channel=251

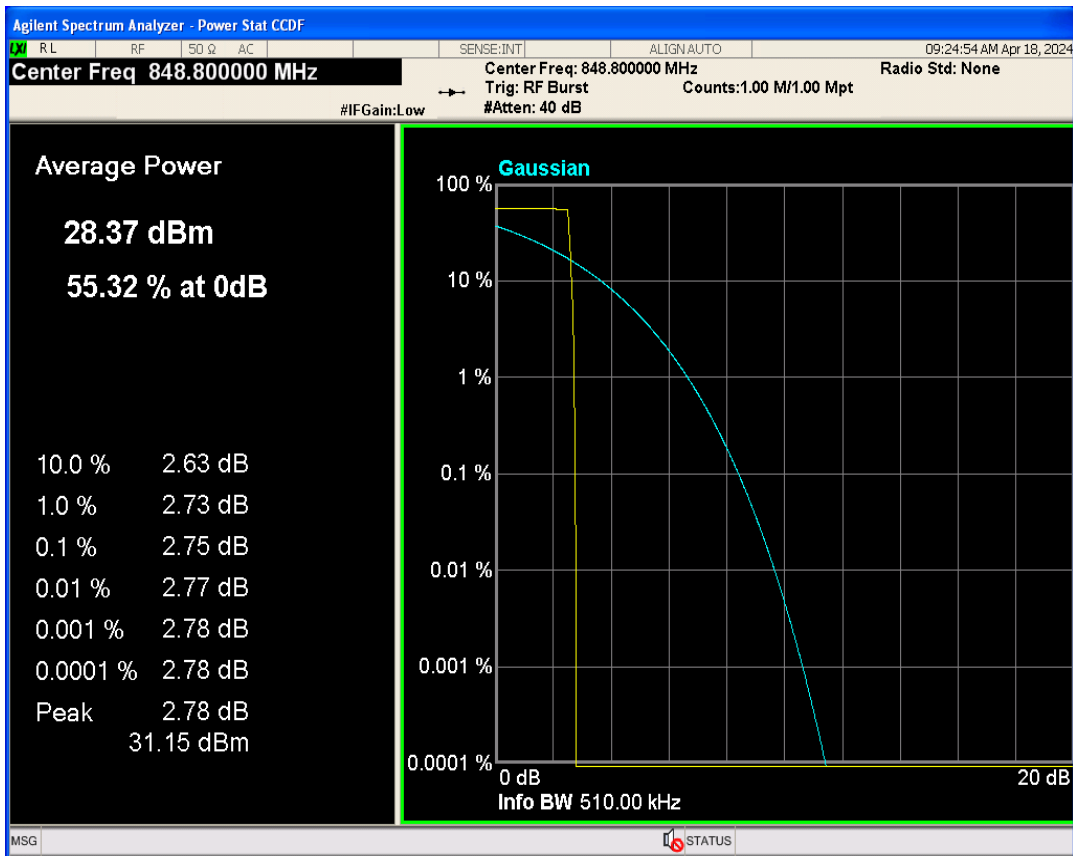


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GSM1900	512	1850.2	243.413	314.065	PASS
GSM1900	661	1880	248.562	314.313	PASS
GSM1900	810	1909.8	252.358	324.183	PASS
GSM850	128	824.2	242.466	310.676	PASS
GSM850	189	836.4	240.077	312.589	PASS
GSM850	251	848.8	246.454	318.798	PASS


GSM1900 Channel=661

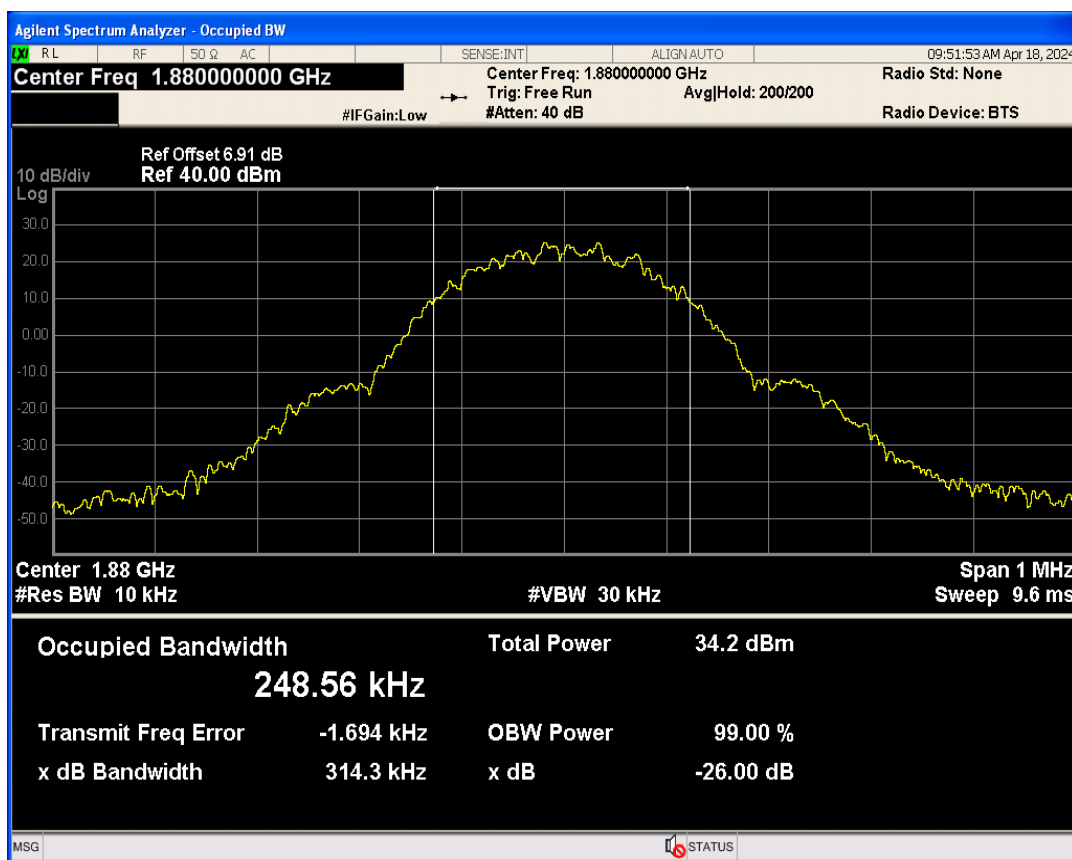


GSM1900 Channel=512

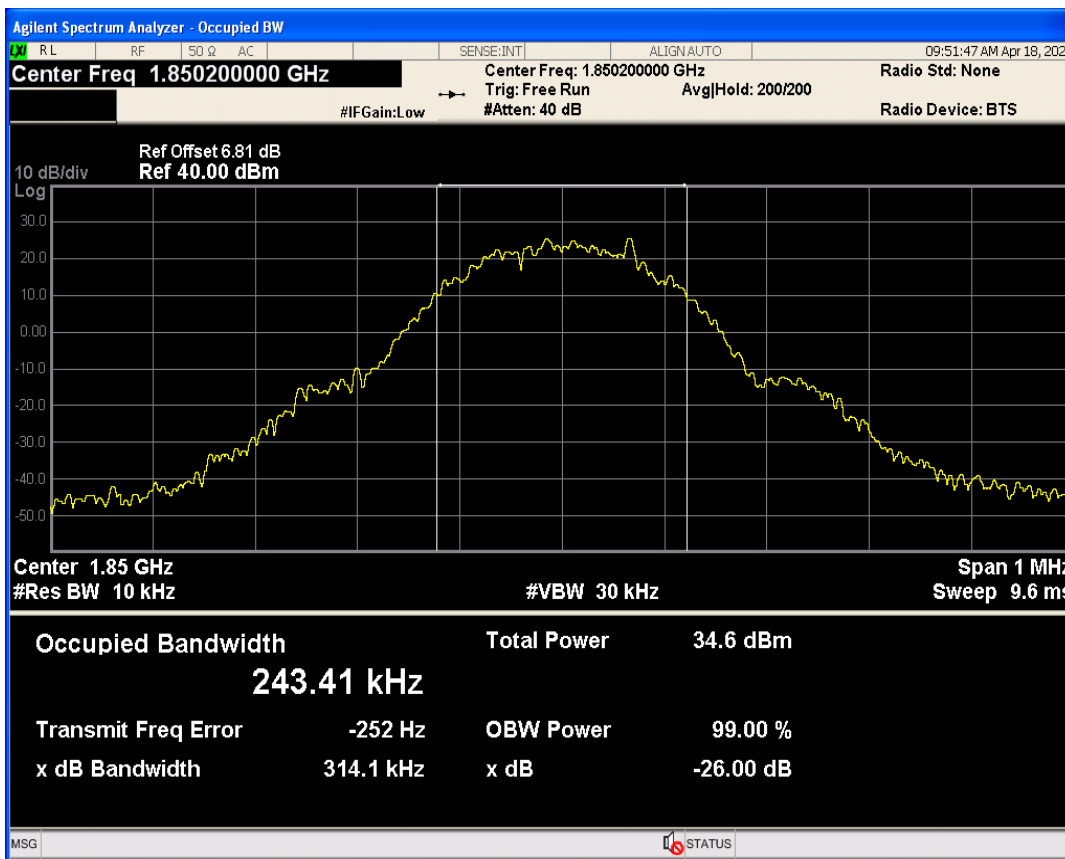


GSM1900 Channel=810

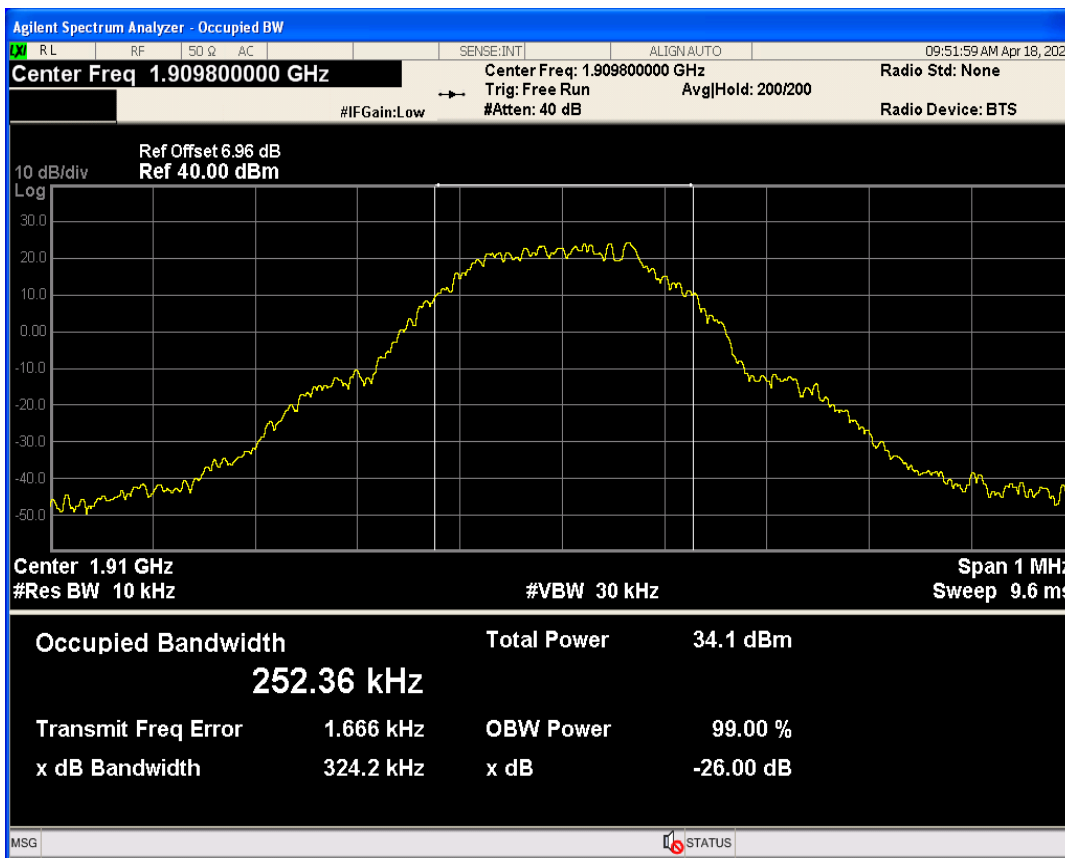


GSM850 Channel=189

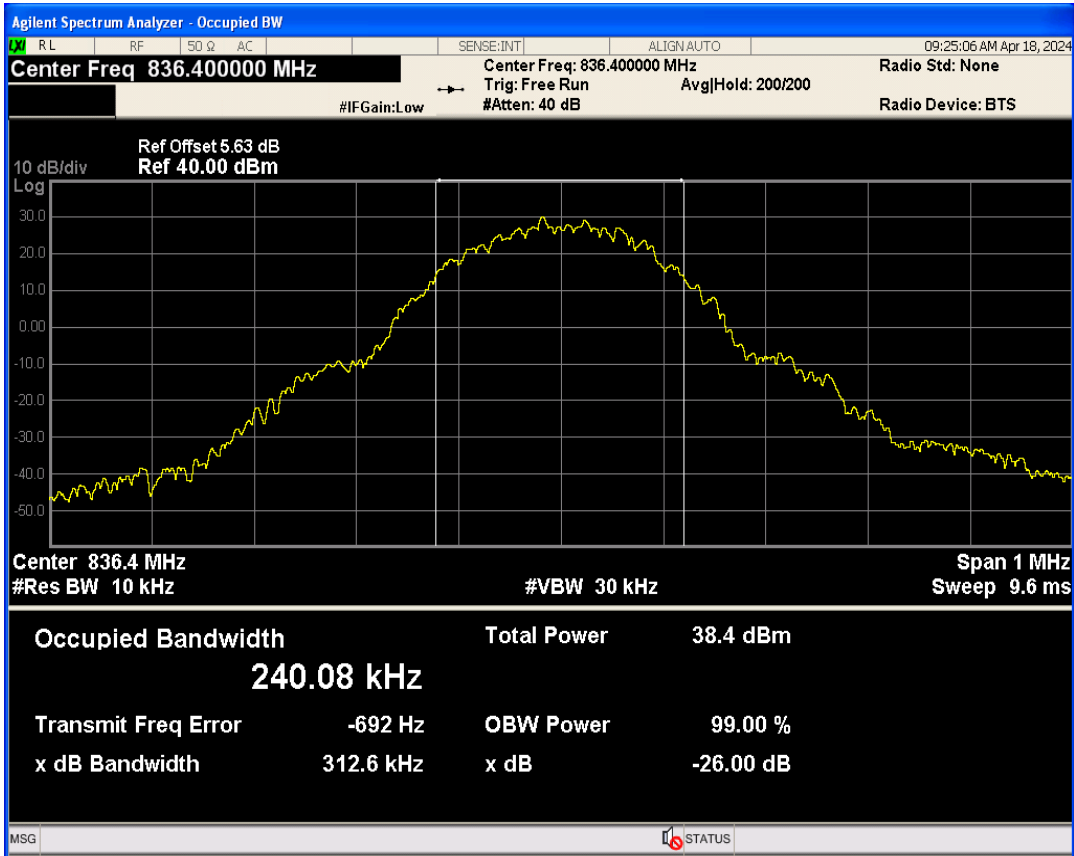

GSM850 Channel=128

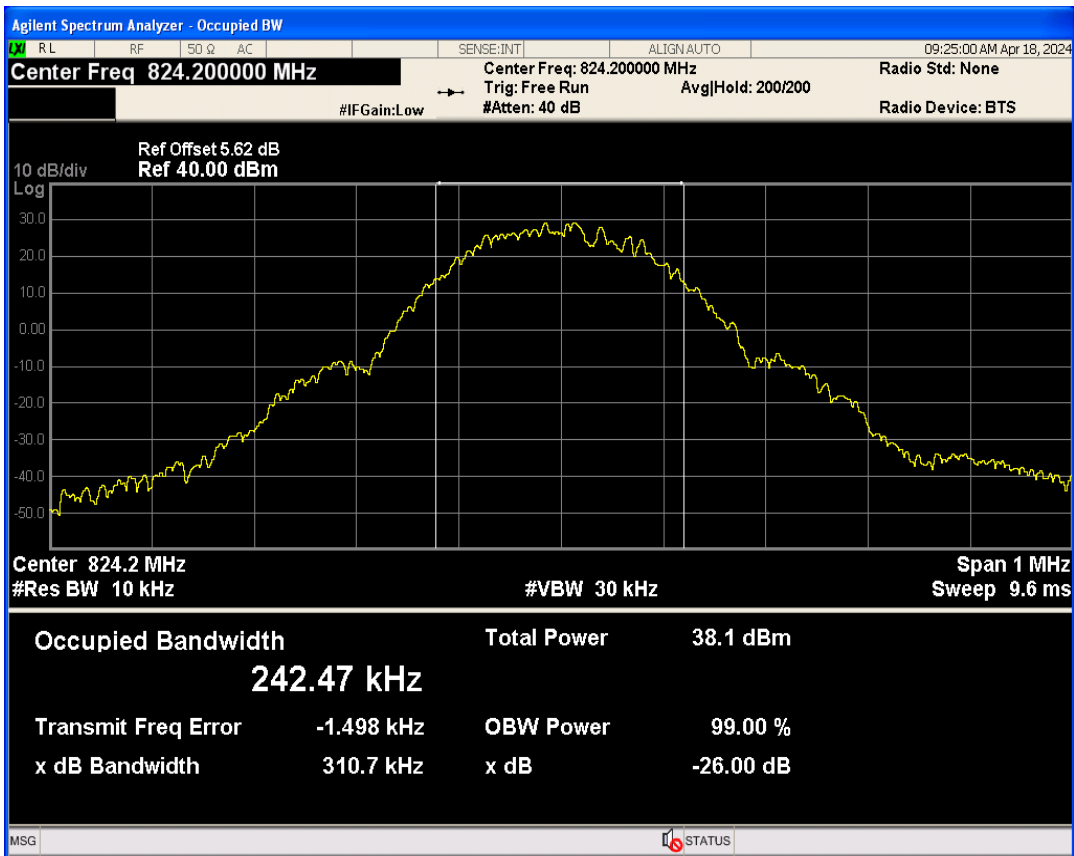


GSM850 Channel=251

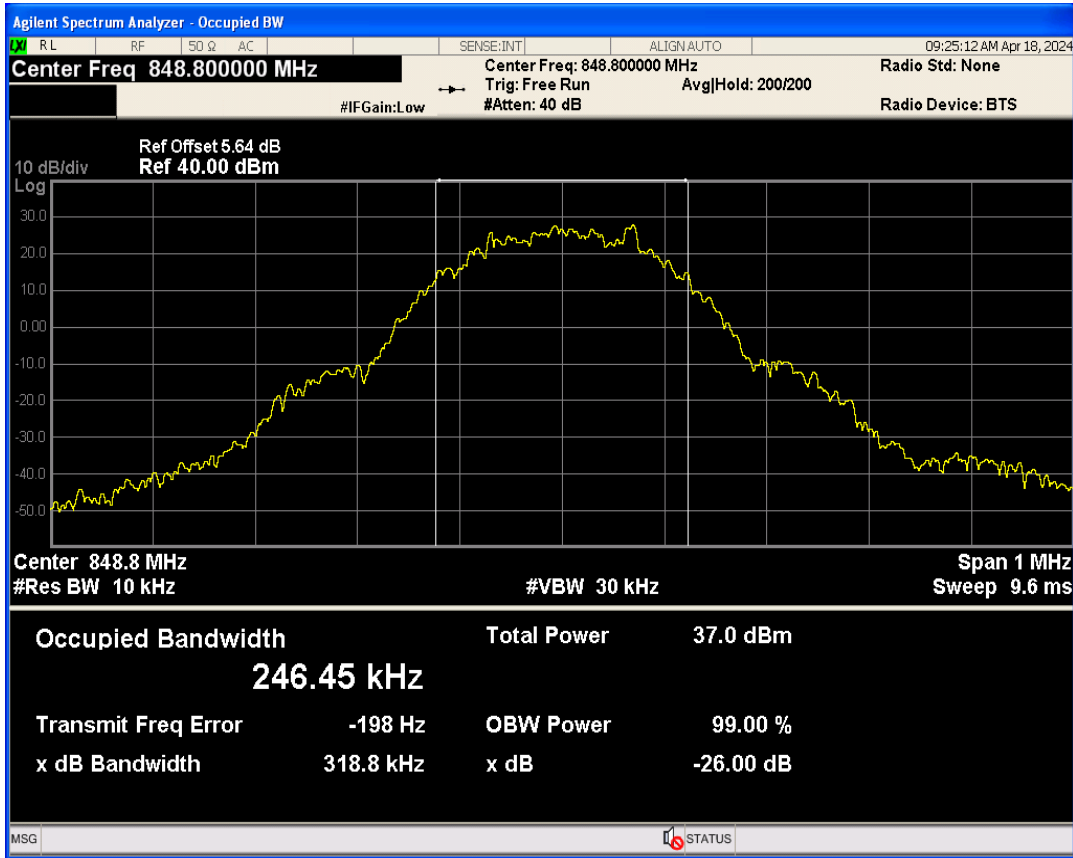


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	1849.98	-31.19	-13	PASS
GSM1900	810	1909.8	1910.02	-30.86	-13	PASS
GSM850	128	824.2	823.98	-27.53	-13	PASS
GSM850	251	848.8	849.01	-28.54	-13	PASS


GSM1900 Channel=512

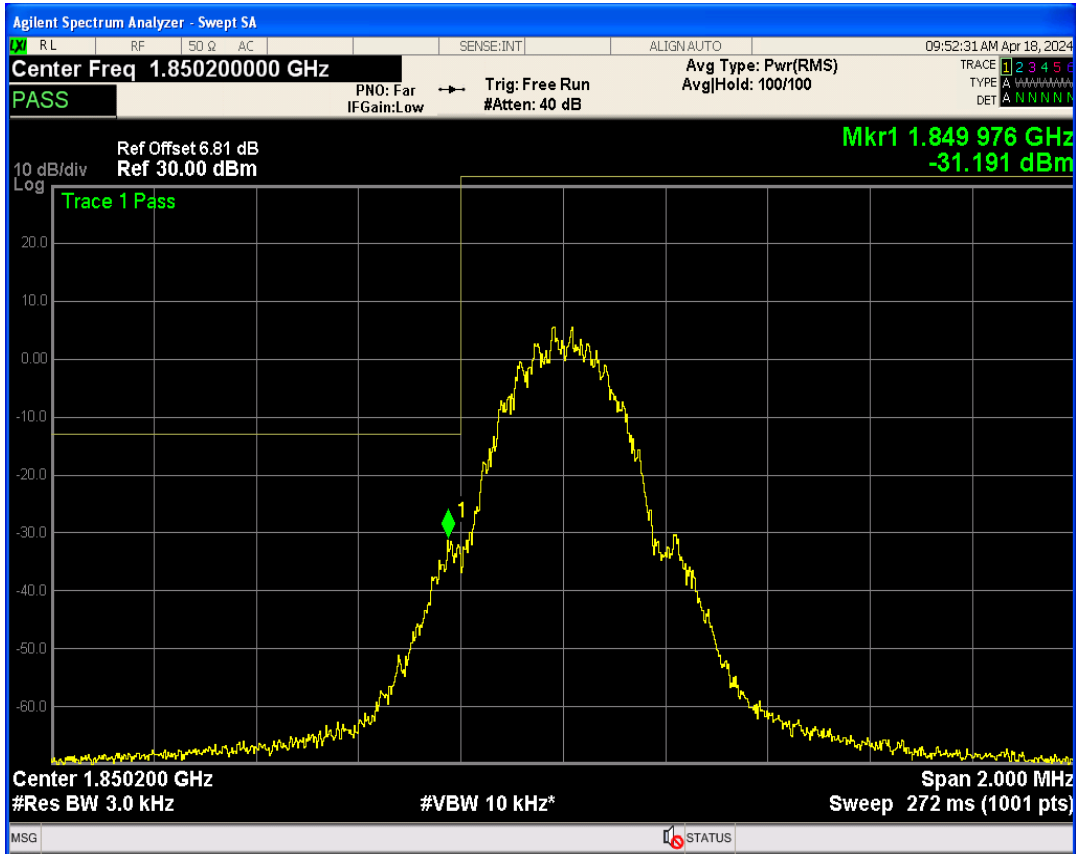


GSM1900 Channel=810

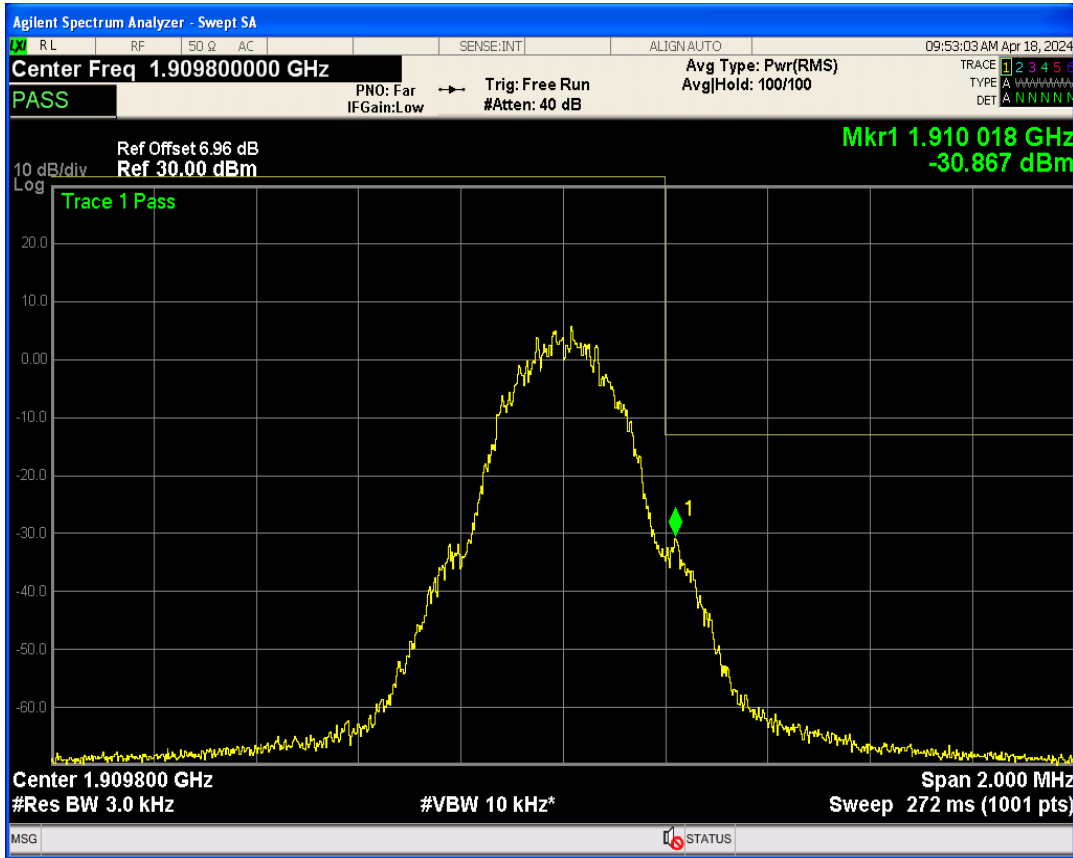

GSM850 Channel=128

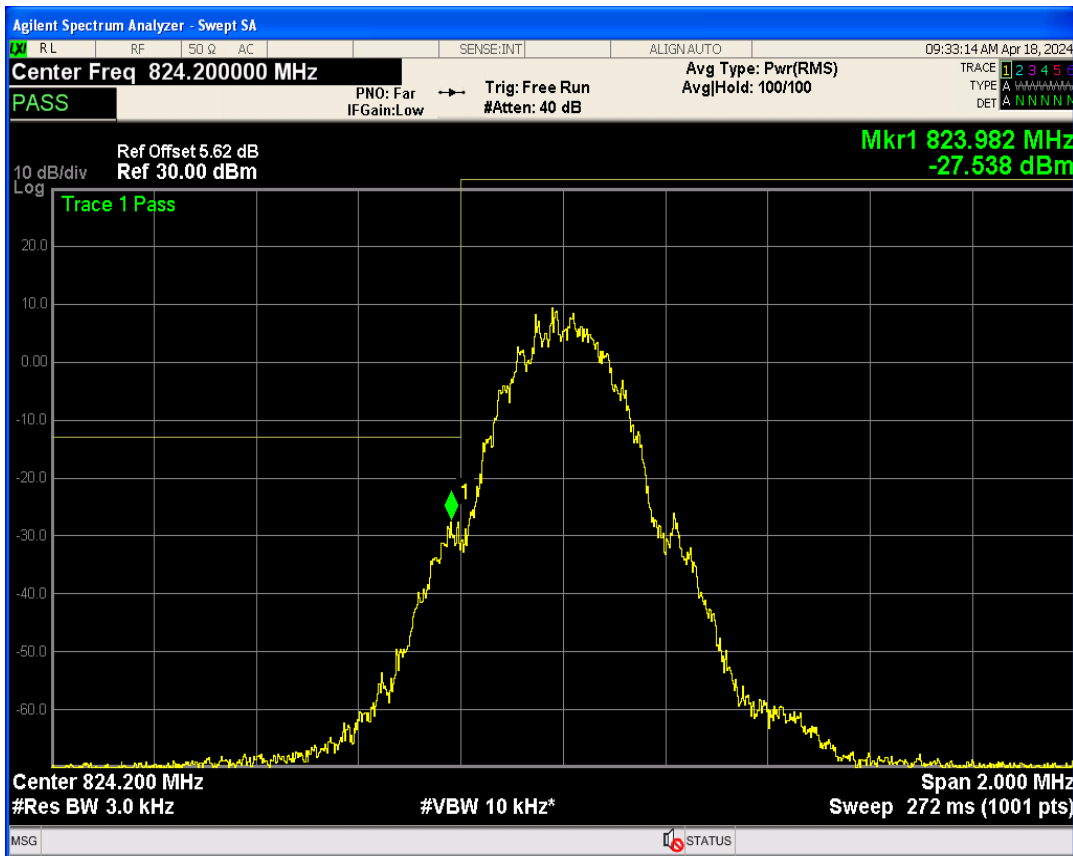


GSM850 Channel=251

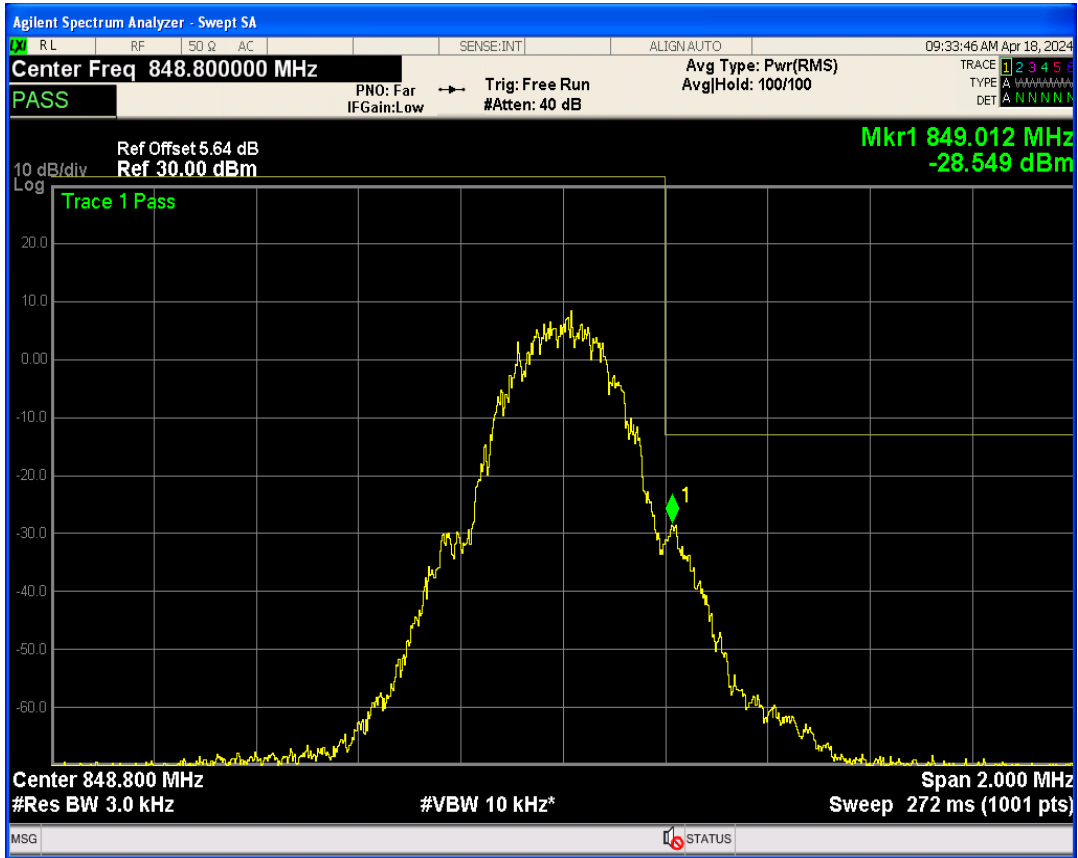


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	25985.16	-18.96	-13	PASS
GSM1900	661	1880	25542.45	-19.07	-13	PASS
GSM1900	810	1909.8	26048.69	-19.55	-13	PASS
GSM850	128	824.2	25825.68	-20.92	-13	PASS
GSM850	189	836.4	25517.96	-20.66	-13	PASS
GSM850	251	848.8	25993.76	-20.80	-13	PASS


GSM1900 Channel=512

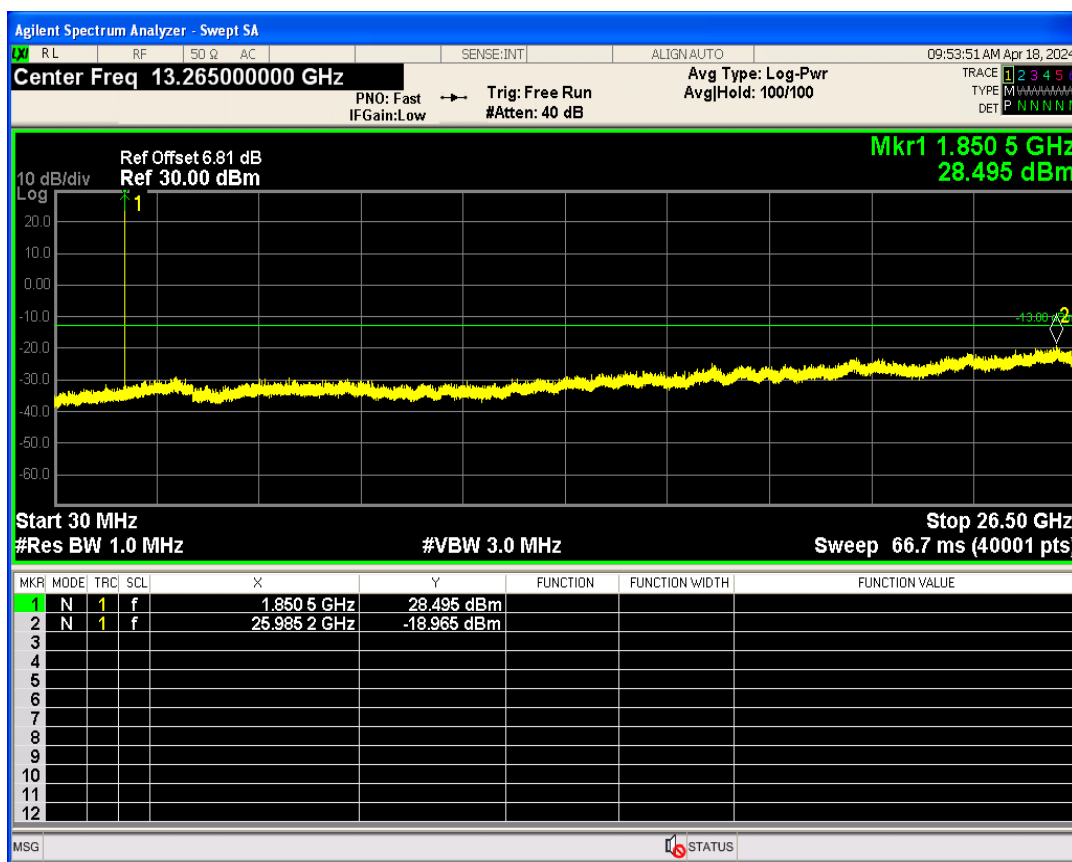


GSM1900 Channel=661

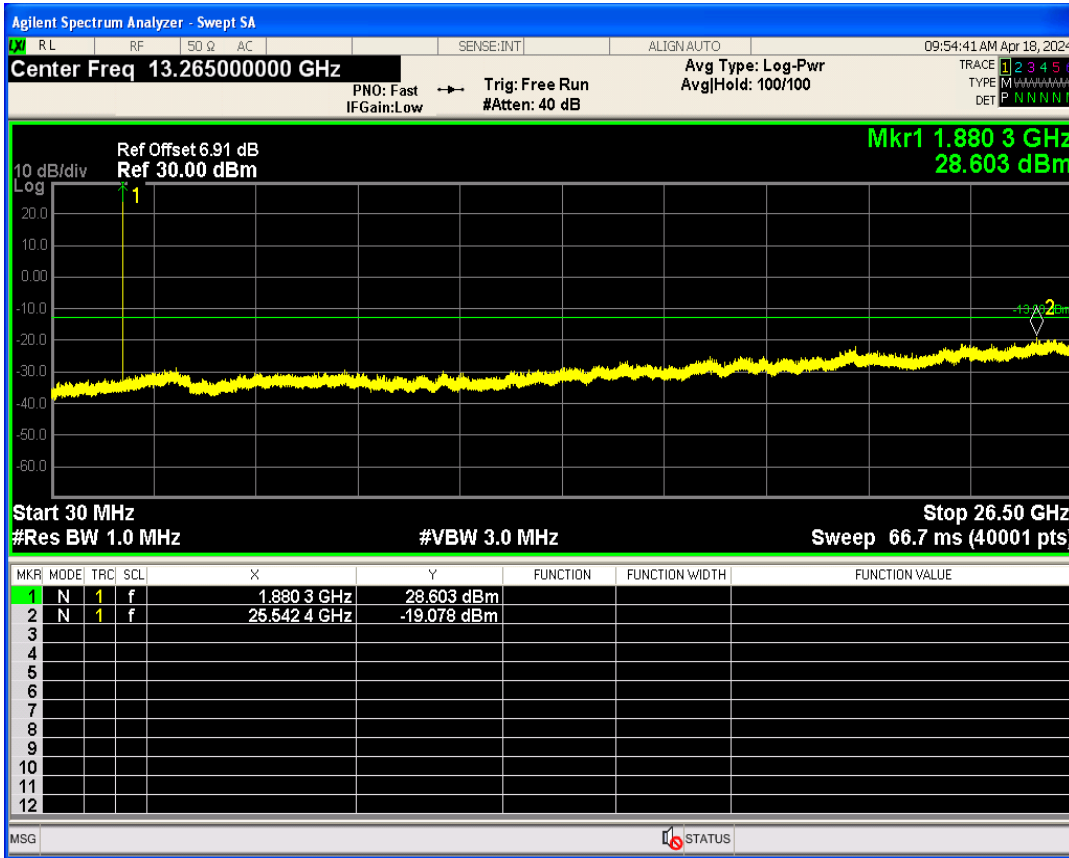


GSM1900 Channel=810

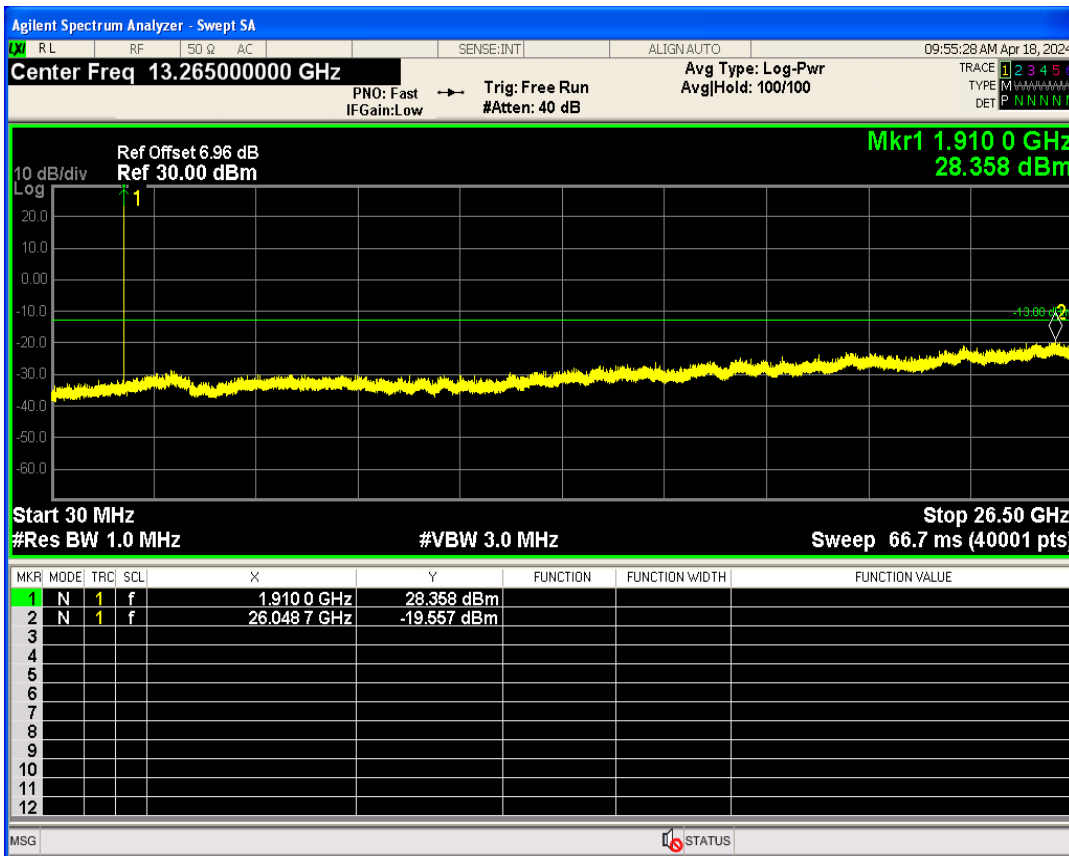

GSM850 Channel=128

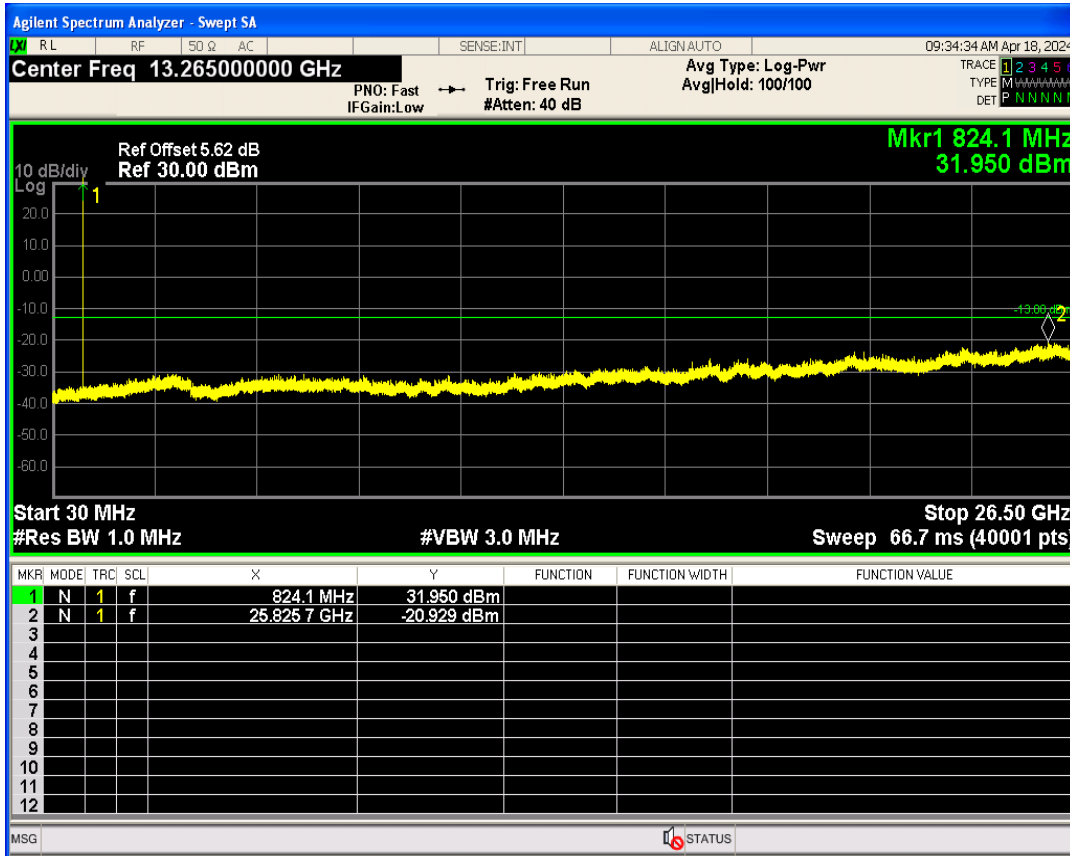

GSM850 Channel=189

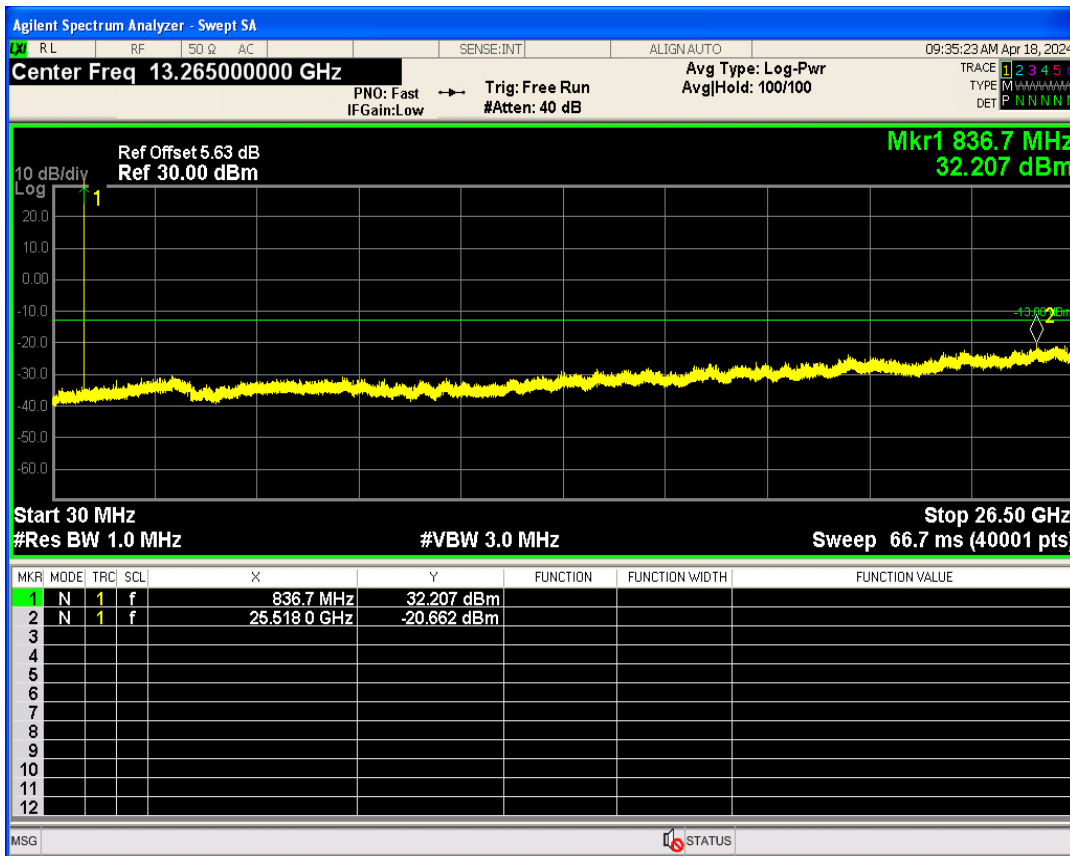

GSM850 Channel=251

