

Conducted output power for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Power (dBm)	Verdict
n78	30	10	630334	1@1	DFT_BPSK	26.77	PASS
n78	30	10	630334	24@0	DFT_QPSK	25.96	PASS
n78	30	10	630334	12@6	DFT_QPSK	26.96	PASS
n78	30	10	630334	1@1	DFT_QPSK	26.92	PASS
n78	30	10	630334	1@22	DFT_QPSK	27.05	PASS
n78	30	10	630334	1@1	DFT_QAM16	25.83	PASS
n78	30	10	630334	1@1	DFT_QAM64	24.48	PASS
n78	30	10	630334	1@1	DFT_QAM256	22.24	PASS
n78	30	10	630334	1@1	CP_QPSK	25.43	PASS
n78	30	10	633333	1@1	DFT_BPSK	27.30	PASS
n78	30	10	633333	24@0	DFT_QPSK	26.57	PASS
n78	30	10	633333	12@6	DFT_QPSK	27.53	PASS
n78	30	10	633333	1@1	DFT_QPSK	27.47	PASS
n78	30	10	633333	1@22	DFT_QPSK	27.65	PASS
n78	30	10	633333	1@1	DFT_QAM16	26.42	PASS
n78	30	10	633333	1@1	DFT_QAM64	25.01	PASS
n78	30	10	633333	1@1	DFT_QAM256	22.78	PASS
n78	30	10	633333	1@1	CP_QPSK	25.87	PASS
n78	30	10	636333	1@1	DFT_BPSK	27.83	PASS
n78	30	10	636333	24@0	DFT_QPSK	26.93	PASS
n78	30	10	636333	12@6	DFT_QPSK	27.94	PASS
n78	30	10	636333	1@1	DFT_QPSK	27.94	PASS
n78	30	10	636333	1@22	DFT_QPSK	27.93	PASS
n78	30	10	636333	1@1	DFT_QAM16	26.86	PASS
n78	30	10	636333	1@1	DFT_QAM64	25.58	PASS
n78	30	10	636333	1@1	DFT_QAM256	23.26	PASS
n78	30	10	636333	1@1	CP_QPSK	26.37	PASS
n78	30	15	630500	1@1	DFT_BPSK	26.80	PASS
n78	30	15	630500	36@0	DFT_QPSK	26.09	PASS
n78	30	15	630500	18@9	DFT_QPSK	27.17	PASS
n78	30	15	630500	1@1	DFT_QPSK	26.90	PASS
n78	30	15	630500	1@36	DFT_QPSK	27.22	PASS
n78	30	15	630500	1@1	DFT_QAM16	25.91	PASS
n78	30	15	630500	1@1	DFT_QAM64	24.48	PASS
n78	30	15	630500	1@1	DFT_QAM256	22.29	PASS
n78	30	15	630500	1@1	CP_QPSK	25.30	PASS
n78	30	15	633333	1@1	DFT_BPSK	27.24	PASS
n78	30	15	633333	36@0	DFT_QPSK	26.53	PASS
n78	30	15	633333	18@9	DFT_QPSK	27.55	PASS
n78	30	15	633333	1@1	DFT_QPSK	27.42	PASS
n78	30	15	633333	1@36	DFT_QPSK	27.68	PASS

n78	30	15	633333	1@1	DFT_QAM16	26.36	PASS
n78	30	15	633333	1@1	DFT_QAM64	24.97	PASS
n78	30	15	633333	1@1	DFT_QAM256	22.72	PASS
n78	30	15	633333	1@1	CP_QPSK	25.79	PASS
n78	30	15	636166	1@1	DFT_BPSK	27.80	PASS
n78	30	15	636166	36@0	DFT_QPSK	27.00	PASS
n78	30	15	636166	18@9	DFT_QPSK	27.92	PASS
n78	30	15	636166	1@1	DFT_QPSK	27.91	PASS
n78	30	15	636166	1@36	DFT_QPSK	27.88	PASS
n78	30	15	636166	1@1	DFT_QAM16	26.91	PASS
n78	30	15	636166	1@1	DFT_QAM64	25.55	PASS
n78	30	15	636166	1@1	DFT_QAM256	23.29	PASS
n78	30	15	636166	1@1	CP_QPSK	26.34	PASS
n78	30	20	630667	1@1	DFT_BPSK	26.86	PASS
n78	30	20	630667	50@0	DFT_QPSK	26.19	PASS
n78	30	20	630667	25@12	DFT_QPSK	27.23	PASS
n78	30	20	630667	1@1	DFT_QPSK	26.98	PASS
n78	30	20	630667	1@49	DFT_QPSK	27.33	PASS
n78	30	20	630667	1@1	DFT_QAM16	25.93	PASS
n78	30	20	630667	1@1	DFT_QAM64	24.53	PASS
n78	30	20	630667	1@1	DFT_QAM256	22.32	PASS
n78	30	20	630667	1@1	CP_QPSK	25.33	PASS
n78	30	20	633333	1@1	DFT_BPSK	27.22	PASS
n78	30	20	633333	50@0	DFT_QPSK	26.56	PASS
n78	30	20	633333	25@12	DFT_QPSK	27.58	PASS
n78	30	20	633333	1@1	DFT_QPSK	27.36	PASS
n78	30	20	633333	1@49	DFT_QPSK	27.71	PASS
n78	30	20	633333	1@1	DFT_QAM16	26.33	PASS
n78	30	20	633333	1@1	DFT_QAM64	24.88	PASS
n78	30	20	633333	1@1	DFT_QAM256	22.70	PASS
n78	30	20	633333	1@1	CP_QPSK	25.76	PASS
n78	30	20	636000	1@1	DFT_BPSK	27.76	PASS
n78	30	20	636000	50@0	DFT_QPSK	27.02	PASS
n78	30	20	636000	25@12	DFT_QPSK	27.91	PASS
n78	30	20	636000	1@1	DFT_QPSK	27.90	PASS
n78	30	20	636000	1@49	DFT_QPSK	27.94	PASS
n78	30	20	636000	1@1	DFT_QAM16	26.85	PASS
n78	30	20	636000	1@1	DFT_QAM64	25.42	PASS
n78	30	20	636000	1@1	DFT_QAM256	23.20	PASS
n78	30	20	636000	1@1	CP_QPSK	26.26	PASS
n78	30	40	631334	1@1	DFT_BPSK	27.01	PASS
n78	30	40	631334	100@0	DFT_QPSK	26.32	PASS
n78	30	40	631334	50@25	DFT_QPSK	27.39	PASS
n78	30	40	631334	1@1	DFT_QPSK	27.09	PASS

n78	30	40	631334	1@104	DFT_QPSK	27.29	PASS
n78	30	40	631334	1@1	DFT_QAM16	26.08	PASS
n78	30	40	631334	1@1	DFT_QAM64	24.64	PASS
n78	30	40	631334	1@1	DFT_QAM256	22.45	PASS
n78	30	40	631334	1@1	CP_QPSK	25.39	PASS
n78	30	40	633333	1@1	DFT_BPSK	27.20	PASS
n78	30	40	633333	100@0	DFT_QPSK	26.58	PASS
n78	30	40	633333	50@25	DFT_QPSK	27.58	PASS
n78	30	40	633333	1@1	DFT_QPSK	27.30	PASS
n78	30	40	633333	1@104	DFT_QPSK	27.59	PASS
n78	30	40	633333	1@1	DFT_QAM16	26.27	PASS
n78	30	40	633333	1@1	DFT_QAM64	24.84	PASS
n78	30	40	633333	1@1	DFT_QAM256	22.64	PASS
n78	30	40	633333	1@1	CP_QPSK	25.66	PASS
n78	30	40	635333	1@1	DFT_BPSK	27.59	PASS
n78	30	40	635333	100@0	DFT_QPSK	26.86	PASS
n78	30	40	635333	50@25	DFT_QPSK	27.84	PASS
n78	30	40	635333	1@1	DFT_QPSK	27.67	PASS
n78	30	40	635333	1@104	DFT_QPSK	27.94	PASS
n78	30	40	635333	1@1	DFT_QAM16	26.67	PASS
n78	30	40	635333	1@1	DFT_QAM64	25.26	PASS
n78	30	40	635333	1@1	DFT_QAM256	23.03	PASS
n78	30	40	635333	1@1	CP_QPSK	26.01	PASS
n78	30	50	631667	1@1	DFT_BPSK	26.97	PASS
n78	30	50	631667	128@0	DFT_QPSK	26.33	PASS
n78	30	50	631667	64@32	DFT_QPSK	27.40	PASS
n78	30	50	631667	1@1	DFT_QPSK	27.14	PASS
n78	30	50	631667	1@131	DFT_QPSK	27.59	PASS
n78	30	50	631667	1@1	DFT_QAM16	26.02	PASS
n78	30	50	631667	1@1	DFT_QAM64	24.68	PASS
n78	30	50	631667	1@1	DFT_QAM256	22.47	PASS
n78	30	50	631667	1@1	CP_QPSK	25.41	PASS
n78	30	50	633333	1@1	DFT_BPSK	27.25	PASS
n78	30	50	633333	128@0	DFT_QPSK	26.53	PASS
n78	30	50	633333	64@32	DFT_QPSK	27.62	PASS
n78	30	50	633333	1@1	DFT_QPSK	27.47	PASS
n78	30	50	633333	1@131	DFT_QPSK	27.73	PASS
n78	30	50	633333	1@1	DFT_QAM16	26.35	PASS
n78	30	50	633333	1@1	DFT_QAM64	24.89	PASS
n78	30	50	633333	1@1	DFT_QAM256	22.72	PASS
n78	30	50	633333	1@1	CP_QPSK	25.70	PASS
n78	30	50	635000	1@1	DFT_BPSK	27.58	PASS
n78	30	50	635000	128@0	DFT_QPSK	26.83	PASS
n78	30	50	635000	64@32	DFT_QPSK	27.80	PASS

n78	30	50	635000	1@1	DFT_QPSK	27.70	PASS
n78	30	50	635000	1@131	DFT_QPSK	27.92	PASS
n78	30	50	635000	1@1	DFT_QAM16	26.69	PASS
n78	30	50	635000	1@1	DFT_QAM64	25.30	PASS
n78	30	50	635000	1@1	DFT_QAM256	23.05	PASS
n78	30	50	635000	1@1	CP_QPSK	26.13	PASS
n78	30	60	632000	1@1	DFT_BPSK	26.97	PASS
n78	30	60	632000	162@0	DFT_QPSK	26.40	PASS
n78	30	60	632000	81@40	DFT_QPSK	27.43	PASS
n78	30	60	632000	1@1	DFT_QPSK	27.10	PASS
n78	30	60	632000	1@160	DFT_QPSK	27.64	PASS
n78	30	60	632000	1@1	DFT_QAM16	26.05	PASS
n78	30	60	632000	1@1	DFT_QAM64	24.63	PASS
n78	30	60	632000	1@1	DFT_QAM256	22.43	PASS
n78	30	60	632000	1@1	CP_QPSK	25.36	PASS
n78	30	60	633333	1@1	DFT_BPSK	27.27	PASS
n78	30	60	633333	162@0	DFT_QPSK	26.54	PASS
n78	30	60	633333	81@40	DFT_QPSK	27.55	PASS
n78	30	60	633333	1@1	DFT_QPSK	27.38	PASS
n78	30	60	633333	1@160	DFT_QPSK	27.72	PASS
n78	30	60	633333	1@1	DFT_QAM16	26.37	PASS
n78	30	60	633333	1@1	DFT_QAM64	25.02	PASS
n78	30	60	633333	1@1	DFT_QAM256	22.75	PASS
n78	30	60	633333	1@1	CP_QPSK	25.74	PASS
n78	30	60	634666	1@1	DFT_BPSK	27.31	PASS
n78	30	60	634666	162@0	DFT_QPSK	26.81	PASS
n78	30	60	634666	81@40	DFT_QPSK	27.77	PASS
n78	30	60	634666	1@1	DFT_QPSK	27.43	PASS
n78	30	60	634666	1@160	DFT_QPSK	27.97	PASS
n78	30	60	634666	1@1	DFT_QAM16	26.39	PASS
n78	30	60	634666	1@1	DFT_QAM64	25.00	PASS
n78	30	60	634666	1@1	DFT_QAM256	22.78	PASS
n78	30	60	634666	1@1	CP_QPSK	25.81	PASS
n78	30	80	632667	1@1	DFT_BPSK	27.04	PASS
n78	30	80	632667	216@0	DFT_QPSK	26.53	PASS
n78	30	80	632667	108@54	DFT_QPSK	27.52	PASS
n78	30	80	632667	1@1	DFT_QPSK	27.14	PASS
n78	30	80	632667	1@215	DFT_QPSK	27.80	PASS
n78	30	80	632667	1@1	DFT_QAM16	26.15	PASS
n78	30	80	632667	1@1	DFT_QAM64	24.71	PASS
n78	30	80	632667	1@1	DFT_QAM256	22.45	PASS
n78	30	80	632667	1@1	CP_QPSK	25.50	PASS
n78	30	80	633333	1@1	DFT_BPSK	27.28	PASS
n78	30	80	633333	216@0	DFT_QPSK	26.63	PASS

n78	30	80	633333	108@54	DFT_QPSK	27.63	PASS
n78	30	80	633333	1@1	DFT_QPSK	27.37	PASS
n78	30	80	633333	1@215	DFT_QPSK	27.93	PASS
n78	30	80	633333	1@1	DFT_QAM16	26.38	PASS
n78	30	80	633333	1@1	DFT_QAM64	24.97	PASS
n78	30	80	633333	1@1	DFT_QAM256	22.73	PASS
n78	30	80	633333	1@1	CP_QPSK	25.85	PASS
n78	30	80	634000	1@1	DFT_BPSK	27.44	PASS
n78	30	80	634000	216@0	DFT_QPSK	26.75	PASS
n78	30	80	634000	108@54	DFT_QPSK	27.75	PASS
n78	30	80	634000	1@1	DFT_QPSK	27.53	PASS
n78	30	80	634000	1@215	DFT_QPSK	27.92	PASS
n78	30	80	634000	1@1	DFT_QAM16	26.54	PASS
n78	30	80	634000	1@1	DFT_QAM64	25.10	PASS
n78	30	80	634000	1@1	DFT_QAM256	22.86	PASS
n78	30	80	634000	1@1	CP_QPSK	25.91	PASS
n78	30	90	633000	1@1	DFT_BPSK	27.02	PASS
n78	30	90	633000	240@0	DFT_QPSK	26.57	PASS
n78	30	90	633000	120@60	DFT_QPSK	27.58	PASS
n78	30	90	633000	1@1	DFT_QPSK	27.26	PASS
n78	30	90	633000	1@243	DFT_QPSK	27.86	PASS
n78	30	90	633000	1@1	DFT_QAM16	26.16	PASS
n78	30	90	633000	1@1	DFT_QAM64	24.68	PASS
n78	30	90	633000	1@1	DFT_QAM256	22.46	PASS
n78	30	90	633000	1@1	CP_QPSK	25.39	PASS
n78	30	90	633333	1@1	DFT_BPSK	27.15	PASS
n78	30	90	633333	240@0	DFT_QPSK	26.67	PASS
n78	30	90	633333	120@60	DFT_QPSK	27.63	PASS
n78	30	90	633333	1@1	DFT_QPSK	27.35	PASS
n78	30	90	633333	1@243	DFT_QPSK	27.91	PASS
n78	30	90	633333	1@1	DFT_QAM16	26.29	PASS
n78	30	90	633333	1@1	DFT_QAM64	24.78	PASS
n78	30	90	633333	1@1	DFT_QAM256	22.61	PASS
n78	30	90	633333	1@1	CP_QPSK	25.59	PASS
n78	30	90	633666	1@1	DFT_BPSK	27.33	PASS
n78	30	90	633666	240@0	DFT_QPSK	26.74	PASS
n78	30	90	633666	120@60	DFT_QPSK	27.73	PASS
n78	30	90	633666	1@1	DFT_QPSK	27.53	PASS
n78	30	90	633666	1@243	DFT_QPSK	27.83	PASS
n78	30	90	633666	1@1	DFT_QAM16	26.45	PASS
n78	30	90	633666	1@1	DFT_QAM64	25.04	PASS
n78	30	90	633666	1@1	DFT_QAM256	22.82	PASS
n78	30	90	633666	1@1	CP_QPSK	25.79	PASS
n78	30	100	633333	1@1	DFT_BPSK	27.04	PASS


n78	30	100	633333	270@0	DFT_QPSK	26.65	PASS
n78	30	100	633333	135@67	DFT_QPSK	27.59	PASS
n78	30	100	633333	1@1	DFT_QPSK	27.27	PASS
n78	30	100	633333	1@271	DFT_QPSK	27.88	PASS
n78	30	100	633333	1@1	DFT_QAM16	26.16	PASS
n78	30	100	633333	1@1	DFT_QAM64	24.68	PASS
n78	30	100	633333	1@1	DFT_QAM256	22.55	PASS
n78	30	100	633333	1@1	CP_QPSK	25.53	PASS

Peak-to-Average Ratio for NR FR1


Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Result (dB)	high Limit (dB)	Verdict
n78	30	10	633333	24@0	DFT_BPSK	3.98	13	PASS
n78	30	10	633333	24@0	DFT_QPSK	4.83	13	PASS
n78	30	10	633333	24@0	DFT_QAM16	5.66	13	PASS
n78	30	10	633333	24@0	DFT_QAM64	5.99	13	PASS
n78	30	10	633333	24@0	DFT_QAM256	6.84	13	PASS
n78	30	15	633333	36@0	DFT_BPSK	4.10	13	PASS
n78	30	15	633333	36@0	DFT_QPSK	5.05	13	PASS
n78	30	15	633333	36@0	DFT_QAM16	5.83	13	PASS
n78	30	15	633333	36@0	DFT_QAM64	6.14	13	PASS
n78	30	15	633333	36@0	DFT_QAM256	6.62	13	PASS
n78	30	20	633333	50@0	DFT_BPSK	4.24	13	PASS
n78	30	20	633333	50@0	DFT_QPSK	5.21	13	PASS
n78	30	20	633333	50@0	DFT_QAM16	5.99	13	PASS
n78	30	20	633333	50@0	DFT_QAM64	6.25	13	PASS
n78	30	20	633333	50@0	DFT_QAM256	6.65	13	PASS
n78	30	40	633333	100@0	DFT_BPSK	3.78	13	PASS
n78	30	40	633333	100@0	DFT_QPSK	5.33	13	PASS
n78	30	40	633333	100@0	DFT_QAM16	6.51	13	PASS
n78	30	40	633333	100@0	DFT_QAM64	6.57	13	PASS
n78	30	40	633333	100@0	DFT_QAM256	6.86	13	PASS
n78	30	50	633333	128@0	DFT_BPSK	4.84	13	PASS
n78	30	50	633333	128@0	DFT_QPSK	5.94	13	PASS
n78	30	50	633333	128@0	DFT_QAM16	6.96	13	PASS
n78	30	50	633333	128@0	DFT_QAM64	6.89	13	PASS
n78	30	50	633333	128@0	DFT_QAM256	7.04	13	PASS
n78	30	60	633333	162@0	DFT_BPSK	6.12	13	PASS
n78	30	60	633333	162@0	DFT_QPSK	6.44	13	PASS
n78	30	60	633333	162@0	DFT_QAM16	7.10	13	PASS
n78	30	60	633333	162@0	DFT_QAM64	7.18	13	PASS
n78	30	60	633333	162@0	DFT_QAM256	7.22	13	PASS
n78	30	80	633333	216@0	DFT_BPSK	5.60	13	PASS
n78	30	80	633333	216@0	DFT_QPSK	6.93	13	PASS
n78	30	80	633333	216@0	DFT_QAM16	7.47	13	PASS
n78	30	80	633333	216@0	DFT_QAM64	7.41	13	PASS
n78	30	80	633333	216@0	DFT_QAM256	7.46	13	PASS
n78	30	90	633333	240@0	DFT_BPSK	5.74	13	PASS
n78	30	90	633333	240@0	DFT_QPSK	7.04	13	PASS
n78	30	90	633333	240@0	DFT_QAM16	7.37	13	PASS
n78	30	90	633333	240@0	DFT_QAM64	7.52	13	PASS
n78	30	90	633333	240@0	DFT_QAM256	7.67	13	PASS
n78	30	100	633333	270@0	DFT_BPSK	5.98	13	PASS

n78	30	100	633333	270@0	DFT_QPSK	7.24	13	PASS
n78	30	100	633333	270@0	DFT_QAM16	7.43	13	PASS
n78	30	100	633333	270@0	DFT_QAM64	7.62	13	PASS
n78	30	100	633333	270@0	DFT_QAM256	7.81	13	PASS


n78 SCS=30kHz DFT_BPSK BW=10MHz Channel=633333 RB=24@0

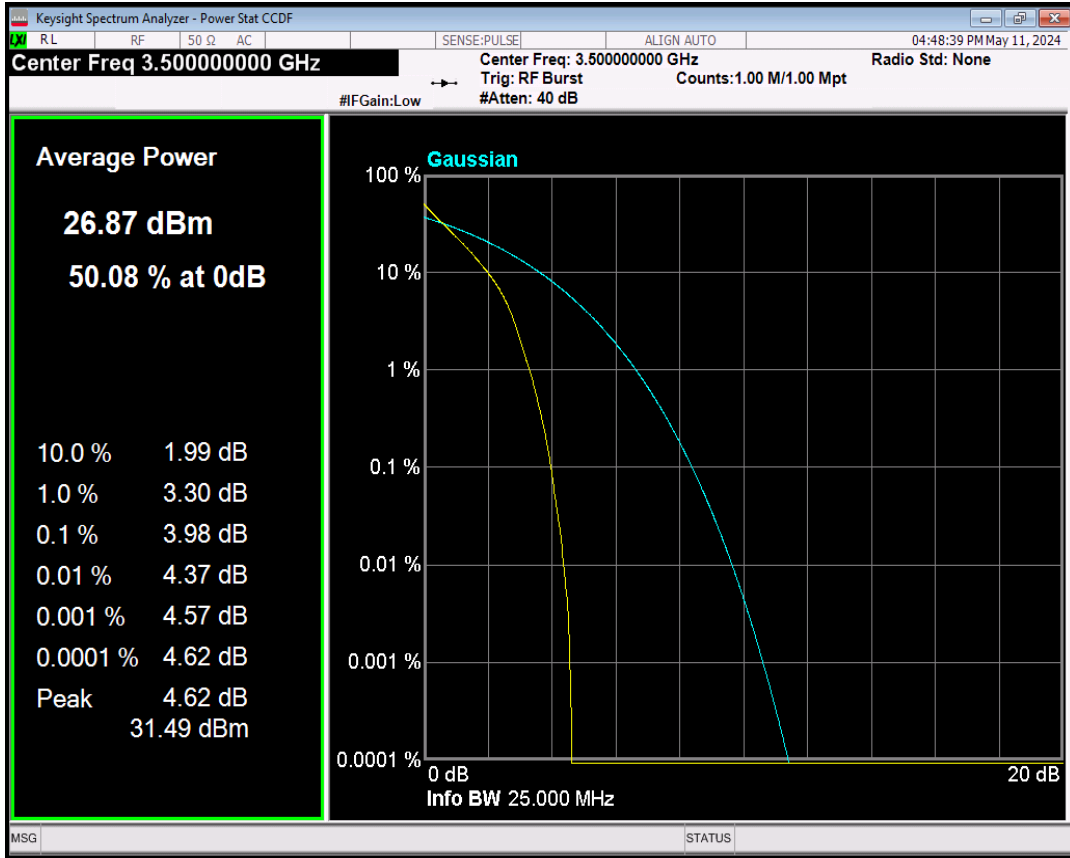


n78 SCS=30kHz DFT_QPSK BW=10MHz Channel=633333 RB=24@0

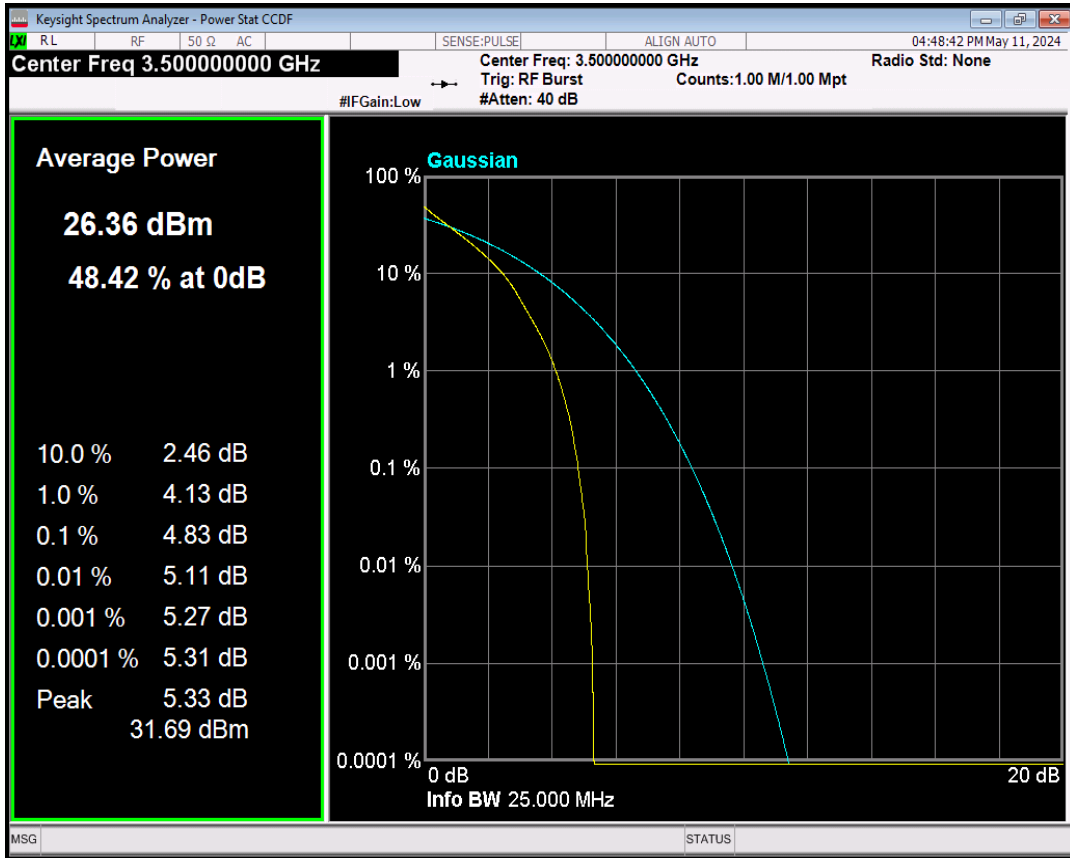


n78 SCS=30kHz DFT_QAM16 BW=10MHz Channel=633333 RB=24@0

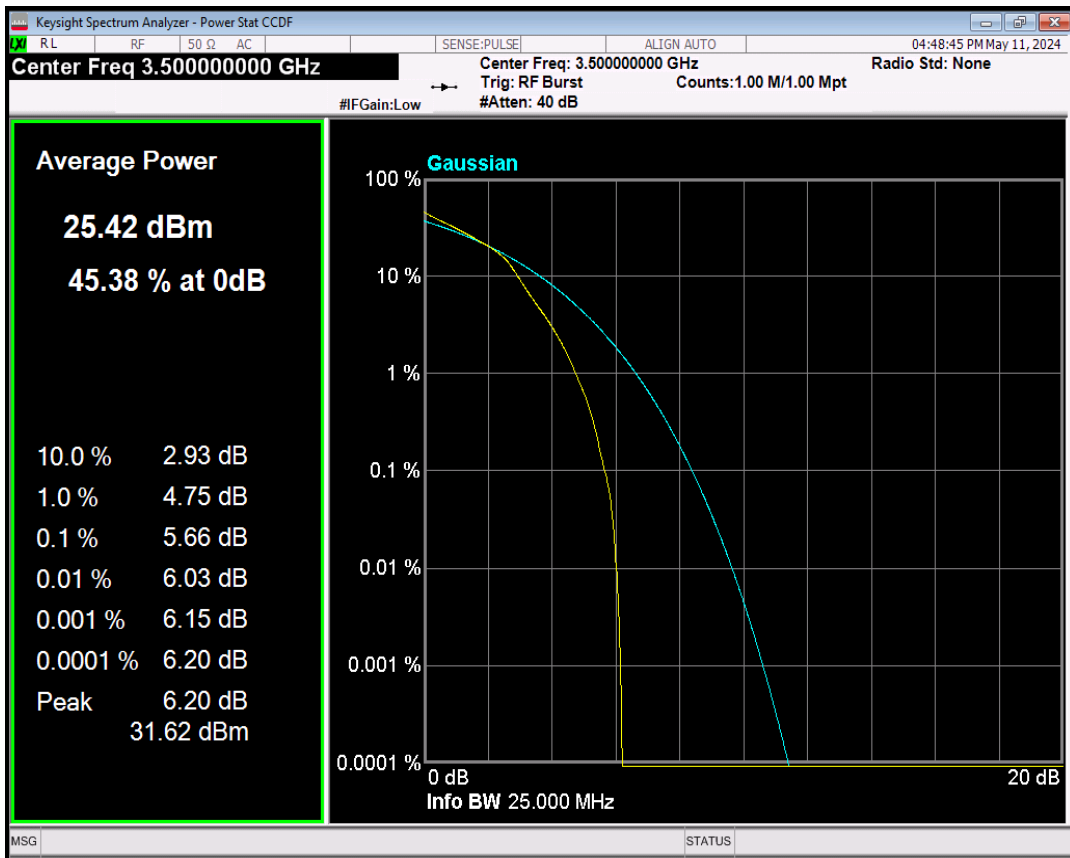


n78 SCS=30kHz DFT_QAM64 BW=10MHz Channel=633333 RB=24@0

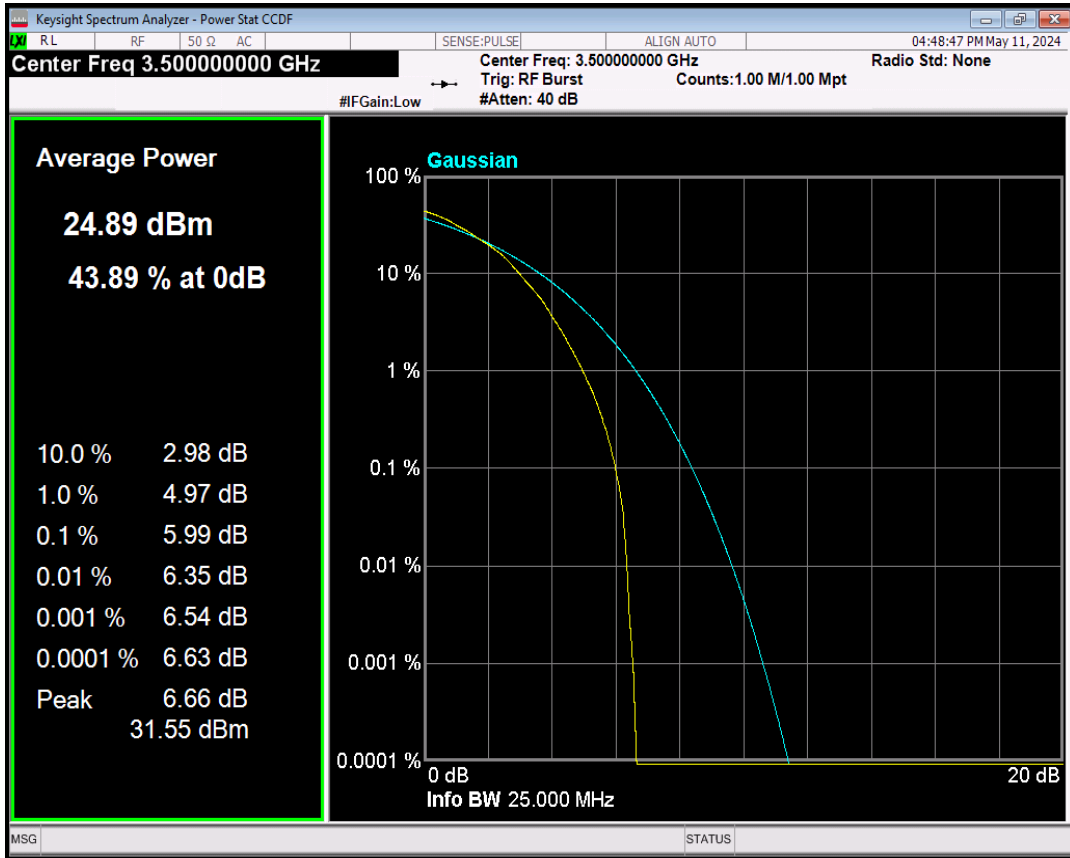


n78 SCS=30kHz DFT_QAM256 BW=10MHz Channel=633333 RB=24@0

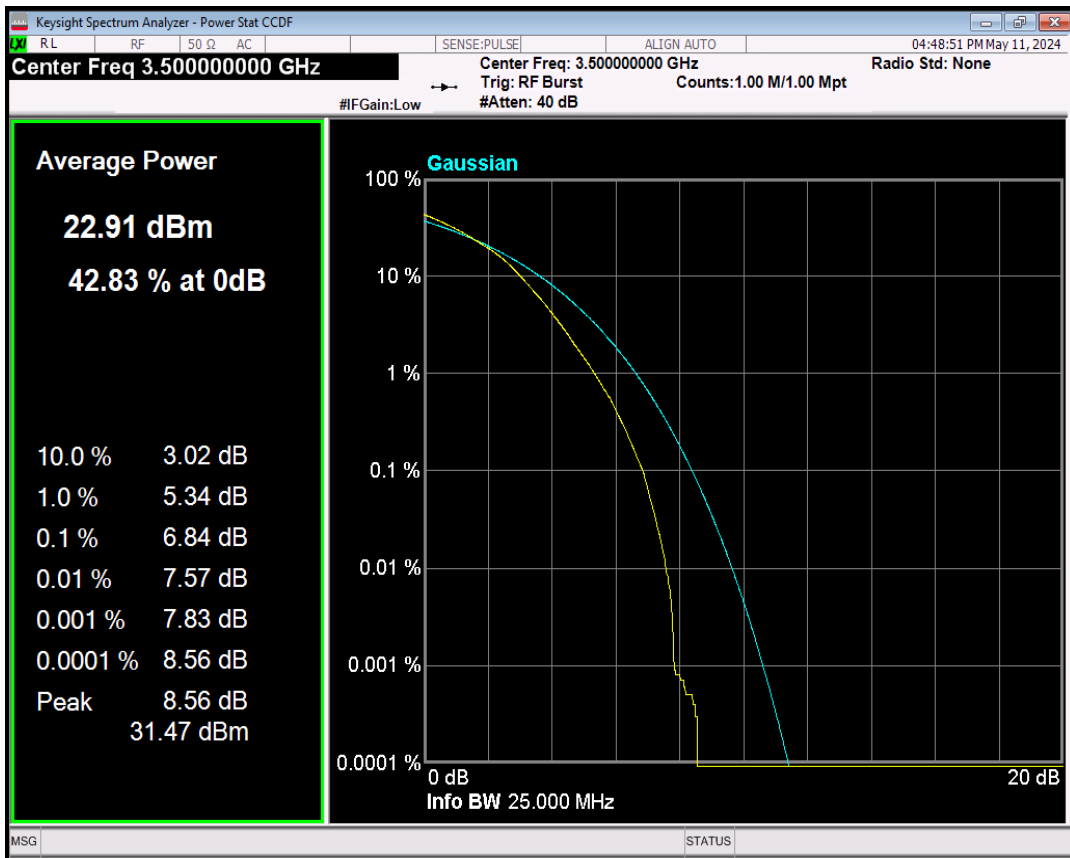


n78 SCS=30kHz DFT_BPSK BW=15MHz Channel=633333 RB=36@0

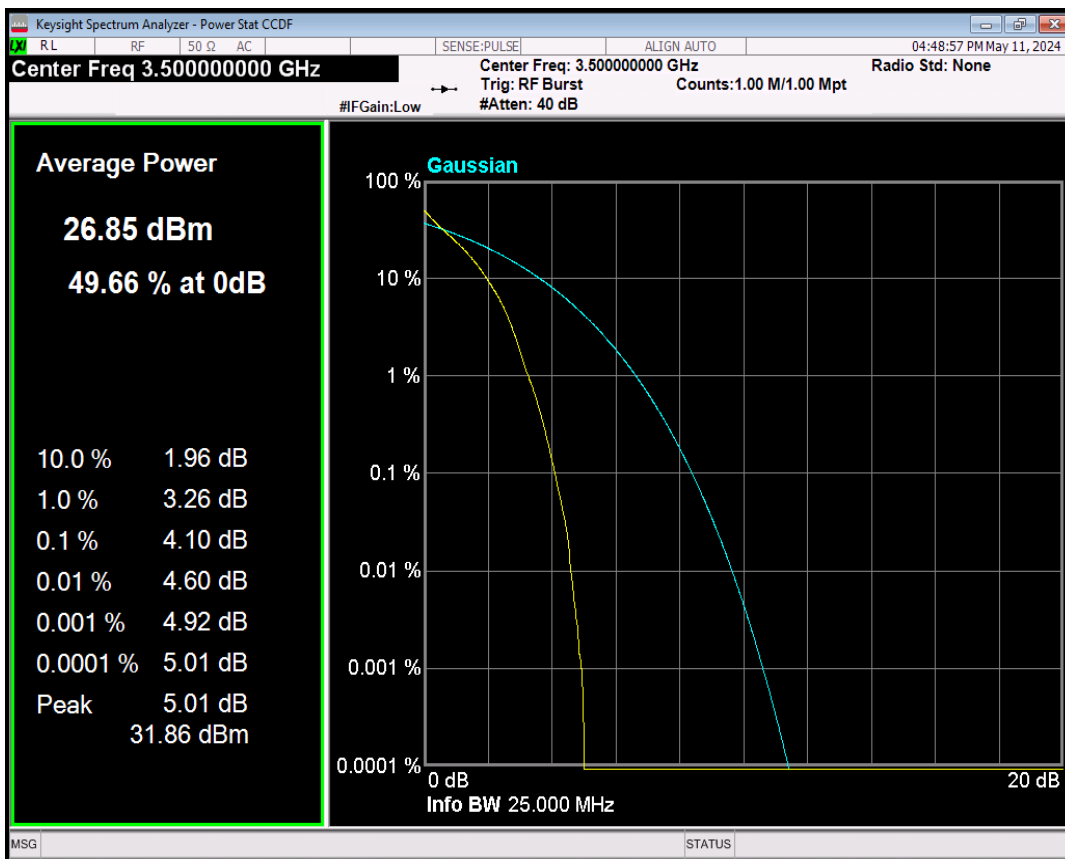


n78 SCS=30kHz DFT_QPSK BW=15MHz Channel=633333 RB=36@0

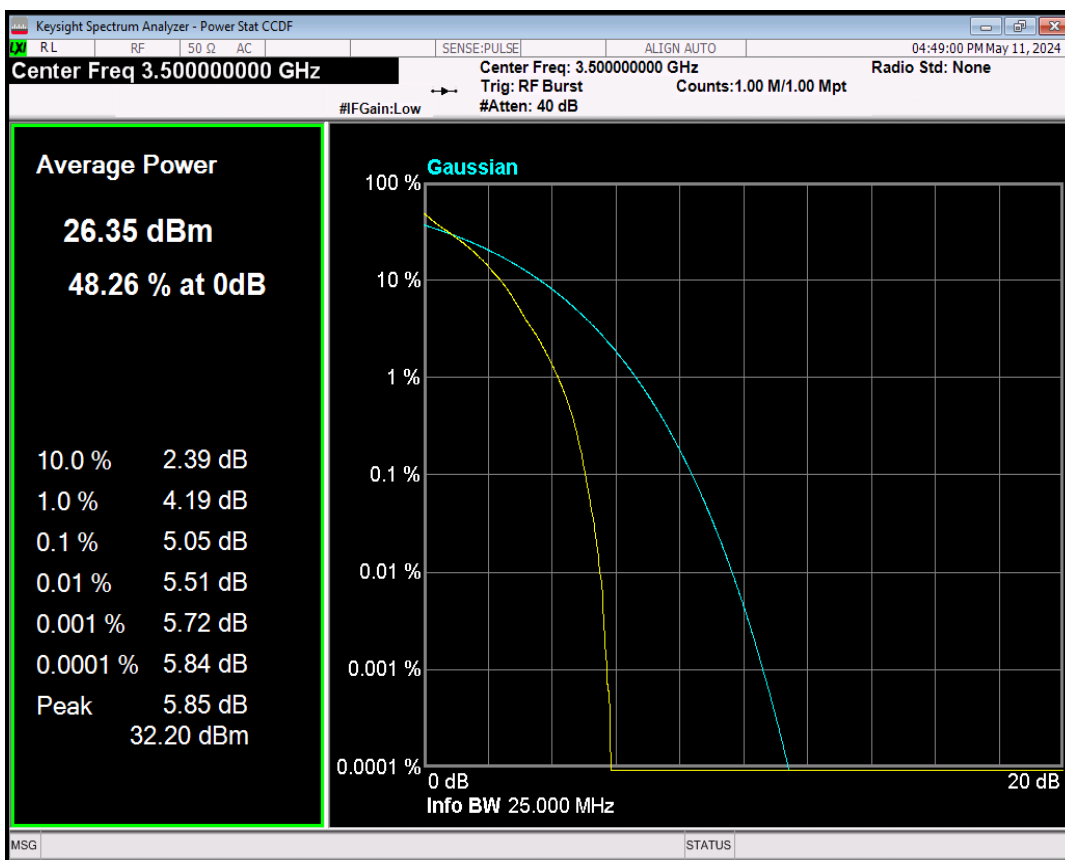


n78 SCS=30kHz DFT_QAM16 BW=15MHz Channel=633333 RB=36@0

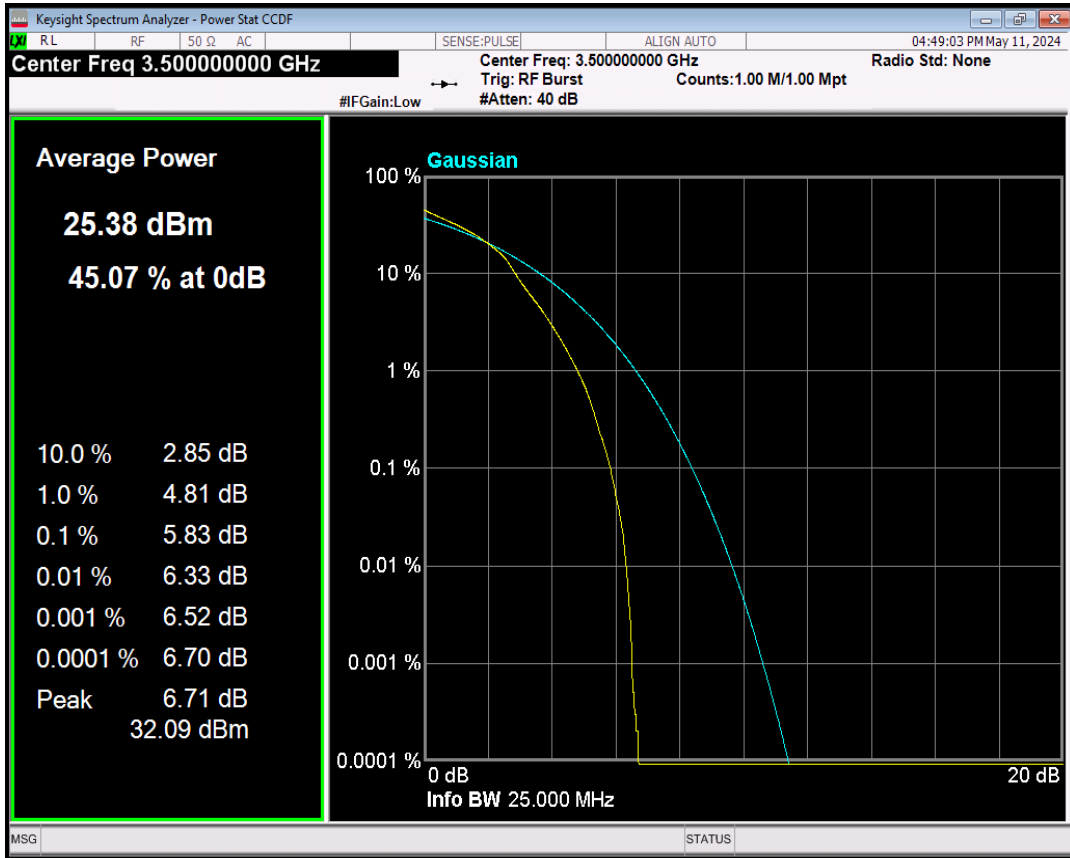


n78 SCS=30kHz DFT_QAM64 BW=15MHz Channel=633333 RB=36@0

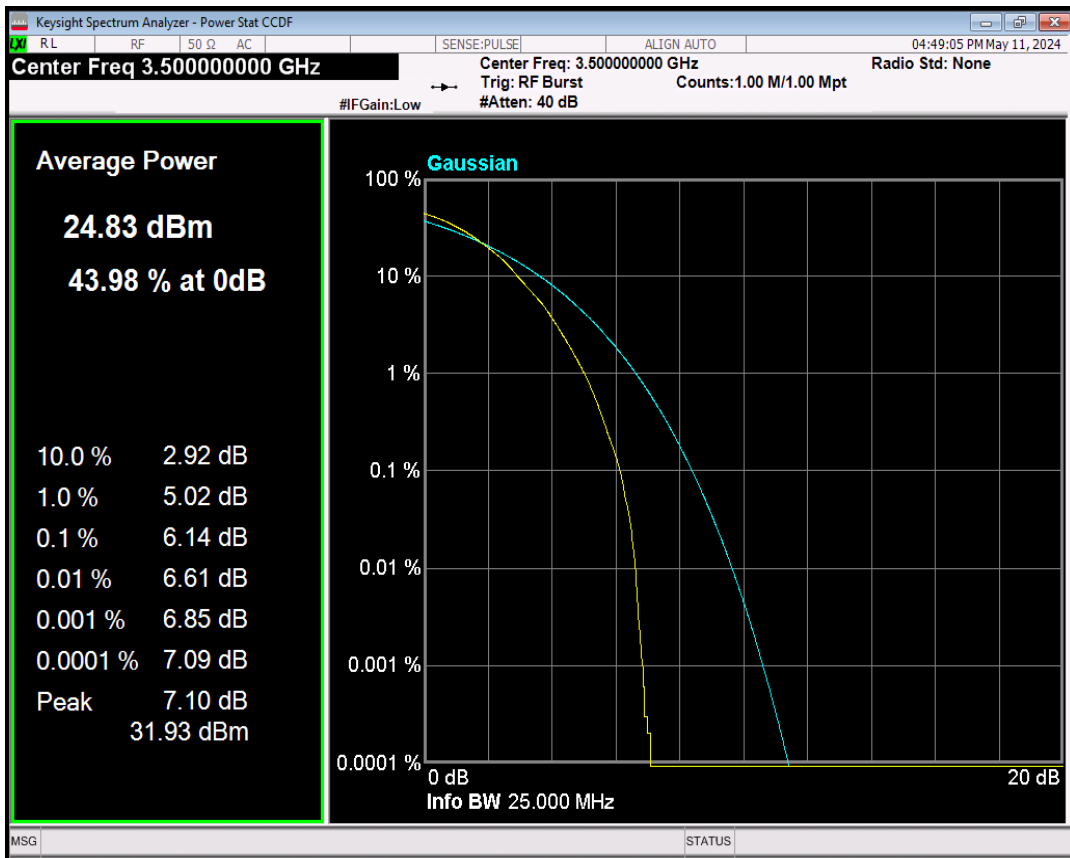


n78 SCS=30kHz DFT_QAM256 BW=15MHz Channel=633333 RB=36@0

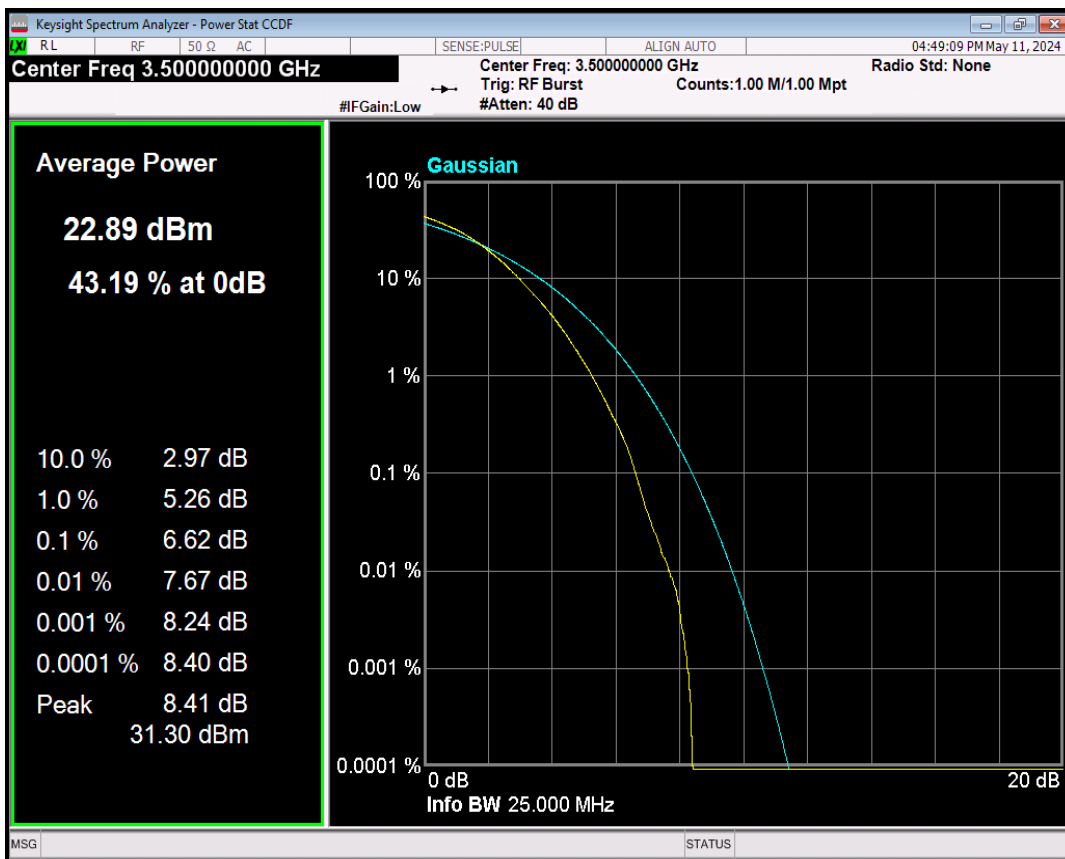


n78 SCS=30kHz DFT_BPSK BW=20MHz Channel=633333 RB=50@0

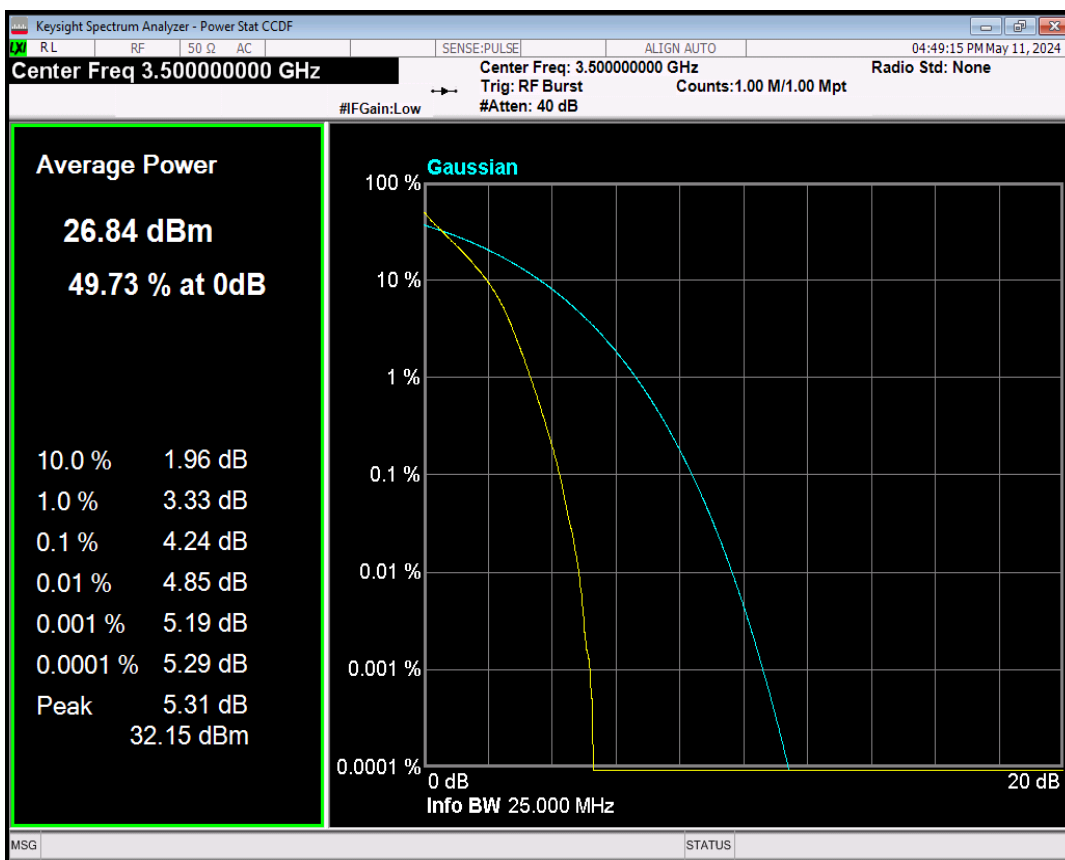


n78 SCS=30kHz DFT_QPSK BW=20MHz Channel=633333 RB=50@0

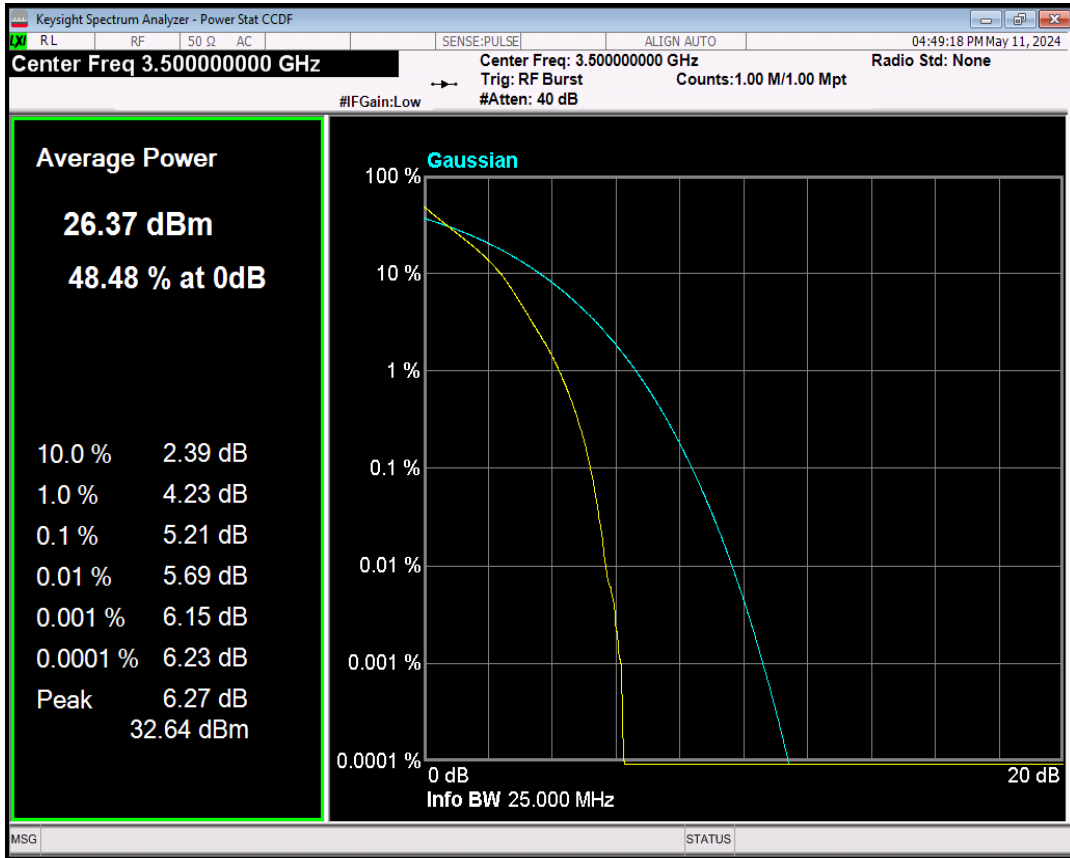


n78 SCS=30kHz DFT_QAM16 BW=20MHz Channel=633333 RB=50@0

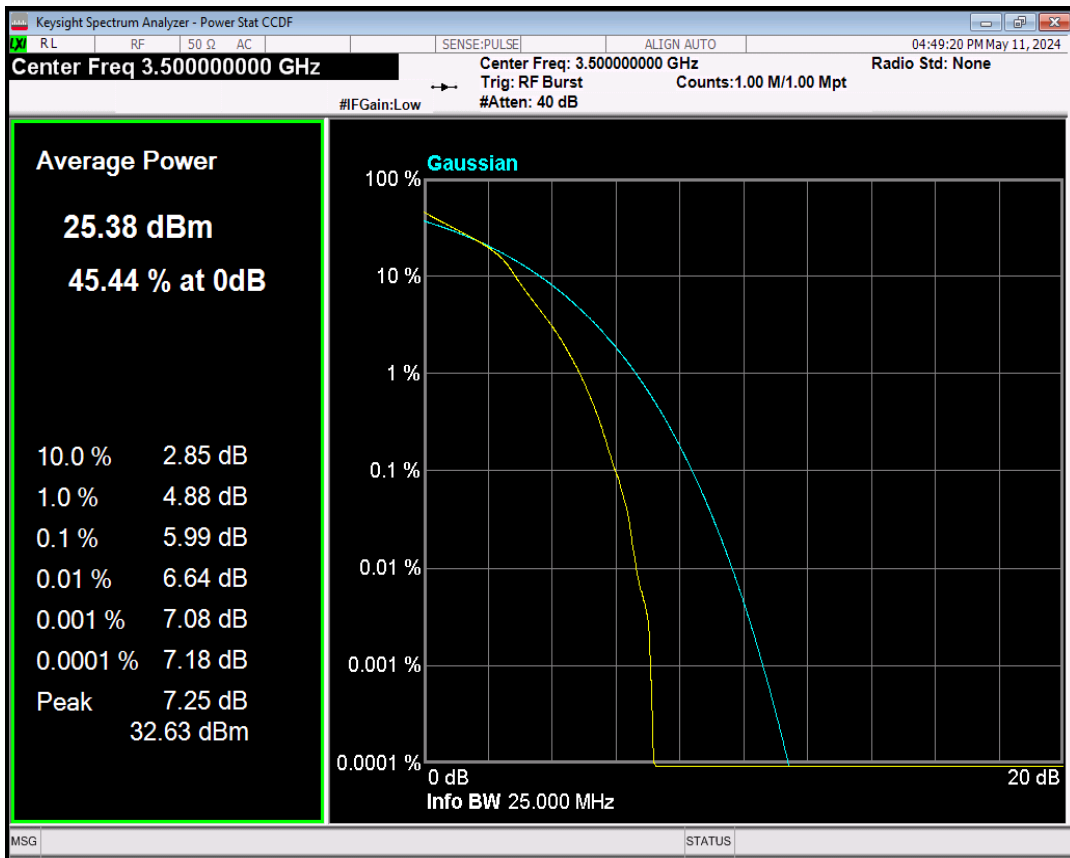


n78 SCS=30kHz DFT_QAM64 BW=20MHz Channel=633333 RB=50@0

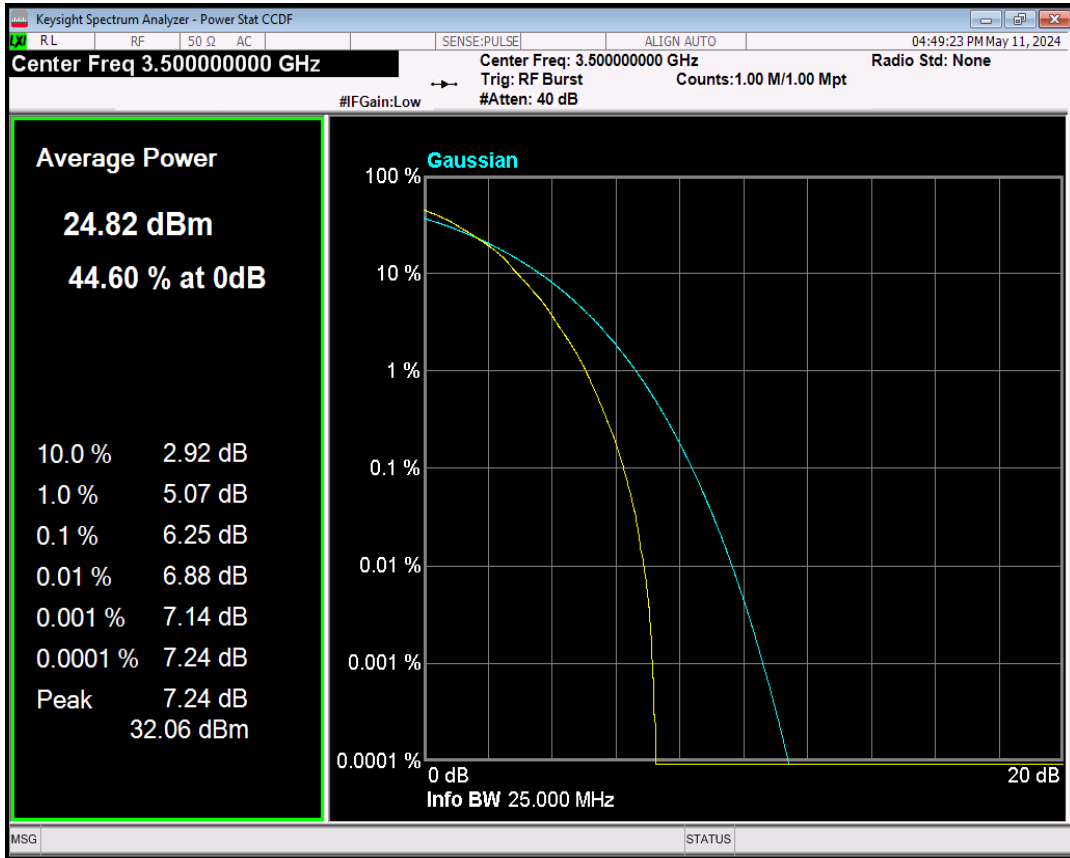


n78 SCS=30kHz DFT_QAM256 BW=20MHz Channel=633333 RB=50@0

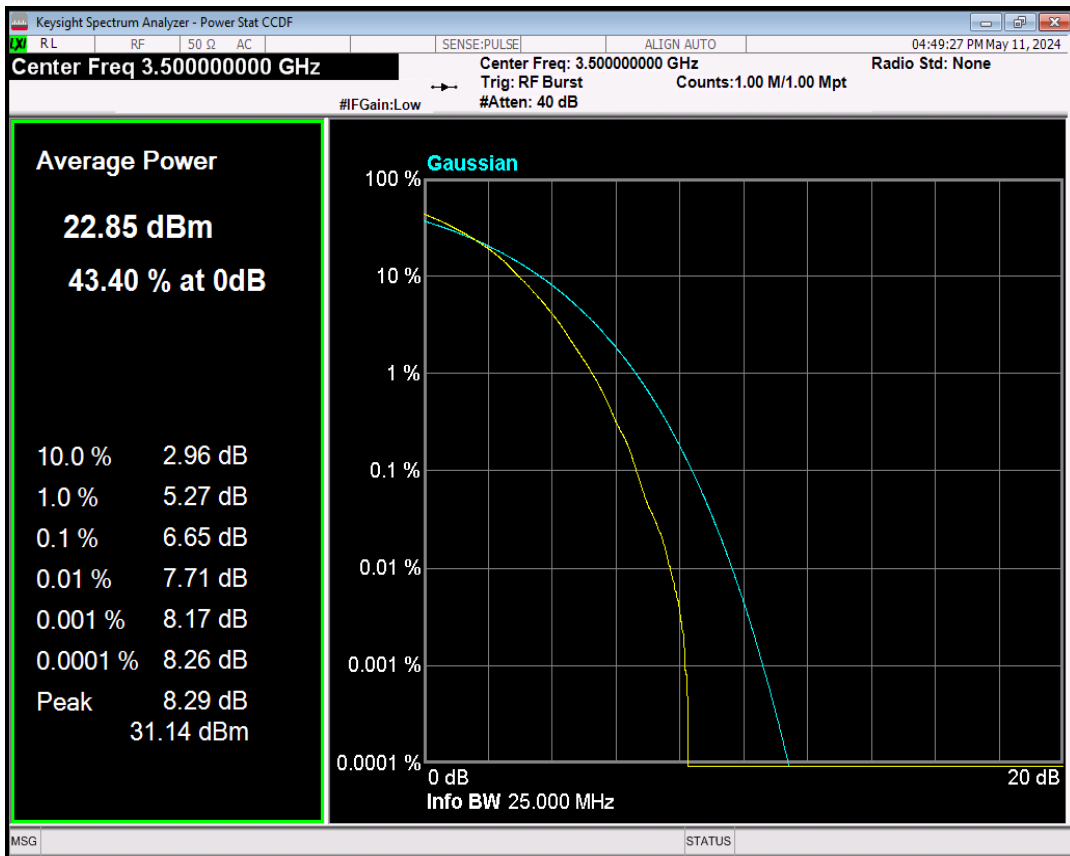


n78 SCS=30kHz DFT_BPSK BW=40MHz Channel=633333 RB=100@0

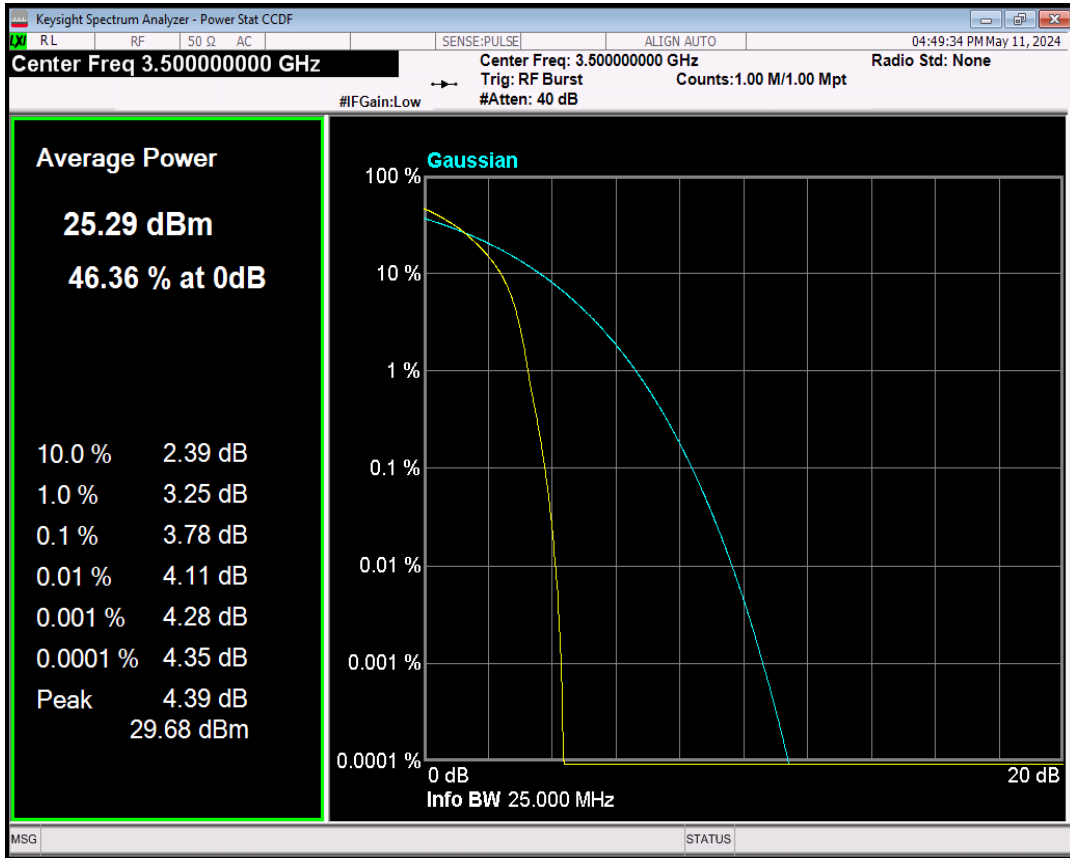


n78 SCS=30kHz DFT_QPSK BW=40MHz Channel=633333 RB=100@0

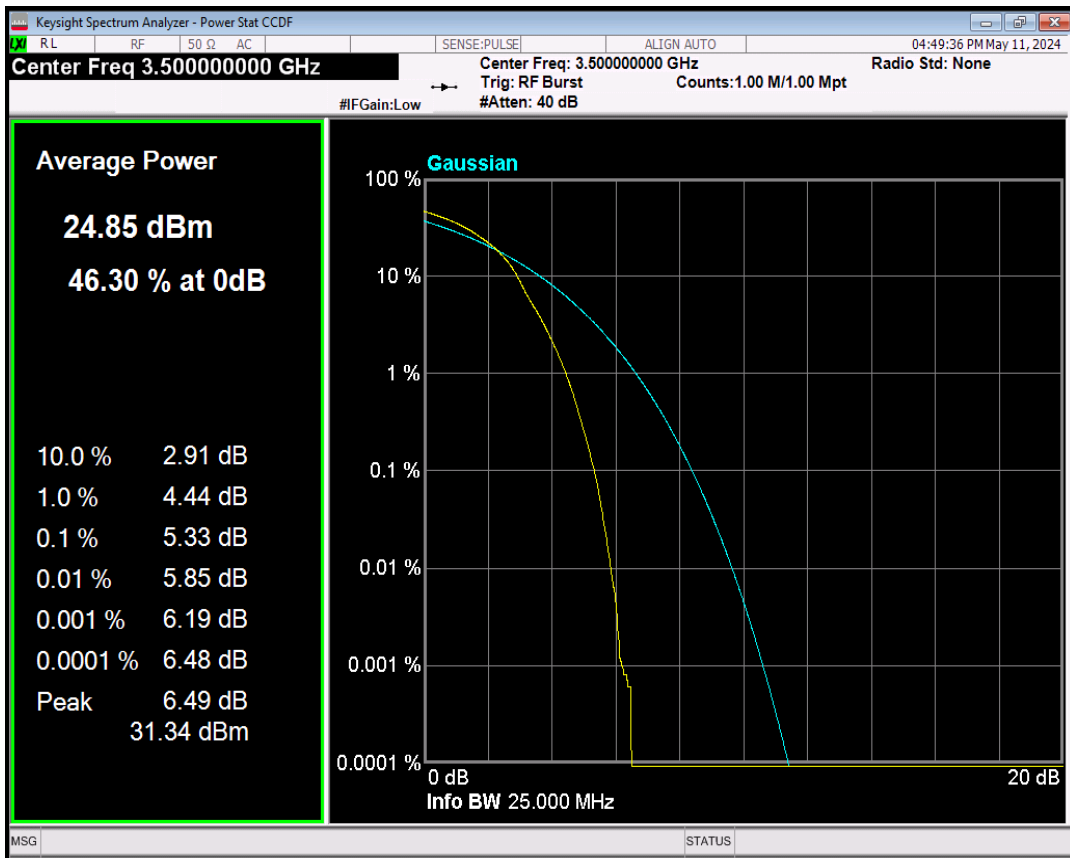


n78 SCS=30kHz DFT_QAM16 BW=40MHz Channel=633333 RB=100@0

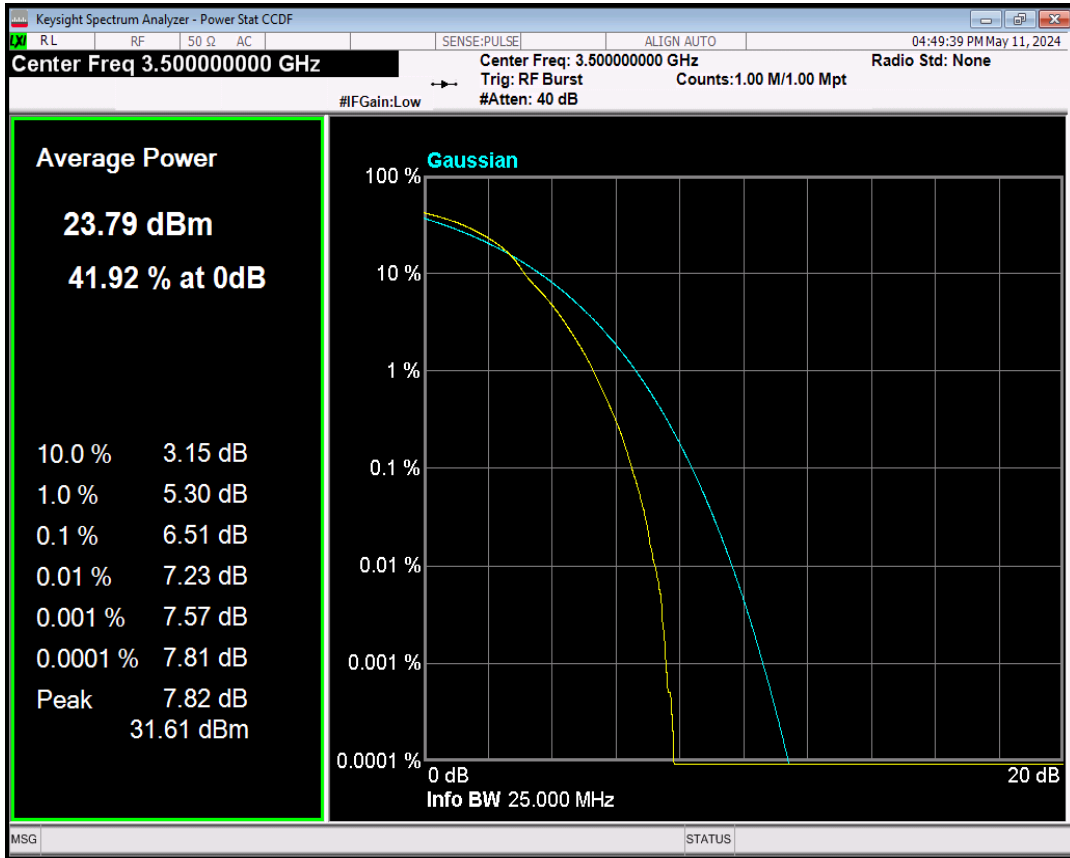


n78 SCS=30kHz DFT_QAM64 BW=40MHz Channel=633333 RB=100@0

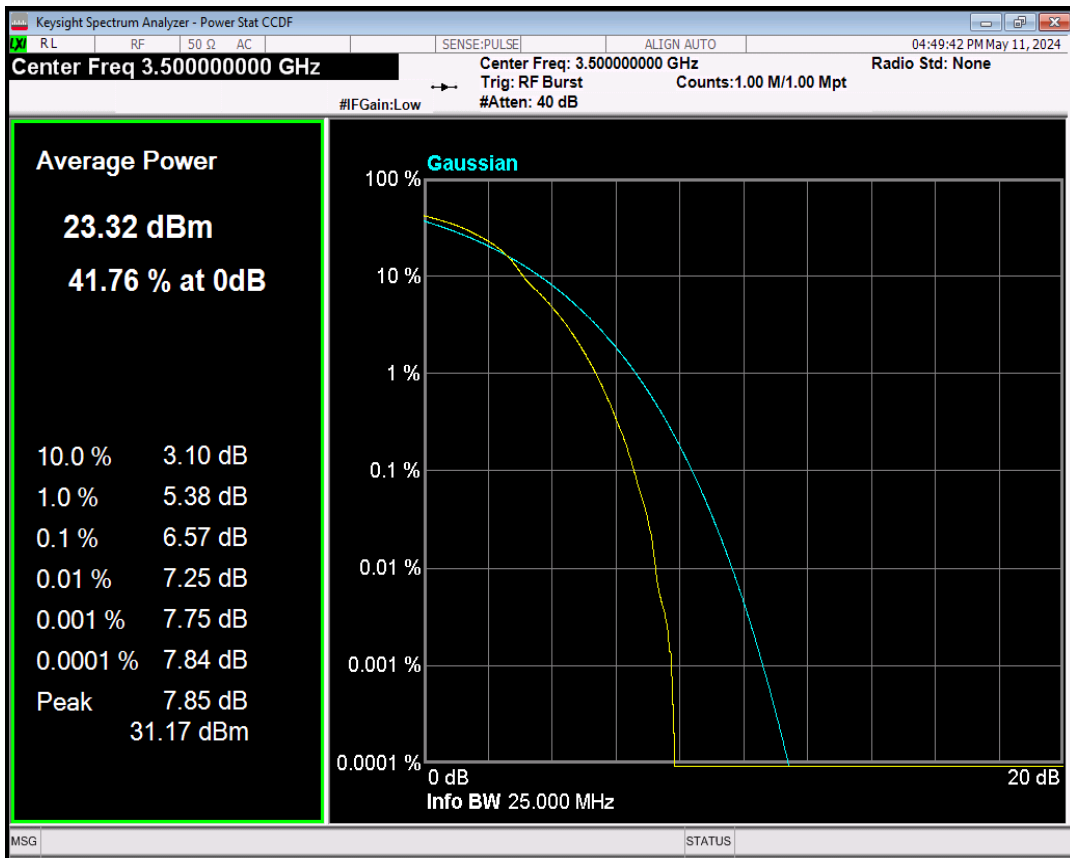


n78 SCS=30kHz DFT_QAM256 BW=40MHz Channel=633333 RB=100@0

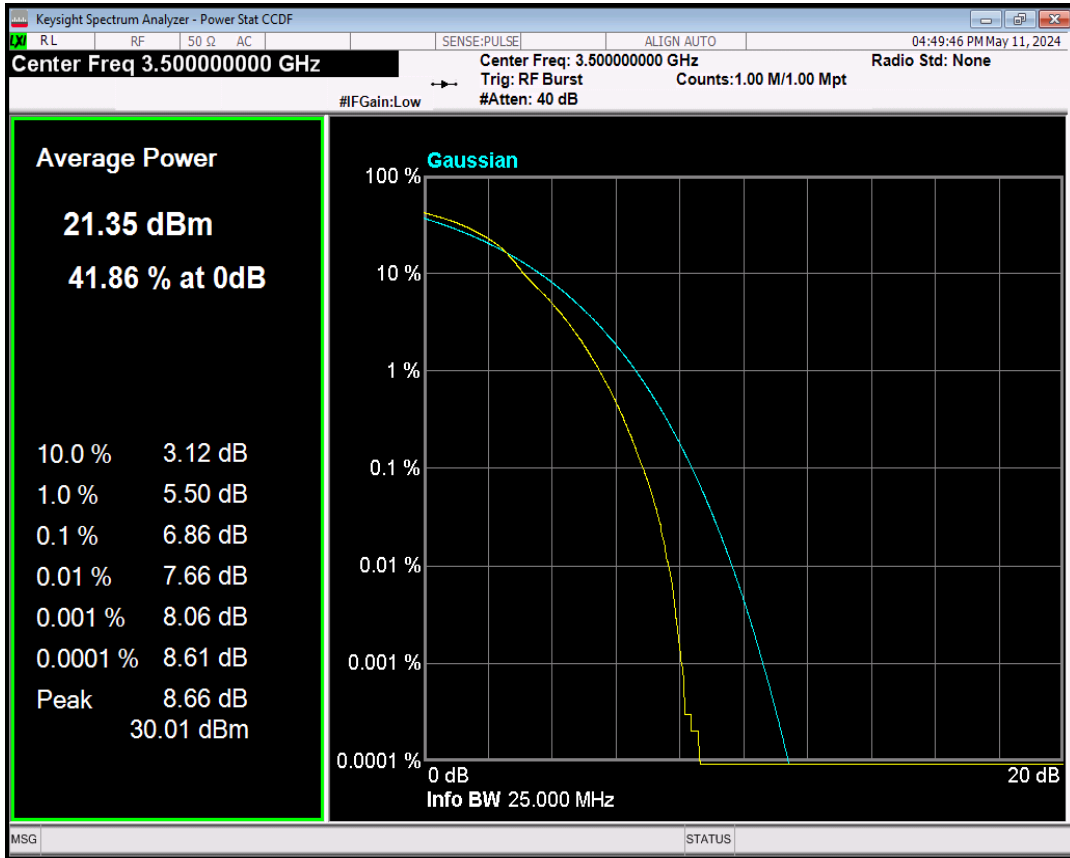


n78 SCS=30kHz DFT_BPSK BW=50MHz Channel=633333 RB=128@0

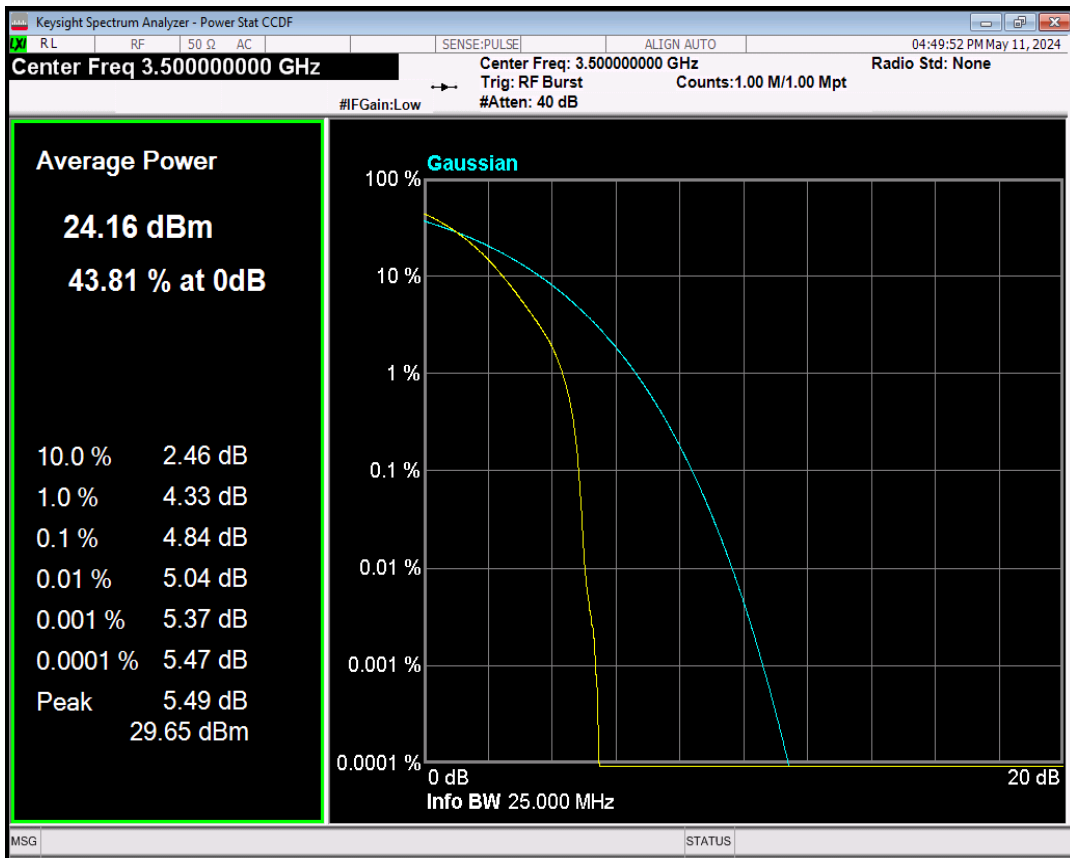


n78 SCS=30kHz DFT_QPSK BW=50MHz Channel=633333 RB=128@0

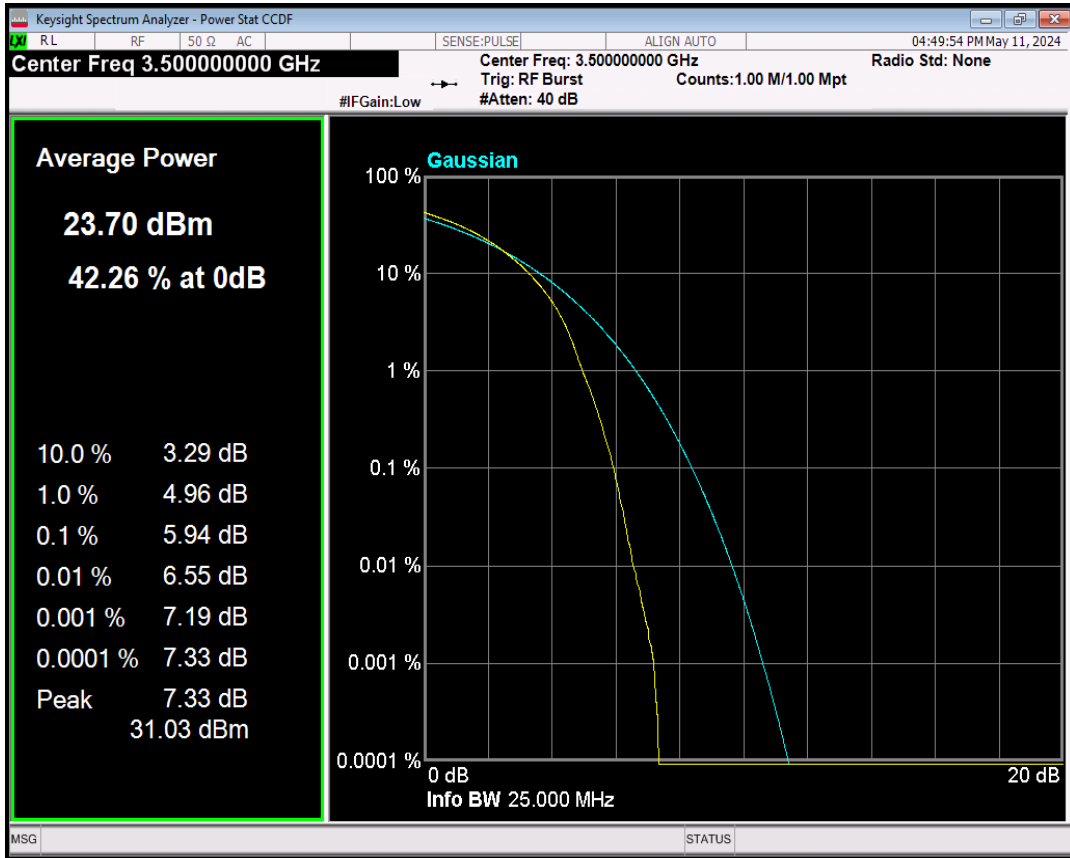


n78 SCS=30kHz DFT_QAM16 BW=50MHz Channel=633333 RB=128@0

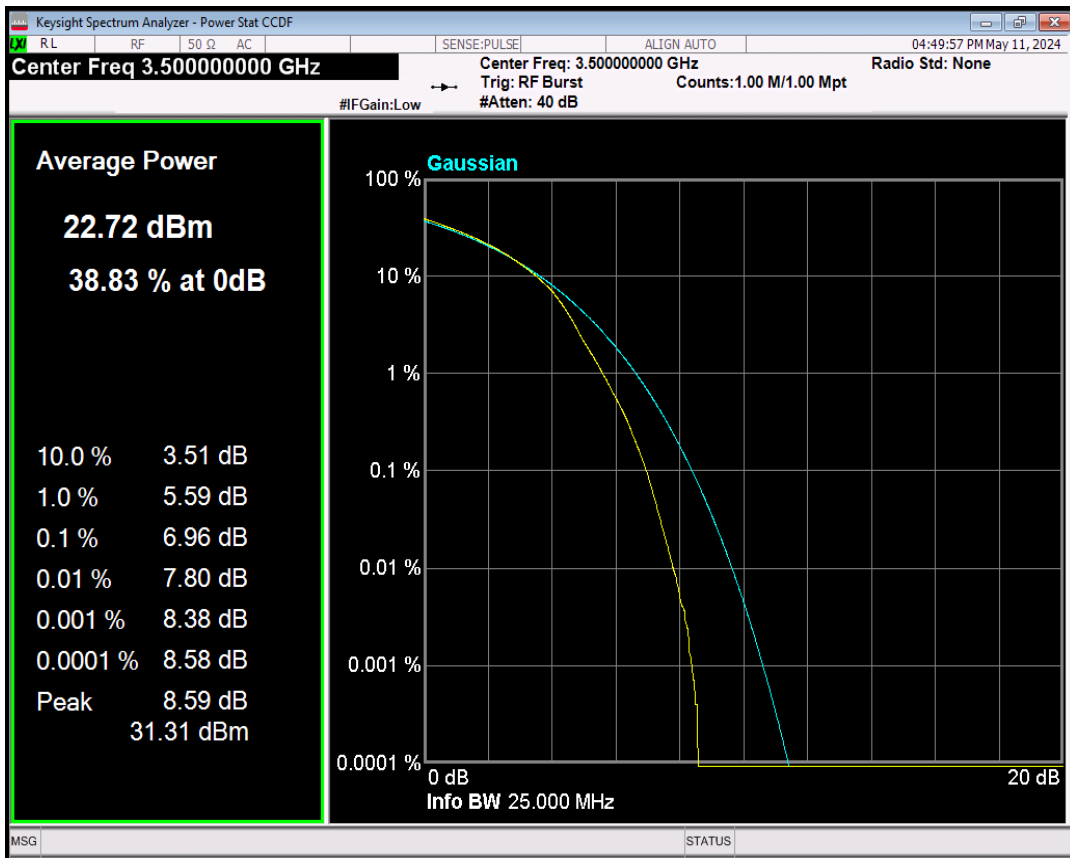


n78 SCS=30kHz DFT_QAM64 BW=50MHz Channel=633333 RB=128@0

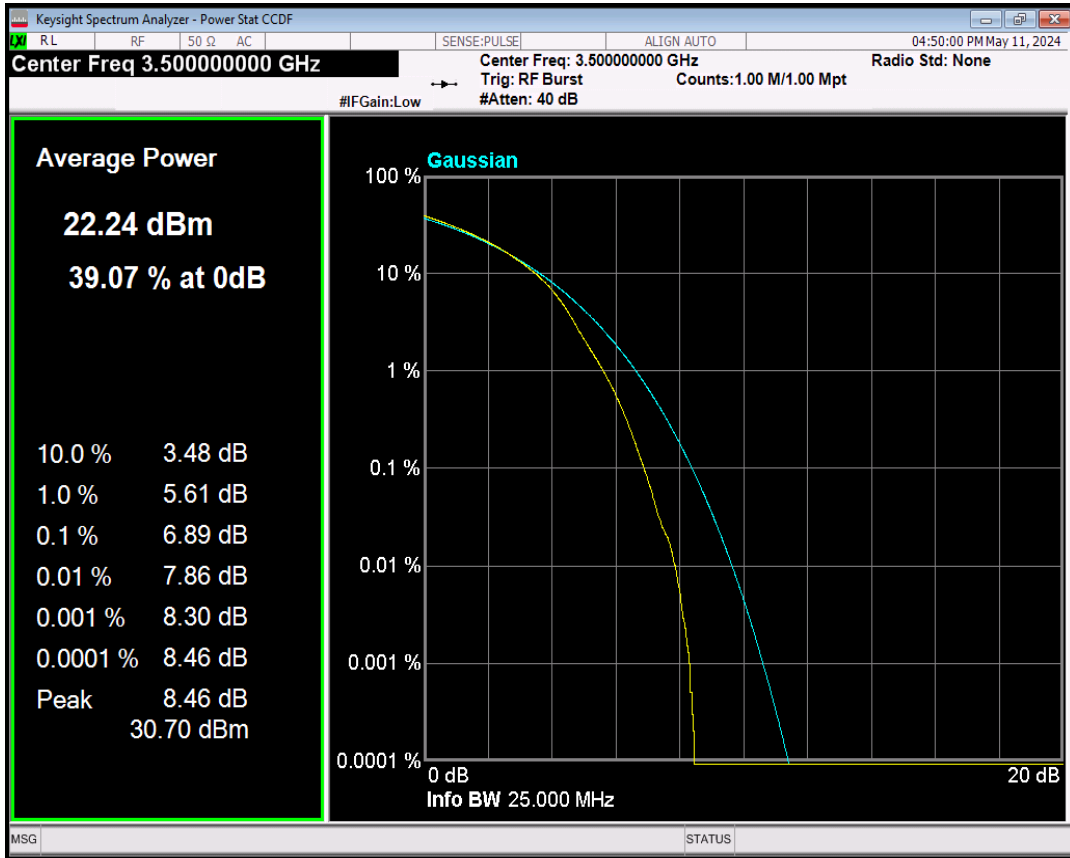


n78 SCS=30kHz DFT_QAM256 BW=50MHz Channel=633333 RB=128@0

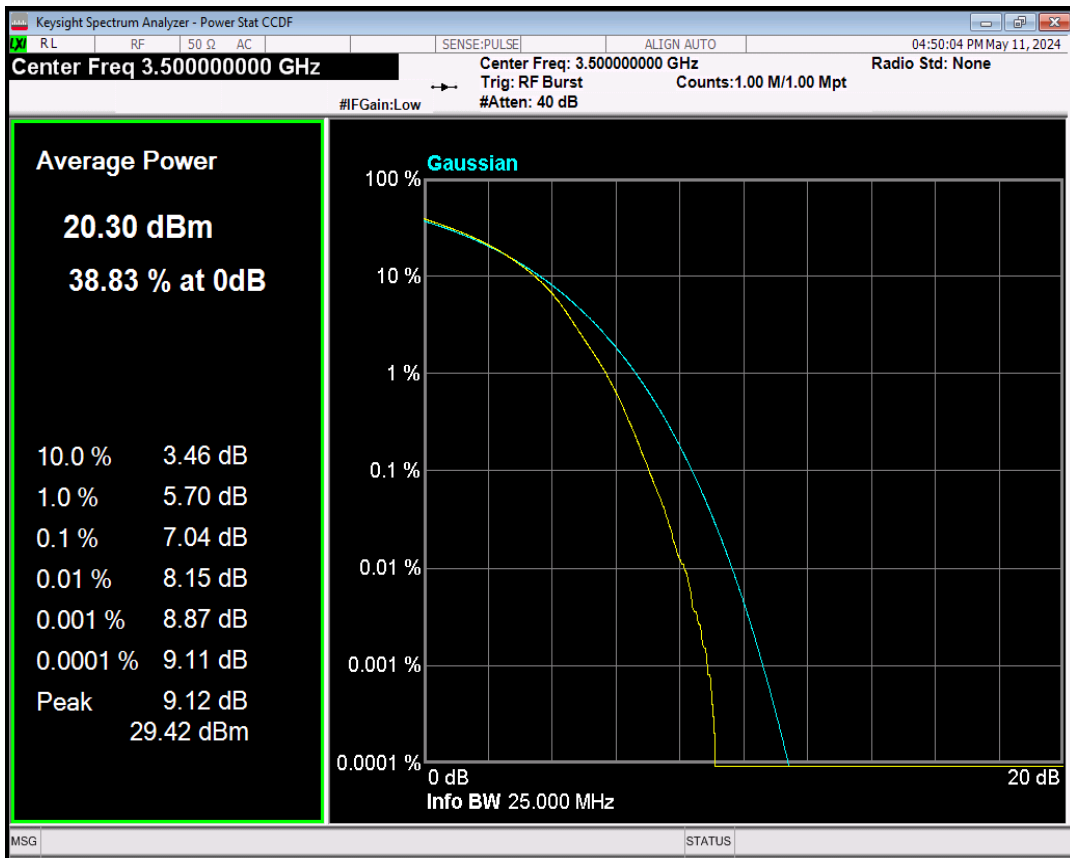


n78 SCS=30kHz DFT_BPSK BW=60MHz Channel=633333 RB=162@0

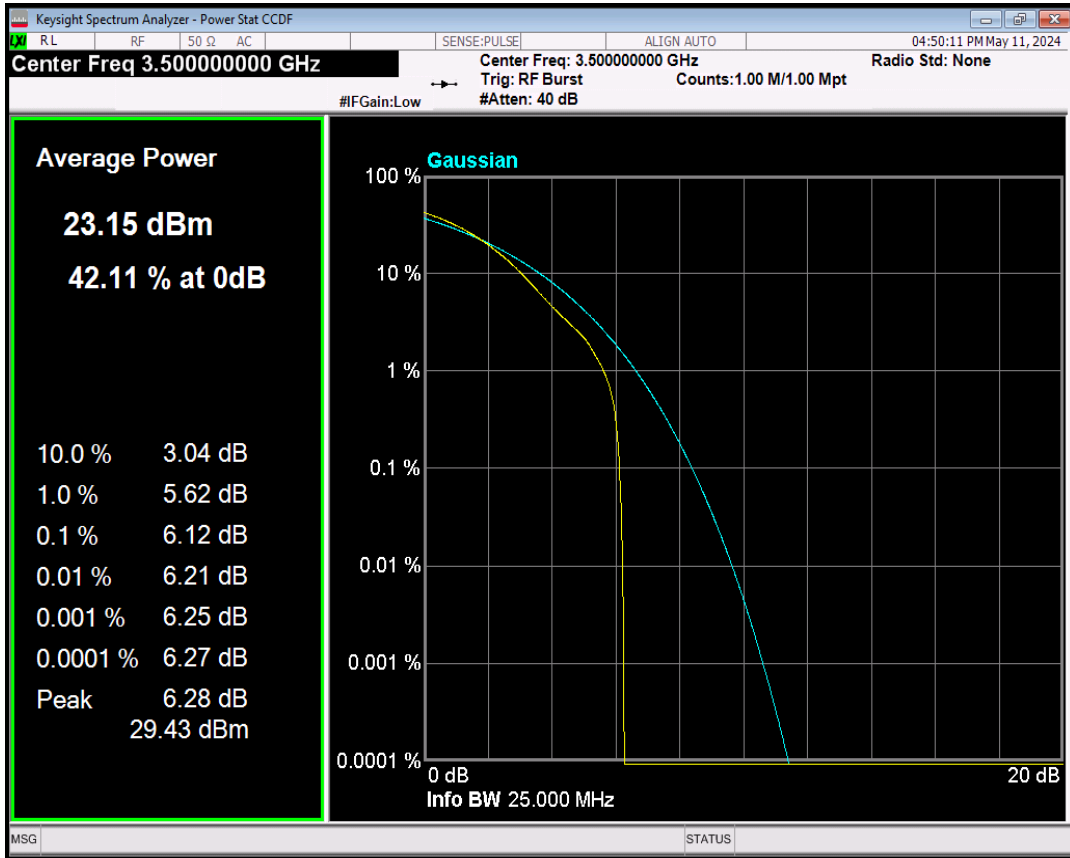


n78 SCS=30kHz DFT_QPSK BW=60MHz Channel=633333 RB=162@0

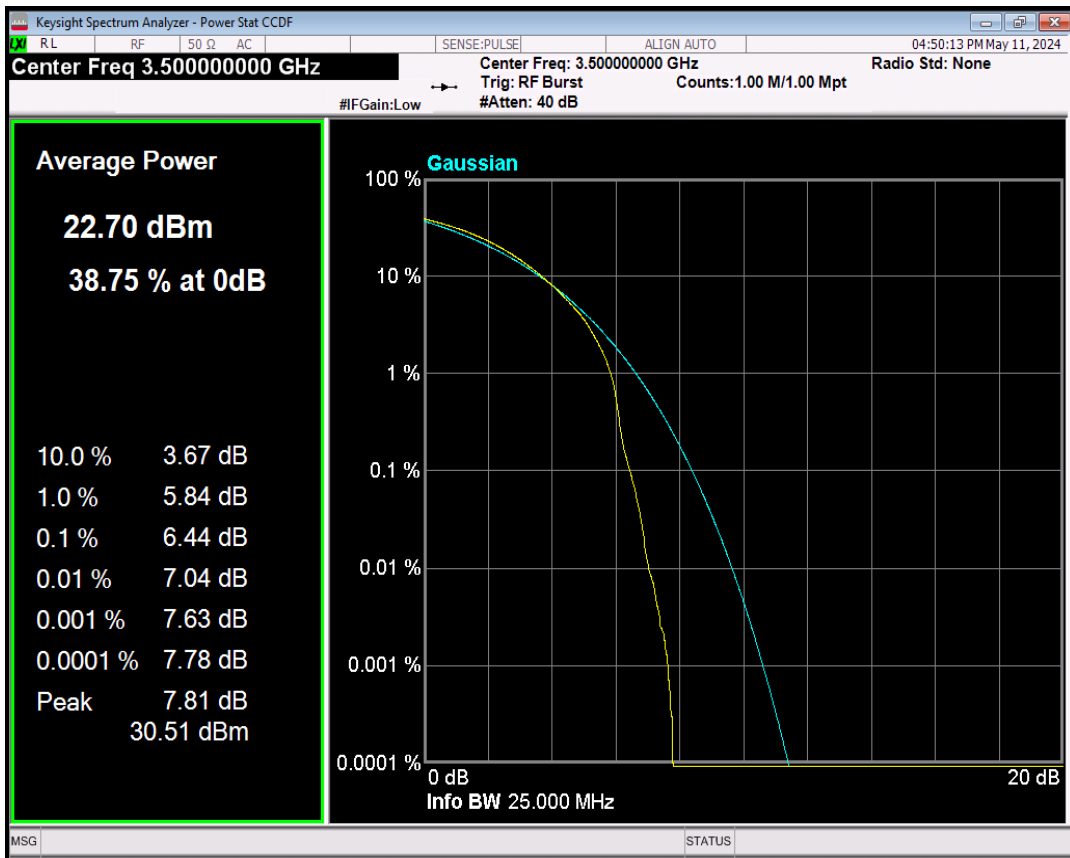


n78 SCS=30kHz DFT_QAM16 BW=60MHz Channel=633333 RB=162@0

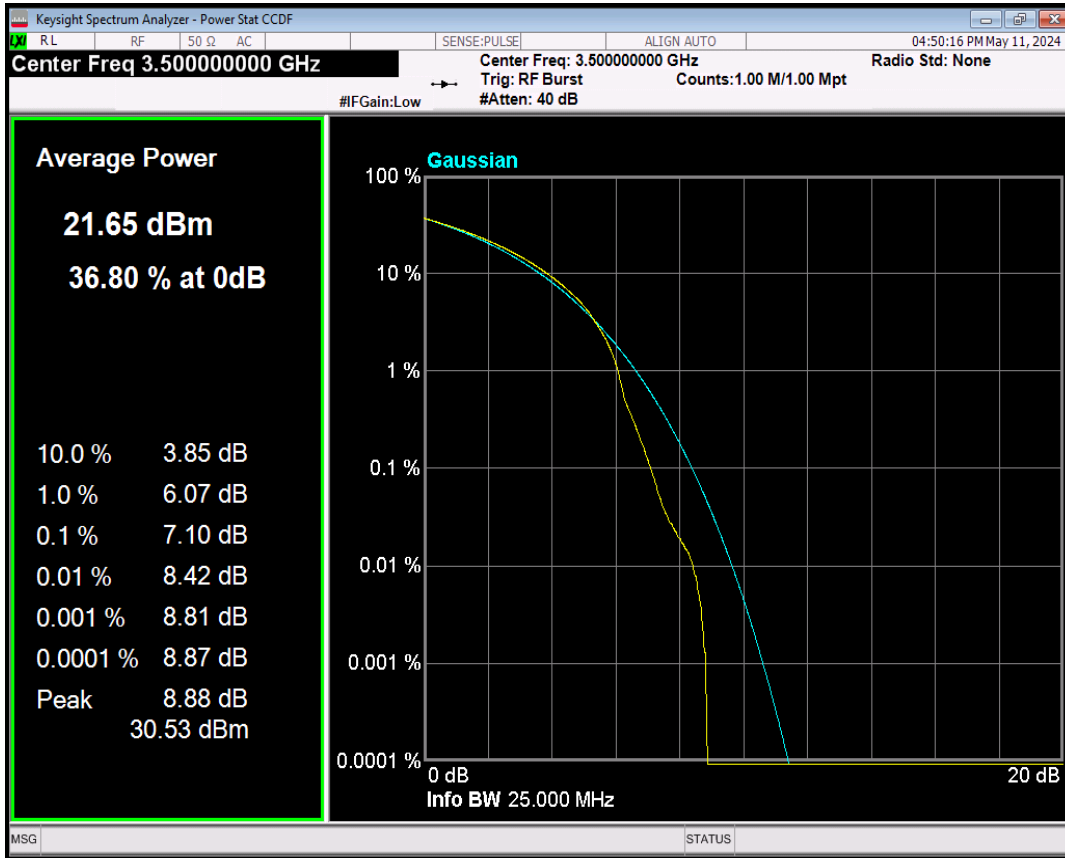


n78 SCS=30kHz DFT_QAM64 BW=60MHz Channel=633333 RB=162@0

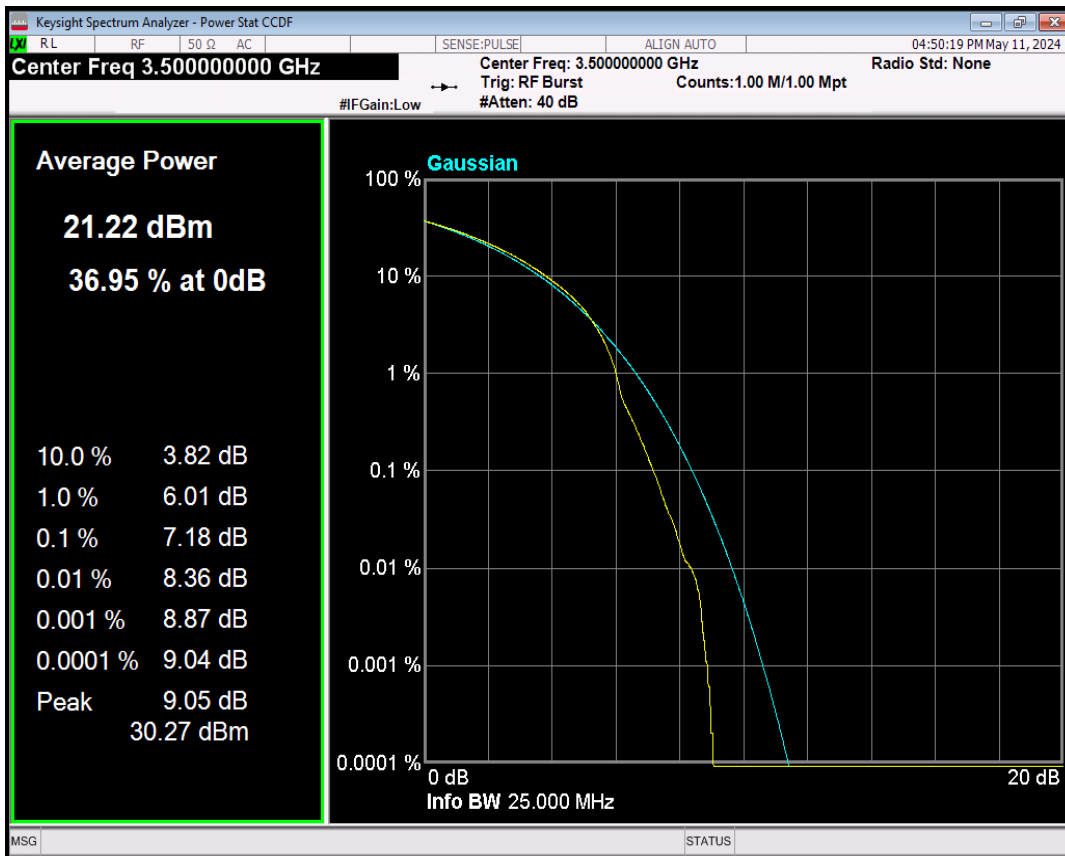


n78 SCS=30kHz DFT_QAM256 BW=60MHz Channel=633333 RB=162@0

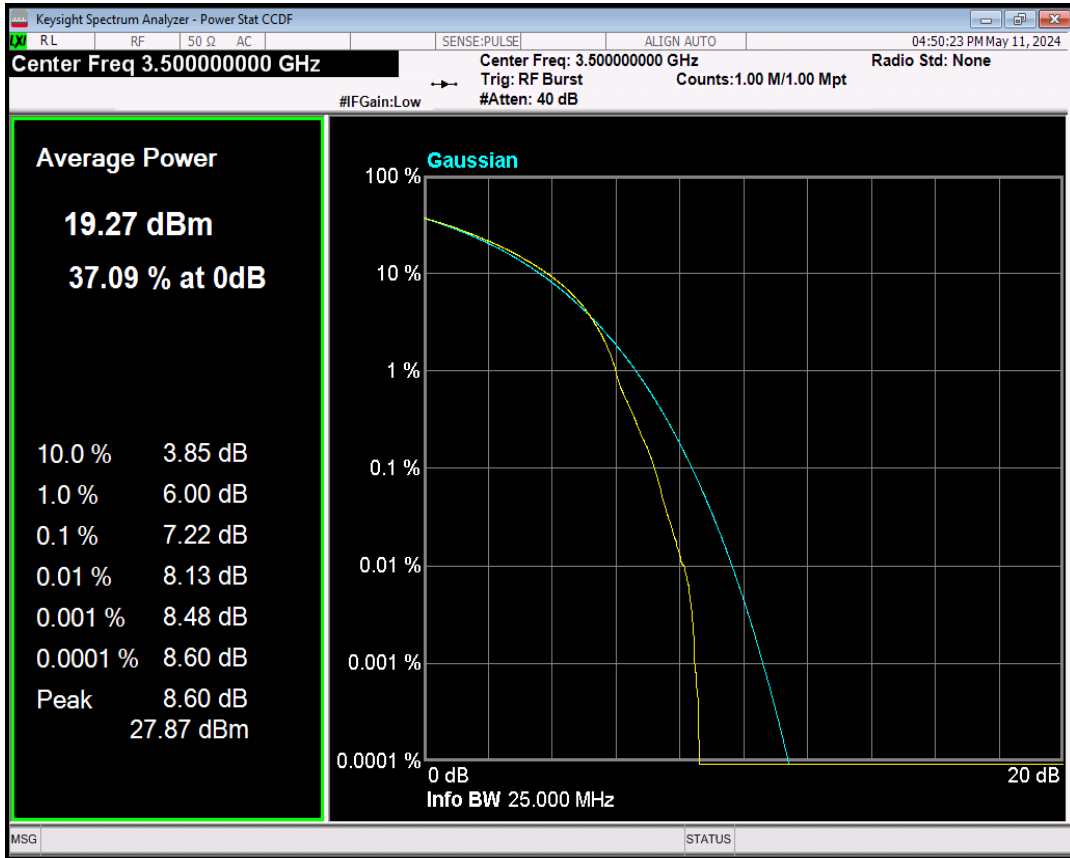


n78 SCS=30kHz DFT_BPSK BW=80MHz Channel=633333 RB=216@0

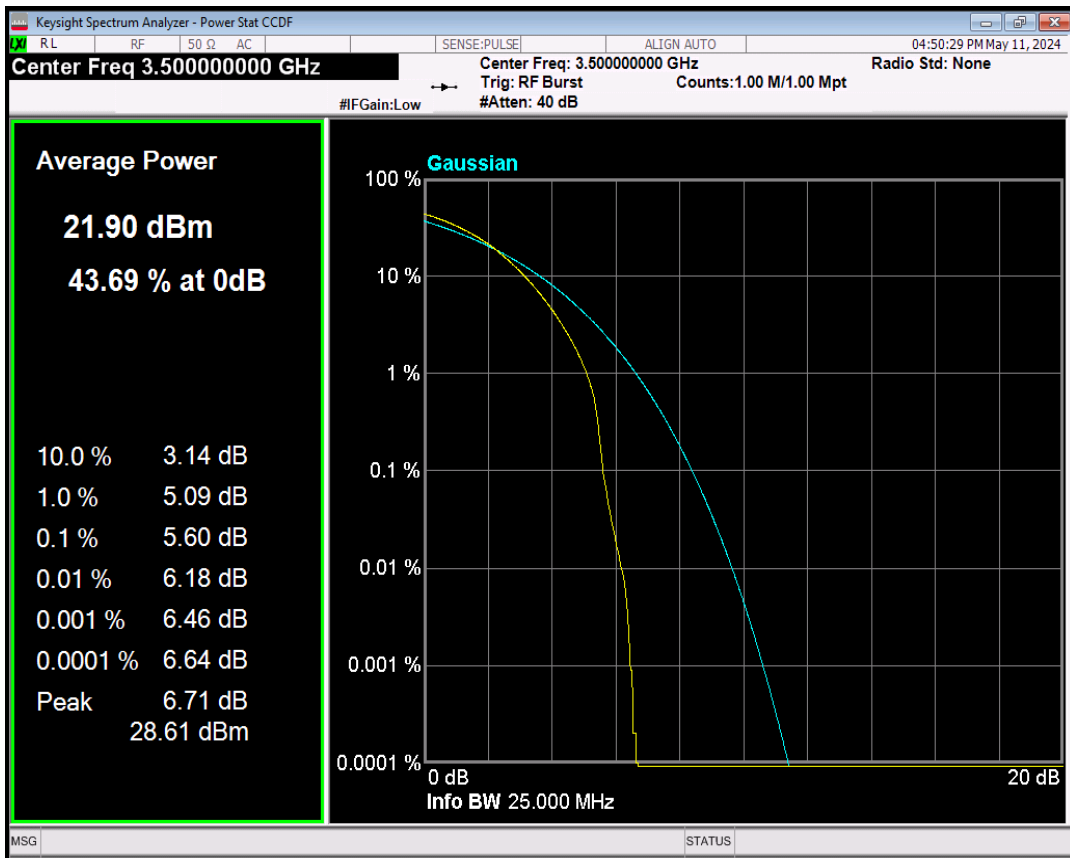



n78 SCS=30kHz DFT_QPSK BW=80MHz Channel=633333 RB=216@0

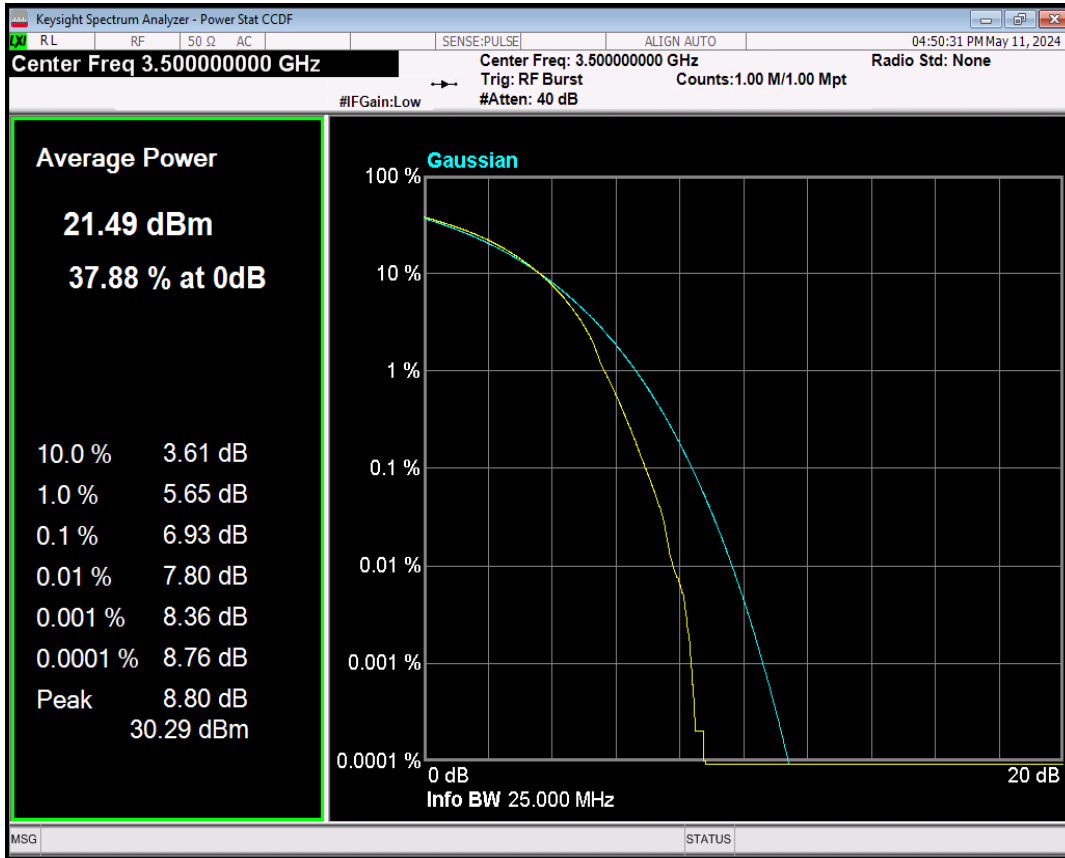


n78 SCS=30kHz DFT_QAM16 BW=80MHz Channel=633333 RB=216@0

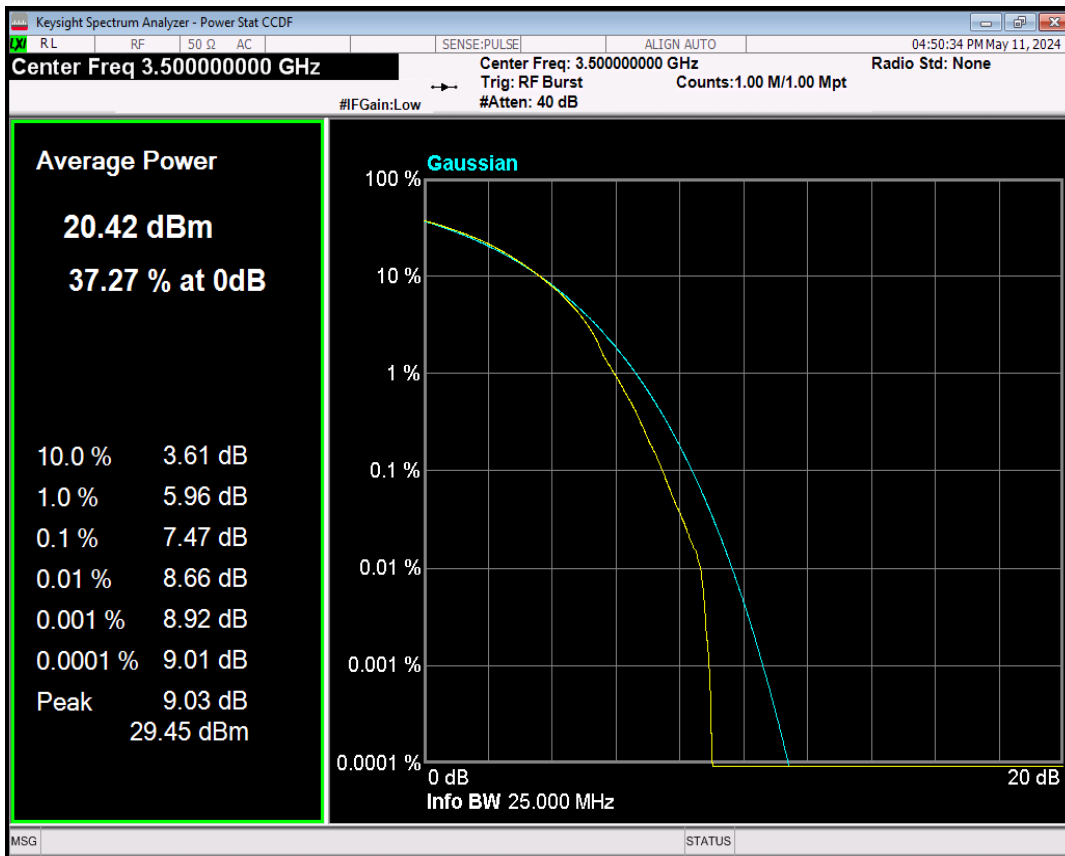


n78 SCS=30kHz DFT_QAM64 BW=80MHz Channel=633333 RB=216@0

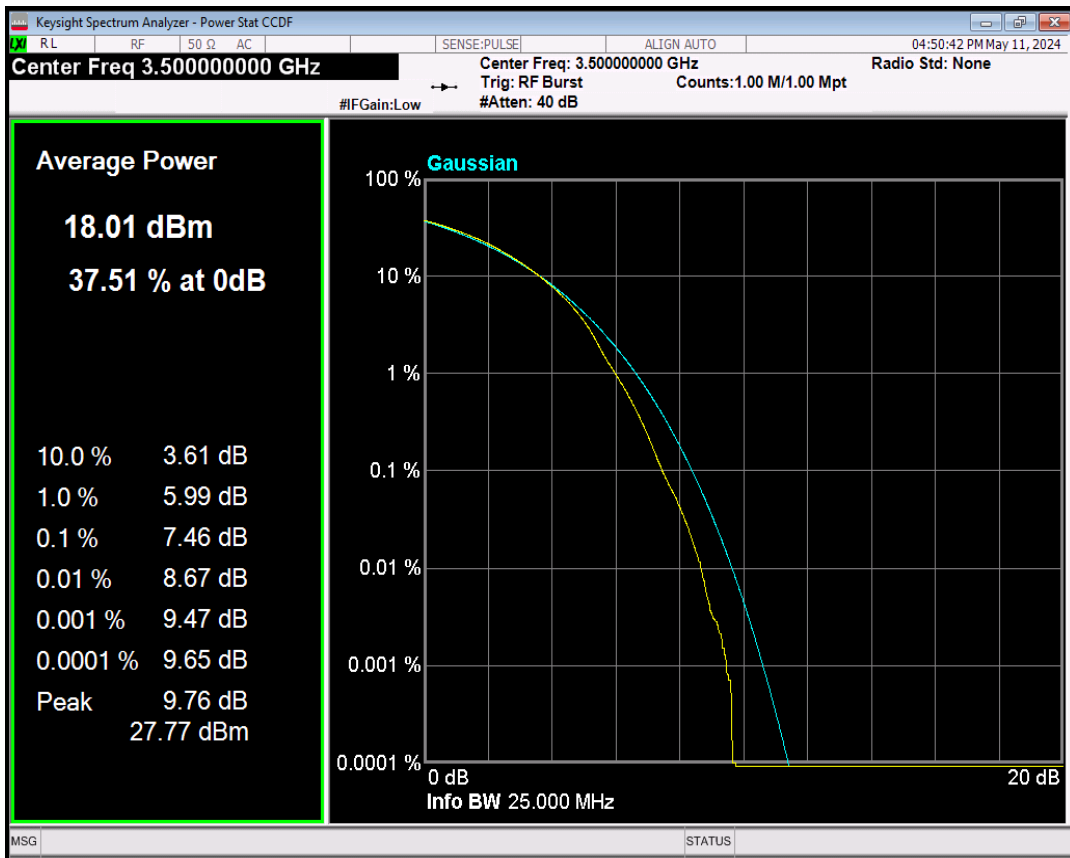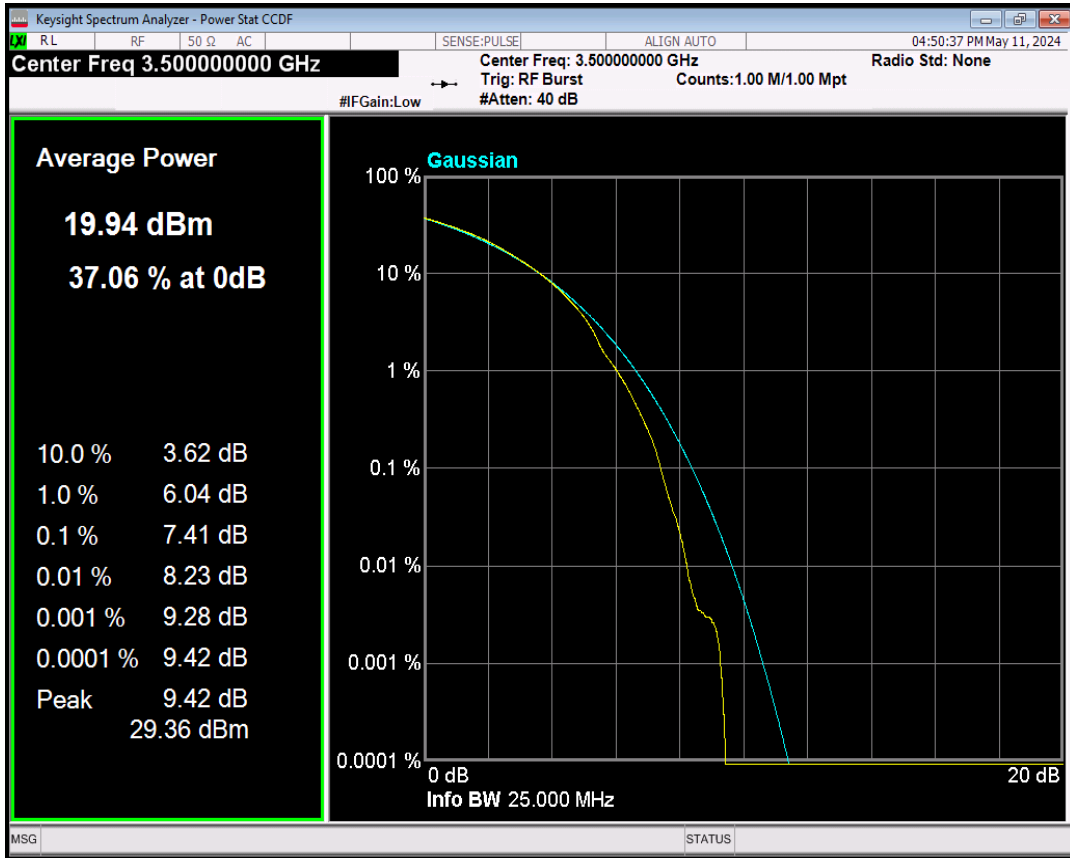


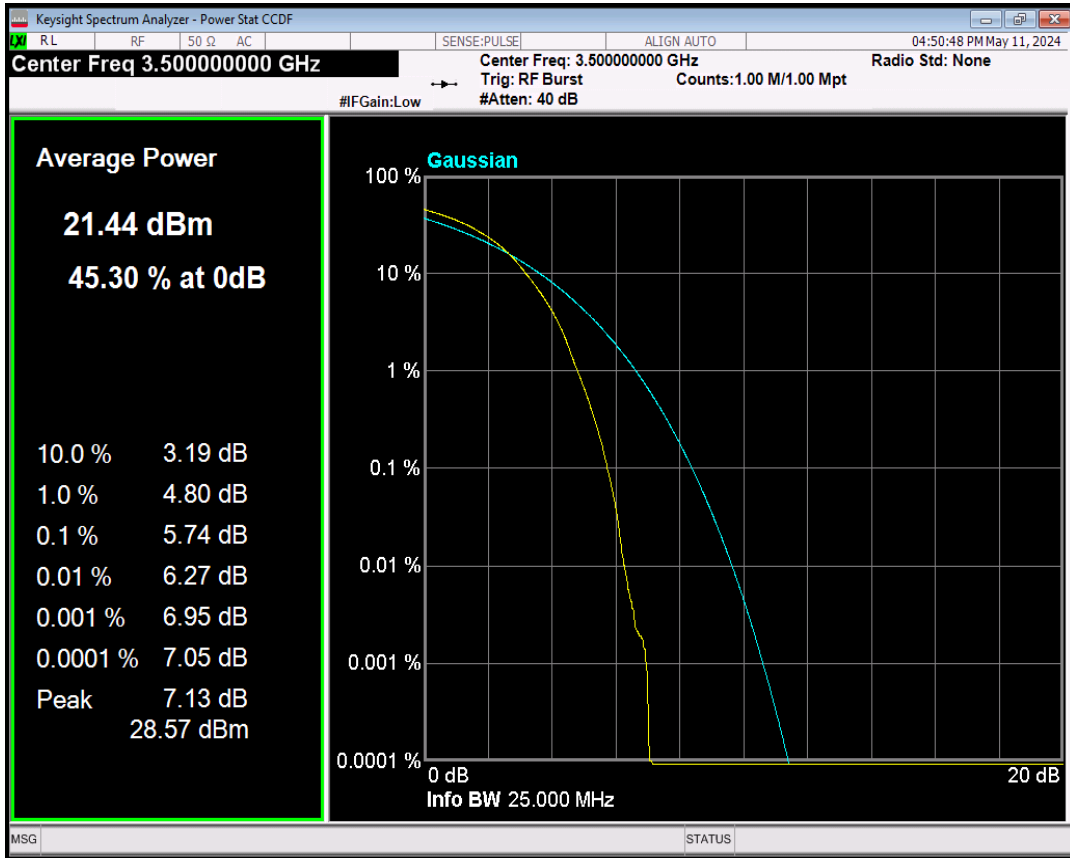


n78 SCS=30kHz DFT_QPSK BW=90MHz Channel=633333 RB=240@0

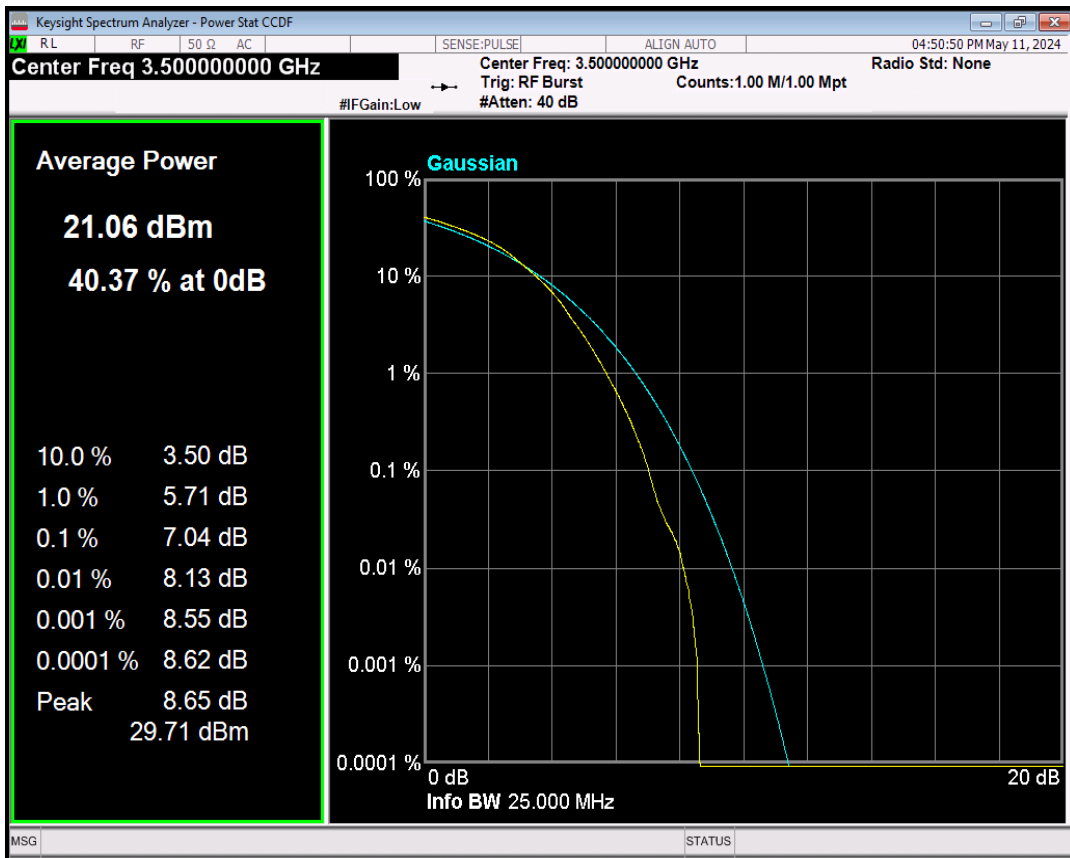


n78 SCS=30kHz DFT_QAM16 BW=90MHz Channel=633333 RB=240@0

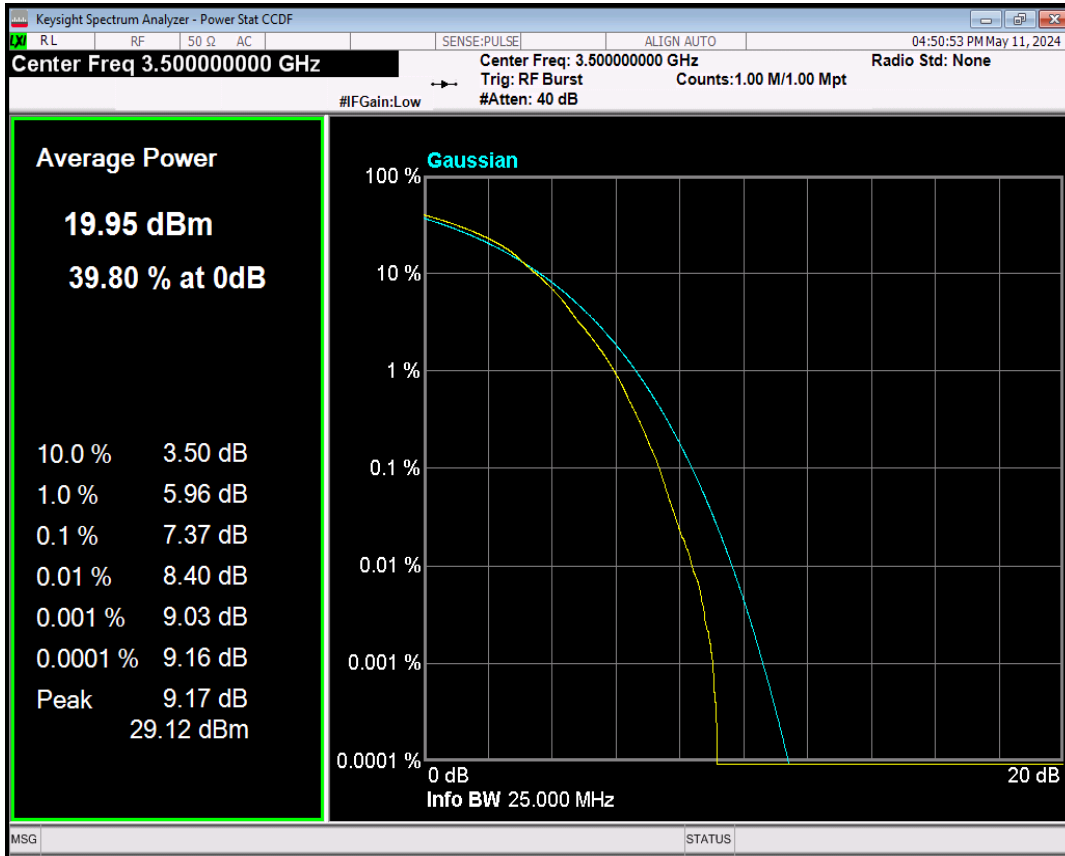


n78 SCS=30kHz DFT_QAM64 BW=90MHz Channel=633333 RB=240@0

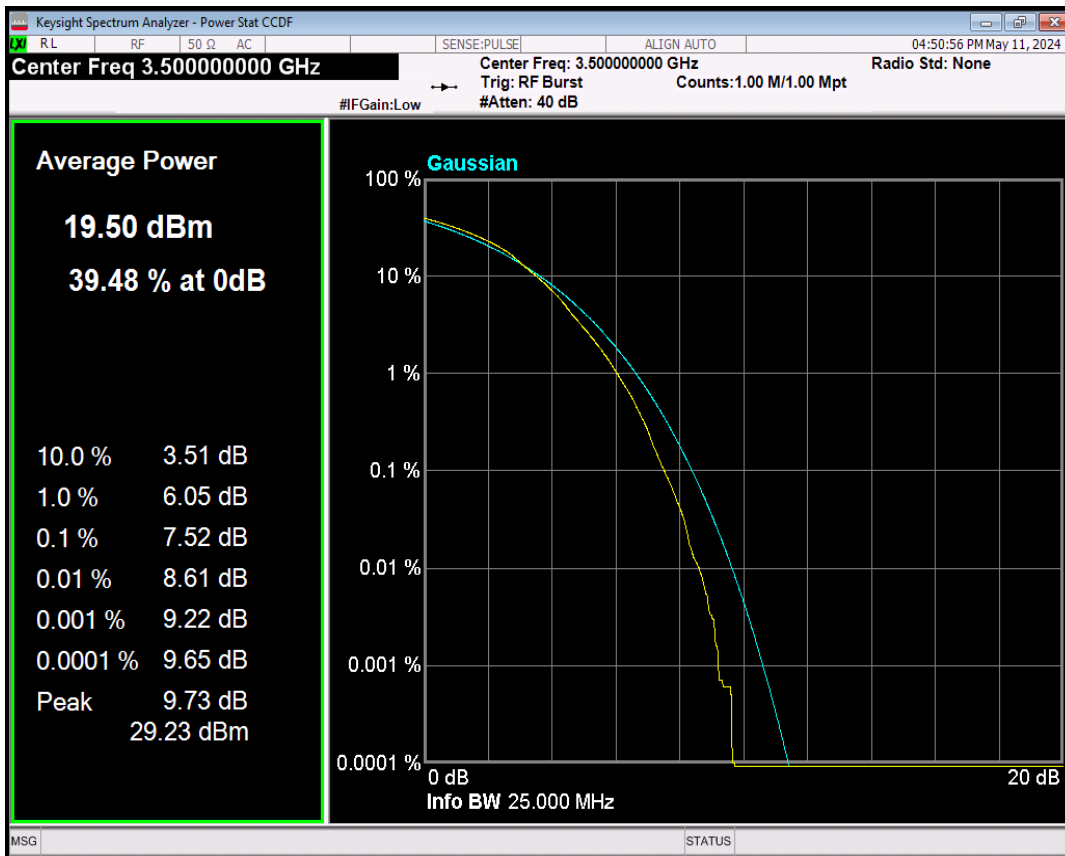


n78 SCS=30kHz DFT_QAM256 BW=90MHz Channel=633333 RB=240@0

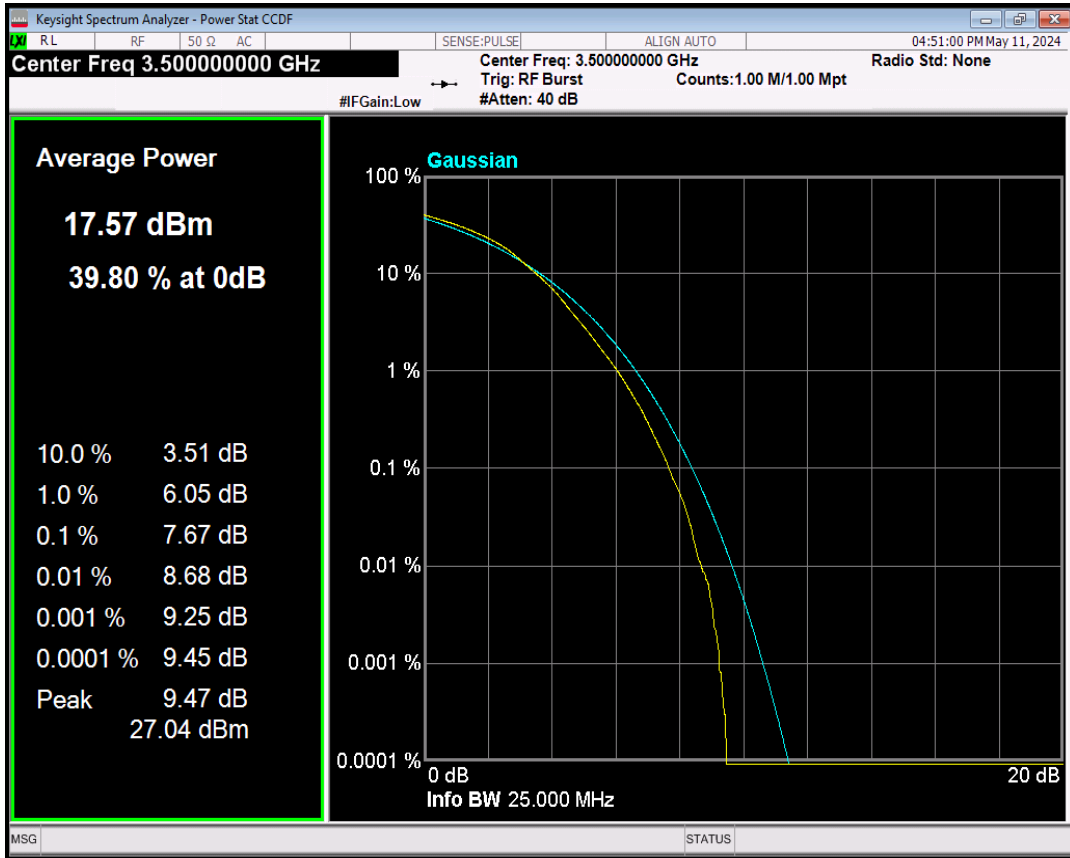


n78 SCS=30kHz DFT_BPSK BW=100MHz Channel=633333 RB=270@0

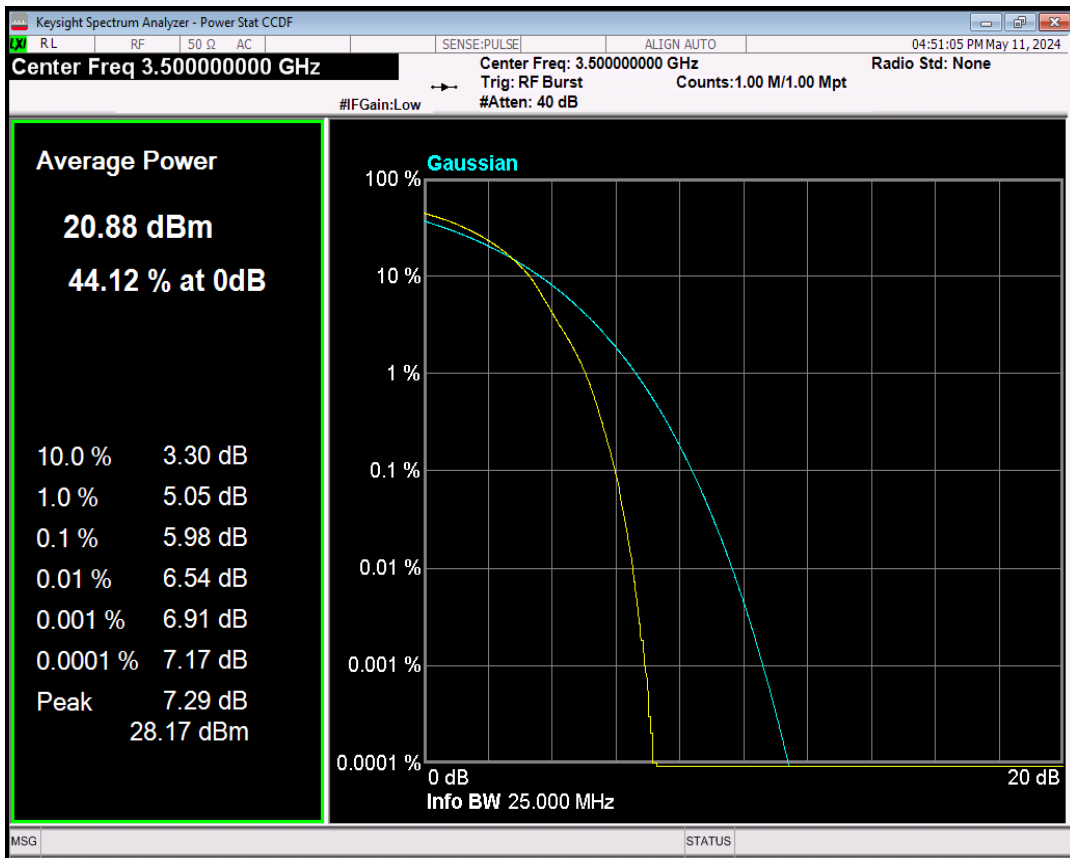


n78 SCS=30kHz DFT_QPSK BW=100MHz Channel=633333 RB=270@0

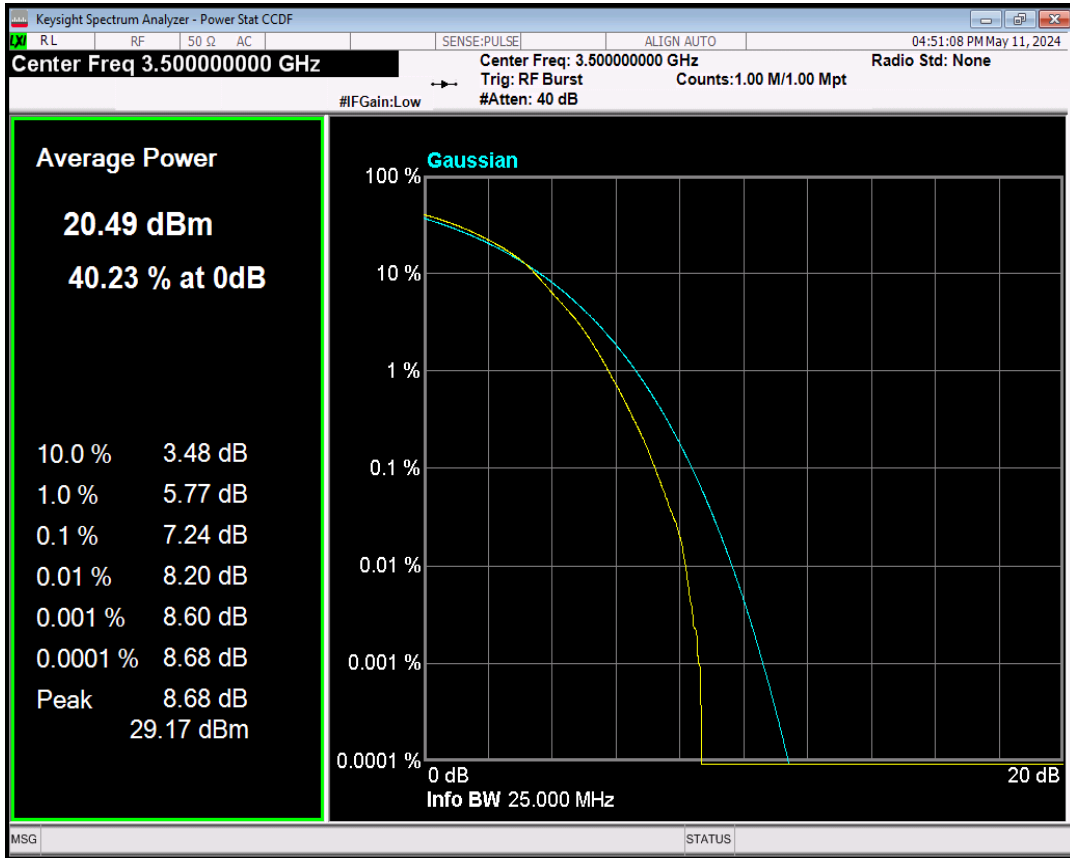


n78 SCS=30kHz DFT_QAM16 BW=100MHz Channel=633333 RB=270@0

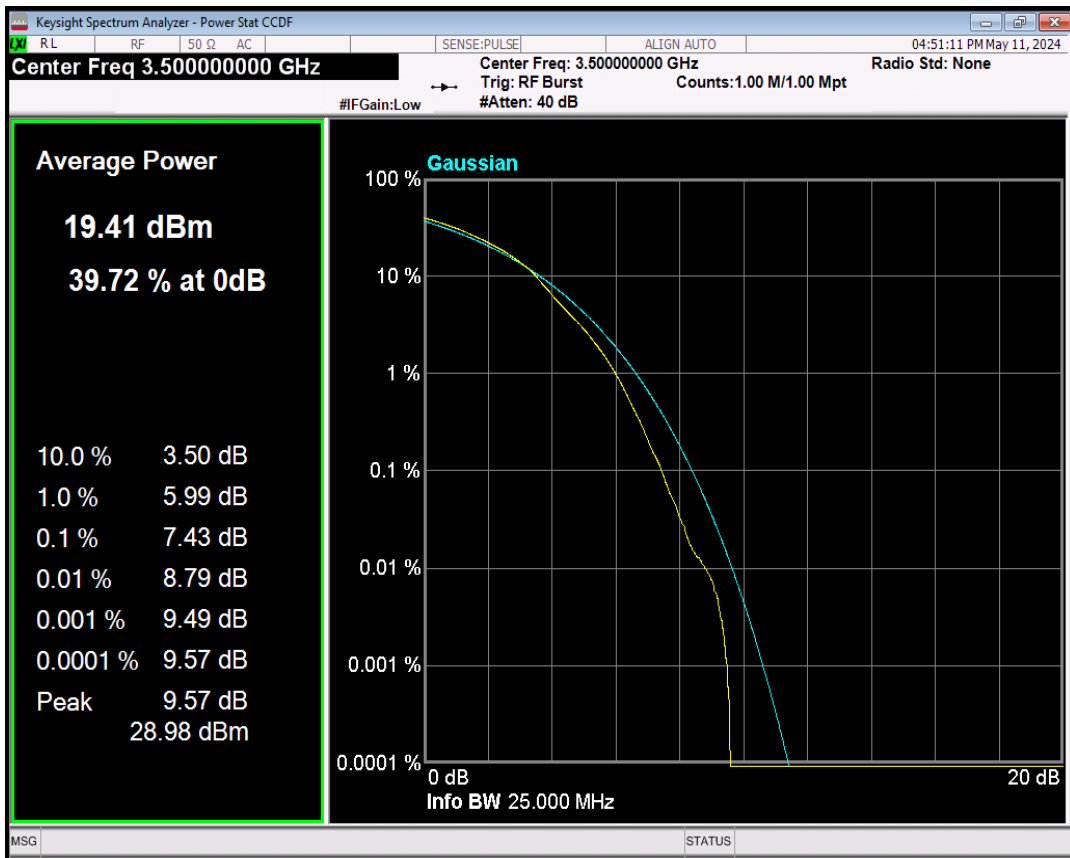

n78 SCS=30kHz DFT_QAM64 BW=100MHz Channel=633333 RB=270@0

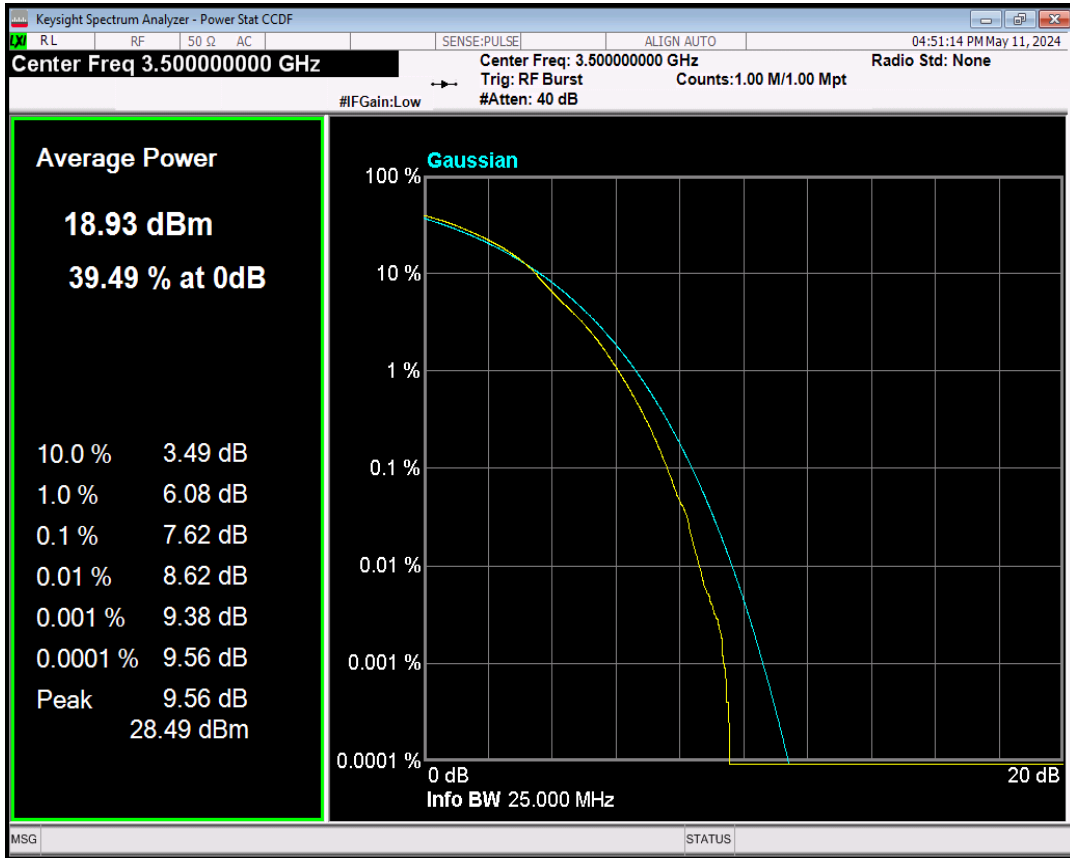

n78 SCS=30kHz DFT_QAM256 BW=100MHz Channel=633333 RB=270@0

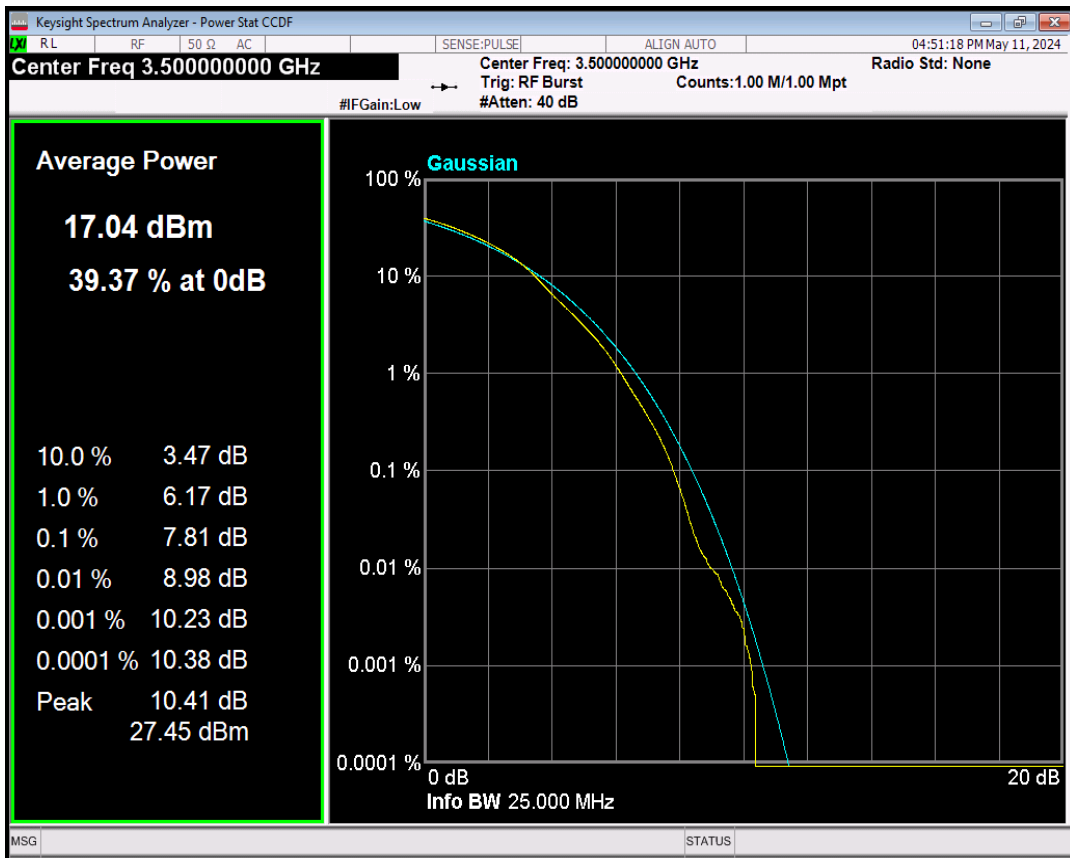


Occupied bandwidth for NR FR1


Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	99% OBW (MHz)	-26dB EBW (MHz)	Verdict
n78	30	10	633333	24@0	DFT_BPSK	8.663	9.388	PASS
n78	30	10	633333	24@0	DFT_QPSK	8.653	9.319	PASS
n78	30	10	633333	24@0	DFT_QAM16	8.576	9.414	PASS
n78	30	10	633333	24@0	DFT_QAM64	8.591	9.363	PASS
n78	30	10	633333	24@0	DFT_QAM256	8.572	9.365	PASS
n78	30	15	633333	36@0	DFT_BPSK	12.906	13.758	PASS
n78	30	15	633333	36@0	DFT_QPSK	12.979	13.931	PASS
n78	30	15	633333	36@0	DFT_QAM16	12.888	13.826	PASS
n78	30	15	633333	36@0	DFT_QAM64	12.915	13.781	PASS
n78	30	15	633333	36@0	DFT_QAM256	12.906	13.685	PASS
n78	30	20	633333	50@0	DFT_BPSK	18.035	19.032	PASS
n78	30	20	633333	50@0	DFT_QPSK	17.950	19.114	PASS
n78	30	20	633333	50@0	DFT_QAM16	17.965	19.015	PASS
n78	30	20	633333	50@0	DFT_QAM64	18.012	19.005	PASS
n78	30	20	633333	50@0	DFT_QAM256	17.975	19.027	PASS
n78	30	40	633333	100@0	DFT_BPSK	36.007	37.854	PASS
n78	30	40	633333	100@0	DFT_QPSK	35.907	37.755	PASS
n78	30	40	633333	100@0	DFT_QAM16	35.844	37.814	PASS
n78	30	40	633333	100@0	DFT_QAM64	35.950	37.895	PASS
n78	30	40	633333	100@0	DFT_QAM256	35.823	37.777	PASS
n78	30	50	633333	128@0	DFT_BPSK	45.719	48.290	PASS
n78	30	50	633333	128@0	DFT_QPSK	45.821	48.279	PASS
n78	30	50	633333	128@0	DFT_QAM16	45.939	48.253	PASS
n78	30	50	633333	128@0	DFT_QAM64	45.932	48.251	PASS
n78	30	50	633333	128@0	DFT_QAM256	45.914	48.199	PASS
n78	30	60	633333	162@0	DFT_BPSK	58.058	60.916	PASS
n78	30	60	633333	162@0	DFT_QPSK	57.871	60.895	PASS
n78	30	60	633333	162@0	DFT_QAM16	57.996	60.927	PASS
n78	30	60	633333	162@0	DFT_QAM64	58.034	60.902	PASS
n78	30	60	633333	162@0	DFT_QAM256	57.951	60.943	PASS
n78	30	80	633333	216@0	DFT_BPSK	77.320	81.255	PASS
n78	30	80	633333	216@0	DFT_QPSK	77.312	81.314	PASS
n78	30	80	633333	216@0	DFT_QAM16	77.096	81.100	PASS
n78	30	80	633333	216@0	DFT_QAM64	77.262	81.142	PASS
n78	30	80	633333	216@0	DFT_QAM256	77.206	81.091	PASS
n78	30	90	633333	240@0	DFT_BPSK	85.938	90.413	PASS
n78	30	90	633333	240@0	DFT_QPSK	85.707	90.366	PASS
n78	30	90	633333	240@0	DFT_QAM16	85.786	90.448	PASS
n78	30	90	633333	240@0	DFT_QAM64	85.857	90.378	PASS
n78	30	90	633333	240@0	DFT_QAM256	85.905	90.227	PASS

n78	30	100	633333	270@0	DFT_BPSK	96.431	101.468	PASS
n78	30	100	633333	270@0	DFT_QPSK	96.583	101.626	PASS
n78	30	100	633333	270@0	DFT_QAM16	96.151	101.432	PASS
n78	30	100	633333	270@0	DFT_QAM64	96.399	101.315	PASS
n78	30	100	633333	270@0	DFT_QAM256	96.415	101.496	PASS


n78 SCS=30kHz DFT_BPSK BW=10MHz Channel=633333 RB=24@0

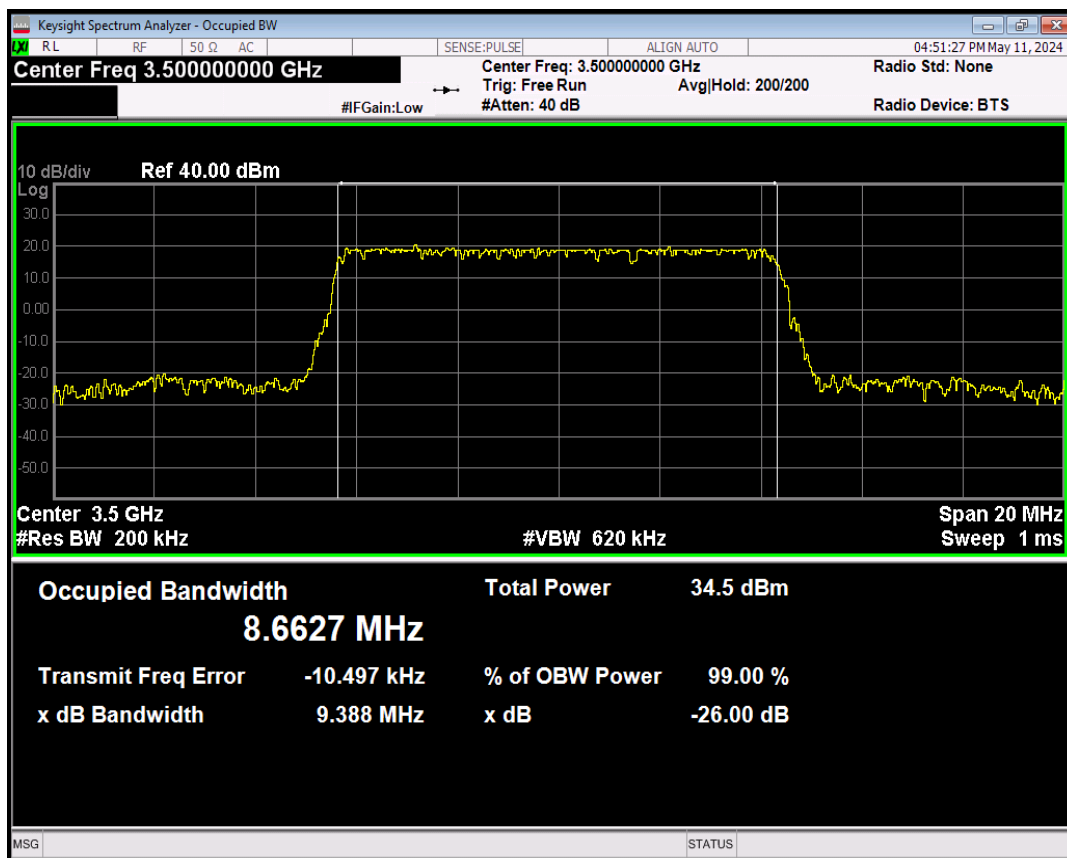


n78 SCS=30kHz DFT_QPSK BW=10MHz Channel=633333 RB=24@0

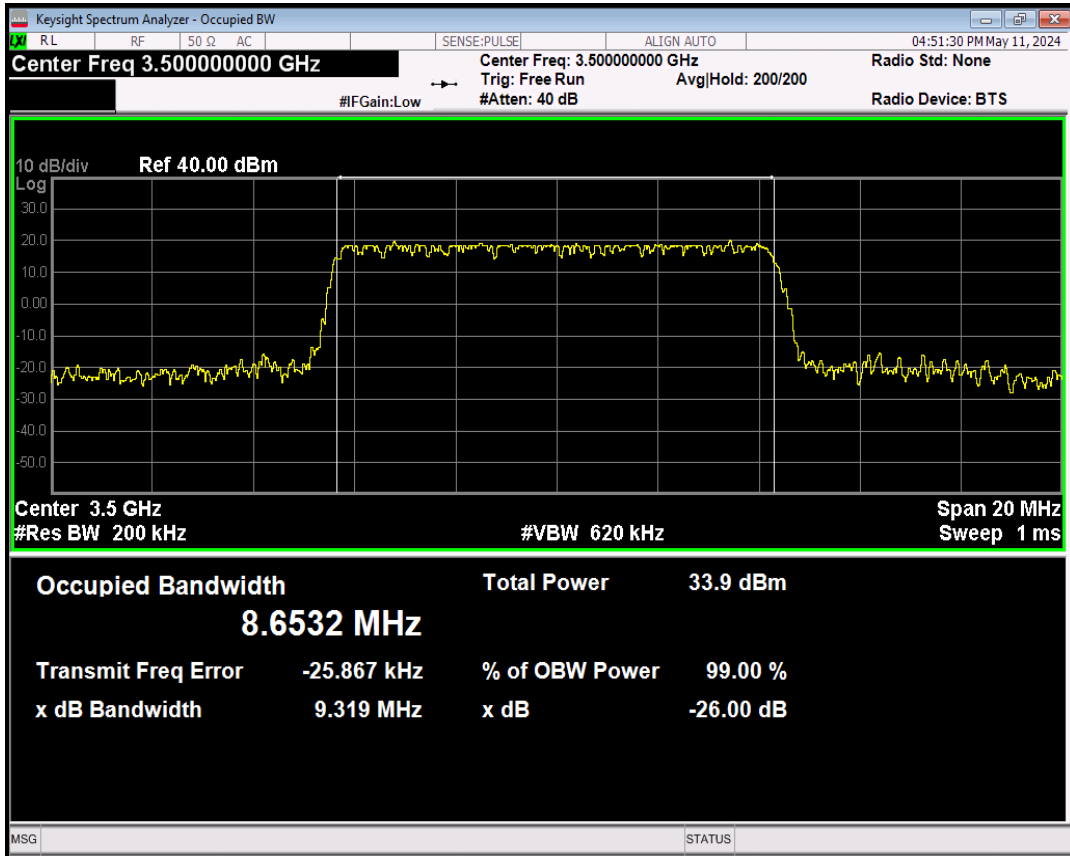


n78 SCS=30kHz DFT_QAM16 BW=10MHz Channel=633333 RB=24@0

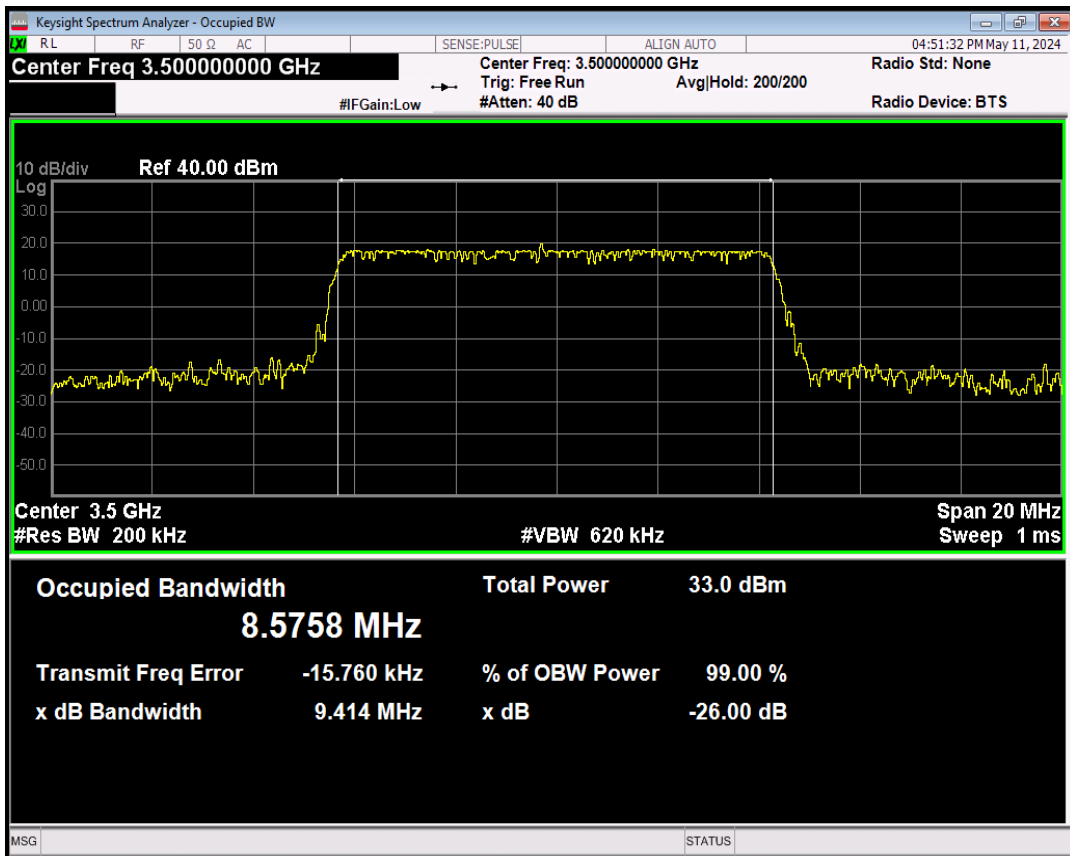


n78 SCS=30kHz DFT_QAM64 BW=10MHz Channel=633333 RB=24@0

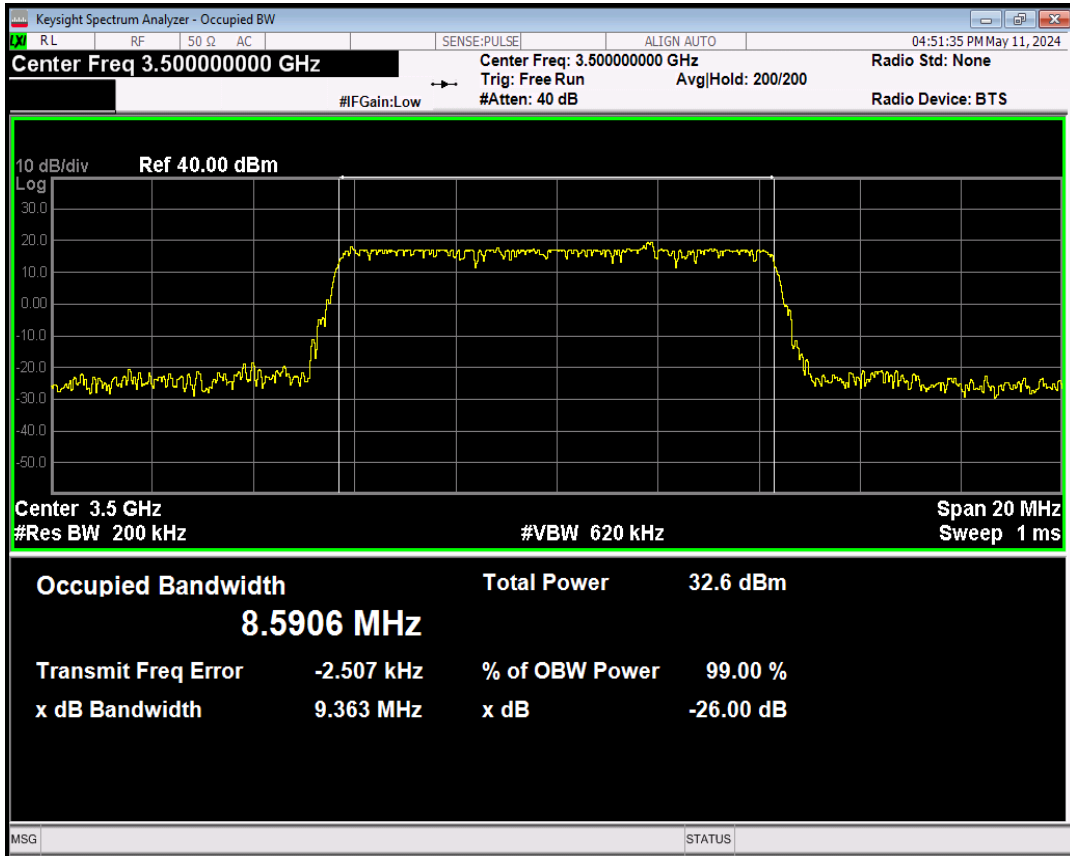


n78 SCS=30kHz DFT_QAM256 BW=10MHz Channel=633333 RB=24@0

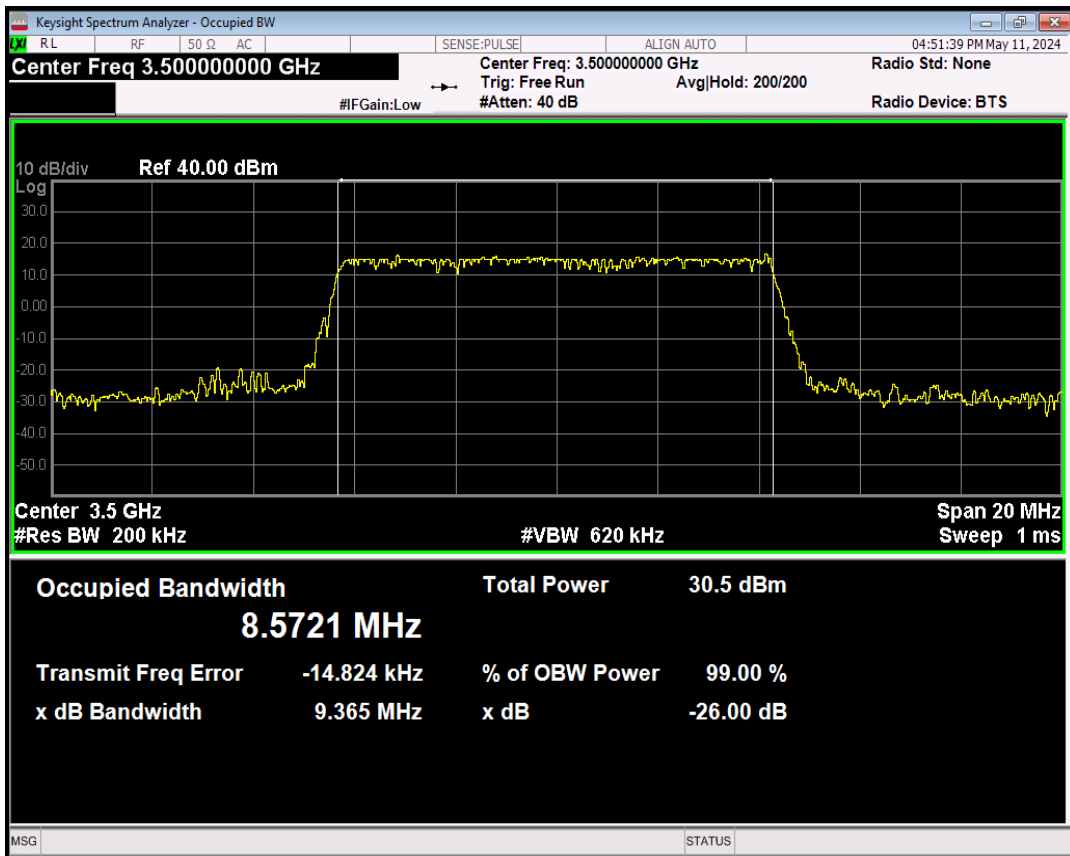


n78 SCS=30kHz DFT_BPSK BW=15MHz Channel=633333 RB=36@0

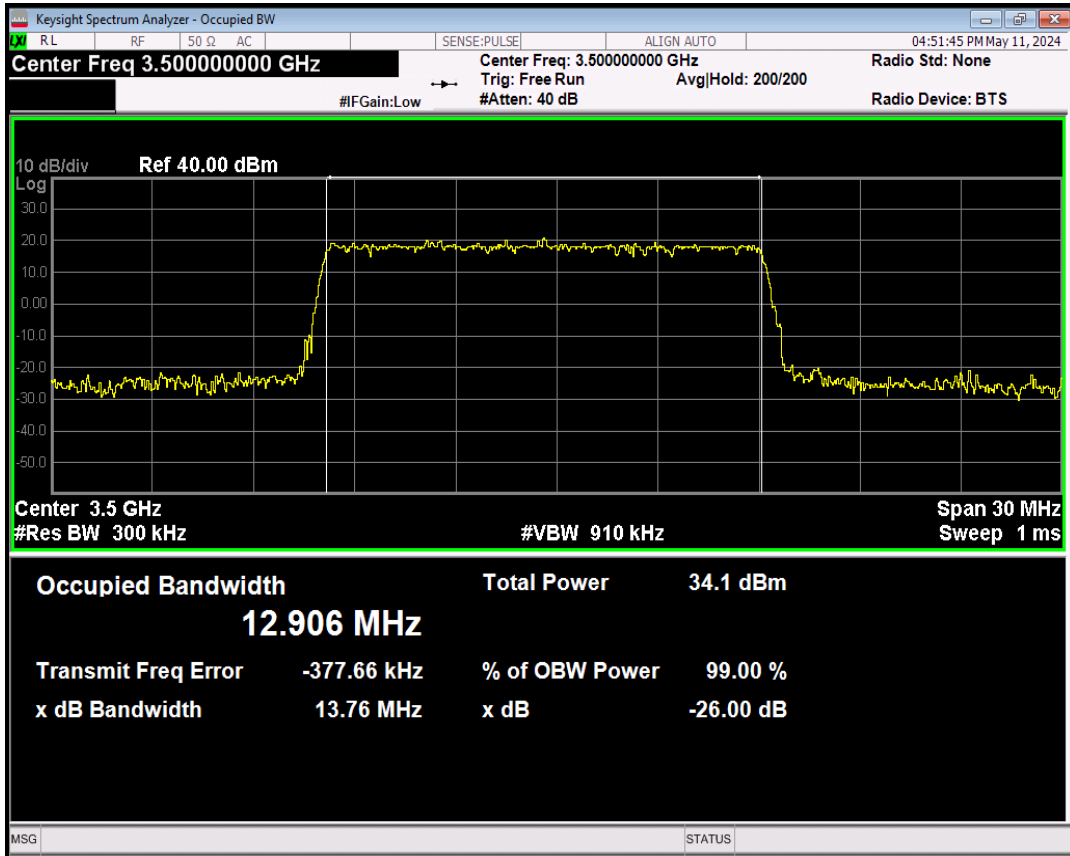


n78 SCS=30kHz DFT_QPSK BW=15MHz Channel=633333 RB=36@0

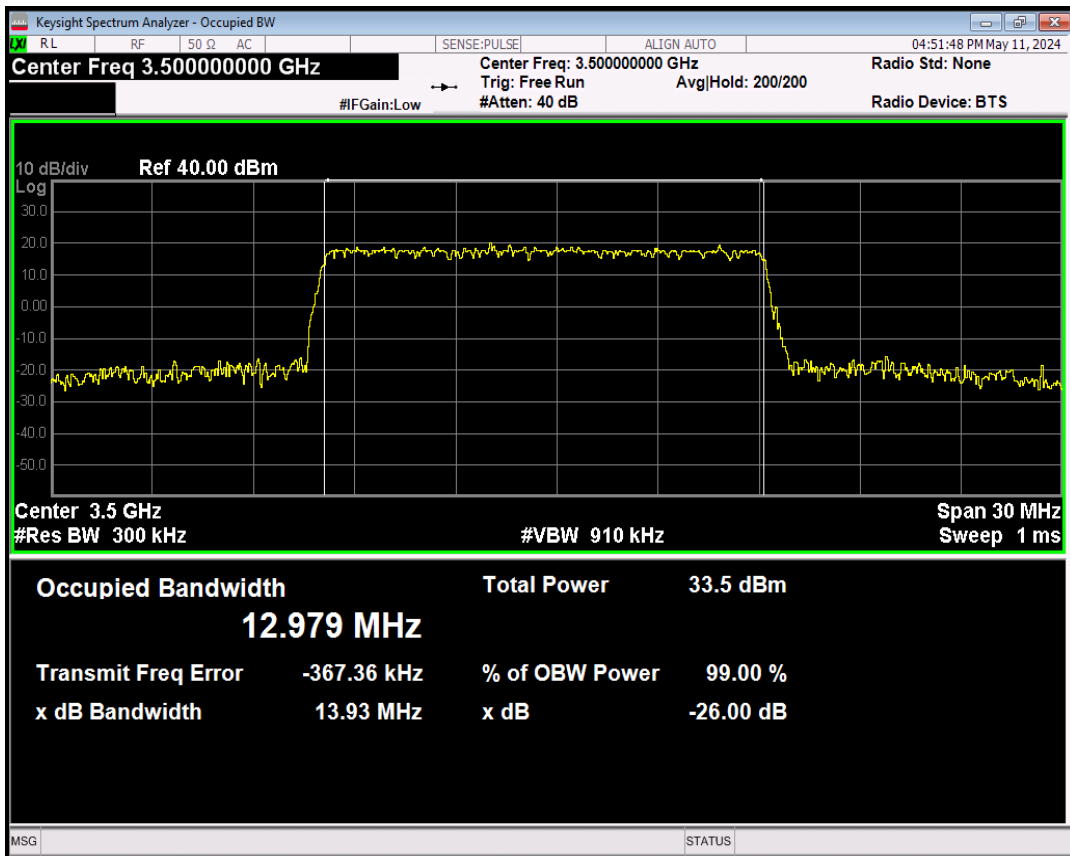


n78 SCS=30kHz DFT_QAM16 BW=15MHz Channel=633333 RB=36@0

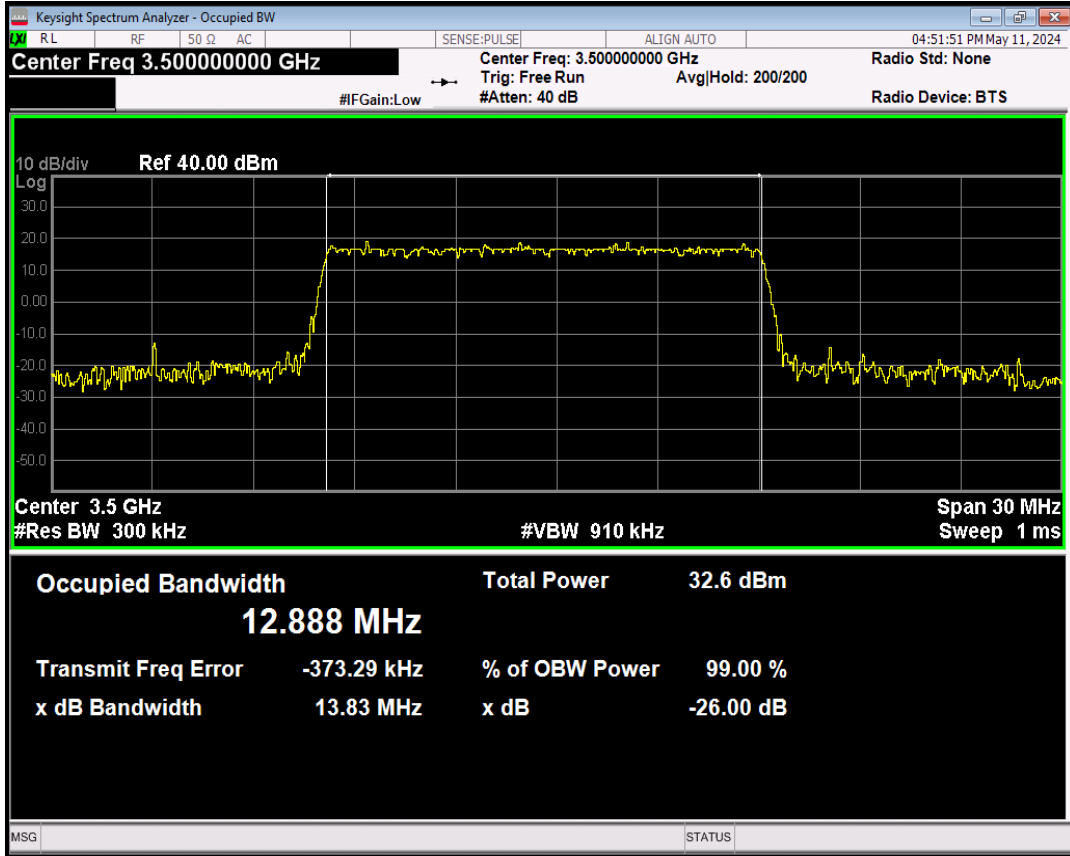


n78 SCS=30kHz DFT_QAM64 BW=15MHz Channel=633333 RB=36@0

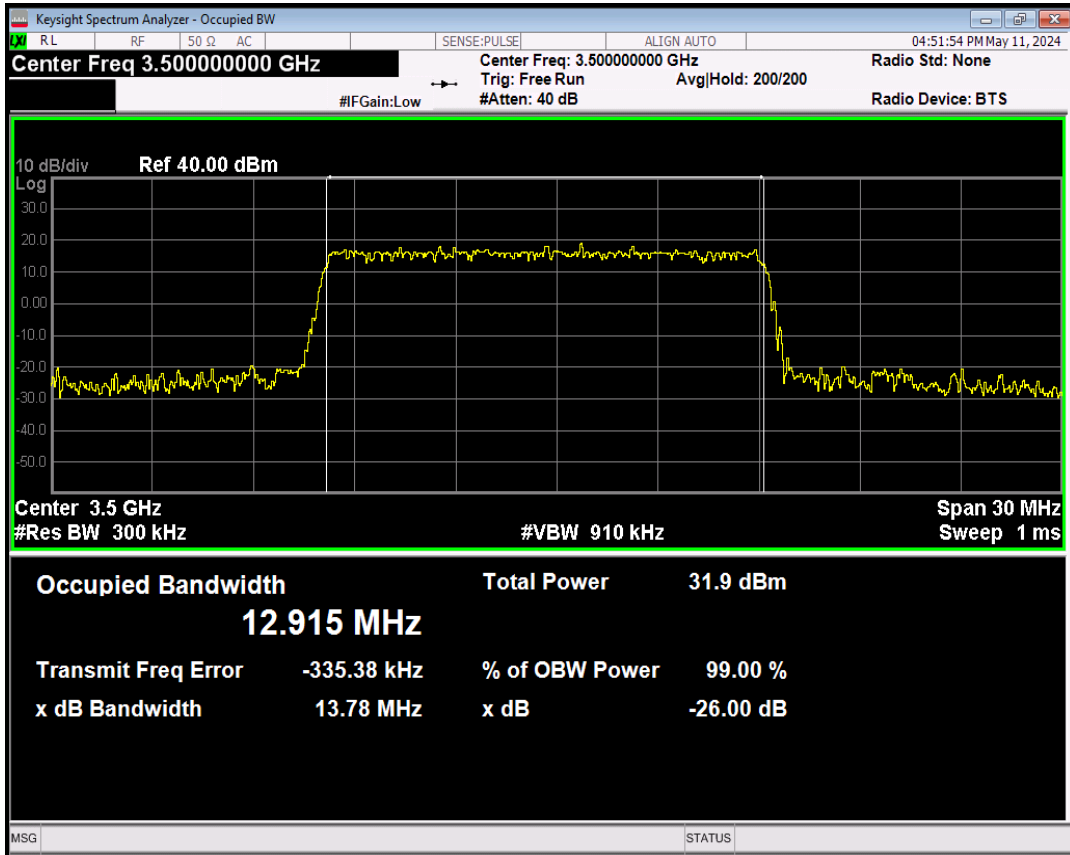


n78 SCS=30kHz DFT_QAM256 BW=15MHz Channel=633333 RB=36@0

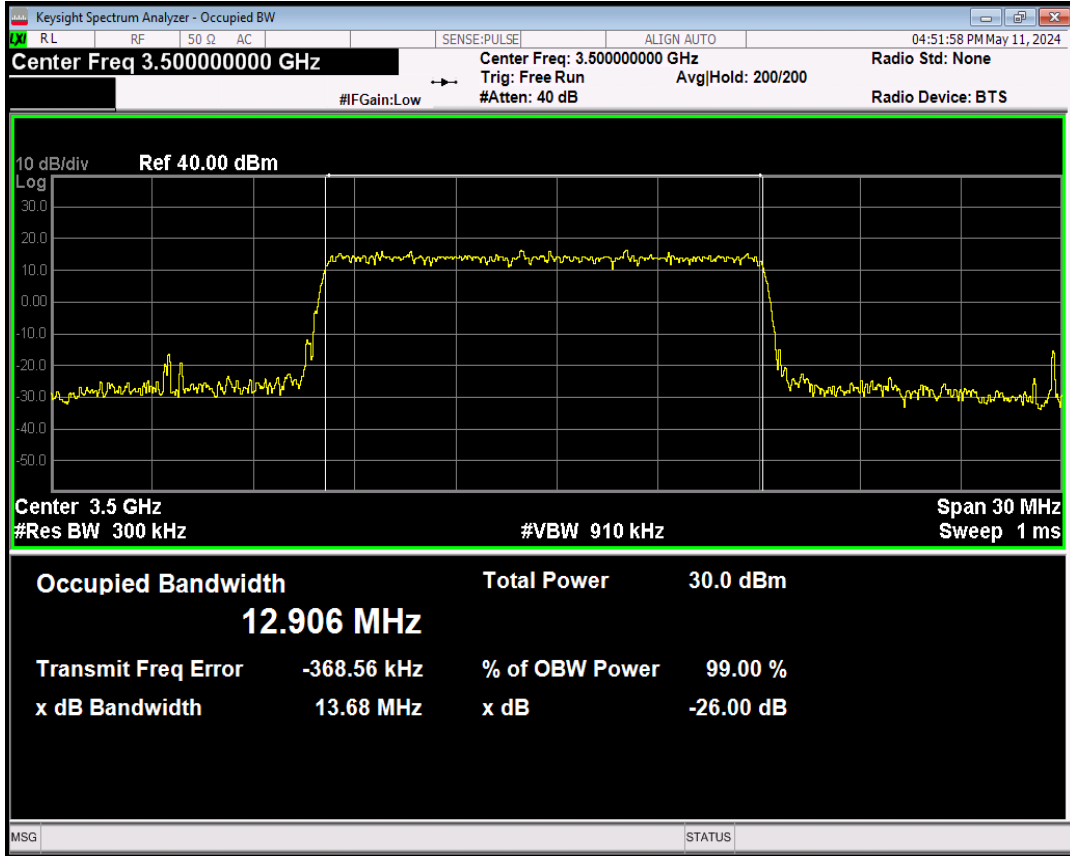


n78 SCS=30kHz DFT_BPSK BW=20MHz Channel=633333 RB=50@0

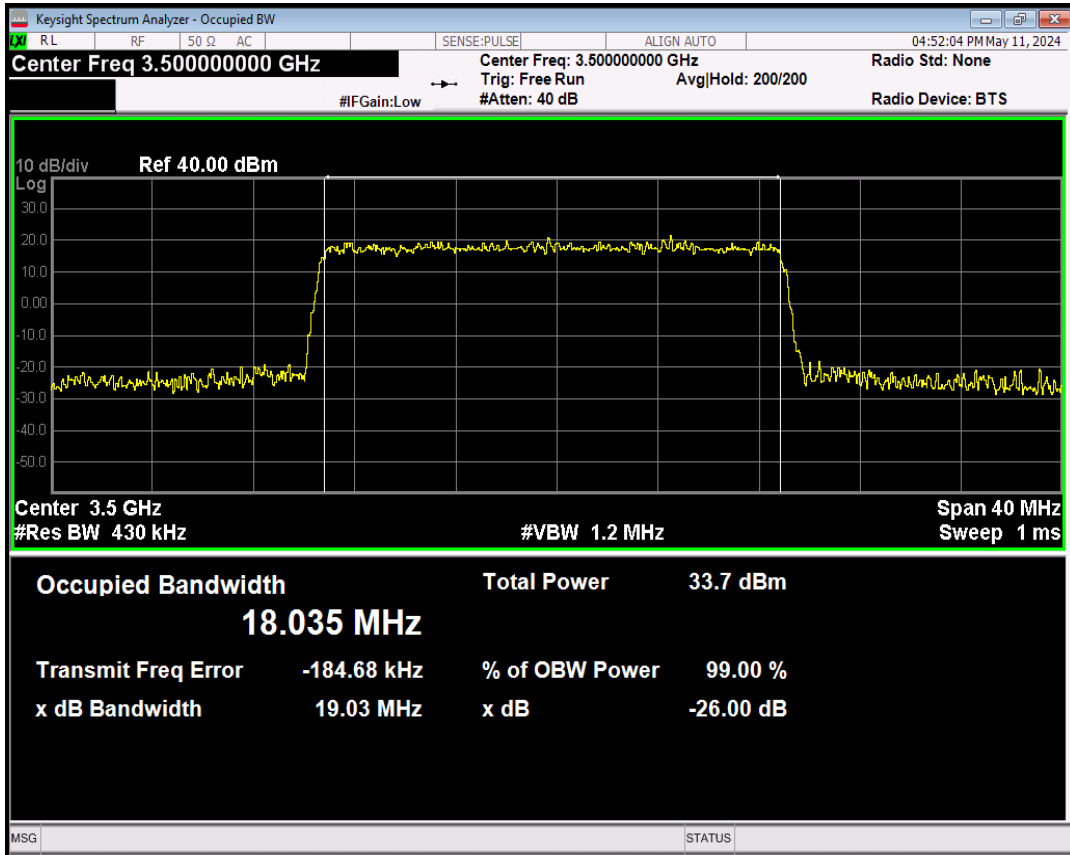


n78 SCS=30kHz DFT_QPSK BW=20MHz Channel=633333 RB=50@0

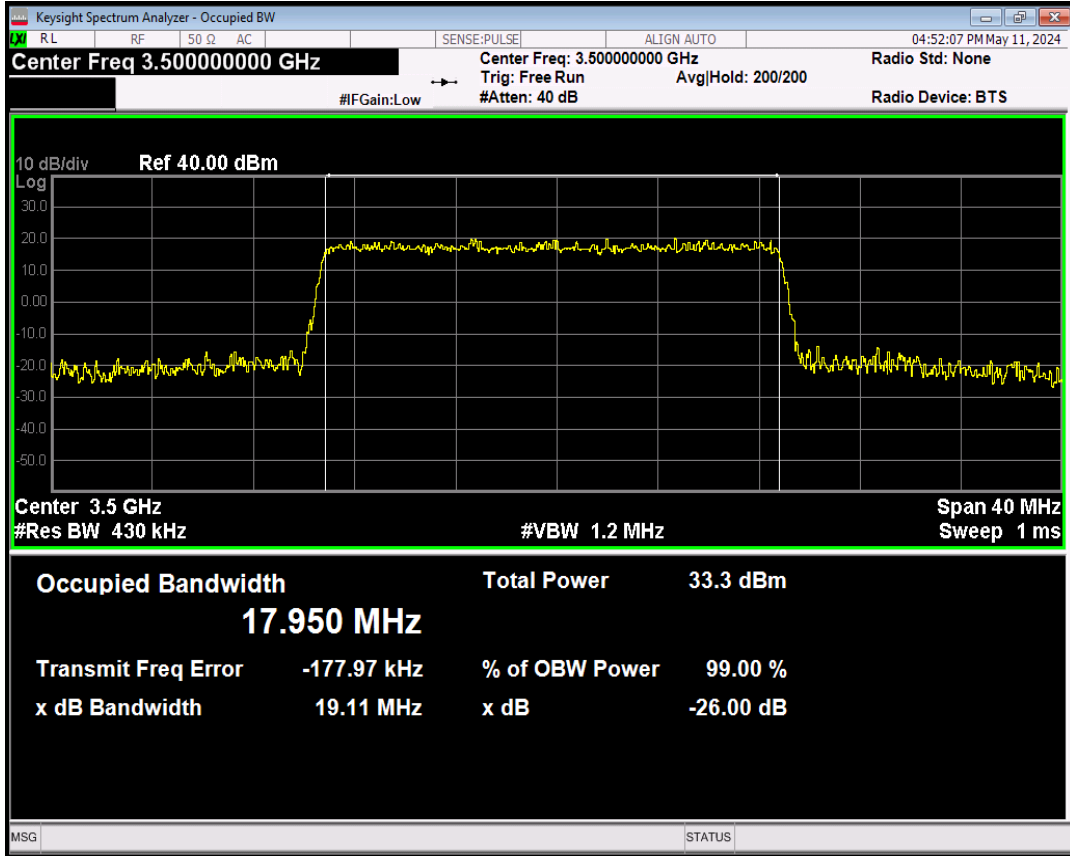


n78 SCS=30kHz DFT_QAM16 BW=20MHz Channel=633333 RB=50@0

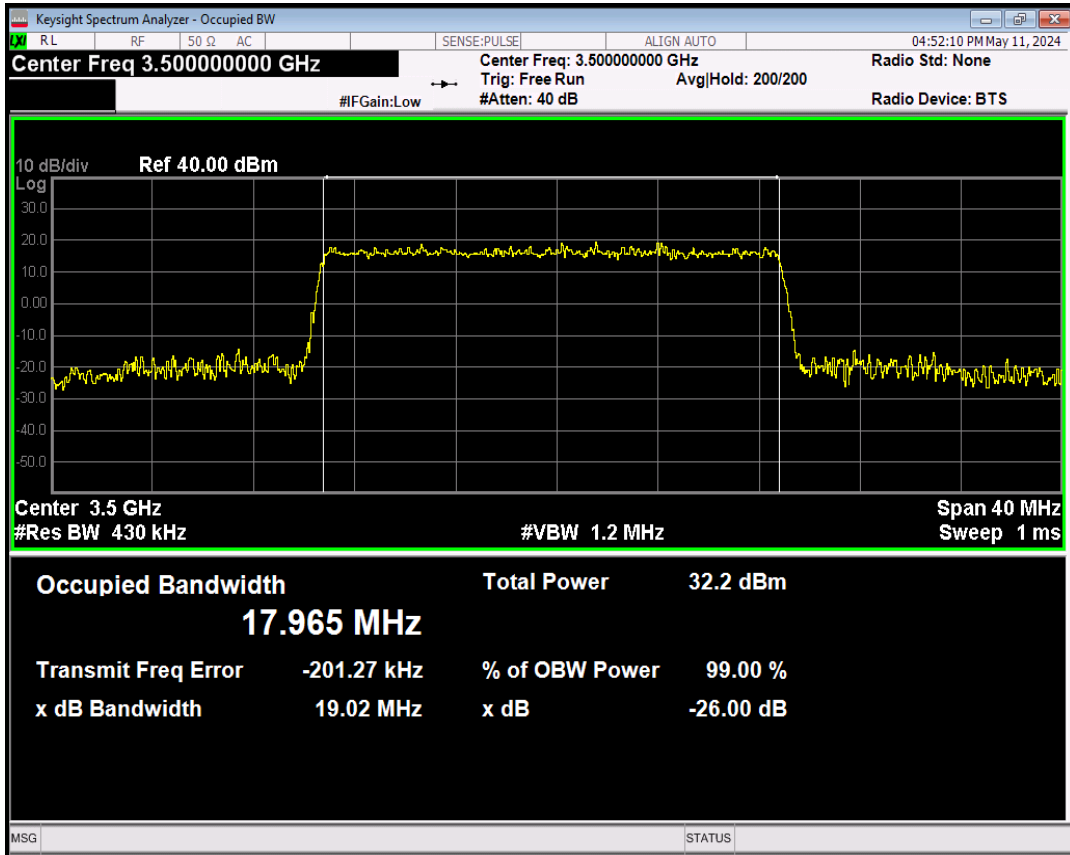


n78 SCS=30kHz DFT_QAM64 BW=20MHz Channel=633333 RB=50@0

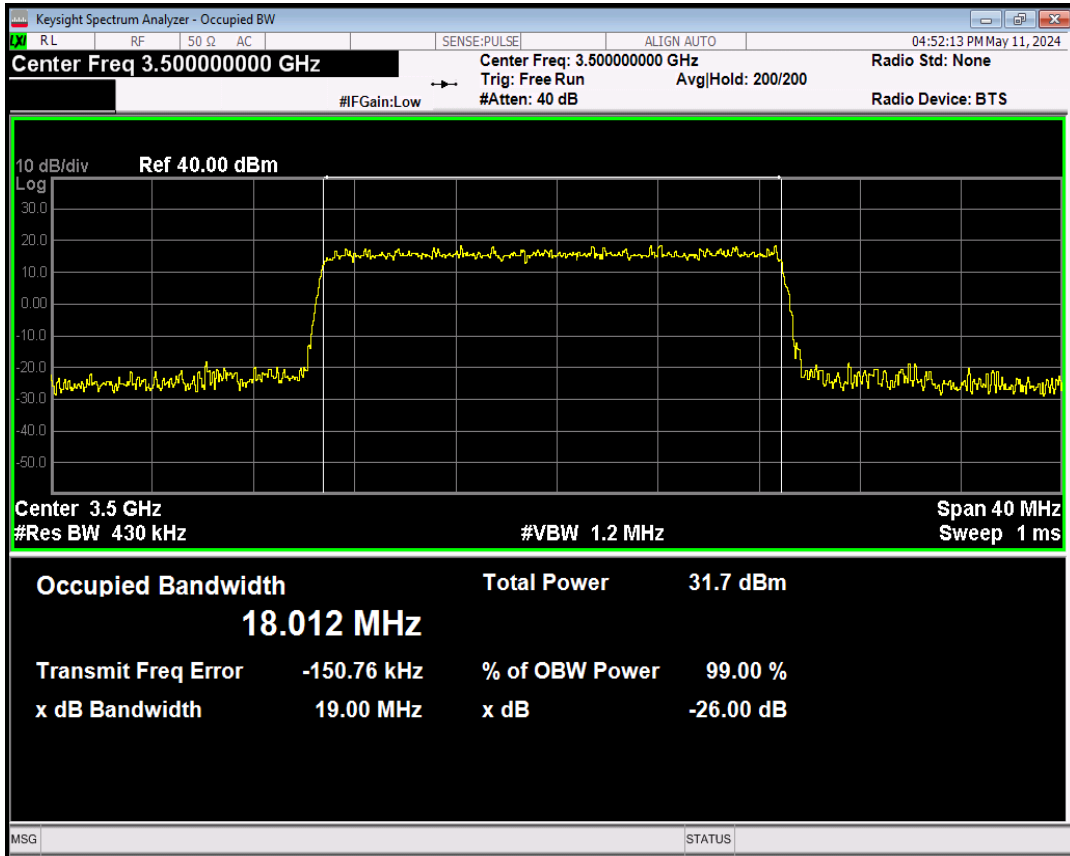


n78 SCS=30kHz DFT_QAM256 BW=20MHz Channel=633333 RB=50@0

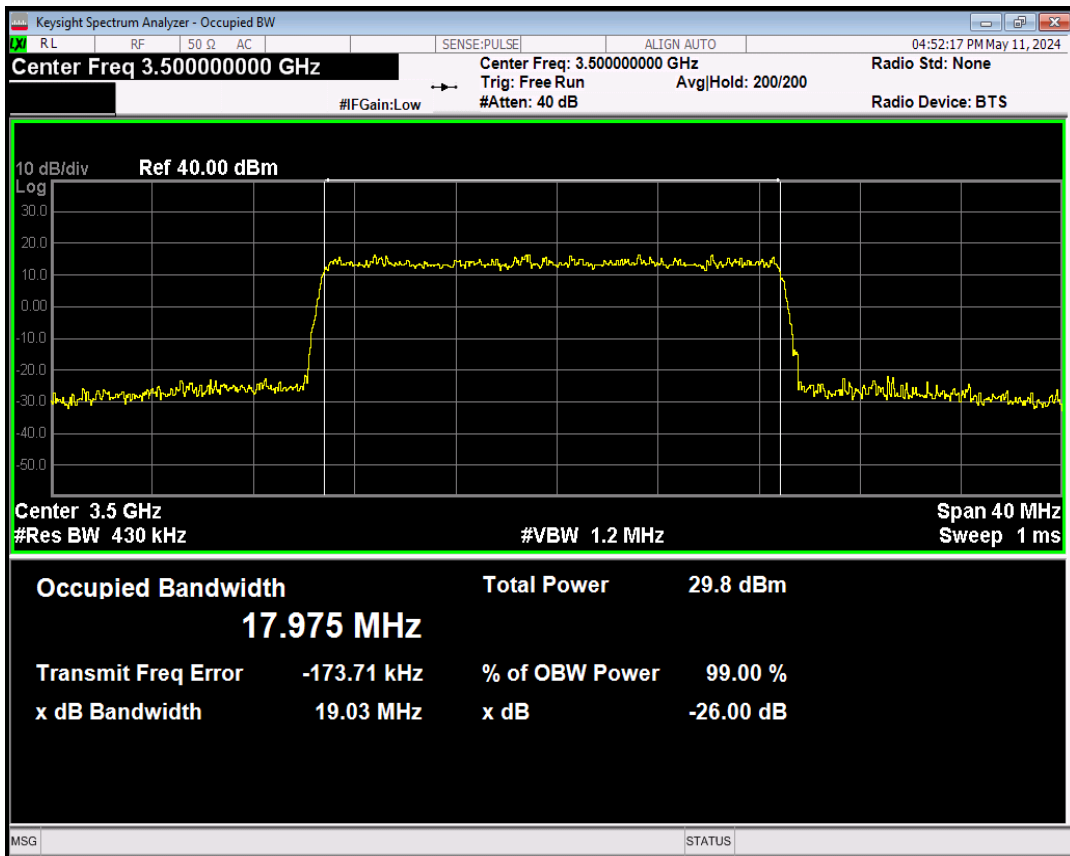


n78 SCS=30kHz DFT_BPSK BW=40MHz Channel=633333 RB=100@0

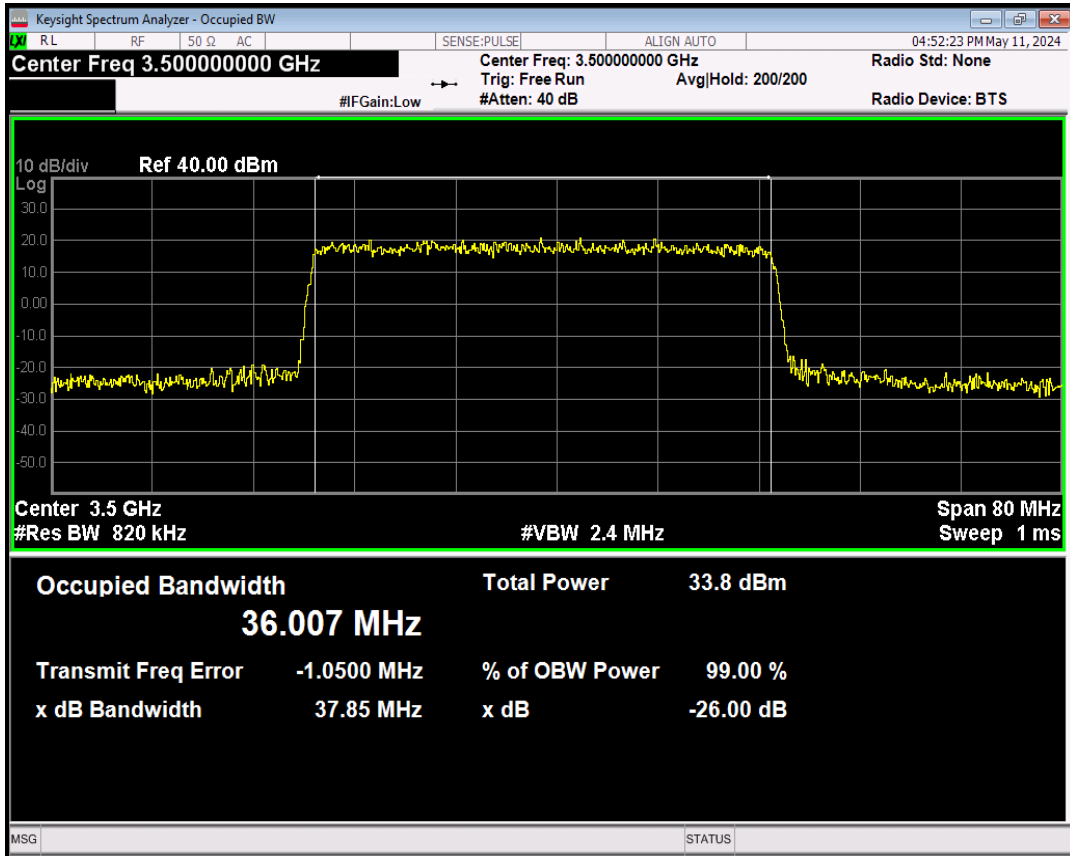


n78 SCS=30kHz DFT_QPSK BW=40MHz Channel=633333 RB=100@0

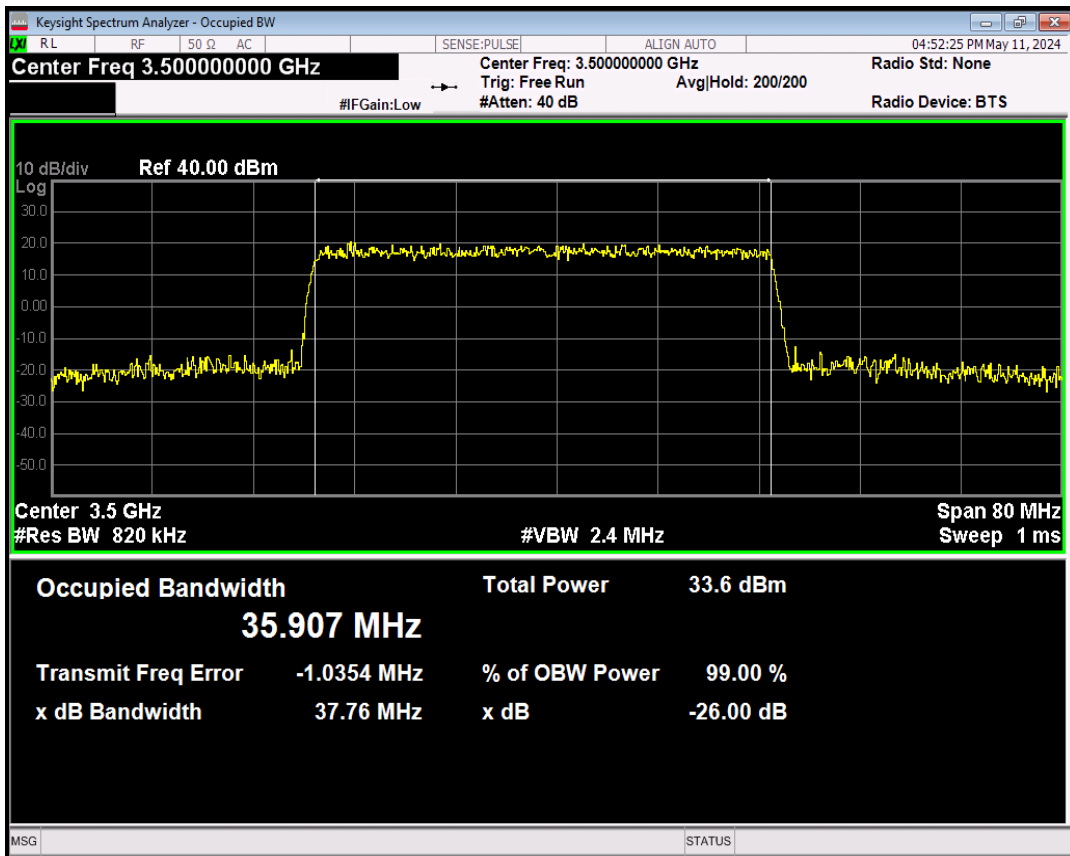


n78 SCS=30kHz DFT_QAM16 BW=40MHz Channel=633333 RB=100@0

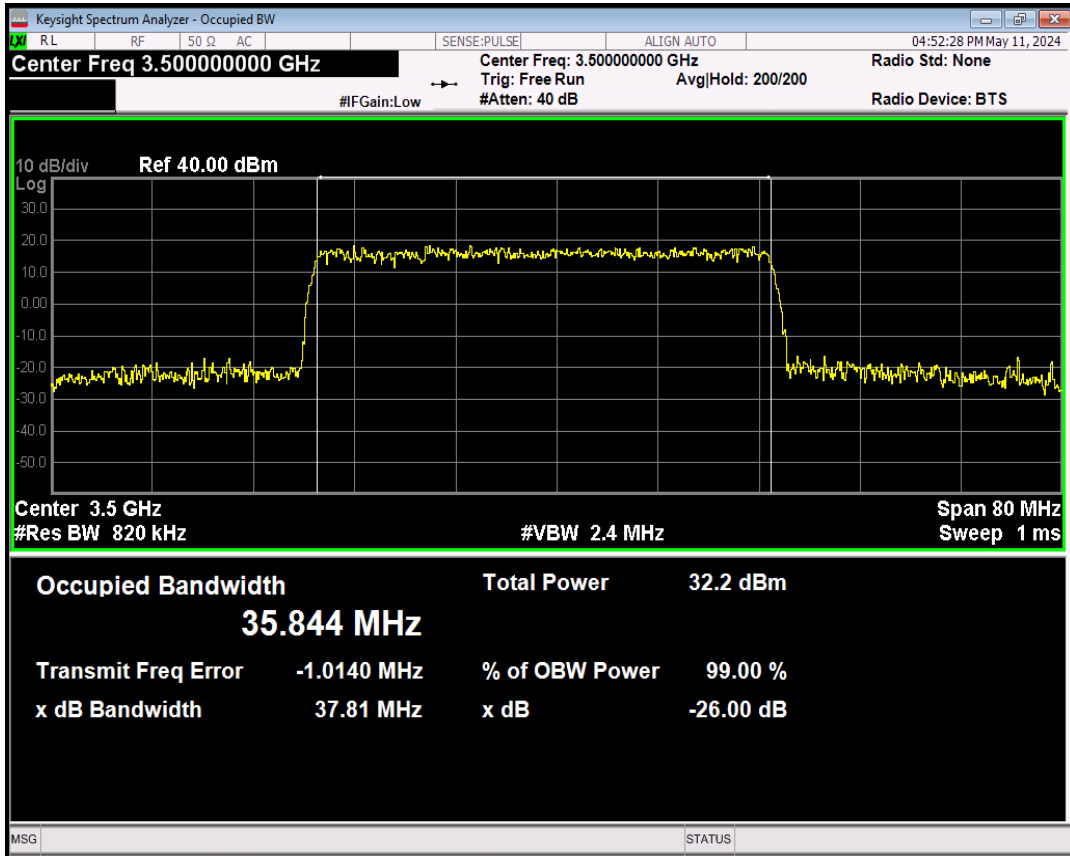


n78 SCS=30kHz DFT_QAM64 BW=40MHz Channel=633333 RB=100@0

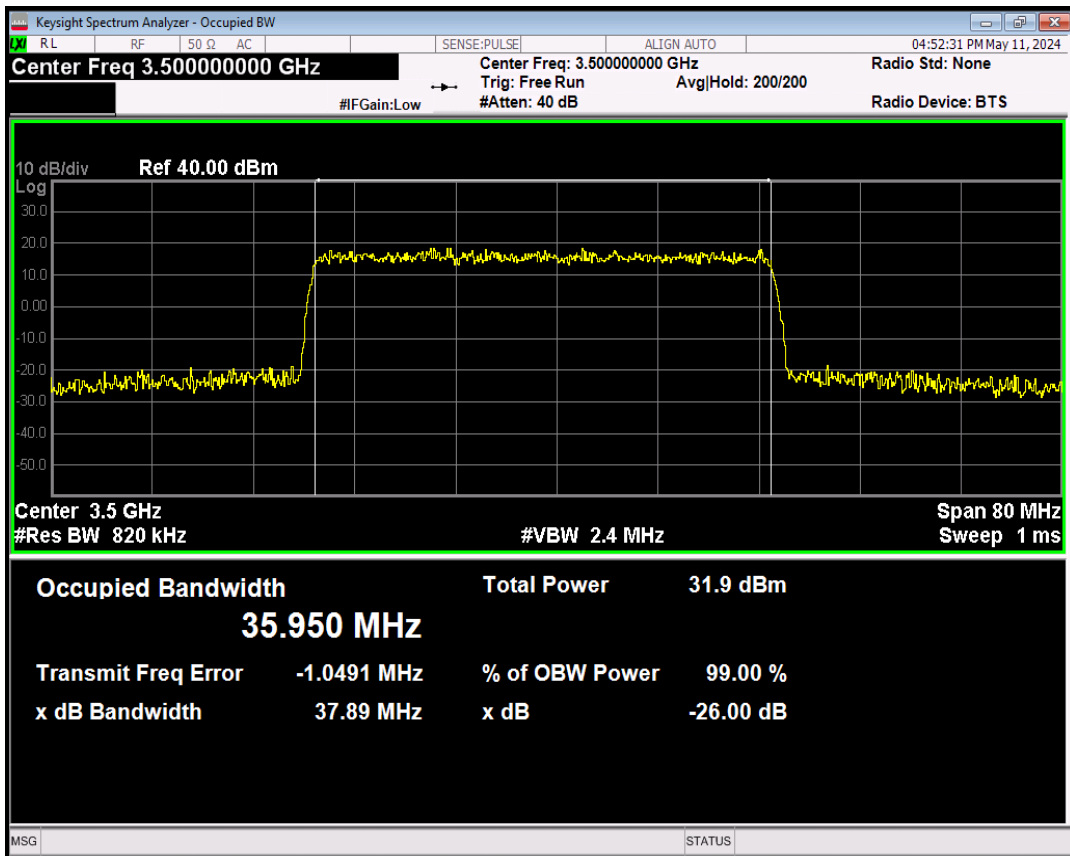


n78 SCS=30kHz DFT_QAM256 BW=40MHz Channel=633333 RB=100@0

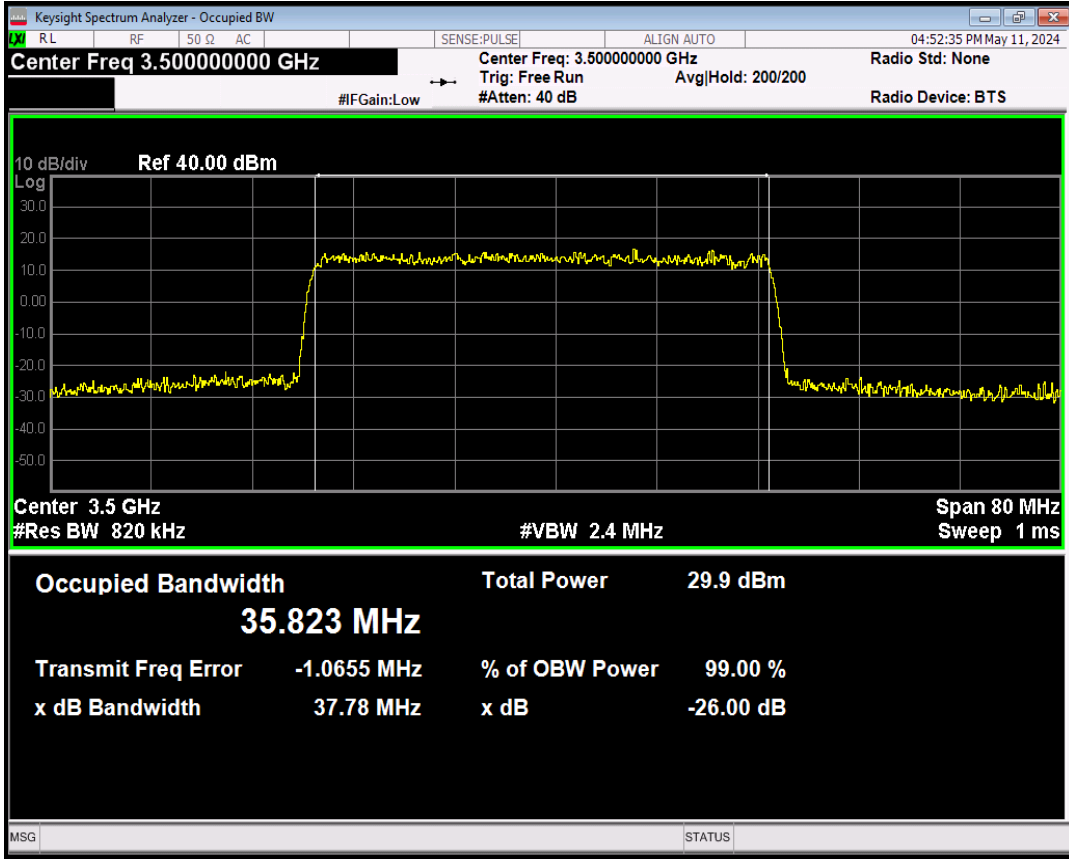


n78 SCS=30kHz DFT_BPSK BW=50MHz Channel=633333 RB=128@0

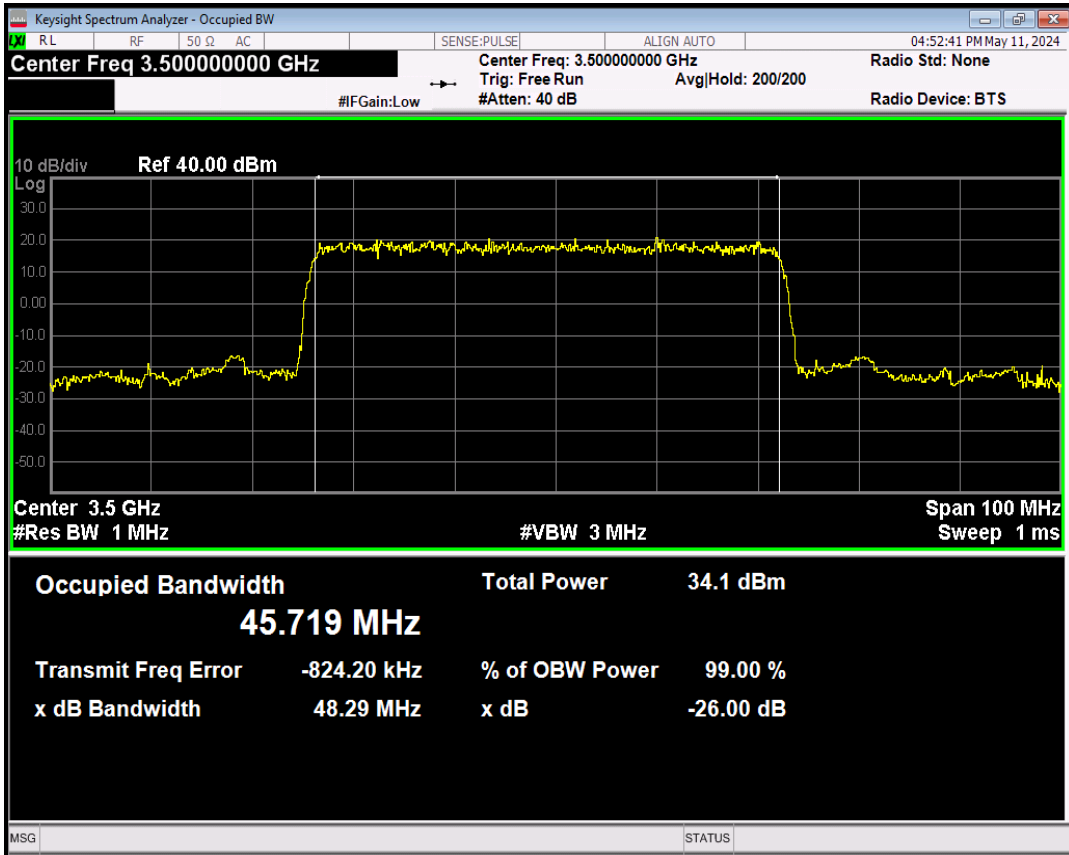


n78 SCS=30kHz DFT_QPSK BW=50MHz Channel=633333 RB=128@0

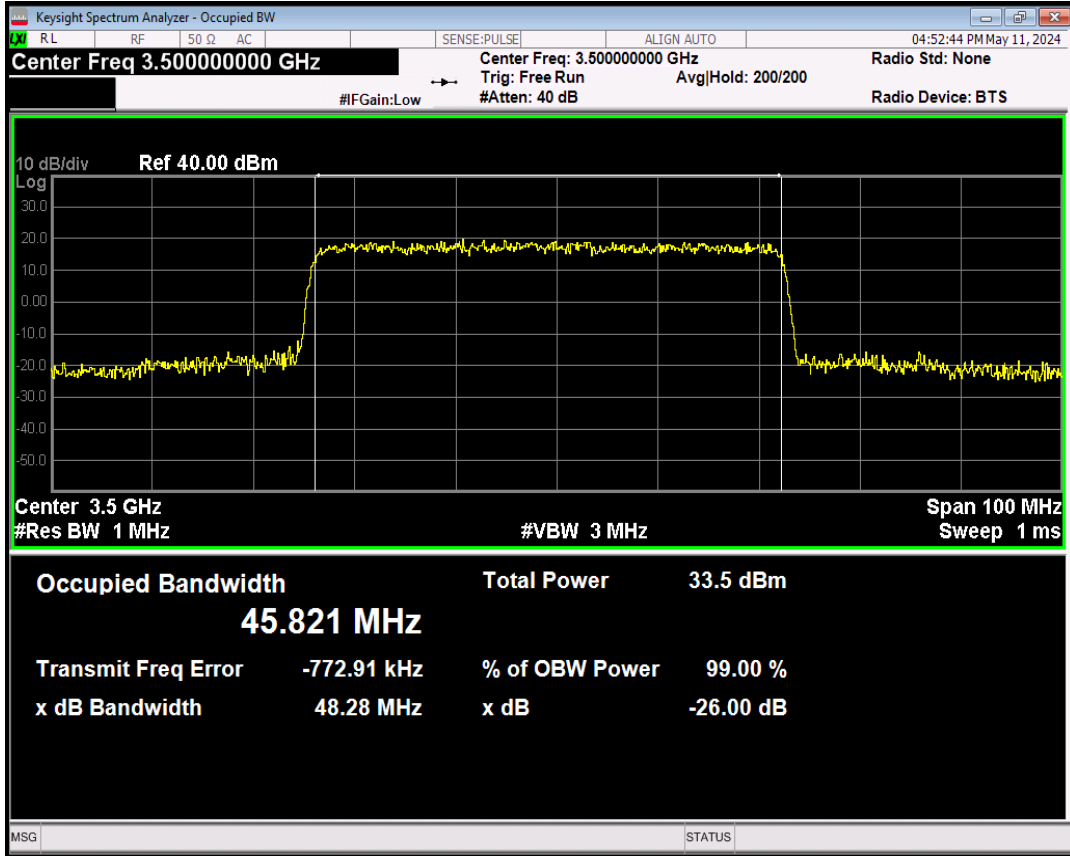


n78 SCS=30kHz DFT_QAM16 BW=50MHz Channel=633333 RB=128@0

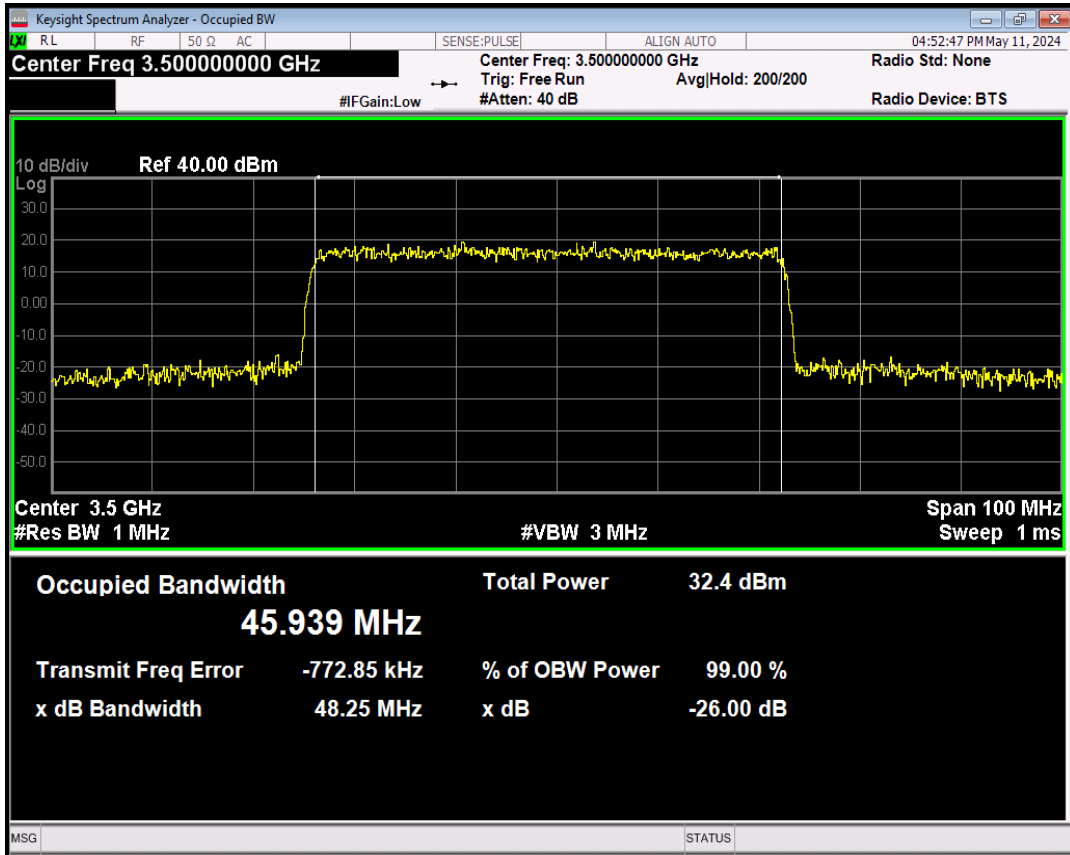


n78 SCS=30kHz DFT_QAM64 BW=50MHz Channel=633333 RB=128@0

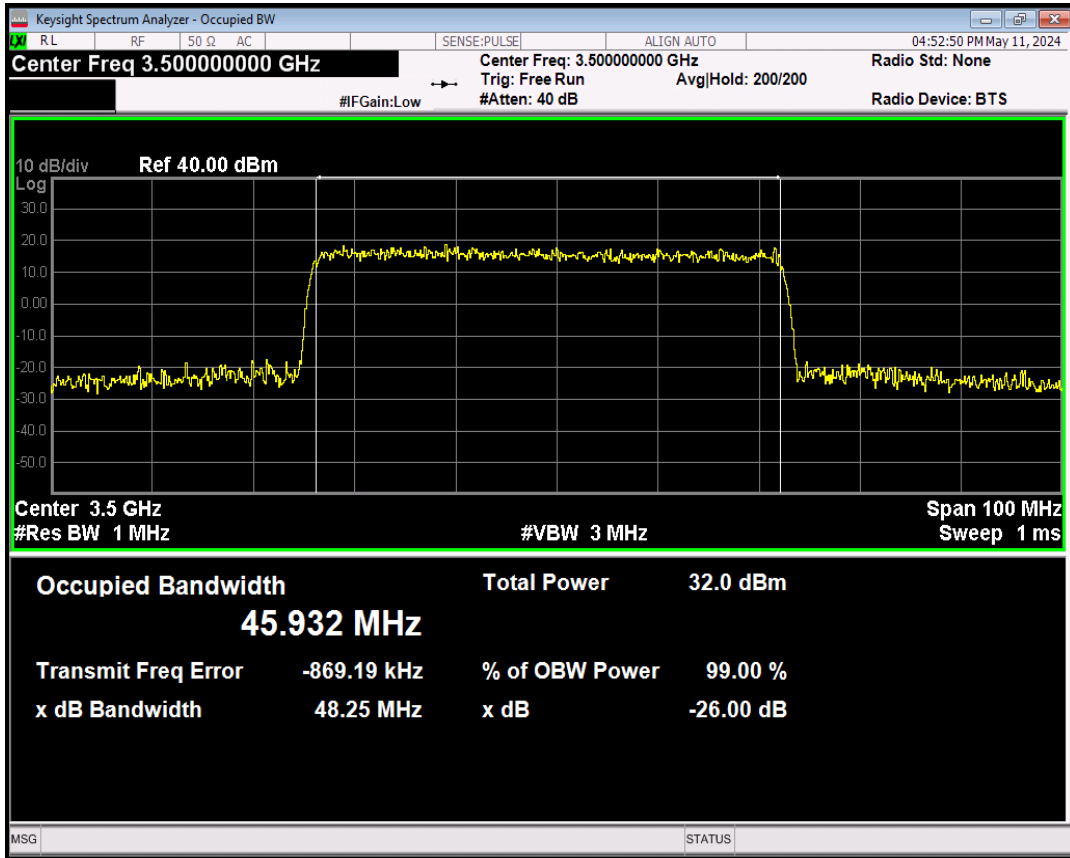


n78 SCS=30kHz DFT_QAM256 BW=50MHz Channel=633333 RB=128@0

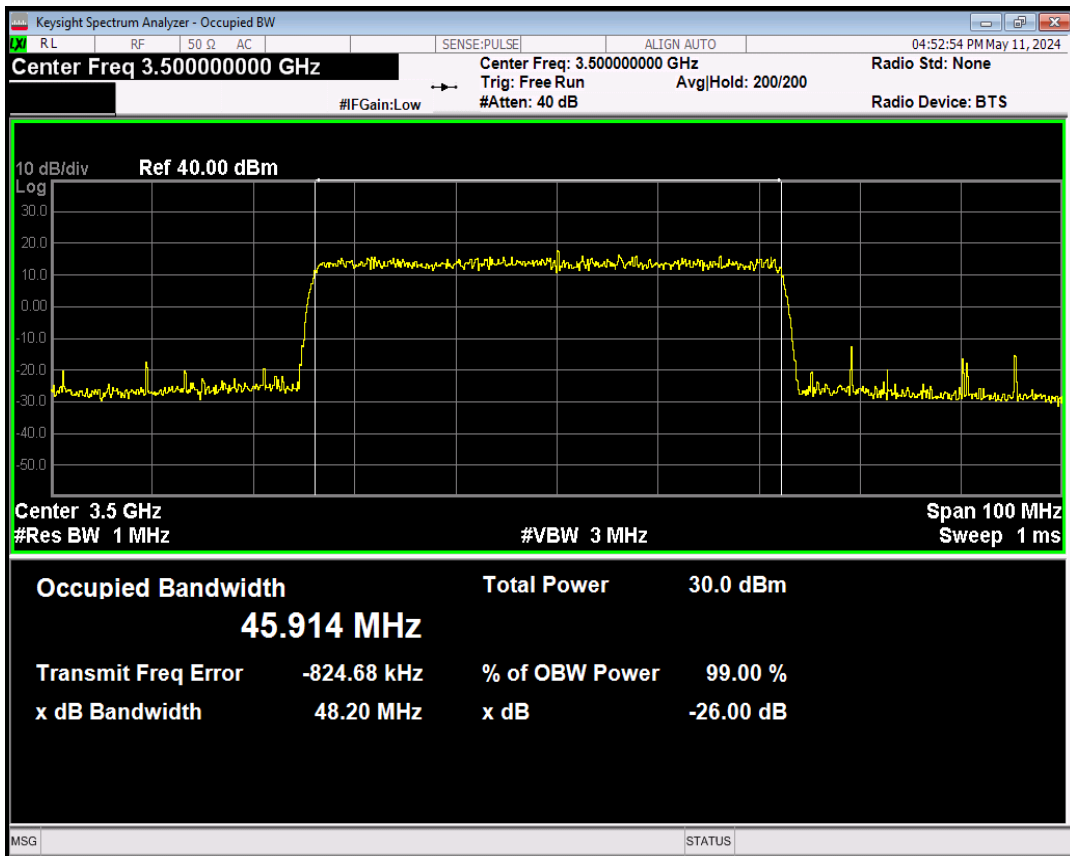


n78 SCS=30kHz DFT_BPSK BW=60MHz Channel=633333 RB=162@0

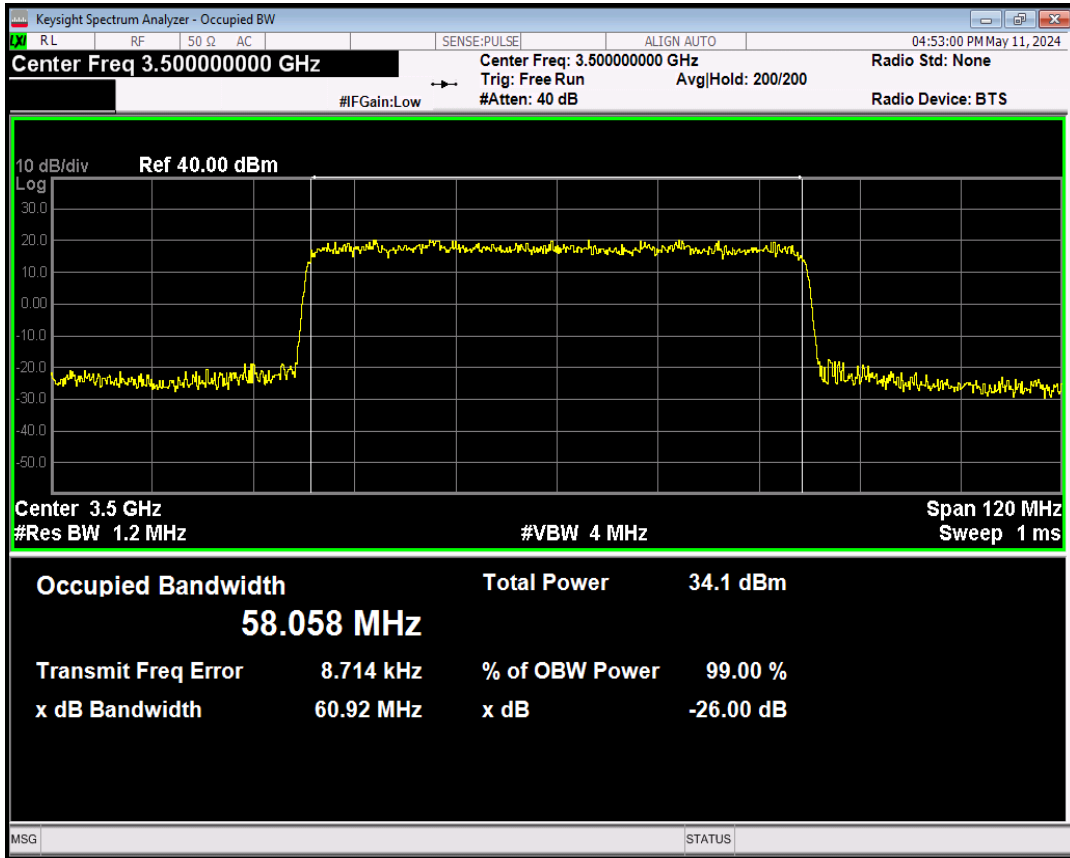


n78 SCS=30kHz DFT_QPSK BW=60MHz Channel=633333 RB=162@0

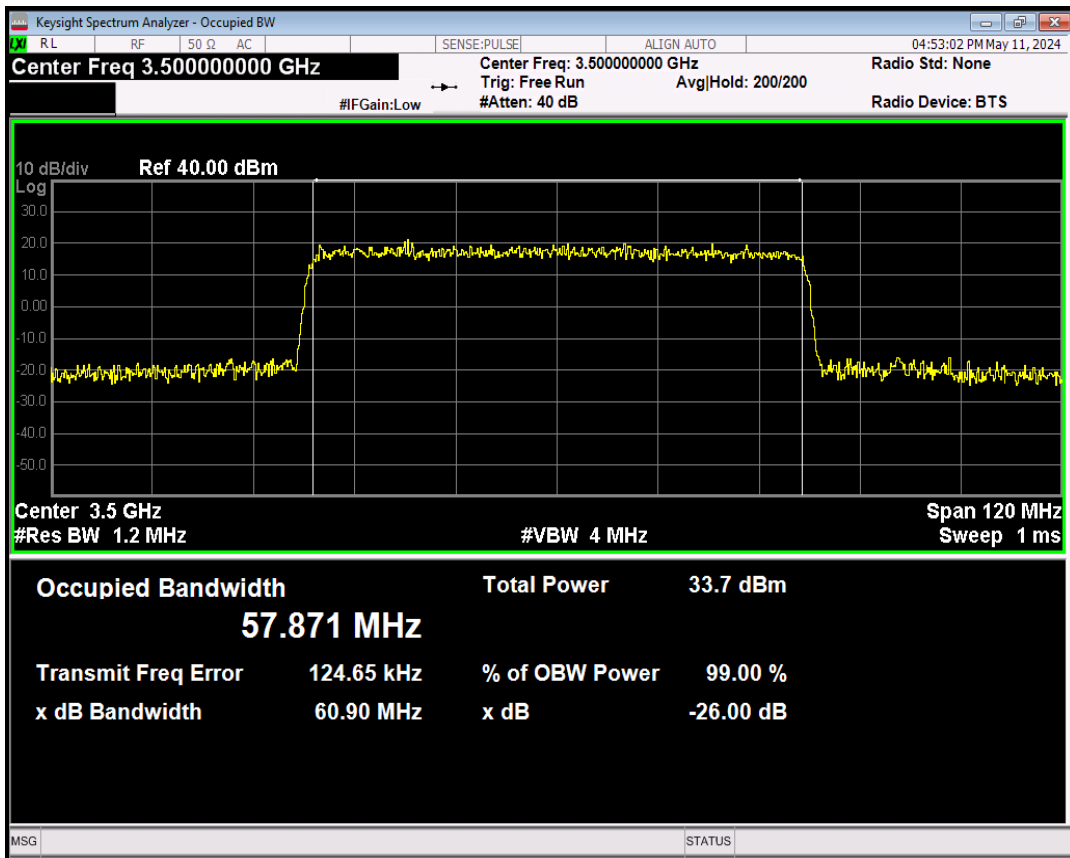


n78 SCS=30kHz DFT_QAM16 BW=60MHz Channel=633333 RB=162@0

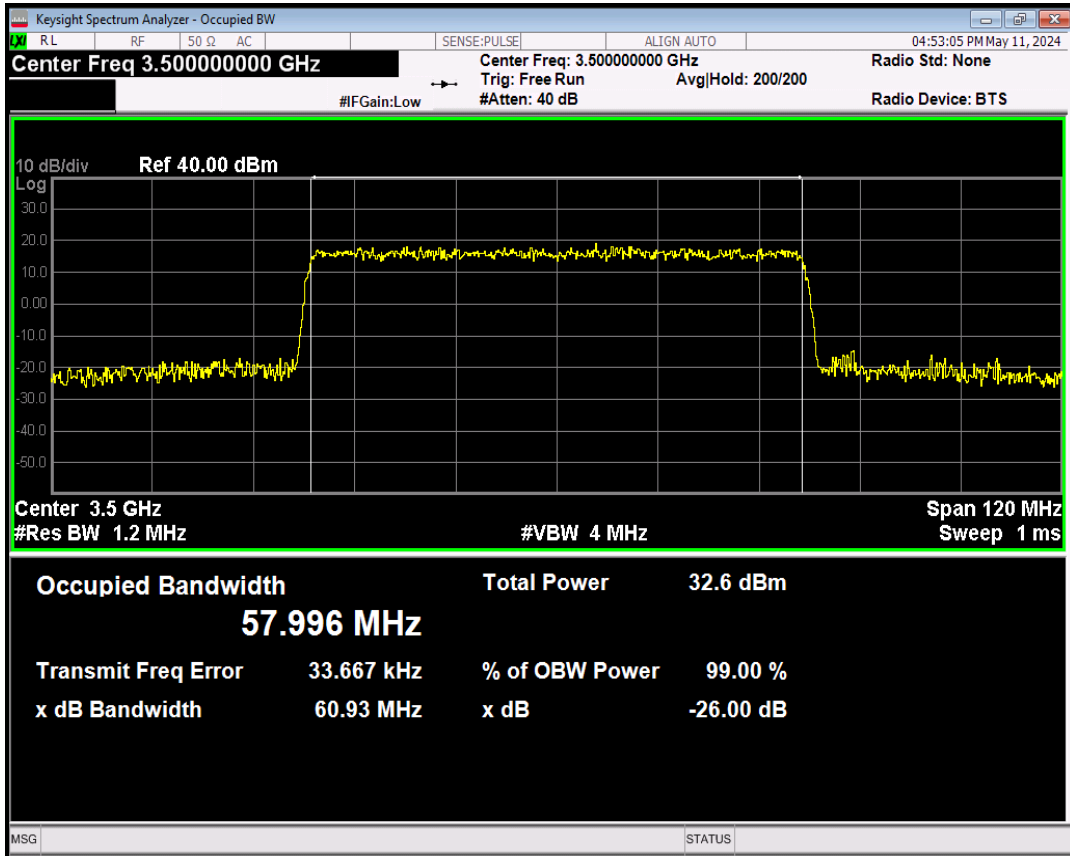


n78 SCS=30kHz DFT_QAM64 BW=60MHz Channel=633333 RB=162@0

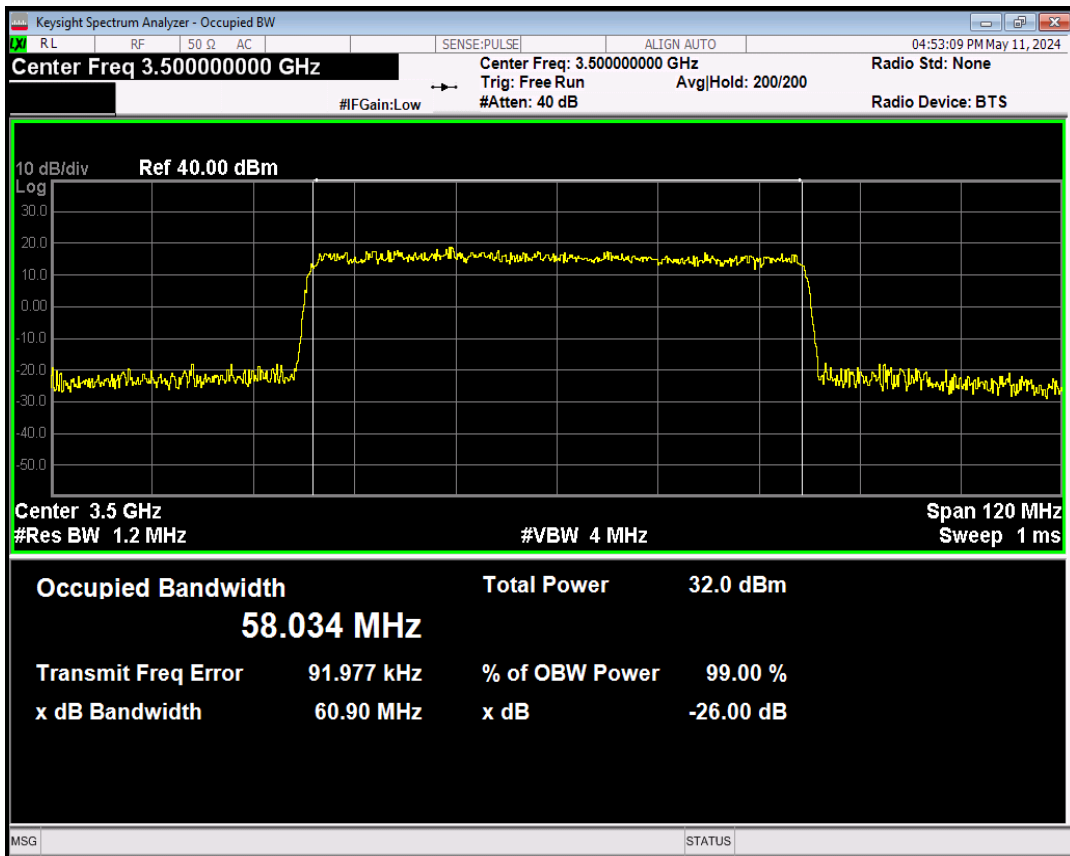


n78 SCS=30kHz DFT_QAM256 BW=60MHz Channel=633333 RB=162@0

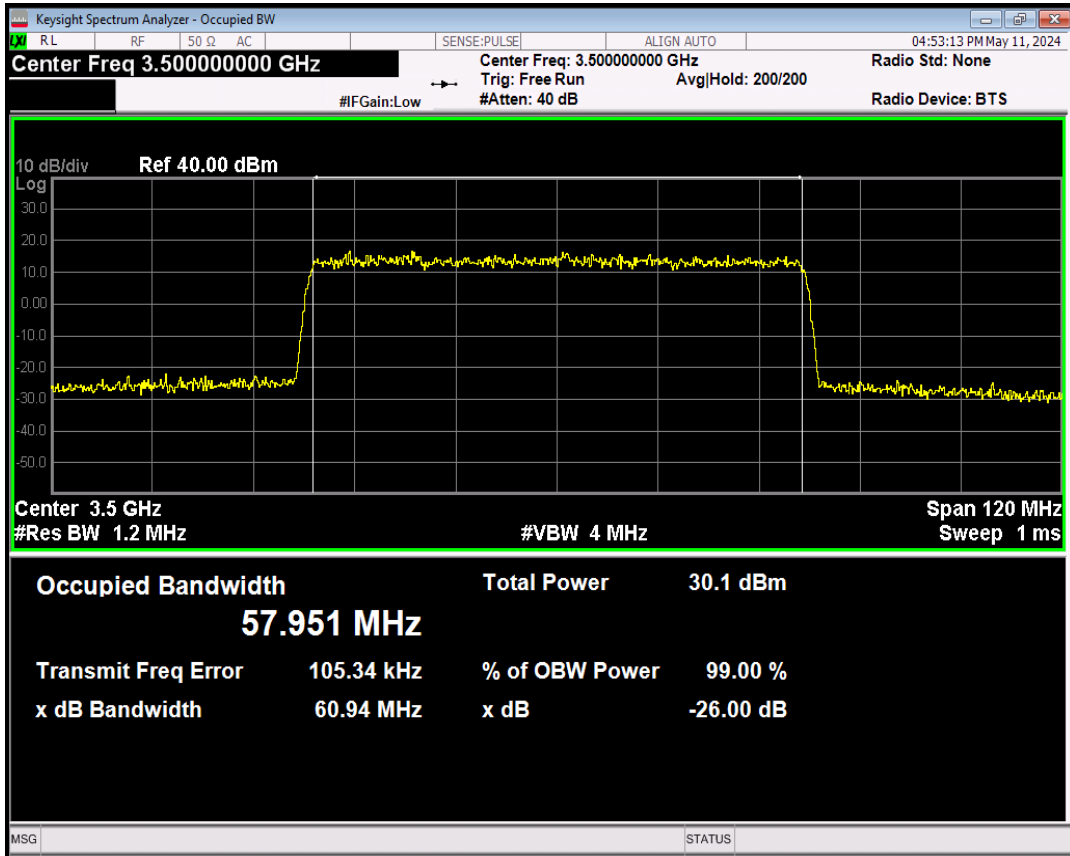


n78 SCS=30kHz DFT_BPSK BW=80MHz Channel=633333 RB=216@0

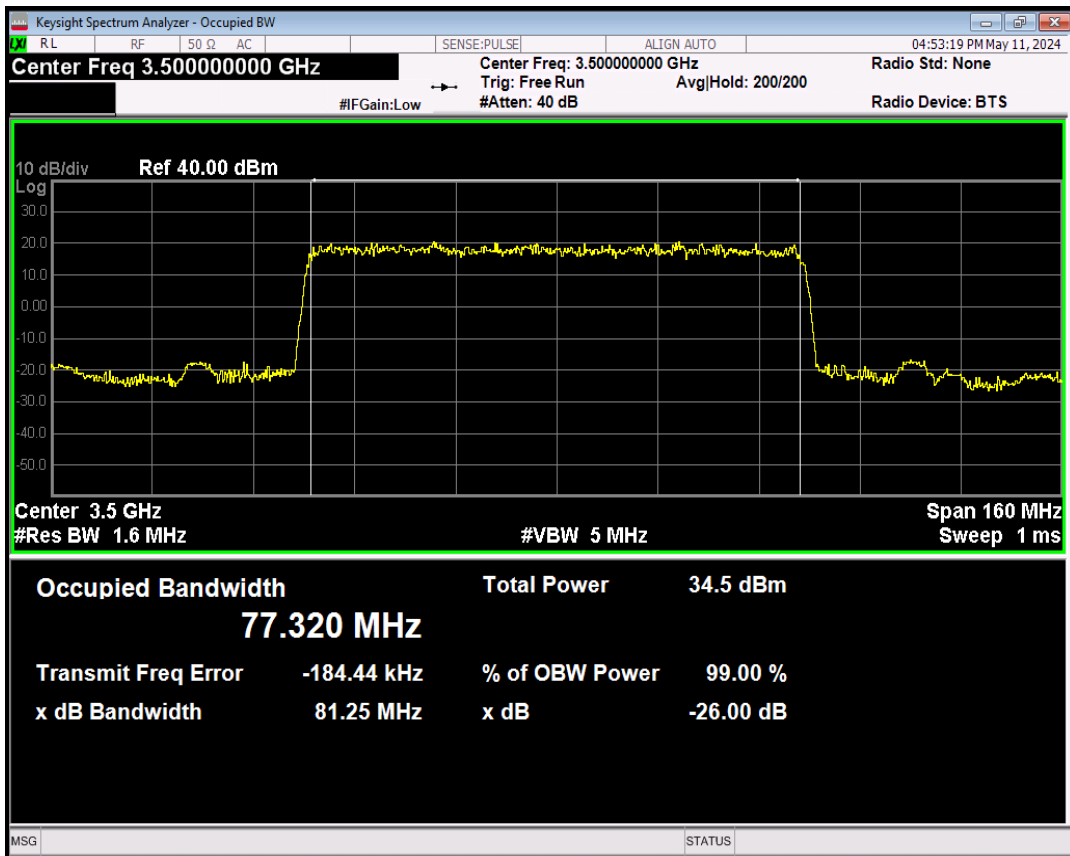


n78 SCS=30kHz DFT_QPSK BW=80MHz Channel=633333 RB=216@0

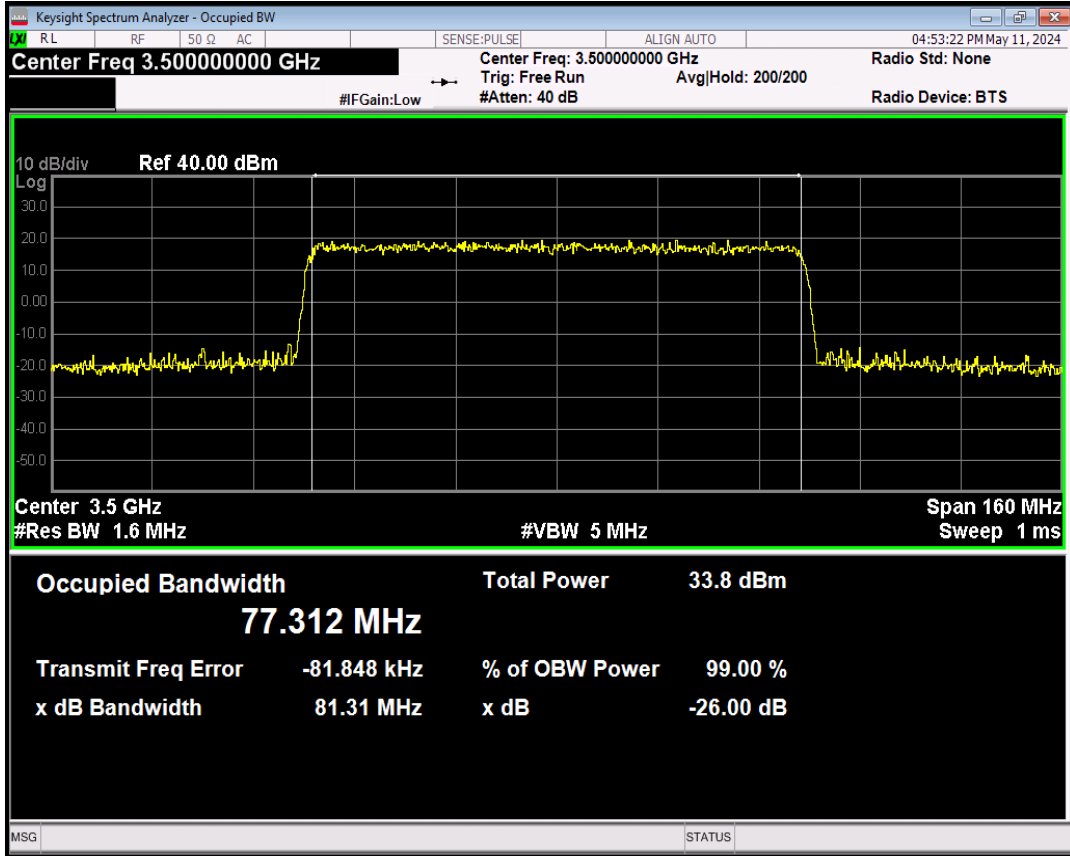


n78 SCS=30kHz DFT_QAM16 BW=80MHz Channel=633333 RB=216@0

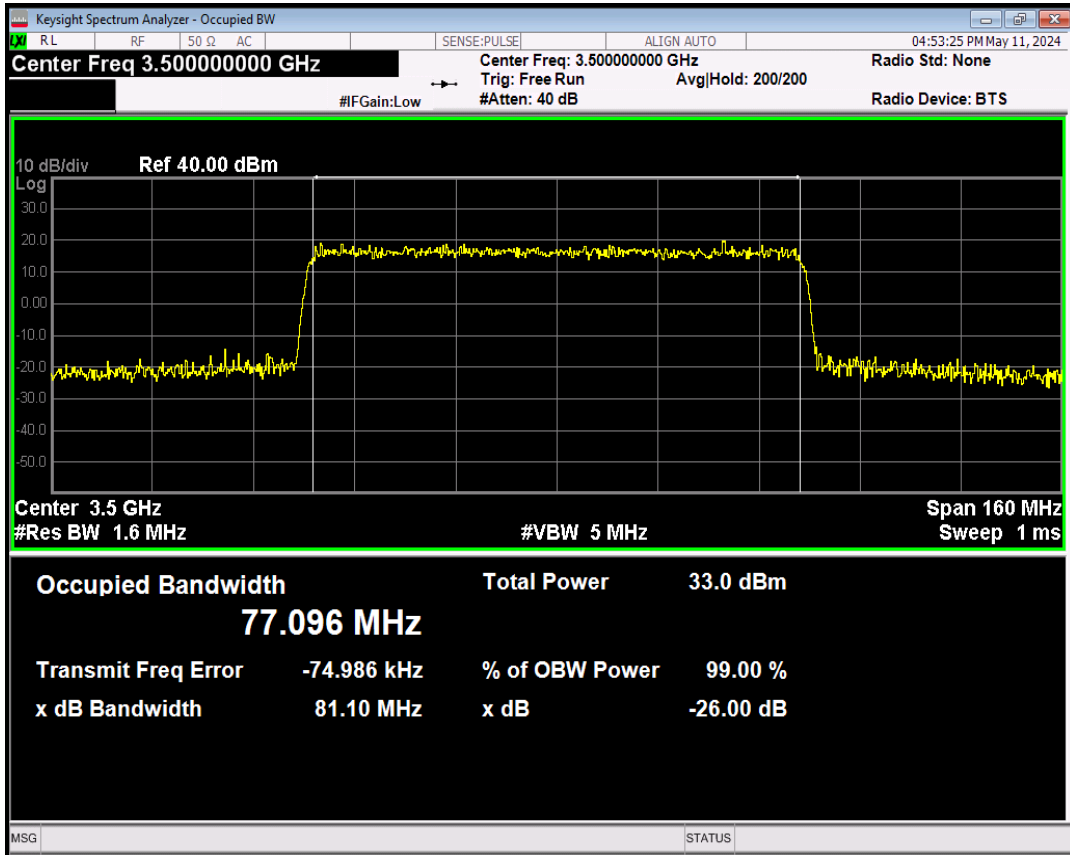


n78 SCS=30kHz DFT_QAM64 BW=80MHz Channel=633333 RB=216@0

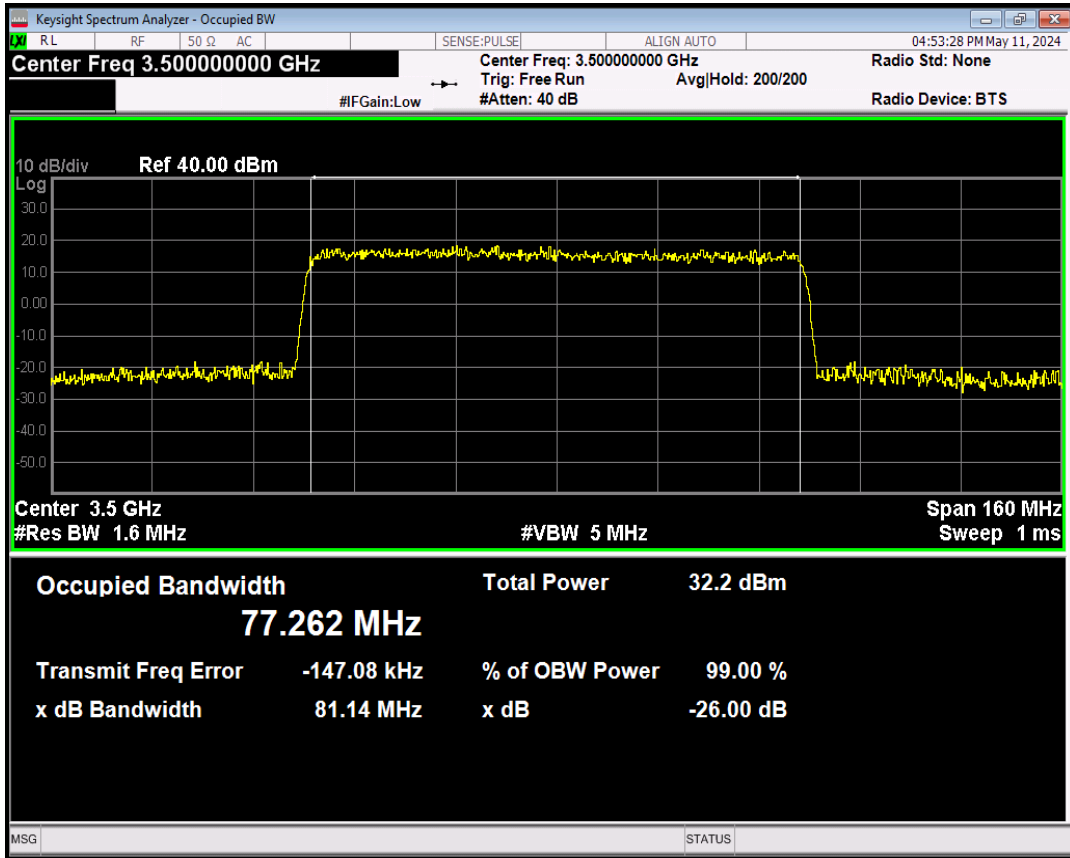


n78 SCS=30kHz DFT_QAM256 BW=80MHz Channel=633333 RB=216@0

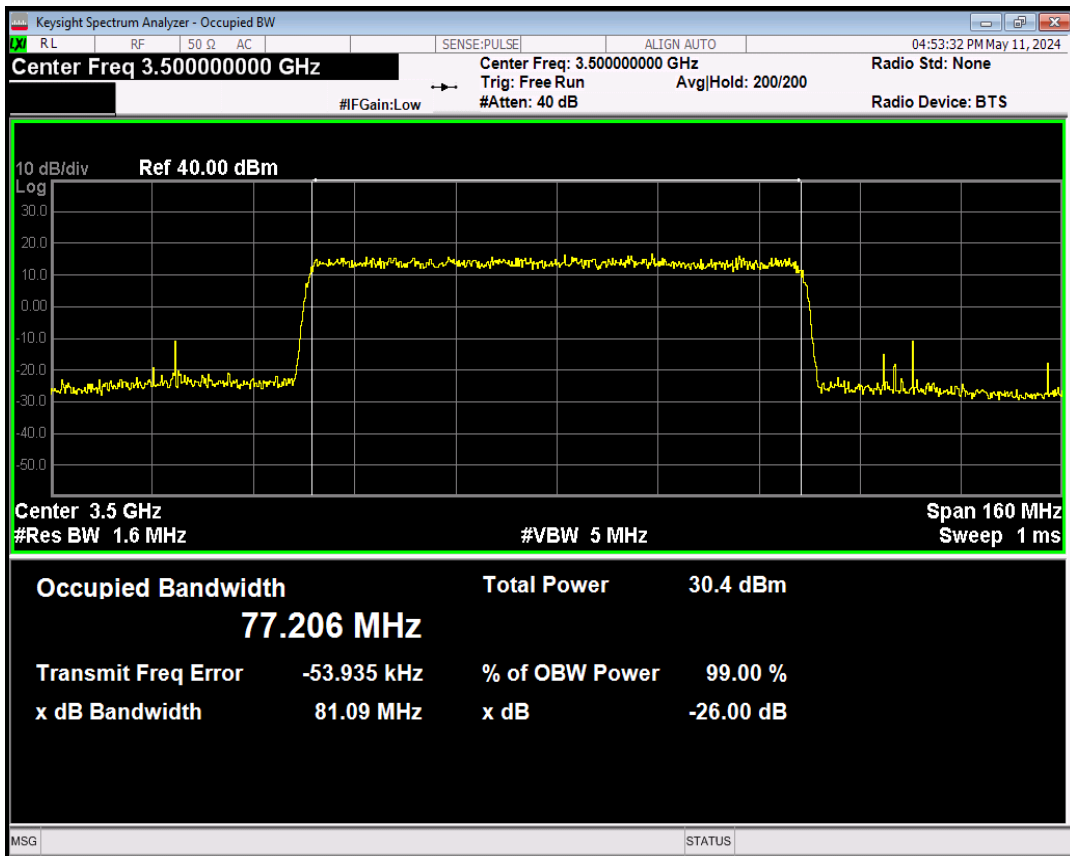


n78 SCS=30kHz DFT_BPSK BW=90MHz Channel=633333 RB=240@0

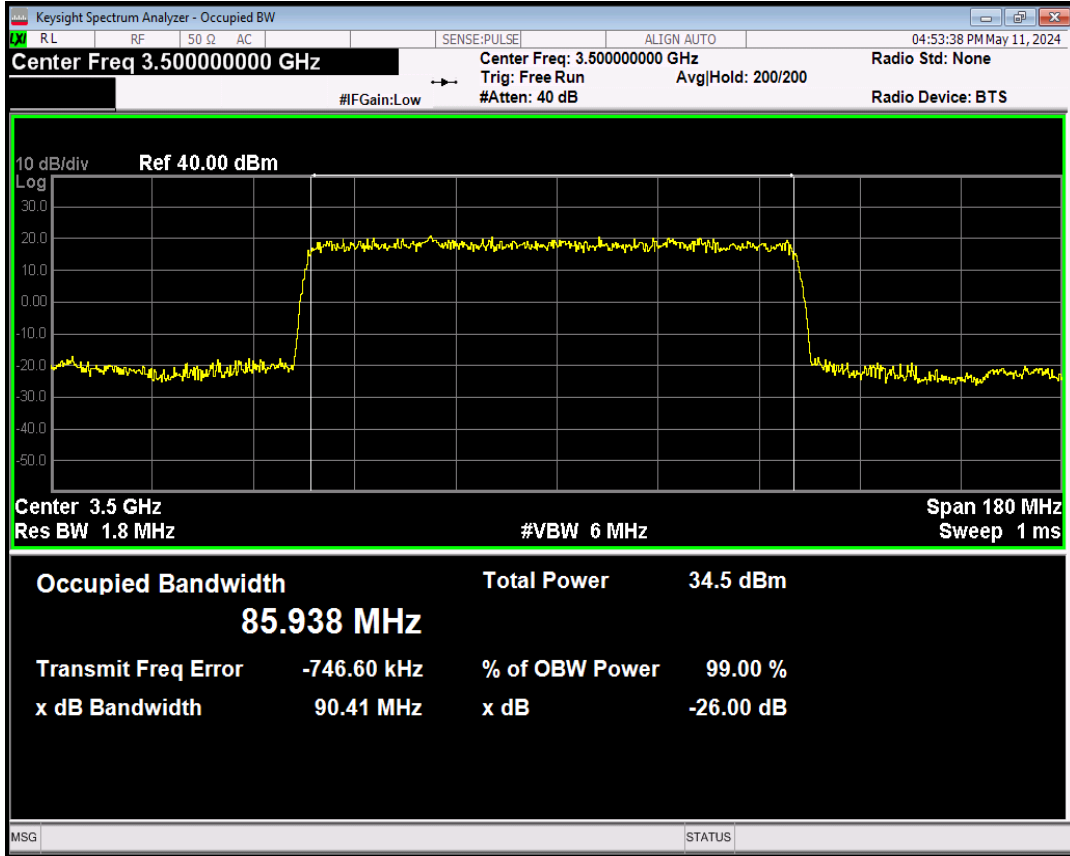


n78 SCS=30kHz DFT_QPSK BW=90MHz Channel=633333 RB=240@0

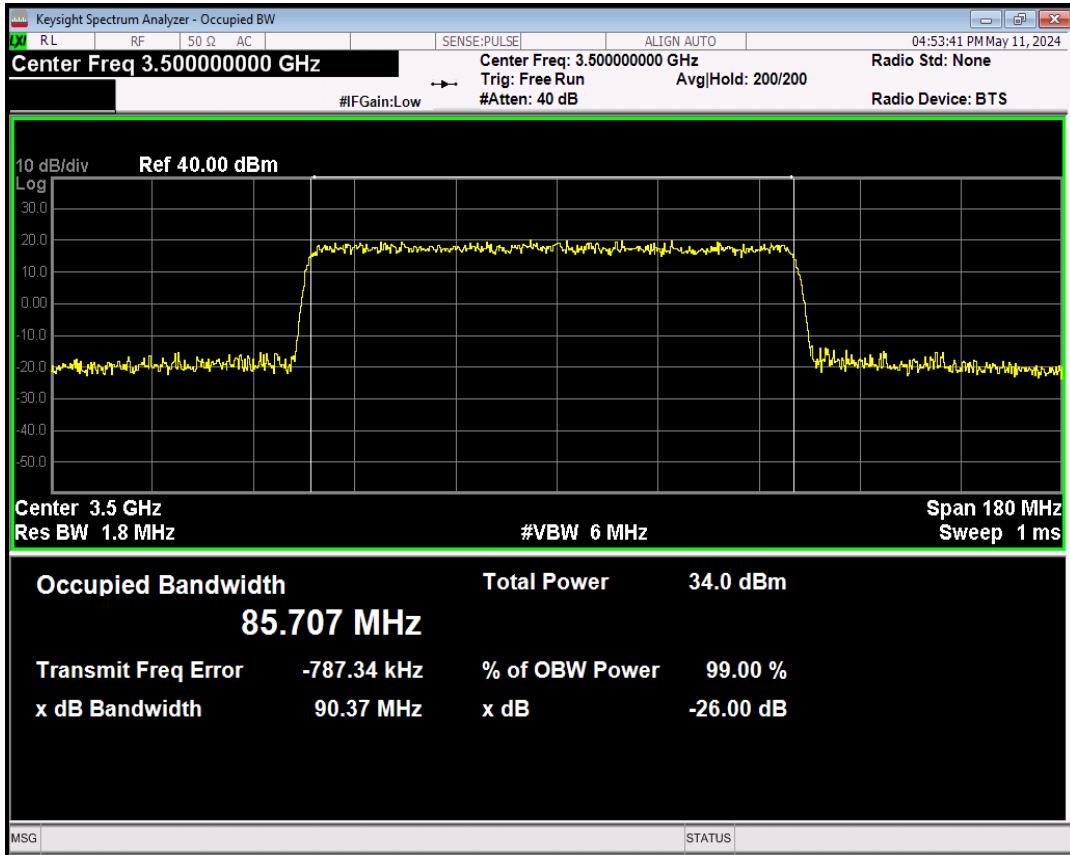


n78 SCS=30kHz DFT_QAM16 BW=90MHz Channel=633333 RB=240@0

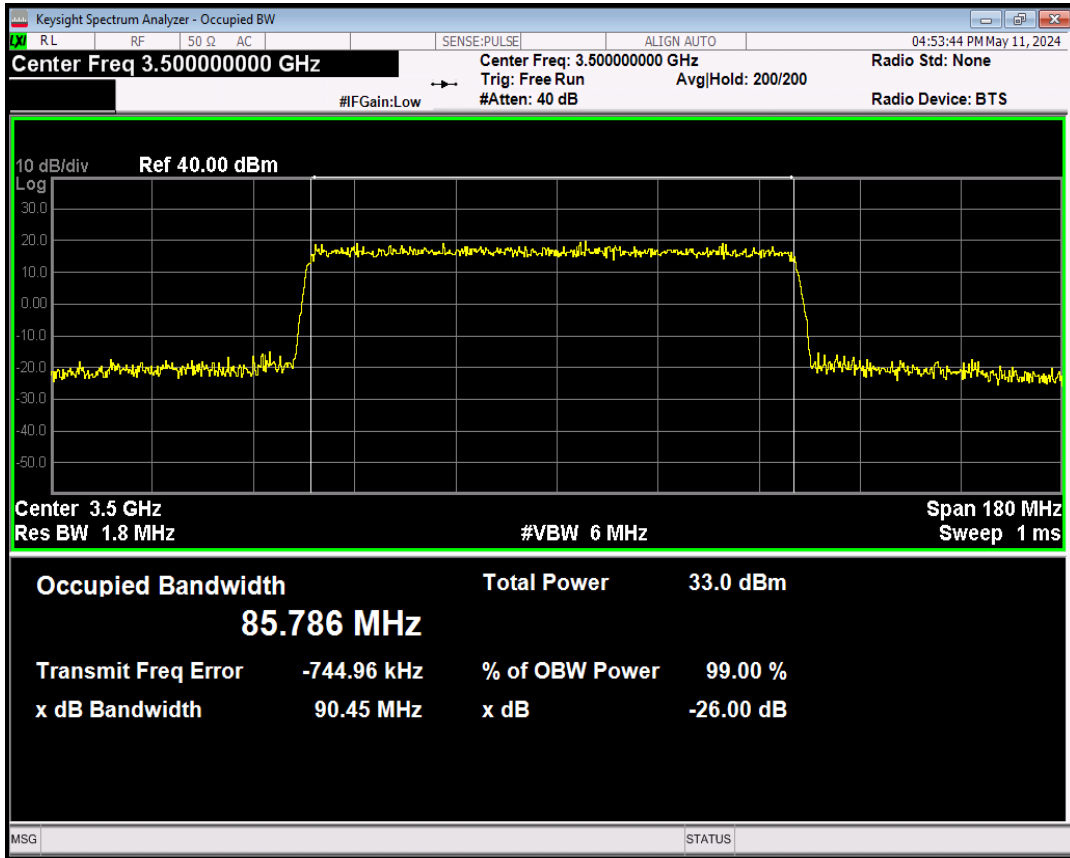


n78 SCS=30kHz DFT_QAM64 BW=90MHz Channel=633333 RB=240@0

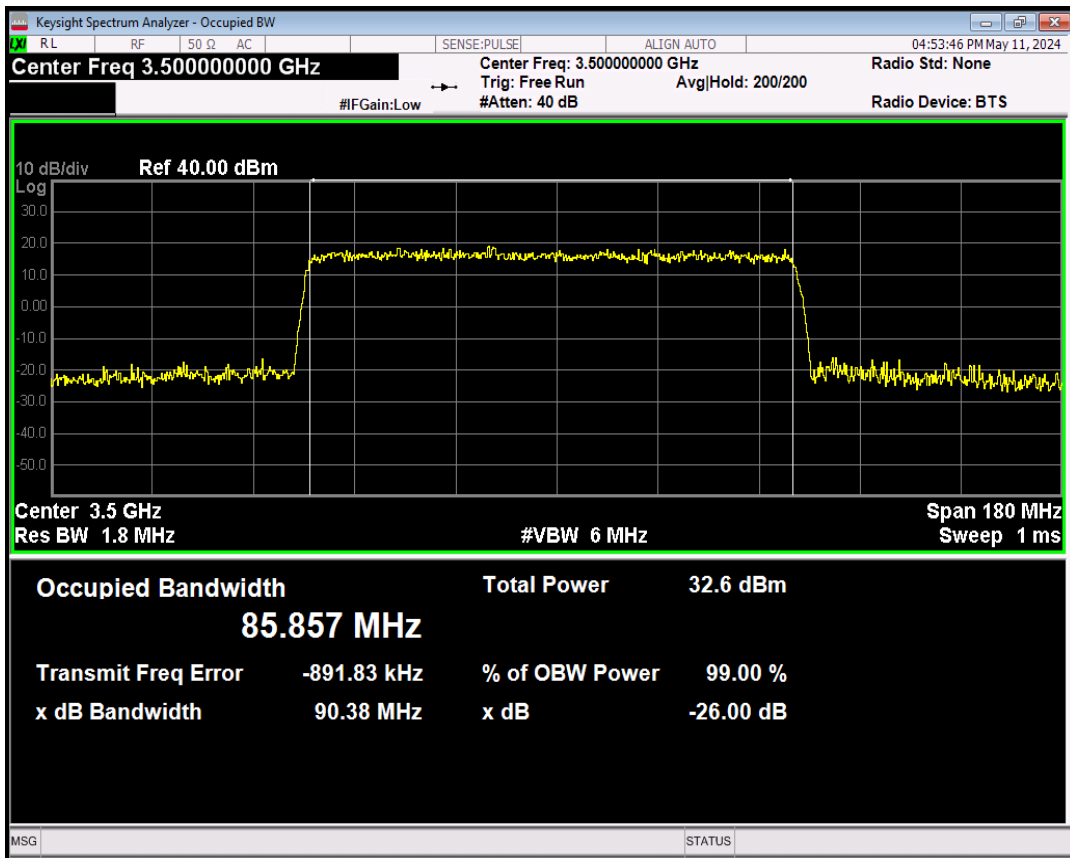


n78 SCS=30kHz DFT_QAM256 BW=90MHz Channel=633333 RB=240@0

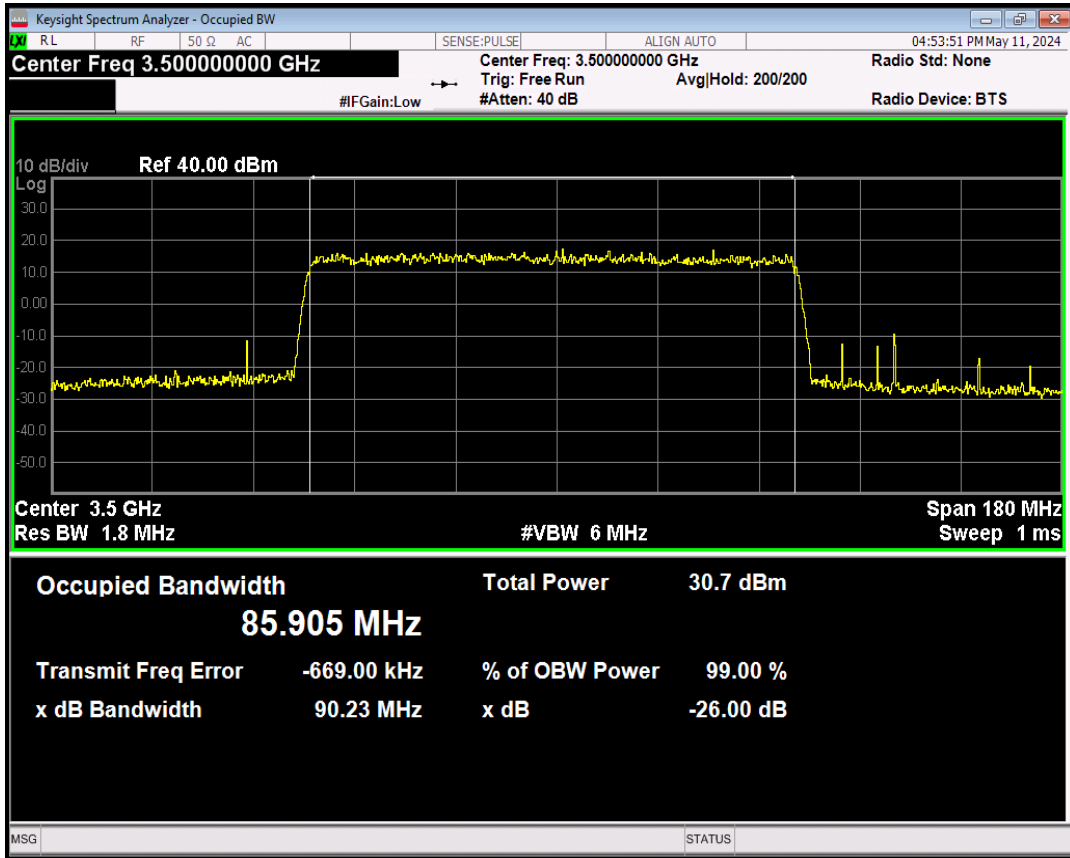


n78 SCS=30kHz DFT_BPSK BW=100MHz Channel=633333 RB=270@0

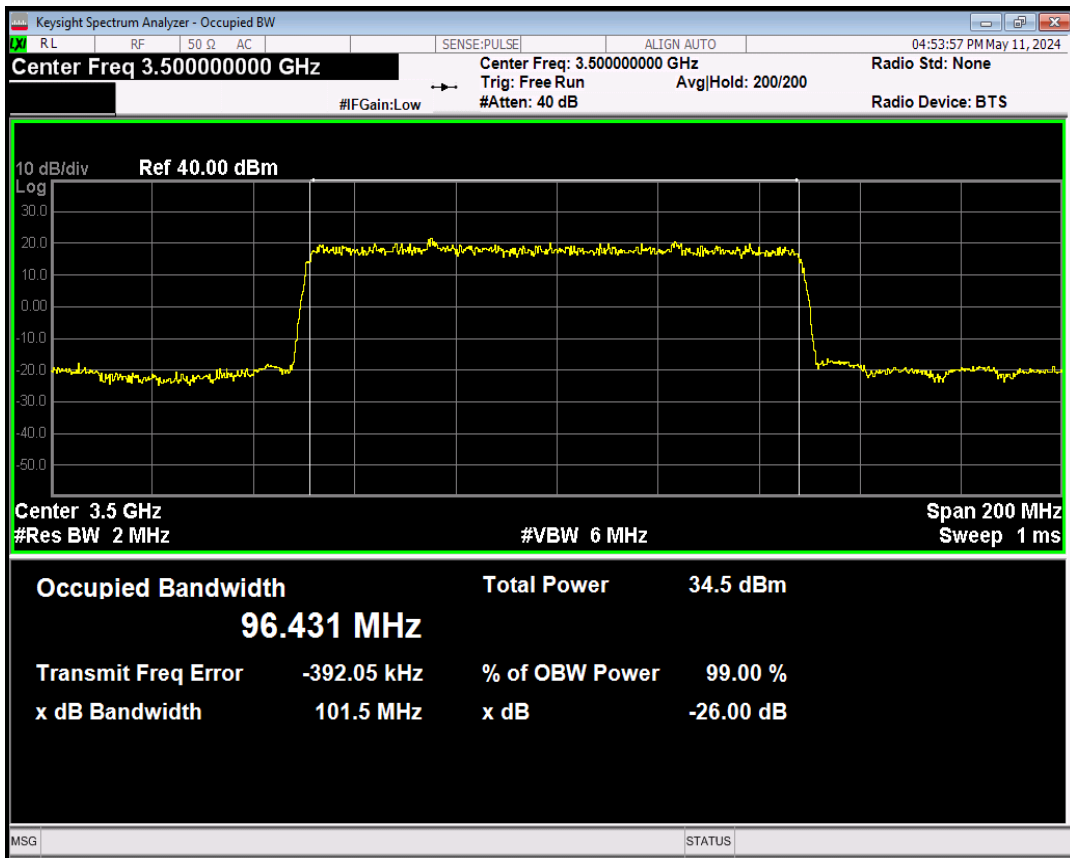


n78 SCS=30kHz DFT_QPSK BW=100MHz Channel=633333 RB=270@0

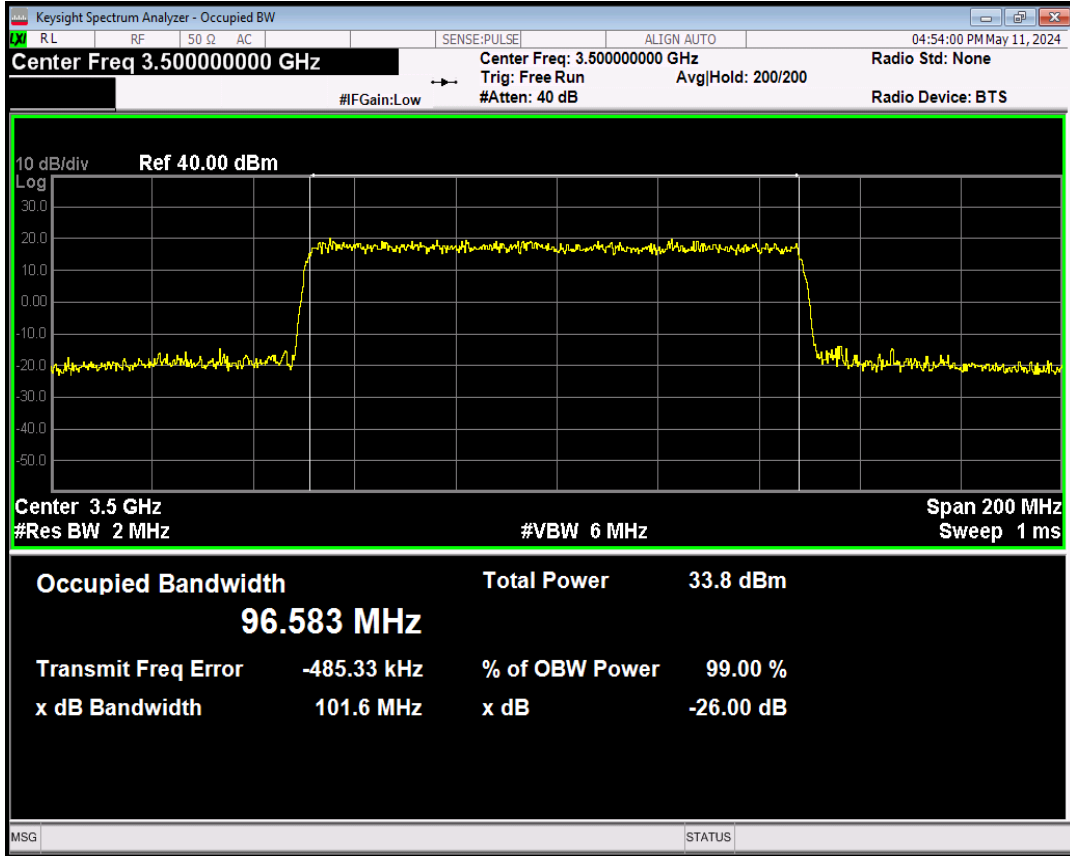


n78 SCS=30kHz DFT_QAM16 BW=100MHz Channel=633333 RB=270@0

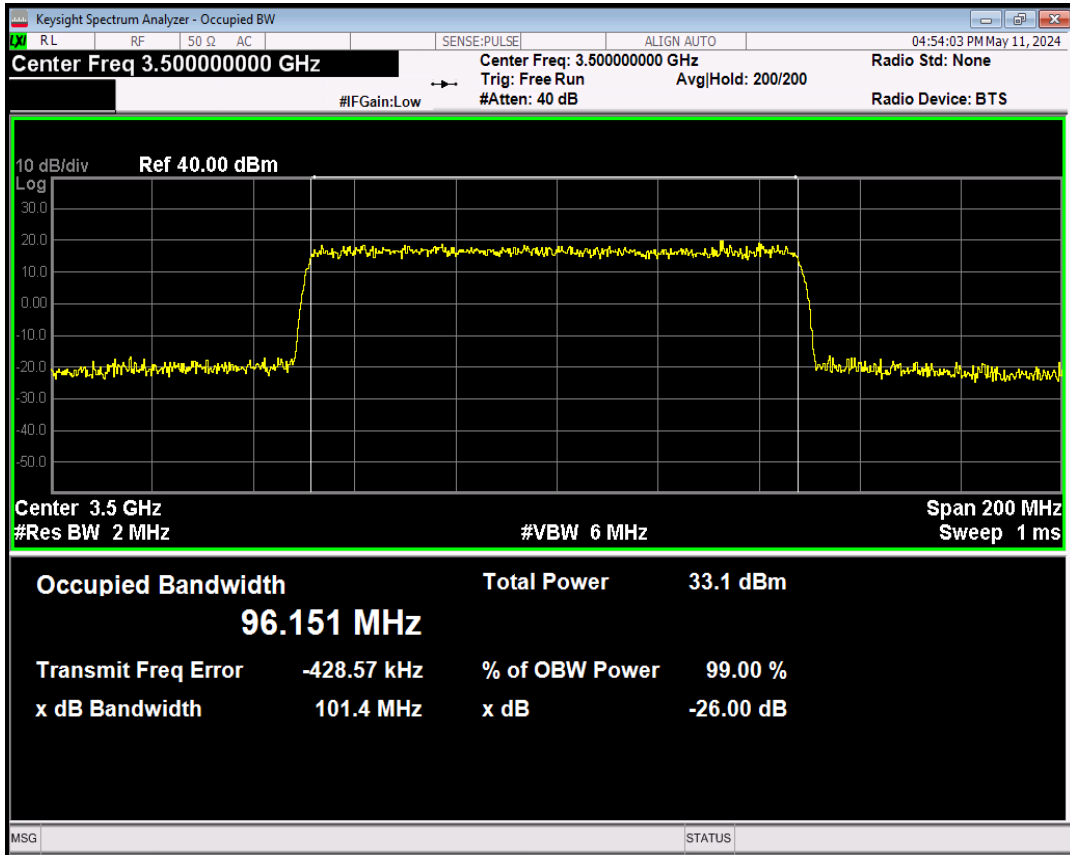

n78 SCS=30kHz DFT_QAM64 BW=100MHz Channel=633333 RB=270@0

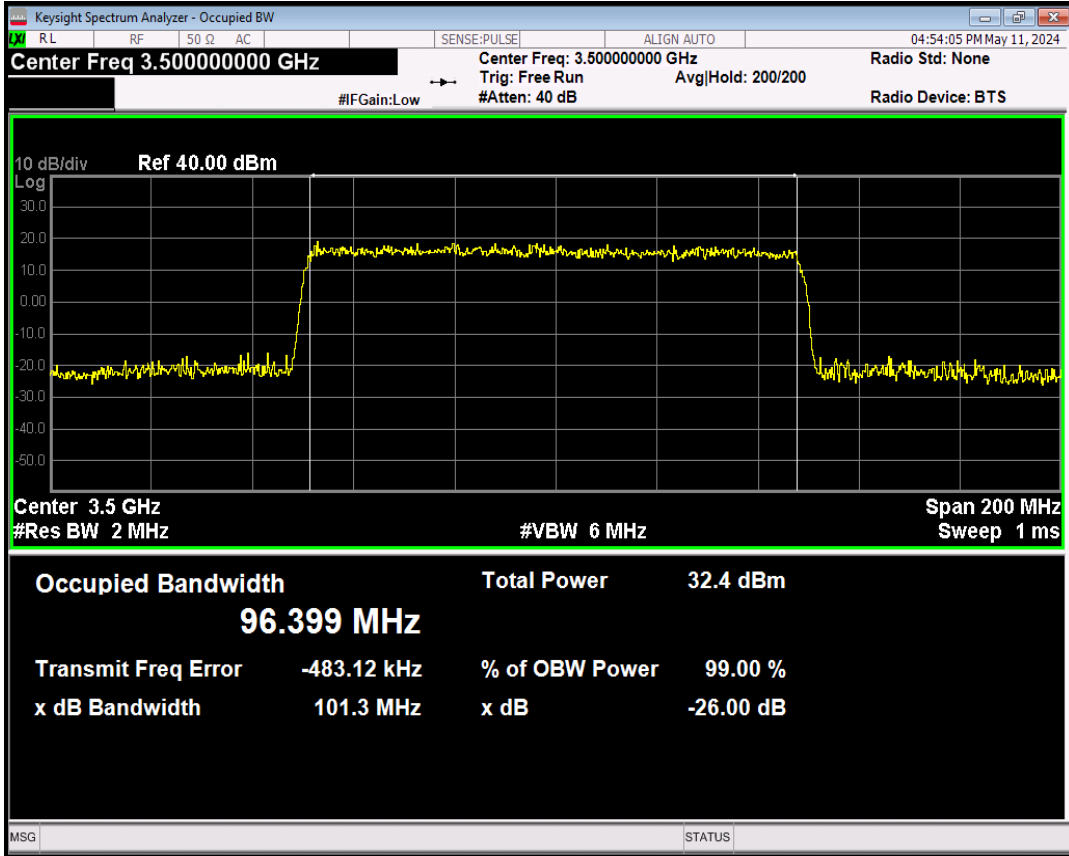


n78 SCS=30kHz DFT_QAM256 BW=100MHz Channel=633333 RB=270@0

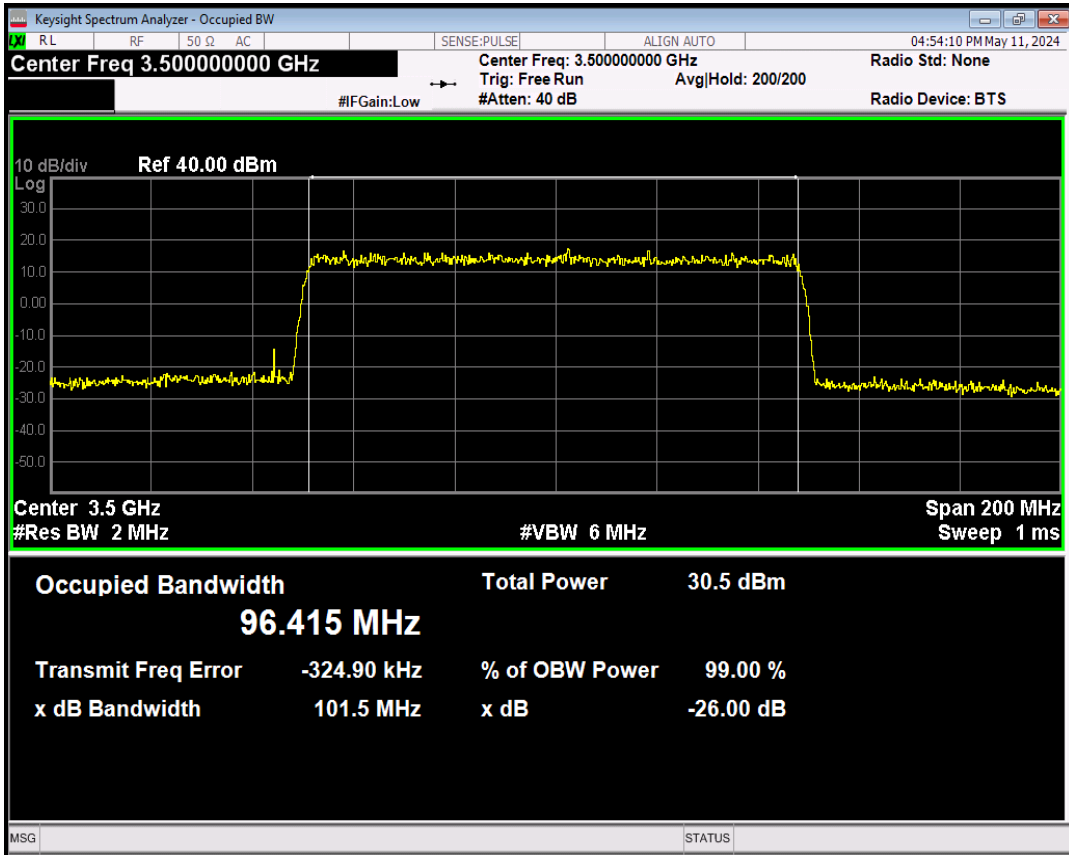


Band edge for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
n78	30	10	630334	24@0	DFT_QPSK	3449.88	-36.10	-13	PASS
n78	30	10	630334	1@0	DFT_QPSK	3449.94	-39.83	-13	PASS
n78	30	10	636333	24@0	DFT_QPSK	3550.10	-35.33	-13	PASS
n78	30	10	636333	1@23	DFT_QPSK	3550.00	-34.34	-13	PASS
n78	30	15	630500	36@0	DFT_QPSK	3443.13	-36.08	-13	PASS
n78	30	15	630500	1@0	DFT_QPSK	3449.97	-33.95	-13	PASS
n78	30	15	636166	36@0	DFT_QPSK	3550.69	-33.95	-13	PASS
n78	30	15	636166	1@37	DFT_QPSK	3550.00	-35.41	-13	PASS
n78	30	20	630667	50@0	DFT_QPSK	3449.28	-35.74	-13	PASS
n78	30	20	630667	1@0	DFT_QPSK	3449.72	-43.46	-13	PASS
n78	30	20	636000	50@0	DFT_QPSK	3550.64	-36.45	-13	PASS
n78	30	20	636000	1@50	DFT_QPSK	3550.00	-34.30	-13	PASS
n78	30	40	631334	100@0	DFT_QPSK	3448.00	-36.01	-13	PASS
n78	30	40	631334	1@0	DFT_QPSK	3449.76	-32.33	-13	PASS
n78	30	40	635333	100@0	DFT_QPSK	3553.76	-35.58	-13	PASS
n78	30	40	635333	1@105	DFT_QPSK	3550.00	-21.63	-13	PASS
n78	30	50	631667	128@0	DFT_QPSK	3443.80	-33.10	-13	PASS
n78	30	50	631667	1@0	DFT_QPSK	3450.00	-30.23	-13	PASS
n78	30	50	635000	128@0	DFT_QPSK	3556.40	-35.45	-13	PASS
n78	30	50	635000	1@132	DFT_QPSK	3550.00	-21.27	-13	PASS
n78	30	60	632000	162@0	DFT_QPSK	3450.00	-34.35	-13	PASS
n78	30	60	632000	1@0	DFT_QPSK	3450.00	-17.31	-13	PASS
n78	30	60	634666	162@0	DFT_QPSK	3550.00	-23.55	-13	PASS
n78	30	60	634666	1@161	DFT_QPSK	3550.00	-34.71	-13	PASS
n78	30	80	632667	216@0	DFT_QPSK	3450.00	-31.33	-13	PASS
n78	30	80	632667	1@0	DFT_QPSK	3450.00	-13.74	-13	PASS
n78	30	80	634000	216@0	DFT_QPSK	3550.00	-30.65	-13	PASS
n78	30	80	634000	1@216	DFT_QPSK	3550.00	-21.95	-13	PASS
n78	30	90	633000	240@0	DFT_QPSK	3450.00	-27.68	-13	PASS
n78	30	90	633000	1@0	DFT_QPSK	3450.00	-32.14	-13	PASS
n78	30	90	633666	240@0	DFT_QPSK	3550.54	-34.46	-13	PASS
n78	30	90	633666	1@244	DFT_QPSK	3550.00	-13.51	-13	PASS
n78	30	100	633333	270@0	DFT_QPSK	3450.00	-28.09	-13	PASS
n78	30	100	633333	1@0	DFT_QPSK	3450.00	-25.51	-13	PASS


n78 SCS=30kHz DFT_QPSK BW=10MHz Channel=630334 RB=24@0

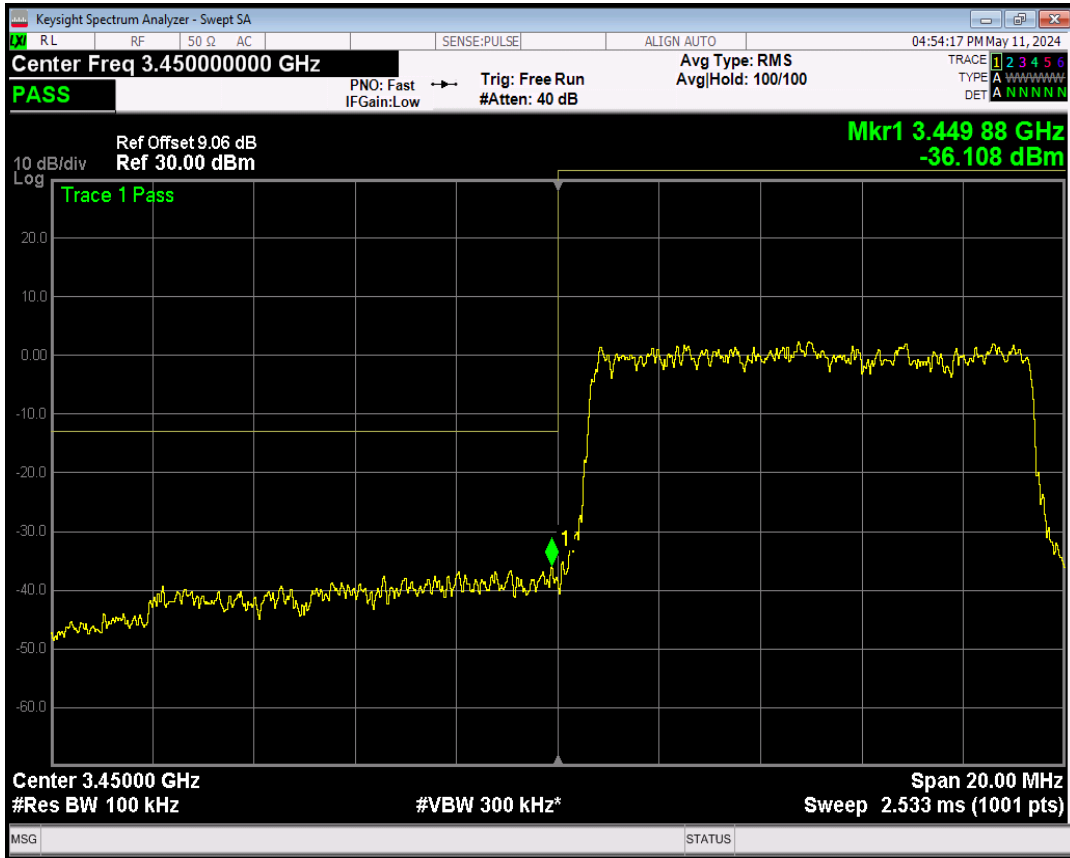


n78 SCS=30kHz DFT_QPSK BW=10MHz Channel=630334 RB=1@0

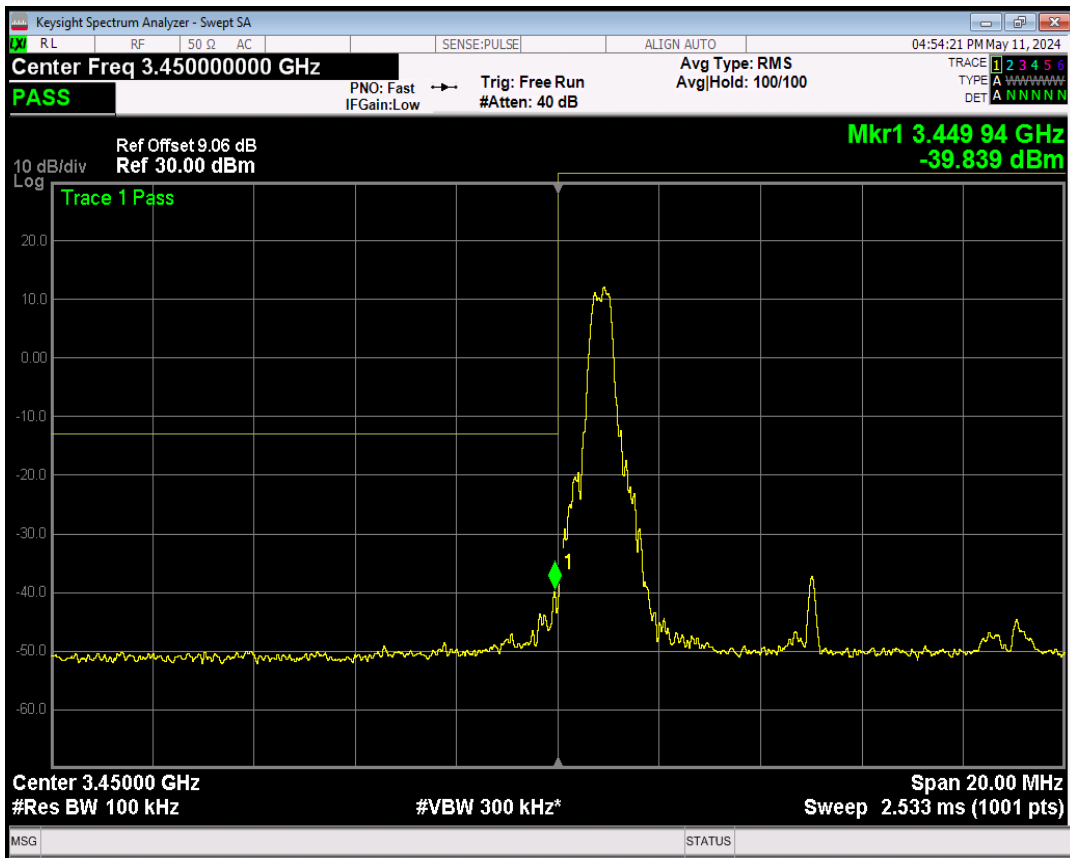


n78 SCS=30kHz DFT_QPSK BW=10MHz Channel=636333 RB=24@0

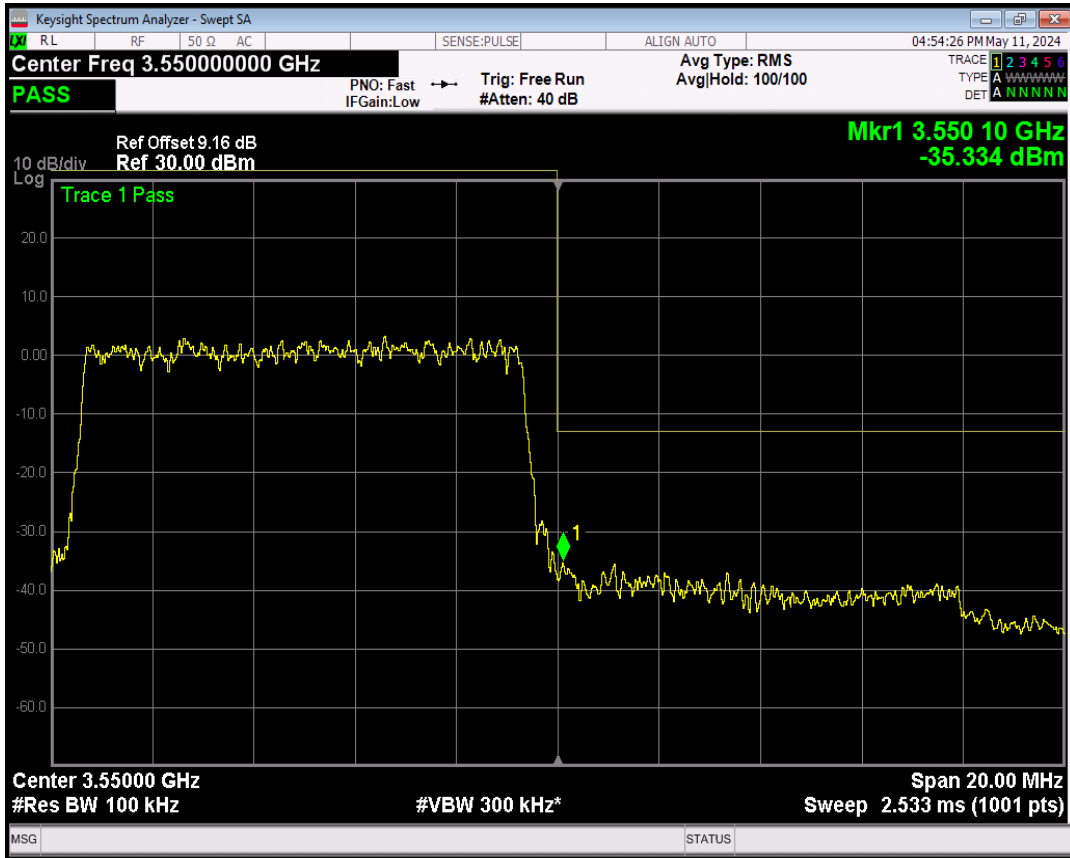


n78 SCS=30kHz DFT_QPSK BW=10MHz Channel=636333 RB=1@23

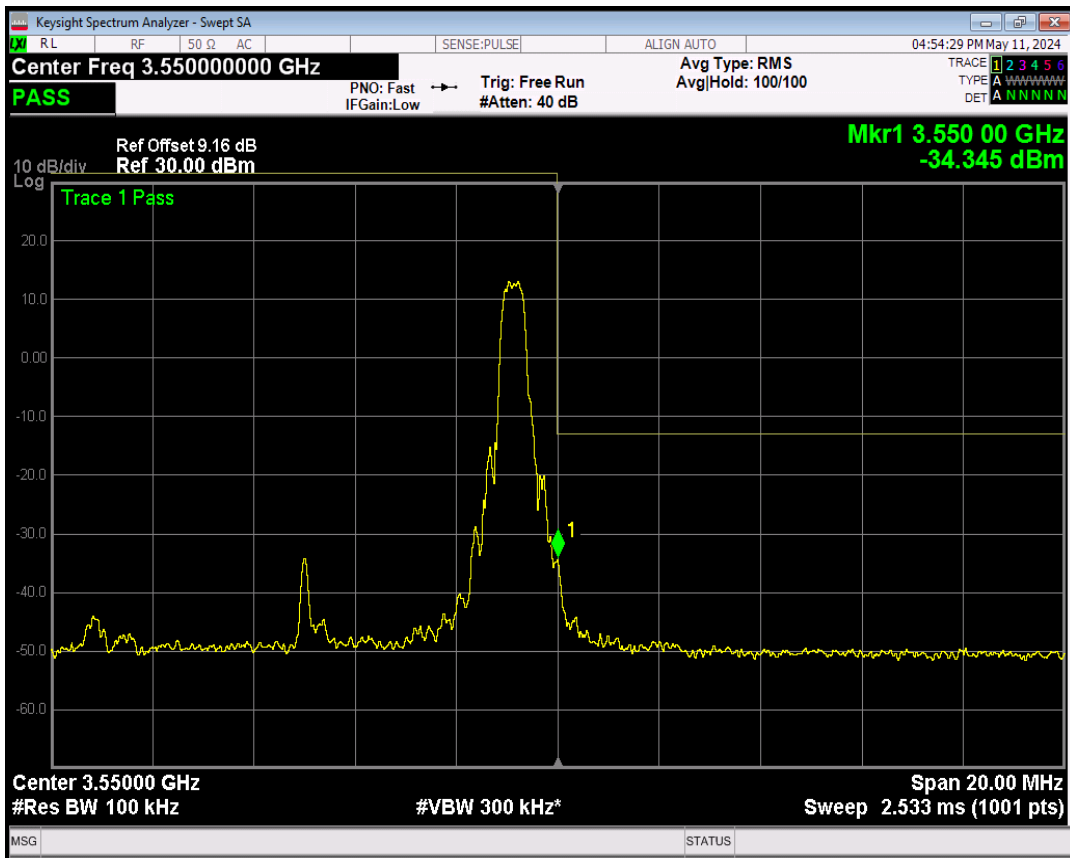


n78 SCS=30kHz DFT_QPSK BW=15MHz Channel=630500 RB=36@0

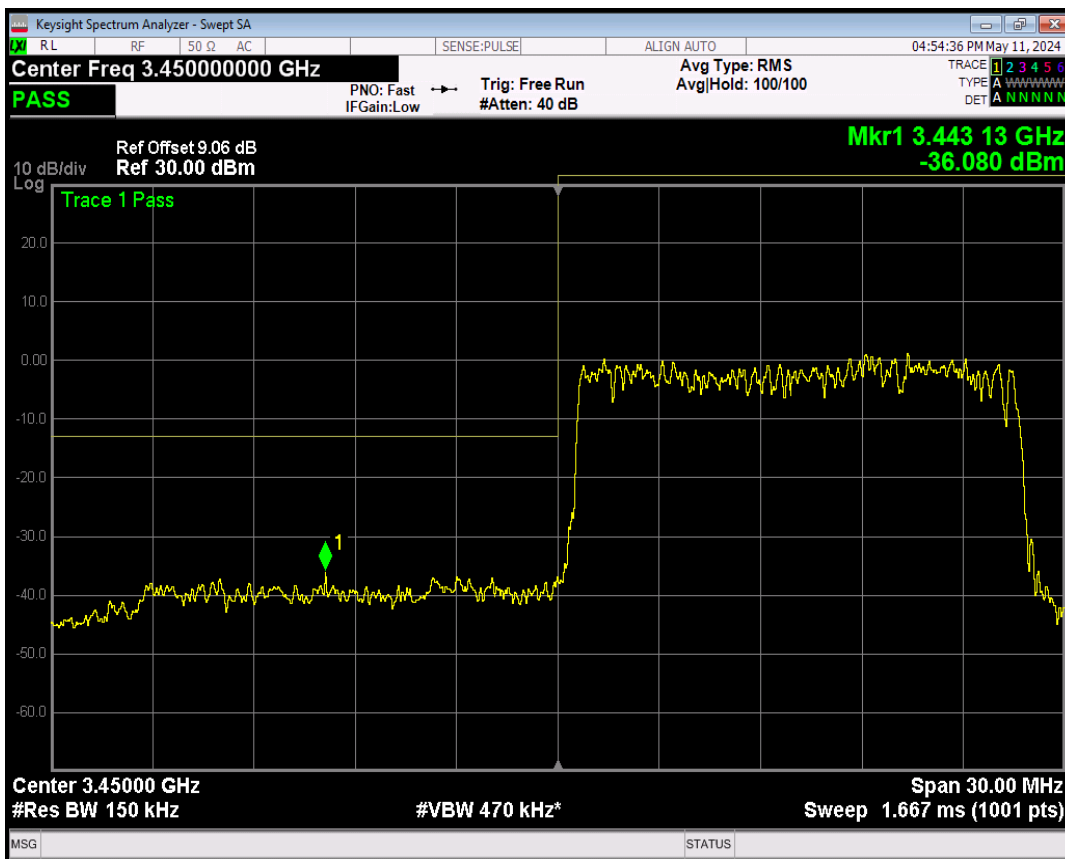


n78 SCS=30kHz DFT_QPSK BW=15MHz Channel=630500 RB=1@0

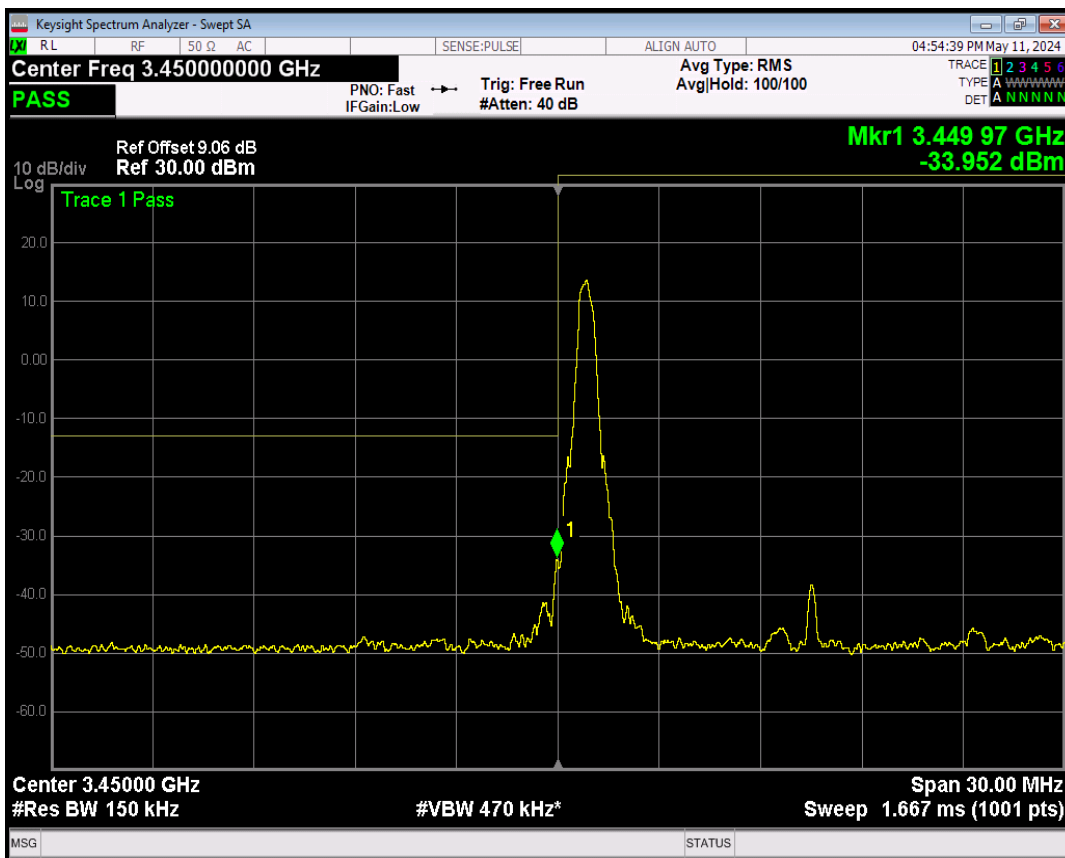


n78 SCS=30kHz DFT_QPSK BW=15MHz Channel=636166 RB=36@0

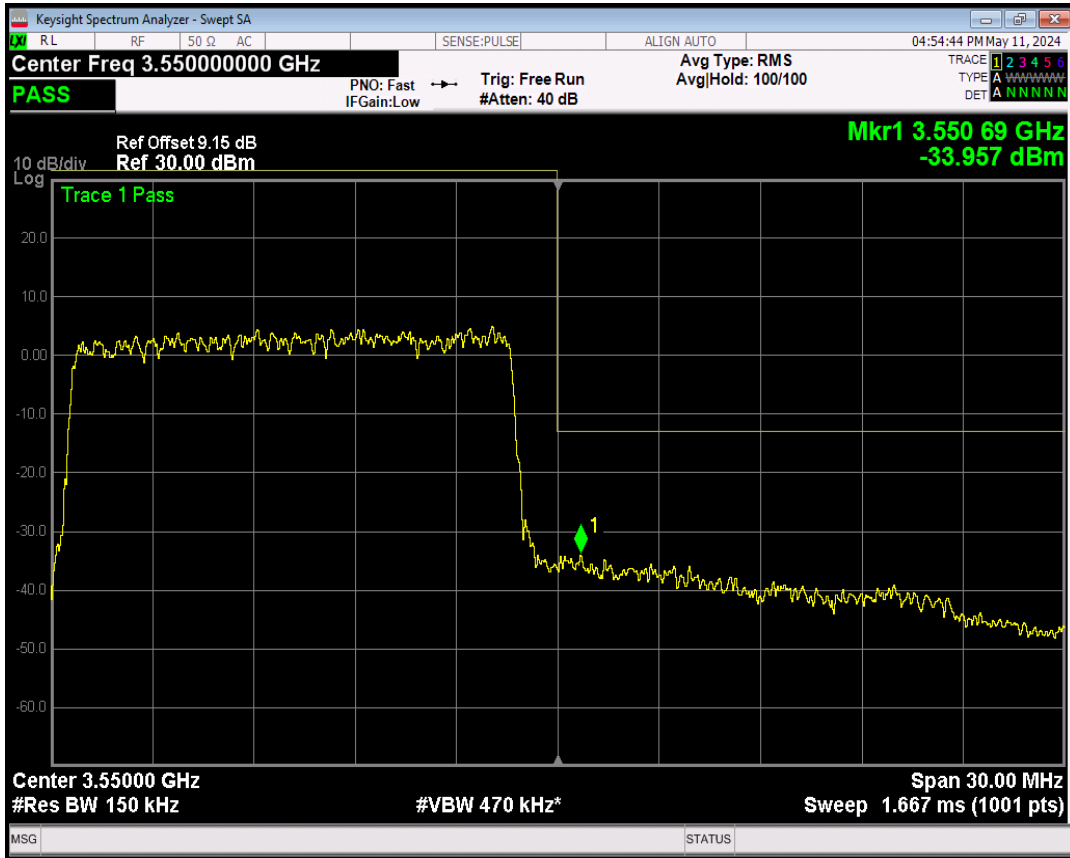


n78 SCS=30kHz DFT_QPSK BW=15MHz Channel=636166 RB=1@37

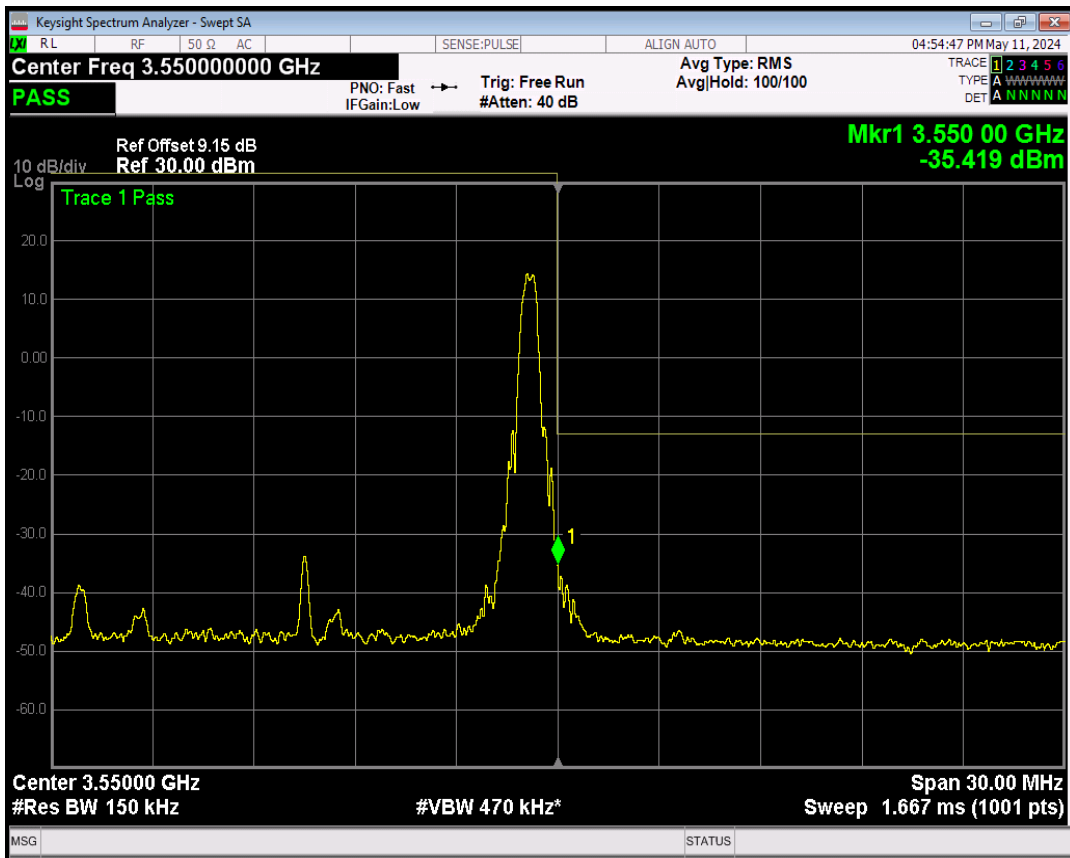


n78 SCS=30kHz DFT_QPSK BW=20MHz Channel=630667 RB=50@0

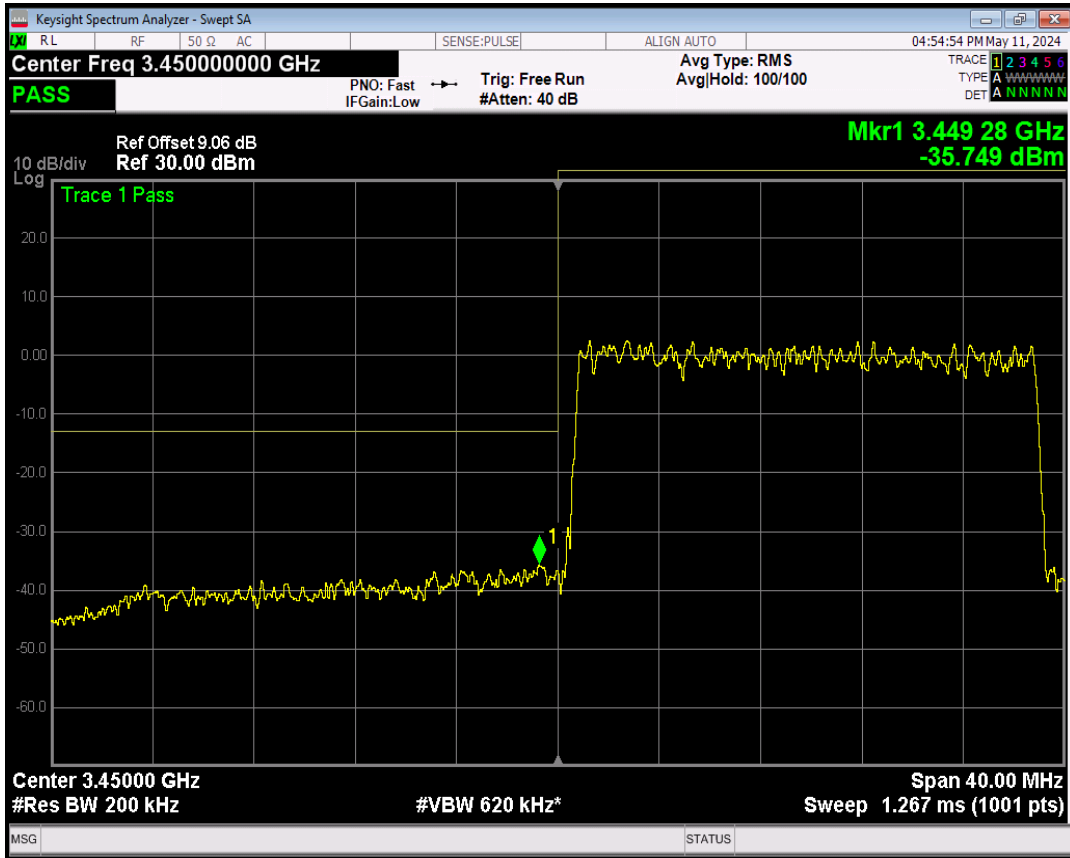


n78 SCS=30kHz DFT_QPSK BW=20MHz Channel=630667 RB=1@0

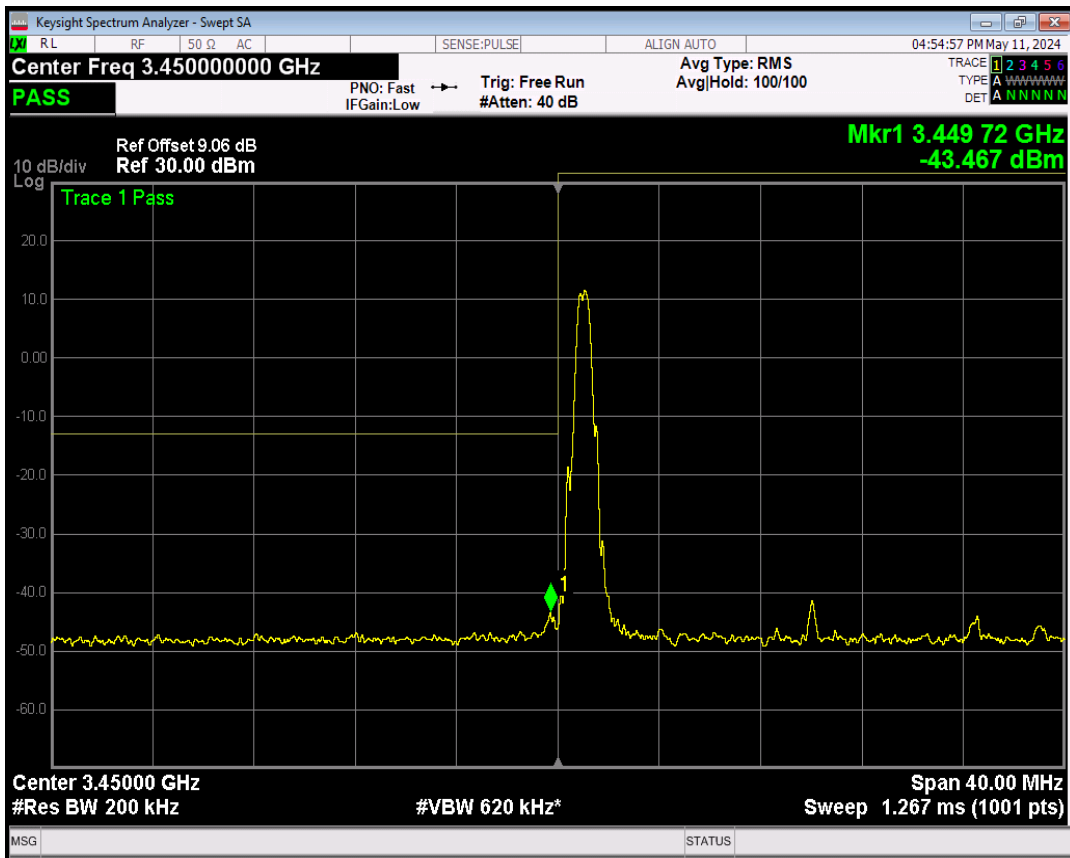


n78 SCS=30kHz DFT_QPSK BW=20MHz Channel=636000 RB=50@0

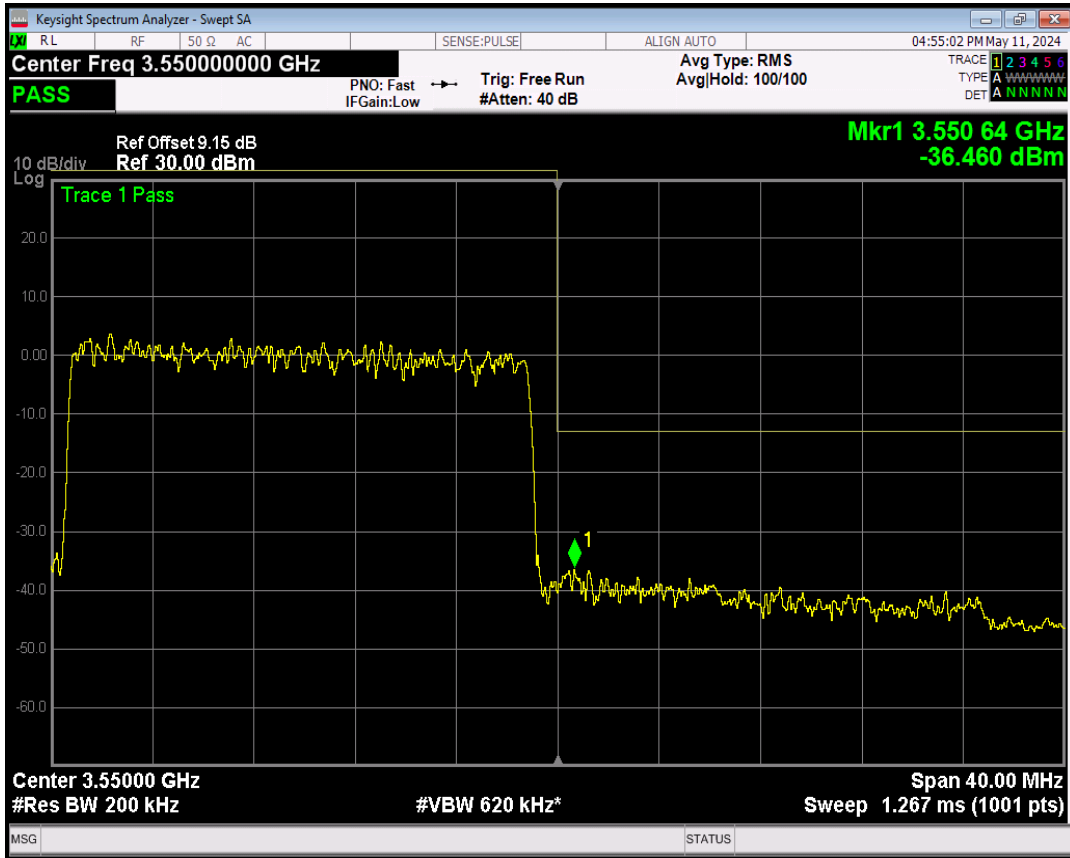


n78 SCS=30kHz DFT_QPSK BW=20MHz Channel=636000 RB=1@50

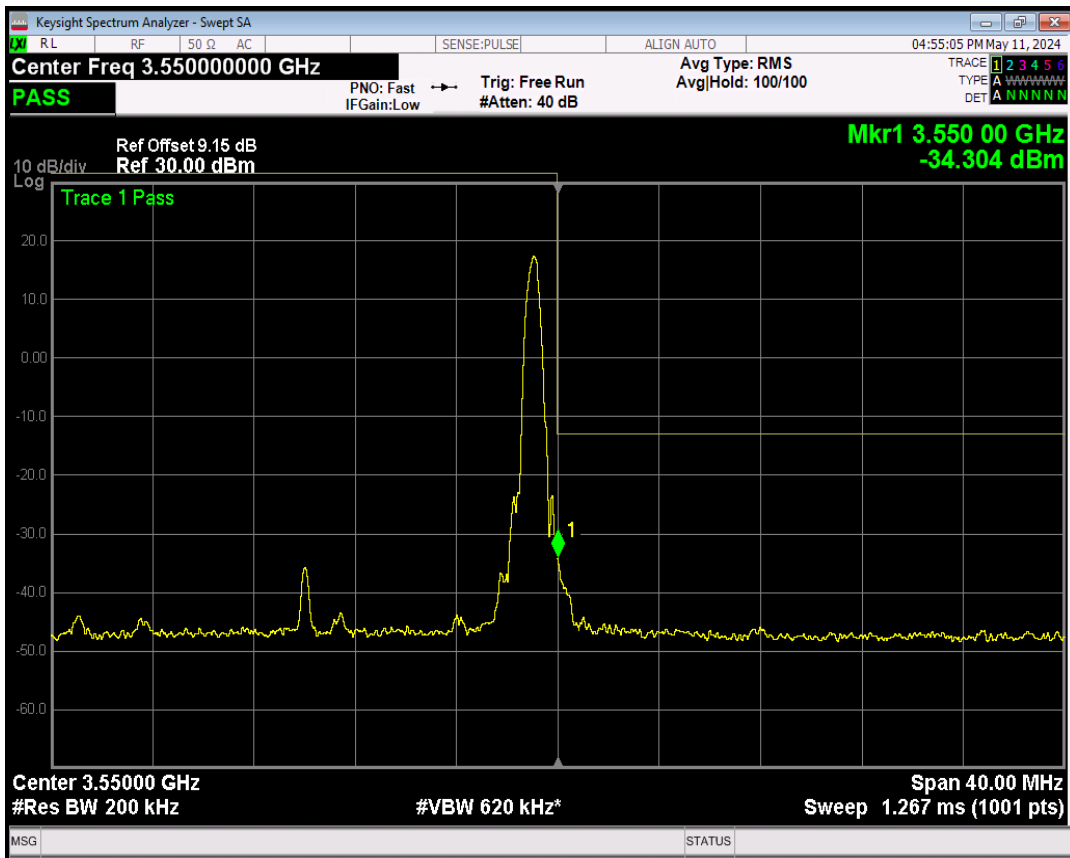


n78 SCS=30kHz DFT_QPSK BW=40MHz Channel=631334 RB=100@0

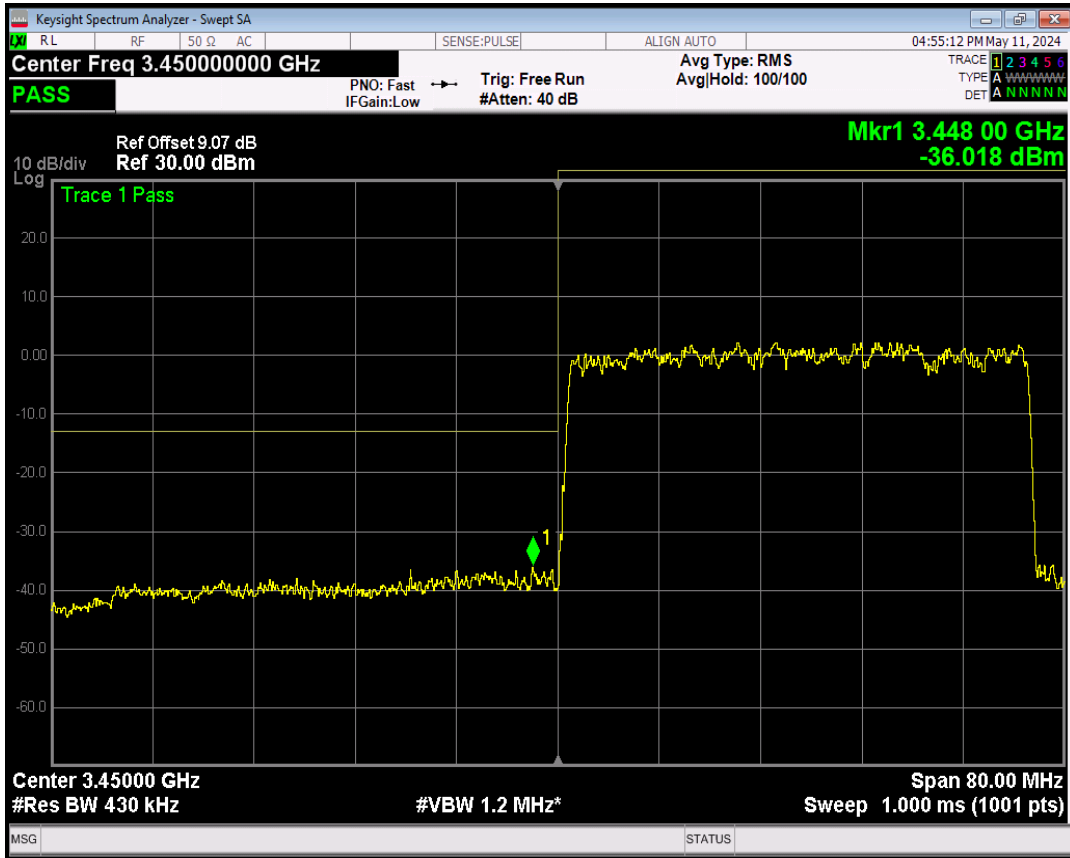


n78 SCS=30kHz DFT_QPSK BW=40MHz Channel=631334 RB=1@0

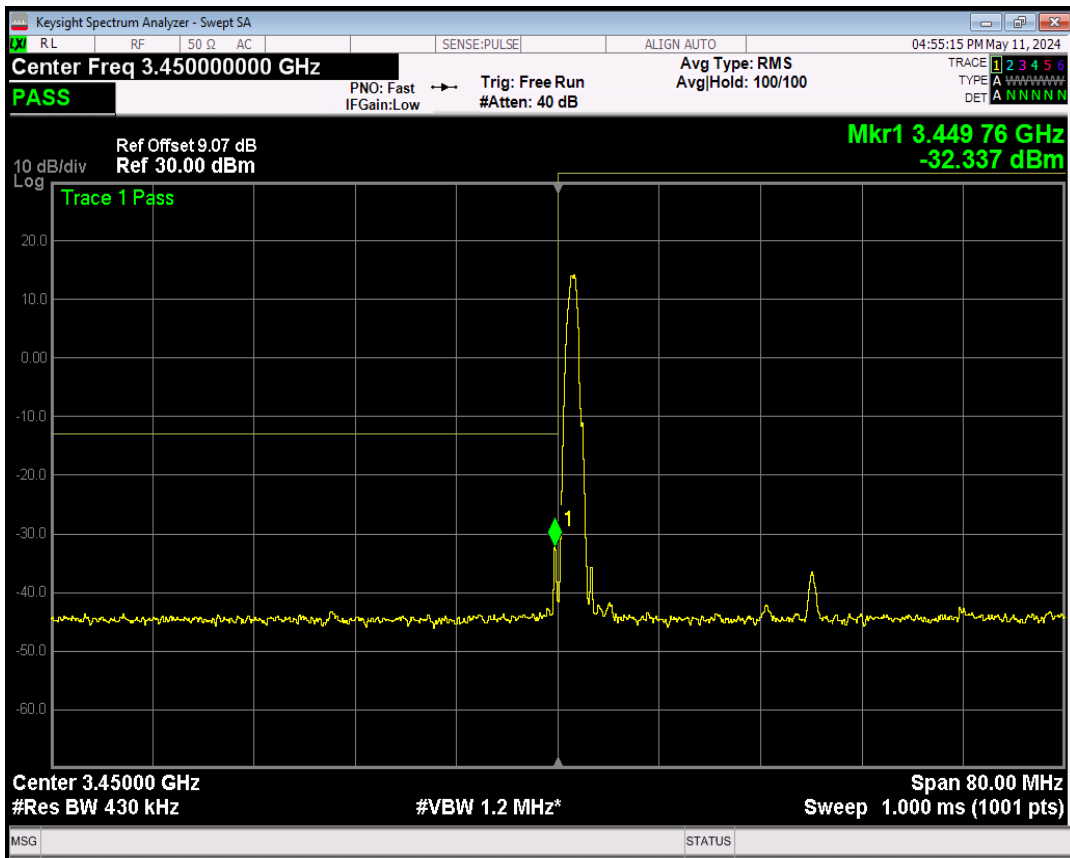


n78 SCS=30kHz DFT_QPSK BW=40MHz Channel=635333 RB=100@0

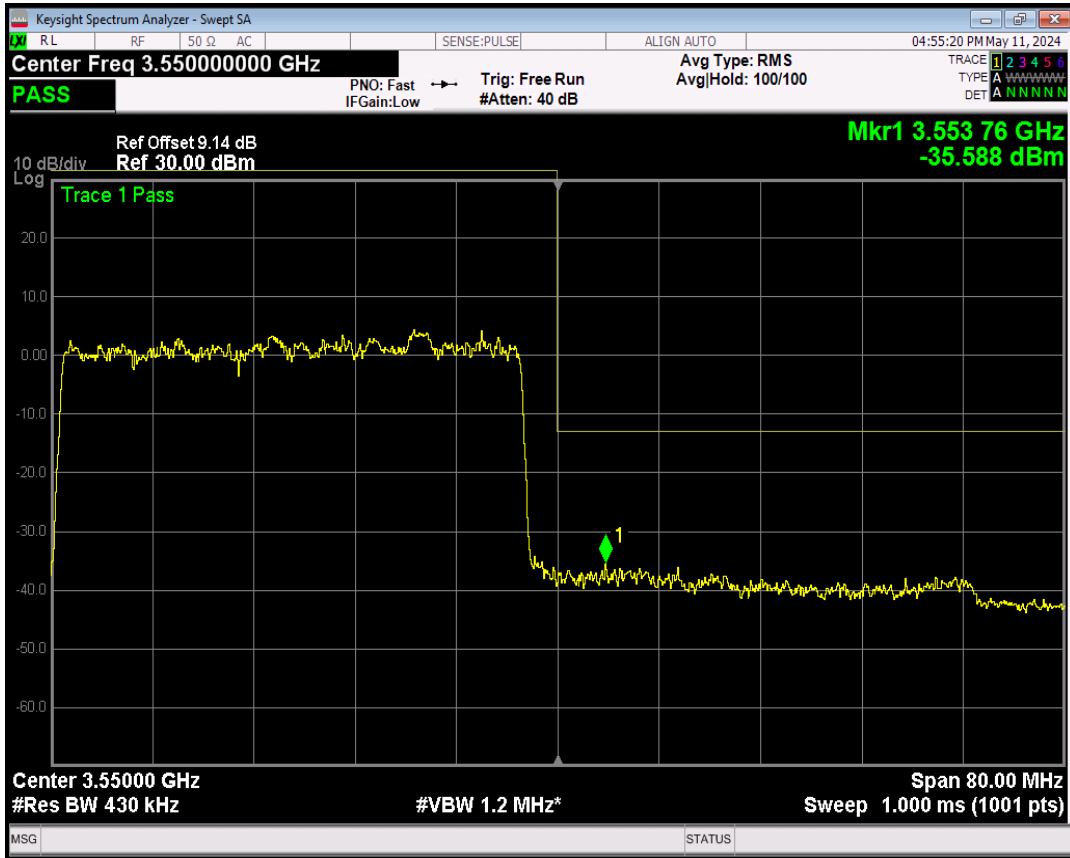


n78 SCS=30kHz DFT_QPSK BW=40MHz Channel=635333 RB=1@105

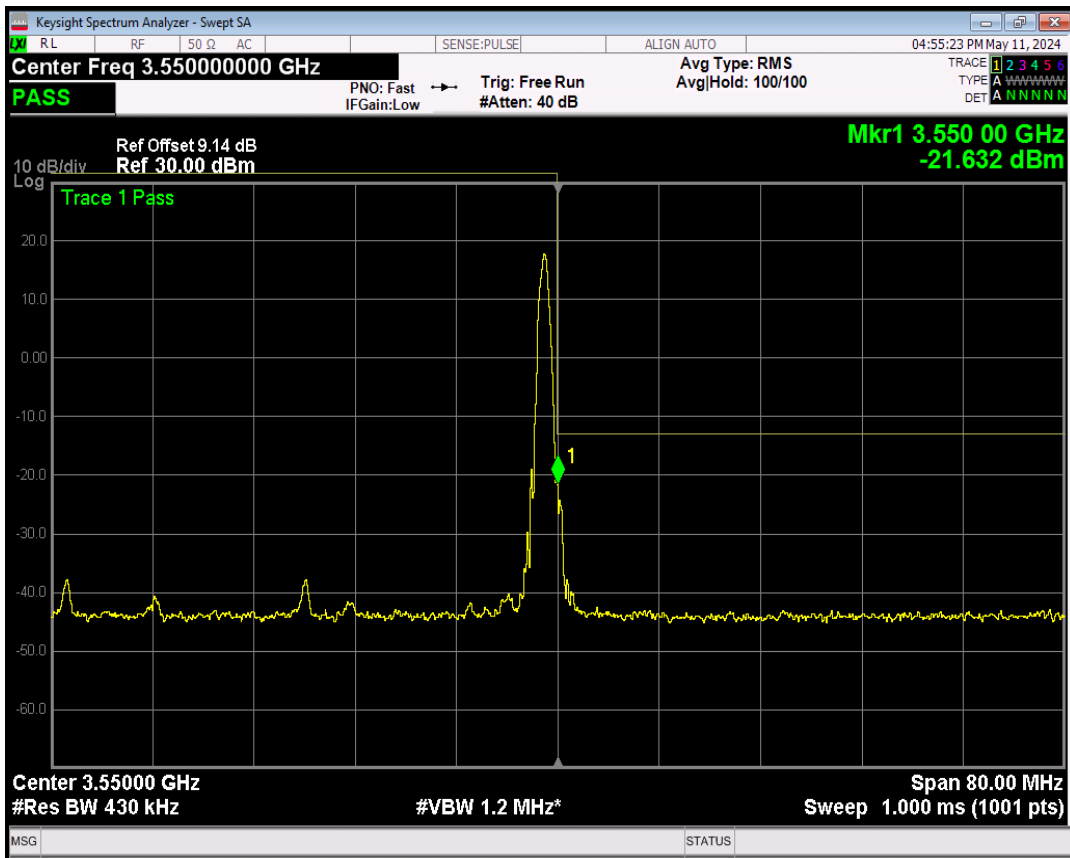


n78 SCS=30kHz DFT_QPSK BW=50MHz Channel=631667 RB=128@0

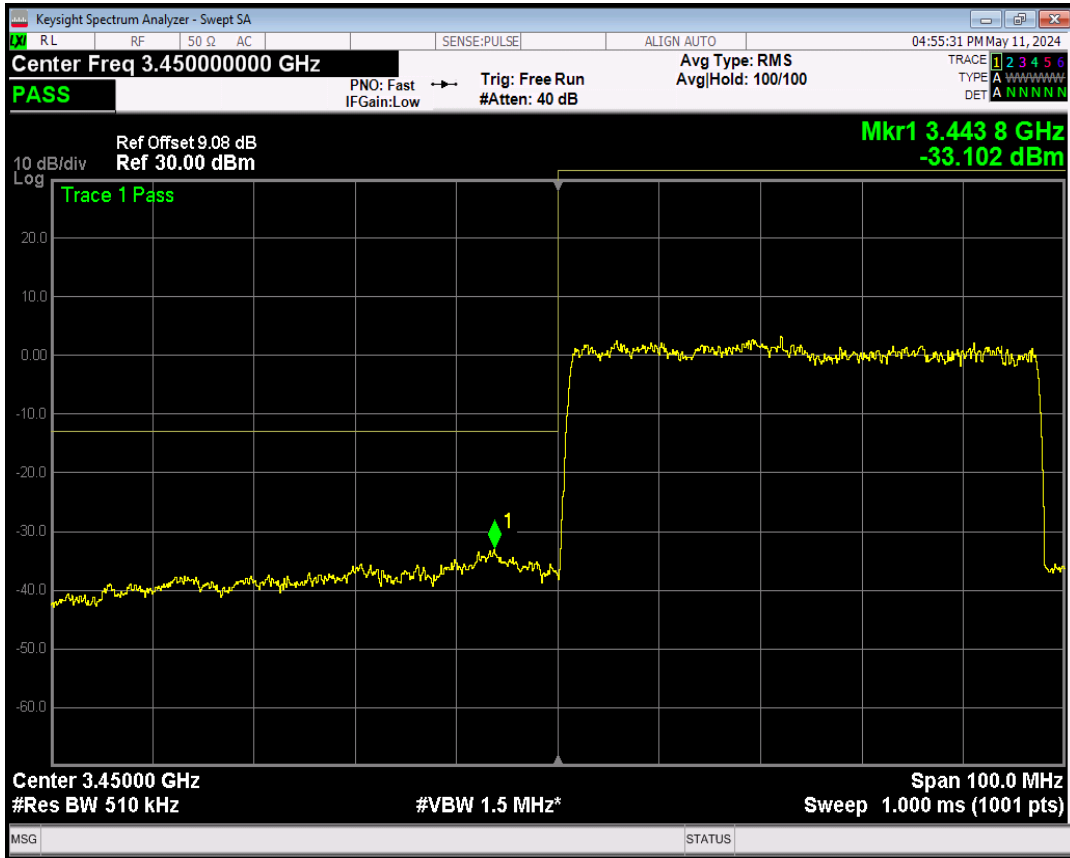


n78 SCS=30kHz DFT_QPSK BW=50MHz Channel=631667 RB=1@0

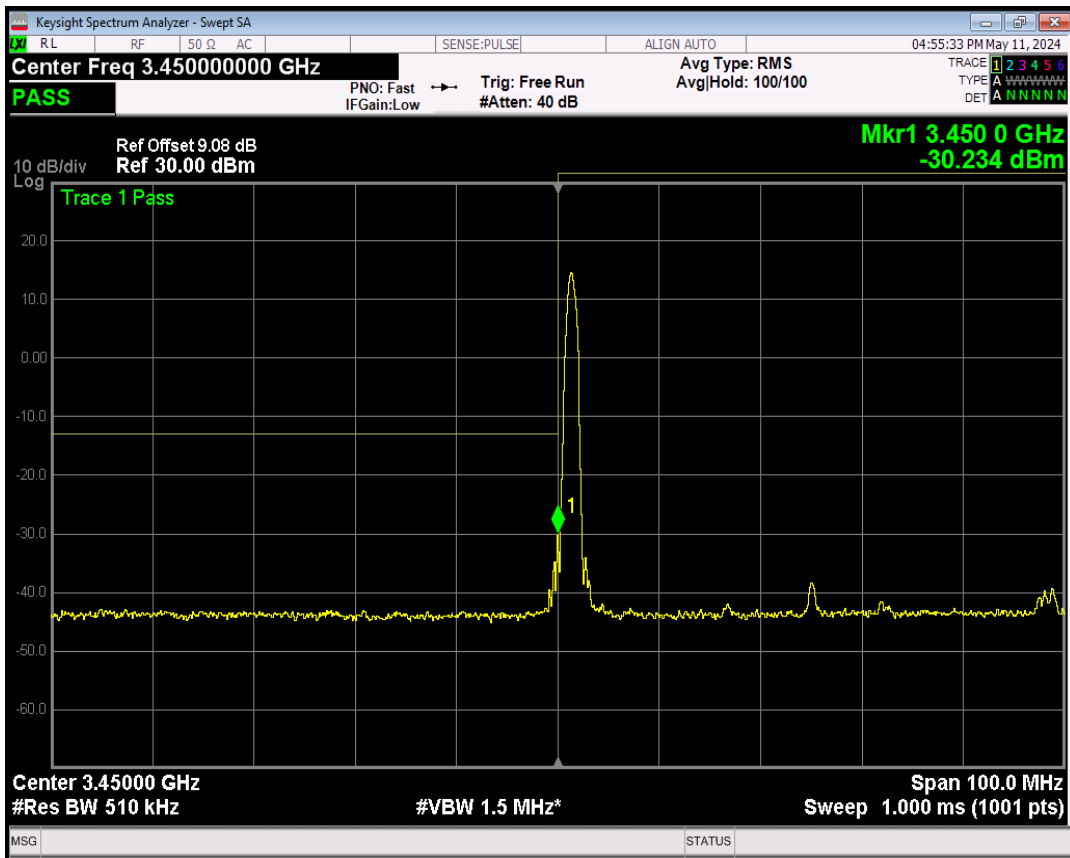


n78 SCS=30kHz DFT_QPSK BW=50MHz Channel=635000 RB=128@0

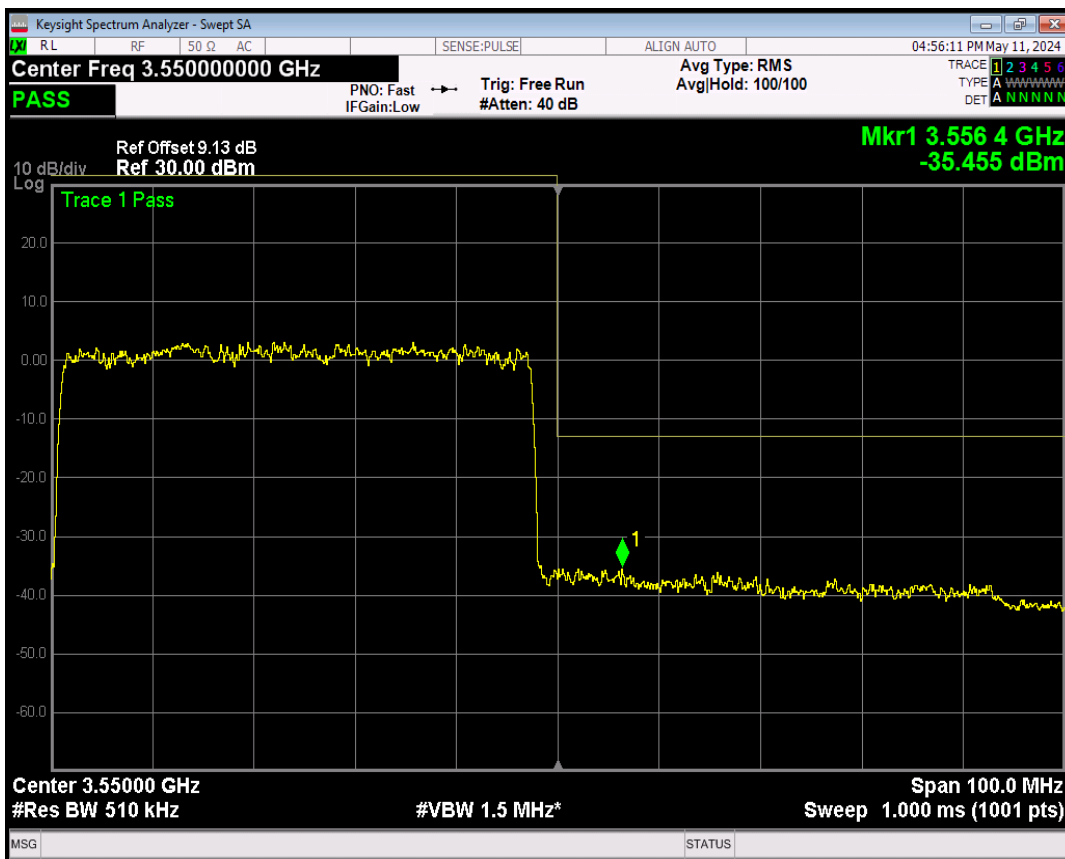


n78 SCS=30kHz DFT_QPSK BW=50MHz Channel=635000 RB=1 @132

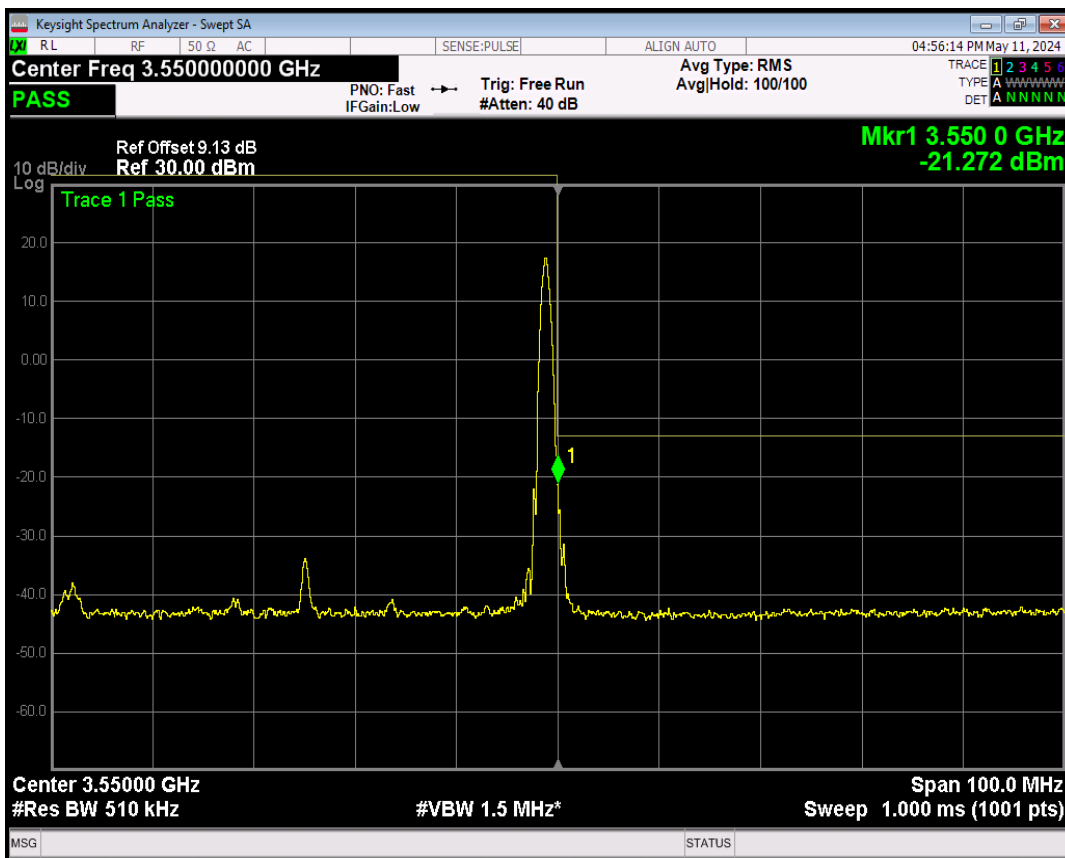


n78 SCS=30kHz DFT_QPSK BW=60MHz Channel=632000 RB=162 @0

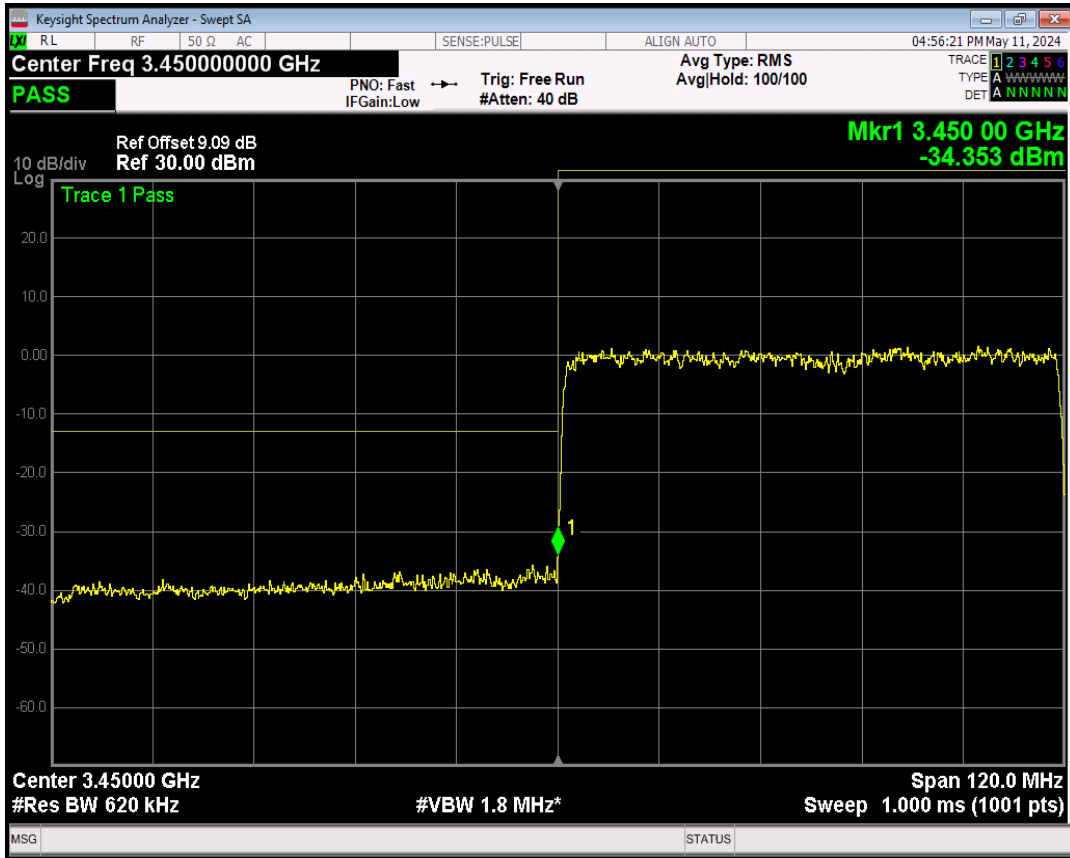


n78 SCS=30kHz DFT_QPSK BW=60MHz Channel=632000 RB=1@0

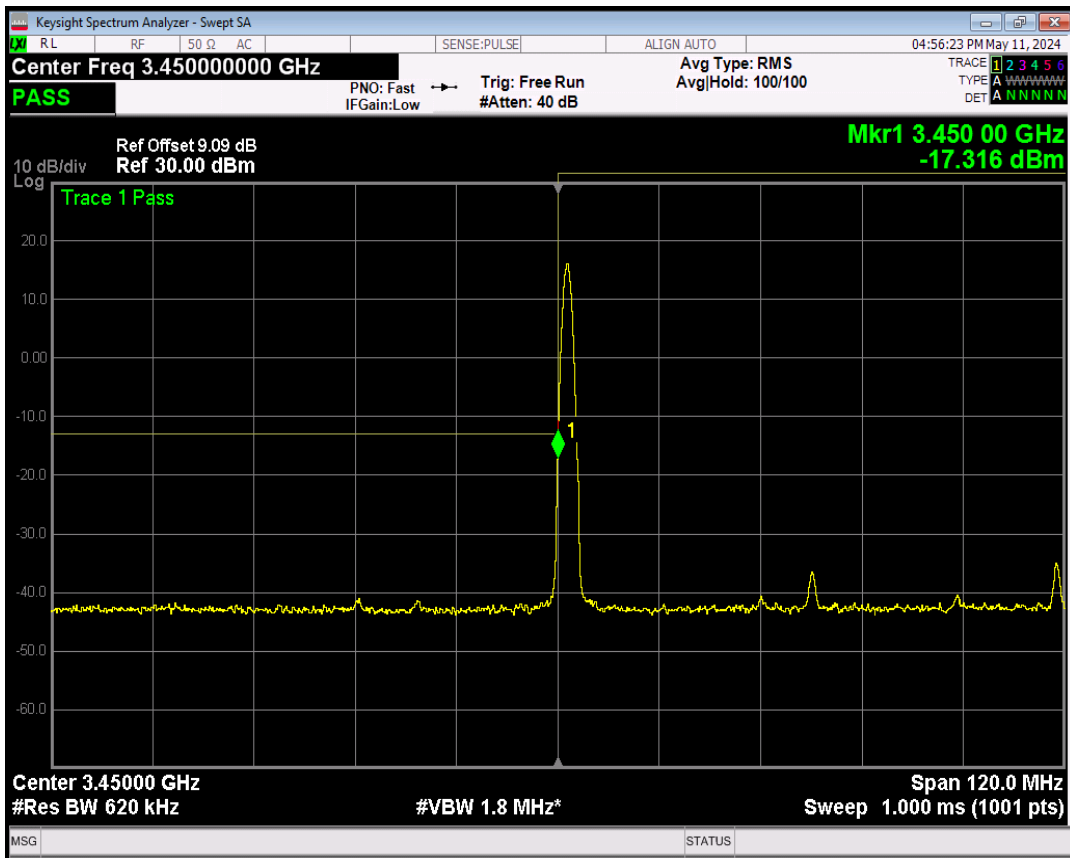

n78 SCS=30kHz DFT_QPSK BW=60MHz Channel=634666 RB=162@0

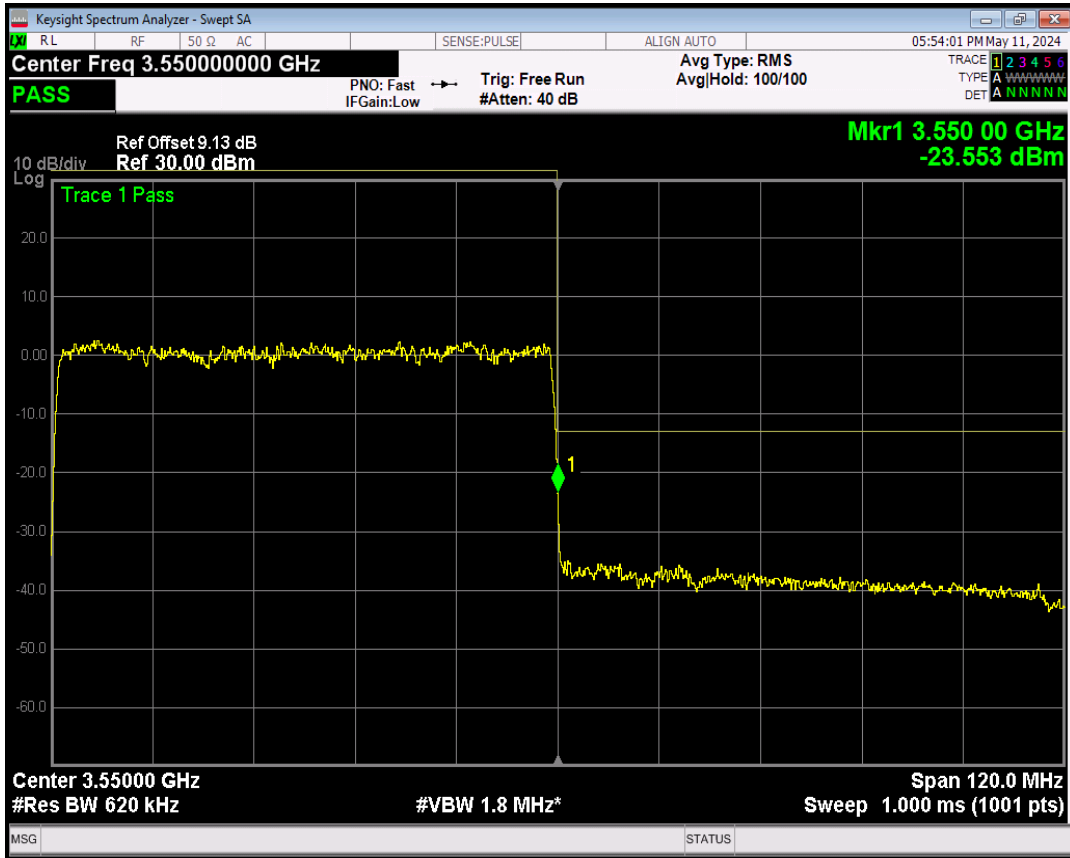


n78 SCS=30kHz DFT_QPSK BW=60MHz Channel=634666 RB=1 @161

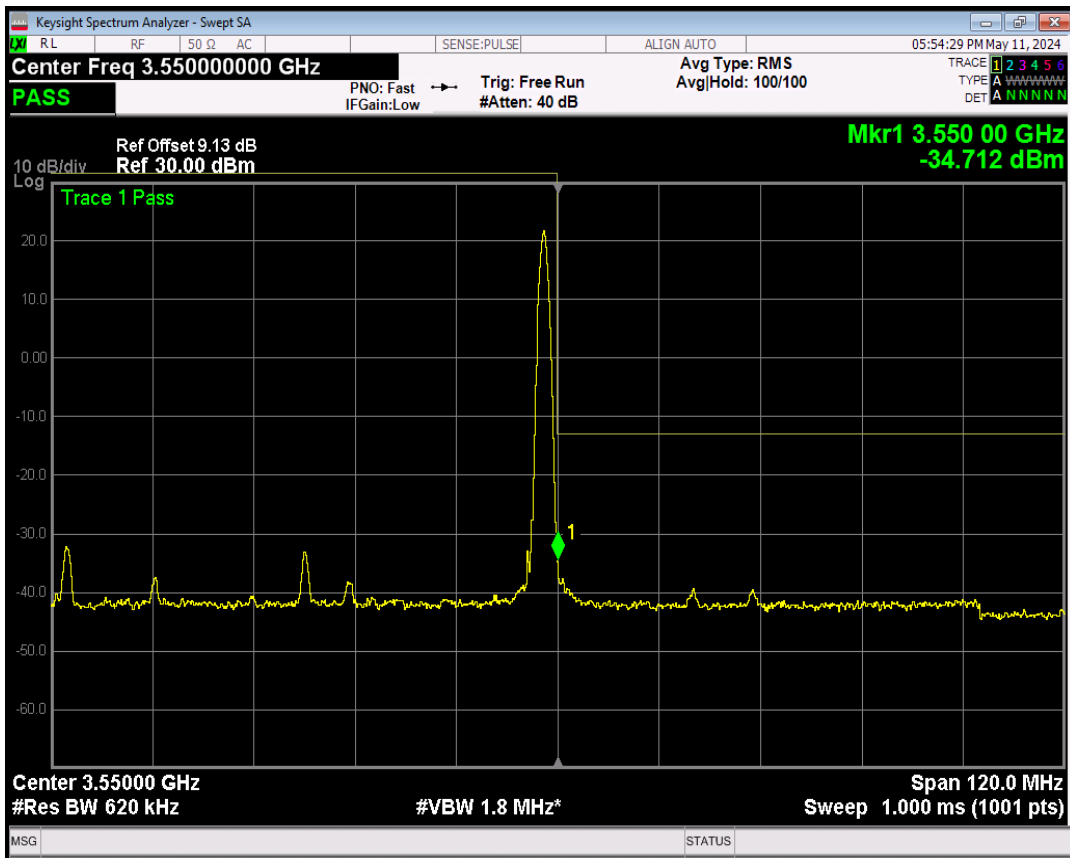


n78 SCS=30kHz DFT_QPSK BW=80MHz Channel=632667 RB=216 @0




n78 SCS=30kHz DFT_QPSK BW=80MHz Channel=632667 RB=1@0

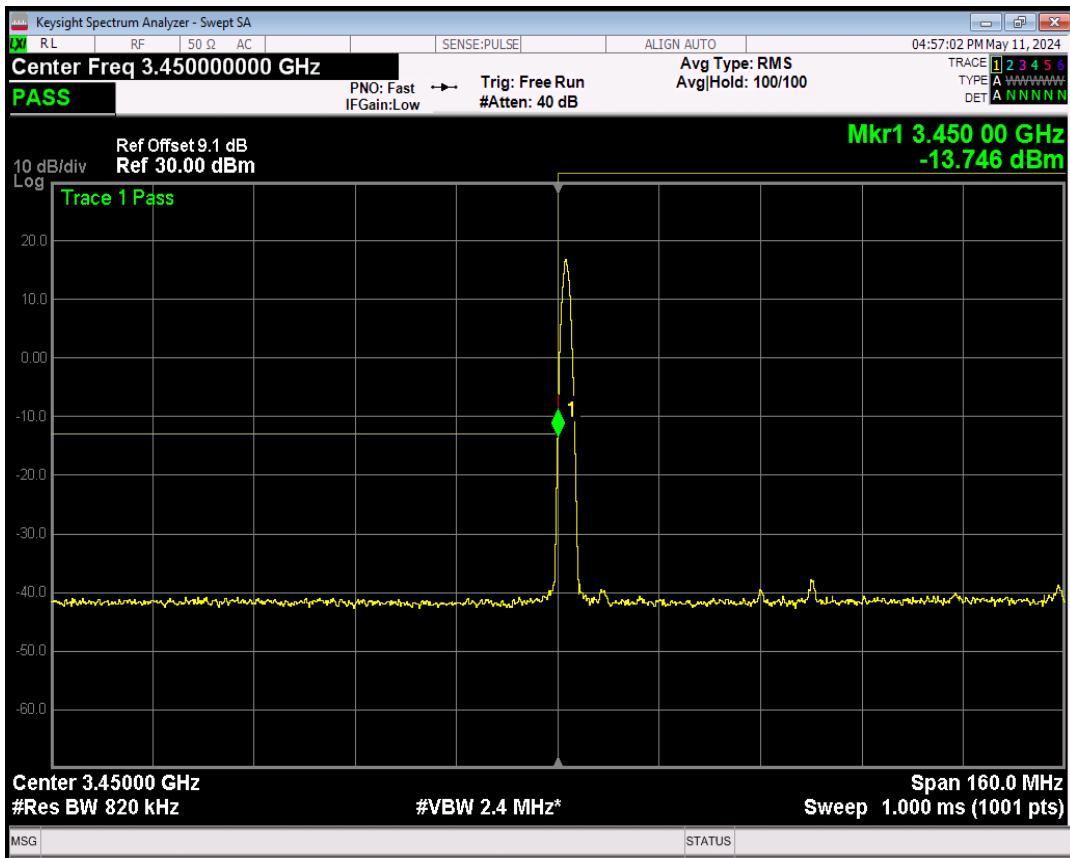

n78 SCS=30kHz DFT_QPSK BW=80MHz Channel=634000 RB=216@0

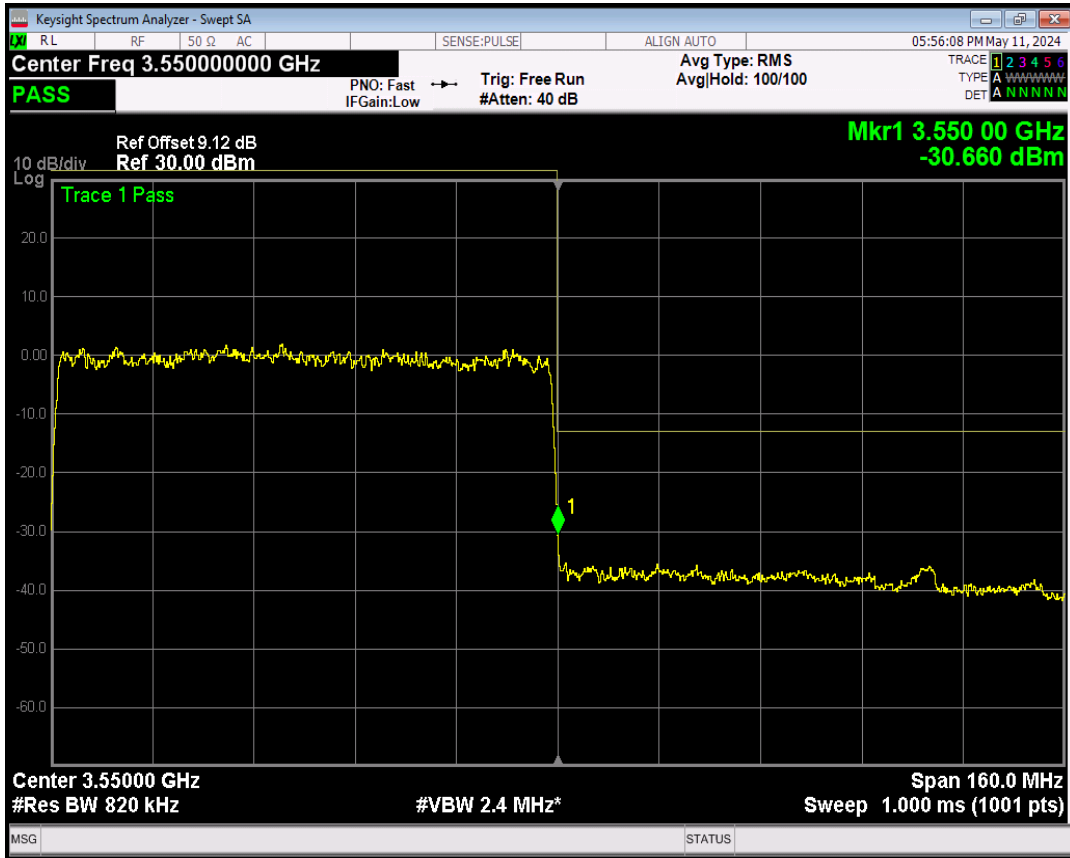

n78 SCS=30kHz DFT_QPSK BW=80MHz Channel=634000 RB=1@216

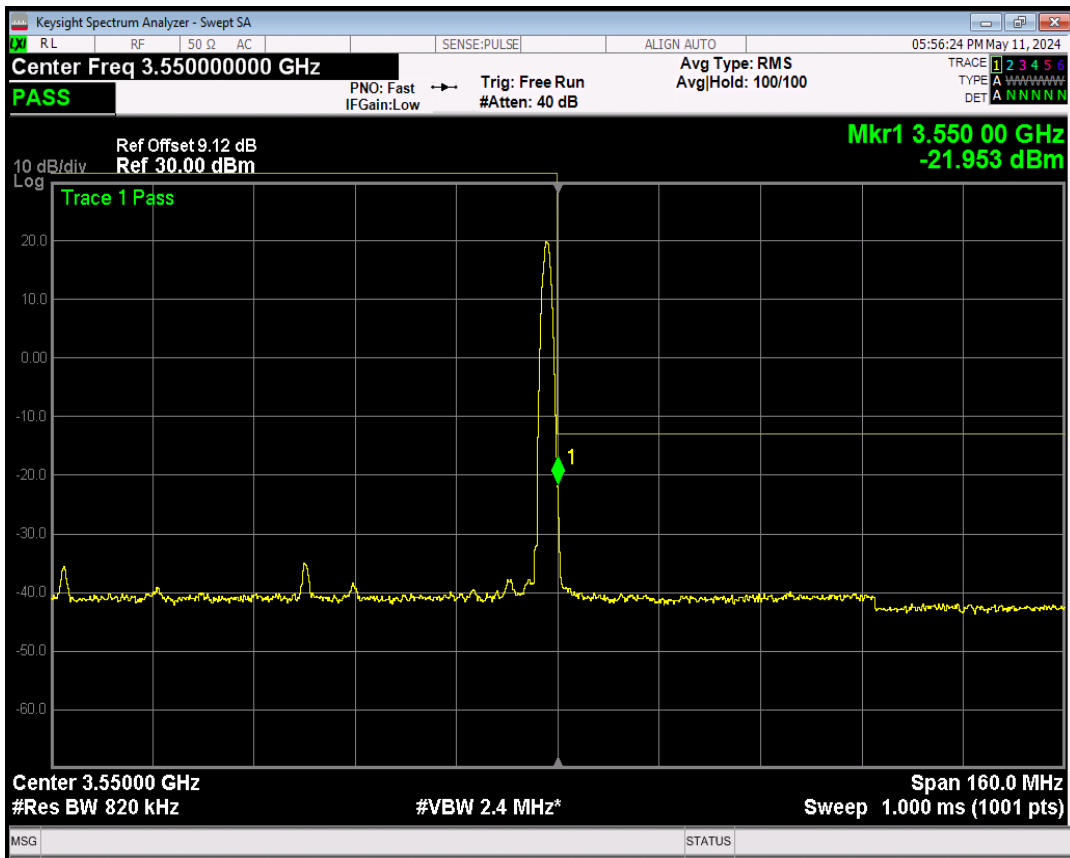

n78 SCS=30kHz DFT_QPSK BW=90MHz Channel=633000 RB=240@0