

### Hands-free call:

#### Micro-USB sound card function

In the state of power-on, connect the speaker with PC by Micro-USB cable with voice prompt "Sound mode", then it can play audio files in PC directly.

### Copy files function:

In the state of power-on, connect it with PC by USB cable, then the files in the TF card / USB flash disk (which has been inserted into the speaker) can be deleted or copied.

### Charging:

The speaker is low battery with a voice prompt "Low battery, please charge". Please switch-off the speaker before charging. The red indicator light will be on all the time during charging and will go out after fully charged. Please recharge it with 5V 500mA ~1.5A adapter and the charging time is normally 2 ~3 hours.

### Trouble shooting:

#### Can't pair successfully after several attempts:

1. Switch off the speaker and switch it on again;
2. If a password is needed, please enter 0000

#### The music is staccato when playing:

1. Please check whether the distance beyond the effective range (normally 8 ~ 10M) or not.
2. Clear the barriers between the device and speaker.

#### There are problems with TF card playing:

1. The supported maximum capacity of TF card is 32G
2. The audio formats should be WAV / MP3 / WMA / APE / FALC

#### Can't switch on or off and no response for any operation:

1. Please check whether or not the speaker is paused or in minimum volume state;
2. Reset the speaker with long pressing the power button for about 10s and then switch on.

### SHIDU Guarantee:

100% SHIDU Guaranteed Product Satisfaction.


We promise 1 year warranty.

If you have any questions, please feel free to contact us, we will try our best to provide you the best service.

[www.10shidu.com](http://www.10shidu.com) Email:[info@10shidu.com](mailto:info@10shidu.com)



## USER MANUAL

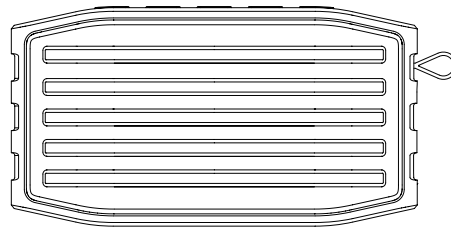

Starting the new music age

## SD-P2

SHIDU SD-P2 is a high-end Bluetooth Speaker with many features. In your spare time, you can enjoy fantastic music in home, coffee house and even trip. Anytime, anywhere, music to non-stop. SD-P2 Bluetooth Speaker is the best choice for you.

Please read the instruction carefully before using it.


### Features:

1. SHIDU patented appearance;
2. Bluetooth effective range up to 10M;
3. Hands-free call with clear & loud voice, convenient & efficient;
4. Dual magnetic speaker, output 2\*7W;
5. Rubber key, rubber oil shell with good touch feeling;
6. Support to play WAV / MP3 / WMA / APE / FALC audio files in the TF card / USB flash disk;
7. IPX4 waterproof;
8. Support SOS alarm.

### Specification:

Output power:	2*7W	Frequency response:	70Hz-18KHz
Output Impedance:	4Ω	Working temperature:	-10°C -45°C
Charging voltage:	DC 5V	Battery:	1500mAh
Support TF card:	≤ 32G	Bluetooth version:	4.2 sync + EDR
Working time: <with 50% volume>	4-6 hours	Charging time:	2-3 hours (DC5V 500mA = 1A)

### Function Illustration:

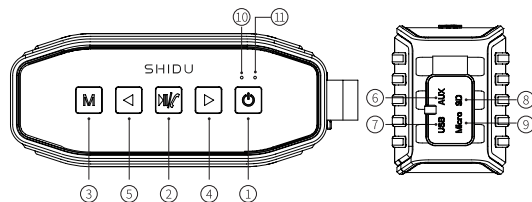

#### 1. Switch on / off:

Press the button for 3 seconds, the blue light will start fast flashing with voice prompt, the speaker is on; press the button for 3 seconds to switch off.

Short press it twice for SOS alarm; short press it twice again for stopping the alarm.

#### 2. Play / pause:

In music playing mode, short press it for pause, short press it again for play.

#### 3. Mode Key:

Please short press "M" to select a working mode (Bluetooth, TF card, USB flash disk and AUX).

In music playing mode, long press "M" to enter into single loop, long press it again into all loop.

#### 4. Volume + / Next:

Long press for volume +, short press for next.

#### 5. Volume - / Previous:

Long press for volume -, short press for previous.

#### 6. AUX input

Connect the speaker with computer, phone, MP3/MP4 or other device

with audio cable, it will remind "Audio in Mode", and then it can play above audio files directly.

#### 7. USB flash disk:

#### 8. TF card slot:

**9. Micro-USB Port (DC 5V):** Use the charger with DC 5V output connect with Micro-USB cable to charge the speaker.

Please unplug the charger as soon as it is fully charged.

#### 10. MIC:

MIC for hands-free calling.

#### 11. LED Indicator light:

Bluetooth is waiting for connection with blue light flashing.

Bluetooth is connected with blue light being on all the time.

Red light will on all the time while charging.

### Bluetooth pairing:

1. Switch on this Bluetooth speaker with voice prompt "Bluetooth is waiting for connected". The blue light is fast flashing.
2. Enter into "Settings" of mobile and turn on Bluetooth function. Then please search P2 and connect.
3. The Bluetooth pairing will be successful with a voice warning "Bluetooth is connected". The blue light stops flashing and will be on all the time.

### Hands-free call:

1. Answer: In Bluetooth mode, short press "MIC" to answer the phone, short press it again to hang up.
2. Redial: In Bluetooth mode, short press "MIC" twice continuously to redial the last call you dialed.
3. Reject: When the phone rings, long press "MIC" to reject the incoming call.

### **FCC Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To assure continued compliance, any changes or modifications not expressly approved by the party.

Responsible for compliance could void the user's authority to operate this equipment. (Example- use only shielded interface cables when connecting to computer or peripheral devices).

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

RF warning statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.