

# **TEST REPORT**

| APPLICANT    | : Linkplay Technology Inc.    |
|--------------|-------------------------------|
| PRODUCT NAME | : Wireless Smart Audio Module |
| MODEL NAME   | : ASR001                      |
| BRAND NAME   | : WiiM                        |
| FCC ID       | : 2ANOG-ASR001                |
| STANDARD(S)  | : 47 CFR Part 15 Subpart C    |
| RECEIPT DATE | : 2021-07-29                  |
| TEST DATE    | : 2021-08-11 to 2021-08-31    |
| ISSUE DATE   | : 2021-09-15                  |

Edited by:

Peng Mi Peng Mi (Rapporteur)

Approved by: -

Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn





# DIRECTORY

| 1. Technical Information 3                           |
|--|
| 1.1. Applicant and Manufacturer Information 3        |
| 1.2. Equipment Under Test (EUT) Description 3        |
| 1.3. The Channel Number and Frequency 4              |
| 1.4. Test Standards and Results 5                    |
| 1.5. Environmental Conditions ······ 6               |
| 2. 47 CFR Part 15C Requirements ······ 7             |
| 2.1. Antenna Requirement ······ 7                    |
| 2.2. Duty Cycle of Test Signal ······ 8              |
| 2.3. Maximum Peak Conducted Output Power ······ 8    |
| 2.4. Maximum Average Conducted Output Power ······14 |
| 2.5. 6 dB Bandwidth ······16                         |
| 2.6. Conducted Spurious Emissions and Band Edge21    |
| 2.7. Power Spectral Density (PSD)28                  |
| 2.8. Conducted Emission                              |
| 2.9. Restricted Frequency Bands ······37             |
| 2.10. Radiated Emission44                            |
| Annex A Test Uncertainty54                           |
| Annex B Testing Laboratory Information55             |

| Change History |            |                   |  |  |  |
|----------------|------------|-------------------|--|--|--|
| Version        | Date       | Reason for change |  |  |  |
| 1.0            | 2021-09-15 | First edition     |  |  |  |
|                |            |                   |  |  |  |





# **1. Technical Information**

Note: Provide by applicant.

# 1.1. Applicant and Manufacturer Information

| Applicant: Linkplay Technology Inc. |  |
|-------------------------------------|--|
| Applicant Address                   | 8F-8036, Qianren Building, No.7, Yingcui Road, Jiangning |
| Applicant Address:                  | District, Nanjing, China                                 |
| Manufacturer:                       | Linkplay Technology Inc.                                 |
|                                     | 8F-8036, Qianren Building, No.7, Yingcui Road, Jiangning |
| Manufacturer Address:               | District, Nanjing, China                                 |

# **1.2. Equipment Under Test (EUT) Description**

| Product Name:                     | Wireless Smart A  | Wireless Smart Audio Module        |  |  |  |
|-----------------------------------|-------------------|------------------------------------|--|--|--|
| Serial No.:                       | 1#                |                                    |  |  |  |
| Hardware Version:                 | V03               |                                    |  |  |  |
| Software Version:                 | Linkplay.4.6.3219 | 963                                |  |  |  |
| Equipment Type:                   | Bluetooth LE      |                                    |  |  |  |
| Bluetooth Version:                | 5.2               |                                    |  |  |  |
| Modulation Type:                  | GFSK              |                                    |  |  |  |
| Data Rate:                        | 1Mbps, 2Mbps      |                                    |  |  |  |
| <b>Operating Frequency Range:</b> | 2402MHz-2480MHz   |                                    |  |  |  |
| Antenna Type:                     | PIFA Antenna      |                                    |  |  |  |
| Antenna Gain:                     | 2.77dBi           |                                    |  |  |  |
|                                   | AC Adapter        |                                    |  |  |  |
|                                   | Brand Name:       | Chenyang                           |  |  |  |
|                                   | Model No.:        | MDY-09-EE                          |  |  |  |
| Accessory Information:            | Serial No.:       | N/A                                |  |  |  |
|                                   | Rated Output:     | 5V=1A                              |  |  |  |
|                                   | Rated Input:      | 100-240V~50/60Hz, 0.2A             |  |  |  |
|                                   | Manufacturer:     | Jiangsu Chenyang Electron Co.,Ltd. |  |  |  |

Note 1: We use the dedicated software to control the EUT continuous transmission.

**Note 2:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.





| Channel | Frequency<br>(MHz) | Channel | Frequency<br>(MHz) | Channel | Frequency<br>(MHz) | Channel | Frequency<br>(MHz) |
|---------|--------------------|---------|--------------------|---------|--------------------|---------|--------------------|
| 0       | 2402               | 10      | 2422               | 20      | 2442               | 30      | 2462               |
| 1       | 2404               | 11      | 2424               | 21      | 2444               | 31      | 2464               |
| 2       | 2406               | 12      | 2426               | 22      | 2446               | 32      | 2466               |
| 3       | 2408               | 13      | 2428               | 23      | 2448               | 33      | 2468               |
| 4       | 2410               | 14      | 2430               | 24      | 2450               | 34      | 2470               |
| 5       | 2412               | 15      | 2432               | 25      | 2452               | 35      | 2472               |
| 6       | 2414               | 16      | 2434               | 26      | 2454               | 36      | 2474               |
| 7       | 2416               | 17      | 2436               | 27      | 2456               | 37      | 2476               |
| 8       | 2418               | 18      | 2438               | 28      | 2458               | 38      | 2478               |
| 9       | 2420               | 19      | 2440               | 29      | 2460               | 39      | 2480               |

# **1.3. The Channel Number and Frequency**

Note 1: The black bold channels were selected for test.



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



# 1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

| No. | Identity       | Document Title          |
|-----|----------------|-------------------------|
| 1   | 47 CFR Part 15 | Radio Frequency Devices |

Test detailed items/section required by FCC rules and results are as below:

| No. | Section   | Description  | Test Date    | Test<br>Engineer | Result | Method<br>Determination<br>/Remark |  |  |
|-----|---|--|--------------|------------------|--------|------------------------------------|--|--|
| 1   | 15.203  | Antenna<br>Requirement                             | N/A          | N/A              | PASS   | No deviation                       |  |  |
| 2   | N/A   | Duty Cycle of<br>Test Signal                       | Aug 12, 2021 | Liu Bo           | PASS   | No deviation                       |  |  |
| 3   | 15.247(b)   | Maximum Peak<br>Conducted<br>Output Power          | Aug 24, 2021 | Liu Bo           | PASS   | No deviation                       |  |  |
| 4   | 15.247(b)   | Maximum<br>Average<br>Conducted<br>Output Power    | Aug 24, 2021 | Liu Bo           | PASS   | No deviation                       |  |  |
| 5   | 15.247(a)   | Bandwidth  | Aug 17, 2021 | Liu Bo           | PASS   | No deviation                       |  |  |
| 6   | 15.247(d)   | Conducted<br>Spurious<br>Emission and<br>Band Edge | Aug 17, 2021 | Liu Bo           | PASS   | No deviation                       |  |  |
| 7   | 15.247(e)   | Power Spectral<br>Density                          | Aug 17, 2021 | Liu Bo           | PASS   | No deviation                       |  |  |
| 8   | 15.207  | Conducted<br>Emission                              | Aug 11, 2021 | Su Zhan          | PASS   | No deviation                       |  |  |
| 9   | 15.247(d)   | Restricted<br>Frequency<br>Bands                   | Aug 31, 2021 | Gao Jianrou      | PASS   | No deviation                       |  |  |
| 10  | 15.209,<br>15.247(d)  | Radiated<br>Emission                               | Aug 31, 2021 | Gao Jianrou      | PASS   | No deviation                       |  |  |
|     | <b>Note 1:</b> The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013 and KDB558074 D01 v05r02. |  |              |                  |        |                                    |  |  |





**Note 2:** The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The Ref offset 1.5dB means the cable loss is 1.5dB.

**Note 3:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 4:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

# **1.5. Environmental Conditions**

During the measurement, the environmental conditions were within the listed ranges:

| Temperature (°C):           | 15-35  |
|-----------------------------|--------|
| Relative Humidity (%):      | 30-60  |
| Atmospheric Pressure (kPa): | 86-106 |



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



# 2.47 CFR Part 15C Requirements

# 2.1. Antenna Requirement

# 2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

# 2.1.2. Test Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.



Tel: 86-755-36698555

Fax: 86-755-36698525




# 2.2. Duty Cycle of Test Signal

# 2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%).When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered). When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than ±2%; otherwise, the duty cycle is considered to be non constant.

# 2.2.2. Test Description

# Test Setup:



ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.

# 2.2.3. Test Result

| Test Mode | de Data Rate Duty Cycle (%)<br>(D) |       | Duty Factor<br>(10*lg[1/D]) |  |
|-----------|------------------------------------|-------|-----------------------------|--|
| GFSK      | 1Mbps                              | 62.20 | 2.06                        |  |
|           | 2Mbps                              | 33.01 | 4.81                        |  |



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525

Http://www.morlab.cn



# 2.3. Maximum Peak Conducted Output Power


# 2.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

# 2.3.2. Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

#### Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

# 2.3.3. Test Procedure

The measured output power was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for Peak Output Power test on the spectrum analyzer: a) Set analyzer center frequency to channel center frequency

- b) Set RBW to1MHz
- c) Set VBW to 3MHz
- d) Set span to 3MHz
- e) Sweep time = auto couple
- f) Detector = peak
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use peak marker function to determine the peak amplitude level





# 2.3.4. Test Result

#### 1Mbps

#### A. Test Verdict:

| Channel | Frequency | Measured Outp | sured Output Peak Power Limit |     | Verdict |         |
|---------|-----------|---------------|-------------------------------|-----|---------|---------|
| Channel | (MHz)     | dBm           | W                             | dBm | W       | verdict |
| 0       | 2402      | 4.44          | 0.0028                        |     |         | PASS    |
| 19      | 2440      | 5.53          | 0.0036                        | 30  | 1       | PASS    |
| 39      | 2480      | 5.24          | 0.0033                        |     |         | PASS    |

#### **B. Test Plot:**



(Channel 0, 2402MHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn





#### (Channel 19, 2440MHz)



#### (Channel 39, 2480MHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



# 2Mbps

# A. Test Verdict:

| Channel | Frequency | Measured Output Peak Power |        | Lir | nit | Verdict |
|---------|-----------|----------------------------|--------|-----|-----|---------|
| Channel | (MHz)     | dBm                        | W      | dBm | W   | Verdict |
| 0       | 2402      | 5.66                       | 0.0037 |     |     | PASS    |
| 19      | 2440      | 6.34                       | 0.0043 | 30  | 1   | PASS    |
| 39      | 2480      | 5.92                       | 0.0039 |     |     | PASS    |

# **B. Test Plot:**

| RF 50.9 AC                                  |   | ALIGNAUTO<br>Avg Type: Log-Pwr | 11:58:47 AM Aug 24, 2021<br>TRACE 12.34 5 6 | Frequency                       |
|---|---|--------------------------------|---|---------------------------------|
| Center Freq 2.402000000                     | PNO: Fast Trig: Free R<br>IFGain:Low Atten: 30 dB | un Avg Hold>100/100            |   |                                 |
| Ref Offset 1.5 dB<br>0 dB/div Ref 20.00 dBm |   | Mkr1                           | 2.402 450 GHz<br>5.662 dBm                  | Auto Tun                        |
| 10.0  |   | 1                              |   | Center Fre<br>2.402000000 GH    |
| 0.00  |   |                                |   | Start Fre<br>2.399500000 GH     |
|   |   |                                |   | Stop Fre<br>2.404500000 GF      |
|   |   |                                |   | CF Ste<br>500.000 kH<br>Auto Ma |
|   |   |                                |   | Freq Offso<br>0 ⊦               |
|   |   |                                |   |                                 |
| enter 2.402000 GHz<br>Res BW 1.5 MHz        | #VBW 5.0 MHz                                      | Sweep                          | Span 5.000 MHz<br>1.000 ms (1001 pts)       |                                 |

(Channel 0, 2402MHz)



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn







#### (Channel 19, 2440MHz)



#### (Channel 39, 2480MHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



# 2.4. Maximum Average Conducted Output Power


# 2.4.1. Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

# 2.4.2. Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

#### Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

# 2.4.3. Test Procedure

KDB 558074 Section 8.3.2 was used in order to prove compliance.



Http://www.morlab.cn

Fax: 86-755-36698525 E-mail: service@morlab.cn



# 2.4.4. Test Result

# 1Mbps

|         | Frequency          | Average Power |        |             |              | 1.5   | mit | Verdict |
|---------|--------------------|---------------|--------|-------------|--------------|-------|-----|---------|
| Channel | Frequency<br>(MHz) | Measured      | Duty   | Duty Factor | r Calculated | Limit |     | verdict |
|         | (IVITZ)            | dBm           | Factor | dBm         | W            | dBm   | W   |         |
| 0       | 2402               | 2.01          |        | 4.07        | 0.0026       |       |     | PASS    |
| 19      | 2440               | 2.99          | 2.06   | 5.05        | 0.0032       | 30    | 1   | PASS    |
| 39      | 2480               | 2.83          |        | 4.89        | 0.0031       |       |     | PASS    |

#### 2Mbps

|         | Fraguanay          |                                      |        | Lin  | mit     | Verdict |   |      |
|---------|--------------------|--------------------------------------|--------|------|---------|---------|---|------|
| Channel | Frequency<br>(MHz) | Measured Duty Duty Factor Calculated |        | m    | verdict |         |   |      |
|         | (IVITIZ)           | dBm                                  | Factor | dBm  | W       | dBm     | W |      |
| 0       | 2402               | 0.03                                 |        | 4.84 | 0.0030  |         |   | PASS |
| 19      | 2440               | 0.66                                 | 4.81   | 5.47 | 0.0035  | 30      | 1 | PASS |
| 39      | 2480               | 0.09                                 |        | 4.90 | 0.0031  |         |   | PASS |



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn




# 2.5.1. Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

# 2.5.2. Test Description

#### Test Setup:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

#### 2.5.3. Test Procedure

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize

 h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by6 dB relative to the maximum level measured in the fundamental emission



Http://www.morlab.cn

Fax: 86-755-36698525



The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW  $\ge$  3  $\times$  RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\ge$ 6 dB.

# 2.5.4. Test Result

# 1Mbps

# A. Test Verdict:

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Limits(kHz) | Result |
|---------|-----------------|----------------------|-------------|--------|
| 0       | 2402            | 0.703                | ≥500        | PASS   |
| 19      | 2440            | 0.692                | ≥500        | PASS   |
| 39      | 2480            | 0.711                | ≥500        | PASS   |

# B. Test Plot:




# (Channel 0, 2402MHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn







# (Channel 19, 2440 MHz)



#### (Channel 39, 2480MHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525



#### 2Mbps

#### A. Test Verdict:

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Limits(kHz) | Result |
|---------|-----------------|----------------------|-------------|--------|
| 0       | 2402            | 0.606                | ≥500        | PASS   |
| 19      | 2440            | 0.607                | ≥500        | PASS   |
| 39      | 2480            | 0.607                | ≥500        | PASS   |

#### **B.Test Plot:**




(Channel 0, 2402MHz)



Tel: 86-755-36698555

Fax: 86-755-36698525







# (Channel 19, 2440 MHz)




#### (Channel 39, 2480MHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525






# 2.6. Conducted Spurious Emissions and Band Edge

# 2.6.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

# 2.6.2. Test Description

#### **Test Setup:**



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

#### 2.6.3. Test Procedure

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.





# 2.6.4. Test Result

#### 1Mbps

#### A. Test Verdict:

|         | Frequency | Frequency Measured Max. Out of |               | (dBm)        |         |  |
|---------|-----------|--------------------------------|---------------|--------------|---------|--|
| Channel | (MHz)     | Band Emission (dBm)            | Corrier Lovel | Calculated   | Verdict |  |
|         | (101112)  |                                | Carrier Level | -20dBc Limit |         |  |
| 0       | 2402      | -53.95                         | 1.27          | -18.73       | PASS    |  |
| 19      | 2440      | -53.70                         | 1.47          | -18.53       | PASS    |  |
| 39      | 2480      | -52.52                         | -1.12         | -21.12       | PASS    |  |

# **B. Test Plot:**



(30MHz to 25GHz, Channel 0)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn



|                |   | N. 7/15/4846/6/10              | 10.000000000000000000000000000000000000 |                               | um Analyzer - Swep             | Agilent Spectr               |
|----------------|---|--------------------------------|---|-------------------------------|--------------------------------|------------------------------|
| Marker         | 11:34:43 AM Aug 17, 2021<br>TRACE 2 3 4 5 | ALIGNAUTO<br>Avg Type: Log-Pwr | SENSE:INT                               |                               | RF 50 Ω<br>2.40000000          | Marker 2                     |
| Select Marker  | DET P N N N N N                           | Avg Hold>10/10                 | Trig: Free Run<br>Atten: 20 dB          | PNO: Wide C<br>IFGain:Low     |                                |                              |
| 2              | 2 2.400 00 GHz<br>-55.657 dBm             | Mkr                            |   |                               | Ref Offset 1.5<br>Ref 11.50 dl | 10 dB/div                    |
| Norma          |   |                                |   |                               |                                | 1.50<br>-8.50<br>-18.5       |
| Delta          |   |                                | 2_/                                     |                               |                                | -28.5<br>-38.5<br>-48.5      |
| Fixed▷         | and                                       |                                | www.                                    | ware ware                     | m                              | -58.5<br>-68.5               |
| Off            | Span 10.00 MHz<br>000 ms (1001 pts)       | Sweep 1.                       | 300 kHz                                 | #VB                           |                                | Center 2.4<br>#Res BW        |
| Properties     | FUNCTION VALUE                            |                                | 1.277 dBm<br>-55.657 dBm                | 2,402 25 GHz<br>2,400 000 GHz |                                | 1 N 1<br>2 N 1<br>3 4<br>5 6 |
| More<br>1 of 2 |   |                                |   |                               |                                | 7<br>8<br>9<br>10<br>11      |
|                |   | STATUS                         |   |                               |                                | ISG                          |

# (Band Edge, Channel 0)

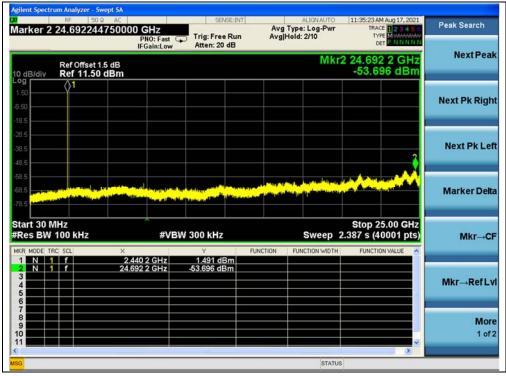

#### (30MHz to 25GHz, Channel 19)



Fax: 86-755-36698525

Http://www.morlab.cn



| Marker 2 24.0698675                     |                             |                           | Avg      | ALIGNAUTO<br>Fype: Log-Pwr<br>Iold: 2/10 | 11:35:42 AM Aug 17, 2021<br>TRACE 1 2 3 4 5<br>TYPE MWWWW<br>DET P N N N N | Peak Search   |
|---|-----------------------------|---------------------------|----------|--|--|---------------|
| Ref Offset 1.5<br>10 dB/div Ref 11.50 d | dB                          |                           |          | Mkr2                                     | 24.069 9 GHz<br>-52.520 dBm  |               |
| 1.50 1<br>-8.50                         |                             |                           |          |  |  | Next Pk Right |
| -28.5<br>-38.5<br>-48.5                 |                             |                           |          |  |  | Next Pk Left  |
| -58.5<br>-68.5<br>-78.5                 |                             |                           |          |  |  | Marker Delta  |
| Start 30 MHz<br>#Res BW 100 kHz         | X                           | BW 300 kHz<br>Y           | FUNCTION | Sweep 2                                  | Stop 25.00 GHz<br>.387 s (40001 pts<br>FUNCTION VALUE                      | Mkr→CF        |
| 1 N 1 F<br>2 N 1 F<br>3 4               | 2.480 2 GHz<br>24.069 9 GHz | -1.115 dBm<br>-52.520 dBm |          |  |  | Mkr→RefLv     |
| 5 6                                     |                             |                           |          |  |  |               |

# (30MHz to 25GHz, Channel 39)



# (Band Edge, Channel 39)



Fax: 86-755-36698525




# 2Mbps

#### A. Test Verdict:

|         | Frequency | Frequency Measured Max. Out of |               | Limit        | (dBm)   |  |
|---------|-----------|--------------------------------|---------------|--------------|---------|--|
| Channel | (MHz)     | Band Emission (dBm)            |               | Calculated   | Verdict |  |
|         |           |                                | Carrier Level | -20dBc Limit |         |  |
| 0       | 2402      | -54.08                         | 4.18          | -15.82       | PASS    |  |
| 19      | 2440      | -53.31                         | 5.05          | -14.95       | PASS    |  |
| 39      | 2480      | -54.38                         | 4.90          | -15.10       | PASS    |  |

# **B. Test Plot:**

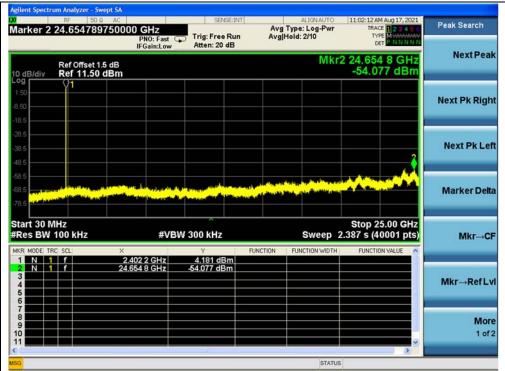

(30MHz to 25GHz, Channel 0)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn



| Agilent Spectrum Analyzer - Swept S |                   | SENSE:IN       |              | ALIGNAUTO                    | 11:01:44 AM | Aug 17, 2021      |                |
|-------------------------------------|-------------------|----------------|--------------|------------------------------|-------------|-------------------|----------------|
| Marker 2 2.400000000                |                   |                | Avg          | Type: Log-Pwr<br>Hold:>10/10 | TRACE       | 123456<br>Mullium | Marker         |
|                                     | IFGain:Low        | Atten: 30 dB   |              | 20 19990                     |             | PNNNNN            | Select Marker  |
| Ref Offset 1.5 dE                   |                   |                |              | Mkr                          | 2 2.400     | 00 GHz<br>04 dBm  | 2              |
| 10.0                                |                   |                |              | 1                            |             |                   |                |
| 0.00                                |                   |                |              | m                            |             |                   | Norma          |
| -10.0                               |                   | •              | $\gamma$     | 2                            | $\wedge$    |                   |                |
| -20.0                               |                   | 2              | 1            |                              | 1           |                   | Delta          |
| -30.0                               |                   | /h             | $\checkmark$ |                              | $\sim$      |                   | Dent           |
| -50.0                               |                   |                |              |                              |             | human             |                |
| 60.0 m. Augan Augan and             | mann              | / mai          |              |                              |             |                   | <b>Fixed</b>   |
| +70.0                               |                   |                |              |                              |             |                   |                |
| Center 2.400000 GHz                 |                   |                |              |                              |             | 0.00 MHz          |                |
| #Res BW 100 kHz                     | #VB               | № 300 kHz      |              | Sweep 1                      | .000 ms (1  | 001 pts)          | Off            |
| MKR MODE TRC SCL                    | ×<br>2.402 03 GHz | Y<br>4.256 dBm | FUNCTION     | FUNCTION WIDTH               | FUNCTIO     | N VALUE           |                |
|                                     | 2.400 00 GHz      | -27.204 dBm    |              |                              |             |                   | and the second |
| 4                                   | 1                 |                |              |                              |             |                   | Properties •   |
| 6 7                                 |                   |                |              |                              |             |                   |                |
| 8                                   |                   |                |              |                              |             |                   | More           |
| 10                                  |                   |                |              |                              |             | -                 | 1 of 2         |
| <                                   | 50                | <u> </u>       |              |                              |             | >                 | 7              |
| MSG                                 |                   |                |              | STATUS                       | 5           |                   |                |

# (Band Edge, Channel 0)

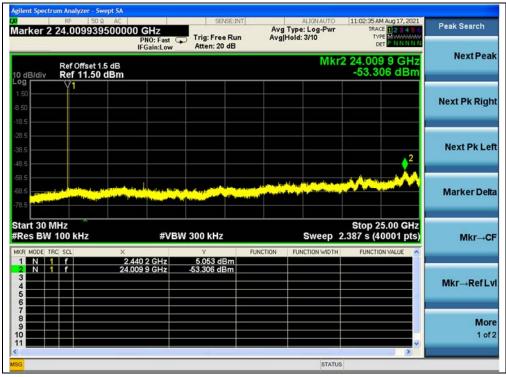

#### (30MHz to 25GHz, Channel 19)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



| Peak Search         | 11:02:56 AM Aug 17, 2021                               | ALIGNAUTO<br>Type: Log-Pwr |          | SENSE:IN                       |                             | 50 Q AC                    | Spectrum Ana<br>RF     |
|---------------------|--|----------------------------|----------|--------------------------------|-----------------------------|----------------------------|------------------------|
|                     | TYPE MWWWWWW<br>DET P N N N N N                        | Hold: 3/10                 |          | Trig: Free Run<br>Atten: 20 dB | PNO: Fast (<br>IFGain:Low   | 37406500000                | (er 2 24.0             |
| NextPea             | 2 24.037 4 GHz<br>-54.376 dBm                          | Mkr2                       |          |                                |                             | offset 1.5 dB<br>11.50 dBm |                        |
| Next Pk Rig         |  |                            |          |                                |                             |                            | Υ <b>1</b>             |
| Next Pk Le          | 2  |                            |          |                                |                             |                            |                        |
|                     |  |                            |          |                                |                             |                            |                        |
| Marker Del          | i the section  |                            |          |                                |                             |                            |                        |
| Marker Dei<br>Mkr→C | Stop 25.00 GHz<br>.387 s (40001 pts)                   |                            |          | W 300 kHz                      | #VB                         | Hz                         | t 30 MHz<br>5 BW 100 F |
|                     | Stop 25.00 GHz<br>.387 s (40001 pts)<br>FUNCTION VALUE |                            | FUNCTION | Y                              |                             | ×                          |                        |
|                     | .387 s (40001 pts)                                     | Sweep 2                    | FUNCTION |                                | #VB<br>80 2 GHz<br>37 4 GHz | ×<br>2.48                  | BW 100 H               |

# (30MHz to 25GHz, Channel 39)



(Band Edge, Channel 39)



Fax: 86-755-36698525

Http://www.morlab.cn




# 2.7. Power Spectral Density

# 2.7.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

# 2.7.2. Test Description

#### Test Setup:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

# 2.7.3. Test Procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level within the RBW





# 2.7.4. Test Result

#### 1Mbps

#### A. Test Verdict:

|         | Spectral Power Density (dBm/3kHz) |                         |                  |         |  |  |  |  |  |
|---------|-----------------------------------|-------------------------|------------------|---------|--|--|--|--|--|
| Channel | Frequency (MHz)                   | Measured PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |  |  |  |  |  |
| 0       | 2402                              | -12.37                  | 8                | PASS    |  |  |  |  |  |
| 19      | 2440                              | -10.38                  | 8                | PASS    |  |  |  |  |  |
| 39      | 2480                              | -10.60                  | 8                | PASS    |  |  |  |  |  |

#### **B. Test Plot:**




(Channel 0, 2402MHz)



Tel: 86-755-36698555

Fax: 86-755-36698525 E-mail: service@morlab.cn







#### (Channel 19, 2440MHz)



#### (Channel 39, 2480MHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525



# 2Mbps

#### A.Test Verdict:

| Spectral Power Density (dBm/3kHz) |                 |                         |                  |         |  |  |  |
|-----------------------------------|-----------------|-------------------------|------------------|---------|--|--|--|
| Channel                           | Frequency (MHz) | Measured PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |  |  |  |
| 0                                 | 2402            | -0.29                   | 8                | PASS    |  |  |  |
| 19                                | 2440            | 0.59                    | 8                | PASS    |  |  |  |
| 39                                | 2480            | 0.37                    | 8                | PASS    |  |  |  |

#### **B.Test Plot:**




(Channel 0, 2402MHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn








#### (Channel 19, 2440MHz)



#### (Channel 39, 2480MHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525





# 2.8. Conducted Emission

# 2.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a  $50\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

| Frequency Penge (MHz) | Conducted Limit (dBµV) |          |  |  |
|-----------------------|------------------------|----------|--|--|
| Frequency Range (MHz) | Quai-peak              | Average  |  |  |
| 0.15 - 0.50           | 66 to 56               | 56 to 46 |  |  |
| 0.50 - 5              | 56                     | 46       |  |  |
| 5 - 30                | 60                     | 50       |  |  |


Note:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

# 2.8.2. Test Description

#### **Test Setup:**

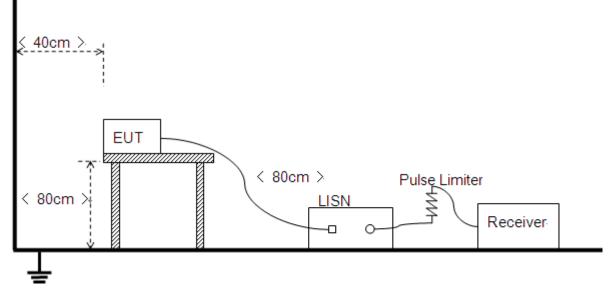

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

MORLAB



# 2.8.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

**Note:** Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.


# A. Test Setup:

Test Mode: <u>EUT+ Adapter +BT TX</u> Test voltage: <u>AC 120V/60Hz</u> The measurement results are obtained as below: E [dB $\mu$ V] =U<sub>R</sub> + L<sub>Cable loss</sub> [dB] + A<sub>Factor</sub> U<sub>R</sub>: Receiver Reading A<sub>Factor</sub>: Voltage division factor of LISN




Tel: 86-755-36698555

Fax: 86-755-36698525





#### B. Test Plot:

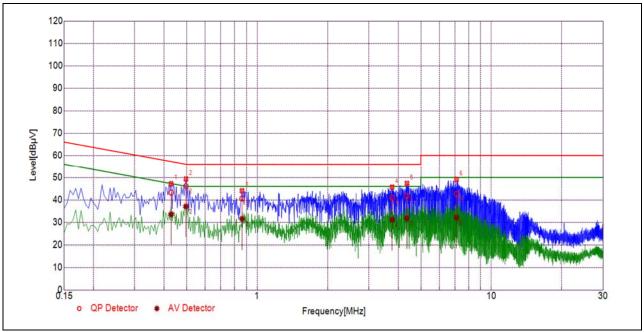

#### (L Phase)

| No. | Fre.<br>(MHz) | Emission Level (dBµV) |         | Limit (dBµV) |         | Power-line | Verdict |
|-----|---------------|-----------------------|---------|--------------|---------|------------|---------|
|     |               | Quai-peak             | Average | Quai-peak    | Average |            |         |
| 1   | 0.4294        | 43.24                 | 33.55   | 57.26        | 47.26   | Line       | PASS    |
| 2   | 0.4964        | 46.11                 | 37.05   | 56.06        | 46.06   |            | PASS    |
| 3   | 0.8616        | 40.59                 | 31.54   | 56.00        | 46.00   |            | PASS    |
| 4   | 3.7691        | 41.01                 | 31.18   | 56.00        | 46.00   |            | PASS    |
| 5   | 4.3576        | 41.74                 | 31.81   | 56.00        | 46.00   |            | PASS    |
| 6   | 7.0947        | 42.67                 | 32.09   | 60.00        | 50.00   |            | PASS    |




Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



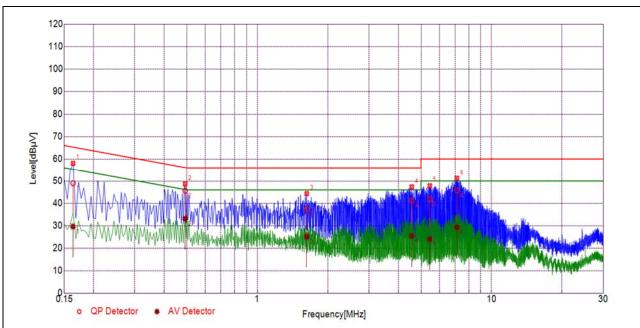

(N Phase)

| No. | Fre.<br>(MHz) | Emission Level (dBµV) |         | Limit (dBµV) |         | Power-line | Verdict |
|-----|---------------|-----------------------|---------|--------------|---------|------------|---------|
|     |               | Quai-peak             | Average | Quai-peak    | Average |            |         |
| 1   | 0.1634        | 48.97                 | 29.58   | 65.29        | 55.29   | Neutral    | PASS    |
| 2   | 0.4919        | 45.63                 | 33.16   | 56.14        | 46.14   |            | PASS    |
| 3   | 1.6258        | 37.52                 | 25.02   | 56.00        | 46.00   |            | PASS    |
| 4   | 4.5613        | 41.18                 | 25.42   | 56.00        | 46.00   |            | PASS    |
| 5   | 5.4492        | 41.98                 | 23.99   | 60.00        | 50.00   |            | PASS    |
| 6   | 7.1163        | 45.75                 | 29.22   | 60.00        | 50.00   |            | PASS    |



Tel: 86-755-36698555

Fax: 86-755-36698525 E-mail: service@morlab.cn






# 2.9. Restricted Frequency Bands

#### 2.9.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

#### 2.9.2. Test Description

#### **Test Setup**

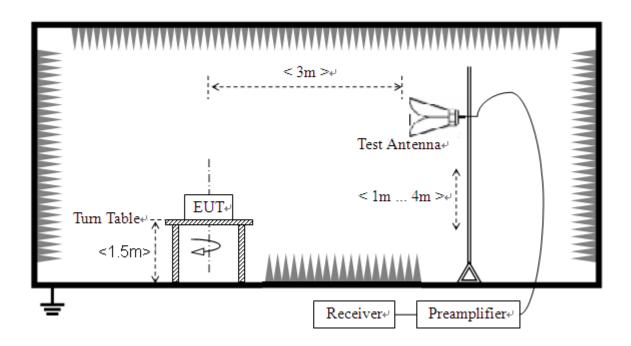

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.





#### 2.9.3. Test Procedure

Span = wide enough to fully capture the emission being measured RBW = 1 MHz for  $f \ge 1$ GHz, 100 kHz for f < 1GHz VBW = 3 MHz Sweep = auto Detector function = peak/average Trace = max hold Allow the trace to stabilize

#### 2.9.4. Test Result

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

E [dBµV/m] =U<sub>R</sub> + A<sub>T</sub> + A<sub>Factor</sub> [dB]; A<sub>T</sub> =L<sub>Cable loss</sub> [dB]-G<sub>preamp</sub> [dB]

A<sub>T</sub>: Total correction Factor except Antenna

U<sub>R</sub>: Receiver Reading

G<sub>preamp</sub>: Preamplifier Gain

A<sub>Factor</sub>: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

#### 1Mbps

#### A. Test Verdict:

| Channel |         | Detector | Receiver<br>Reading      | A <sub>T</sub> | A <sub>Factor</sub> | Max.<br>Emission | Limit    | Verdict  |
|---------|---------|----------|--------------------------|----------------|---------------------|------------------|----------|----------|
| Channer | (MHz)   | PK/ AV   | U <sub>R</sub><br>(dBµV) | (dB)           | (dB@3m)             | E<br>(dBµV/m)    | (dBµV/m) | Vertilet |
| 0       | 2381.85 | PK       | 26.44                    | 6.74           | 27.20               | 60.38            | 74       | PASS     |
| 0       | 2379.14 | AV       | 15.27                    | 6.74           | 27.20               | 49.21            | 54       | PASS     |
| 39      | 2484.69 | PK       | 25.95                    | 6.74           | 27.20               | 59.89            | 74       | PASS     |
| 39      | 2489.53 | AV       | 16.46                    | 6.74           | 27.20               | 50.40            | 54       | PASS     |




Fax: 86-755-36698525



#### **B. Test Plot:**

| - 6 -        |                                      |                 |   |                   |                                 |                    | er - Swept SA      |                   |       |                |
|--------------|--------------------------------------|-----------------|---|-------------------|---------------------------------|--------------------|--------------------|-------------------|-------|----------------|
| Marker       | Aug 31, 2021<br>E 1 2 3 4 5 6<br>E M | TRAC            | ALIGN OFF<br>Type: Voltage<br>Hold:>100/100 | Avg               | SENSE:IN                        | GHz<br>PNO: Fast   | 50 Q DC<br>8000000 |                   |       | rL<br>Irker    |
| Select Marke | 48 GHz<br>2 dBµV                     | 2.381 8         |   | -                 | #Atten: 10 dB                   | IFGain:Low         | 99 dBµV            | Ref 86.           |       | dB/di          |
| Norm         | D                                    |                 |   |                   |                                 |                    |                    |                   |       | .0<br>.0<br>.0 |
| De           |                                      | 12 <sup>2</sup> |   | a composition and |                                 |                    |                    | hat best from the | mund  | .0             |
| Fixe         |                                      |                 |   |                   |                                 |                    |                    |                   |       | .0<br>99<br>)1 |
| (            | 1001 pts)                            |                 | Sweep 1.                                    | 5 ( A ( 27) 5 A ( | 3.0 MHz                         | #VBV               | MHz                | 00 GHz<br>ISPR) 1 | N (CI | s BV           |
| Propertie    |                                      | FUNCTIO         | FUNCTION WIDTH                              | FUNCTION          | Y<br>26.442 dBμV<br>26.189 dBμV | 848 GHz<br>000 GHz |                    | f                 |       | N MODI         |
| Ма<br>1 о    |                                      |                 |   |                   |                                 |                    |                    |                   |       |                |
|              |                                      |                 | STATUS                                      |                   | m                               |                    |                    | _                 |       | -              |

(PEAK, Channel 0)

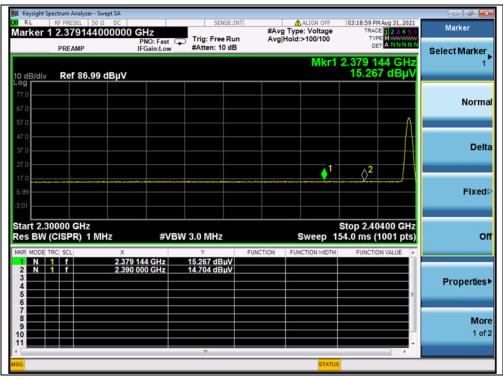

(AVERAGE, Channel 0)




Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525

orlab.cn E-mail: service@morlab.cn



|                |  |                            |                      |                                   |                                     |          | Keysight Spectrum                                 |  |  |
|----------------|--|----------------------------|----------------------|-----------------------------------|-------------------------------------|----------|---|--|--|
| 5 6 Marker     | 03:34:00 PM Aug 31, 2021<br>TRACE 1 2 3 4 5 6<br>TYPE M  | ALIGN OFF<br>Type: Voltage | Avg                  | SENSE:II                          | 0000 GHz                            | SEL 50 Ω | Marker 2 2.48                                     |  |  |
|                | DET P NNNN   | Hold:>100/100              | n Avg                |                                   | PNO: Fast<br>IFGain:Low             | MP       | PRE   |  |  |
| 2 <sup>▶</sup> | Mkr2 2.484 688 GHz   ΔB/div Ref 86.99 dBμV   25.949 dBμV |                            |                      |                                   |                                     |          |   |  |  |
| Norma          |  |                            |                      |                                   |                                     |          | 77.0<br>67.0<br>57.0                              |  |  |
| Delta          | un all fan ywedd fran y Allan ywer fan ywerdau           | بستالحمو ورياسال مراجع     | aphanol.comp. Mahana | are the transmitted of the second |                                     |          | 47.0<br>37.0<br>27.0                              |  |  |
| Fixed⊳         |  |                            |                      |                                   |                                     |          | 17.0<br>6.99<br>-3.01                             |  |  |
|                | Stop 2.50000 GHz<br>.000 ms (1001 pts)                   | Sweep 1                    |                      | BW 3.0 MHz                        |                                     | R) 1 MHz | Start 2.47800<br>Res BW (CISP                     |  |  |
| Properties►    | FUNCTION VALUE   | FUNCTION WIDTH             | FUNCTION             | ¥<br>24.758 dBµV<br>25.949 dBµV   | ×<br>2.483 500 GHz<br>2.484 688 GHz |          | MKR MODE TRC SCL<br>1 N 1 f<br>2 N 1 f<br>3 4 5 6 |  |  |
| More<br>1 of 2 |  |                            |                      | m                                 |                                     |          | 7<br>8<br>9<br>10<br>11                           |  |  |
|                |  | STATUS                     |                      | 70                                |                                     |          | ISG   |  |  |

#### (PEAK, Channel 39)

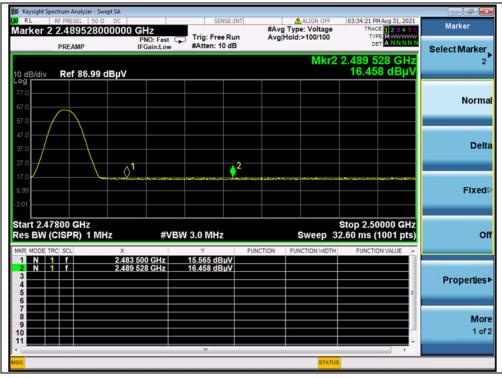

# (AVERAGE, Channel 39)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



#### 2Mbps

#### A. Test Verdict:

| Channel | Frequency | Detector | Receiver<br>Reading      | A <sub>T</sub> | A <sub>Factor</sub> | Max.<br>Emission | Limit    | Verdict |
|---------|-----------|----------|--------------------------|----------------|---------------------|------------------|----------|---------|
| Onanner | (MHz)     | PK/ AV   | U <sub>R</sub><br>(dBµV) | (dB)           | (dB@3m)             | E<br>(dBµV/m)    | (dBµV/m) | Verdiet |
| 0       | 2371.55   | PK       | 26.28                    | 6.74           | 27.20               | 60.22            | 74       | PASS    |
| 0       | 2381.30   | AV       | 15.04                    | 6.74           | 27.20               | 48.98            | 54       | PASS    |
| 39      | 2486.45   | PK       | 26.00                    | 6.74           | 27.20               | 59.94            | 74       | PASS    |
| 39      | 2491.86   | AV       | 16.40                    | 6.74           | 27.20               | 50.34            | 54       | PASS    |

#### **B. Test Plot:**

| LXI RL                       | RF PRES | nalyzer - Swept SA<br>EL 50 Ω DC<br>155000000 | 00 GHz<br>PNO: Fast<br>IFGain:Low | SENSE:                          | Avg<br>un Avg | ALIGN OFF<br>Type: Voltage<br>Hold:>100/100 | 03:42:11 PM Auc<br>TRACE<br>TYPE<br>DET | g 31, 2021<br><b>2 3 4 5</b> 6 | Marker         |
|------------------------------|---------|---|-----------------------------------|---------------------------------|---------------|---|---|--------------------------------|----------------|
| 10 dB/div                    |         | 86.99 dBµ\                                    |                                   | #Atten: 10 di                   |               | Mkr1  | 2.371 550<br>26.278                     | GHz                            | Select Marker  |
| 77.0<br>67.0                 |         |   |                                   |                                 |               |   |   |                                | Normal         |
| 57.0<br>47.0<br>37.0<br>27.0 |         | January                                       |                                   |                                 |               | 1   | 2 <sup>2</sup>                          | A                              | Delta          |
| 17.0<br>6.99<br>-3.01        |         |   |                                   |                                 |               |   |   |                                | Fixed⊵         |
| Start 2.3<br>Res BW          | CISPI   |   | #VI                               | BW 3.0 MHz                      |               | Sweep                                       | Stop 2.4060<br>1.000 ms (100            | 00 GHz<br>01 pts)              | Off            |
| 2 N<br>3 4<br>5              | 1 f     |   | 871 550 GHz<br>890 000 GHz        | ¥<br>26.278 dBµV<br>26.118 dBµV |               | FUNCTION WIDTH                              | FUNCTION V                              | ALUE                           | Properties►    |
| 6<br>7<br>8<br>9<br>10<br>11 |         |   |                                   | ===                             |               |   |   | -                              | More<br>1 of 2 |
| MSG                          |         |   |                                   |                                 |               | STATU                                       | S                                       |                                |                |

# (PEAK, Channel 0)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn



| LXI RL              | RF PRESEL<br>1 2.3813<br>PREAMP |           | GHz<br>PNO: Fast   | SENSE:<br>Trig: Free Ru<br>#Atten: 10 df | #Avg     | ALIGN OFF<br>Type: Voltage<br>Hold:>100/100 | TRAC                   | M Aug 31, 2021<br>28 1 2 3 4 5 6<br>Pe M | Marker<br>Select Marker |
|---------------------|---------------------------------|-----------|--------------------|--|----------|---|------------------------|--|-------------------------|
| 10 dB/div           | Ref 86                          | δ.99 dΒμV |                    |  |          | Mkr1  |                        | 02 GHz<br>5 dBµV                         | 1                       |
| Log<br>77.0<br>67.0 |                                 |           |                    |  |          |   |                        |  | Normal                  |
| 57.0<br>47.0        |                                 |           |                    |  |          |   |                        | $\wedge$                                 |                         |
| 37.0<br>27.0        |                                 |           |                    |  |          | 1   | <mark>2</mark>         |  | Delta                   |
| 17.0<br>6.99        |                                 |           |                    |  |          | <b>_</b>                                    | V                      |  | Fixed                   |
| Start 2.3           | 0000 GH<br>(CISPR)              |           | #VB                | 3W 3.0 MHz                               |          | Sweep 1                                     | Stop 2.40<br>56.9 ms ( | 0600 GHz<br>1001 pts)                    | off                     |
| 2 N                 | TRC SCL<br>1 f<br>1 f           |           | 302 GHz<br>000 GHz | Υ<br>15.035 dBμV<br>14.671 dBμV          | FUNCTION | FUNCTION WIDTH                              | FUNCTI                 | ON VALUE                                 |                         |
| 3<br>4<br>5<br>6    |                                 |           |                    |  |          |   |                        |  | Properties►             |
| 7<br>8<br>9         |                                 |           |                    |  |          |   |                        |  | More<br>1 of 2          |
| MSG                 |                                 |           |                    | ш  |          | STATUS                                      | 8                      |  |                         |

# (AVERAGE, Channel 0)

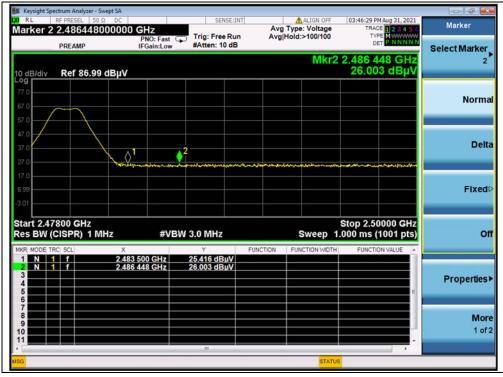

(PEAK, Channel 39)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



| LXI RL I                     | ctrum Analyzer - Swe<br>RF PRESEL 50 Ω<br>2.49186000 | DC<br>00000 GH:        |           | SENSE:I                    | #Avg     | ALIGN OFF<br>Type: Voltage<br>Hold:>100/100 | 03:46:51 PM Aug 31, 20<br>TRACE 1 2 3 4<br>TYPE M     | 5 6      | Marker         |
|------------------------------|--|------------------------|-----------|----------------------------|----------|---|---|----------|----------------|
| 10 dB/div                    | PREAMP<br>Ref 86.99 (                                | IFGa                   | D: Fast 🕞 | #Atten: 10 dB              |          |   | 2.491 860 GH<br>16.403 dBµ                            |          | Select Marker  |
| 77.0<br>67.0                 |  |                        |           |                            |          |   |   |          | Normal         |
| 47.0<br>37.0<br>27.0         |  |                        |           |                            | 2        |   |   |          | Delta          |
| 17.0<br>6.99<br>-3.01        |  | <u>\</u>               |           |                            |          |   |   | ~        | Fixed⊵         |
| MKR MODE TR                  | CISPR) 1 MH  | X                      |           | / 3.0 MHz<br>Y             | FUNCTION | Sweep 3                                     | Stop 2.50000 GH<br>2.60 ms (1001 pt<br>FUNCTION VALUE | tz<br>s) | Off            |
| 1 N 1<br>2 N 1<br>3 4<br>5 6 | f  | 2.483 500<br>2.491 860 |           | 15.886 dBµV<br>16.403 dBµV |          |   |   | 10       | Properties►    |
| 7<br>8<br>9<br>10<br>11      |  |                        |           |                            |          |   |   |          | More<br>1 of 2 |
| MSG                          |  |                        |           |                            |          | STATUS                                      | ,   |          |                |

(AVERAGE, Channel 39)



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



# 2.10. Radiated Emission

#### 2.10.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (µV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 0.009 - 0.490   | 2400/F(kHz)           | 300                      |
| 0.490 - 1.705   | 24000/F(kHz)          | 30                       |
| 1.705 - 30.0    | 30                    | 30                       |
| 30 - 88         | 100                   | 3                        |
| 88 - 216        | 150                   | 3                        |
| 216 - 960       | 200                   | 3                        |
| Above 960       | 500                   | 3                        |

**Note1:** For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. **Note2:**For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



Http://www.morlab.cn


Fax: 86-755-36698525




# 2.10.2. Test Description

#### Test Setup:

1) For radiated emissions from 9kHz to 30MHz

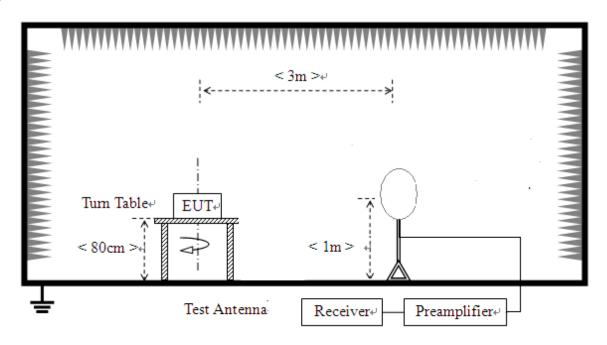

2) For radiated emissions from 30MHz to1GHz

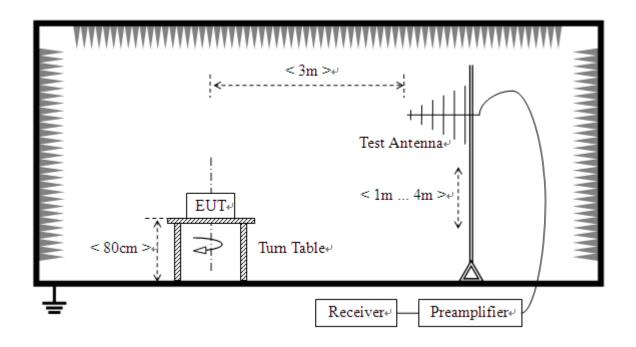




Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



3) For radiated emissions above 1GHz

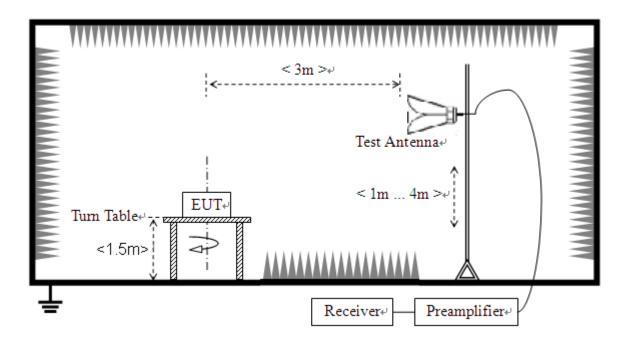

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz.The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.





#### 2.10.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$ 

A<sub>T</sub>: Total correction Factor except Antenna

U<sub>R</sub>: Receiver Reading

G<sub>preamp</sub>: Preamplifier Gain

A<sub>Factor</sub>: Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{Factor}$  were built in test software.

**Note1:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


**Note2:** For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**Note3:** For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.






#### 1Mbps



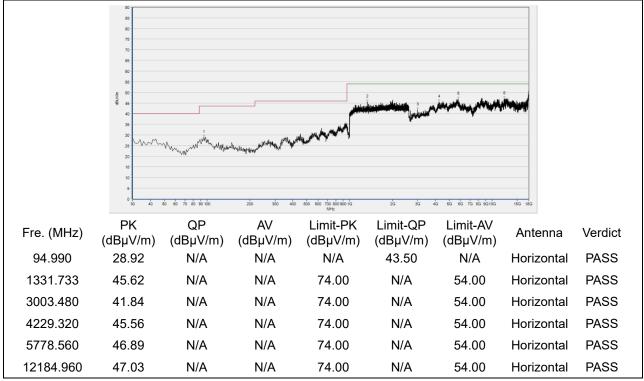

(Antenna Horizontal, 30MHz to 18GHz)

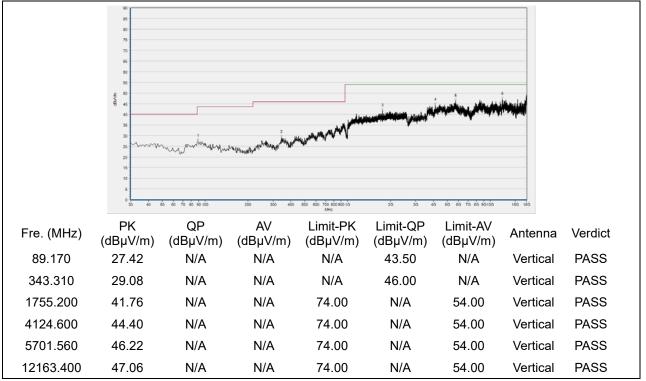


(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn






#### Plot for Channel 19

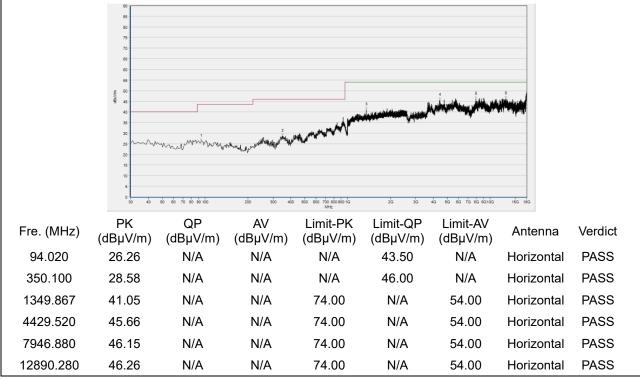

(Antenna Horizontal, 30MHz to 18GHz)

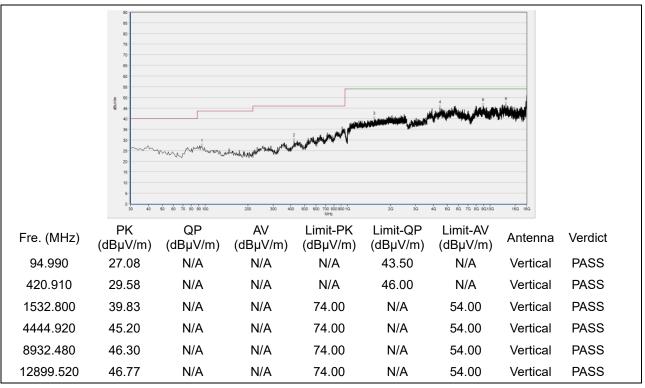


(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn






#### Plot for Channel 39

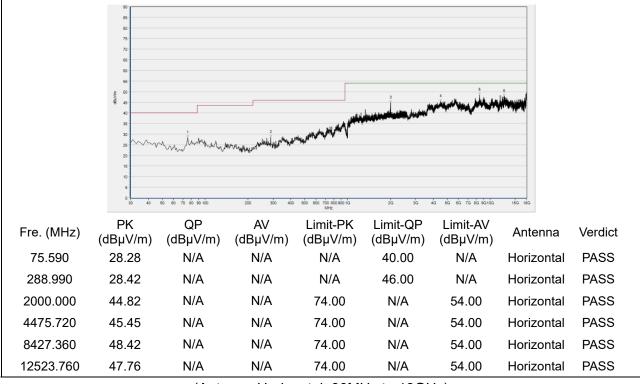

(Antenna Horizontal, 30MHz to 18GHz)

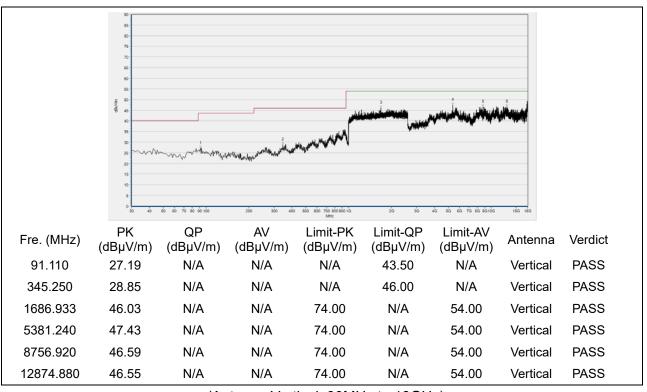

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525 E-mail: service@morlab.cn

Http://www.morlab.cn




#### 2Mbps



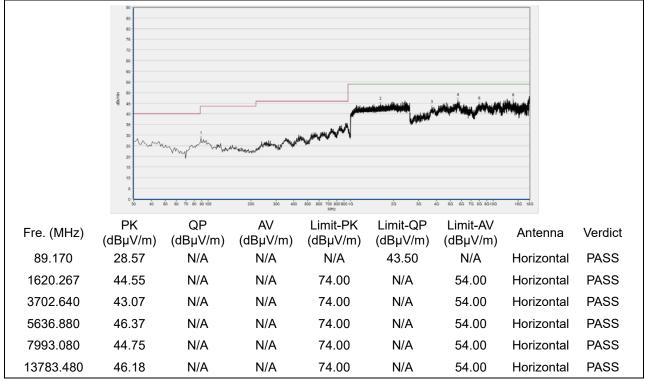

(Antenna Horizontal, 30MHz to 18GHz)

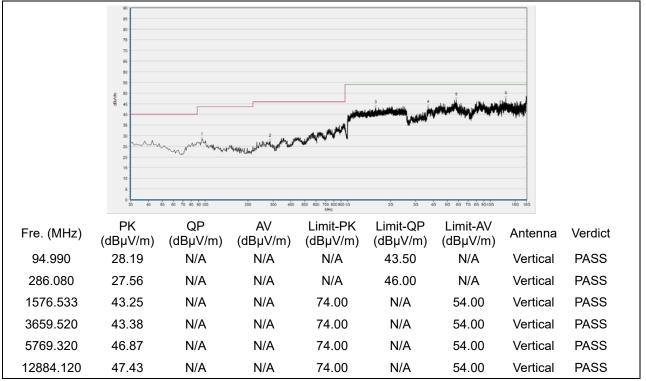


(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn






#### Plot for Channel 19

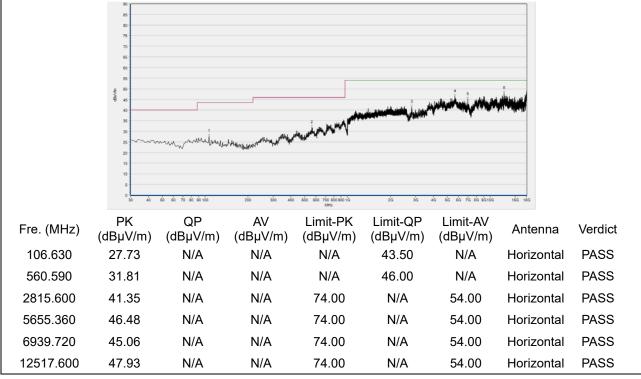

(Antenna Horizontal, 30MHz to 18GHz)

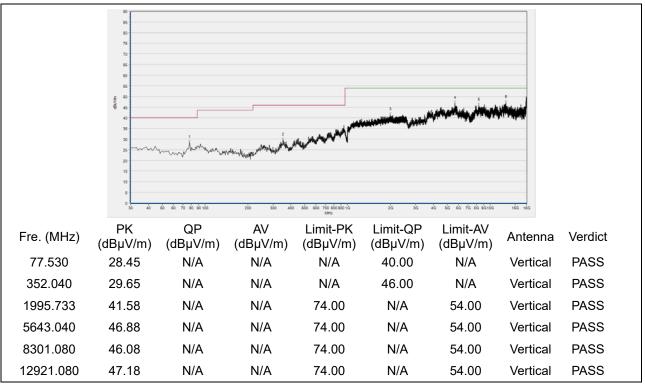


(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn






#### Plot for Channel 39

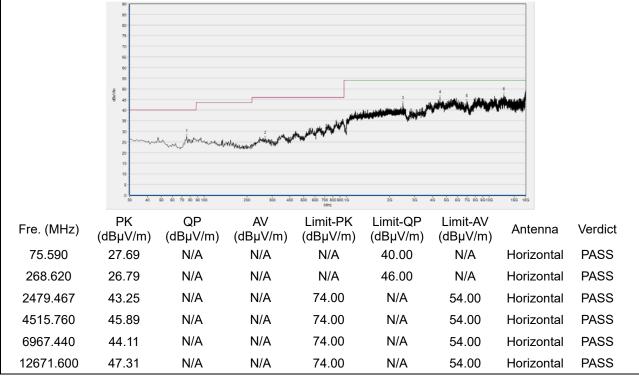

(Antenna Horizontal, 30MHz to 18GHz)

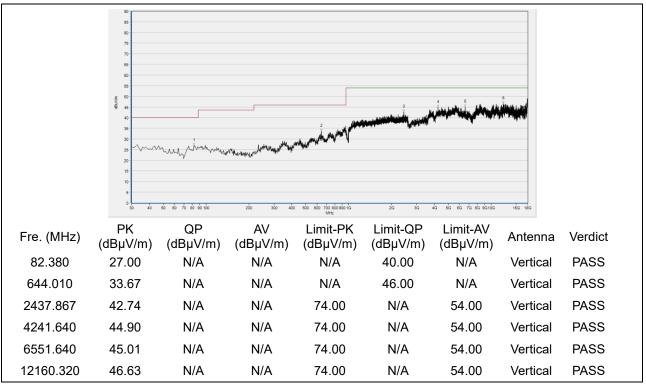

(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



# **Annex A Test Uncertainty**

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

| Test Items                  | Uncertainty |
|-----------------------------|-------------|
| Peak Output Power           | ±2.22dB     |
| Power Spectral Density      | ±2.22dB     |
| Bandwidth                   | ±5%         |
| Conducted Spurious Emission | ±2.77dB     |
| Restricted Frequency Bands  | ±5%         |
| Radiated Emission           | ±2.95dB     |
| Conducted Emission          | ±2.44dB     |

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



# **Annex B Testing Laboratory Information**

#### 1. Identification of the Responsible Testing Laboratory

| Laboratory Name:    | Shenzhen Morlab Communications Technology Co., Ltd.    |  |  |  |  |
|---------------------|--|--|--|--|--|
|                     | FL.3, Building A, FeiYang Science Park, No.8 LongChang |  |  |  |  |
| Laboratory Address: | Road, Block 67, BaoAn District, ShenZhen, GuangDong    |  |  |  |  |
|                     | Province, P. R. China                                  |  |  |  |  |
| Telephone:          | +86 755 36698555                                       |  |  |  |  |
| Facsimile:          | +86 755 36698525                                       |  |  |  |  |

#### 2. Identification of the Responsible Testing Location

| Name: Shenzhen Morlab Communications Technology Co., Ltd. |  |  |  |  |  |
|---|--|--|--|--|--|
|   | FL.3, Building A, FeiYang Science Park, No.8 LongChang |  |  |  |  |
| Address:  | Road, Block 67, BaoAn District, ShenZhen, GuangDong    |  |  |  |  |
|   | Province, P. R. China                                  |  |  |  |  |

#### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525



### 4. Test Equipments Utilized

# 4.1 Conducted Test Equipments

| Equipment<br>Name         | Serial No. | Туре      | Manufacturer     | Cal. Date  | Due Date   |
|---------------------------|------------|-----------|------------------|------------|------------|
| EXA Signal<br>Analzyer    | MY53470836 | N9010A    | Agilent          | 2021.03.25 | 2022.03.24 |
| RF Cable<br>(30MHz-26GHz) | CB01       | RF01      | Morlab           | N/A        | N/A        |
| Coaxial Cable             | CB02       | RF02      | Morlab           | N/A        | N/A        |
| SMA Connector             | CN01       | RF03      | HUBER-SUHNE<br>R | N/A        | N/A        |
| Computer                  | T430i      | Think Pad | Lenovo           | N/A        | N/A        |

# 4.2 Conducted Emission Test Equipments

| Equipment Name                         | Serial No.            | Туре              | Manufacturer                       | Cal. Date  | Due Date   |
|--|-----------------------|-------------------|------------------------------------|------------|------------|
| Receiver                               | MY5640009<br>3        | N9038A            | KEYSIGHT                           | 2021.03.09 | 2022.03.08 |
| LISN                                   | 8127449               | NSLK 8127         | Schwarzbeck                        | 2021.03.09 | 2022.03.08 |
| Pulse Limiter<br>(10dB)                | VTSD 9561<br>F-B #206 | VTSD<br>9561-F    | Schwarzbeck                        | 2021.07.21 | 2022.07.20 |
| Coaxial<br>Cable(BNC)<br>(30MHz-26GHz) | CB01                  | EMC01             | Morlab                             | N/A        | N/A        |
| Laptop                                 | 2016AP5012            | ThinkPad<br>E470c | Lenovo<br>(Beijing) Co.,<br>Ltd.   | N/A        | N/A        |
| Laptop Adapter                         | N/A                   | ADLX45DL<br>C3A   | Lite-On<br>Technology<br>Co., Ltd. | N/A        | N/A        |

#### 4.3 List of Software Used

| Description      | Manufacturer | Software Version |
|------------------|--------------|------------------|
| Test System      | Tonscend     | V2.6             |
| Power Panel      | Agilent      | V3.8             |
| Morlab EMCR V1.2 | Morlab       | V1.0             |
| TS+ -[JS32-CE]   | Tonscend     | V2.5.0.0         |



Shenzhen Morlab Communications Technology Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



#### 4.4 Radiated Test Equipments

| Equipment                                  |                  | -                         |              | <b>0.1 5</b> <i>i</i> |            |
|--|------------------|---------------------------|--------------|-----------------------|------------|
| Name                                       | Serial No.       | Туре                      | Manufacturer | Cal. Date             | Due Date   |
| Receiver                                   | MY54130016       | N9038A                    | Agilent      | 2021.07.16            | 2022.07.15 |
| Test Antenna -<br>Bi-Log                   | 9163-520         | VULB 9163                 | Schwarzbeck  | 2019.05.24            | 2022.05.23 |
| Test Antenna -<br>Loop                     | 1520-022         | FMZB1520                  | Schwarzbeck  | 2019.02.14            | 2022.02.13 |
| Test Antenna –<br>Horn                     | 01774            | BBHA 9120D                | Schwarzbeck  | 2019.07.26            | 2022.07.25 |
| Test Antenna –<br>Horn                     | BBHA9170<br>#774 | BBHA 9170                 | Schwarzbeck  | 2019.07.26            | 2022.07.25 |
| Coaxial Cable<br>(N male)<br>(9KHz-30MHz)  | CB04             | EMC04                     | Morlab       | N/A                   | N/A        |
| Coaxial Cable<br>(N male)<br>(30MHz-26GHz) | CB02             | EMC02                     | Morlab       | N/A                   | N/A        |
| Coaxial Cable<br>(N male)<br>(30MHz-26GHz) | CB03             | EMC03                     | Morlab       | N/A                   | N/A        |
| Coaxial Cable<br>(N male)<br>(30MHz-40GHz) | CB05             | EMC05                     | Morlab       | N/A                   | N/A        |
| 1-18GHz<br>pre-Amplifier                   | 61171/61172      | S020180L32<br>03          | Tonscend     | 2021.07.15            | 2022.07.14 |
| 18-26.5GHz<br>pre-Amplifier                | 46732            | S10M100L38<br>02          | Tonscend     | 2021.07.15            | 2022.07.14 |
| 26-40GHz<br>pre-Amplifier                  | 56774            | S40M400L40<br>02          | Tonscend     | 2021.07.15            | 2022.07.14 |
| Notch Filter                               | N/A              | WRCG-2400-<br>2483.5-60SS | Wainwright   | 2021.07.15            | 2022.07.14 |
| Anechoic<br>Chamber                        | N/A              | 9m*6m*6m                  | CRT          | 2020.01.06            | 2023.01.05 |

\_\_\_\_ END OF REPORT \_\_\_\_



Fax: 86-755-36698525

Http://www.morlab.cn