

# TEST REPORT

**Applicant:** Guangzhou ZHIYUAN Electronics Co., Ltd.  
**Address:** ZLG Zhiyuan Electronics Building, No. 43 Sicheng Road, Tianhe District, Guangzhou, Guangdong Province  
**Equipment Type:** Wi-Fi Module  
**Model Name:** ZM602P2S31P  
**Brand Name:** ZLG  
**Test Standard:** GB/T 9410-2008 (refer section 3.1)  
**Test Date:** Jun. 10, 2022  
**Date of Issue:** Aug. 18, 2022

**ISSUED BY:**

Shenzhen BALUN Technology Co., Ltd.

**Tested by:** Mai Jintian

**Checked by:** Tolan Tu

**Approved by:** Wei Yanquan  
(Chief Engineer)

*Mai Jintian*

*Tolan Tu*

*Wei Yanquan*

<b>Revision History</b>		
<u>Version</u>	<u>Issue Date</u>	<u>Revisions</u>
<u>Rev. 01</u>	<u>Aug. 18, 2022</u>	<u>Initial Issue</u>

## TABLE OF CONTENTS

1	GENERAL INFORMATION .....	4
1.1	Test Laboratory .....	4
1.2	Test Location.....	4
2	PRODUCT INFORMATION.....	5
2.1	Applicant Information .....	5
2.2	Manufacturer Information .....	5
2.3	Factory Information .....	5
2.4	General Description for Equipment under Test (EUT) .....	5
2.5	Ancillary Equipment .....	5
2.6	Technical Information.....	5
3	SUMMARY OF TEST RESULTS.....	6
3.1	Test Standards.....	6
3.2	Test Verdict.....	6
3.3	Test Uncertainty .....	6
4	GENERAL TEST CONFIGURATIONS.....	7
4.1	Test Condition .....	7
4.2	Test Equipment List .....	7
4.3	Test Setup.....	8
ANNEX A TEST RESULTS.....		10
A.1	Gain and Efficiency .....	10
A.2	VSWR .....	11
A.3	Return Loss.....	12
A.4	Input Impedance .....	13
ANNEX B RADIATION PATTERN.....		14

---

ANNEX C	TEST SETUP PHOTO .....	17
ANNEX D	EUT PHOTO .....	19

# 1 GENERAL INFORMATION

## 1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

## 1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	<input checked="" type="checkbox"/> Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	<input type="checkbox"/> 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	Guangzhou ZHIYUAN Electronics Co., Ltd.
Address	ZLG Zhiyuan Electronics Building, No. 43 Sicheng Road, Tianhe District, Guangzhou, Guangdong Province
Contact Person	Lin Youlian
Telephone Number	13424989034
E-mail Address	zy.emc@zlg.cn

### 2.2 Manufacturer Information

Manufacturer	Guangzhou ZHIYUAN Electronics Co., Ltd.
Address	ZLG Zhiyuan Electronics Building, No. 43 Sicheng Road, Tianhe District, Guangzhou, Guangdong Province

### 2.3 Factory Information

Factory	N/A
Address	N/A

### 2.4 General Description for Equipment under Test (EUT)

EUT Name	Wi-Fi Module
Model Name Under Test	ZM602P2S31P
Antenna Type	PCB Antenna
Dimensions	16*7 mm

### 2.5 Ancillary Equipment

Note: Not applicable.

### 2.6 Technical Information

Frequency Range	2400MHz ~ 2500MHz
Test Frequencies	2400MHz, 2410MHz, 2420MHz, 2430MHz, 2440MHz, 2450MHz, 2460MHz, 2470MHz, 2480MHz, 2490MHz, 2500MHz

### 3 SUMMARY OF TEST RESULTS

#### 3.1 Test Standards

No.	Identity	Document Title
1	GB/T 9410-2008	General specification for antennas used in the mobile communications
2	ANSI/IEEE Std 149-1979	IEEE Standard Test Procedures for Antennas
3	Enterprise Technology Method	Enterprise Technology Method refer Section 4.3

#### 3.2 Test Verdict

Report Section	Description	Identity	Remark
ANNEX A.1	Gain and Efficiency	GB/T 9410-2008	Note#2
ANNEX A.2	VSWR	GB/T 9410-2008	Note#2
ANNEX A.3	Return Loss	Enterprise Technology Method	Note#1, Note#2
ANNEX A.4	Input impedance	ANSI/IEEE Std 149-1979	Note#2
ANNEX B	Radiation Pattern	GB/T 9410-2008	Note#2

Note#1: The return loss test method is based on Section 4.3.3 of this report.

Note#2: Compared with the EUT of test report(BL-SZ2260417-901), the EUT of this report is the same one.

Therefore, all test datas originate from report(BL-SZ2260417-901), which was issued by Shenzhen BALUN Technology Co., Ltd. on 2022, Jun. 23.

#### 3.3 Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Item	Uncertainty
VSWR(S11)	$\pm 0.61$
Gain	$\pm 1.92\text{dB}$

## 4 GENERAL TEST CONFIGURATIONS

### 4.1 Test Condition


Environment Parameter	Selected Values During Tests			
	Ambient Pressure(KPa)	Temperature(°C)	Voltage	Relative Humidity (%)
Normal Temperature, Normal Voltage (NTNV)	100 to 102	19 to 25	N/A	45 to 55

### 4.2 Test Equipment List


Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
SG24 Multi-probe Antenna Measurement System	SATIMO	SG24-L	1101855-0001	2021.11.12	2024.11.11
Vector Network Analyzer	Agilent	E5071B	MY42404001	2022.04.02	2023.04.01

### 4.3 Test Setup

#### 4.3.1 Antenna gain, efficiency and radiation pattern test setup

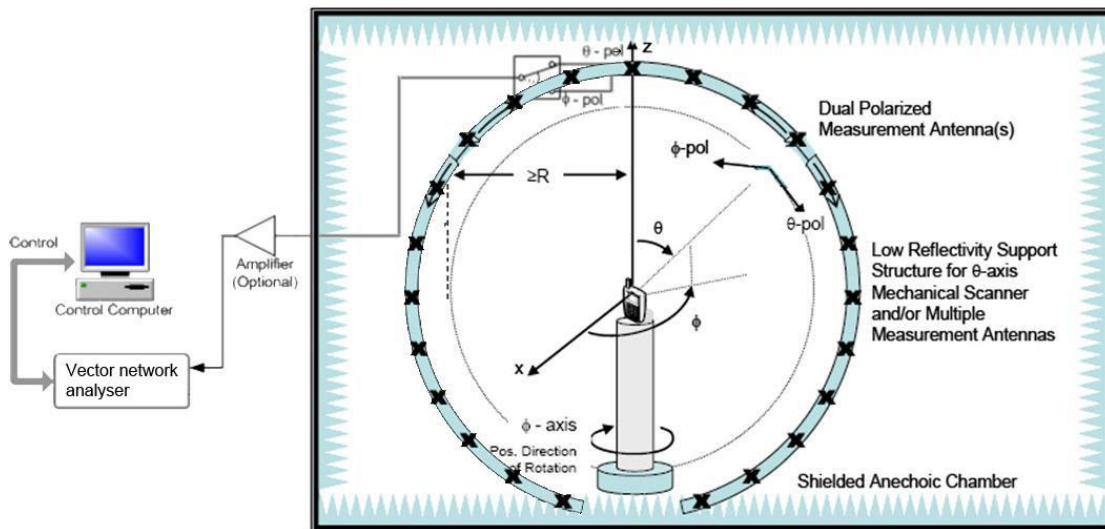

#### 4.3.2 S11 parameter test setup

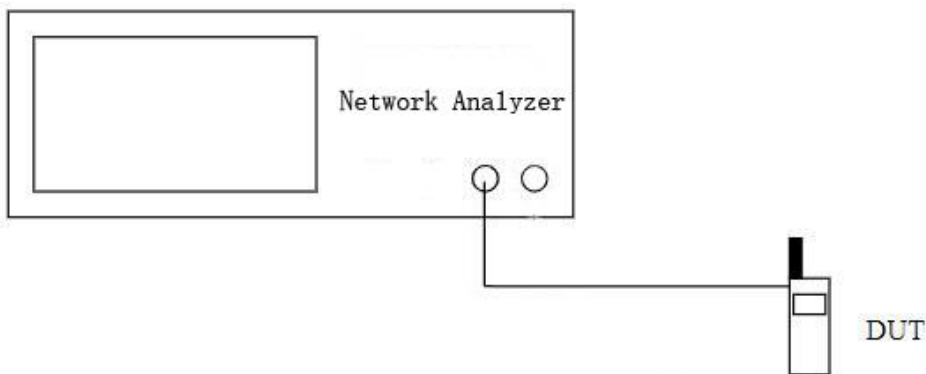



### 4.3.3 Return Loss Test Method

- 1) The connection diagram between the antenna under test and the measuring system is shown in Chapter 4.3.2. The nominal impedance of return loss measuring equipment is 50  $\Omega$ ;
- 2) Calibration of the measuring system: perform system calibration according to the calibration steps of the test instrument, and the interface of the test end shall match the interface of the antenna under test;
- 3) Connect the measuring system with the antenna under test, and measure the return loss within the working frequency range. The measured loss reading is the return loss of the measured antenna port.


## ANNEX A TEST RESULTS

### A.1 Gain and Efficiency

Frequency	Gain (dBi)	Efficiency (%)
2400MHz	<b>3.40</b>	<b>81</b>
2410MHz	3.36	80
2420MHz	3.31	79
2430MHz	3.28	80
2440MHz	3.19	80
2450MHz	3.16	78
2460MHz	3.03	77
2470MHz	3.00	77
2480MHz	3.04	78
2490MHz	3.07	76
2500MHz	3.02	75


## A.2 VSWR

Frequency	VSWR
2400MHz	1.44
2450MHz	1.61
2500MHz	1.80

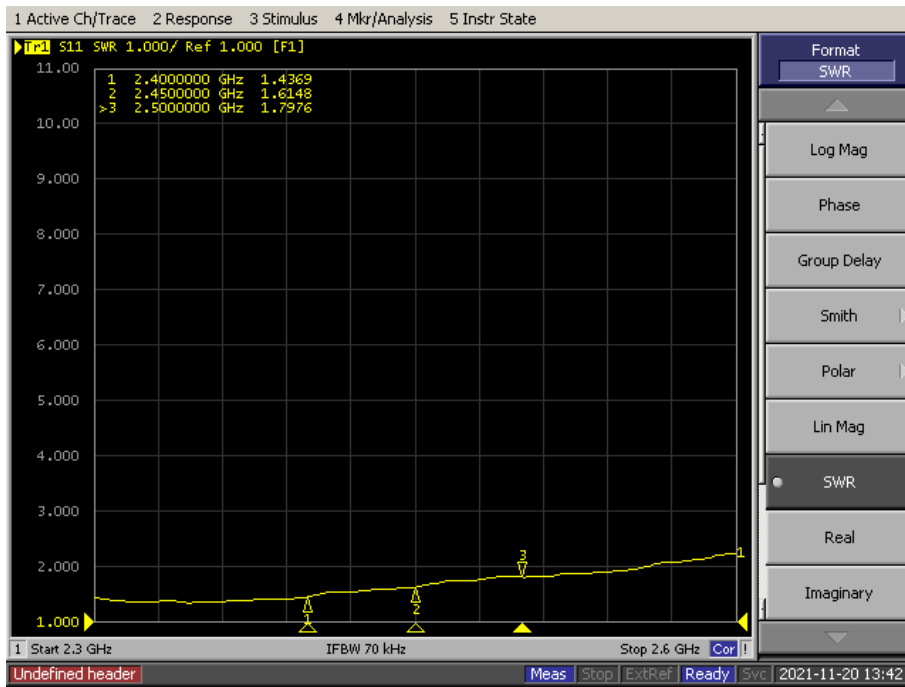


### A.3 Return Loss

Frequency	Return Loss (dB)
2400MHz	-19.77
2450MHz	-13.79
2500MHz	-11.80

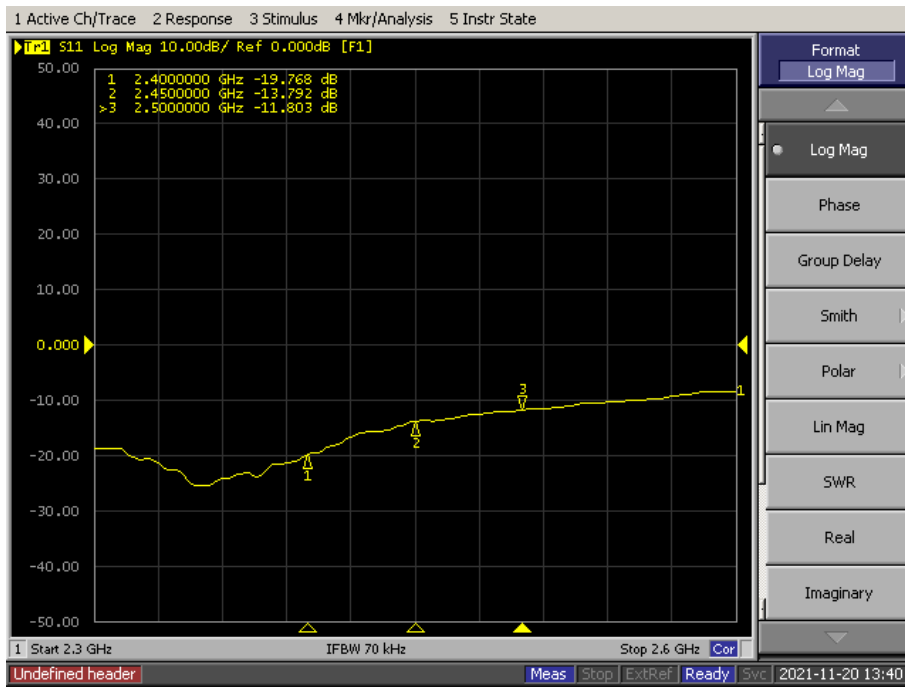


### A.4 Input Impedance


Frequency	Input impedance ( $\Omega$ )
2400MHz	40.96
2450MHz	37.06
2500MHz	38.95

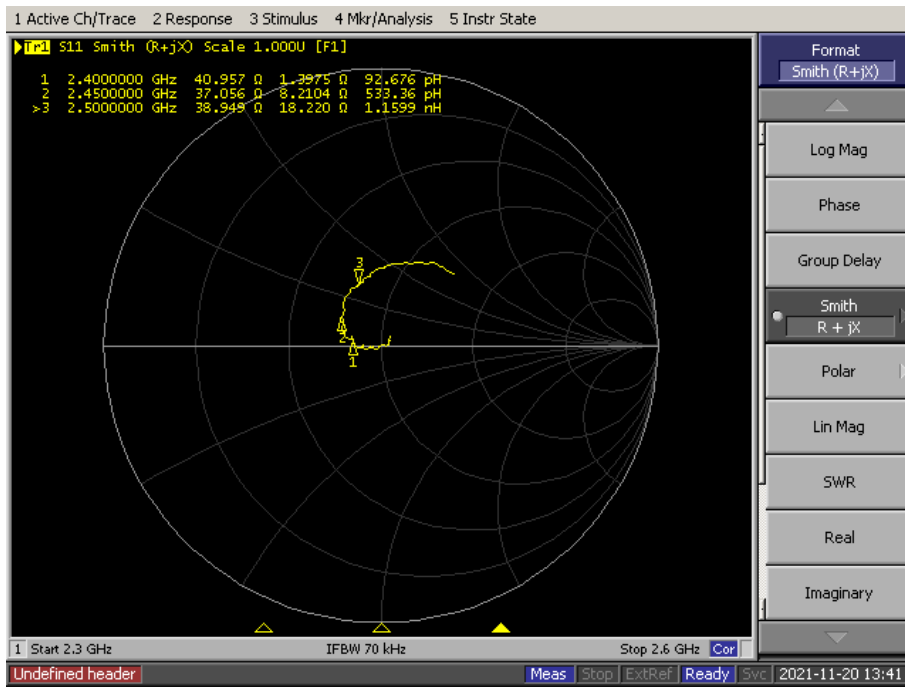

## ANNEX B RADIATION PATTERN


### B.1 3D Pattern

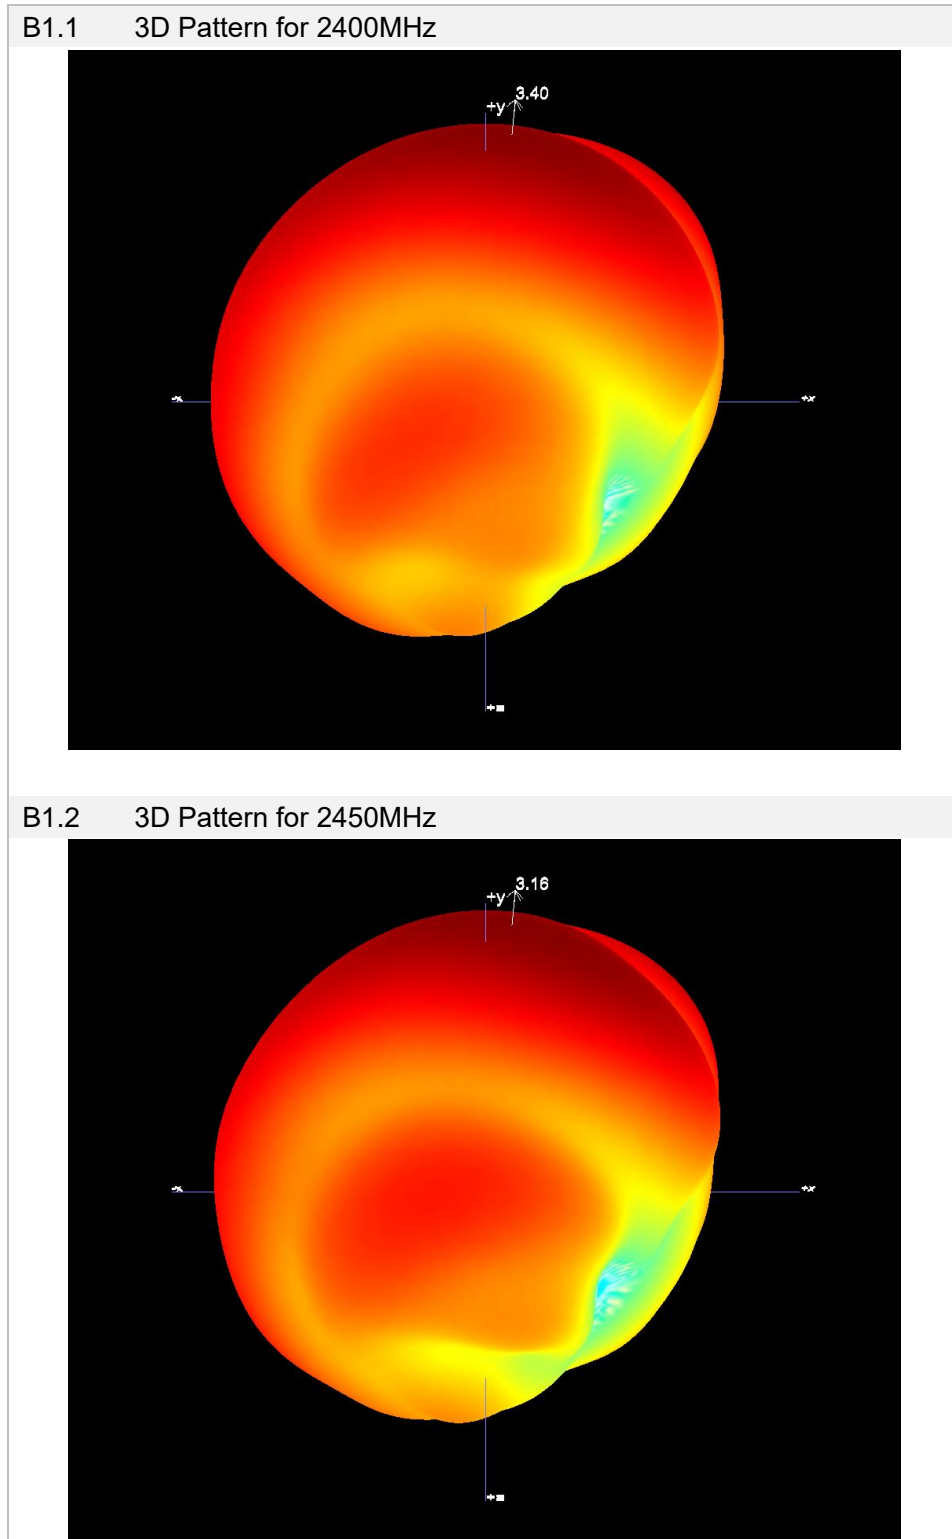

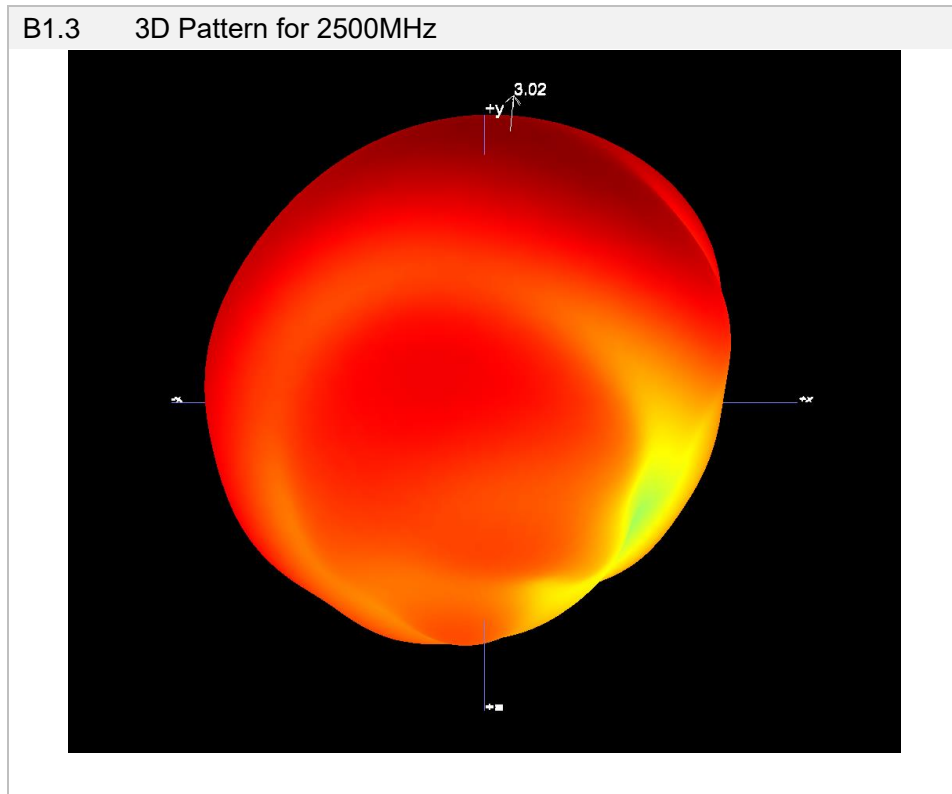


## B.2 1D Radiation Pattern


### B2.1 PHI=0

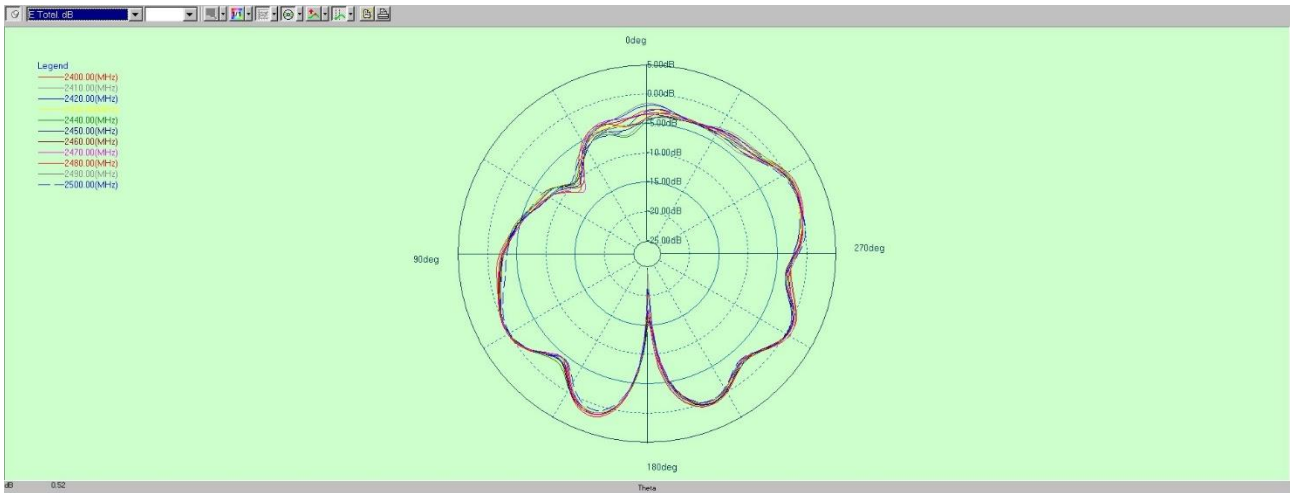

### B2.2 PHI=90


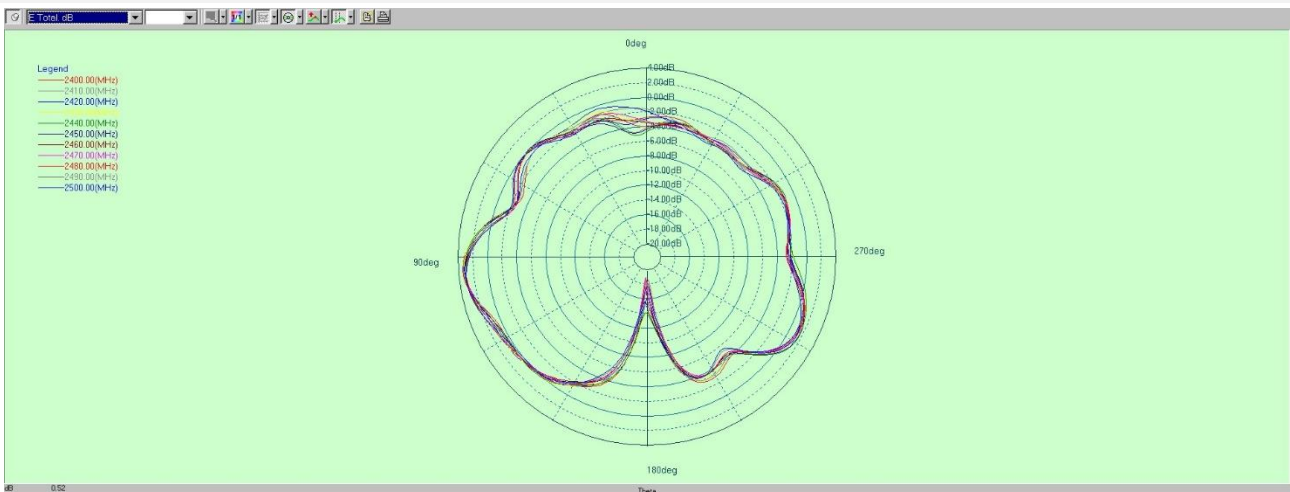



### B2.3 THETA=90

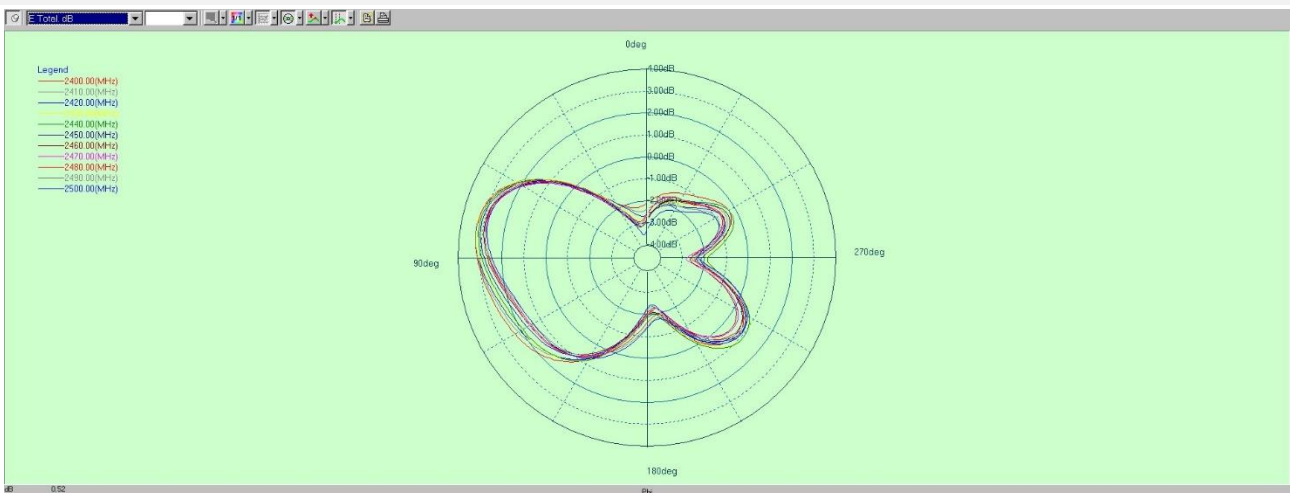




## ANNEX C TEST SETUP PHOTO

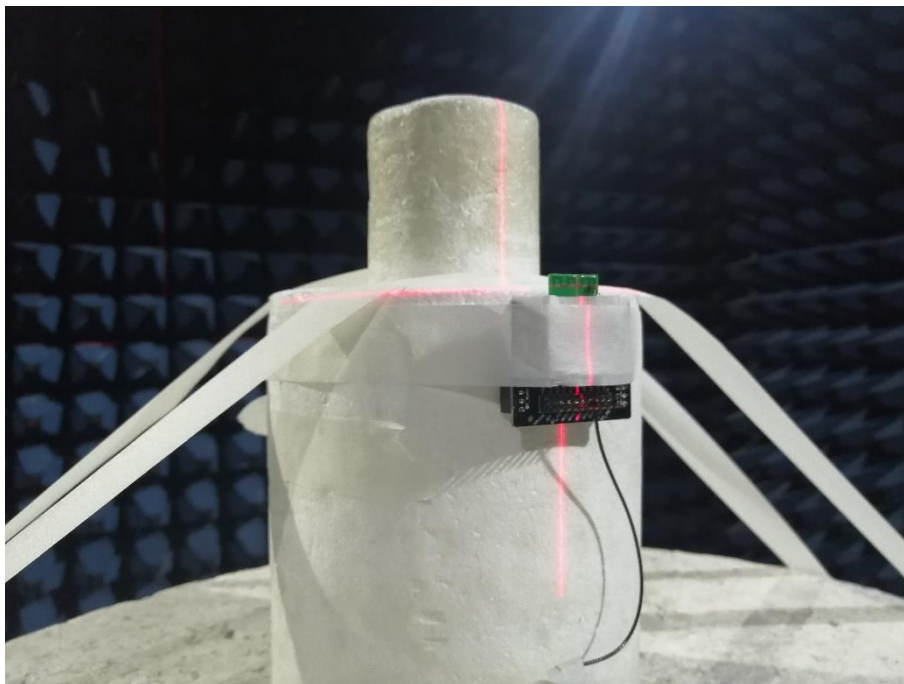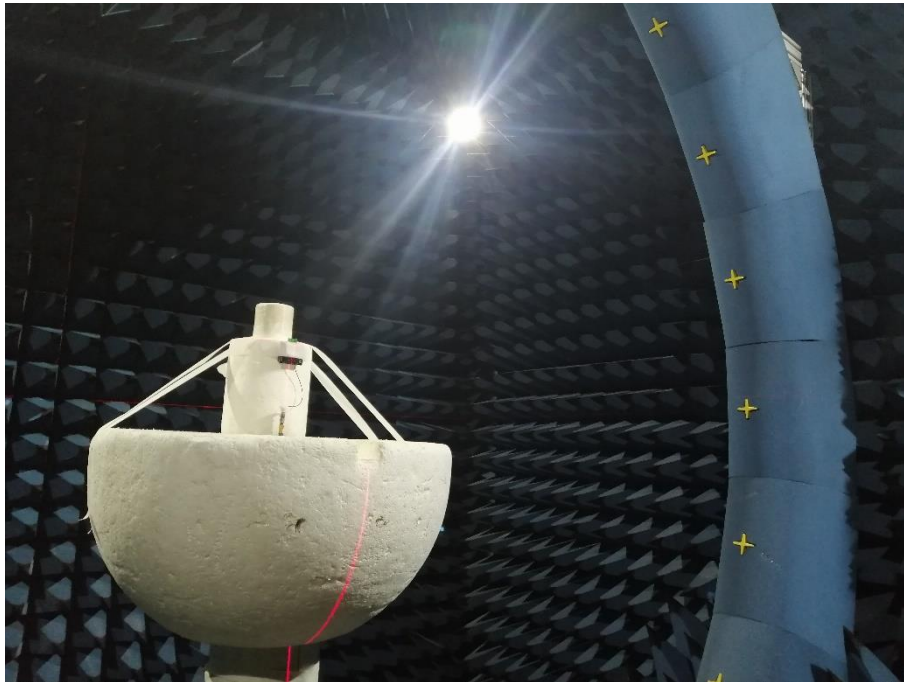

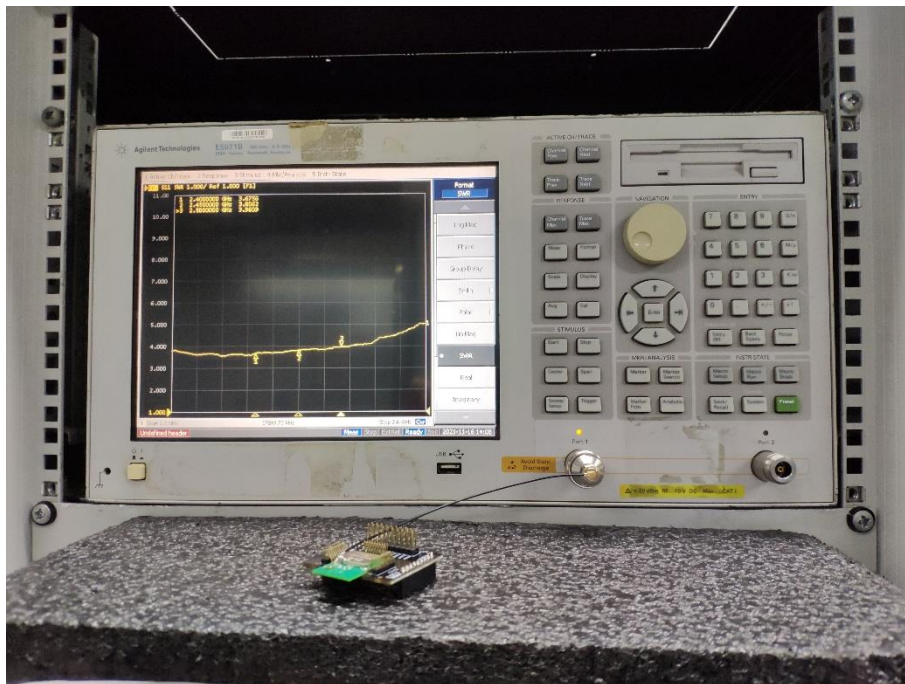

# ANNEX D EUT PHOTO

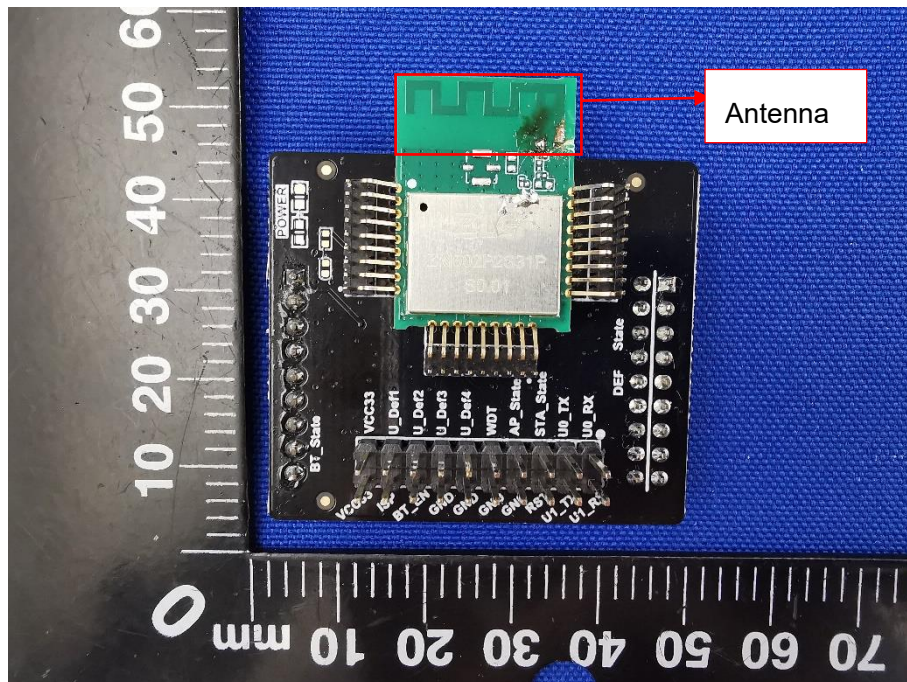

## Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--