



1.6dB Bandwidth


| Test Mode | Test Channel | Ant | EBW[MHz] | Limit | Verdict |
|-----------|--------------|------|----------|-------|---------|
| BLE | 2402 | Ant1 | 0.6840 | 0.5 | PASS |
| BLE | 2440 | Ant1 | 0.6946 | 0.5 | PASS |
| BLE | 2480 | Ant1 | 0.6973 | 0.5 | PASS |

6dB Bandwidth_BLE_2402_Ant1

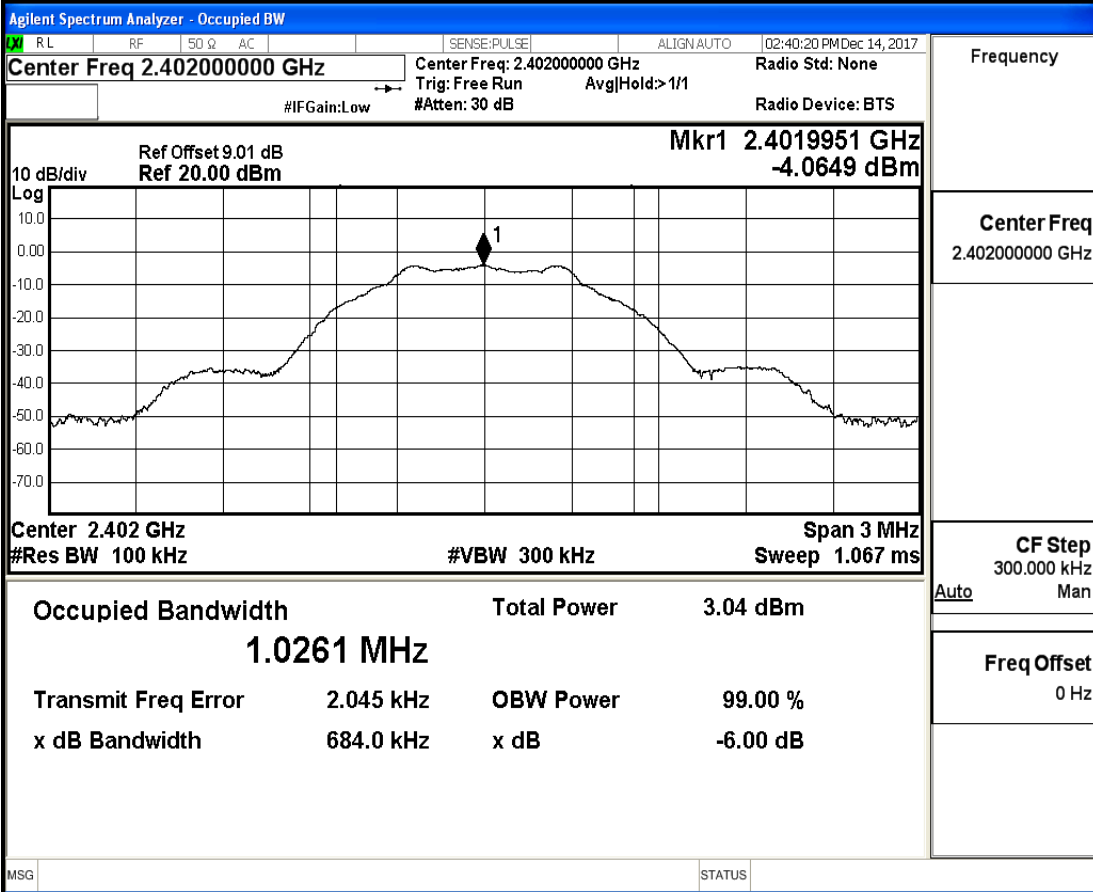

6dB Bandwidth_BLE_2440_Ant1

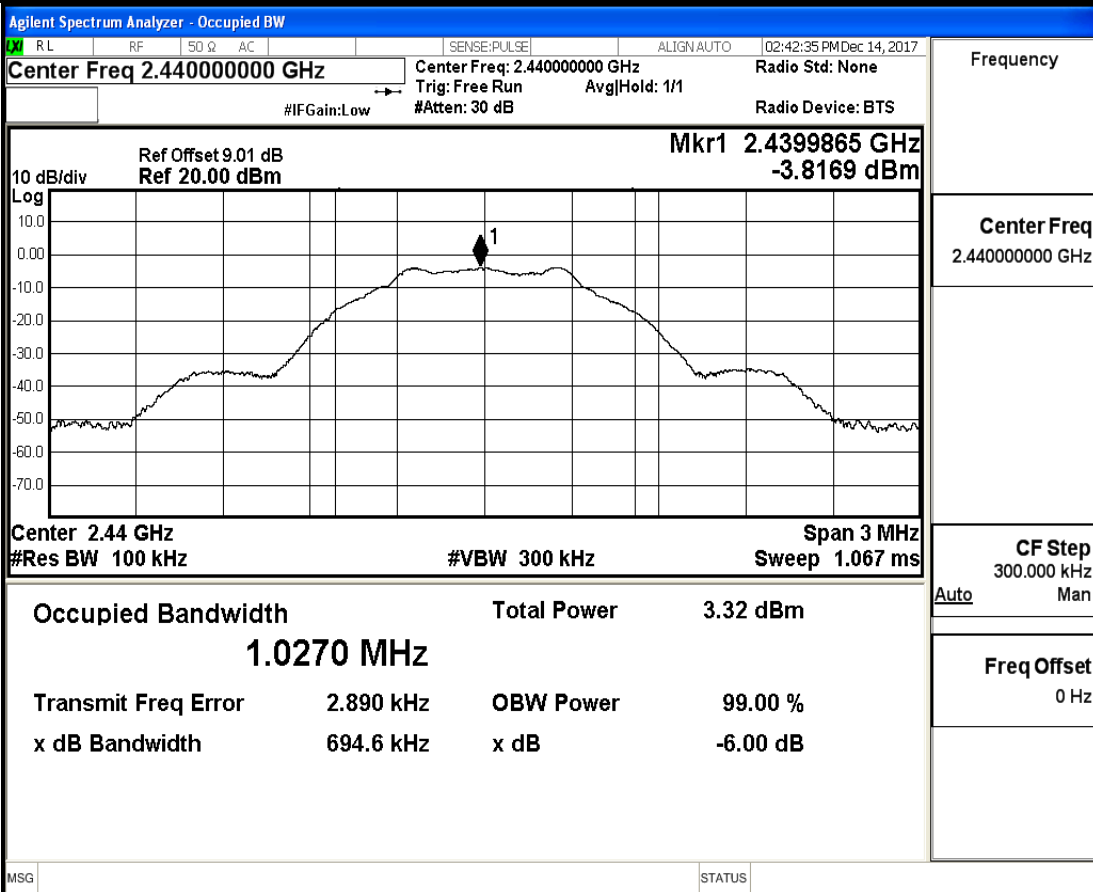

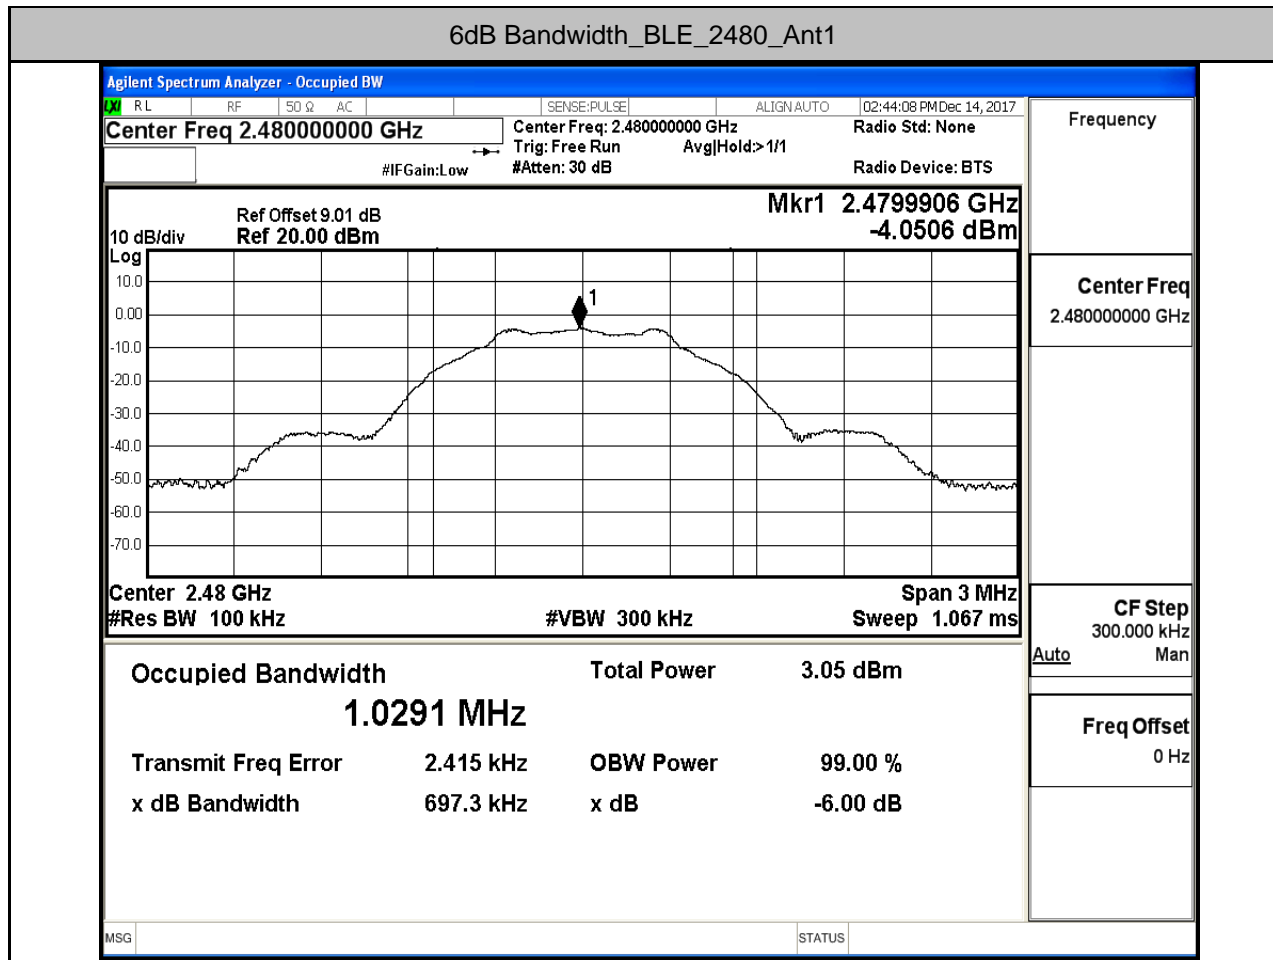


2.Occupied Bandwidth

| Test Mode | Test Channel | Ant | OBW[MHz] | Limit[MHz] | Verdict |
|-----------|--------------|-----|----------|------------|---------|
|-----------|--------------|-----|----------|------------|---------|


3.Maximum peak conducted output power

| Test Mode | Test Channel | Ant | Power[dBm] | Limit[dBm] | Verdict |
|-----------|--------------|------|------------|------------|---------|
| BLE | 2402 | Ant1 | -3.036 | 30 | PASS |
| BLE | 2440 | Ant1 | -2.811 | 30 | PASS |
| BLE | 2480 | Ant1 | -3.041 | 30 | PASS |


Maximum peak conducted output power_BLE_2402_Ant1

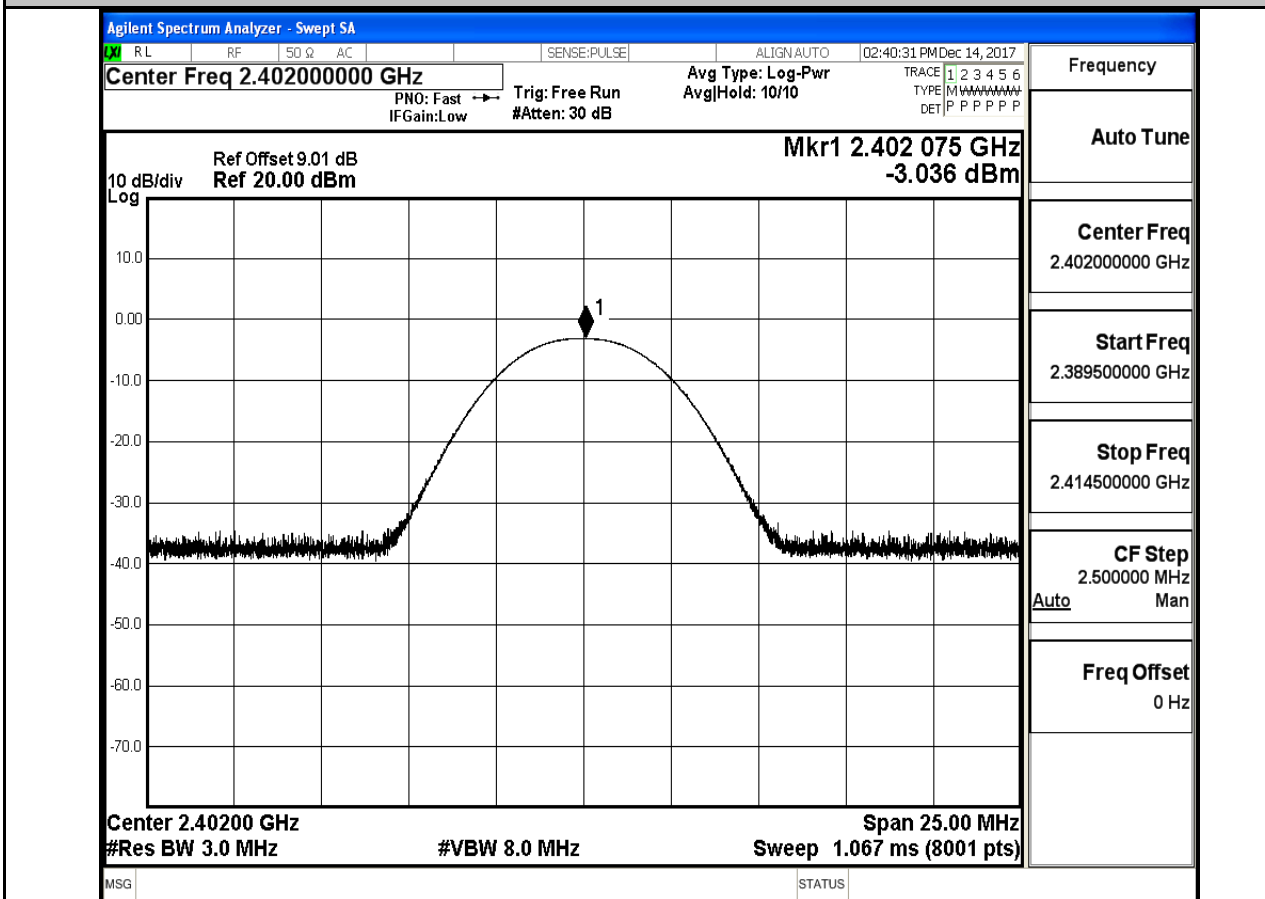

Maximum peak conducted output power_BLE_2440_Ant1

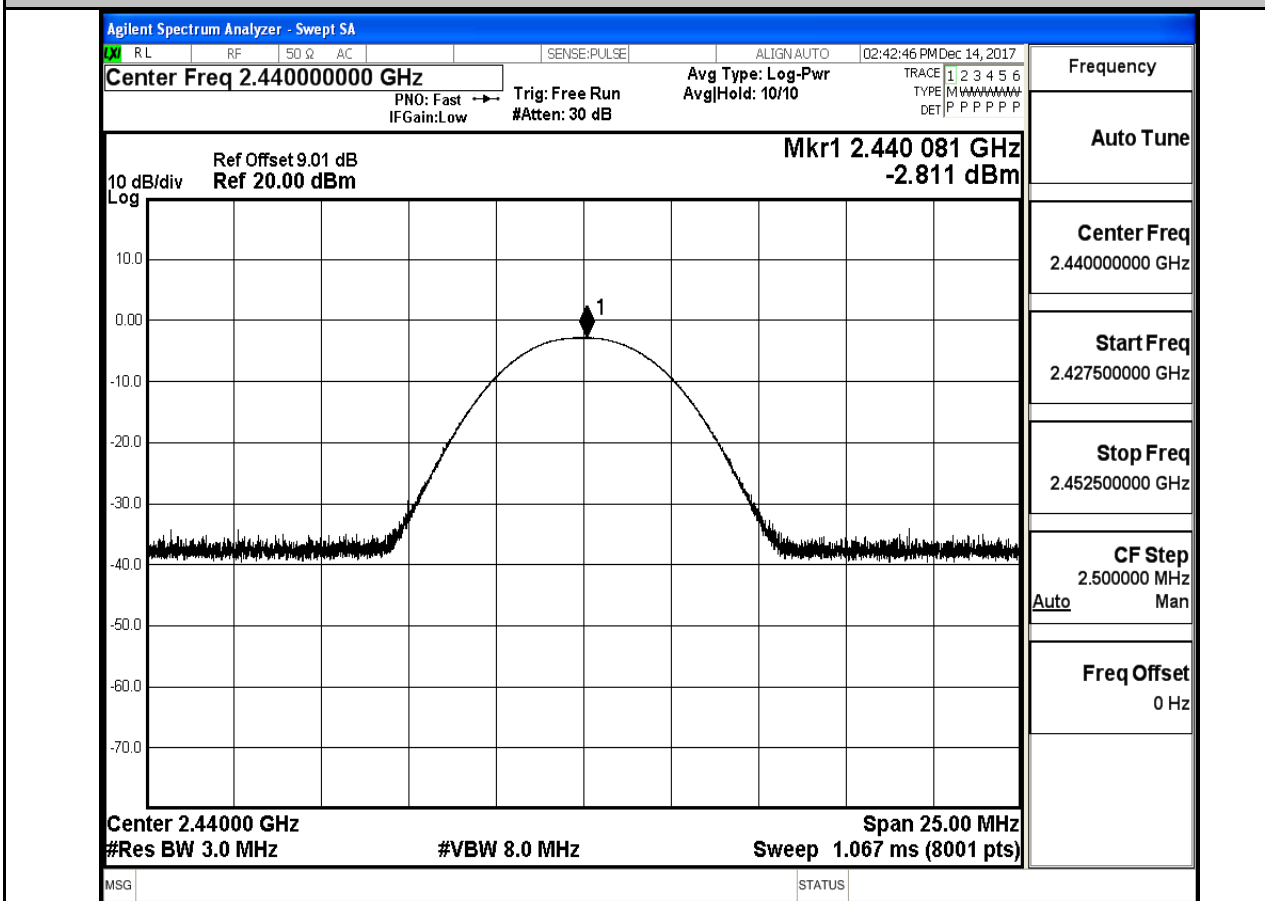


Maximum peak conducted output power_BLE_2480_Ant1

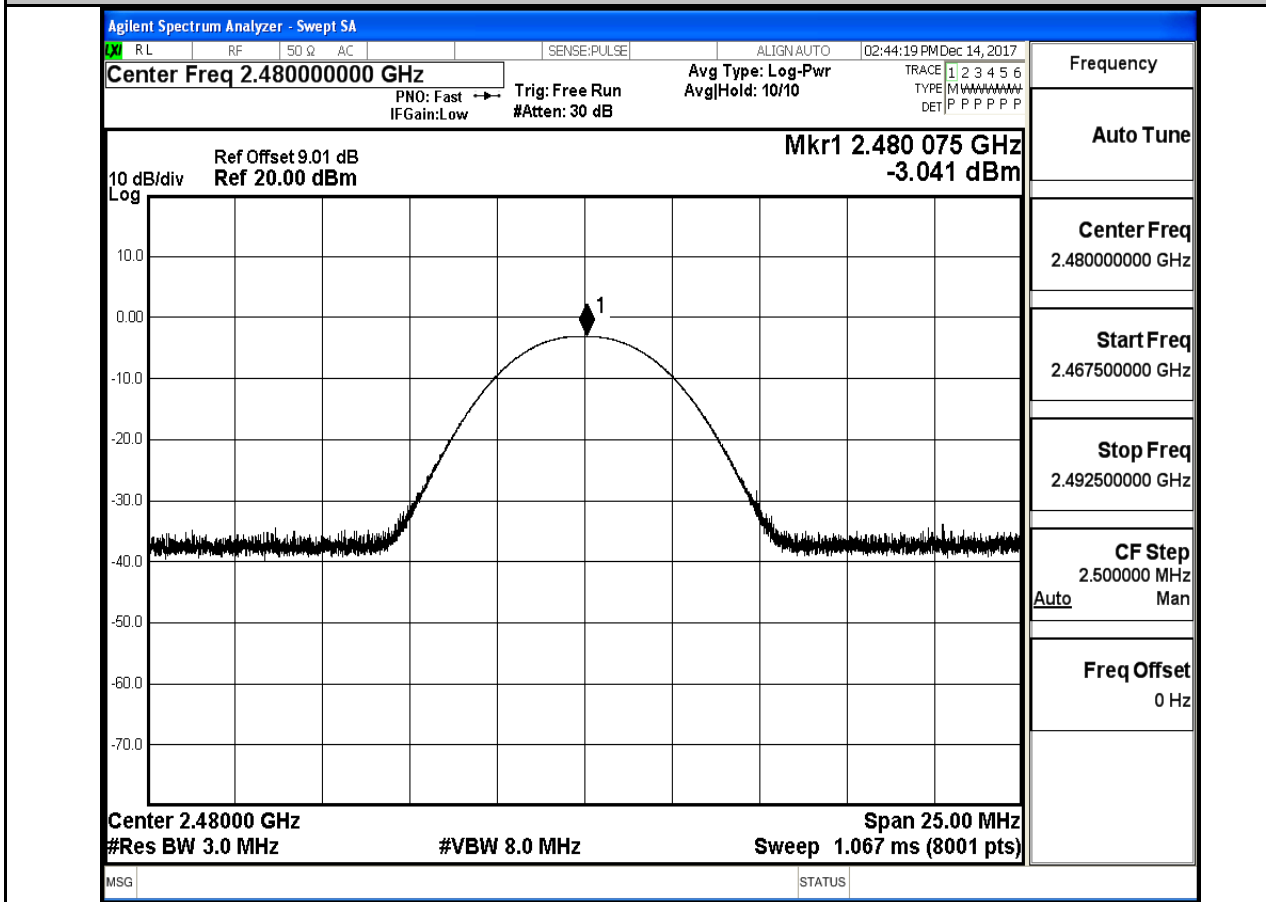


4. Maximum Peak power spectral density

| Test Mode | Test Channel | Ant | PSD[dBm/3KHz] | Limit[dBm/3KHz] | Verdict |
|-----------|--------------|------|---------------|-----------------|---------|
| BLE | 2402 | Ant1 | -18.582 | 8.00 | PASS |
| BLE | 2440 | Ant1 | -18.601 | 8.00 | PASS |
| BLE | 2480 | Ant1 | -18.618 | 8.00 | PASS |


Maximum Peak power spectral density_BLE_2402_Ant1

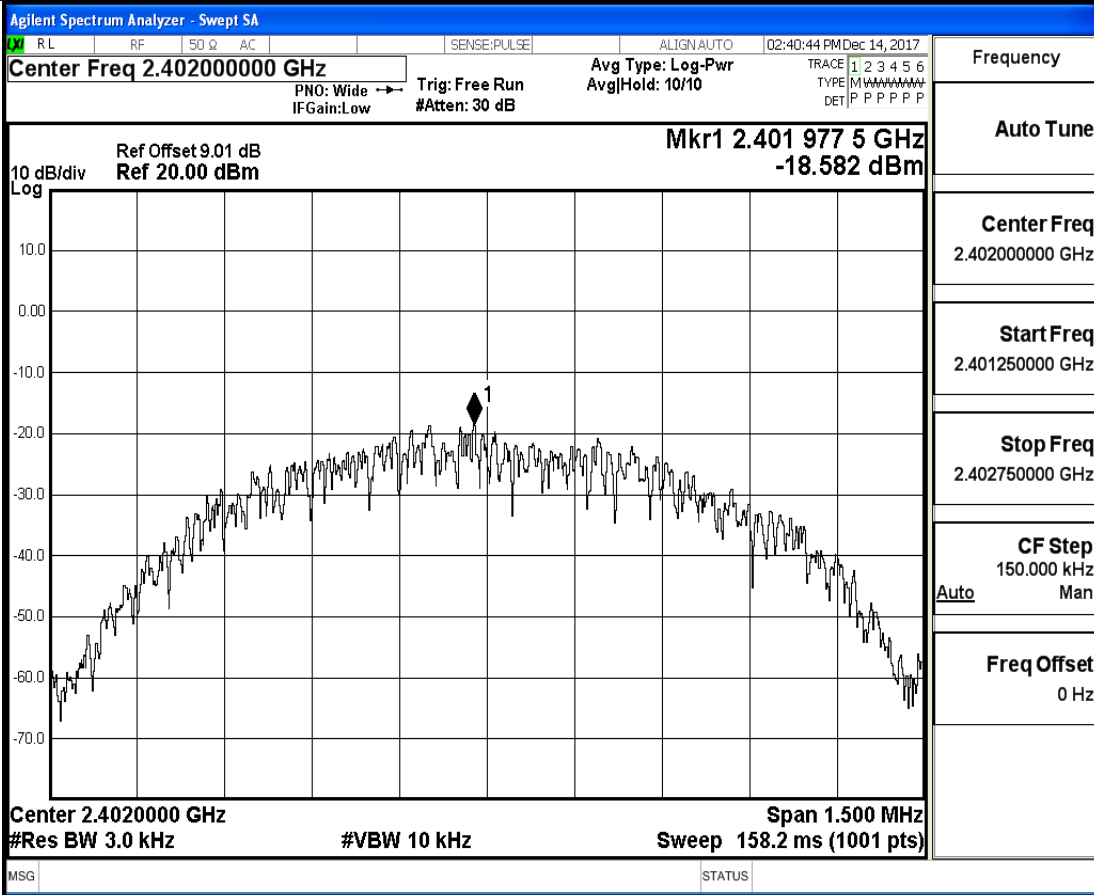

Maximum Peak power spectral density_BLE_2440_Ant1

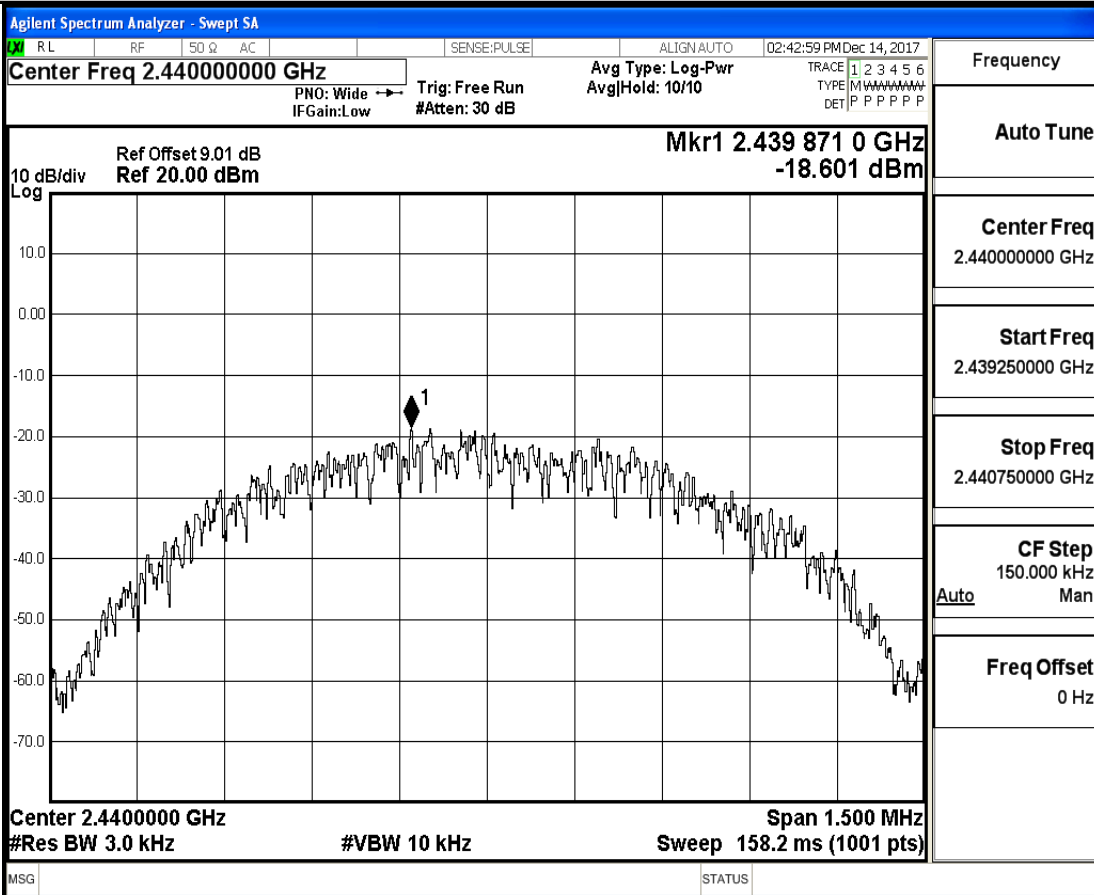


Maximum Peak power spectral density_BLE_2480_Ant1

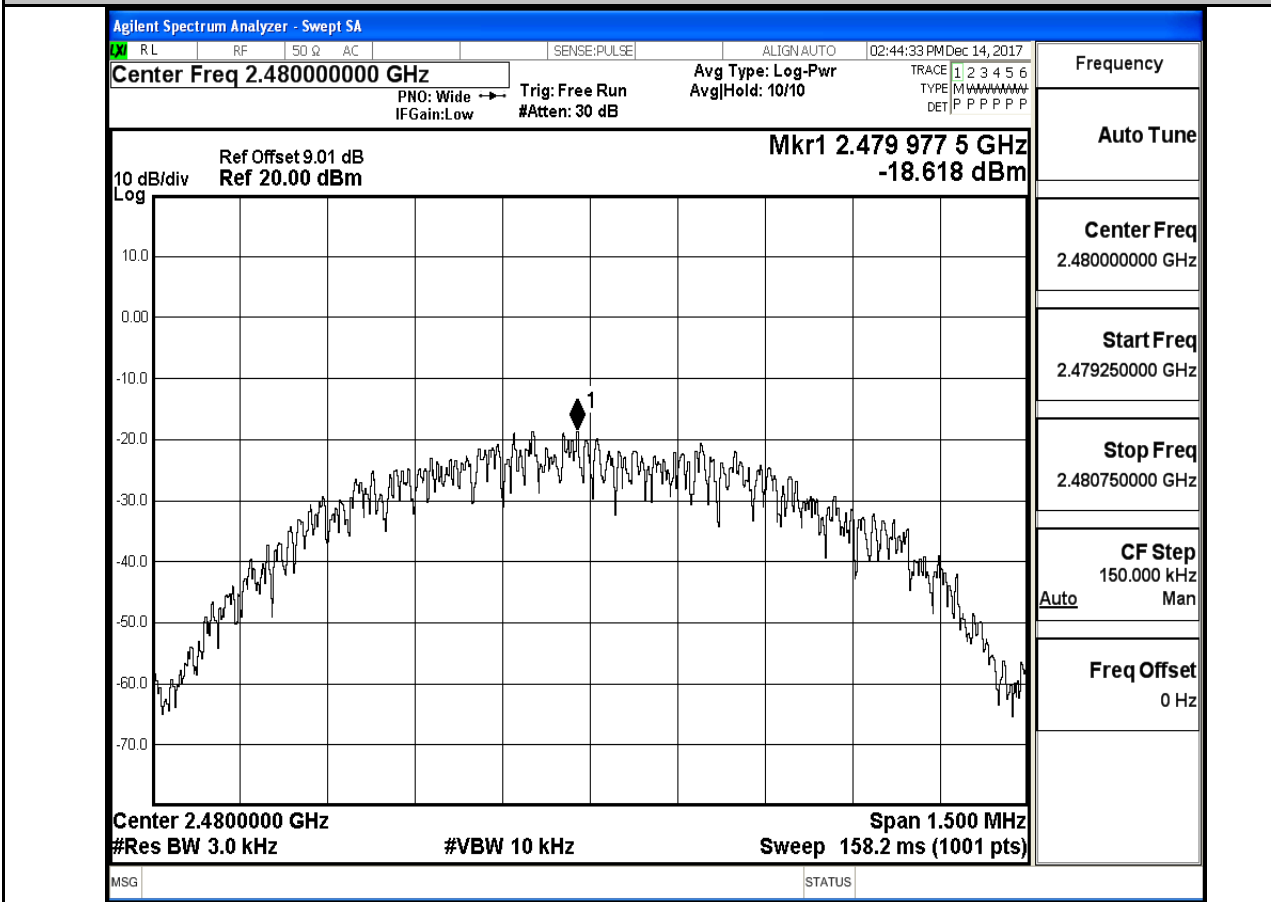


5.Band-edge for RF Conducted Emissions

| Test Mode | Test Channel | Ant | Carrier Power[dBm] | Max. Spurious Level [dBm] | Limit [dBm] | Verdict |
|-----------|--------------|------|--------------------|---------------------------|-------------|---------|
| BLE | 2402 | Ant1 | -3.888 | -49.237 | -23.89 | PASS |
| BLE | 2480 | Ant1 | -3.964 | -48.886 | -23.96 | PASS |

Band-edge for RF Conducted Emissions_BLE_2402_Ant1

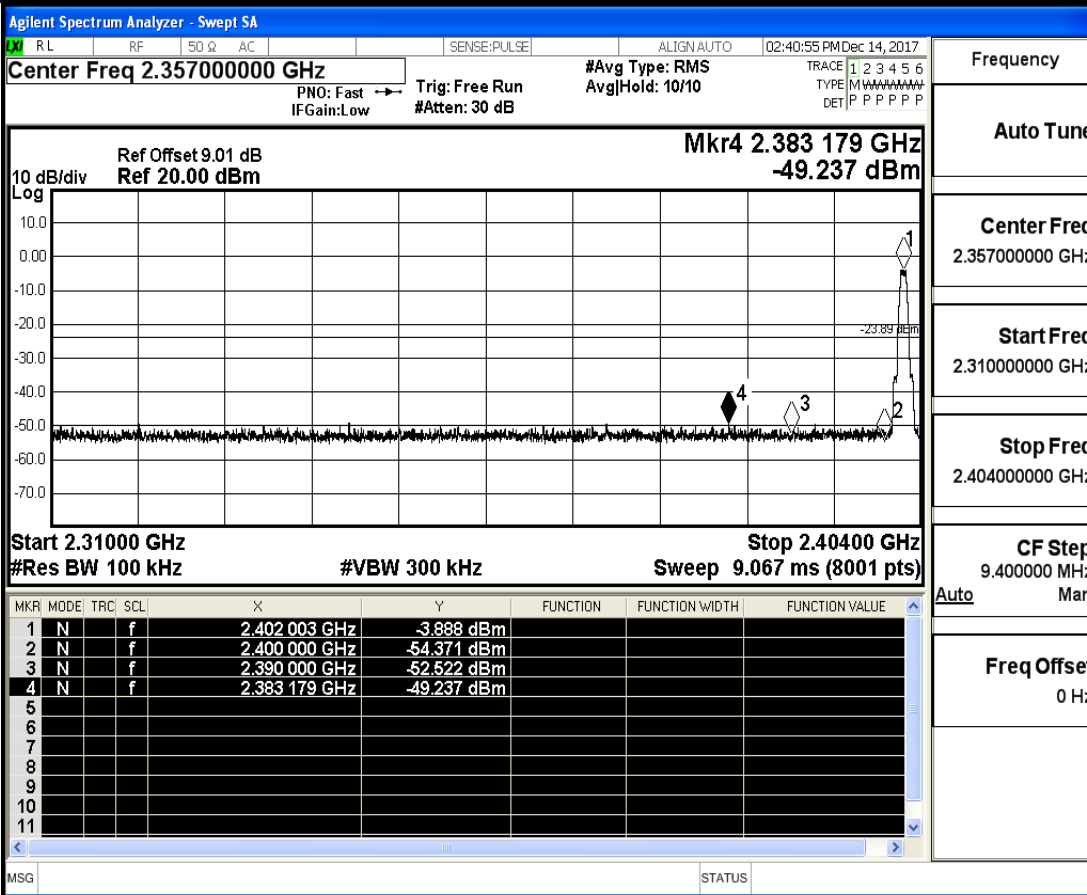



Band-edge for RF Conducted Emissions_BLE_2480_Ant1

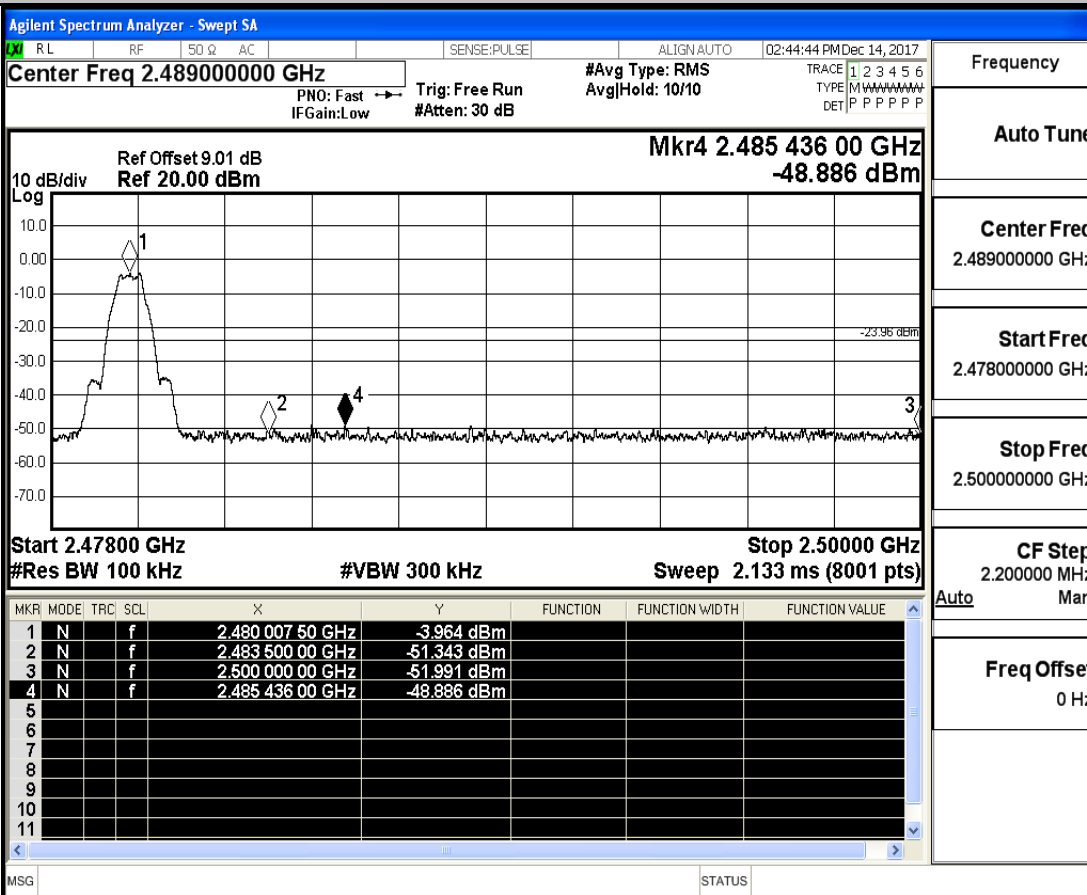



6.RF Conducted Spurious Emissions


| Test Mode | Test Channel | Ant | StartFre [MHz] | StopFre [MHz] | RBW [kHz] | VBW [kHz] | Pref[dBm] | Max. Level [dBm] | Limit [dBm] | Verdict |
|-----------|--------------|------|----------------|---------------|-----------|-----------|-----------|------------------|-------------|---------|
| BLE | 2402 | Ant1 | 30 | 25000 | 100 | 300 | -4.182 | -42.734 | <-24.182 | PASS |
| BLE | 2440 | Ant1 | 30 | 25000 | 100 | 300 | -3.772 | -42.503 | <-23.772 | PASS |
| BLE | 2480 | Ant1 | 30 | 25000 | 100 | 300 | -4.058 | -42.665 | <-24.058 | PASS |

RF Conducted Spurious Emissions_BLE_2402_Ant1

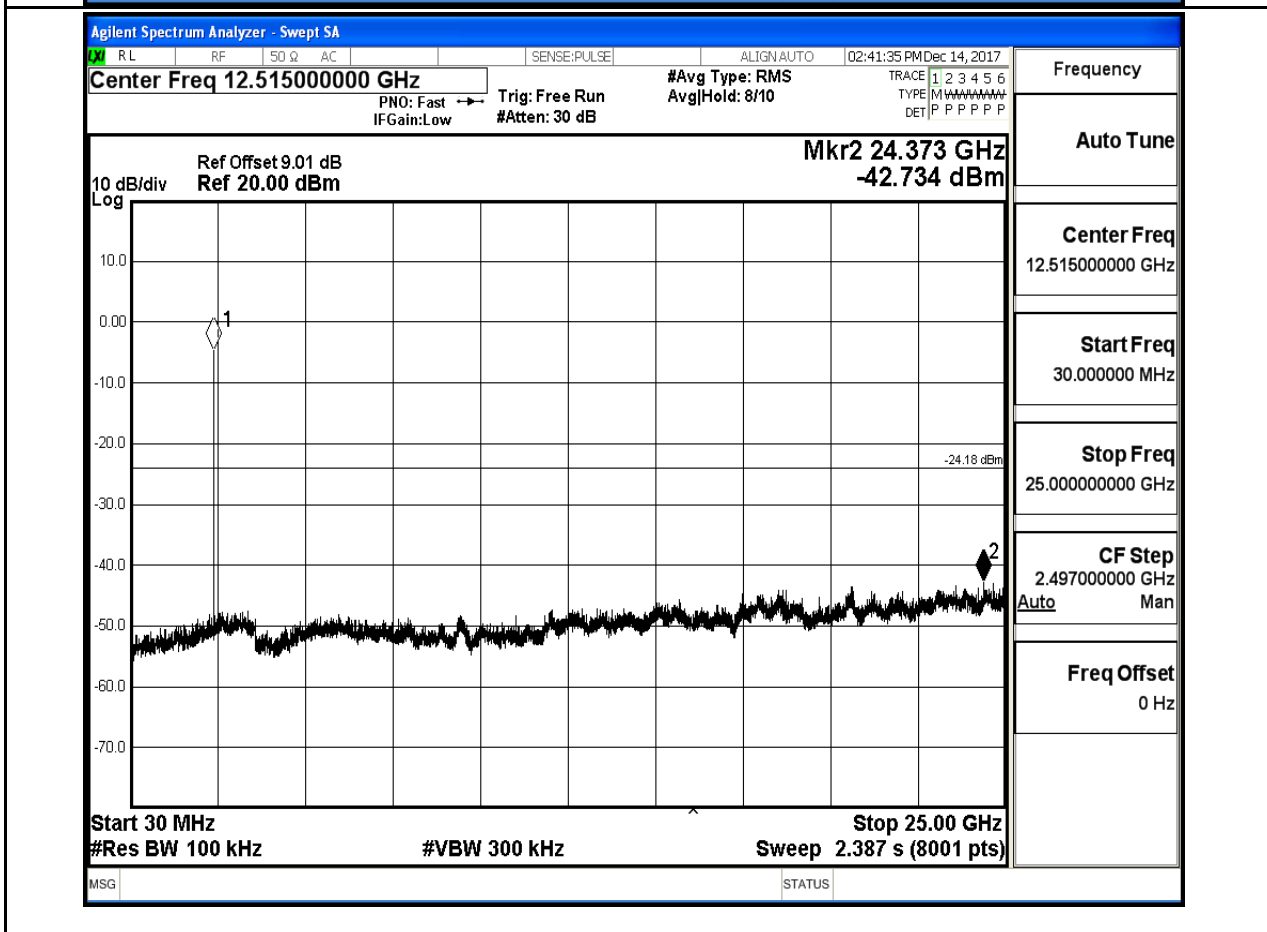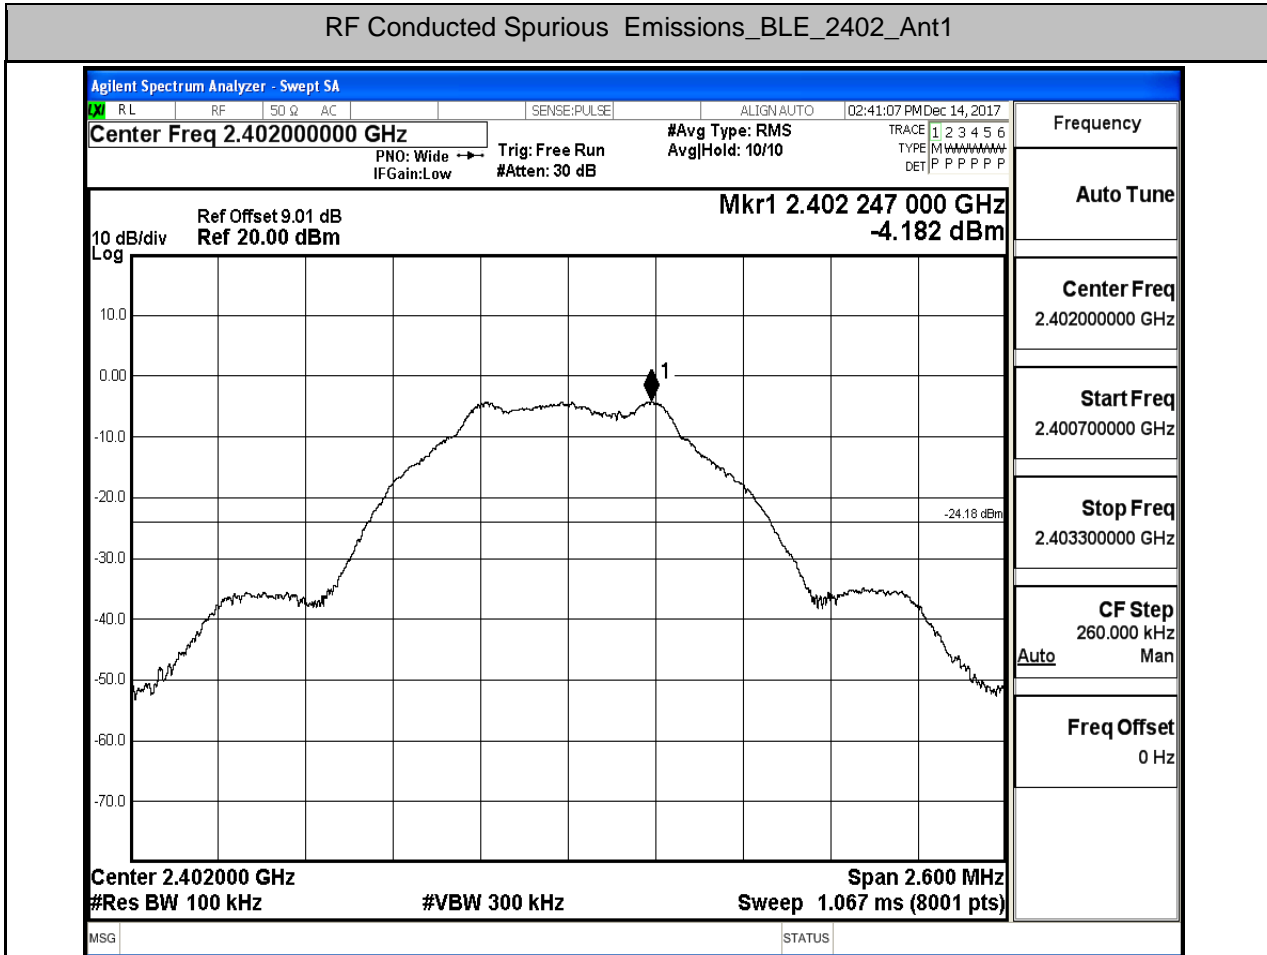

RF Conducted Spurious Emissions_BLE_2440_Ant1

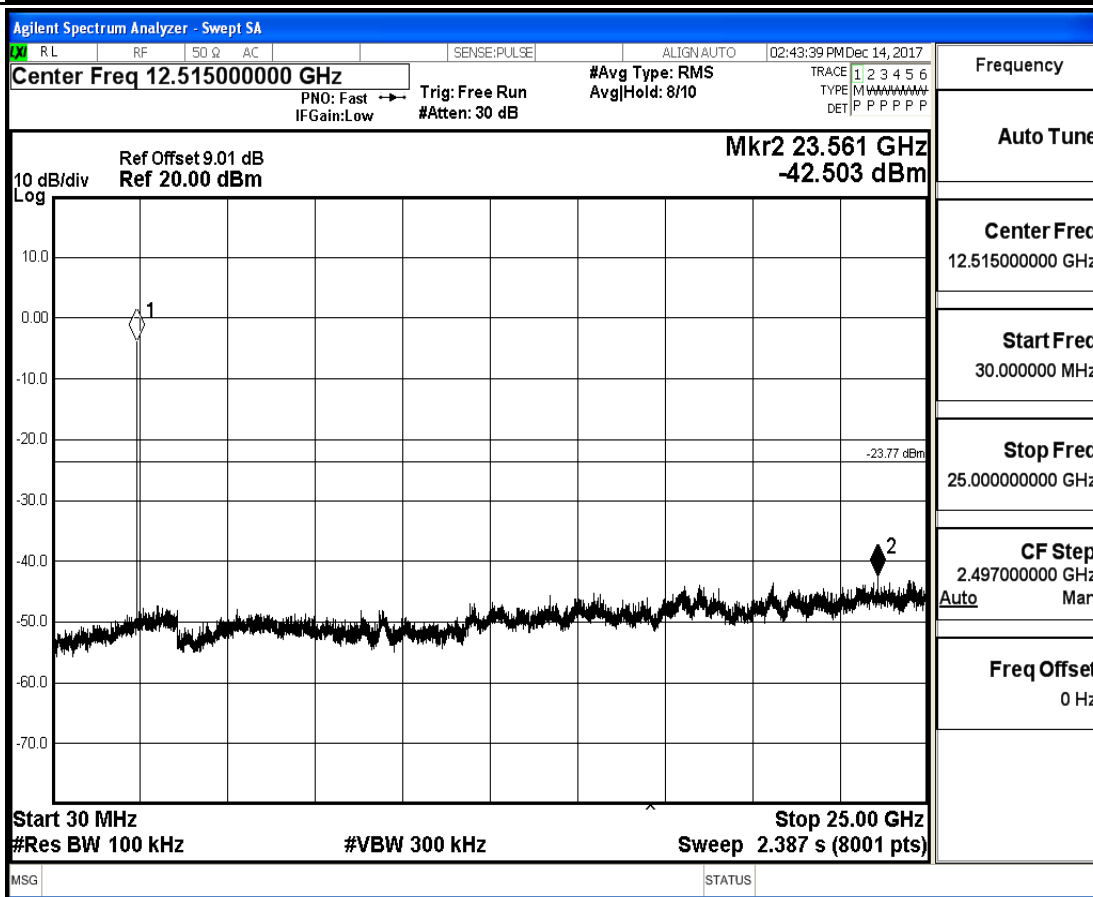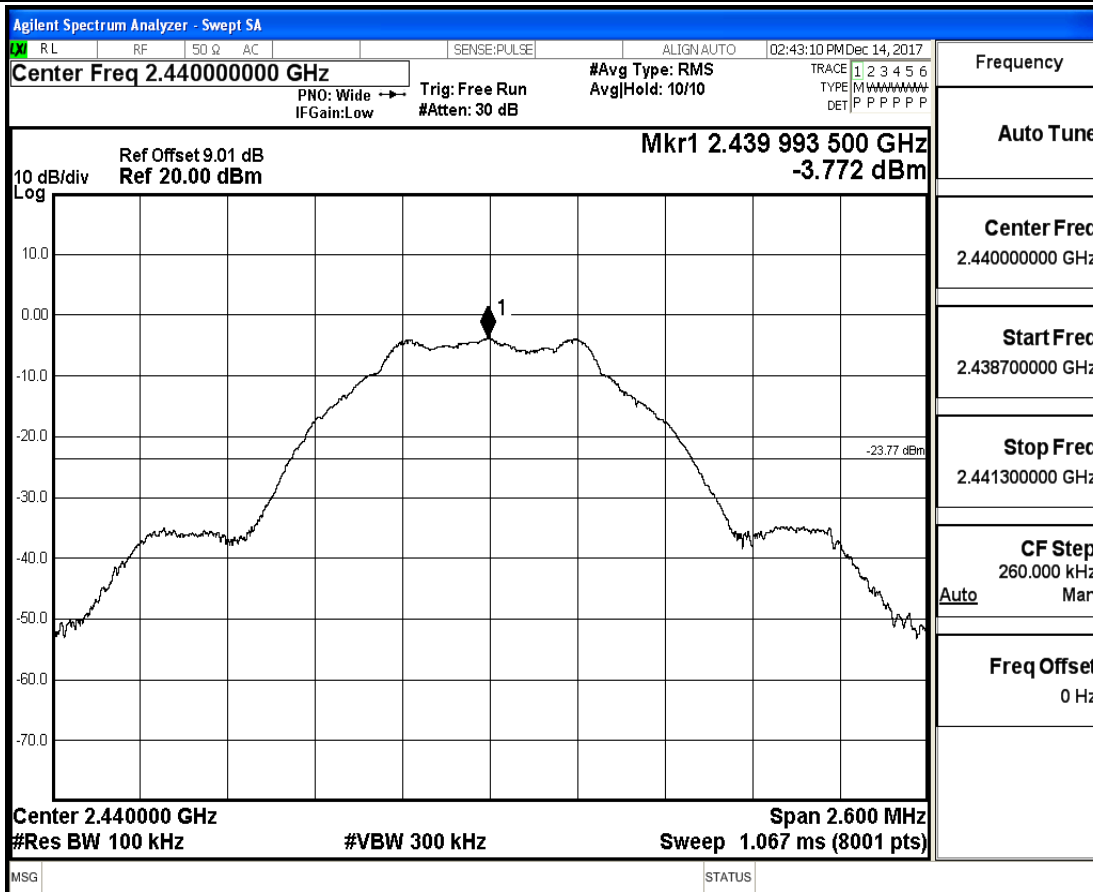


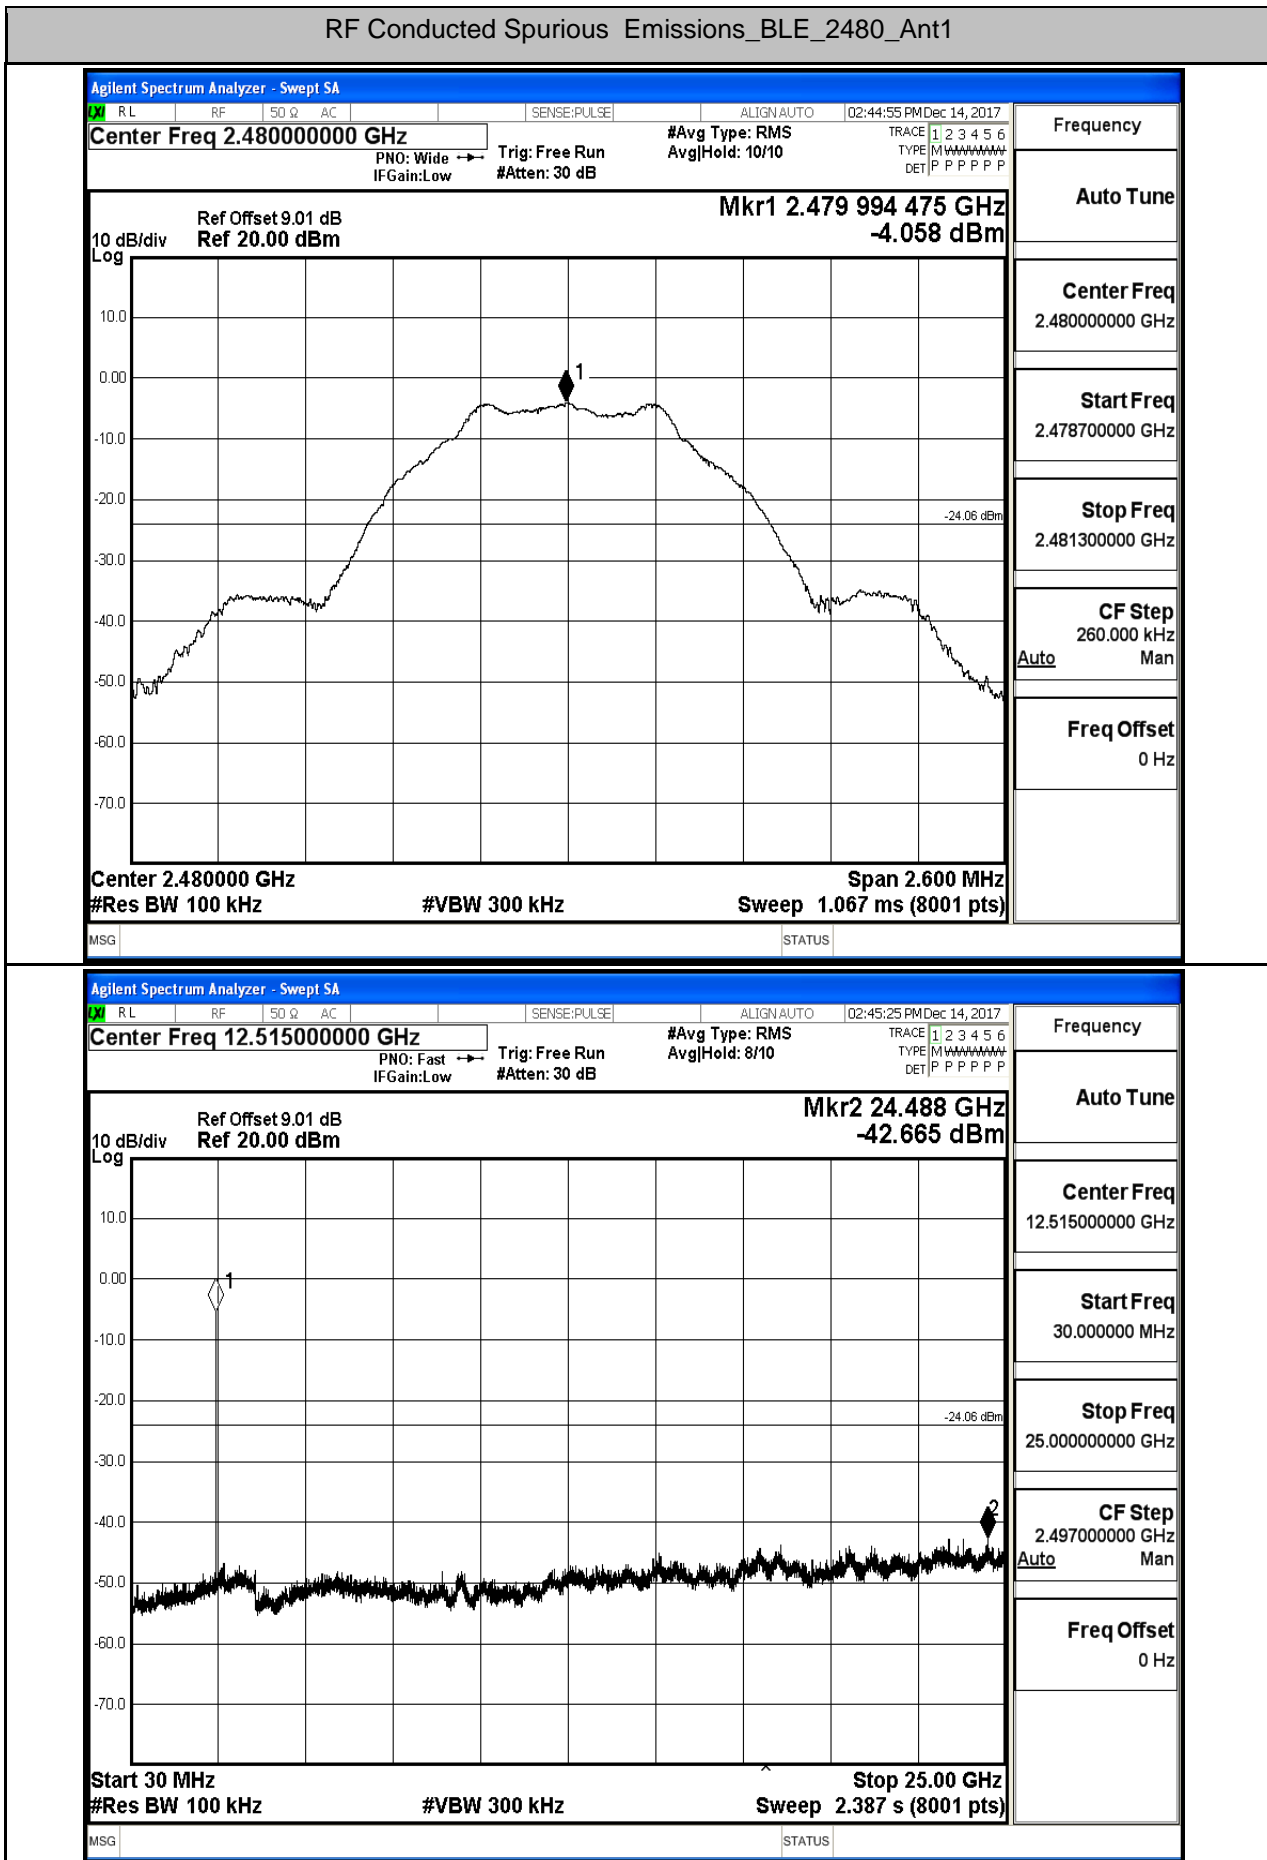


7.Restrict-band band-edge measurements

| Test Mode | Test Channel | Ant | Freq. | Power [dBm] | Gain | Ground Factor | E [dBuV/m] | Detector | Limit [dBuV/m] | Verdict |
|-----------|--------------|------|--------|-------------|------|---------------|------------|----------|----------------|---------|
| BLE | 2402 | Ant1 | 2310.0 | -42.81 | 2 | 0 | 54.44 | PEAK | 74 | PASS |
| BLE | 2402 | Ant1 | 2310.0 | -53.19 | 2 | 0 | 44.07 | AV | 54 | PASS |
| BLE | 2402 | Ant1 | 2390.0 | -42.64 | 2 | 0 | 54.62 | PEAK | 74 | PASS |
| BLE | 2402 | Ant1 | 2390.0 | -52.92 | 2 | 0 | 44.33 | AV | 54 | PASS |
| BLE | 2480 | Ant1 | 2483.5 | -42.32 | 2 | 0 | 54.93 | PEAK | 74 | PASS |
| BLE | 2480 | Ant1 | 2483.5 | -52.72 | 2 | 0 | 44.54 | AV | 54 | PASS |
| BLE | 2480 | Ant1 | 2500.0 | -41.99 | 2 | 0 | 55.27 | PEAK | 74 | PASS |
| BLE | 2480 | Ant1 | 2500.0 | -52.58 | 2 | 0 | 44.68 | AV | 54 | PASS |

Restrict-band band-edge measurements_BLE_2480_Ant1_PEAK

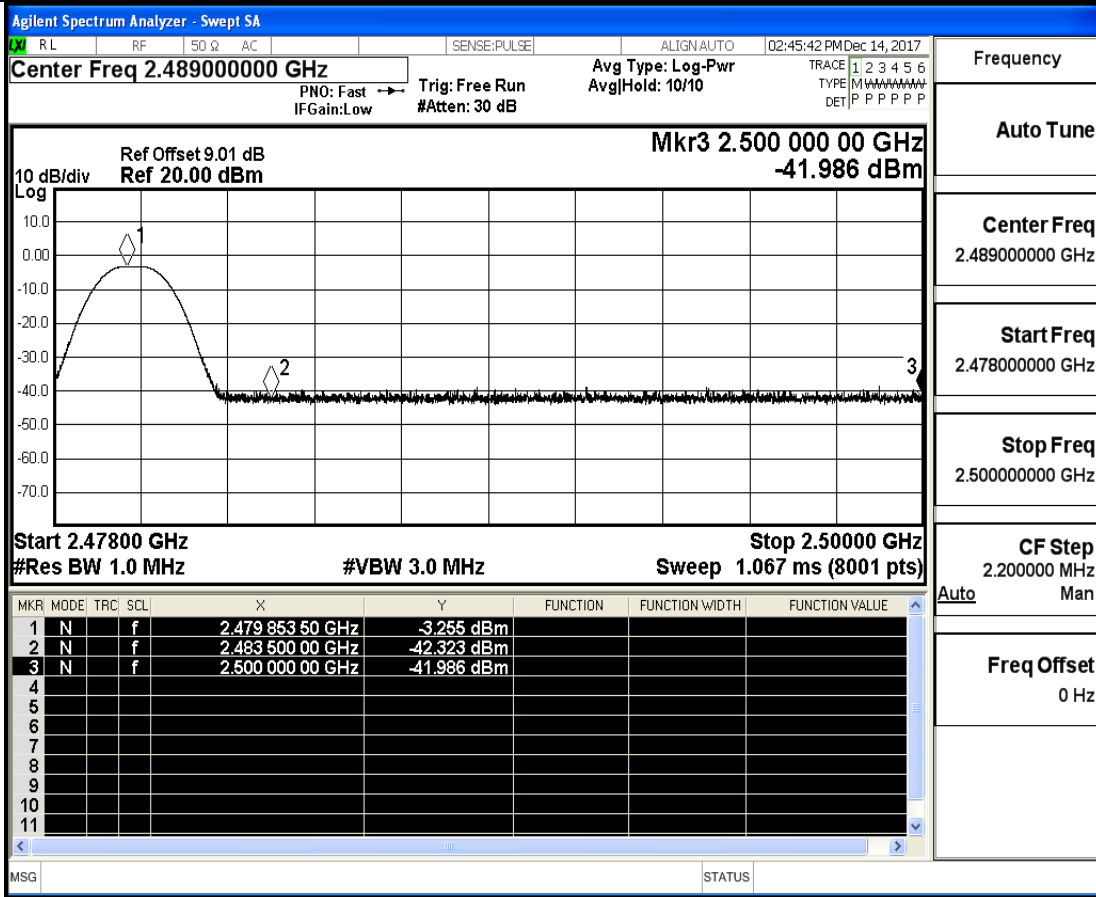

Restrict-band band-edge measurements_BLE_2480_Ant1_AV

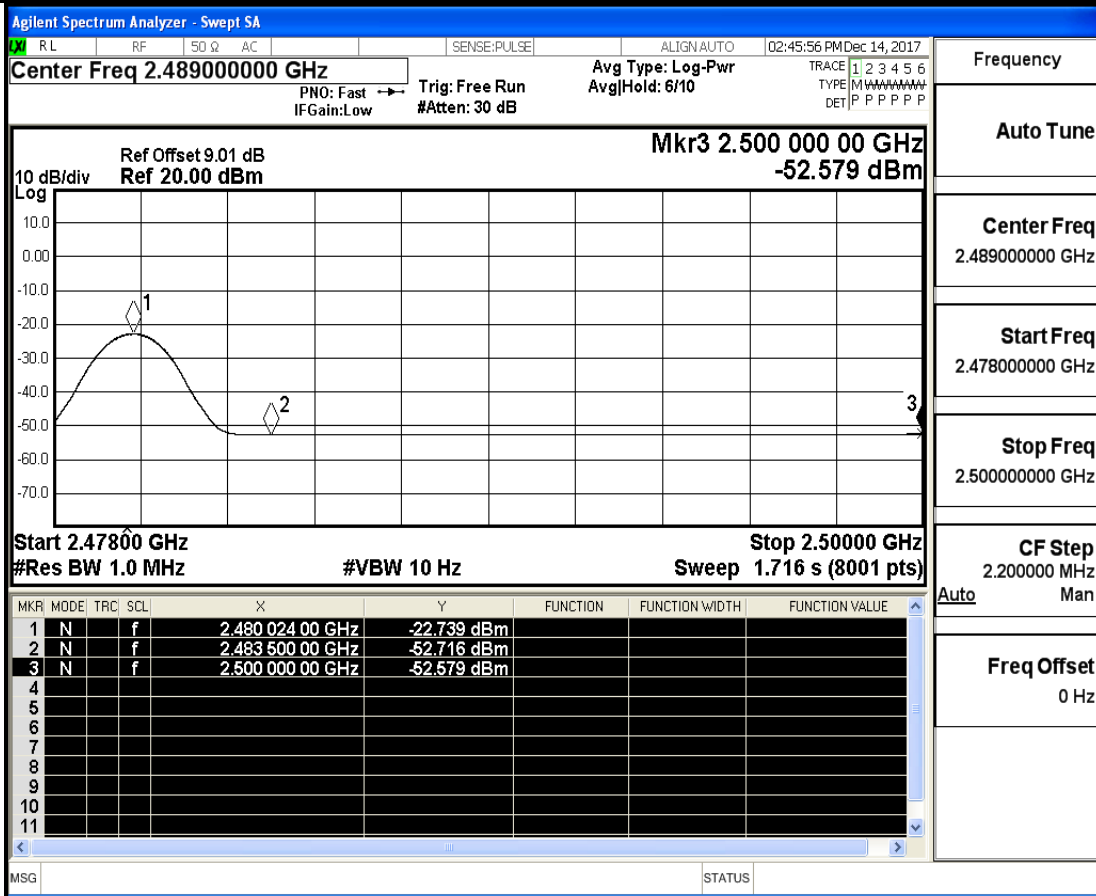

8.Duty Cycle

| Test Mode | Test Channel | Ant | Duty Cycle[%] | Verdict |
|-----------|--------------|------|---------------|---------|
| BLE | 2440 | Ant1 | 100 | PASS |

