



# TEST REPORT

**Report Reference No.**..... : **TRE1711010101** R/C.....: 45093

**FCC ID**..... : **2ANVW-MA-2005**

**Applicant's name**..... : **Zeeva Electronics Private Limited**

Address..... : Unit 901-902, 9th Fl, Trade World 'C' Wing, Kamala City, Senapati Bapat Marg, Lower Parel (West), Mumbai 400-013

Manufacturer..... : Wisort Technology Ltd.

Address..... : 6F Tower A2, Xinyuan Industrial, Gushu, Baoan, Shenzhen 518126 China

**Test item description** ..... : **BT SPEAKER**

Trade Mark ..... : -

Model/Type reference..... : MA-2005

Listed Model(s) ..... : -

**Standard** ..... : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample..... : Oct. 17, 2017

Date of testing..... : Oct. 17, 2017 - Oct. 27, 2017

Date of issue..... : Nov. 17, 2017

**Result**..... : **PASS**

Compiled by  
( Position+Printed name+Signature): File administrators Becky Liang

Supervised by  
(Position+Printed name+Signature): Project Engineer Jerry Wang

Approved by  
(Position+Printed name+Signature): RF Manager Hans Hu

**Testing Laboratory Name** ..... : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

*The test report merely correspond to the test sample.*

## Contents

<b>1.</b>	<b><u>TEST STANDARDS AND REPORT VERSION</u></b>	<b>3</b>
1.1.	Test Standards	3
1.2.	Report version	3
<b>2.</b>	<b><u>TEST DESCRIPTION</u></b>	<b>4</b>
<b>3.</b>	<b><u>SUMMARY</u></b>	<b>5</b>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<b>4.</b>	<b><u>TEST ENVIRONMENT</u></b>	<b>7</b>
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
<b>5.</b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b>10</b>
5.1.	Antenna requirement	10
5.2.	Conducted Emissions (AC Main)	11
5.3.	Conducted Peak Output Power	14
5.4.	20 dB Bandwidth	18
5.5.	Carrier Frequencies Separation	22
5.6.	Hopping Channel Number	24
5.7.	Dwell Time	26
5.8.	Pseudorandom Frequency Hopping Sequence	33
5.9.	Restricted band (radiated)	34
5.10.	Band edge and Spurious Emissions (conducted)	36
5.11.	Spurious Emissions (radiated)	56
<b>6.</b>	<b><u>TEST SETUP PHOTOS</u></b>	<b>60</b>
<b>7.</b>	<b><u>EXTERANAL AND INTERNAL PHOTOS</u></b>	<b>62</b>

## 1. TEST STANDARDS AND REPORT VERSION

### 1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

### 1.2. Report version

Version No.	Date of issue	Description
00	Nov. 17, 2017	Original

## **2. TEST DESCRIPTION**

<b>Test Item</b>	<b>Section in CFR 47</b>	<b>Result</b>	<b>Test Engineer</b>
Antenna Requirement	15.203/15.247 (c)	Pass	William Wang
AC Power Line Conducted Emissions	15.207	Pass	William Wang
Conducted Peak Output Power	15.247 (b)(1)	Pass	William Wang
20 dB Bandwidth	15.247 (a)(1)	Pass	William Wang
Carrier Frequencies Separation	15.247 (a)(1)	Pass	William Wang
Hopping Channel Number	15.247 (a)(1)	Pass	William Wang
Dwell Time	15.247 (a)(1)	Pass	William Wang
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	Pass	William Wang
Restricted band	15.247(d)/15.205	Pass	William Wang
Radiated Emissions	15.247(d)/15.209	Pass	William Wang

Note: The measurement uncertainty is not included in the test result.

### 3. SUMMARY

#### 3.1. Client Information

Applicant:	Zeeva Electronics Private Limited
Address:	Unit 901-902, 9th Fl, Trade World 'C' Wing, Kamala City, Senapati Bapat Marg, Lower Parel (West), Mumbai 400-013
Manufacturer:	Wisort Technology Ltd.
Address:	6F Tower A2, Xinyuan Industrial, Gushu, Baoan, Shenzhen 518126 China

#### 3.2. Product Description

Name of EUT:	BT SPEAKER
Trade Mark:	-
Model No.:	MA-2005
Listed Model(s):	-
Power supply:	DC 5V for USB port & DC 3.7V for internal battery
Adapter information:	-
Hardware version:	1.0
Software version:	2.1(MA2005-2AB4)
<b>Bluetooth-EDR</b>	
Version:	Supported BT4.2+HS
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	Integral Antenna
Antenna gain:	0dBi

### 3.3. Operation state

#### ➤ Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
39	2441
⋮	⋮
77	2479
78	2480

#### ➤ TEST MODE

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated suprious emissions test item:
The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data recorded in the report.

### 3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○	PC	Manufacturer:	TOSHIBA
		Model:	Satellite M800
●	USB Cable	Manufacturer:	Zeeva Electronics Private Limited
		Model No.:	MA-2005

### 3.5. Modifications

No modifications were implemented to meet testing criteria.

## **4. TEST ENVIRONMENT**

### **4.1. Address of the test laboratory**

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

### **4.2. Test Facility**

#### **CNAS-Lab Code: L1225**

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

#### **A2LA-Lab Cert. No.: 3902.01**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### **FCC-Registration No.: 762235**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

#### **IC-Registration No.:5377B-1**

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B-1.

#### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

### 4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

### 4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.39 dB	(1)
Radiated Emissions 30~1000MHz	4.24 dB	(1)
Radiated Emissions 1~18GHz	5.16 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .



#### 4.5. Equipments Used during the Test

Conducted Emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	2016/11/13
2	EMI Test Receiver	Rohde&Schwarz	ESCI3	100038	2016/11/13
3	Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	2016/11/13
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	-	-

Radiated Emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI test receiver	Rohde&Schwarz	ESI 26	100009	2016/11/13
2	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	2016/11/13
3	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2016/11/13
4	Horn antenna	ShwarzBeck	9120D	1011	2016/11/13
5	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2016/11/13
6	Amplifier	Sonoma	310N	E009-13	2016/11/13
7	JS Amplifier	Rohde&Schwarz	JS4-00101800-28-5A	F201504	2016/11/13
8	Amplifier	Compliance Direction systems	PAP1-4060	120	2016/11/13
9	High pass filter	Compliance Direction systems	BSU-6	34202	2016/11/13
10	EMI test Software	Rohde&Schwarz	ESK1	-	-
11	EMI test Software	Audix	E3	-	-
12	TURNTABLE	MATURO	TT2.0	-	-
13	ANTENNA MAST	MATURO	TAM-4.0-P	-	-

RF Conducted methods					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Spectrum Analyzer	Rohde&Schwarz	FSP	1164.4391.40	2016/11/13
2	MXA Signal Analyzer	Agilent Technologies	N9020A	MY5050187	2016/11/13

The Cal.Interval was one year.

## 5. TEST CONDITIONS AND RESULTS

### 5.1. Antenna requirement

#### Requirement

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


##### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):**

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

#### Test Result:

**Passed**       **Not Applicable**

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.

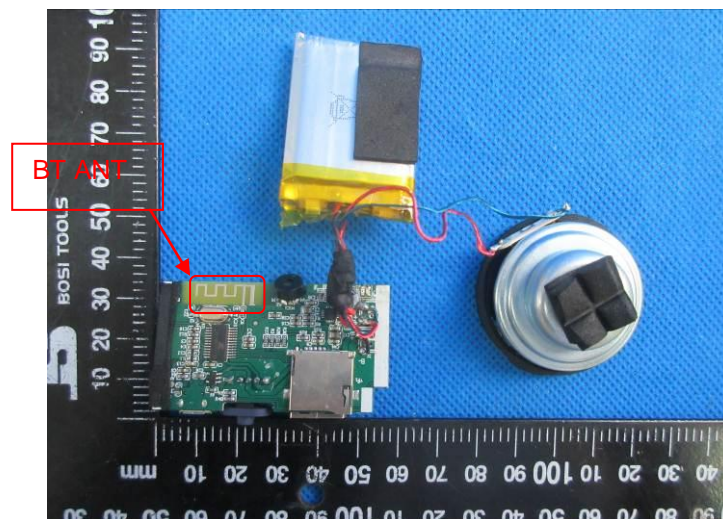

## 5.2. Conducted Emissions (AC Main)


### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### TEST CONFIGURATION

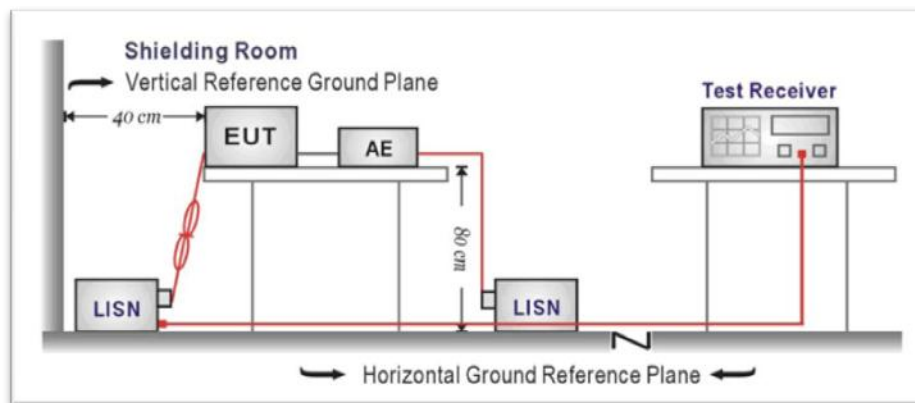

### TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

### TEST RESULTS


Passed       Not Applicable

Note:

- 1) Transd= Cable lose + Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit - Level

Test Line:

L

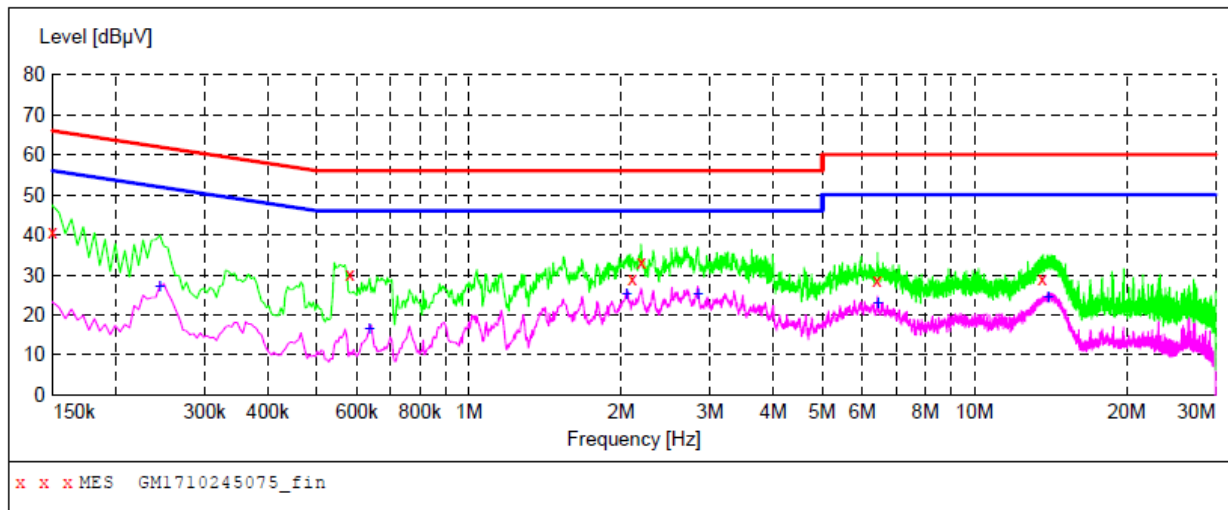


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	40.80	10.4	66	25.2	QP	L1	GND
0.582000	30.30	10.2	56	25.7	QP	L1	GND
2.107500	29.00	10.2	56	27.0	QP	L1	GND
2.193000	33.20	10.2	56	22.8	QP	L1	GND
6.423000	28.60	10.3	60	31.4	QP	L1	GND
13.645500	29.00	10.5	60	31.0	QP	L1	GND

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.244500	27.00	10.3	52	24.9	AV	L1	GND
0.636000	16.60	10.2	46	29.4	AV	L1	GND
2.049000	25.10	10.2	46	20.9	AV	L1	GND
2.836500	25.40	10.2	46	20.6	AV	L1	GND
6.436500	23.10	10.3	50	26.9	AV	L1	GND
13.996500	24.60	10.5	50	25.4	AV	L1	GND

Test Line:

N

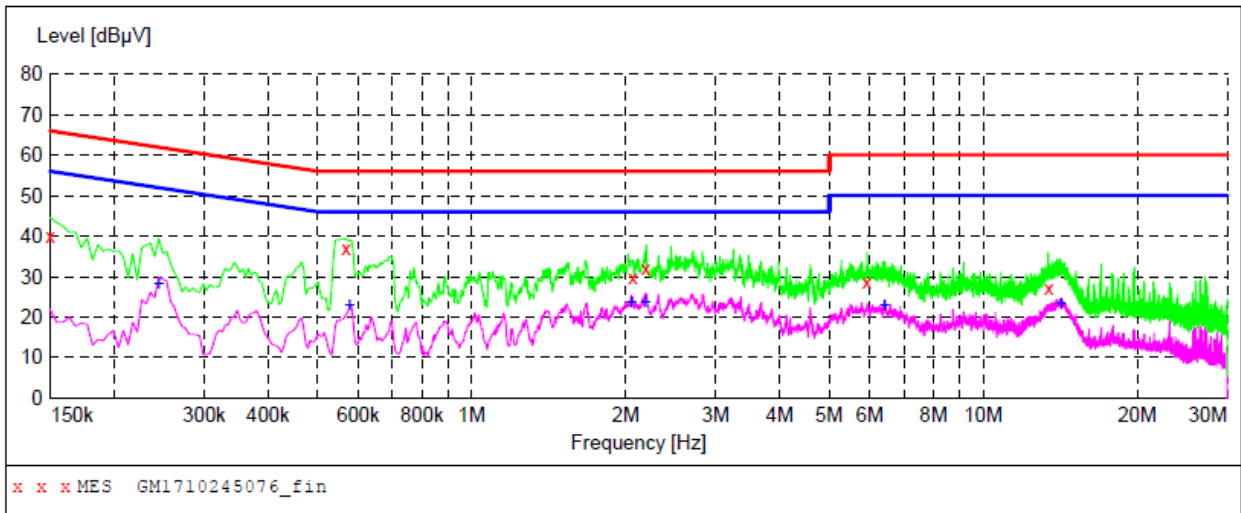

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	40.10	10.4	66	25.9	QP	N	GND
0.568500	36.80	10.2	56	19.2	QP	N	GND
2.067000	29.70	10.2	56	26.3	QP	N	GND
2.188500	32.20	10.2	56	23.8	QP	N	GND
5.932500	28.50	10.3	60	31.5	QP	N	GND
13.429500	27.20	10.5	60	32.8	QP	N	GND


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.244500	28.20	10.3	52	23.7	AV	N	GND
0.577500	23.20	10.2	46	22.8	AV	N	GND
2.053500	23.90	10.2	46	22.1	AV	N	GND
2.188500	23.80	10.2	46	22.2	AV	N	GND
6.414000	22.90	10.3	50	27.1	AV	N	GND
14.190000	23.50	10.5	50	26.5	AV	N	GND

### 5.3. Conducted Peak Output Power

#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

#### TEST CONFIGURATION

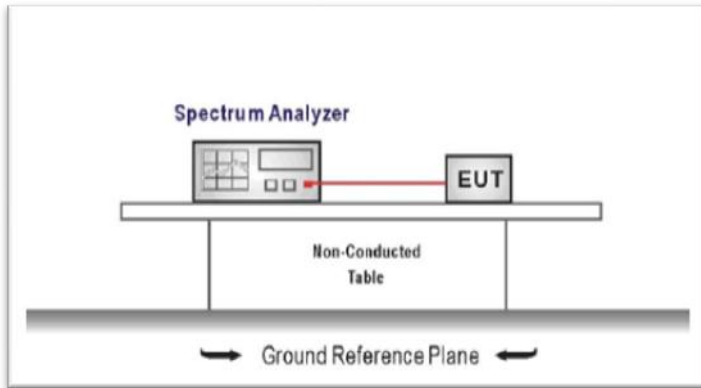

#### TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the pathloss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
 Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  
 RBW ≥ the 20 dB bandwidth of the emission being measured, VBW ≥ RBW  
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.



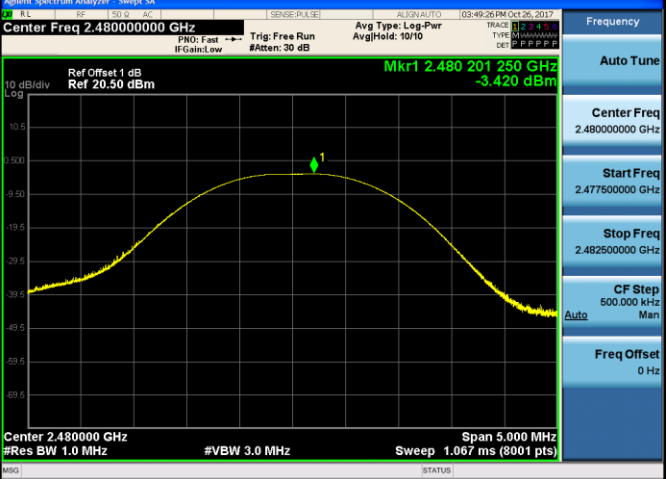
#### TEST MODE:




Please refer to the clause 3.3

#### TEST RESULTS

Passed       Not Applicable

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	-3.706	≤ 30.00	Pass
	39	-3.332		
	78	-3.420		
π/4DQPSK	00	-4.826	≤ 21.00	Pass
	39	-4.541		
	78	-4.510		
8DPSK	00	-4.812	≤ 21.00	Pass
	39	-4.496		
	78	-4.497		

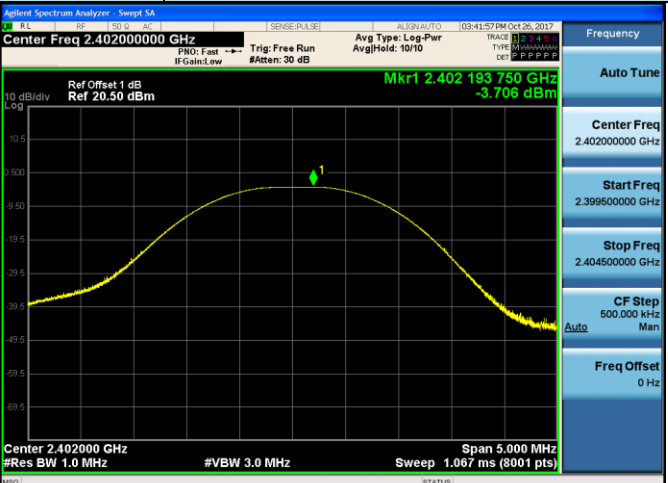Modulation Type:		GFSK	
CH00		<p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.40200000 GHz</p> <p>Mkr1 2.402 193 750 GHz -3.706 dBm</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.399500000 GHz</p> <p>Stop Freq 2.404500000 GHz</p> <p>CF Step 500.000 kHz</p> <p>Freq Offset 0 Hz</p>	
CH39		<p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.441000000 GHz</p> <p>Mkr1 2.441 191 250 GHz -3.332 dBm</p> <p>Center Freq 2.4410000 GHz</p> <p>Start Freq 2.438500000 GHz</p> <p>Stop Freq 2.443500000 GHz</p> <p>CF Step 500.000 kHz</p> <p>Freq Offset 0 Hz</p>	
CH78		<p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.480000000 GHz</p> <p>Mkr1 2.480 201 250 GHz -3.420 dBm</p> <p>Center Freq 2.480000000 GHz</p> <p>Start Freq 2.477500000 GHz</p> <p>Stop Freq 2.482500000 GHz</p> <p>CF Step 500.000 kHz</p> <p>Freq Offset 0 Hz</p>	

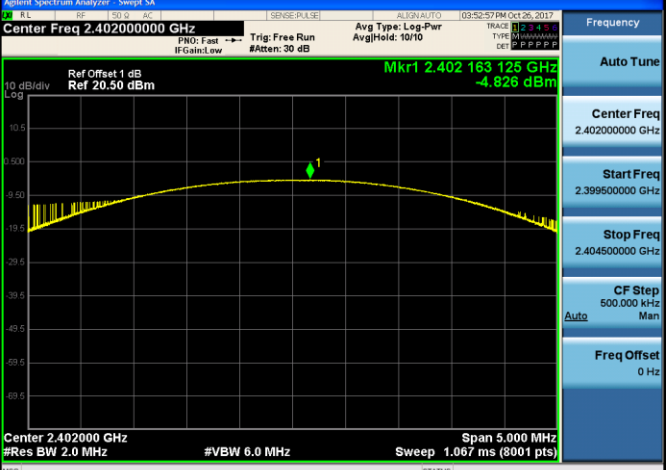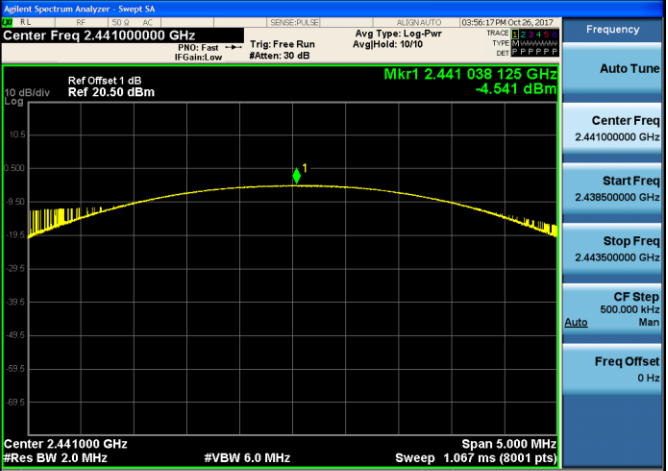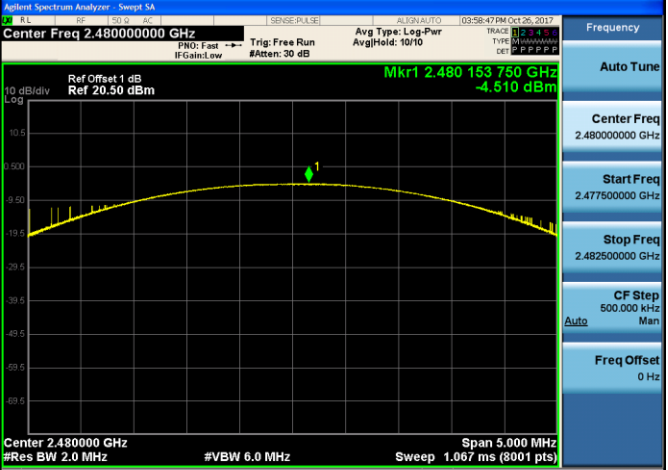Modulation Type:		$\pi/4$ DQPSK
<p>CH00</p>		
<p>CH39</p>		
<p>CH78</p>		




Modulation Type:		8DPSK
CH00		<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.40200000 GHz</p> <p>Ref Offset 1 dB Ref 20.50 dBm</p> <p>Mkr1 2.402151250 GHz -4.812 dBm</p> <p>Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Sweep 1.067 ms (8001 pts)</p> <p>Span 5.000 MHz</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.399500000 GHz</p> <p>Stop Freq 2.404500000 GHz</p> <p>CF Step 500.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
CH39		<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.441000000 GHz</p> <p>Ref Offset 1 dB Ref 20.50 dBm</p> <p>Mkr1 2.441039375 GHz -4.496 dBm</p> <p>Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Sweep 1.067 ms (8001 pts)</p> <p>Span 5.000 MHz</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.441000000 GHz</p> <p>Start Freq 2.438500000 GHz</p> <p>Stop Freq 2.443500000 GHz</p> <p>CF Step 500.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
CH78		<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 1 dB Ref 20.50 dBm</p> <p>Mkr1 2.480175625 GHz -4.497 dBm</p> <p>Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Sweep 1.067 ms (8001 pts)</p> <p>Span 5.000 MHz</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.480000000 GHz</p> <p>Start Freq 2.477500000 GHz</p> <p>Stop Freq 2.482500000 GHz</p> <p>CF Step 500.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>

## 5.4. 20 dB Bandwidth

### LIMIT

N/A

### TEST CONFIGURATION

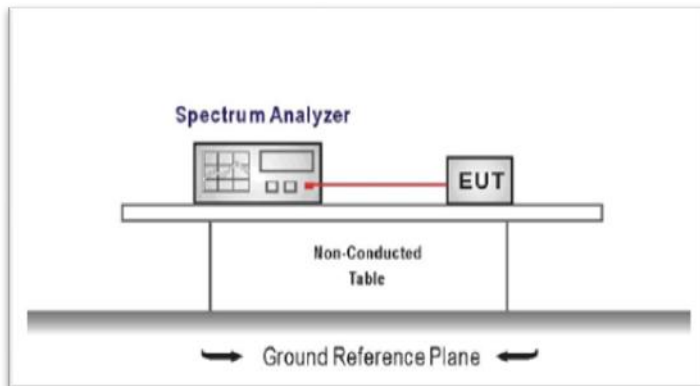

### TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  
RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  RBW  
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

### TEST MODE:

Please refer to the clause 3.3

### TEST RESULTS

 Passed       Not Applicable

Modulation type	Channel	20 dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK	00	0.8790	-	Pass
	39	0.8812		
	78	0.8795		
$\pi/4$ DQPSK	00	1.282	-	Pass
	39	1.282		
	78	1.283		
8DPSK	00	1.281	-	Pass
	39	1.283		
	78	1.283		

Modulation Type:		GFSK	
<p>CH00</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 1/1</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 1 dB</p> <p>Ref 10.50 dBm</p> <p>Mkr1 2.40202 GHz</p> <p>-8.2286 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 10 kHz</p> <p>#VBW 30 kHz</p> <p>Span 2 MHz</p> <p>Sweep 19.13 ms</p> <p>Occupied Bandwidth 838.76 kHz</p> <p>Total Power 2.83 dBm</p> <p>Transmit Freq Error 26.131 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 879.0 kHz</p> <p>x dB -20.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.40200000 GHz</p> <p>CF Step 200.000 kHz</p> <p>Freq Offset 0 Hz</p>	
<p>CH39</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44100000 GHz</p> <p>Center Freq: 2.44100000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 1/1</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 1 dB</p> <p>Ref 10.50 dBm</p> <p>Mkr1 2.441022 GHz</p> <p>-8.1769 dBm</p> <p>Center 2.441 GHz</p> <p>#Res BW 10 kHz</p> <p>#VBW 30 kHz</p> <p>Span 2 MHz</p> <p>Sweep 19.13 ms</p> <p>Occupied Bandwidth 833.99 kHz</p> <p>Total Power 3.24 dBm</p> <p>Transmit Freq Error 27.261 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 881.2 kHz</p> <p>x dB -20.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.44100000 GHz</p> <p>CF Step 200.000 kHz</p> <p>Freq Offset 0 Hz</p>	
<p>CH78</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Center Freq: 2.48000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 1/1</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 1 dB</p> <p>Ref 10.50 dBm</p> <p>Mkr1 2.480022 GHz</p> <p>-7.9647 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 10 kHz</p> <p>#VBW 30 kHz</p> <p>Span 2 MHz</p> <p>Sweep 19.13 ms</p> <p>Occupied Bandwidth 833.88 kHz</p> <p>Total Power 3.16 dBm</p> <p>Transmit Freq Error 26.818 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 879.5 kHz</p> <p>x dB -20.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.48000000 GHz</p> <p>CF Step 200.000 kHz</p> <p>Freq Offset 0 Hz</p>	

Modulation Type:		$\pi/4$ DQPSK
CH00	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 1/1</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 1 dB</p> <p>Ref 10.50 dBm</p> <p>Mkr1 2.4020175 GHz</p> <p>-8.0533 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 2.5 MHz</p> <p>Sweep 2.667 ms</p> <p>Occupied Bandwidth 1.1805 MHz</p> <p>Total Power 1.04 dBm</p> <p>Transmit Freq Error 20.582 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.282 MHz</p> <p>x dB -20.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.40200000 GHz</p> <p>CF Step 250.000 kHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p>
CH39	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44100000 GHz</p> <p>Center Freq: 2.44100000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 1/1</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 1 dB</p> <p>Ref 10.50 dBm</p> <p>Mkr1 2.4410175 GHz</p> <p>-7.7074 dBm</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 2.5 MHz</p> <p>Sweep 2.667 ms</p> <p>Occupied Bandwidth 1.1797 MHz</p> <p>Total Power 1.43 dBm</p> <p>Transmit Freq Error 21.125 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.282 MHz</p> <p>x dB -20.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.44100000 GHz</p> <p>CF Step 250.000 kHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p>
CH78	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Center Freq: 2.48000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 1/1</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 1 dB</p> <p>Ref 10.50 dBm</p> <p>Mkr1 2.4800175 GHz</p> <p>-7.7675 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 2.5 MHz</p> <p>Sweep 2.667 ms</p> <p>Occupied Bandwidth 1.1798 MHz</p> <p>Total Power 1.29 dBm</p> <p>Transmit Freq Error 20.741 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.283 MHz</p> <p>x dB -20.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.48000000 GHz</p> <p>CF Step 250.000 kHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p>


Modulation Type:		8DPSK
CH00	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 1/1</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 1 dB</p> <p>Ref 10.50 dBm</p> <p>Mkr1 2.4020175 GHz</p> <p>-8.1221 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 2.5 MHz</p> <p>Sweep 2.667 ms</p> <p>Occupied Bandwidth 1.177 MHz</p> <p>Total Power 1.05 dBm</p> <p>Transmit Freq Error 20.561 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.281 MHz</p> <p>x dB -20.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.40200000 GHz</p> <p>CF Step 250.000 kHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p>
CH39	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44100000 GHz</p> <p>Center Freq: 2.44100000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 1/1</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 1 dB</p> <p>Ref 10.50 dBm</p> <p>Mkr1 2.4410125 GHz</p> <p>-7.9026 dBm</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 2.5 MHz</p> <p>Sweep 2.667 ms</p> <p>Occupied Bandwidth 1.178 MHz</p> <p>Total Power 1.41 dBm</p> <p>Transmit Freq Error 20.331 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.283 MHz</p> <p>x dB -20.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.44100000 GHz</p> <p>CF Step 250.000 kHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p>
CH78	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Center Freq: 2.48000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 1/1</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 1 dB</p> <p>Ref 10.50 dBm</p> <p>Mkr1 2.4800175 GHz</p> <p>-7.8657 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 2.5 MHz</p> <p>Sweep 2.667 ms</p> <p>Occupied Bandwidth 1.179 MHz</p> <p>Total Power 1.34 dBm</p> <p>Transmit Freq Error 20.472 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.283 MHz</p> <p>x dB -20.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.48000000 GHz</p> <p>CF Step 250.000 kHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p>

### 5.5. Carrier Frequencies Separation

**LIMIT**

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 2/3\*20 dB bandwidth of the hopping channel, whichever is greater.

**TEST CONFIGURATION**

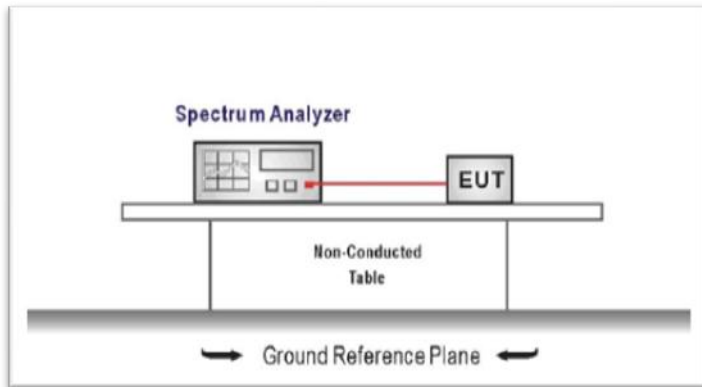

**TEST PROCEDURE**

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
 Span = wide enough to capture the peaks of two adjacent channels  
 RBW ≥ 1% of the span, VBW ≥ RBW  
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

**TEST MODE:**

Please refer to the clause 3.3




**TEST RESULTS**

Passed       Not Applicable

Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz) *	Result
GFSK	39	1.012	≥0.881	Pass
π/4DQPSK	39	1.008	≥0.855	Pass
8DPSK	39	1.005	≥0.855	Pass

Note:

- \*: GFSK limit = The maximum 20 dB Bandwidth for GFSK modulation on the section 5.4.
- π/4DQPSK limit = 2/3 \* The maximum 20 dB Bandwidth for π/4DQPSK modulation on the section 5.4.
- 8DPSK limit = 2/3 \* The maximum 20 dB Bandwidth for 8DPSK modulation on the section 5.4


<p>GFSK</p>	 <table border="1" data-bbox="678 504 1236 638"><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>Δ2</td><td>f</td><td>(Δ)</td><td>1.01175 MHz (Δ)</td><td>0.347 dB</td><td></td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>f</td><td></td><td>2.44101100 GHz</td><td>-6.496 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	f	(Δ)	1.01175 MHz (Δ)	0.347 dB				2	F	f		2.44101100 GHz	-6.496 dBm				3									4									5									6									7									8									9									10									11									
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																						
1	Δ2	f	(Δ)	1.01175 MHz (Δ)	0.347 dB																																																																																																									
2	F	f		2.44101100 GHz	-6.496 dBm																																																																																																									
3																																																																																																														
4																																																																																																														
5																																																																																																														
6																																																																																																														
7																																																																																																														
8																																																																																																														
9																																																																																																														
10																																																																																																														
11																																																																																																														
<p>π/4DQPSK</p>																																																																																																														
<p>8DPSK</p>																																																																																																														

### 5.6. Hopping Channel Number

**LIMIT**

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems in the 2400–2483.5 MHz band shall use at least **15** channels.

**TEST CONFIGURATION**

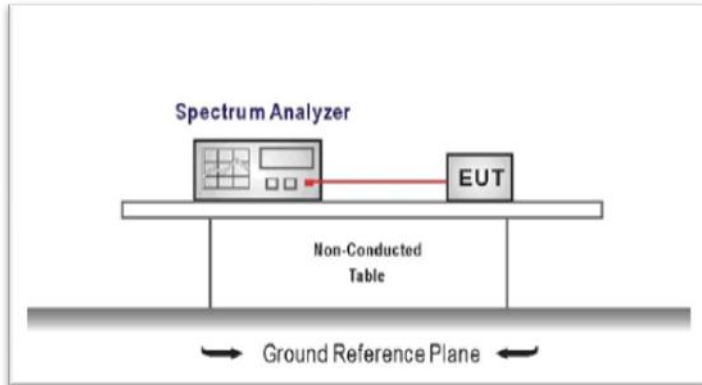

**TEST PROCEDURE**

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
 Span = the frequency band of operation  
 RBW ≥ 1% of the span, VBW ≥ RBW  
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

**TEST MODE:**




Please refer to the clause 3.3

**TEST RESULTS**

Passed       Not Applicable

Modulation type	Channel number	Limit	Result
GFSK	79	≥15.00	Pass
π/4DQPSK	79		
8DPSK	79		

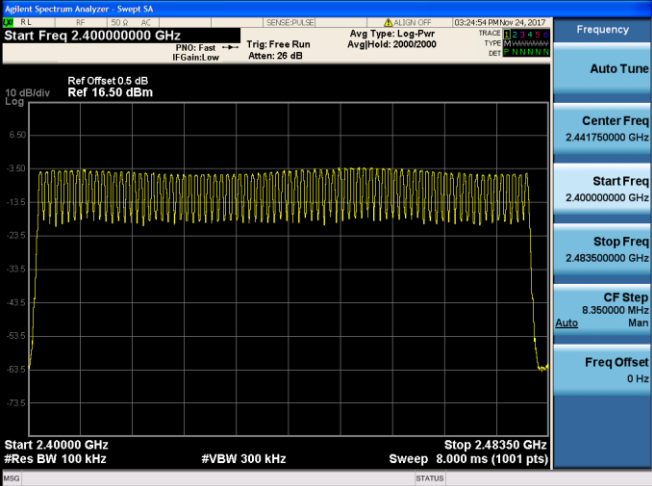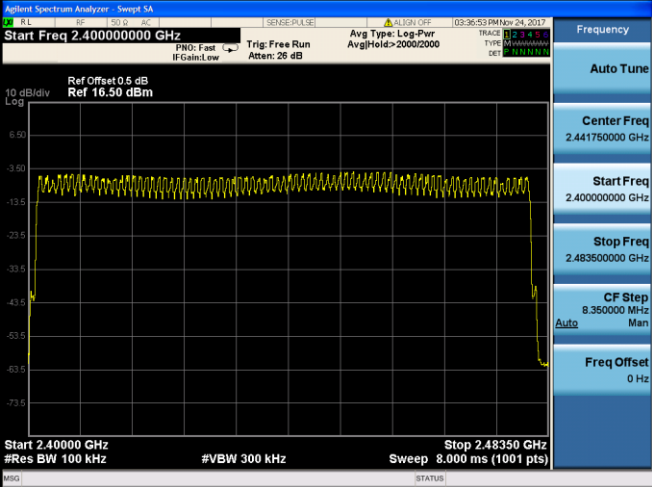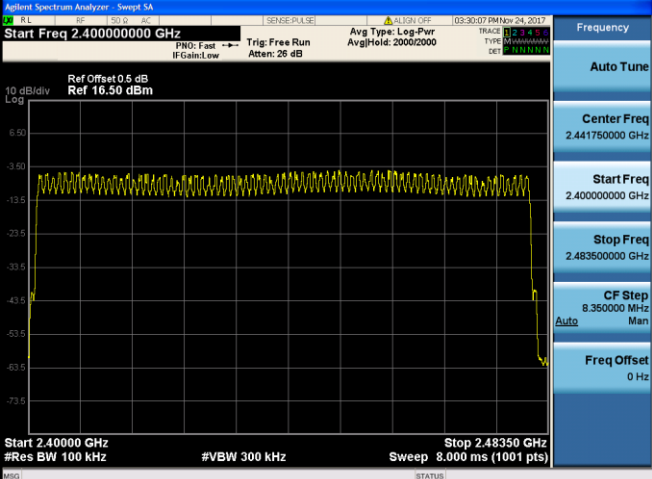


<p>GFSK</p>		
<p><math>\pi/4</math>DQPSK</p>		
<p>8DPSK</p>		

### 5.7. Dwell Time

#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

#### TEST CONFIGURATION

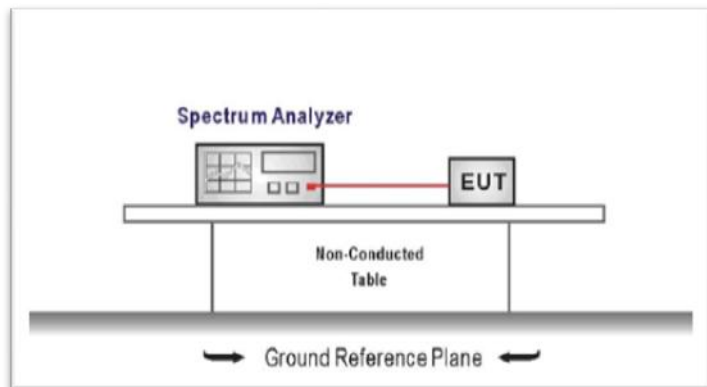

#### TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
 Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW ≥ RBW  
 Sweep = as necessary to capture the entire dwell time per hopping channel,  
 Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

#### TEST MODE:


Please refer to the clause 3.3

#### TEST RESULTS




Passed       Not Applicable




Modulation type	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell time (Second)	Limit (Second)	Result
GFSK	DH1	0.37	315	0.12	≤ 0.40	Pass
	DH3	1.63	159	0.26		
	DH5	2.87	114	0.33		
π/4DQPSK	2DH1	0.38	313	0.12	≤ 0.40	Pass
	2DH3	1.63	160	0.26		
	2DH5	2.88	108	0.31		
8DPSK	3DH1	0.38	313	0.12	≤ 0.40	Pass
	3DH3	1.63	158	0.26		
	3DH5	2.88	104	0.30		




Modulation Type:		GFSK	
DH1		<p>Agilent Spectrum Analyzer - Swept SA                  Center Freq 2.441000000 GHz                  Ref 20.00 dBm                  ΔMkr1 367.3 μs                  0.49 dB                  Center 2.441000000 GHz                  Res BW 1.0 MHz                  #VBW 3.0 MHz                  Sweep 10.13 ms (8001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.441000000 GHz</p> <p>Start Freq 2.441000000 GHz</p> <p>Stop Freq 2.441000000 GHz</p> <p>CF Step 1.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
		<p>Agilent Spectrum Analyzer - Swept SA                  Center Freq 2.441000000 GHz                  Ref 20.00 dBm                  ΔMkr1 1.625 ms                  4.97 dB                  Center 2.441000000 GHz                  Res BW 510 kHz                  #VBW 3.0 MHz                  Sweep 31.60 s (30001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.441000000 GHz</p> <p>Start Freq 2.441000000 GHz</p> <p>Stop Freq 2.441000000 GHz</p> <p>CF Step 510.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
		<p>Agilent Spectrum Analyzer - Swept SA                  Center Freq 2.441000000 GHz                  Ref 20.00 dBm                  ΔMkr1 1.625 ms                  4.97 dB                  Center 2.441000000 GHz                  Res BW 1.0 MHz                  #VBW 3.0 MHz                  Sweep 10.13 ms (8001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.441000000 GHz</p> <p>Start Freq 2.441000000 GHz</p> <p>Stop Freq 2.441000000 GHz</p> <p>CF Step 1.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
DH3			

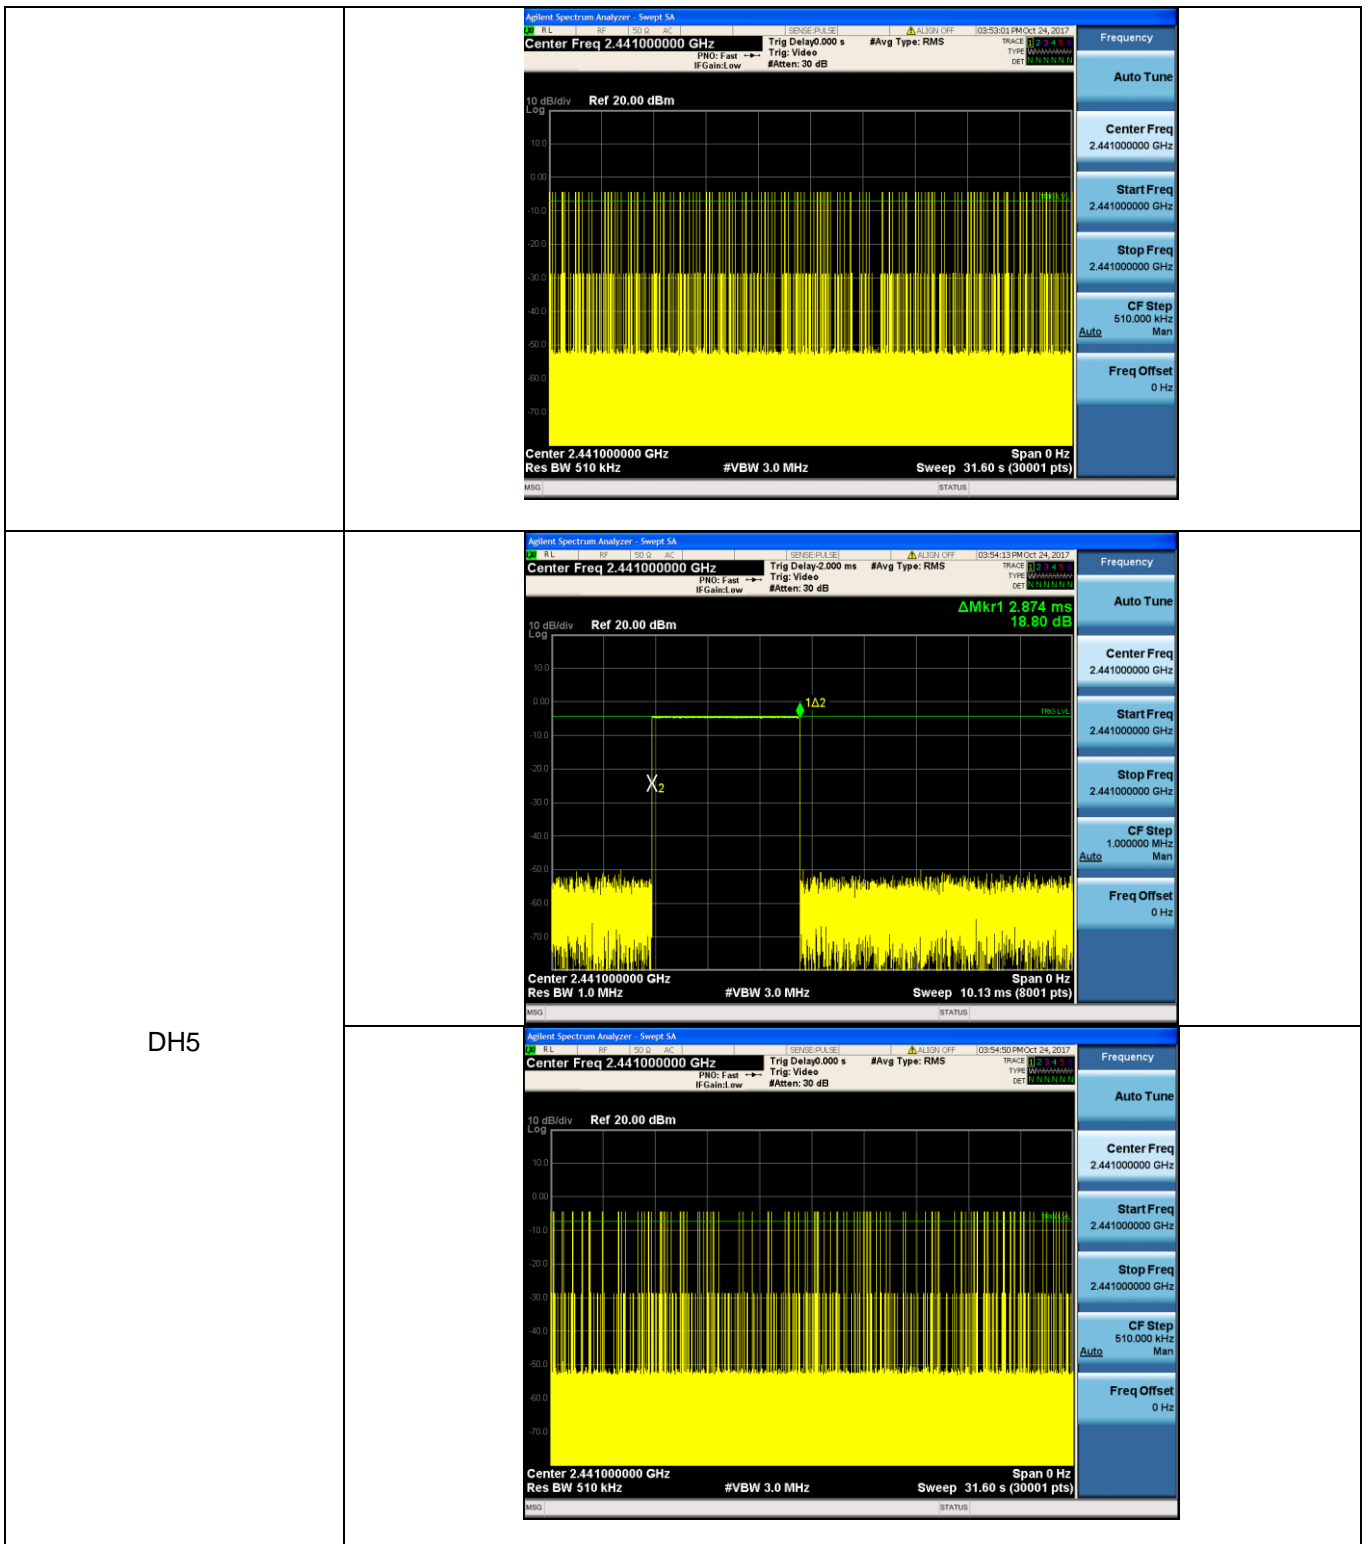

Modulation Type:		$\pi/4$ DQPSK
2DH1	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.441000000 GHz          Ref 20.00 dBm  <math>\Delta</math>Mkr1 376.2 <math>\mu</math>s          -3.38 dB          Center 2.441000000 GHz          Res BW 1.0 MHz          #VBW 3.0 MHz          Sweep 10.13 ms (8001 pts)</p>	
2DH3	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.441000000 GHz          Ref 20.00 dBm  <math>\Delta</math>Mkr1 1.629 ms          4.85 dB          Center 2.441000000 GHz          Res BW 1.0 MHz          #VBW 3.0 MHz          Sweep 10.13 ms (8001 pts)</p>	

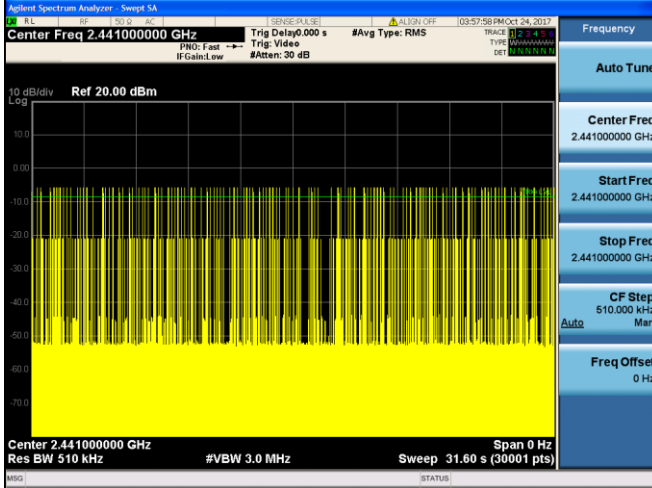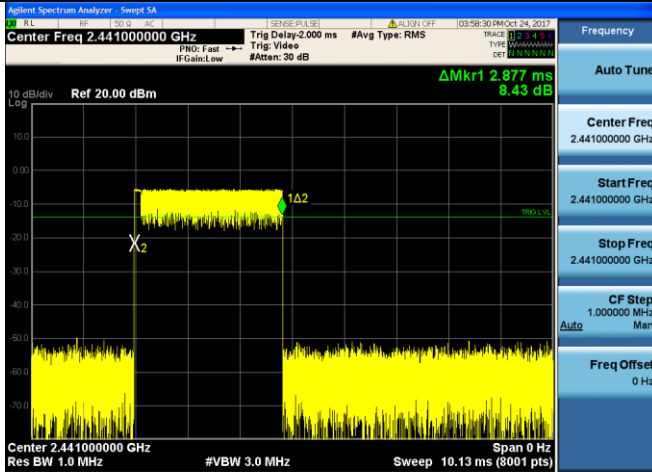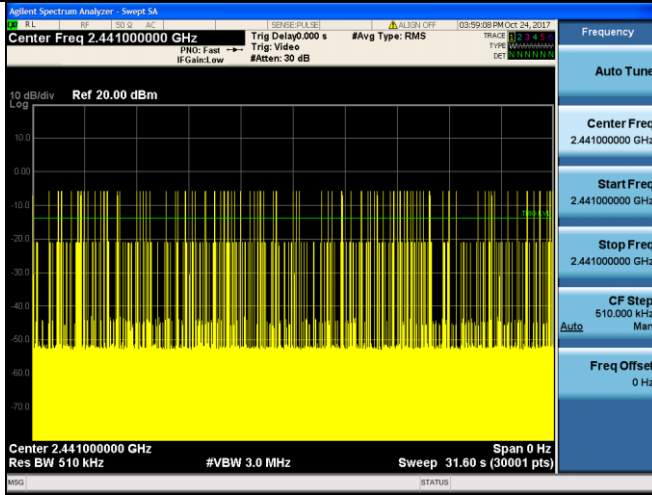		
2DH5		
		

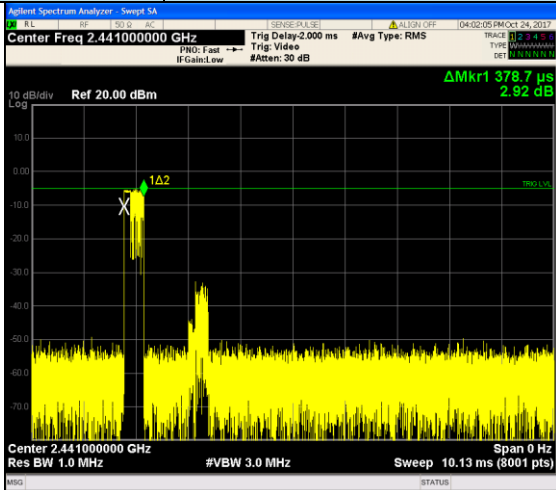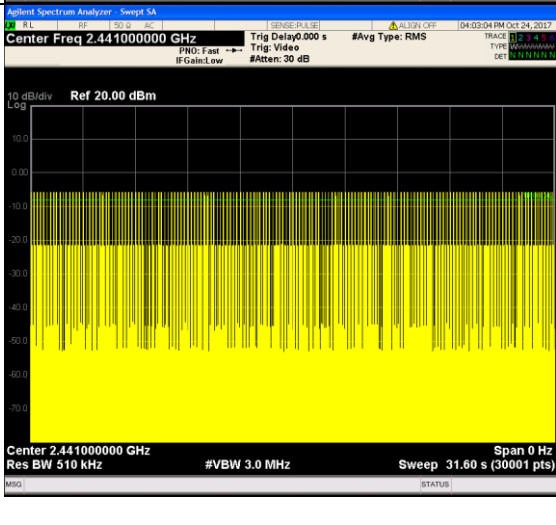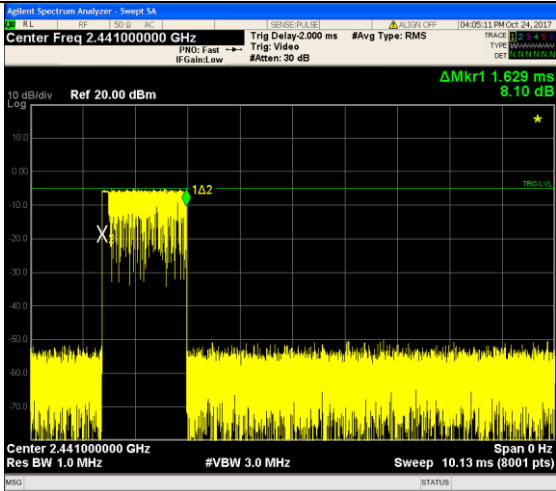Modulation Type:		8DPSK
	3DH1	
	3DH1	
	3DH3	

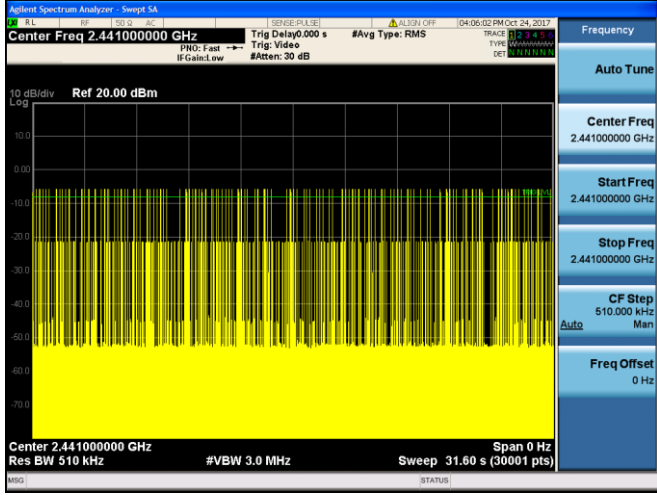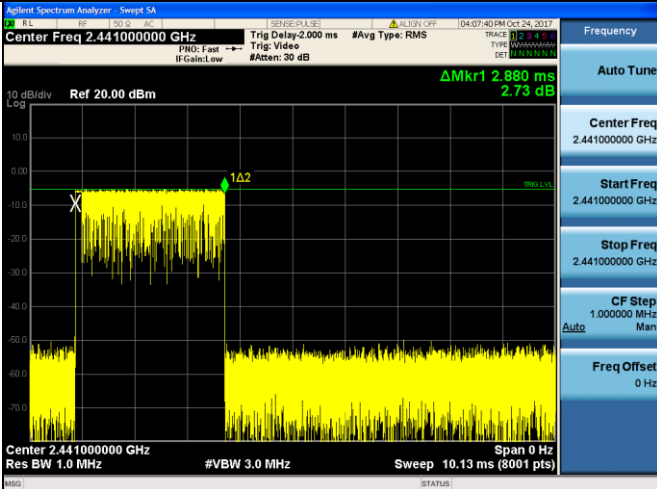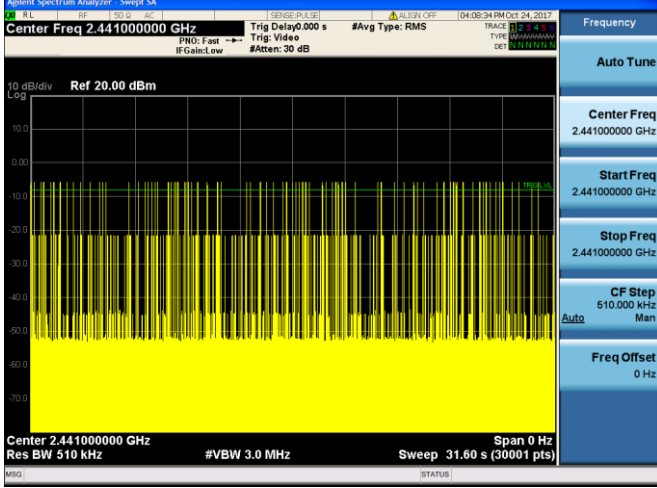		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.441000000 GHz</p> <p>Start Freq 2.441000000 GHz</p> <p>Stop Freq 2.441000000 GHz</p> <p>CF Step 510.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.441000000 GHz</p> <p>Start Freq 2.441000000 GHz</p> <p>Stop Freq 2.441000000 GHz</p> <p>CF Step 1.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>3DH5</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.441000000 GHz</p> <p>Start Freq 2.441000000 GHz</p> <p>Stop Freq 2.441000000 GHz</p> <p>CF Step 510.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>



### 5.8. Pseudorandom Frequency Hopping Sequence


#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo-randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

#### TEST RESULTS


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

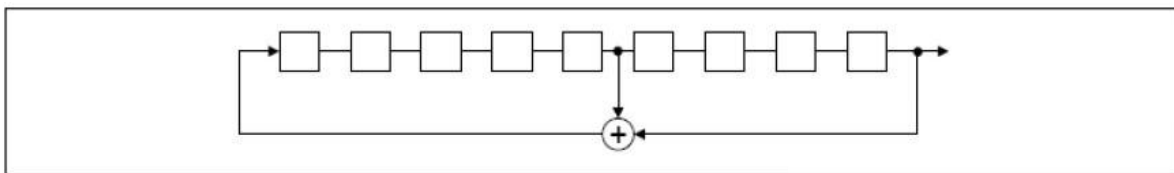

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of pseudorandom frequency hopping sequence as follows:

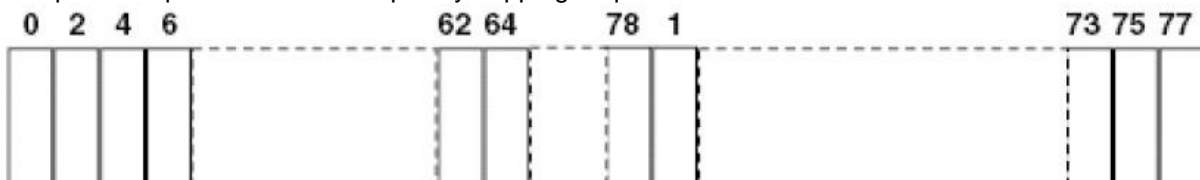

Each frequency used equally on the average by each transmitter. The system receiver has input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.


**5.9. Restricted band (radiated)**

**LIMIT**

**FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

**TEST CONFIGURATION**

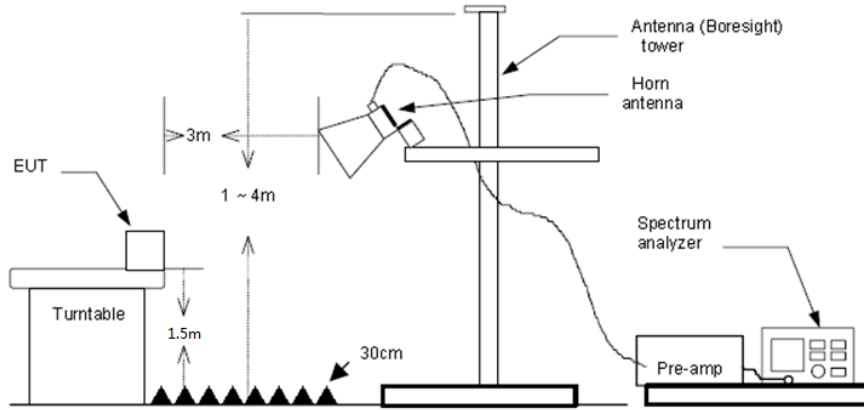

**TEST PROCEDURE**

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:  
 RBW=1 MHz, VBW=3 MHz Peak detector for Peak value  
 RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

**TEST MODE:**

Please refer to the clause 3.3

**TEST RESULTS**

Passed       Not Applicable

**Note:**

- 1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor
- 2) Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report.
- 3) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

CH00									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	35.05	28.05	6.62	37.65	32.07	74.00	-41.93	Horizontal	Peak
2390.03	42.19	27.65	6.75	37.87	38.72	74.00	-35.28	Horizontal	Peak
2310.00	32.56	28.05	6.62	37.65	29.58	74.00	-44.42	Vertical	Peak
2390.03	37.94	27.65	6.75	37.87	34.47	74.00	-39.53	Vertical	Peak
2310.00	21.43	28.05	6.62	37.65	18.45	54.00	-35.55	Horizontal	Average
2390.03	21.53	27.65	6.75	37.87	18.06	54.00	-35.94	Horizontal	Average
2310.00	21.55	28.05	6.62	37.65	18.57	54.00	-35.43	Vertical	Average
2390.03	21.89	27.65	6.75	37.87	18.42	54.00	-35.58	Vertical	Average


CH78									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.50	42.46	27.26	6.83	37.87	38.68	74.00	-35.32	Horizontal	Peak
2496.36	50.90	27.21	6.84	37.87	47.08	74.00	-26.92	Horizontal	Peak
2500.00	37.51	27.20	6.84	37.87	33.68	74.00	-40.32	Horizontal	Peak
2483.50	43.70	27.26	6.83	37.87	39.92	74.00	-34.08	Vertical	Peak
2500.00	36.90	27.20	6.84	37.87	33.07	74.00	-40.93	Vertical	Peak
2483.50	22.52	27.26	6.83	37.87	18.74	54.00	-35.26	Horizontal	Average
2500.00	21.79	27.20	6.84	37.87	17.96	54.00	-36.04	Horizontal	Average
2483.50	22.65	27.26	6.83	37.87	18.87	54.00	-35.13	Vertical	Average
2500.00	22.53	27.20	6.84	37.87	18.70	54.00	-35.30	Vertical	Average

## 5.10. Band edge and Spurious Emissions (conducted)

### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### TEST CONFIGURATION

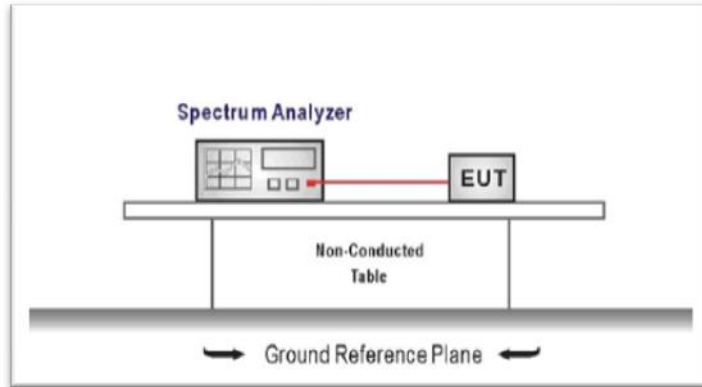

### TEST PROCEDURE




1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
RBW = 100 kHz, VBW  $\geq$  RBW  
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

### TEST MODE:


Please refer to the clause 3.3

### TEST RESULTS

Passed       Not Applicable

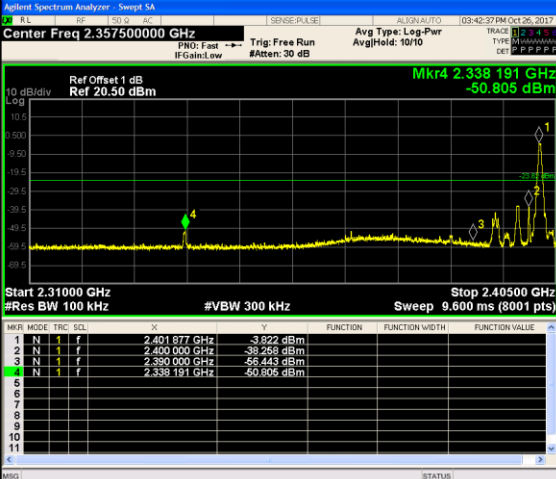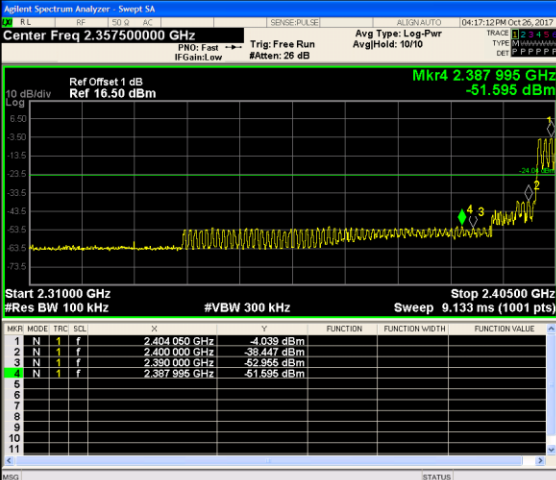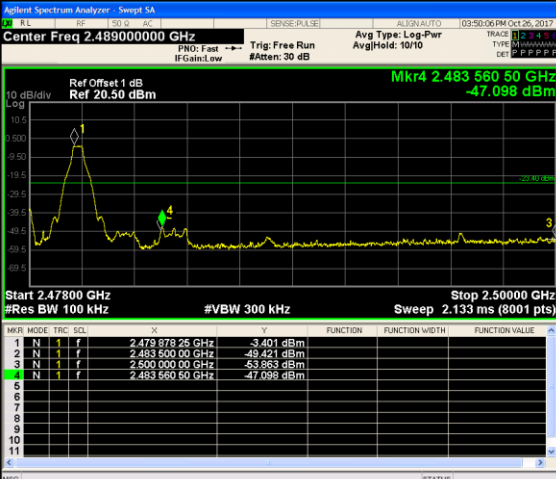
Test Item:	Band edge	Modulation type:	GFSK												
<p>CH00</p> <p>No hopping mode</p>			<table border="1"> <tr><td>Frequency</td><td>Auto Tune</td></tr> <tr><td>Center Freq</td><td>2.357500000 GHz</td></tr> <tr><td>Start Freq</td><td>2.310000000 GHz</td></tr> <tr><td>Stop Freq</td><td>2.405000000 GHz</td></tr> <tr><td>CF Step</td><td>9.500000 MHz</td></tr> <tr><td>Freq Offset</td><td>0 Hz</td></tr> </table>	Frequency	Auto Tune	Center Freq	2.357500000 GHz	Start Freq	2.310000000 GHz	Stop Freq	2.405000000 GHz	CF Step	9.500000 MHz	Freq Offset	0 Hz
Frequency	Auto Tune														
Center Freq	2.357500000 GHz														
Start Freq	2.310000000 GHz														
Stop Freq	2.405000000 GHz														
CF Step	9.500000 MHz														
Freq Offset	0 Hz														
<p>CH00</p> <p>Hopping mode</p>			<table border="1"> <tr><td>Frequency</td><td>Auto Tune</td></tr> <tr><td>Center Freq</td><td>2.357500000 GHz</td></tr> <tr><td>Start Freq</td><td>2.310000000 GHz</td></tr> <tr><td>Stop Freq</td><td>2.405000000 GHz</td></tr> <tr><td>CF Step</td><td>9.500000 MHz</td></tr> <tr><td>Freq Offset</td><td>0 Hz</td></tr> </table>	Frequency	Auto Tune	Center Freq	2.357500000 GHz	Start Freq	2.310000000 GHz	Stop Freq	2.405000000 GHz	CF Step	9.500000 MHz	Freq Offset	0 Hz
Frequency	Auto Tune														
Center Freq	2.357500000 GHz														
Start Freq	2.310000000 GHz														
Stop Freq	2.405000000 GHz														
CF Step	9.500000 MHz														
Freq Offset	0 Hz														
<p>CH78</p> <p>No hopping mode</p>			<table border="1"> <tr><td>Frequency</td><td>Auto Tune</td></tr> <tr><td>Center Freq</td><td>2.489000000 GHz</td></tr> <tr><td>Start Freq</td><td>2.478000000 GHz</td></tr> <tr><td>Stop Freq</td><td>2.500000000 GHz</td></tr> <tr><td>CF Step</td><td>2.200000 MHz</td></tr> <tr><td>Freq Offset</td><td>0 Hz</td></tr> </table>	Frequency	Auto Tune	Center Freq	2.489000000 GHz	Start Freq	2.478000000 GHz	Stop Freq	2.500000000 GHz	CF Step	2.200000 MHz	Freq Offset	0 Hz
Frequency	Auto Tune														
Center Freq	2.489000000 GHz														
Start Freq	2.478000000 GHz														
Stop Freq	2.500000000 GHz														
CF Step	2.200000 MHz														
Freq Offset	0 Hz														

CH78  
Hopping mode

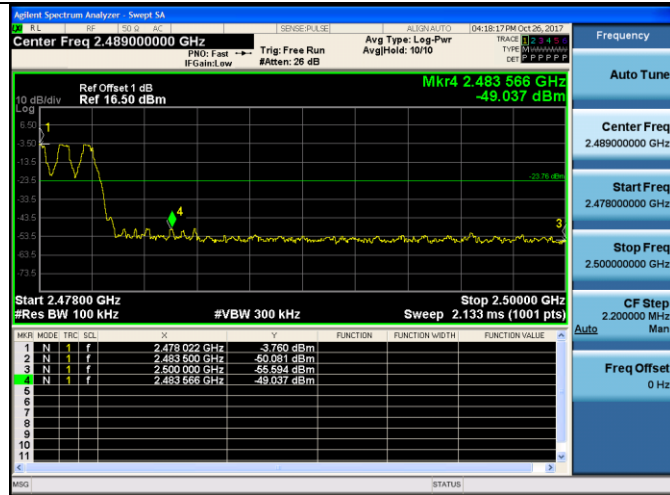

Test Item:	Band edge	Modulation type:	$\pi/4$ DQPSK
<p>CH00</p> <p>No hopping mode</p>			<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.357500000 GHz</p> <p>Start Freq 2.310000000 GHz</p> <p>Stop Freq 2.405000000 GHz</p> <p>CF Step 9.500000 MHz</p> <p>Freq Offset 0 Hz</p>
<p>CH00</p> <p>Hopping mode</p>			<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.357500000 GHz</p> <p>Start Freq 2.310000000 GHz</p> <p>Stop Freq 2.405000000 GHz</p> <p>CF Step 9.500000 MHz</p> <p>Freq Offset 0 Hz</p>
<p>CH78</p> <p>No hopping mode</p>			<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.489000000 GHz</p> <p>Start Freq 2.478000000 GHz</p> <p>Stop Freq 2.500000000 GHz</p> <p>CF Step 2.200000 MHz</p> <p>Freq Offset 0 Hz</p>

CH78  
Hopping mode

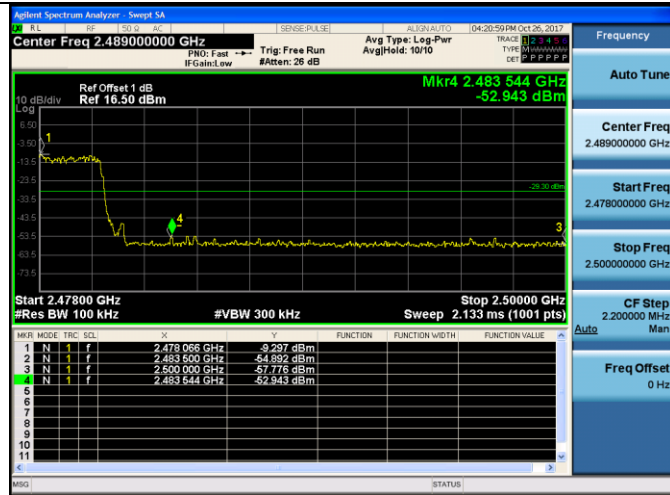



Test Item:	Band edge	Modulation type:	8DPSK														
<p>CH00</p> <p>No hopping mode</p>			<table border="1"> <tr><td>Frequency</td><td>Auto Tune</td></tr> <tr><td>Center Freq</td><td>2.357500000 GHz</td></tr> <tr><td>Start Freq</td><td>2.310000000 GHz</td></tr> <tr><td>Stop Freq</td><td>2.405000000 GHz</td></tr> <tr><td>CF Step</td><td>9.500000 MHz</td></tr> <tr><td>Man</td><td></td></tr> <tr><td>Freq Offset</td><td>0 Hz</td></tr> </table>	Frequency	Auto Tune	Center Freq	2.357500000 GHz	Start Freq	2.310000000 GHz	Stop Freq	2.405000000 GHz	CF Step	9.500000 MHz	Man		Freq Offset	0 Hz
Frequency	Auto Tune																
Center Freq	2.357500000 GHz																
Start Freq	2.310000000 GHz																
Stop Freq	2.405000000 GHz																
CF Step	9.500000 MHz																
Man																	
Freq Offset	0 Hz																
<p>CH00</p> <p>Hopping mode</p>			<table border="1"> <tr><td>Frequency</td><td>Auto Tune</td></tr> <tr><td>Center Freq</td><td>2.357500000 GHz</td></tr> <tr><td>Start Freq</td><td>2.310000000 GHz</td></tr> <tr><td>Stop Freq</td><td>2.405000000 GHz</td></tr> <tr><td>CF Step</td><td>9.500000 MHz</td></tr> <tr><td>Man</td><td></td></tr> <tr><td>Freq Offset</td><td>0 Hz</td></tr> </table>	Frequency	Auto Tune	Center Freq	2.357500000 GHz	Start Freq	2.310000000 GHz	Stop Freq	2.405000000 GHz	CF Step	9.500000 MHz	Man		Freq Offset	0 Hz
Frequency	Auto Tune																
Center Freq	2.357500000 GHz																
Start Freq	2.310000000 GHz																
Stop Freq	2.405000000 GHz																
CF Step	9.500000 MHz																
Man																	
Freq Offset	0 Hz																
<p>CH78</p> <p>No hopping mode</p>			<table border="1"> <tr><td>Frequency</td><td>Auto Tune</td></tr> <tr><td>Center Freq</td><td>2.489000000 GHz</td></tr> <tr><td>Start Freq</td><td>2.478000000 GHz</td></tr> <tr><td>Stop Freq</td><td>2.500000000 GHz</td></tr> <tr><td>CF Step</td><td>2.200000 MHz</td></tr> <tr><td>Man</td><td></td></tr> <tr><td>Freq Offset</td><td>0 Hz</td></tr> </table>	Frequency	Auto Tune	Center Freq	2.489000000 GHz	Start Freq	2.478000000 GHz	Stop Freq	2.500000000 GHz	CF Step	2.200000 MHz	Man		Freq Offset	0 Hz
Frequency	Auto Tune																
Center Freq	2.489000000 GHz																
Start Freq	2.478000000 GHz																
Stop Freq	2.500000000 GHz																
CF Step	2.200000 MHz																
Man																	
Freq Offset	0 Hz																