



# TEST REPORT

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                   |                                                                                                                        |             |                                                                                                                   |                                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|-------------|-------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| <b>KCTL Inc.</b><br>65, Sinwon-ro, Yeongtong-gu,<br>Suwon-si, Gyeonggi-do, 16677, Korea<br>TEL: 82-31-285-0894 FAX: 82-505-299-8311<br><a href="http://www.kctl.co.kr">www.kctl.co.kr</a>                                                                                                                                                                                                                                                                                                                                                                            | Report No.:<br><b>KR19-SRF0033-B</b><br>Page (1) of (114)                                                         |                                                                                                                        |             |                                                                                                                   |                                                                                                                        |
| <b>1. Client</b><br>◦ Name : CITECH CO.,LTD.<br>◦ Address : 11F, 932, Yangjae-daero, Songpa-gu, Seoul, Republic of Korea<br>◦ Date of Receipt : 2018-12-03<br><b>2. Use of Report</b> : -<br><b>3. Name of Product and Model</b> : Premium Media Player / RS350<br><b>4. Manufacturer and Country of Origin</b> : CITECH CO.,LTD. / Korea<br><b>5. FCC ID</b> : 2ANYL-RS350<br><b>6. Date of Test</b> : 2019-02-01 to 2019-02-19<br><b>7. Test Standards</b> : FCC Part 15 Subpart E, 15.407<br><b>8. Test Results</b> : Refer to the test result in the test report |                                                                                                                   |                                                                                                                        |             |                                                                                                                   |                                                                                                                        |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 20%; vertical-align: middle; padding: 5px;">Affirmation</td> <td style="width: 40%; padding: 5px;">           Tested by<br/> <div style="text-align: center;"> <br/>             Name : Taekyong Nam (Signature)           </div> </td> <td style="width: 40%; padding: 5px;">           Technical Manager<br/> <div style="text-align: center;"> <br/>             Name : Bongok Ko (Signature)           </div> </td> </tr> </table>                                     |                                                                                                                   |                                                                                                                        | Affirmation | Tested by<br><div style="text-align: center;"> <br/>             Name : Taekyong Nam (Signature)           </div> | Technical Manager<br><div style="text-align: center;"> <br/>             Name : Bongok Ko (Signature)           </div> |
| Affirmation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Tested by<br><div style="text-align: center;"> <br/>             Name : Taekyong Nam (Signature)           </div> | Technical Manager<br><div style="text-align: center;"> <br/>             Name : Bongok Ko (Signature)           </div> |             |                                                                                                                   |                                                                                                                        |
| 2019-04-10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                   |                                                                                                                        |             |                                                                                                                   |                                                                                                                        |
| <h2>KCTL Inc.</h2> <p>As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.</p>                                                                                                                                                                                                                                                                                                                      |                                                                                                                   |                                                                                                                        |             |                                                                                                                   |                                                                                                                        |

#### Report revision history

| Date       | Revision                                     | Page No       |
|------------|----------------------------------------------|---------------|
| 2019-03-13 | Initial report                               | -             |
| 2019-04-03 | Revised a typo                               | 1, 101        |
| 2019-04-10 | Added the data for simultaneous transmission | 5, 109 to 111 |
|            |                                              |               |
|            |                                              |               |
|            |                                              |               |
|            |                                              |               |
|            |                                              |               |
|            |                                              |               |
|            |                                              |               |

*This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document.*

*This test report is a general report that does not use the KOLAS accreditation mark and is not related to KOLAS accreditation.*

**KCTL**

## CONTENTS

|      |                                                        |     |
|------|--------------------------------------------------------|-----|
| 1.   | General information .....                              | 4   |
| 2.   | Device information .....                               | 4   |
| 2.1. | Accessory information .....                            | 5   |
| 2.2. | Information about derivative model.....                | 5   |
| 2.3. | Frequency/channel operations.....                      | 5   |
| 2.4. | Simultaneously transmission condition .....            | 5   |
| 2.5. | Duty Cycle Correction Factor .....                     | 6   |
| 3.   | Antenna requirement .....                              | 8   |
| 4.   | Summary of tests .....                                 | 9   |
| 5.   | Measurement uncertainty .....                          | 9   |
| 6.   | Measurement results explanation example .....          | 10  |
| 7.   | Test results .....                                     | 11  |
| 7.1. | Maximum conducted output power .....                   | 11  |
| 7.2. | Maximum Power Spectral Density .....                   | 15  |
| 7.3. | 26 dB Bandwidth & 99% Occupied Bandwidth .....         | 25  |
| 7.4. | 6 dB Bandwidth.....                                    | 38  |
| 7.5. | Frequency Stability .....                              | 40  |
| 7.6. | Spurious Emission, Band Edge and Restricted bands..... | 42  |
| 7.7. | AC Conducted emission .....                            | 112 |
| 8.   | Measurement equipment .....                            | 114 |



## 2.1. Accessory information

| Equipment         | Manufacturer          | Model               | Serial No. | Power source   |
|-------------------|-----------------------|---------------------|------------|----------------|
| SWITCHING ADAPTER | Chung Kwang Tech Inc. | ADS-25NP-12-112024E | -          | AC 100 ~ 240 V |

## 2.2. Information about derivative model

The difference between basic model and derivative models is:  
Simplified derivation based on buyer's model name.

## 2.3. Frequency/channel operations

This device contains the following capabilities:  
Bluetooth(BDR/EDR), WIFI(802.11a/b/g/n20)

UNII-1

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 36  | 5 180           |
| ·   | ·               |
| 40  | 5 200           |
| ·   | ·               |
| 48  | 5 240           |

UNII-3

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 149 | 5 745           |
| ·   | ·               |
| 157 | 5 785           |
| ·   | ·               |
| 165 | 5 825           |

Table 2.3.1. 802.11a/n(HT20) mode

## 2.4. Simultaneously transmission condition


| Technology                       | Modulation | Test mode | Tested Channel |
|----------------------------------|------------|-----------|----------------|
| WLAN 5 GHz<br>(802.11n20 / MIMO) | OFDM       | 802.11n20 | 149            |
| Bluetooth                        | GFSK       | EDR       | 78             |

Note<sub>1)</sub>: The emission of the simultaneous operation (WiFi & Bluetooth) have been evaluated and no non-compliance found.

## 2.5. Duty Cycle Correction Factor

### SISO

- 802.11a

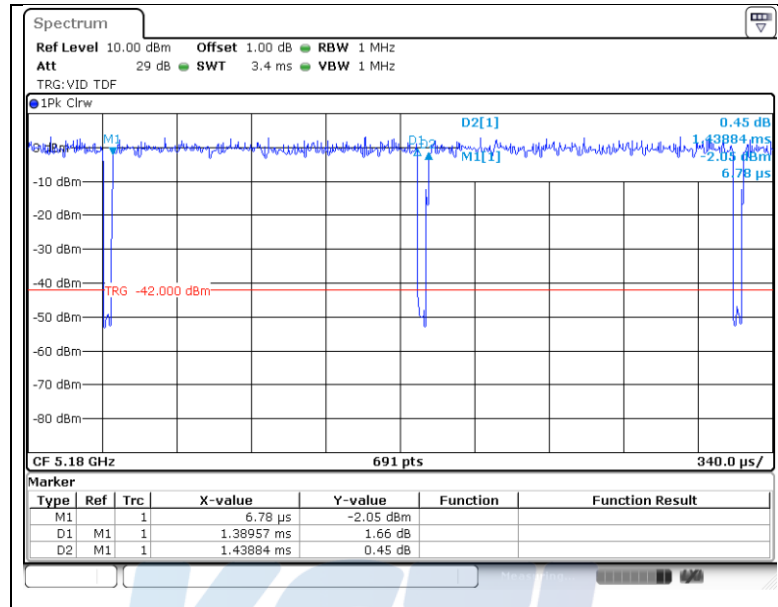


Note<sub>1</sub>) : period : 1.44 ms, On time : 1.39 ms

Note<sub>2</sub>) : DCCF =  $10 \log(1/x) = 10 \log(1/0.966) = 0.151$  dB,  $x = 1.39/1.44 = 0.966$

Note<sub>3</sub>) : 802.11g is a non-continuous transmission (duty cycle < 98 %)

- 802.11n HT20

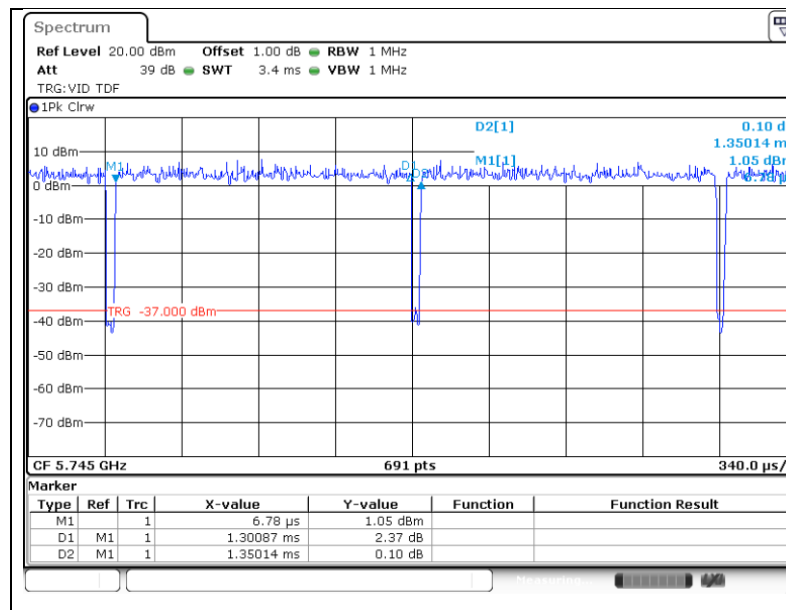


Note<sub>1</sub>) : period : 1.35 ms, On time : 1.30 ms

Note<sub>2</sub>) : DCCF =  $10 \log(1/x) = 10 \log(1/0.964) = 0.161$  dB,  $x = 1.30/1.35 = 0.964$

Note<sub>3</sub>) : 802.11g is a non-continuous transmission (duty cycle < 98 %)

**MIMO**

**- 802.11n HT20**

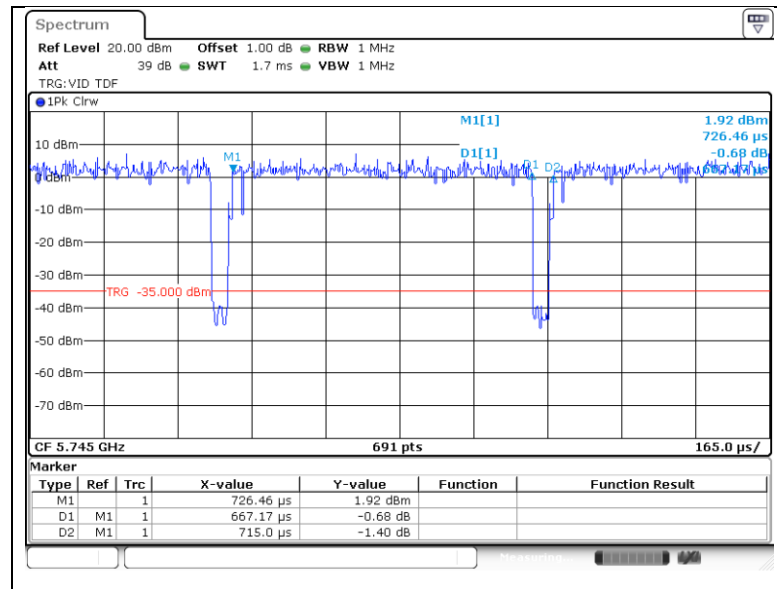

Note<sub>1</sub>) : period : 0.72 ms, On time : 0.67 ms

Note<sub>2</sub>) : DCCF =  $10 \log(1 / x) = 10 \log(1/0.933) = 0.301$  dB,  $x = 0.67/0.72 = 0.933$

Note<sub>3</sub>) : 802.11n HT20 is a non-continuous transmission (duty cycle < 98 %)

### 3. Antenna requirement

According to §15.203, §15.407

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The transmitter has permanently attached Chip Antenna (internal antenna) on board.
- The E.U.T Complies with the requirement of §15.203, §15.407

#### Notes:

1. Directional Gain calculations
  - If all antennas have the same gain.  $G_{ANT}$   
Directional gain =  $G_{ANT}$  + Array Gain, where Array Gain is as follows.
  - For power spectral density (PSD) measurements on all devices.  
Array Gain =  $10 \log(N_{ANT}/N_{SS})$  dB.
  - For power measurements on IEEE 802.11 devices  
Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 2$ ;

#### 2. Antenna Gain

5 GHz Band

|                    |           |          |
|--------------------|-----------|----------|
| Antenna Gain(SISO) | Ant 1     | 2.64 dBi |
|                    | Ant 2     | 2.64 dBi |
| Antenna Gain(MIMO) | Ant 1 & 2 | 2.64 dBi |

#### 4. Summary of tests

| FCC Part section(s)                   | Parameter                                | Test results |
|---------------------------------------|------------------------------------------|--------------|
| 15.407(a)                             | Maximum conducted output power           | Pass         |
| 15.407(a)                             | Maximum power spectral density           | Pass         |
| 15.407(a)                             | 26 dB bandwidth & 99% Occupied bandwidth | Pass         |
| 15.407(e)                             | 6 dB bandwidth                           | Pass         |
| 15.407(g)                             | Frequency stability                      | Pass         |
| 15.407(d),<br>15.205(a),<br>15.209(a) | Spurious emission                        | Pass         |
|                                       | Band-edge, restricted band               | Pass         |
| 15.207(a)                             | Conducted emissions                      | Pass         |

#### Notes:

- All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
- The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that X orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in X orientation
- The test procedure(s) in this report were performed in accordance as following.
  - ANSI C63.10-2013
  - KDB 662911 D01 v02r01
  - KDB 789033 D02 v02r01

#### 5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicated a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

| Parameter                    | Expanded uncertainty |         |
|------------------------------|----------------------|---------|
| Conducted RF power           | 1.76 dB              |         |
| Conducted spurious emissions | 4.03 dB              |         |
| Radiated spurious emissions  | 9 kHz ~ 30 MHz:      | 2.28 dB |
|                              | 30 MHz ~ 300 MHz     | 4.98 dB |
|                              | 300 MHz ~ 1 000 MHz  | 5.14 dB |
|                              | 1 GHz ~ 6 GHz        | 6.70 dB |
|                              | Above 6 GHz          | 6.60 dB |
| Conducted emissions          | 9 kHz ~ 150 kHz      | 3.66 dB |
|                              | 150 kHz ~ 30 MHz     | 3.26 dB |

## 6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

| Frequency (MHz) | Factor(dB) | Frequency (MHz) | Factor(dB) |
|-----------------|------------|-----------------|------------|
| 30              | 10.02      | 16 000          | 12.09      |
| 100             | 10.26      | 17 000          | 11.79      |
| 200             | 10.32      | 18 000          | 12.16      |
| 300             | 10.43      | 19 000          | 12.48      |
| 400             | 10.42      | 20 000          | 11.97      |
| 500             | 10.55      | 21 000          | 12.59      |
| 600             | 10.54      | 22 000          | 11.84      |
| 700             | 10.64      | 23 000          | 12.45      |
| 800             | 10.63      | 24 000          | 12.26      |
| 900             | 10.64      | 25 000          | 12.72      |
| 1 000           | 10.70      | 26 000          | 12.45      |
| 2 000           | 11.11      | 27 000          | 12.73      |
| 3 000           | 11.36      | 28 000          | 12.45      |
| 4 000           | 11.53      | 29 000          | 12.78      |
| 5 000           | 11.92      | 30 000          | 12.60      |
| 6 000           | 12.15      | 31 000          | 13.01      |
| 7 000           | 11.32      | 32 000          | 13.15      |
| 8 000           | 11.36      | 33 000          | 13.57      |
| 9 000           | 11.72      | 34 000          | 13.86      |
| 10 000          | 11.63      | 35 000          | 14.12      |
| 11 000          | 11.43      | 36 000          | 14.26      |
| 12 000          | 11.25      | 37 000          | 14.33      |
| 13 000          | 11.92      | 38 000          | 14.59      |
| 14 000          | 12.03      | 39 000          | 14.63      |
| 15 000          | 11.69      | 40 000          | 14.84      |


**Note.**

Offset(dB) = RF cable loss(dB) + Attenuator(dB)

## 7. Test results

### 7.1. Maximum conducted output power

#### Test setup



#### Limit

According to §15.407(a)

| Band    | EUT category |                                   | Limit                      |
|---------|--------------|-----------------------------------|----------------------------|
| UNII-1  |              | Outdoor access point              | 1 W (30 dBm)               |
|         |              | Indoor access point               |                            |
|         |              | Fixed point-to-point access point |                            |
|         | √            | Client device                     | 250 mW (24 dBm)            |
| UNII-2A |              |                                   | 250 mW or 11 dBm + 10logB* |
| UNII-2C |              |                                   | 250 mW or 11 dBm + 10logB* |
| UNII-3  |              | √                                 | 1 W (30 dBm)               |

#### Notes:

FCC Limit B is the 26 dB emission bandwidth.

#### Test procedure

ANSI C63.10-2013-Section 12.3.3.2 and 14.2  
 KDB 789033 D02 v02r01 - Section E.3.a) or b)  
 KDB 662911 D01 v02r01 - Section E).1)

## **Test settings**

### **◆ KDB 789033 D02 v02r01**

#### **Section E.3.a)**

##### **Method PM (Measurement using an RF average power meter):**

- (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.
  - The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
  - At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
  - The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five
- (ii) If the transmitter does not transmit continuously, measure the duty cycle,  $x$ , of the transmitter output signal as described in II
- (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- (iv) Adjust the measurement in dBm by adding  $10 \log (1/x)$  where  $x$  is the duty cycle (e.g.,  $10 \log (1/0.25)$  if the duty cycle is 25%).

#### **Section E.3.b)**

##### **Method PM-G (Measurement using a gated RF average power meter):**

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

### **◆ KDB 662911 D01 v02r01**

#### **Section E).1)**

##### **In-Band Power Measurements**

The measure-and-sum technique shall be used for measuring in-band transmit power of a device. Total power is the sum of the conducted power levels measured at the various output ports

##### **Notes:**

A peak responding power sensor is used, where the power sensor system video bandwidth is greater than the occupied bandwidth of the EUT.

## Test results

### Ant1

| Test mode       | Band   | Frequency(MHz) | Measured output power |                 |             | Limit(dBm) |
|-----------------|--------|----------------|-----------------------|-----------------|-------------|------------|
|                 |        |                | Reading(dBm)          | Duty Factor(dB) | Result(dBm) |            |
| 802.11a         | UNII-1 | 5 180          | 11.93                 | 0.15            | 12.08       | 24.00      |
|                 |        | 5 200          | 11.82                 | 0.15            | 11.97       |            |
|                 |        | 5 240          | 11.89                 | 0.15            | 12.04       |            |
|                 | UNII-3 | 5 745          | 14.72                 | 0.15            | 14.87       | 30.00      |
|                 |        | 5 785          | 14.46                 | 0.15            | 14.61       |            |
|                 |        | 5 825          | 14.13                 | 0.15            | 14.28       |            |
| 802.11n<br>HT20 | UNII-1 | 5 180          | 11.71                 | 0.16            | 11.87       | 24.00      |
|                 |        | 5 200          | 11.67                 | 0.16            | 11.83       |            |
|                 |        | 5 240          | 11.54                 | 0.16            | 11.70       |            |
|                 | UNII-3 | 5 745          | 14.64                 | 0.16            | 14.80       | 30.00      |
|                 |        | 5 785          | 14.19                 | 0.16            | 14.35       |            |
|                 |        | 5 825          | 13.93                 | 0.16            | 14.09       |            |

### Ant2

| Test mode       | Band   | Frequency(MHz) | Measured output power |                                |                            | Limit(dBm) |
|-----------------|--------|----------------|-----------------------|--------------------------------|----------------------------|------------|
|                 |        |                | Reading (dBm)         | Duty Factor <sup>1)</sup> (dB) | Result <sup>2)</sup> (dBm) |            |
| 802.11a         | UNII-1 | 5 180          | 9.74                  | 0.15                           | 9.89                       | 24.00      |
|                 |        | 5 200          | 9.62                  | 0.15                           | 9.77                       |            |
|                 |        | 5 240          | 9.41                  | 0.15                           | 9.56                       |            |
|                 | UNII-3 | 5 745          | 14.72                 | 0.15                           | 14.87                      | 30.00      |
|                 |        | 5 785          | 14.46                 | 0.15                           | 14.61                      |            |
|                 |        | 5 825          | 14.13                 | 0.15                           | 14.28                      |            |
| 802.11n<br>HT20 | UNII-1 | 5 180          | 9.57                  | 0.16                           | 9.73                       | 24.00      |
|                 |        | 5 200          | 9.42                  | 0.16                           | 9.58                       |            |
|                 |        | 5 240          | 9.05                  | 0.16                           | 9.21                       |            |
|                 | UNII-3 | 5 745          | 14.64                 | 0.16                           | 14.80                      | 30.00      |
|                 |        | 5 785          | 14.19                 | 0.16                           | 14.35                      |            |
|                 |        | 5 825          | 13.93                 | 0.16                           | 14.09                      |            |

### Note.

1. Please refer to the on page 6
2. Result(dB m) = Reading(dB m) + Duty Factor(dB)

## MIMO

| Test mode    | Band   | Frequency (MHz) | Measured output power |             |            |                                |                            | Limit (dBm) |
|--------------|--------|-----------------|-----------------------|-------------|------------|--------------------------------|----------------------------|-------------|
|              |        |                 | Ant 1 (dBm)           | Ant 2 (dBm) | MIMO (dBm) | Duty Factor <sup>1)</sup> (dB) | Result <sup>2)</sup> (dBm) |             |
| 802.11n HT20 | UNII-1 | 5 180           | 11.18                 | 9.81        | 13.56      | 0.30                           | 13.86                      | 24.00       |
|              |        | 5 200           | 11.26                 | 9.70        | 13.56      | 0.30                           | 13.86                      |             |
|              |        | 5 240           | 11.04                 | 9.66        | 13.41      | 0.30                           | 13.71                      |             |
|              | UNII-3 | 5 745           | 13.79                 | 13.66       | 16.74      | 0.30                           | 17.04                      | 30.00       |
|              |        | 5 785           | 12.95                 | 12.73       | 15.85      | 0.30                           | 16.15                      |             |
|              |        | 5 825           | 11.85                 | 11.78       | 14.83      | 0.30                           | 15.13                      |             |

## Note.


1. Please refer to the on page 7

2. Result(dB m) =  $10\log(10^{(\text{Ant1}/10)} + 10^{(\text{ant2}/10)})$  (dB m) + Duty Factor(dB)

*KCTL*

## 7.2. Maximum Power Spectral Density

### Test setup



### Limit

According to §15.407(a)

| Band    | EUT category |                                   | Limit          |
|---------|--------------|-----------------------------------|----------------|
| UNII-1  |              | Outdoor access point              | 17 dBm/MHz     |
|         |              | Indoor access point               |                |
|         |              | Fixed point-to-point access point |                |
|         | √            | Client device                     | 11 dBm/MHz     |
| UNII-2A |              |                                   | 11 dBm/MHz     |
| UNII-2C |              |                                   | 11 dBm/MHz     |
| UNII-3  |              | √                                 | 30 dBm/500 kHz |

### Notes:

1. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain if the antenna exceed 6 dBi.

### Test procedure

KDB 789033 D02 v02r01 - Section F  
 KDB 662911 D01 v02r01 - Section E). 2)  
 ANSI C63.10-2013

### Test settings

### Section F

The rules requires “maximum power spectral density” measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission. Refer to III.A for additional guidance for devices that use channel aggregation.

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power....” (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
2. search function on the instrument to find the peak of the spectrum and record its value.
3. adjustments to the peak value of the spectrum, if applicable:
  - a) If Method SA-2 or SA-2 Alternative was used, add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the peak of the spectrum.
  - b) If Method SA-3 Alternative was used and the linear mode was used in II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
4. The result is the Maximum PSD over 1 MHz reference bandwidth
5. For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the preceding procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference

bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set  $RBW \geq 1/T$ , where T is defined in II.B.I.a).
- b) Set  $VBW \geq 3 RBW$ .
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10 \log (500 \text{ kHz} / RBW)$  to the measured result, whereas RBW (<500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10 \log (1 \text{ MHz} / RBW)$  to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the II.F.5.c) and II.F.5.d), since RBW=100 kHz is available on nearly all spectrum analyzers.

KCTL

## Test results

### Ant1

| Test mode       | Band   | Frequency(MHz) | Peak Power Spectral Density |                                   |                               | Limit(dBm) |
|-----------------|--------|----------------|-----------------------------|-----------------------------------|-------------------------------|------------|
|                 |        |                | Reading(dBm)                | Duty Factor <sup>1)</sup><br>(dB) | Result <sup>2)</sup><br>(dBm) |            |
| 802.11a         | UNII-1 | 5 180          | -2.05                       | 0.15                              | -1.90                         | 11.00      |
|                 |        | 5 200          | -1.74                       | 0.15                              | -1.59                         |            |
|                 |        | 5 240          | -1.17                       | 0.15                              | -1.02                         |            |
|                 | UNII-3 | 5 745          | -1.22                       | 0.15                              | -1.07                         | 30.00      |
|                 |        | 5 785          | -1.72                       | 0.15                              | -1.57                         |            |
|                 |        | 5 825          | -2.21                       | 0.15                              | -2.06                         |            |
| 802.11n<br>HT20 | UNII-1 | 5 180          | -2.33                       | 0.16                              | -2.17                         | 11.00      |
|                 |        | 5 200          | -2.15                       | 0.16                              | -1.99                         |            |
|                 |        | 5 240          | -1.67                       | 0.16                              | -1.51                         |            |
|                 | UNII-3 | 5 745          | -1.29                       | 0.16                              | -1.13                         | 30.00      |
|                 |        | 5 785          | -2.19                       | 0.16                              | -2.03                         |            |
|                 |        | 5 825          | -1.77                       | 0.16                              | -1.61                         |            |

### Ant2

| Test mode       | Band   | Frequency(MHz) | Peak Power Spectral Density |                 |             | Limit |
|-----------------|--------|----------------|-----------------------------|-----------------|-------------|-------|
|                 |        |                | Reading(dBm)                | Duty Factor(dB) | Result(dBm) |       |
| 802.11a         | UNII-1 | 5 180          | -1.58                       | 0.15            | -1.43       | 11.00 |
|                 |        | 5 200          | -1.27                       | 0.15            | -1.12       |       |
|                 |        | 5 240          | -1.50                       | 0.15            | -1.35       |       |
|                 | UNII-3 | 5 745          | 0.20                        | 0.15            | 0.35        | 30.00 |
|                 |        | 5 785          | 0.08                        | 0.15            | 0.23        |       |
|                 |        | 5 825          | -0.52                       | 0.15            | -0.37       |       |
| 802.11n<br>HT20 | UNII-1 | 5 180          | -1.98                       | 0.16            | -1.82       | 11.00 |
|                 |        | 5 200          | -1.66                       | 0.16            | -1.50       |       |
|                 |        | 5 240          | -1.65                       | 0.16            | -1.49       |       |
|                 | UNII-3 | 5 745          | 0.20                        | 0.16            | 0.36        | 30.00 |
|                 |        | 5 785          | -0.75                       | 0.16            | -0.59       |       |
|                 |        | 5 825          | -0.79                       | 0.16            | -0.63       |       |

#### Note.

1. Please refer to the on page 6
2. Result(dB m) = Reading(dB m) + Duty Factor(dB)

## MIMO

| Test mode    | Band   | Frequency (MHz) | Peak Power Spectral Density |             |            |                                |                            | Limit |
|--------------|--------|-----------------|-----------------------------|-------------|------------|--------------------------------|----------------------------|-------|
|              |        |                 | Ant 1 (dBm)                 | Ant 2 (dBm) | MIMO (dBm) | Duty Factor <sup>1)</sup> (dB) | Result <sup>2)</sup> (dBm) |       |
| 802.11n HT20 | UNII-1 | 5 180           | -0.79                       | -2.38       | 1.50       | 0.30                           | 1.80                       | 11.00 |
|              |        | 5 200           | -0.90                       | -1.77       | 1.70       | 0.30                           | 2.00                       |       |
|              |        | 5 240           | -0.83                       | -1.70       | 1.77       | 0.30                           | 2.07                       |       |
|              | UNII-3 | 5 745           | -1.25                       | -0.91       | 1.93       | 0.30                           | 2.23                       | 30.00 |
|              |        | 5 785           | -1.99                       | -0.92       | 1.59       | 0.30                           | 1.89                       |       |
|              |        | 5 825           | -2.14                       | -1.02       | 1.47       | 0.30                           | 1.77                       |       |

### Note.

1. Please refer to the on page 6
2.  $\text{Result(dB m)} = 10\log(10^{(\text{Ant1}/10)} + 10^{(\text{ant2}/10)}) \text{ (dB m)} + \text{Duty Factor(dB)}$

*KCTL*

# KCTL Inc.



65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0033-B


Page (19) of (114)



## Ant1\_802.11a

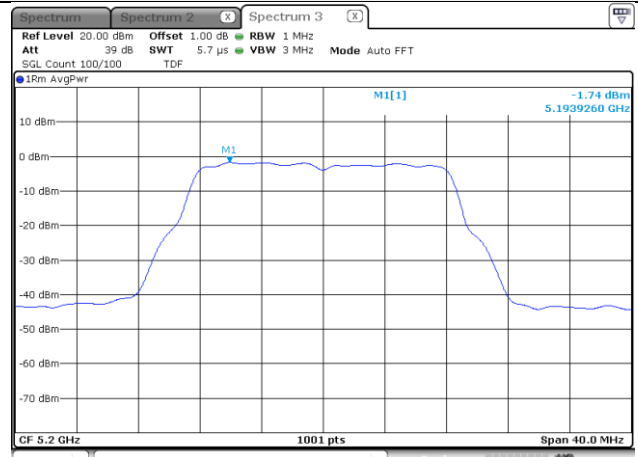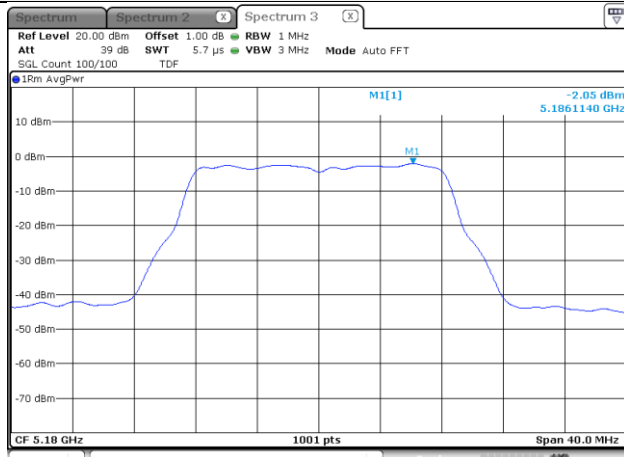


5 180 MHz

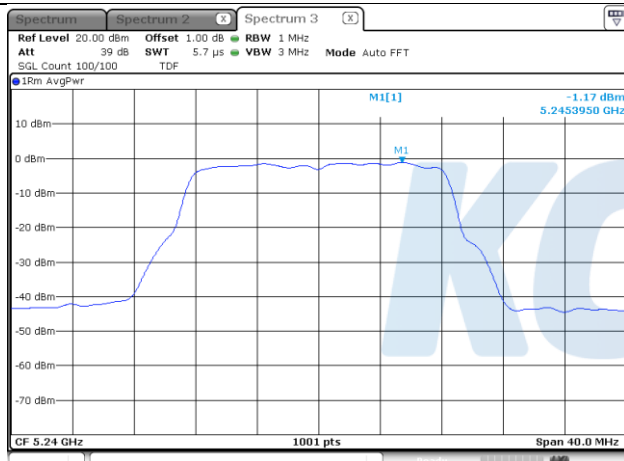


5 200 MHz



5 240 MHz

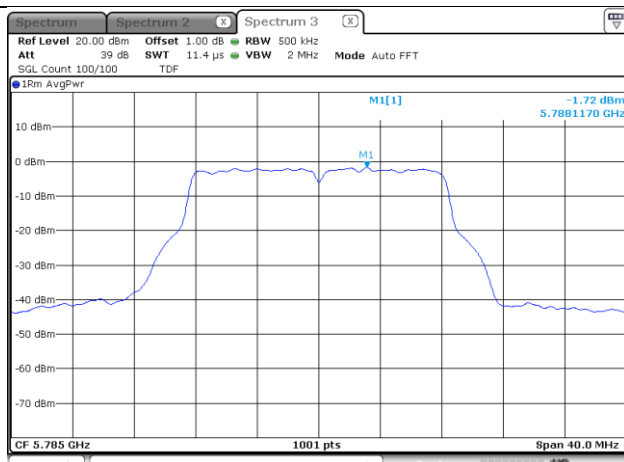

5 745 MHz

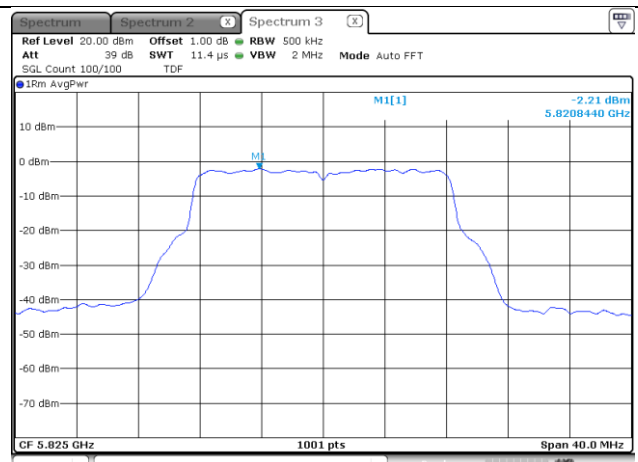

5 785 MHz

5 825 MHz

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

# KCTL Inc.



65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0033-B


Page (20) of (114)




## Ant1\_802.11n HT20

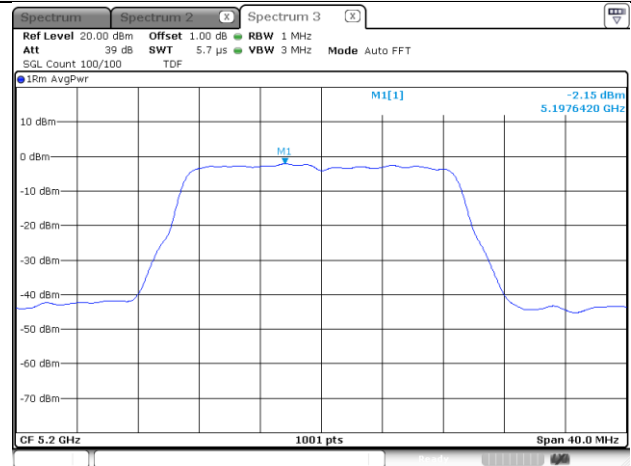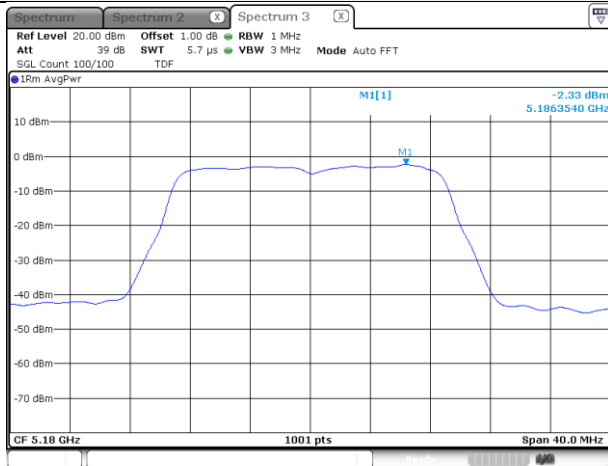


5 180 MHz

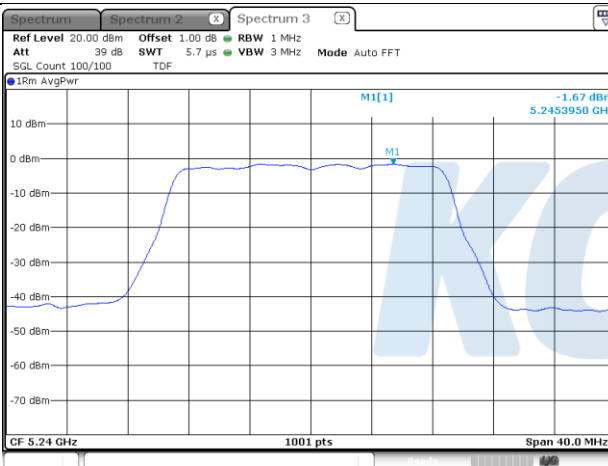


5 200 MHz

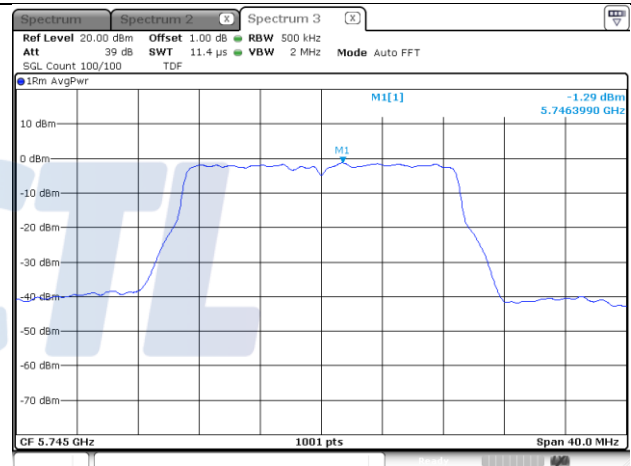

5 240 MHz

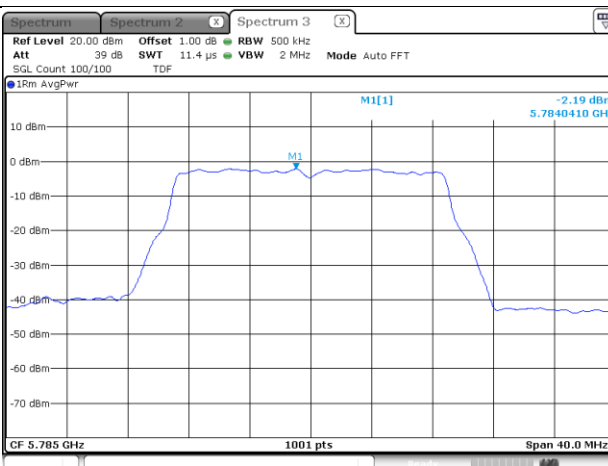

5 745 MHz

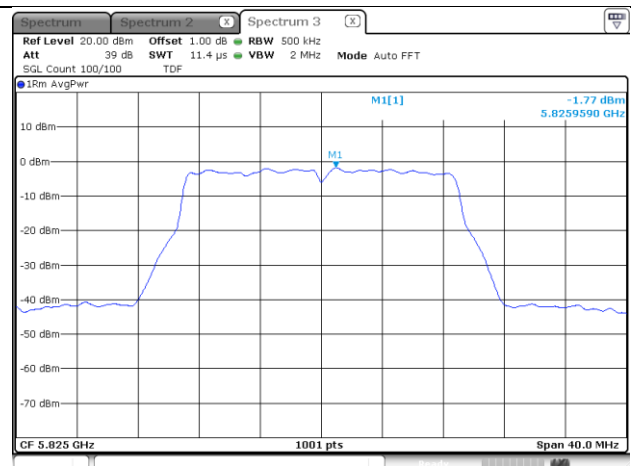

5 785 MHz

5 825 MHz

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0033-B


Page (21) of (114)




## Ant2\_802.11a

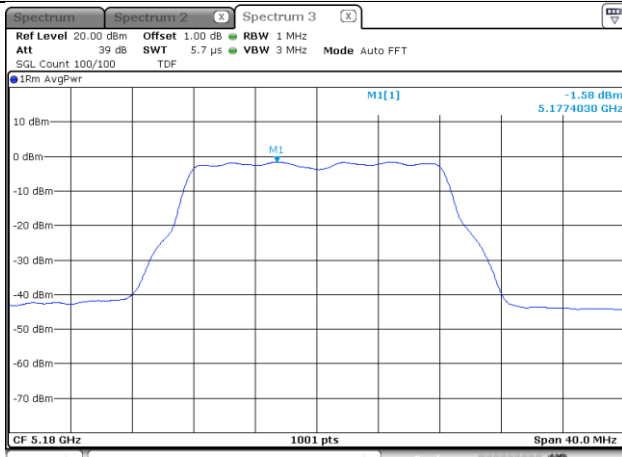


5 180 MHz

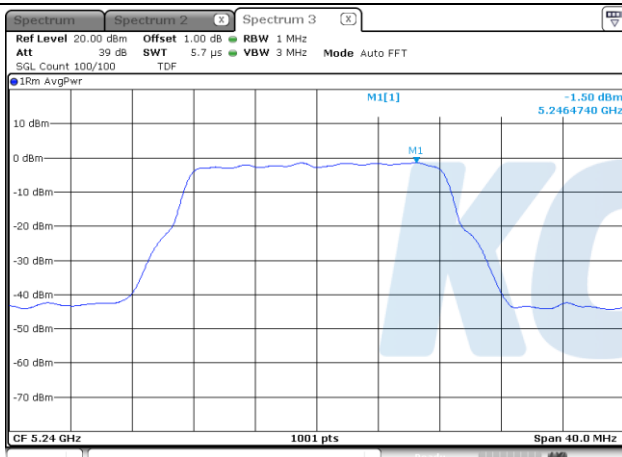


5 240 MHz

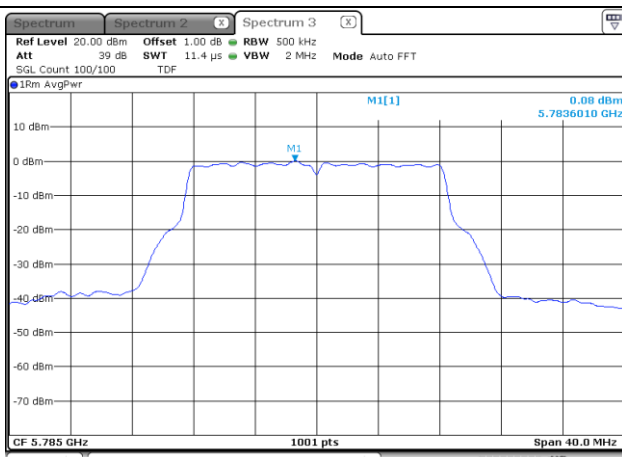


5 785 MHz

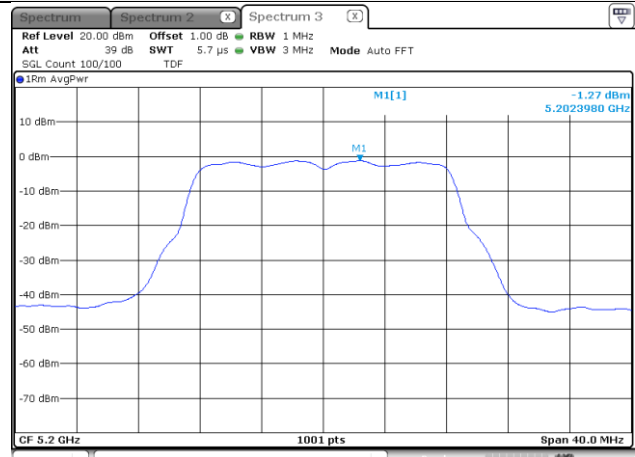

5 200 MHz

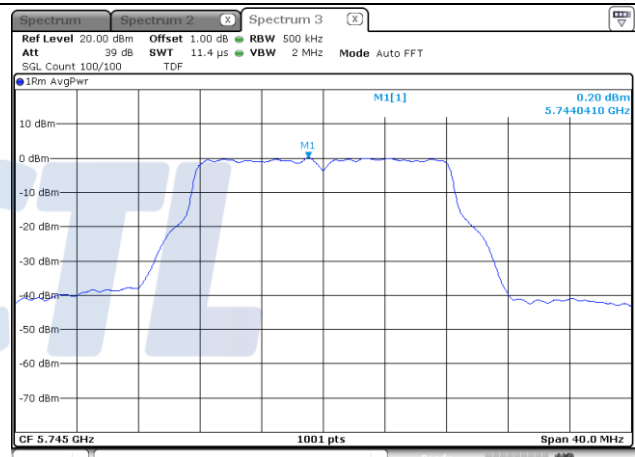

5 745 MHz

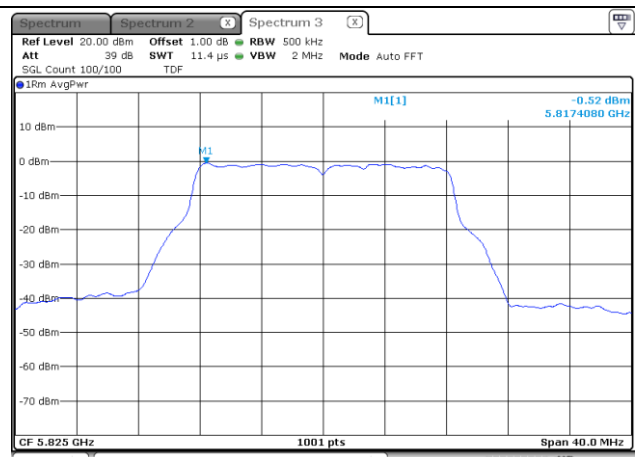

5 825 MHz

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

# KCTL Inc.



65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0033-B


Page (22) of (114)




## Ant2\_802.11n HT20

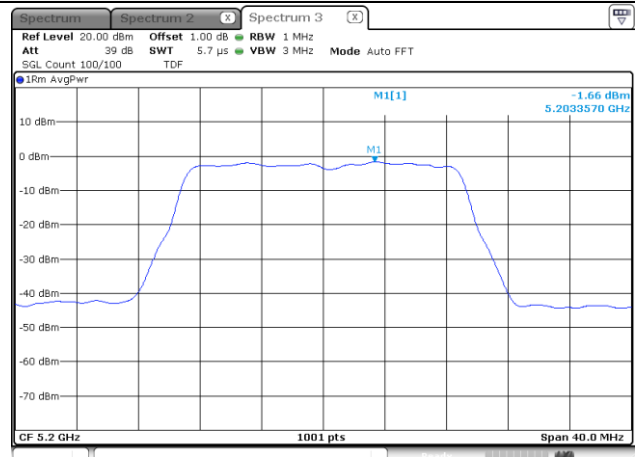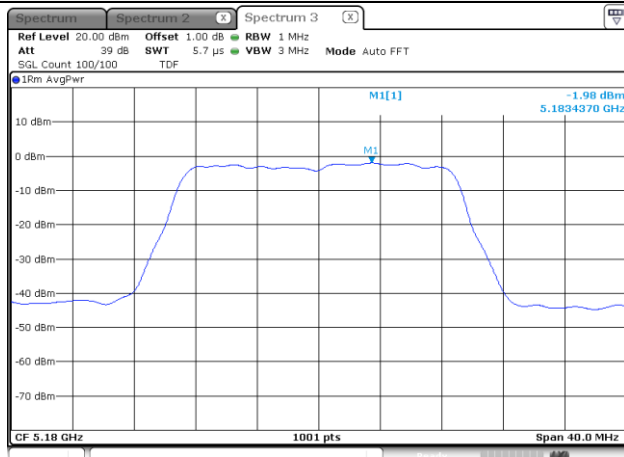


5 180 MHz

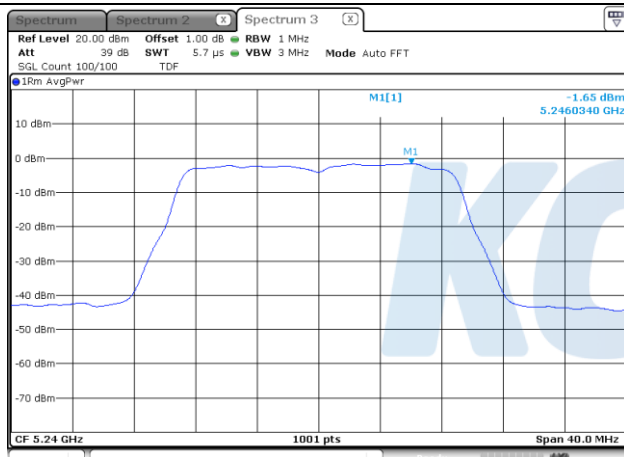


5 200 MHz

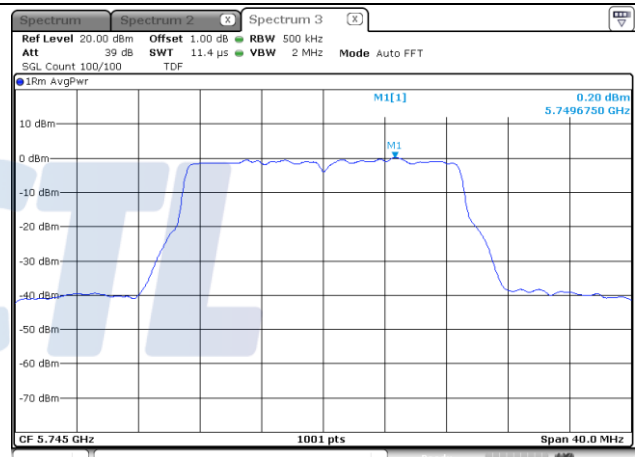

5 240 MHz

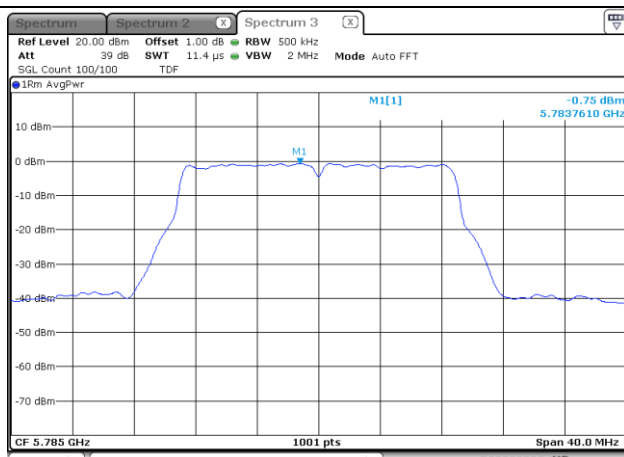

5 745 MHz

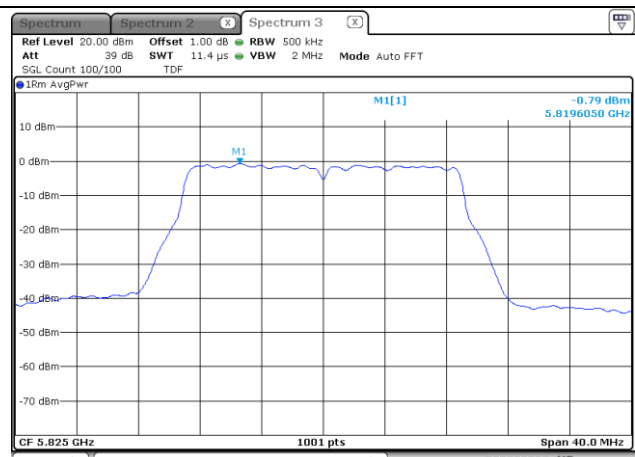

5 785 MHz

5 825 MHz

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

# KCTL Inc.



65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0033-B


Page (23) of (114)




## MIMO ant1\_802.11n HT20

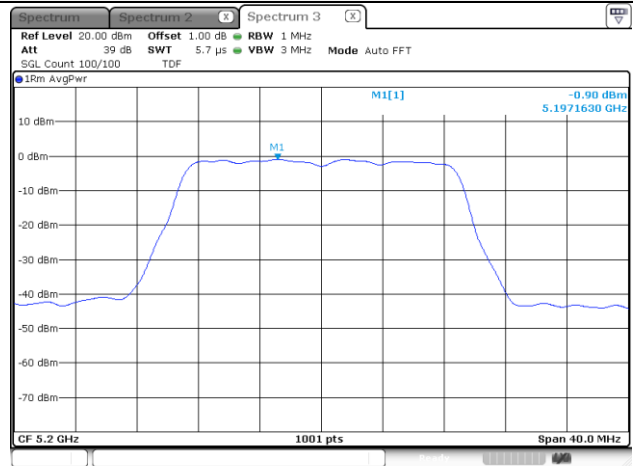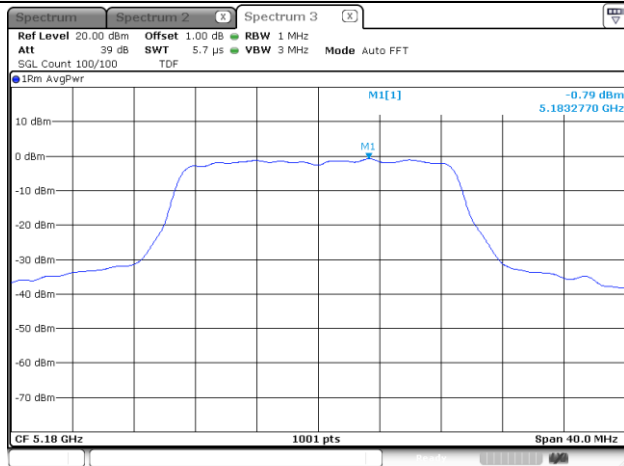


5 180 MHz

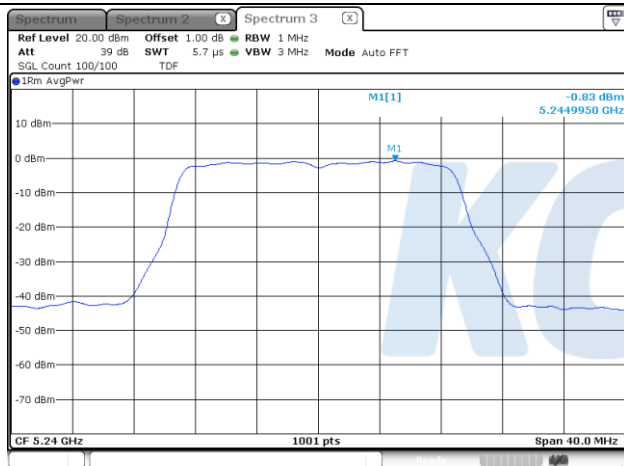


5 200 MHz

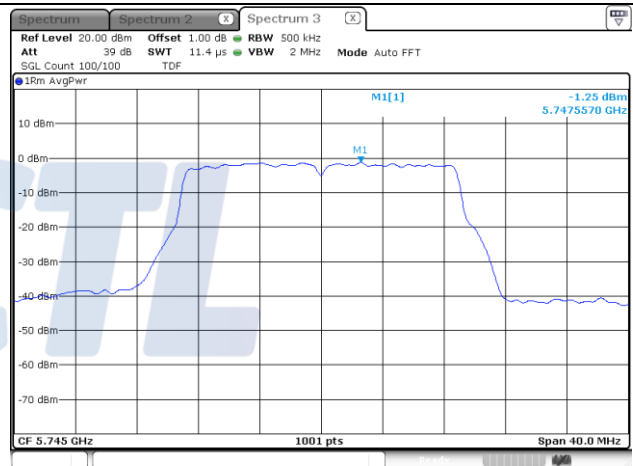

5 240 MHz

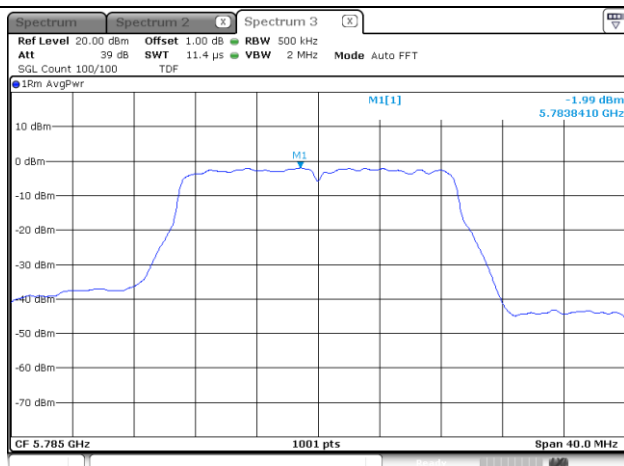

5 745 MHz

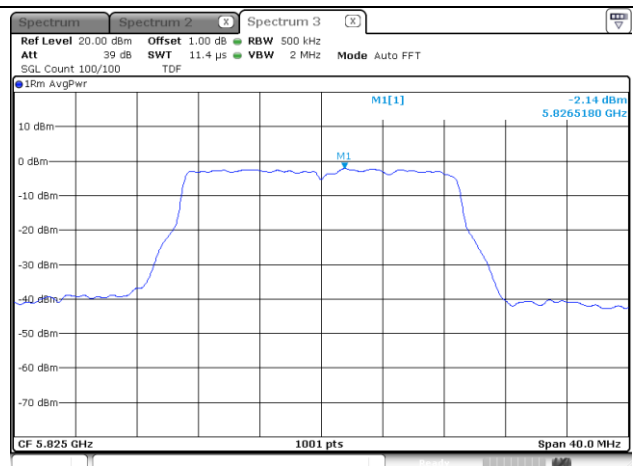

5 785 MHz

5 825 MHz

# KCTL Inc.



65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0033-B


Page (24) of (114)




## MIMO ant2\_802.11n HT20

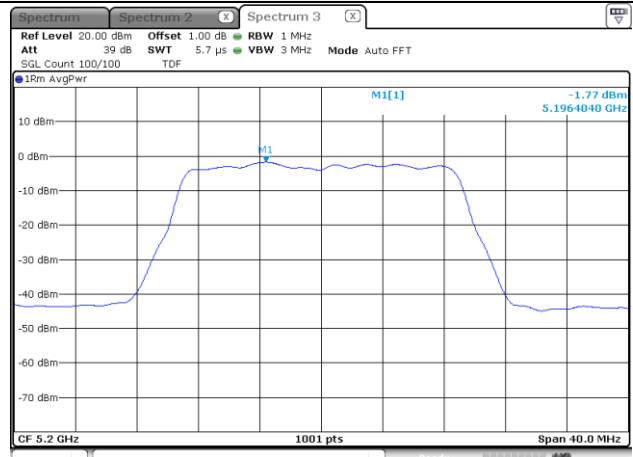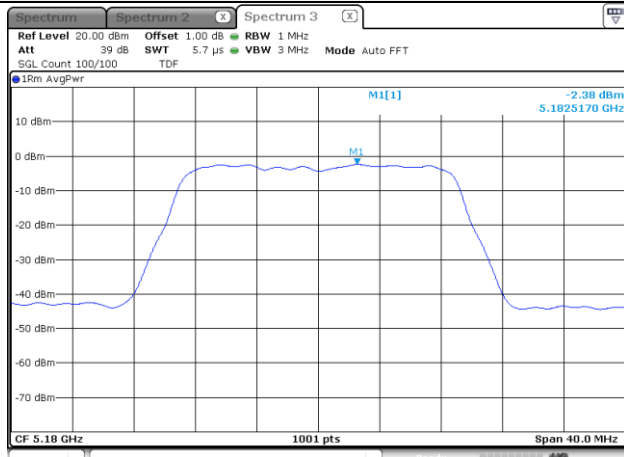


5 180 MHz

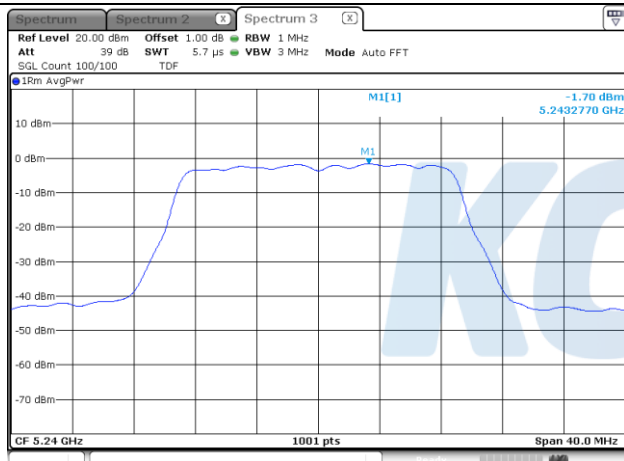


5 200 MHz

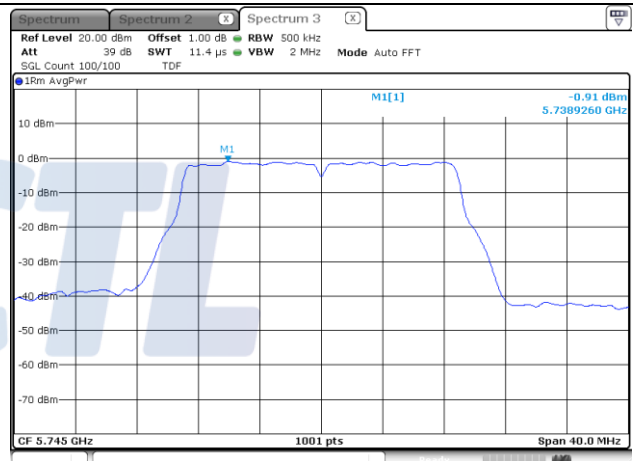

5 240 MHz

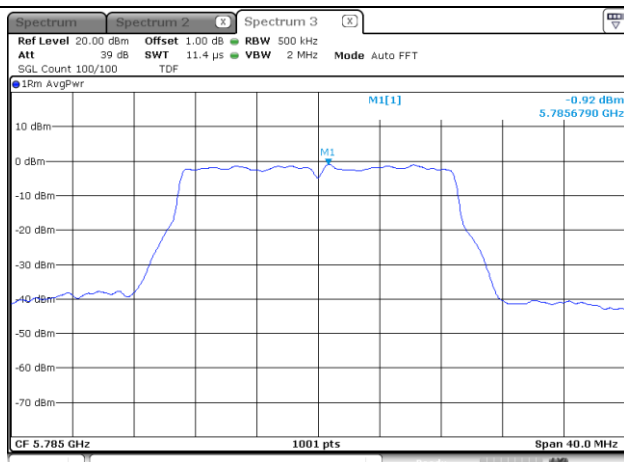

5 745 MHz

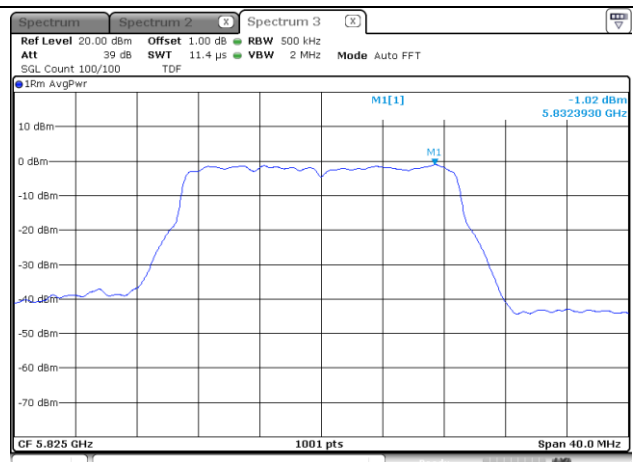

5 785 MHz


5 825 MHz

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

### 7.3. 26 dB Bandwidth & 99% Occupied Bandwidth

#### Test setup



#### Limit

N/A

#### Test procedure

##### **26dBbandwidth**

KDB 789033 D02 v02r01 - Section C.1

##### **99% bandwidth**

KDB 789033 D02 v02r01 - Section D

#### Test settings

##### **1. 26dB Bandwidth**

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

##### **2. 99% Occupied Bandwidth**

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1% to 5% of the OBW
4. Set VBW  $\geq 3 \times$  RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99% power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

## Test results

### Ant 1

| Test mode    | Frequency(MHz) | 26 dB bandwidth(MHz) | 99 % bandwidth(MHz) |
|--------------|----------------|----------------------|---------------------|
| 802.11a      | 5 180          | 21.53                | 17.08               |
|              | 5 200          | 21.48                | 17.08               |
|              | 5 240          | 21.53                | 17.13               |
|              | 5 745          | -                    | 17.25               |
|              | 5 785          | -                    | 17.25               |
|              | 5 825          | -                    | 17.19               |
| 802.11n HT20 | 5 180          | 21.77                | 18.12               |
|              | 5 200          | 21.65                | 18.23               |
|              | 5 240          | 21.59                | 18.12               |
|              | 5 745          | -                    | 18.18               |
|              | 5 785          | -                    | 18.23               |
|              | 5 825          | -                    | 18.35               |

### Ant 2

| Test mode    | Frequency(MHz) | 26 dB bandwidth(MHz) | 99 % bandwidth(MHz) |
|--------------|----------------|----------------------|---------------------|
| 802.11a      | 5 180          | 21.59                | 17.13               |
|              | 5 200          | 21.48                | 17.19               |
|              | 5 240          | 21.59                | 17.08               |
|              | 5 745          | -                    | 17.19               |
|              | 5 785          | -                    | 17.25               |
|              | 5 825          | -                    | 17.13               |
| 802.11n HT20 | 5 180          | 21.71                | 18.35               |
|              | 5 200          | 21.82                | 18.29               |
|              | 5 240          | 21.71                | 18.18               |
|              | 5 745          | -                    | 18.18               |
|              | 5 785          | -                    | 18.23               |
|              | 5 825          | -                    | 18.29               |

# MIMO

| Test mode    | Frequency(MHz) | 26 dB bandwidth(MHz) | 99 % bandwidth(MHz) |
|--------------|----------------|----------------------|---------------------|
| 802.11n HT20 | 5 180          | 21.78                | 18.35               |
|              | 5 200          | 21.66                | 18.12               |
|              | 5 240          | 21.86                | 18.12               |
|              | 5 745          | -                    | 18.12               |
|              | 5 785          | -                    | 18.12               |
|              | 5 825          | -                    | 18.18               |

# Note.

MIMO: in order to simplify the report, attached result & plots were only the worst case ant1.

*KCTL*

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)



Report No.:  
KR19-SRF0033-B

Page (28) of (114)

# KCTL


## 26 dB bandwidth(MHz)

### 802.11a\_ant1

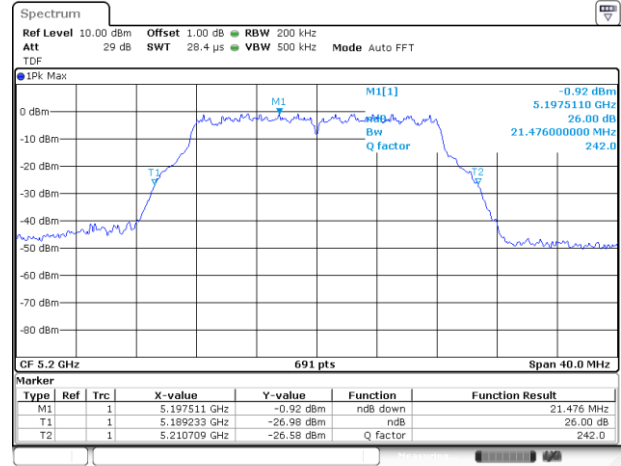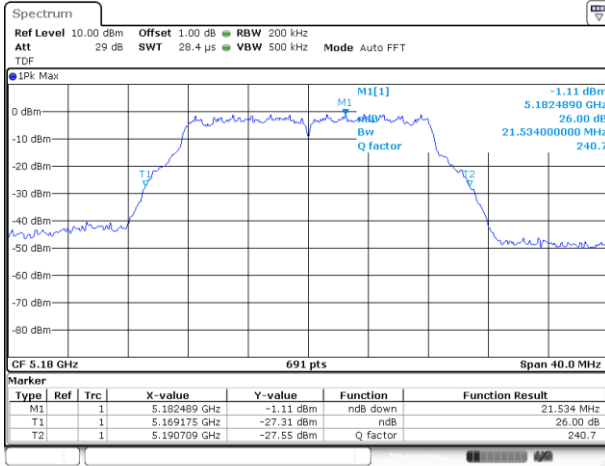

5 180 MHz

5 200 MHz

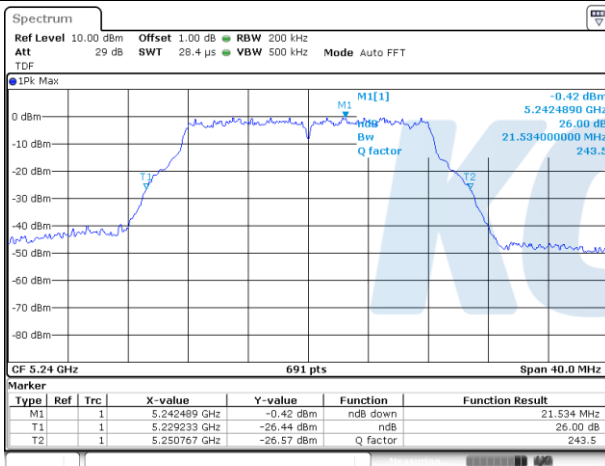

Blank

5 240 MHz

# KCTL Inc.



65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0033-B

Page (29) of (114)




## 802.11n HT20\_ant1

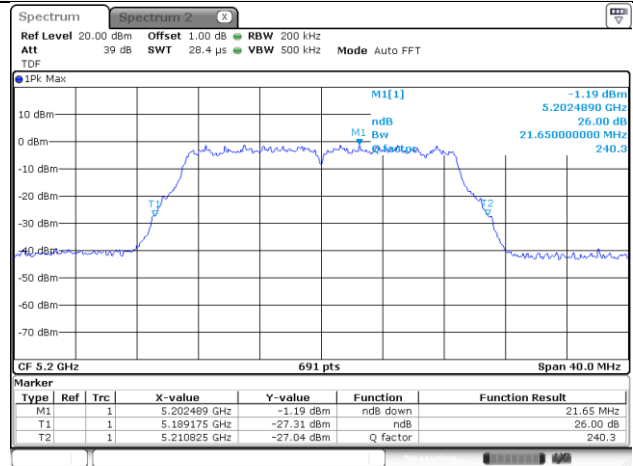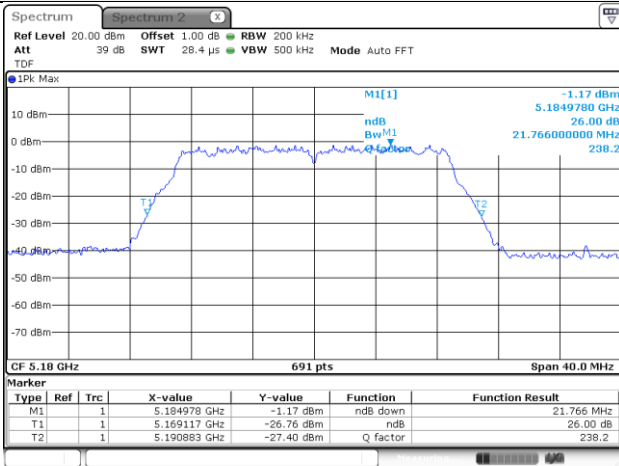

5 180 MHz

5 200 MHz

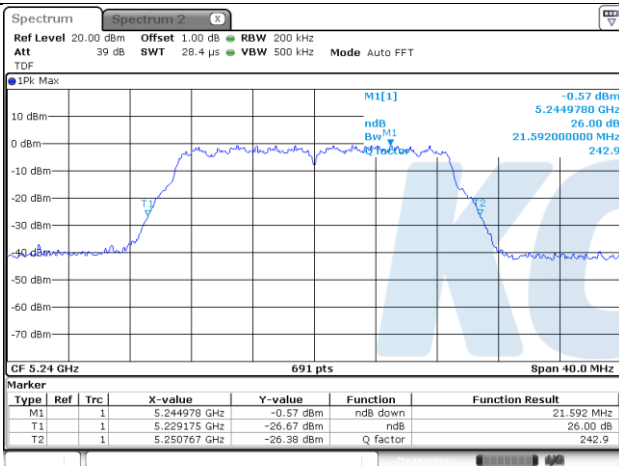

Blank

5 240 MHz

# KCTL Inc.



65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0033-B

Page (30) of (114)




## 802.11a\_ant2

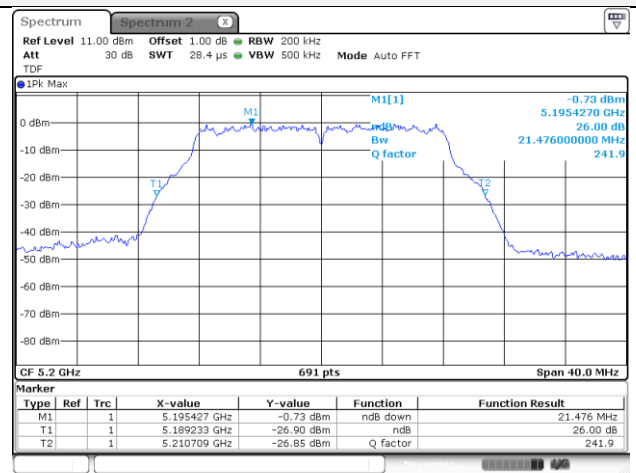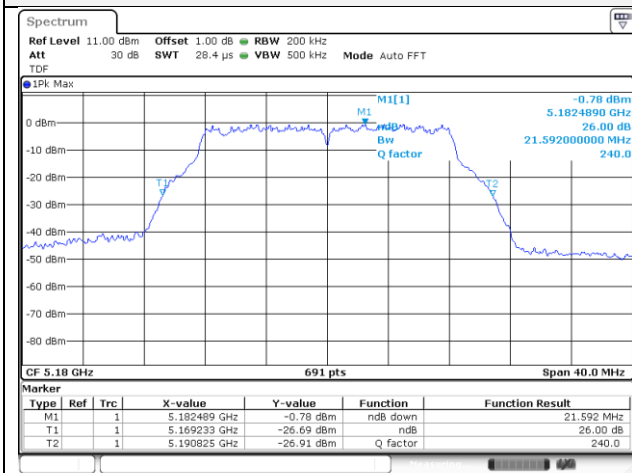

5 180 MHz

5 200 MHz

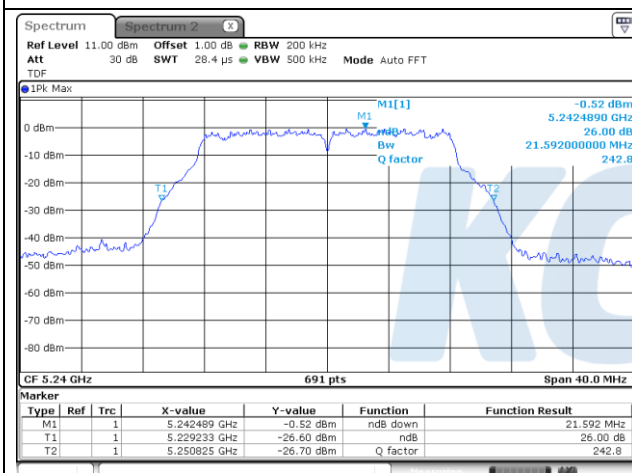

Blank

5 240 MHz

# KCTL Inc.



65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0033-B

Page (31) of (114)




## 802.11n HT20\_ant2

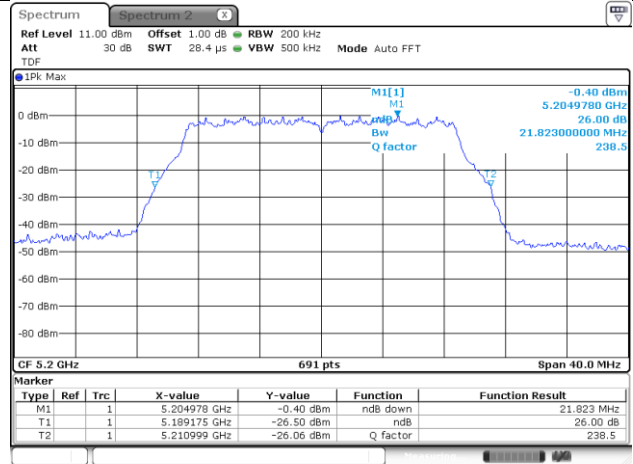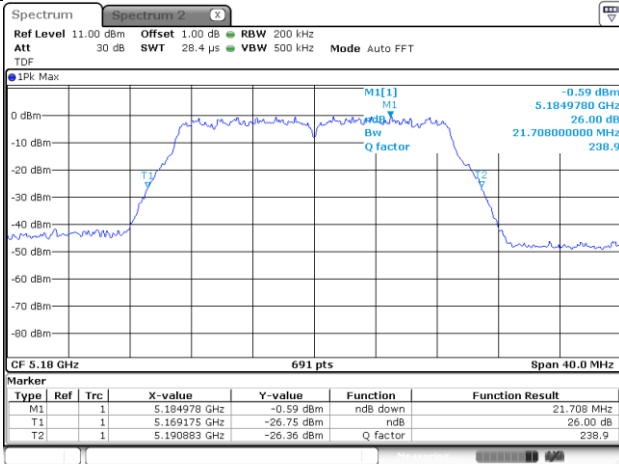

5 180 MHz

5 200 MHz

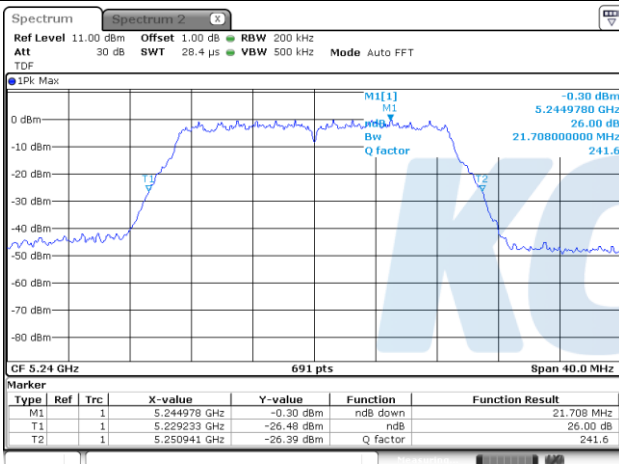

Blank

5 240 MHz

# KCTL Inc.



65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0033-B

Page (32) of (114)




## 802.11n HT20\_MIMO

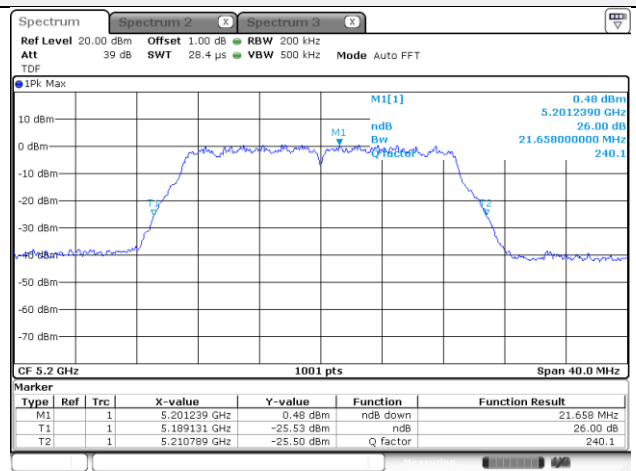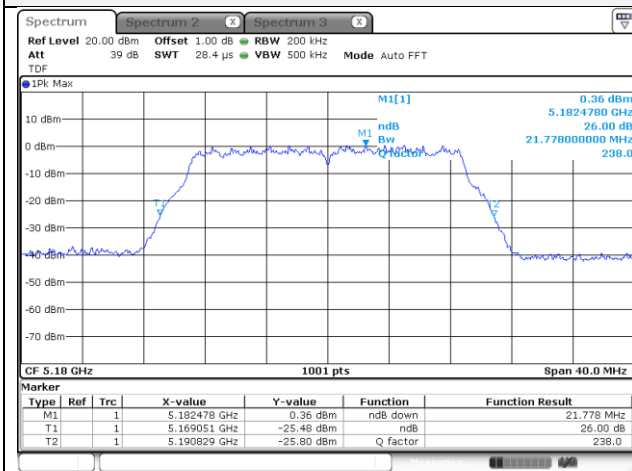

5 180 MHz

5 200 MHz

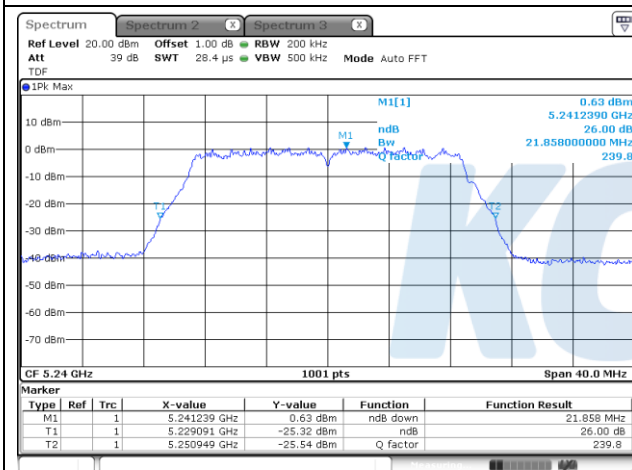

Blank

5 240 MHz

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR19-SRF0033-B

Page (33) of (114)


# KCTL

## 99 % bandwidth(MHz)


### 802.11a\_ant1

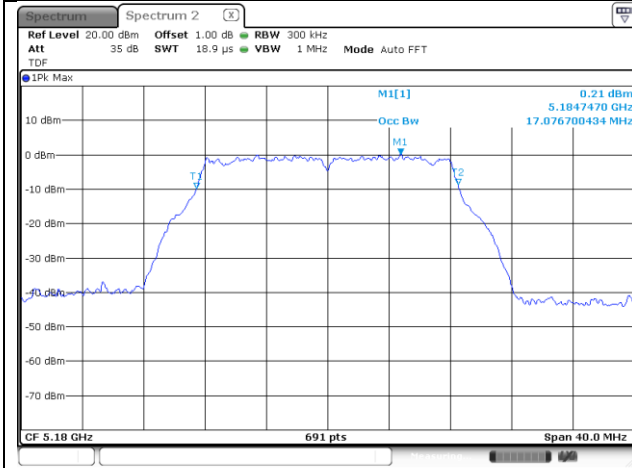


5 180 MHz

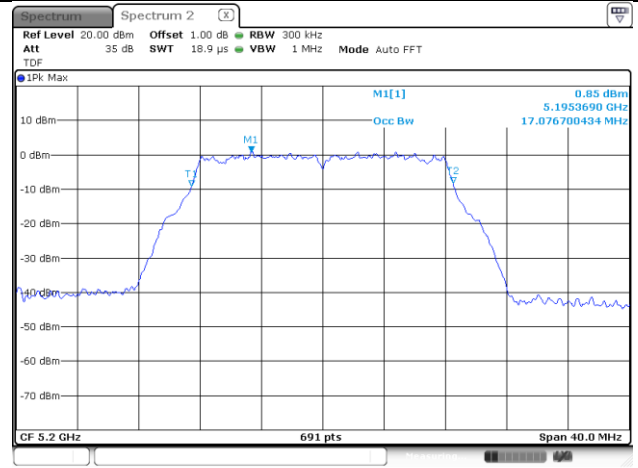


5 200 MHz

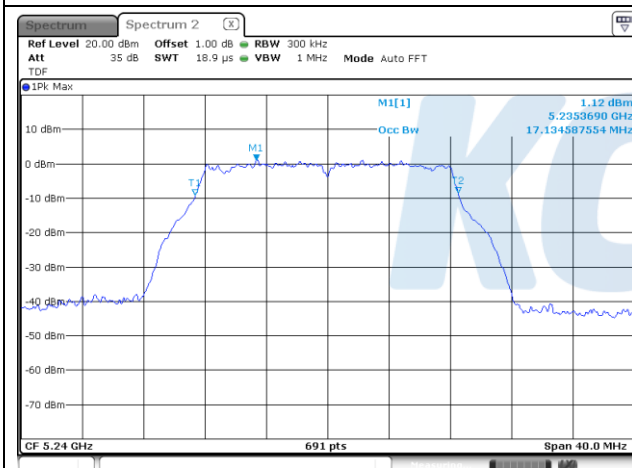


5 240 MHz

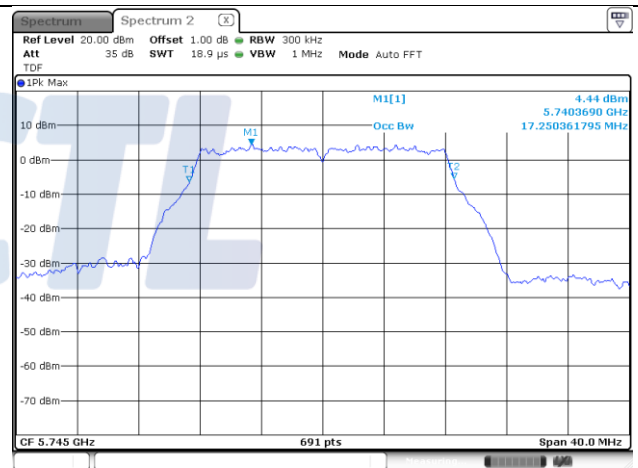

5 745 MHz

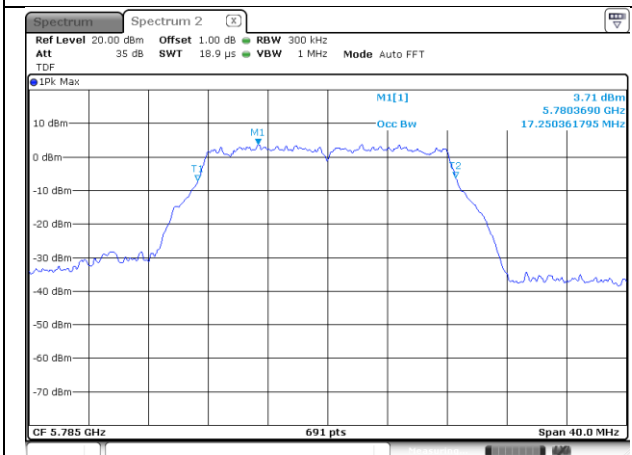

5 785 MHz

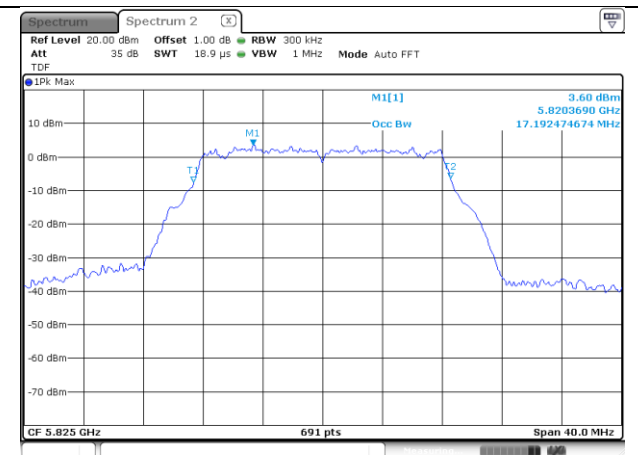

5 825 MHz

# KCTL Inc.



65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0033-B



Page (34) of (114)



## 802.11n HT20\_ant1

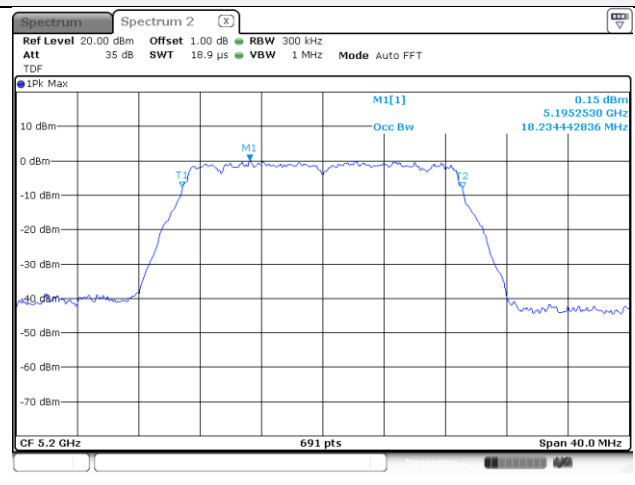
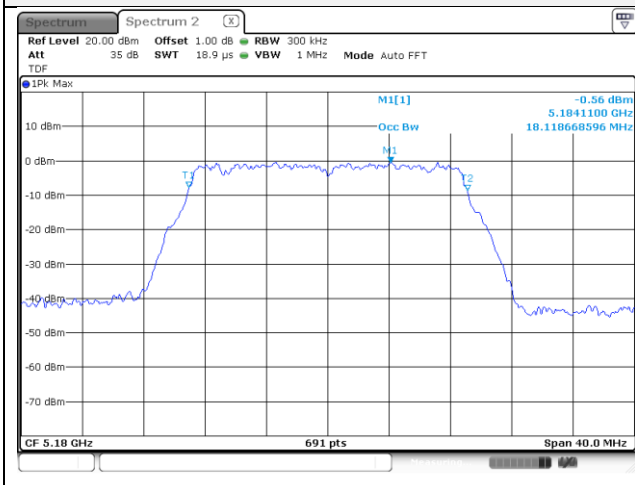


5 180 MHz

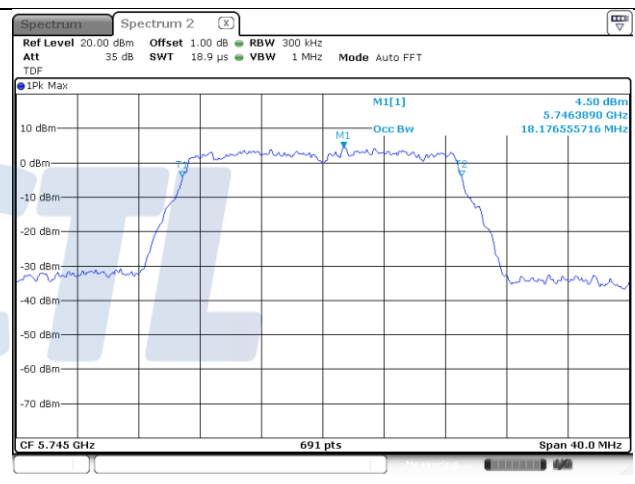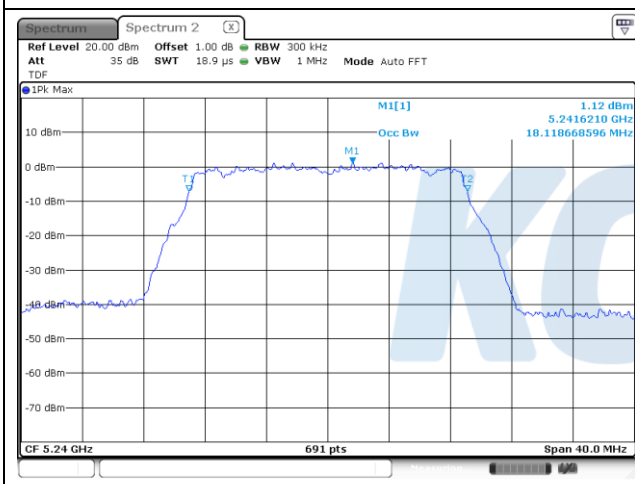

5 240 MHz

5 745 MHz

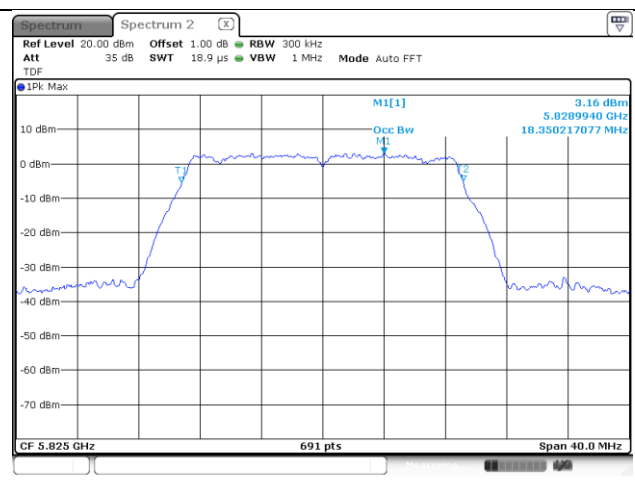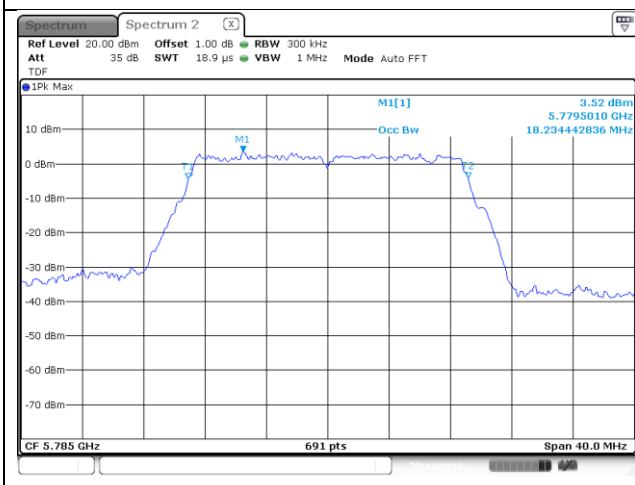

5 785 MHz

5 825 MHz

# KCTL Inc.



65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0033-B

Page (35) of (114)





## 802.11a\_ant2

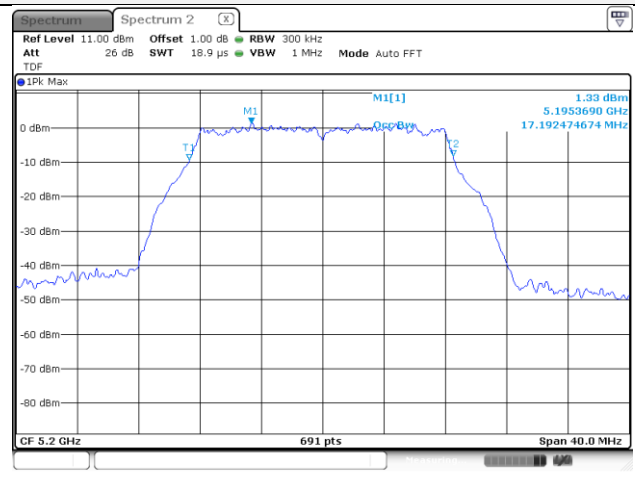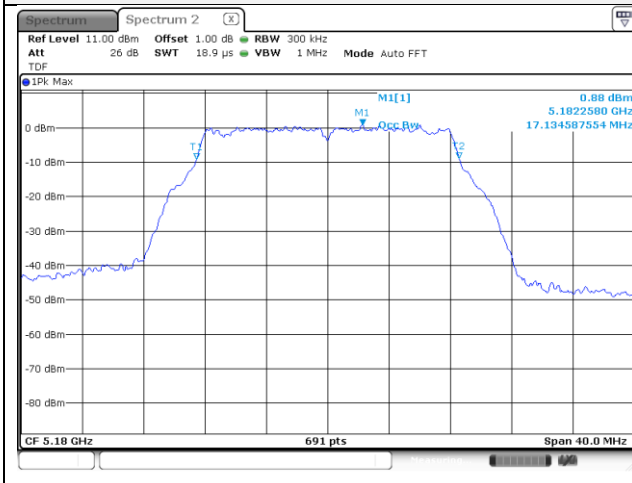



5 180 MHz

5 200 MHz

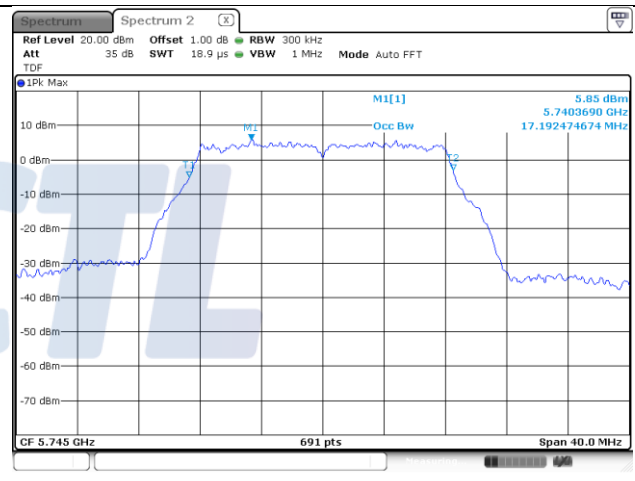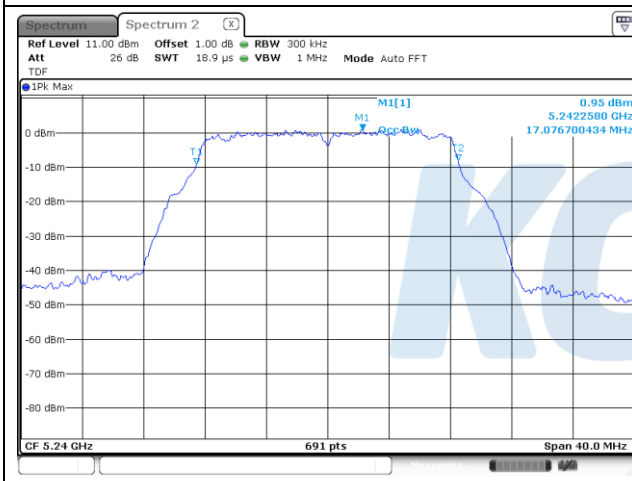

5 240 MHz

5 745 MHz

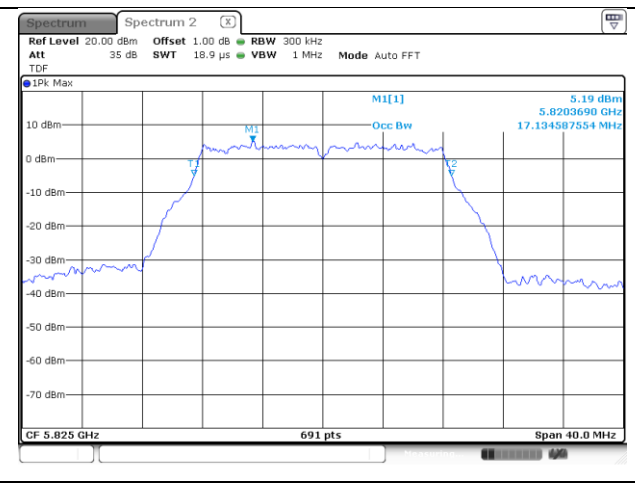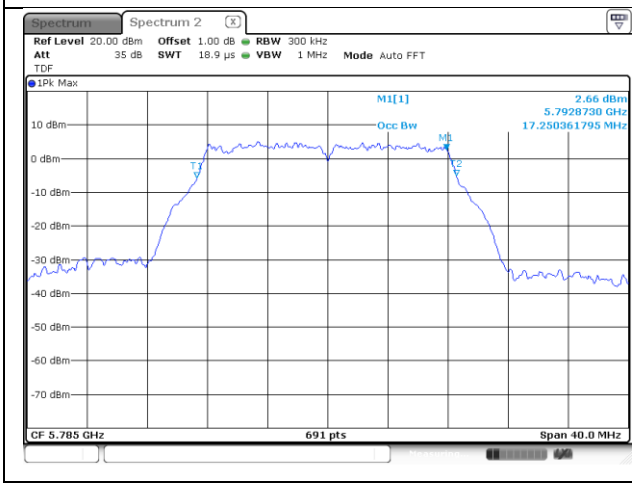

5 785 MHz

5 825 MHz

# KCTL Inc.



65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0033-B


Page (36) of (114)




## 802.11n HT20\_ant2

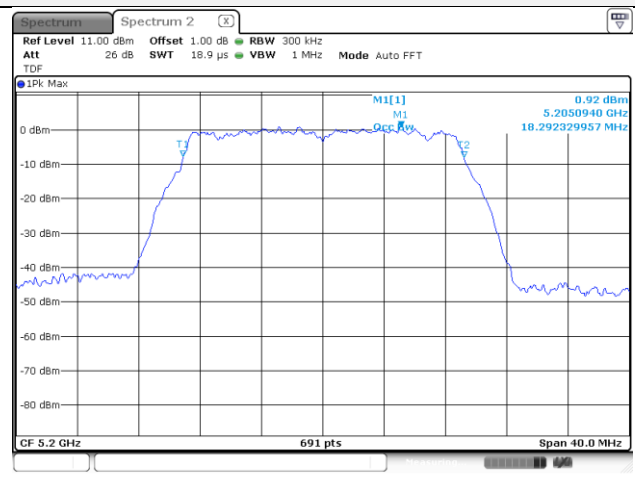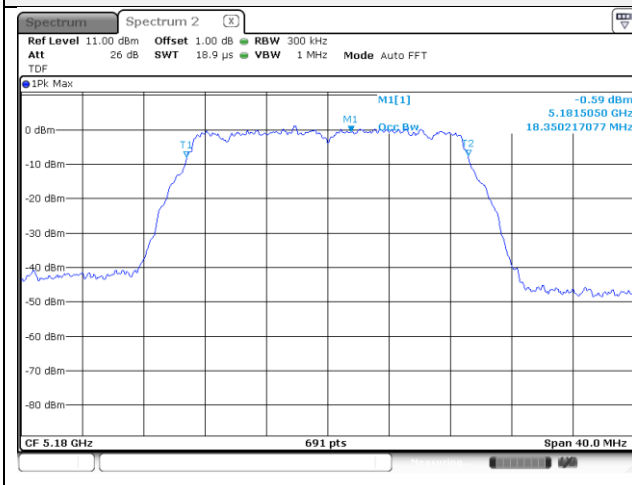


5 180 MHz

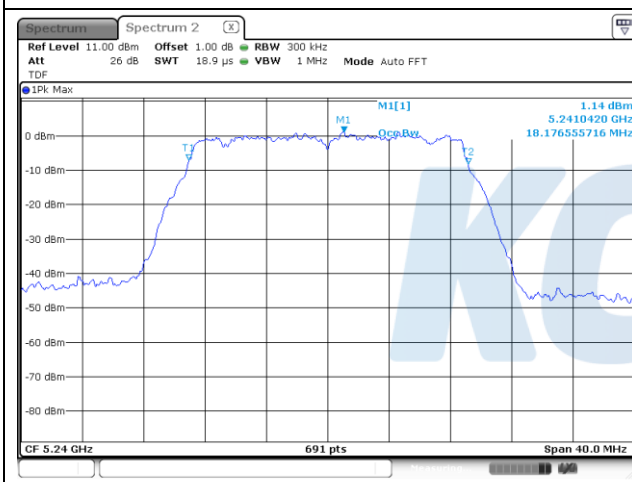


5 200 MHz

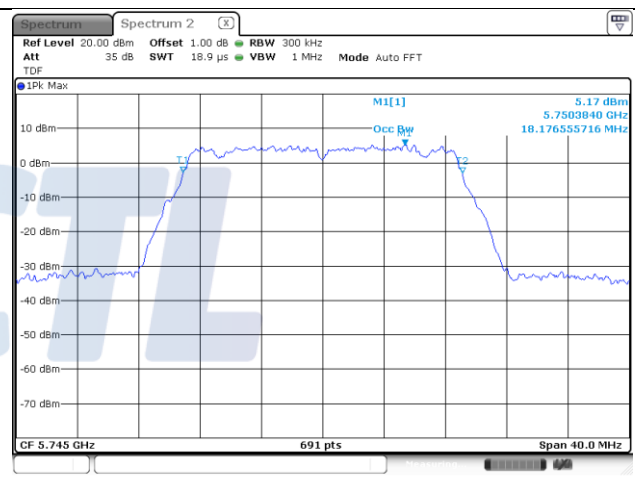

5 240 MHz

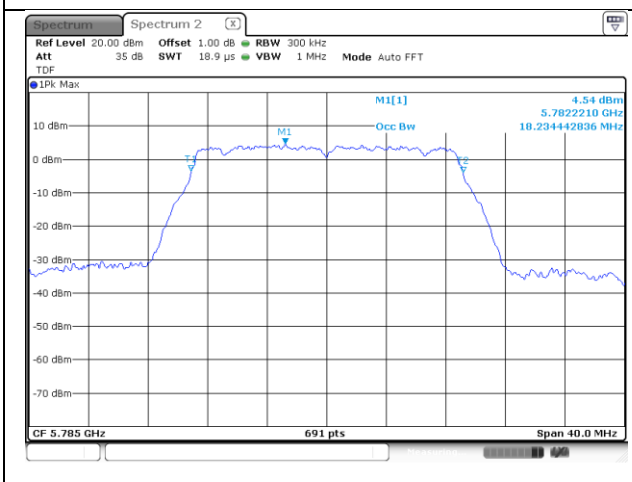

5 745 MHz

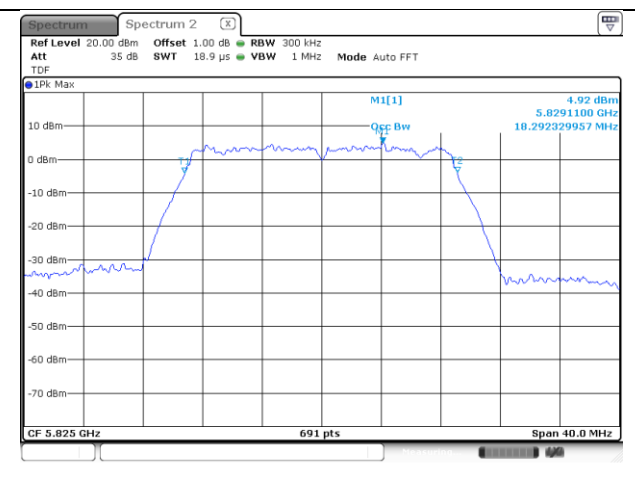

5 785 MHz

5 825 MHz

# KCTL Inc.



65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0033-B


Page (37) of (114)




## 802.11n HT20\_MIMO

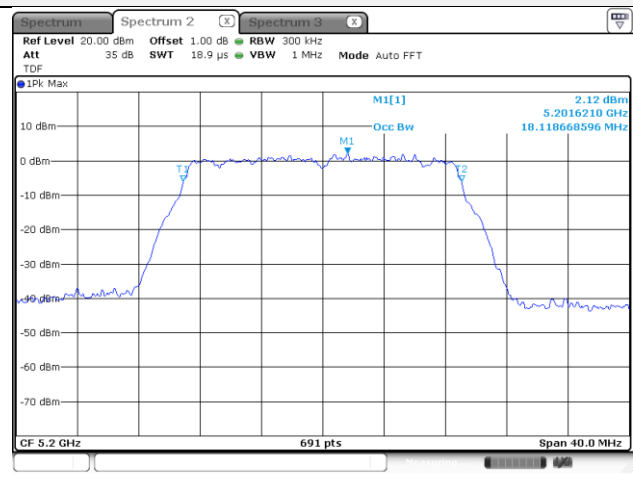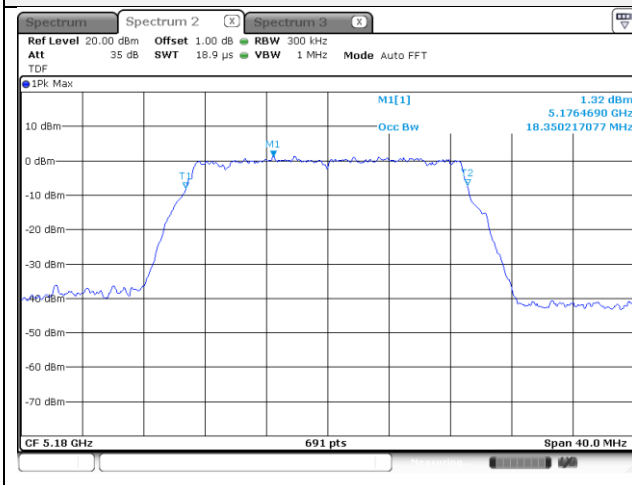


5 180 MHz

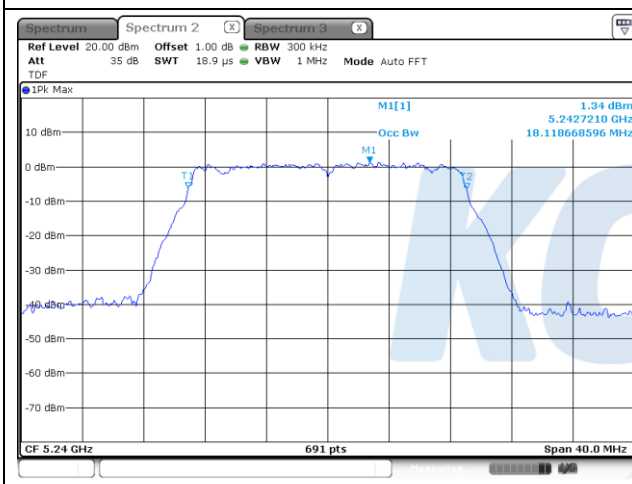


5 200 MHz

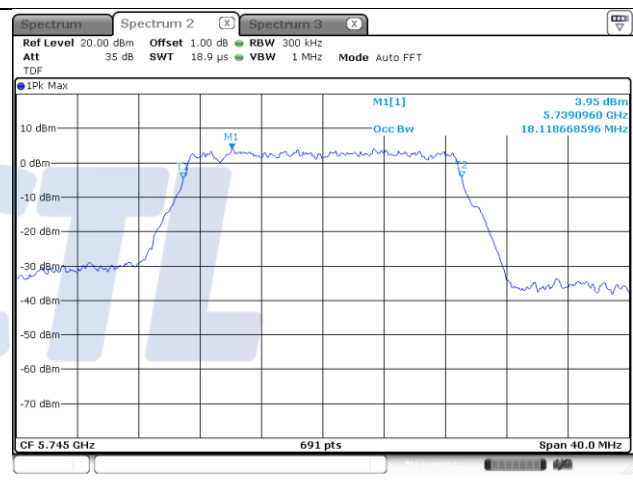

5 240 MHz

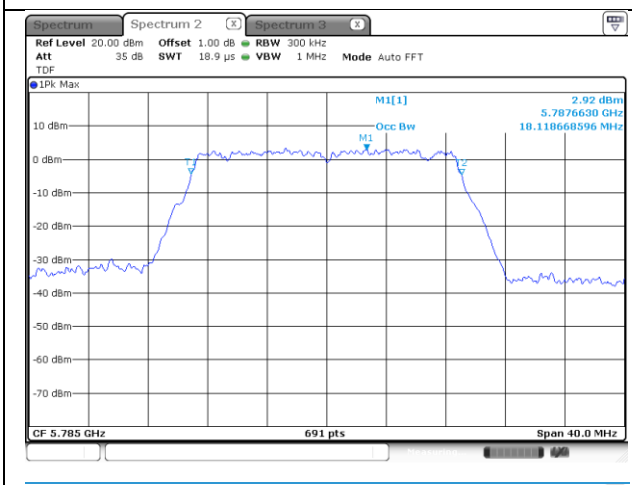

5 745 MHz

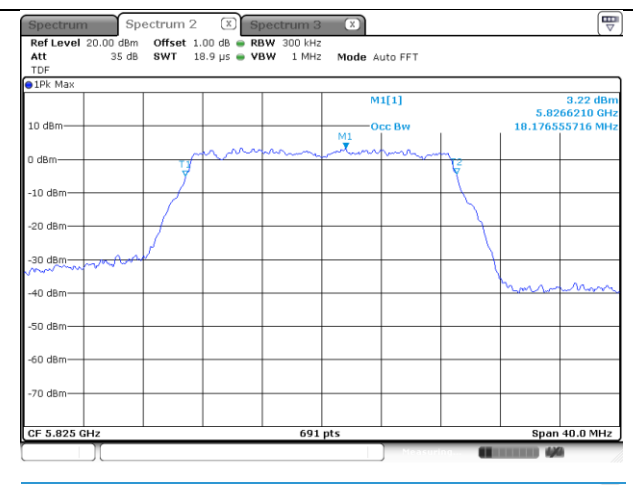


5 785 MHz

5 825 MHz

## 7.4. 6 dB Bandwidth

### Test setup



### Limit

Within the 5.725-585 GHz band, the minimum 6 dB bandwidth if U-NII devices shall be at least 500kHz

### Test procedure

KDB 789033 D02 v02r01 - Section C.2

### Test settings

#### 2. Minimum Emission Bandwidth for the band 5.725–5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725–5.85 GHz. The following procedure shall be used for measuring this bandwidth:

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

## Test results

### Ant 1

| Test mode    | Frequency(MHz) | 6 dB bandwidth(MHz) |
|--------------|----------------|---------------------|
| 802.11a      | 5 745          | 16.38               |
|              | 5 785          | 16.42               |
|              | 5 825          | 16.42               |
| 802.11n HT20 | 5 745          | 17.66               |
|              | 5 785          | 17.66               |
|              | 5 825          | 17.70               |

### Ant 2

| Test mode    | Frequency(MHz) | 6 dB bandwidth(MHz) |
|--------------|----------------|---------------------|
| 802.11a      | 5 745          | 16.37               |
|              | 5 785          | 16.42               |
|              | 5 825          | 16.42               |
| 802.11n HT20 | 5 745          | 17.66               |
|              | 5 785          | 17.66               |
|              | 5 825          | 17.66               |

### MIMO


| Test mode    | Frequency(MHz) | 26 dB bandwidth(MHz) |
|--------------|----------------|----------------------|
| 802.11n HT20 | 5 745          | 17.70                |
|              | 5 785          | 17.70                |
|              | 5 825          | 17.66                |

### Note.

MIMO: in order to simplify the report, attached result & plots were only the worst case ant1.

## 7.5. Frequency Stability

### Test setup

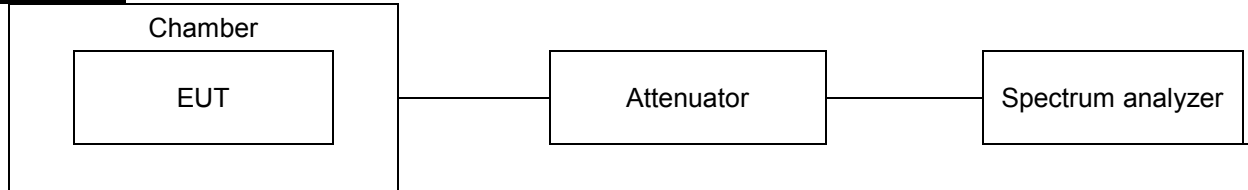

### Limit

N/A

### Test procedure

ANSI C63.10-2013, clause 6.8.1

### Test settings

The frequency stability of the carrier frequency of the intentional radiator shall be maintained all conditions of normal operation as specified in the users manual. The frequency stability shall be maintained over a temperature variation of specified in the users manual at normal supply voltage, and over a variation in the primary supply voltage of specified in the users manual of the rated supply voltage at a temperature of 20 °C. For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further requirement to vary supply voltage.

1. The EUT was placed inside the environmental test chamber.
2. The temperature was incremented by 10 °C intervals from lowest temperature.
3. Each increase step of temperature measured the frequency.
4. The test temperature was set 20°C and the supply voltage was then adjusted on the EUT from 85 % to 115% and the frequency record.

### Test results

Test mode : UNII-1  
 Frequency(Hz) : 5 180 000 000  
 Antenna port : 1

| Voltage (%) | Voltage (V) | Temp (°C) | Measured Frequency (Hz) | Frequency Error (Hz) | Deviation |            |
|-------------|-------------|-----------|-------------------------|----------------------|-----------|------------|
|             |             |           |                         |                      | (ppm)     | (%)        |
| 100         | 12.00       | +21(Ref)  | 5 179 984 170           | -15 830              | -3.1      | -0.000 306 |
|             |             | 0         | 5 180 016 329           | 16 329               | 3.2       | 0.000 315  |
|             |             | +10       | 5 180 016 329           | 16 329               | 3.2       | 0.000 315  |
|             |             | +20       | 5 179 992 382           | -7 618               | -1.5      | -0.000 147 |
|             |             | +30       | 5 179 987 811           | -12 189              | -2.4      | -0.000 235 |
|             |             | +40       | 5 179 981 892           | -18 108              | -3.5      | -0.000 350 |
| 85          | 10.20       | +21(Ref)  | 5 179 983 947           | -16 053              | -3.1      | -0.000 310 |
| 115         | 13.80       | +21(Ref)  | 5 179 984 028           | -15 972              | -3.1      | -0.000 308 |


Test mode : UNII-3  
 Frequency(Hz) : 5 745 000 000  
 Antenna port : 1

| Voltage (%) | Voltage (V) | Temp (°C) | Measured Frequency (Hz) | Frequency Error (Hz) | Deviation |            |
|-------------|-------------|-----------|-------------------------|----------------------|-----------|------------|
|             |             |           |                         |                      | (ppm)     | (%)        |
| 100         | 12.00       | +21(Ref)  | 5 744 974 563           | -25 437              | -4.4      | -0.000 443 |
|             |             | 0         | 5 745 012 147           | 12 147               | 2.1       | 0.000 211  |
|             |             | +10       | 5 745 008 791           | 8 791                | 1.5       | 0.000 153  |
|             |             | +20       | 5 744 989 950           | -10 050              | -1.8      | -0.000 175 |
|             |             | +30       | 5 744 979 018           | -20 982              | -3.7      | -0.000 365 |
|             |             | +40       | 5 744 977 762           | -22 238              | -3.9      | -0.000 387 |
| 85          | 10.20       | +21(Ref)  | 5 744 974 263           | -25 737              | -4.5      | -0.000 448 |
| 115         | 13.80       | +21(Ref)  | 5 744 974 446           | -25 554              | -4.5      | -0.000 445 |


## 7.6. Spurious Emission, Band Edge and Restricted bands

### Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions

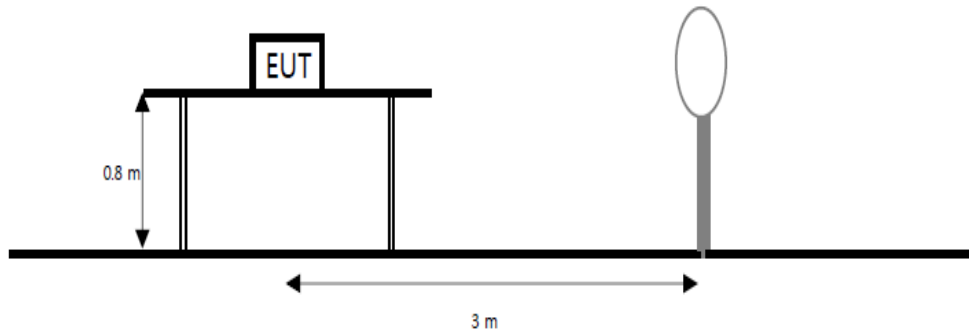

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

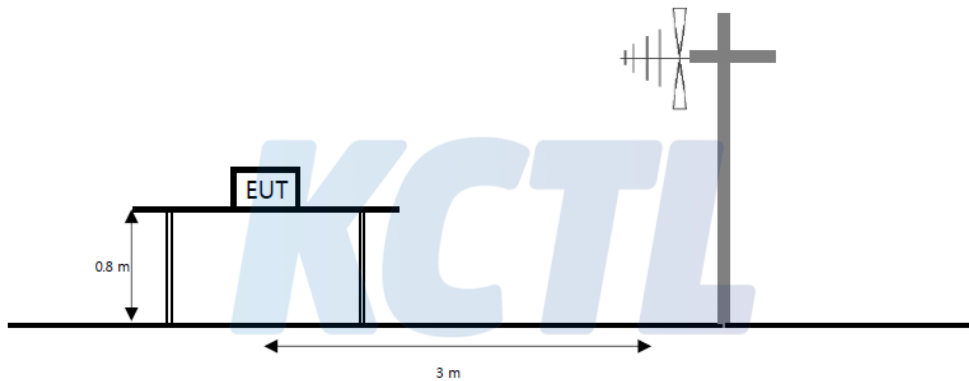

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

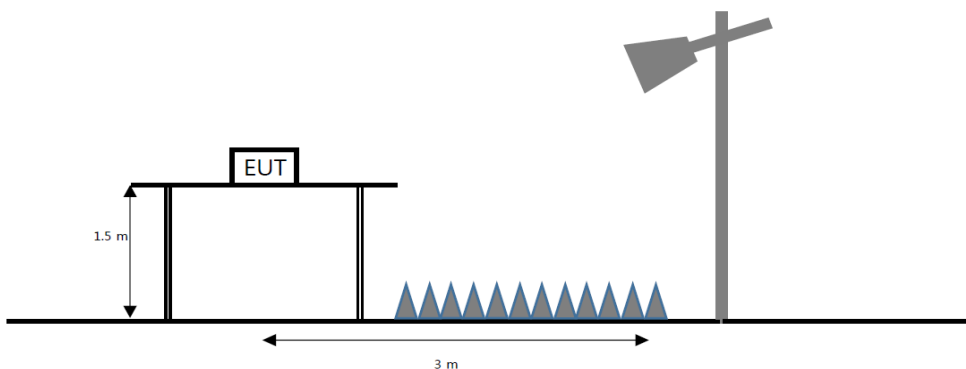

### Limit

According to section 15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field strength ( $\mu V/m$ ) | Measurement distance (m) |
|-----------------|------------------------------|--------------------------|
| 0.009 - 0.490   | 2 400/F(kHz)                 | 300                      |
| 0.490 - 1.705   | 24 000/F(kHz)                | 30                       |
| 1.705 - 30      | 30                           | 30                       |
| 30 - 88         | 100**                        | 3                        |
| 88 - 216        | 150**                        | 3                        |
| 216 - 960       | 200**                        | 3                        |
| Above 960       | 500                          | 3                        |

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

According to section 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                   | MHz                   | MHz               | GHz           |
|-----------------------|-----------------------|-------------------|---------------|
| 0.009 - 0.110         | 16.42 - 16.423        | 399.9 - 410       | 4.5 - 5.15    |
| 0.495 - 0.505         | 16.694 75 - 16.695 25 | 608 - 614         | 5.35 - 5.46   |
| 2.173 5 - 2.190 5     | 16.804 25 - 16.804 75 | 960 - 1 240       | 7.25 - 7.75   |
| 4.125 - 4.128         | 25.5 - 25.67          | 1 300 - 1 427     | 8.025 - 8.5   |
| 4.177 25 - 4.177 75   | 37.5 - 38.25          | 1 435 - 1 626.5   | 9.0 - 9.2     |
| 4.207 25 - 4.207 75   | 73 - 74.6             | 1 645.5 - 1 646.5 | 9.3 - 9.5     |
| 6.215 - 6.218         | 74.8 - 75.2           | 1 660 - 1 710     | 10.6 - 12.7   |
| 6.267 75 - 6.268 25   | 108 - 121.94          | 1 718.8 - 1 722.2 | 13.25 - 13.4  |
| 6.311 75 - 6.312 25   | 123 - 138             | 2 200 - 2 300     | 14.47 - 14.5  |
| 8.291 - 8.294         | 149.9 - 150.05        | 2 310 - 2 390     | 15.35 - 16.2  |
| 8.362 - 8.366         | 156.524 75 - 156.525  | 2 483.5 - 2 500   | 17.7 - 21.4   |
| 8.376 25 - 8.386 75   | 25                    | 2 690 - 2 900     | 22.01 - 23.12 |
| 8.414 25 - 8.414 75   | 156.7 - 156.9         | 3 260 - 3 267     | 23.6 - 24.0   |
| 12.29 - 12.293        | 162.012 5 - 167.17    | 3 332 - 3 339     | 31.2 - 31.8   |
| 12.519 75 - 12.520 25 | 167.72 - 173.2        | 3 345.8 - 3 358   | 36.43 - 36.5  |
| 12.576 75 - 12.577 25 | 240 - 285             | 3 600 - 4 400     | Above 38.6    |
| 13.36 - 13.41         | 322 - 335.4           |                   |               |

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in section 15.35 apply to these measurements.

According to section 15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

**KCTL**

**Test procedure**

ANSI C63.10-2013

KDB 789033 D2 v02r01 – Section G

**Test settings****Peak field strength measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW  $\geq$  (3 $\times$ RBW)
4. Detector = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow sweeps to continue until the trace stabilizes

**Table. RBW as a function of frequency**

| Frequency           | RBW                |
|---------------------|--------------------|
| 9 kHz to 150 kHz    | 200 Hz to 300 Hz   |
| 0.15 MHz to 30 MHz  | 9 kHz to 10 kHz    |
| 30 MHz to 1 000 MHz | 100 kHz to 120 kHz |
| > 1 000 MHz         | 1 MHz              |

**Average field strength measurements****Trace averaging with continuous EUT transmission at full power**

If the EUT can be configured or modified to transmit continuously ( $D \geq 98\%$ ), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

1. RBW = 1 MHz (unless otherwise specified).
2. VBW  $\geq$  (3 $\times$ RBW).
3. Detector = RMS (power averaging), if  $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$ . Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
4. Averaging type = power (i.e., rms):
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.

**Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction**

If continuous transmission of the EUT ( $D \geq 98\%$ ) cannot be achieved and the duty cycle is constant (duty cycle variations are less than  $\pm 2\%$ ), then the following procedure shall be used:

1. The EUT shall be configured to operate at the maximum achievable duty cycle.
2. Measure the duty cycle D of the transmitter output signal as described in 11.6.
3. RBW = 1 MHz (unless otherwise specified).
4. VBW  $\geq$  [3  $\times$  RBW].
5. Detector = RMS (power averaging), if  $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$ . Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this

condition cannot be satisfied, then the detector mode shall be set to peak.

6. Averaging type = power (i.e., rms):
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
7. Sweep time = auto.
8. Perform a trace average of at least 100 traces.
9. A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (rms) mode was used in step f), then the applicable correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle.
  - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is  $[20 \log (1 / D)]$ , where D is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous ( $D \geq 98\%$ ) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

**Notes:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz ( $\geq 1/T$ ) for Average detection (AV) at frequency above 1 GHz. (where T = pulse width)
2.  $f < 30$  MHz, extrapolation factor of 40 dB/decade of distance.  $F_d = 40 \log(D_m/D_s)$   
 $f \geq 30$  MHz, extrapolation factor of 20 dB/decade of distance.  $F_d = 20 \log(D_m/D_s)$   
Where:  
 $F_d$  = Distance factor in dB  
 $D_m$  = Measurement distance in meters  
 $D_s$  = Specification distance in meters
3. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or  $F_d$ (dB)
4. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
5. Average test would be performed if the peak result were greater than the average limit.
6. <sup>1)</sup> mean is restricted band.
7. According to part 15.31(f)(2), an extrapolation factor of 40 dB/decade is applied because measured distance of radiated emission is 3 m.

**KCTL Inc.**


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0033-B

Page (47) of (114)

**Test results (Below 30 MHz) – Worst case: 802.11n HT20\_MIMO\_UNII-3 Lowest frequency**

| Frequency                                                      | Pol.  | Reading  | Cable Loss | Amp Gain | Antenna Factor | DCCF | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|------------|----------|----------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)       | (dB)     | (dB)           | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| No spurious emissions were detected within 20 dB of the limit. |       |          |            |          |                |      |            |            |        |

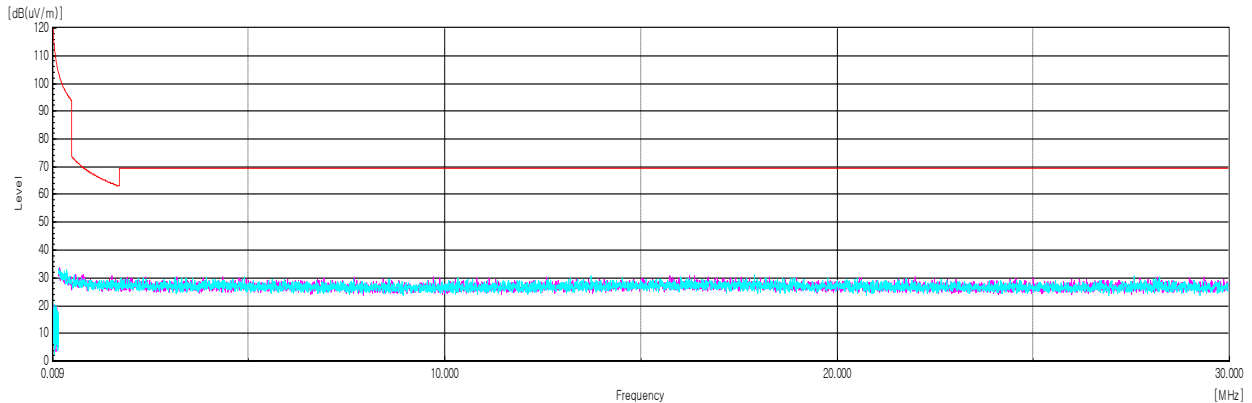**Horizontal/Vertical**

KCTL

**KCTL Inc.**


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0033-B

Page (48) of (114)

**Test results (Below 1 000 MHz) – Worst case: 802.11n HT20\_MIMO\_UNII-3 Lowest frequency**

| Frequency       | Pol.  | Reading  | Cable Loss | Amp Gain | Antenna Factor | DCCF | Result     | Limit      | Margin |
|-----------------|-------|----------|------------|----------|----------------|------|------------|------------|--------|
| (MHz)           | (V/H) | (dB(μV)) | (dB)       | (dB)     | (dB)           | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| Quasi peak data |       |          |            |          |                |      |            |            |        |
| 35.82           | V     | 38.30    | 1.19       | -36.01   | 21.72          | -    | 25.20      | 40.00      | 14.80  |
| 97.294          | V     | 42.80    | 2.11       | -33.02   | 16.11          | -    | 28.00      | 43.50      | 15.50  |
| 191.99          | H     | 41.30    | 3.05       | -30.51   | 15.26          | -    | 29.10      | 43.50      | 14.40  |
| 259.284         | H     | 42.50    | 3.58       | -31.57   | 18.39          | -    | 32.90      | 46.00      | 13.10  |
| 396.054         | H     | 38.10    | 4.54       | -30.64   | 21.60          | -    | 33.60      | 46.00      | 12.40  |
| 570.533         | V     | 31.60    | 5.55       | -29.87   | 24.22          | -    | 31.50      | 46.00      | 14.50  |

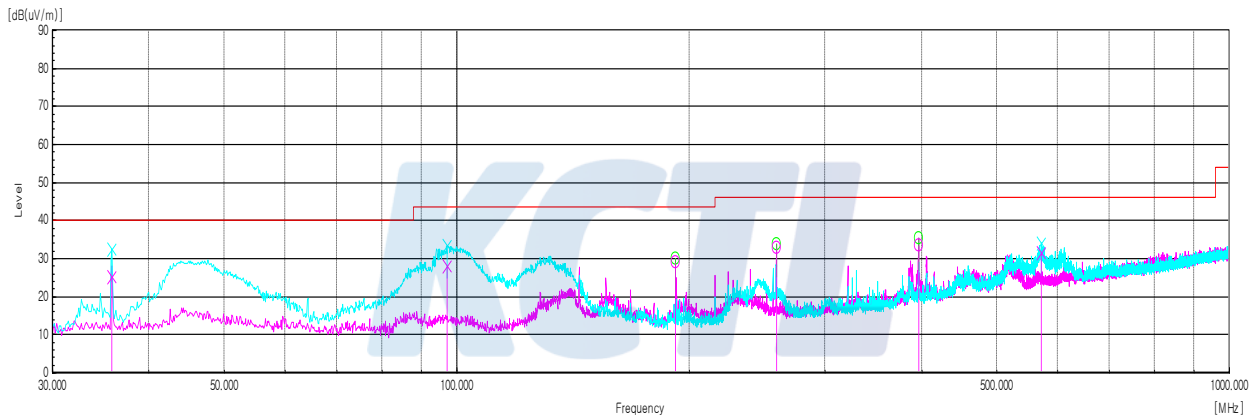**Horizontal/Vertical**

**KCTL Inc.**


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)




Report No.:  
KR19-SRF0033-B

Page (49) of (114)

**Test results (Above 1 000 MHz)****802.11a Ant1 UNII-1****Lowest Channel (5 180 MHz)**

| Frequency                                                      | Pol.  | Reading  | Cable Loss | Amp Gain | Antenna Factor | DCCF | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|------------|----------|----------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)       | (dB)     | (dB)           | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                               |       |          |            |          |                |      |            |            |        |
| 1 188.03 <sup>1)</sup>                                         | H     | 79.68    | 2.65       | -60.18   | 24.55          | -    | 46.70      | 74.00      | 27.30  |
| 1 980.20                                                       | V     | 72.93    | 3.41       | -59.35   | 27.72          | -    | 44.71      | 68.20      | 23.49  |
| 2 480.19                                                       | V     | 71.85    | 3.77       | -59.57   | 28.71          | -    | 44.76      | 68.20      | 23.44  |
| 5 138.41 <sup>1)</sup>                                         | V     | 43.55    | 5.56       | -32.59   | 33.11          | -    | 49.63      | 74.00      | 24.37  |
| 10 357.17                                                      | V     | 60.47    | 7.63       | -60.10   | 37.29          | -    | 45.29      | 68.20      | 22.91  |
| 15 536.13 <sup>1)</sup>                                        | H     | 55.84    | 11.24      | -60.05   | 40.06          | -    | 47.09      | 74.00      | 26.91  |
| <b>Average Data</b>                                            |       |          |            |          |                |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit. |       |          |            |          |                |      |            |            |        |



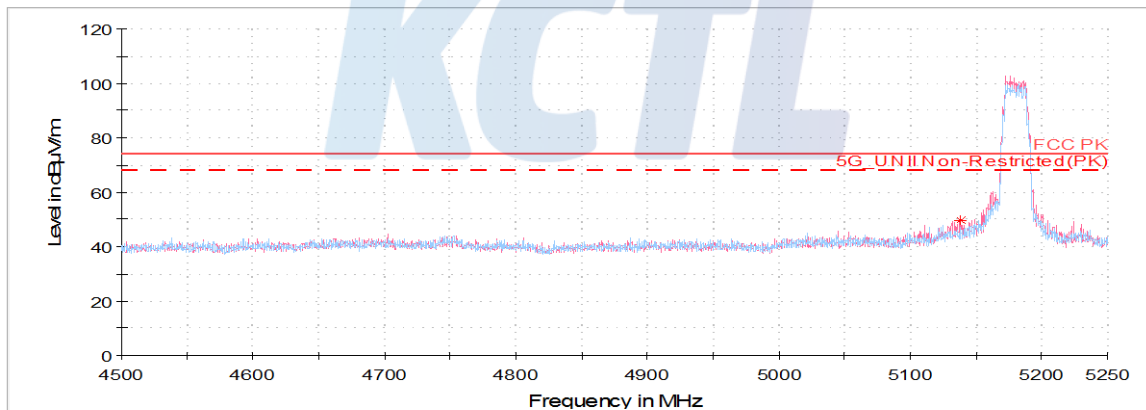
**Horizontal/Vertical for Band-edge**

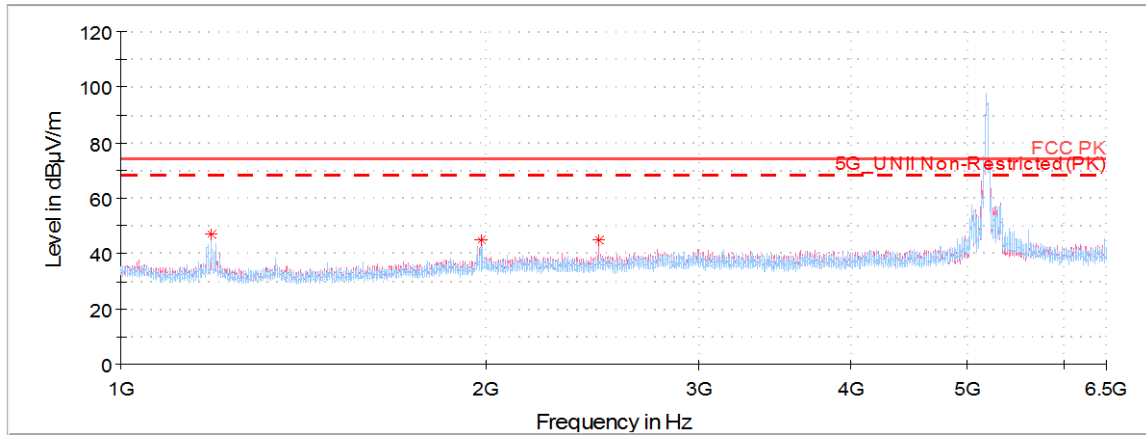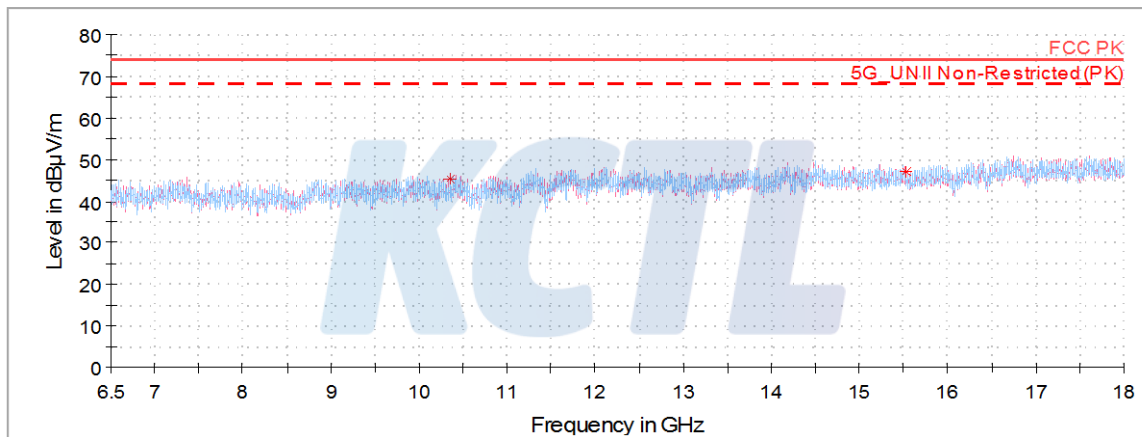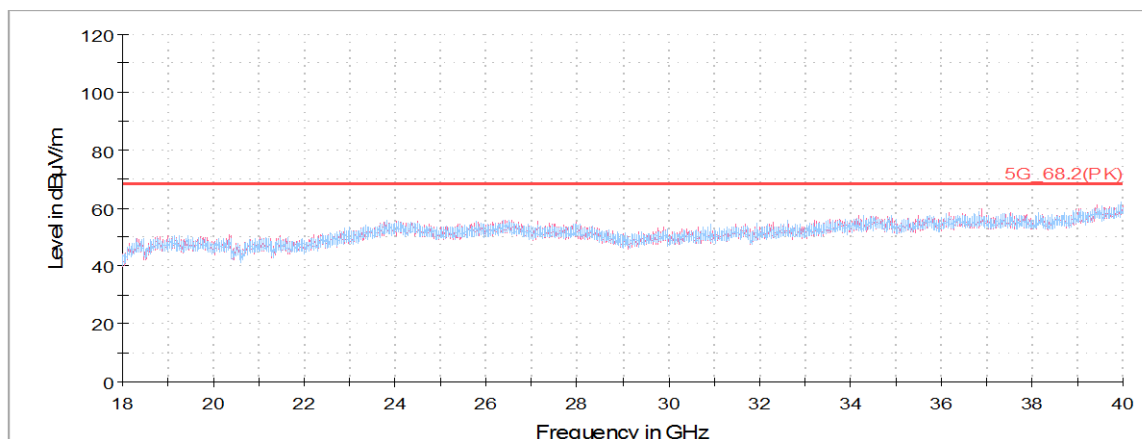**Horizontal/Vertical for 1 GHz ~ 3.5 GHz****Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 40 GHz**

**Middle Channel (5 200 MHz)**

| Frequency                                                      | Pol.  | Reading        | Cable Loss | Amp Gain | Antenna Factor | DCCF | Result           | Limit            | Margin |
|----------------------------------------------------------------|-------|----------------|------------|----------|----------------|------|------------------|------------------|--------|
| (MHz)                                                          | (V/H) | (dB( $\mu$ V)) | (dB)       | (dB)     | (dB)           | (dB) | (dB( $\mu$ W/m)) | (dB( $\mu$ W/m)) | (dB)   |
| <b>Peak data</b>                                               |       |                |            |          |                |      |                  |                  |        |
| 1 187.69 <sup>1)</sup>                                         | H     | 80.99          | 2.65       | -60.18   | 24.55          | -    | 48.01            | 74.00            | 25.99  |
| 1 980.03                                                       | V     | 72.91          | 3.41       | -59.35   | 27.72          | -    | 44.69            | 68.20            | 23.51  |
| 2 479.84                                                       | V     | 71.33          | 3.77       | -59.57   | 28.71          | -    | 44.24            | 68.20            | 23.96  |
| 10 409.28                                                      | H     | 60.91          | 7.65       | -60.21   | 37.33          | -    | 45.68            | 68.20            | 22.52  |
| 15 604.77 <sup>1)</sup>                                        | H     | 55.50          | 11.36      | -60.22   | 40.10          | -    | 46.74            | 74.00            | 27.26  |
| <b>Average Data</b>                                            |       |                |            |          |                |      |                  |                  |        |
| No spurious emissions were detected within 20 dB of the limit. |       |                |            |          |                |      |                  |                  |        |

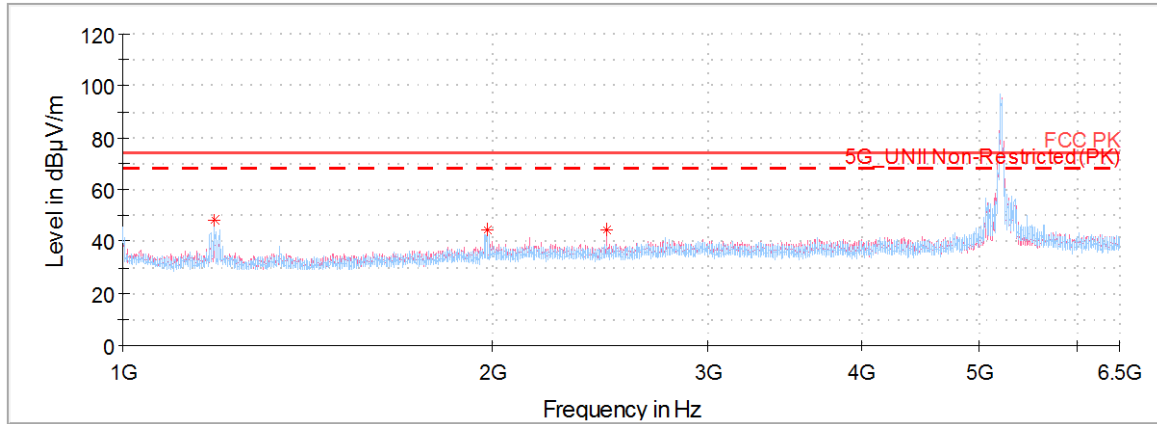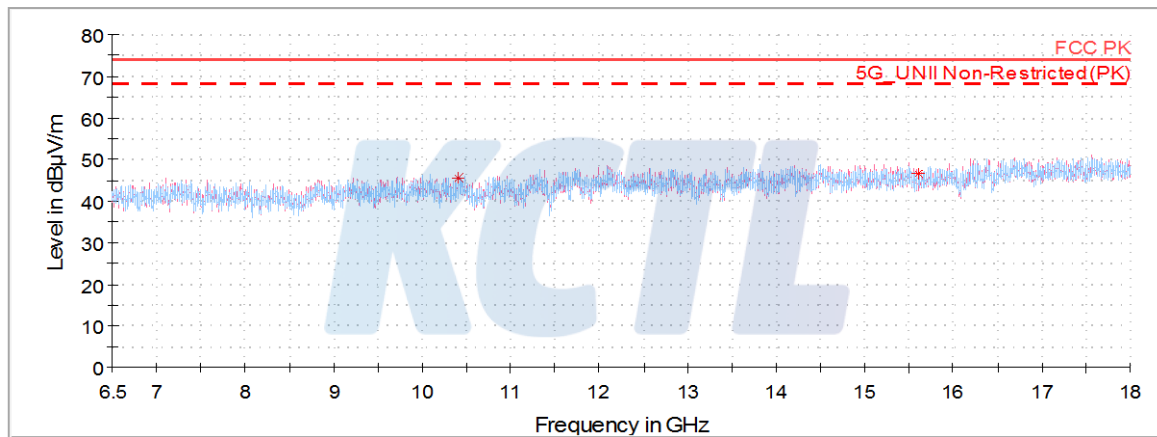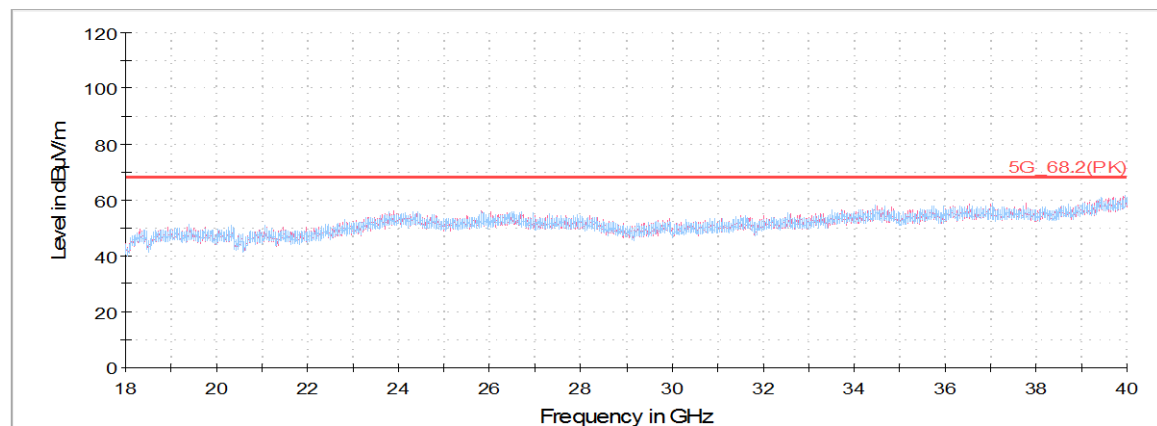

**Horizontal/Vertical for 1 GHz ~ 3.5 GHz****Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 40 GHz**

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0033-B

Page (53) of (114)

**Highest Channel (5 240 MHz)**

| Frequency                                                      | Pol.  | Reading  | Cable Loss | Amp Gain | Antenna Factor | DCCF | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|------------|----------|----------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)       | (dB)     | (dB)           | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                               |       |          |            |          |                |      |            |            |        |
| 1 034.38 <sup>1)</sup>                                         | V     | 79.20    | 2.50       | -59.32   | 23.94          | -    | 46.32      | 74.00      | 27.68  |
| 1 188.38 <sup>1)</sup>                                         | H     | 81.55    | 2.65       | -60.18   | 24.55          | -    | 48.57      | 74.00      | 25.43  |
| 1 979.69                                                       | H     | 73.14    | 3.41       | -59.36   | 27.72          | -    | 44.90      | 68.20      | 23.30  |
| 5 451.56 <sup>1)</sup>                                         | V     | 39.21    | 5.76       | -33.56   | 33.58          | -    | 44.99      | 74.00      | 29.01  |
| 10 491.22                                                      | V     | 60.58    | 7.68       | -60.38   | 37.39          | -    | 45.27      | 68.20      | 22.93  |
| 15 727.67 <sup>1)</sup>                                        | V     | 57.86    | 11.58      | -60.54   | 40.18          | -    | 49.08      | 74.00      | 24.92  |
| <b>Average Data</b>                                            |       |          |            |          |                |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit. |       |          |            |          |                |      |            |            |        |

**Horizontal/Vertical for Band-edge**