



# TEST REPORT

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |                                                                                                               |                                                                                                                    |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| <b>KCTL Inc.</b><br>65, Sinwon-ro, Yeongtong-gu,<br>Suwon-si, Gyeonggi-do, 16677, Korea<br>TEL: 82-31-285-0894 FAX: 82-505-299-8311<br><a href="http://www.kctl.co.kr">www.kctl.co.kr</a>                                                                                                                                                                                                                                                                                                                                                                            | Report No.:<br><b>KR19-SRF0032-A</b><br>Page (1) of (96)                                                                                                                                                                                                                                                                                                                                                                                  |  |                                                                                                               |                                                                                                                    |
| <b>1. Client</b><br>◦ Name : CITECH CO.,LTD.<br>◦ Address : 11F, 932, Yangjae-daero, Songpa-gu, Seoul, Republic of Korea<br>◦ Date of Receipt : 2018-12-03<br><b>2. Use of Report</b> : -<br><b>3. Name of Product and Model</b> : Premium Media Player / RS350<br><b>4. Manufacturer and Country of Origin</b> : CITECH CO.,LTD. / Korea<br><b>5. FCC ID</b> : 2ANYL-RS350<br><b>6. Date of Test</b> : 2019-02-01 to 2019-02-22<br><b>7. Test Standards</b> : FCC Part 15 Subpart C, 15.247<br><b>8. Test Results</b> : Refer to the test result in the test report |                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |                                                                                                               |                                                                                                                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |                                                                                                               |                                                                                                                    |
| Affirmation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; padding: 5px;">           Tested by<br/> <div style="text-align: center;"> <br/>           Name : Taekyong Nam (Signature)         </div> </td> <td style="width: 50%; padding: 5px;">           Technical Manager<br/> <div style="text-align: center;"> <br/>           Name : Bongok Ko (Signature)         </div> </td> </tr> </table> |  | Tested by<br><div style="text-align: center;"> <br/>           Name : Taekyong Nam (Signature)         </div> | Technical Manager<br><div style="text-align: center;"> <br/>           Name : Bongok Ko (Signature)         </div> |
| Tested by<br><div style="text-align: center;"> <br/>           Name : Taekyong Nam (Signature)         </div>                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Technical Manager<br><div style="text-align: center;"> <br/>           Name : Bongok Ko (Signature)         </div>                                                                                                                                                                                                                                                                                                                        |  |                                                                                                               |                                                                                                                    |
| 2019-04-10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |                                                                                                               |                                                                                                                    |
| <h2>KCTL Inc.</h2>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |                                                                                                               |                                                                                                                    |
| As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |                                                                                                               |                                                                                                                    |

#### Report revision history

| Date       | Revision                                     | Page No     |
|------------|----------------------------------------------|-------------|
| 2019-03-13 | Initial report                               | -           |
| 2019-04-10 | Added the data for simultaneous transmission | 5, 79 to 80 |
|            |                                              |             |
|            |                                              |             |
|            |                                              |             |
|            |                                              |             |
|            |                                              |             |
|            |                                              |             |
|            |                                              |             |
|            |                                              |             |

*This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document.*

*This test report is a general report that does not use the KOLAS accreditation mark and is not related to KOLAS accreditation.*

**KCTL**

## CONTENTS

|      |                                                        |    |
|------|--------------------------------------------------------|----|
| 1.   | General information .....                              | 4  |
| 2.   | Device information .....                               | 4  |
| 2.1. | Accessory information .....                            | 5  |
| 2.2. | Information about derivative model.....                | 5  |
| 2.3. | Frequency/channel operations.....                      | 5  |
| 2.4. | Simultaneously transmission condition .....            | 5  |
| 2.5. | Duty Cycle Correction Factor .....                     | 6  |
| 3.   | Antenna requirement .....                              | 8  |
| 4.   | Summary of tests .....                                 | 8  |
| 5.   | Measurement uncertainty .....                          | 9  |
| 6.   | Measurement results explanation example .....          | 10 |
| 7.   | Test results .....                                     | 11 |
| 7.1. | Maximum peak output power.....                         | 11 |
| 7.2. | Peak Power Spectral Density .....                      | 15 |
| 7.3. | 6 dB Bandwidth(DTS Channel Bandwidth) .....            | 21 |
| 7.4. | Spurious Emission, Band Edge and Restricted bands..... | 31 |
| 7.5. | Conducted Spurious Emission.....                       | 81 |
| 7.6. | AC Conducted emission .....                            | 94 |
| 8.   | Measurement equipment .....                            | 96 |



## 2.1. Accessory information

| Equipment         | Manufacturer          | Model               | Serial No. | Power source   |
|-------------------|-----------------------|---------------------|------------|----------------|
| SWITCHING ADAPTER | Chung Kwang Tech Inc. | ADS-25NP-12-112024E | -          | AC 100 ~ 240 V |

## 2.2. Information about derivative model

The difference between basic model and derivative models is:  
Simplified derivation based on buyer's model name.

## 2.3. Frequency/channel operations

This device contains the following capabilities:  
Bluetooth(BDR/EDR), WIFI(802.11a/b/g/n20)

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 01  | 2 412           |
| .   | .               |
| 07  | 2 437           |
|     |                 |
| 11  | 2 462           |

Table 2.3.1. 802.11b/g/n(HT20) mode


## 2.4. Simultaneously transmission condition

| Technology                         | Modulation | Test mode | Tested Channel |
|------------------------------------|------------|-----------|----------------|
| WLAN 2.4 GHz<br>(802.11n20 / MIMO) | OFDM       | 802.11n20 | 11             |
| Bluetooth                          | GFSK       | EDR       | 78             |

Note<sub>1</sub>): The emission of the simultaneous operation (WiFi & Bluetooth) have been evaluated and no non-compliance found.

## 2.5. Duty Cycle Correction Factor

- 802.11b

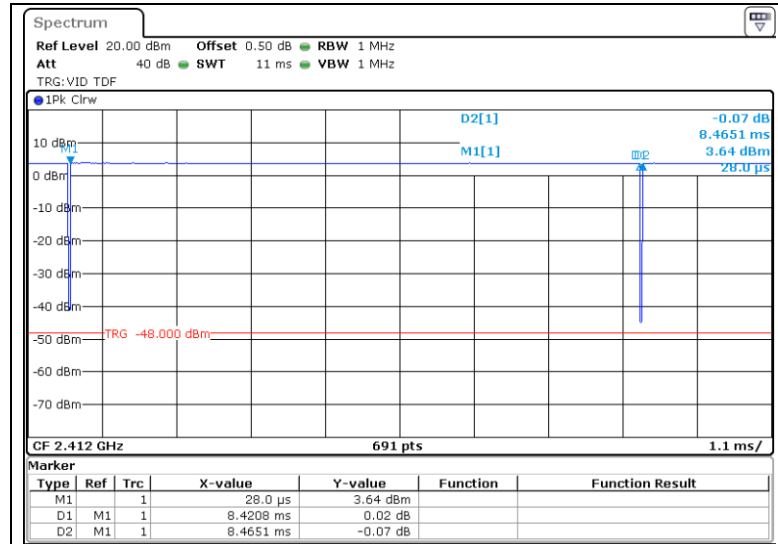


Note<sub>1</sub>) : period : 8.47 ms, On time : 8.42 ms

Note<sub>2</sub>) : DCCF =  $10 \log(1 / x) = 10 \log(1/0.994) = 0.026$  dB,  $x = 8.42/8.47 = 0.994$

Note<sub>3</sub>) : 802.11b is a continuous transmission (duty cycle  $\geq 98$  %)

- 802.11g

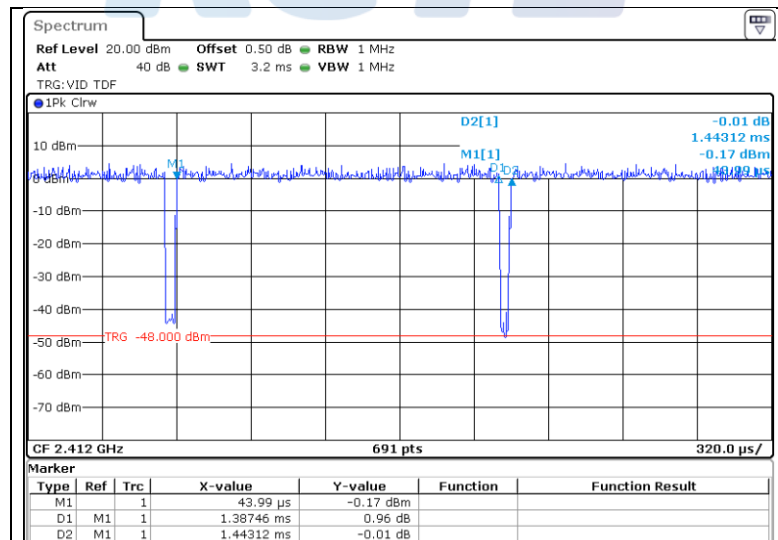


Note<sub>1</sub>) : period : 1.44 ms, On time : 1.39 ms

Note<sub>2</sub>) : DCCF =  $10 \log(1 / x) = 10 \log(1/0.965) = 0.153$  dB,  $x = 1.39/1.44 = 0.965$

Note<sub>3</sub>) : 802.11g is a non-continuous transmission (duty cycle  $< 98$  %)

- 802.11n HT20

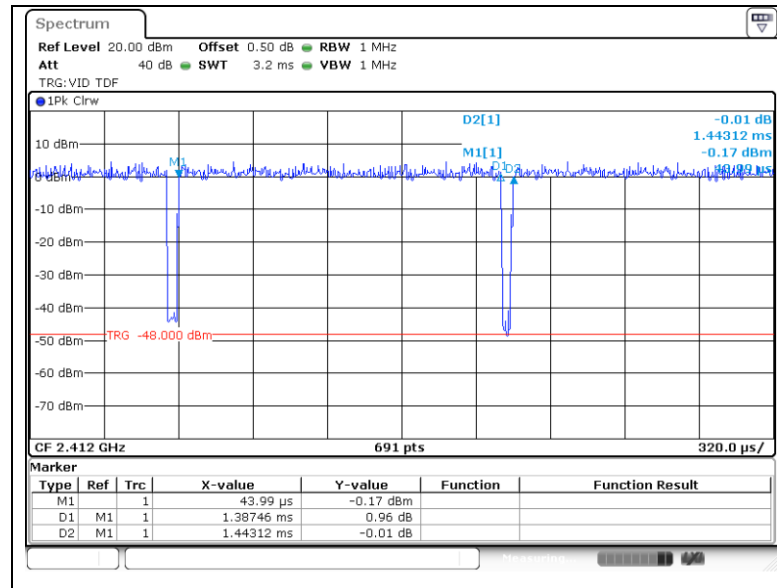


Note<sub>1</sub>) : period : 1.44 ms, On time : 1.39 ms

Note<sub>2</sub>) : DCCF =  $10 \log(1/x) = 10 \log(1/0.961) = 0.171$  dB,  $x = 1.39/1.44 = 0.961$

Note<sub>3</sub>) : 802.11n HT20 is a non-continuous transmission (duty cycle < 98 %)

**MIMO**

- 802.11n HT20

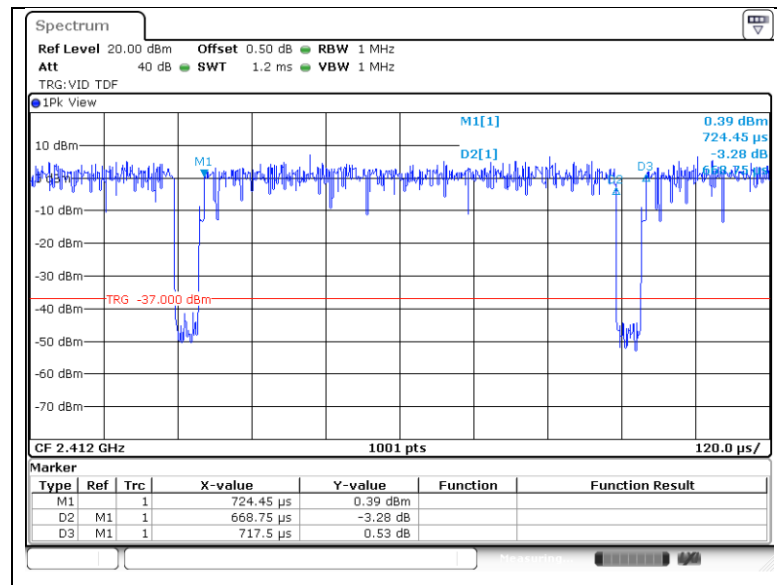

Note<sub>1</sub>) : period : 0.718 ms, On time : 0.669 ms

Note<sub>2</sub>) : DCCF =  $10 \log(1/x) = 10 \log(1/0.932) = 0.306$  dB,  $x = 0.669/0.718 = 0.932$

Note<sub>3</sub>) : 802.11n HT20 is a non-continuous transmission (duty cycle < 98 %)

### 3. Antenna requirement

Requirement of FCC part section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The transmitter has permanently attached Chip antenna (internal antenna) on board.

### 4. Summary of tests

| FCC Part section(s)                   | Parameter                   | Test results |
|---------------------------------------|-----------------------------|--------------|
| 15.247(b)(3)                          | Maximum peak output power   | Pass         |
| 15.247(e)                             | Peak power spectral density | Pass         |
| 15.247(a)(2)                          | 6 dB channel bandwidth      | Pass         |
| -                                     | Occupied bandwidth          | Pass         |
| 15.247(d),<br>15.205(a),<br>15.209(a) | Spurious emission           | Pass         |
|                                       | Band-edge, restricted band  | Pass         |
| 15.207(a)                             | Conducted emissions         | Pass         |

#### Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
3. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that X orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in X orientation
4. The test procedure(s) in this report were performed in accordance as following.
  - ◆ ANSI C63.10-2013
  - ◆ KDB 558074 D01 V05r01

## 5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicated a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

| Parameter                    | Expanded uncertainty |         |
|------------------------------|----------------------|---------|
| Conducted RF power           | 1.76 dB              |         |
| Conducted spurious emissions | 4.03 dB              |         |
| Radiated spurious emissions  | 9 kHz ~ 30 MHz:      | 2.28 dB |
|                              | 30 MHz ~ 300 MHz     | 4.98 dB |
|                              | 300 MHz ~ 1 000 MHz  | 5.14 dB |
|                              | 1 GHz ~ 6 GHz        | 6.70 dB |
|                              | Above 6 GHz          | 6.60 dB |
| Conducted emissions          | 9 kHz ~ 150 kHz      | 3.66 dB |
|                              | 150 kHz ~ 30 MHz     | 3.26 dB |

KCTL

## 6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

| Frequency (MHz) | Factor(dB) | Frequency (MHz) | Factor(dB) |
|-----------------|------------|-----------------|------------|
| 30              | 10.02      | 16 000          | 12.09      |
| 100             | 10.26      | 17 000          | 11.79      |
| 200             | 10.32      | 18 000          | 12.16      |
| 300             | 10.43      | 19 000          | 12.48      |
| 400             | 10.42      | 20 000          | 11.97      |
| 500             | 10.55      | 21 000          | 12.59      |
| 600             | 10.54      | 22 000          | 11.84      |
| 700             | 10.64      | 23 000          | 12.45      |
| 800             | 10.63      | 24 000          | 12.26      |
| 900             | 10.64      | 25 000          | 12.72      |
| 1 000           | 10.70      | 26 000          | 12.45      |
| 2 000           | 11.11      | 27 000          | 12.73      |
| 3 000           | 11.36      | 28 000          | 12.45      |
| 4 000           | 11.53      | 29 000          | 12.78      |
| 5 000           | 11.92      | 30 000          | 12.60      |
| 6 000           | 12.15      | 31 000          | 13.01      |
| 7 000           | 11.32      | 32 000          | 13.15      |
| 8 000           | 11.36      | 33 000          | 13.57      |
| 9 000           | 11.72      | 34 000          | 13.86      |
| 10 000          | 11.63      | 35 000          | 14.12      |
| 11 000          | 11.43      | 36 000          | 14.26      |
| 12 000          | 11.25      | 37 000          | 14.33      |
| 13 000          | 11.92      | 38 000          | 14.59      |
| 14 000          | 12.03      | 39 000          | 14.63      |
| 15 000          | 11.69      | 40 000          | 14.84      |


**Note.**

Offset(dB) = RF cable loss(dB) + Attenuator(dB)

## 7. Test results

### 7.1. Maximum peak output power

#### Test setup



#### Limit

According to §15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2 400-2 483.5 MHz, and 5 725-5 850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### Test procedure

558074 D01 DTS Meas Guidance - Section 8.3,  
 ANSI C63.10 - Section 11.9

#### Test settings

##### **General**

Section 15.247 permits the maximum conducted (average) output power to be measured as an alternative to the maximum peak conducted output power for demonstrating compliance to the limit. When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth (see ANSI C63.10 for measurement guidance).

When using a spectrum analyzer or EMI receiver to perform these measurements, it shall be capable of utilizing a number of measurement points in each sweep that is greater than or equal to twice the span/RBW to set a bin-to-bin spacing of  $\leq \text{RBW}/2$  so that narrowband signals are not lost between frequency bins.

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level. The intent is to test at 100 % duty cycle; however a small reduction in duty cycle (to no lower than 98 %) is permitted, if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

If continuous transmission (or at least 98 % duty cycle) cannot be achieved due to hardware

limitations (e.g., overheating), the EUT shall be operated at its maximum power control level, with the transmit duration as long as possible, and the duty cycle as high as possible during which sweep triggering/signal gating techniques may be used to perform the measurement over the transmission duration.

### **Maximum peak conducted output power**

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

#### **RBW $\geq$ DTS bandwidth**

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq [3 \times \text{RBW}]$ .
- c) Set span  $\geq [3 \times \text{RBW}]$ .
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

#### **Integrated band power method**

The following procedure can be used when the maximum available RBW of the instrument is less than the DTS bandwidth:

- a) Set the RBW = 1 MHz.
- b) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- c) Set the span  $\geq [1.5 \times \text{DTS bandwidth}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

## PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

### Notes:

A peak responding power sensor is used, where the power sensor system video bandwidth is greater than the occupied bandwidth of the EUT.

## Test results

### ANT 1

| Test mode    | Frequency(MHz) | Measured output power(dBm) |                       | Limit(dBm) |
|--------------|----------------|----------------------------|-----------------------|------------|
|              |                | Peak                       | Average <sup>1)</sup> |            |
| 802.11b      | 2 412          | 15.07                      | 11.02                 | 30.00      |
|              | 2 437          | 15.67                      | 11.69                 |            |
|              | 2 462          | 16.07                      | 12.26                 |            |
| 802.11g      | 2 412          | 19.18                      | 11.76                 | 30.00      |
|              | 2 437          | 19.68                      | 12.35                 |            |
|              | 2 462          | 20.78                      | 13.01                 |            |
| 802.11n HT20 | 2 412          | 19.38                      | 11.61                 | 30.00      |
|              | 2 437          | 20.48                      | 12.34                 |            |
|              | 2 462          | 20.98                      | 12.89                 |            |

### ANT 2

| Test mode    | Frequency(MHz) | Measured output power(dBm) |                       | Limit(dBm) |
|--------------|----------------|----------------------------|-----------------------|------------|
|              |                | Peak                       | Average <sup>1)</sup> |            |
| 802.11b      | 2 412          | 16.17                      | 12.41                 | 30.00      |
|              | 2 437          | 16.37                      | 12.55                 |            |
|              | 2 462          | 16.67                      | 12.72                 |            |
| 802.11g      | 2 412          | 20.48                      | 13.26                 | 30.00      |
|              | 2 437          | 20.78                      | 13.37                 |            |
|              | 2 462          | 20.58                      | 13.43                 |            |
| 802.11n HT20 | 2 412          | 20.88                      | 13.02                 | 30.00      |
|              | 2 437          | 21.08                      | 13.23                 |            |
|              | 2 462          | 21.28                      | 13.51                 |            |

### Note.

1. Average(dB m) = Reading(dB m) + Duty Factor(dB)

## MIMO

| Test mode    | Frequency(MHz) | Measured output power(dBm) |                       | Limit(dBm) |
|--------------|----------------|----------------------------|-----------------------|------------|
|              |                | Peak <sup>1)</sup>         | Average <sup>2)</sup> |            |
| 802.11n HT20 | 2 412          | 23.04                      | 17.22                 | 30.00      |
|              | 2 437          | 23.45                      | 17.60                 |            |
|              | 2 462          | 23.84                      | 17.96                 |            |

### Note.


1. Peak(dB m) =  $10\log(10^{(\text{Ant1}/10)} + 10^{(\text{ant2}/10)})$  (dB m) )

2. Average(dB m) =  $10\log(10^{(\text{Ant1}/10)} + 10^{(\text{ant2}/10)})$  (dB m) ) + Duty Factor(dB)

*KCTL*

## 7.2. Peak Power Spectral Density

### Test setup



### Limit

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test procedure

558074 D01 DTS Meas Guidance - Section 8.4,  
ANSI C63.10 - Section 11.10

### Test settings

#### Method PKPSD (peak PSD)

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set the span to 1.5 times the DTS bandwidth.
- 3) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- 4) Set the VBW  $\geq 3 \times \text{RBW}$ .
- 5) Detector = peak.
- 6) Sweep time = auto couple.
- 7) Trace mode = max hold.
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level within the RBW.
- 10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

## Test results

### ANT 1

| Test mode    | Frequency(MHz) | Result(dBm) (RBW = 3 kHz) | Limit(dBm/ 3kHz) |
|--------------|----------------|---------------------------|------------------|
| 802.11b      | 2 412          | -10.45                    | 8.00             |
|              | 2 437          | -9.39                     |                  |
|              | 2 462          | -9.45                     |                  |
| 802.11g      | 2 412          | -14.66                    |                  |
|              | 2 437          | -13.61                    |                  |
|              | 2 462          | -12.96                    |                  |
| 802.11n HT20 | 2 412          | -12.53                    |                  |
|              | 2 437          | -11.89                    |                  |
|              | 2 462          | -11.86                    |                  |

### ANT 2

| Test mode    | Frequency(MHz) | Result(dBm) (RBW = 3 kHz) | Limit(dBm/ 3kHz) |
|--------------|----------------|---------------------------|------------------|
| 802.11b      | 2 412          | -9.09                     | 8.00             |
|              | 2 437          | -8.45                     |                  |
|              | 2 462          | -8.49                     |                  |
| 802.11g      | 2 412          | -12.15                    |                  |
|              | 2 437          | -12.15                    |                  |
|              | 2 462          | -11.80                    |                  |
| 802.11n HT20 | 2 412          | -11.48                    |                  |
|              | 2 437          | -11.65                    |                  |
|              | 2 462          | -11.96                    |                  |

### MIMO

| Test mode    | Frequency(MHz) | Result(dBm) (RBW = 3 kHz) | Limit(dBm/ 3kHz) |
|--------------|----------------|---------------------------|------------------|
| 802.11n HT20 | 2 412          | -10.89                    | 8.00             |
|              | 2 437          | -10.09                    |                  |
|              | 2 462          | -9.43                     |                  |

#### Note.

1. Result(dBm) =  $10\log(10^{(\text{Ant1}/10)} + 10^{(\text{ant2}/10)})$  (dBm)

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR19-SRF0032-A

Page (17) of (96)




## ANT 1


### 802.11b

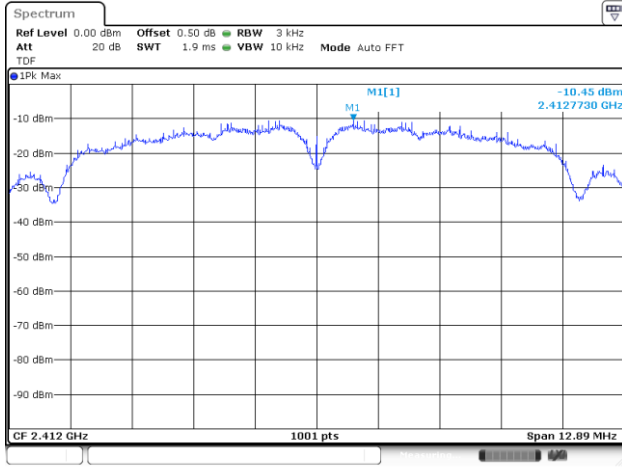


### 802.11g

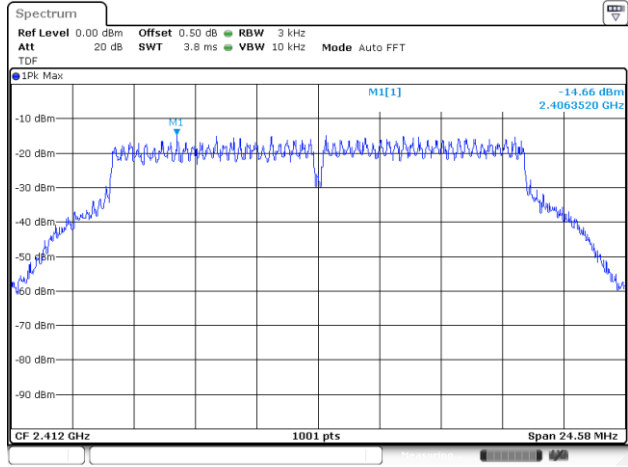


### 2 412 MHz

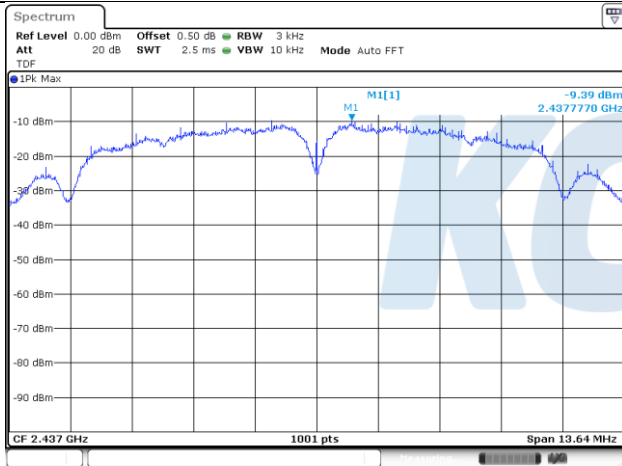


### 2 412 MHz

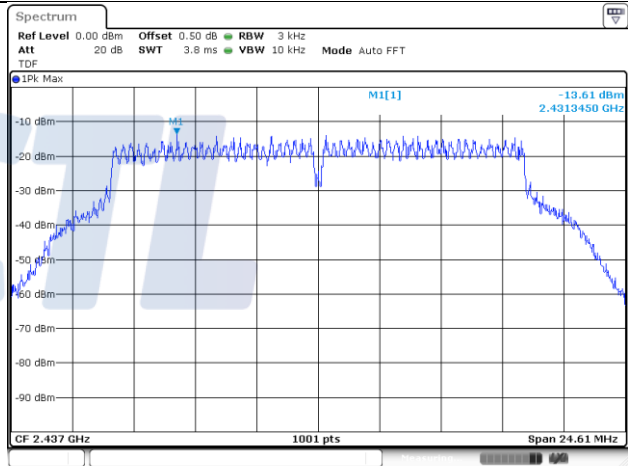

### 2 437 MHz

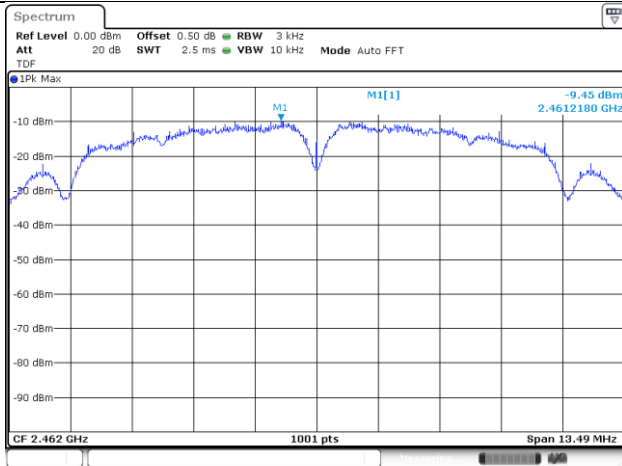

### 2 437 MHz

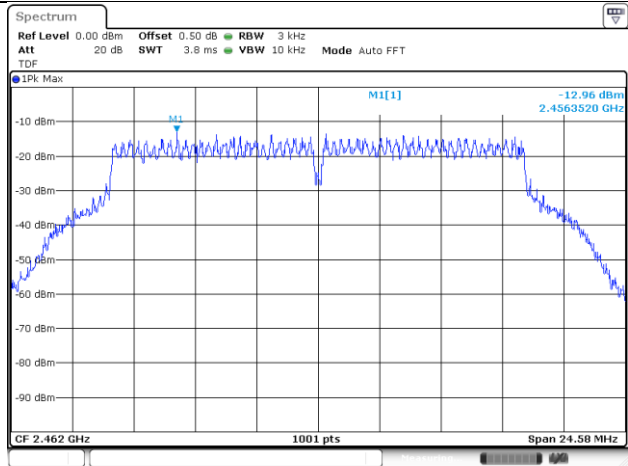

### 2 462 MHz

### 2 462 MHz

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR19-SRF0032-A

Page (18) of (96)

# KCTL


## ANT 1

### 802.11n HT20

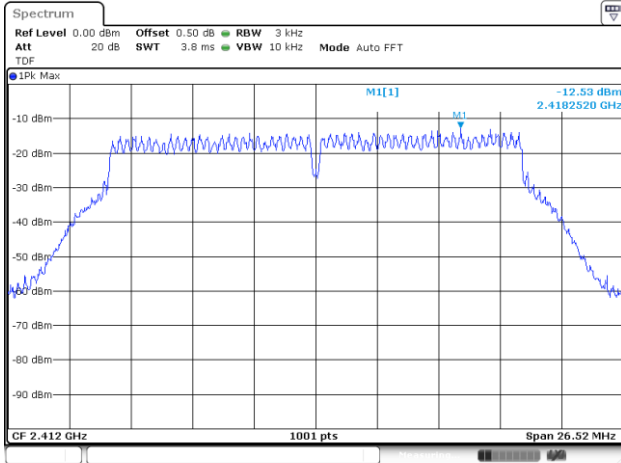


## ANT 2


### 802.11b

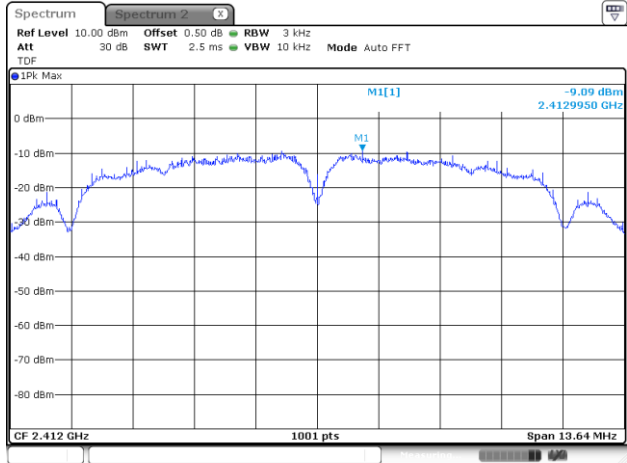


## 2 412 MHz

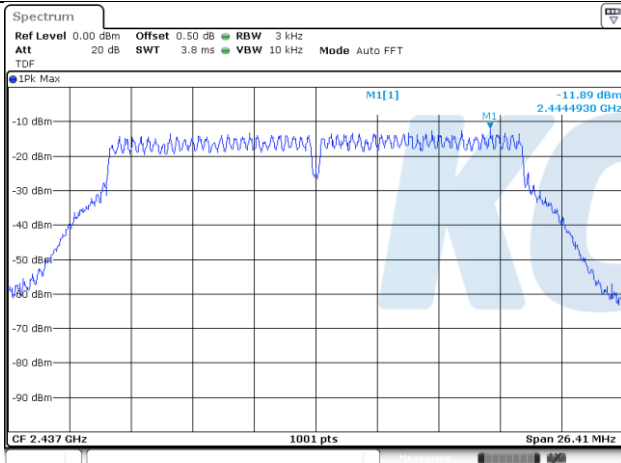


## 2 412 MHz

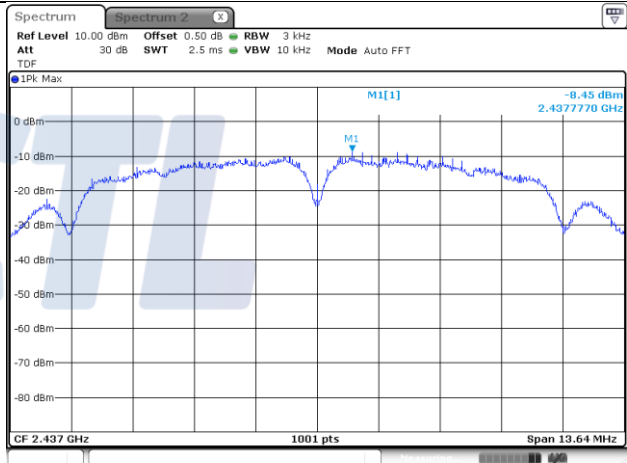

## 2 437 MHz

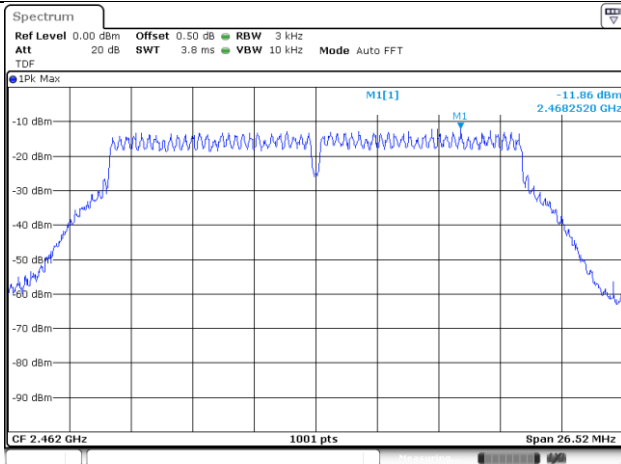

## 2 437 MHz

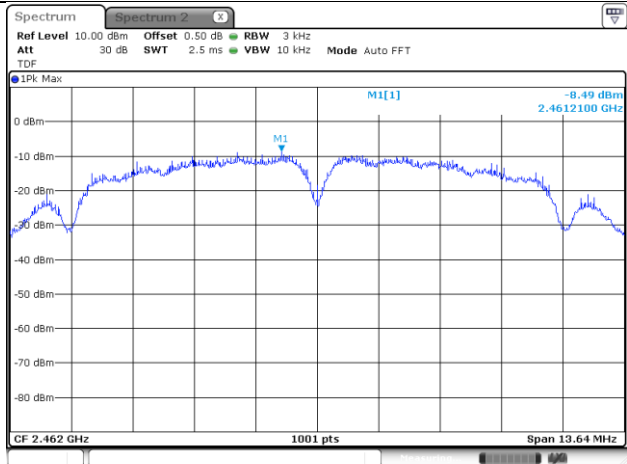

## 2 462 MHz

## 2 462 MHz

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR19-SRF0032-A

Page (19) of (96)




## ANT 2


### 802.11g

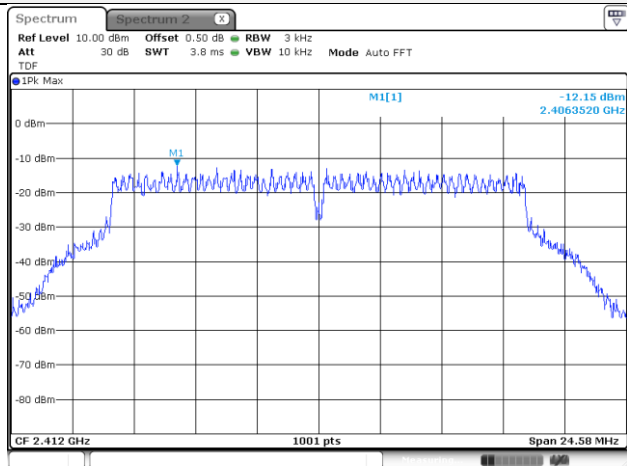


### 802.11n HT20

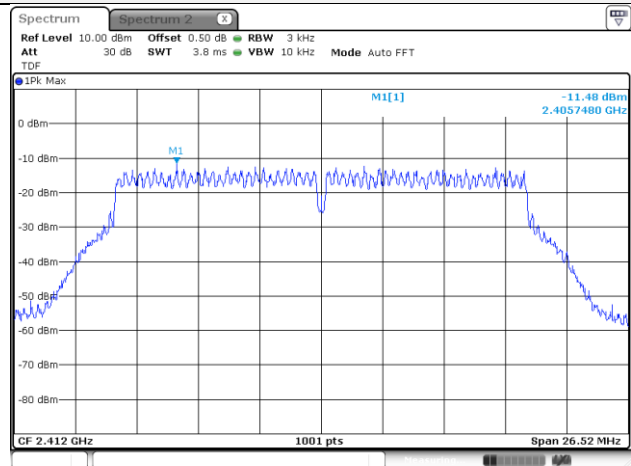


### 2 412 MHz

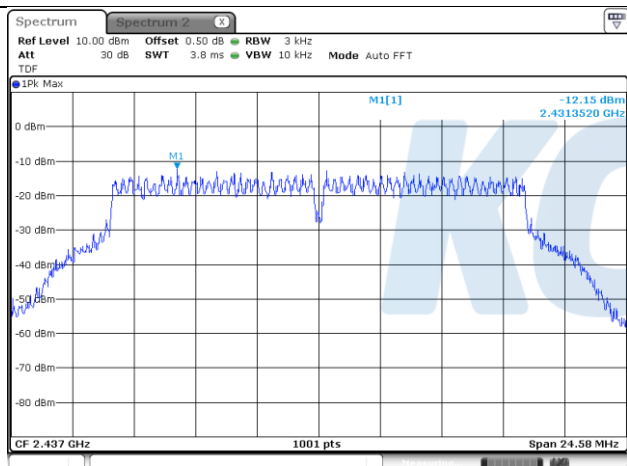


### 2 412 MHz

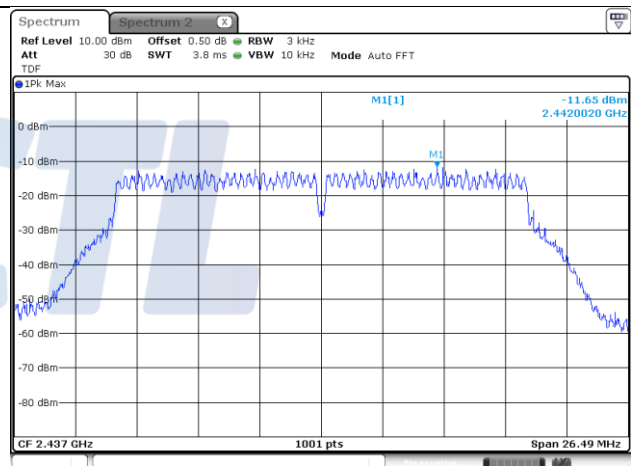

### 2 437 MHz

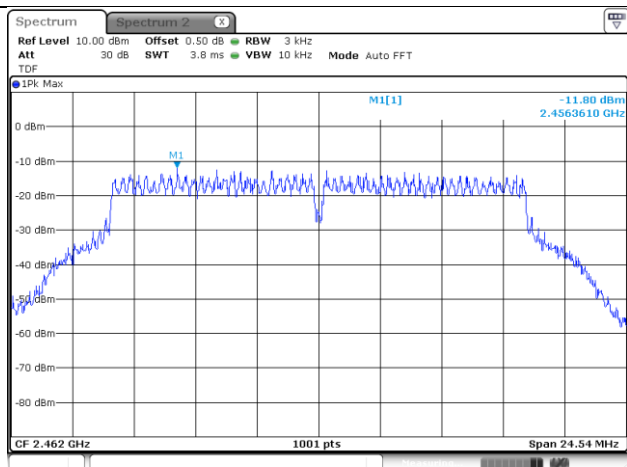

### 2 437 MHz

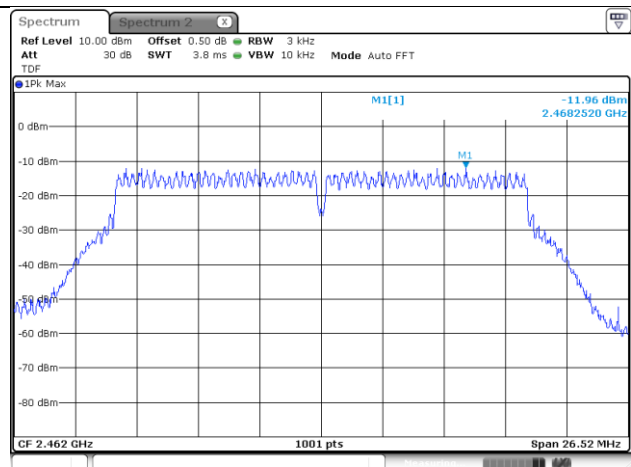

### 2 462 MHz

### 2 462 MHz

This report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR19-SRF0032-A

Page (20) of (96)




## MIMO


### 802.11n HT20\_ANT 1

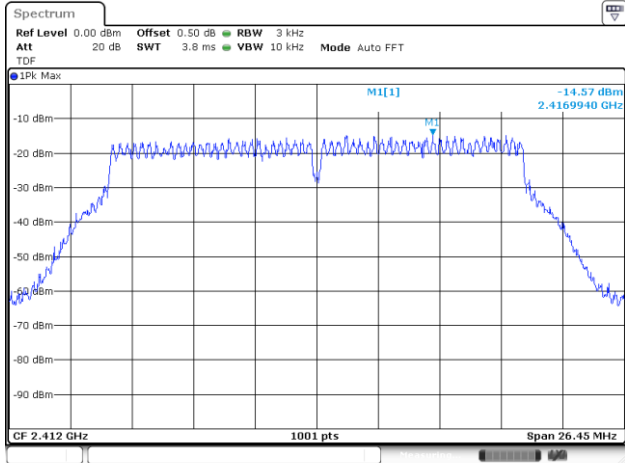


### 802.11n HT20\_ANT 2

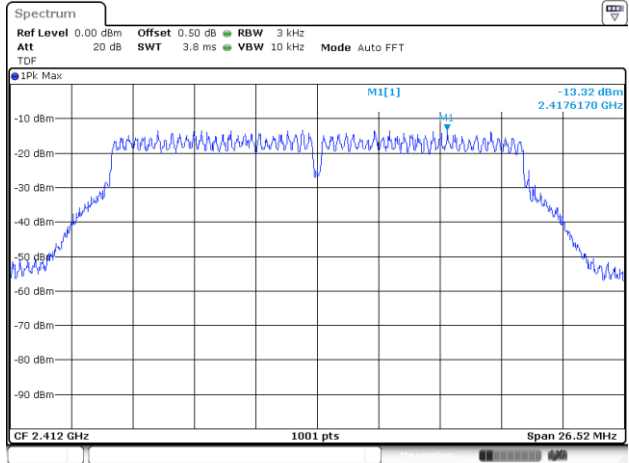


### 2 412 MHz

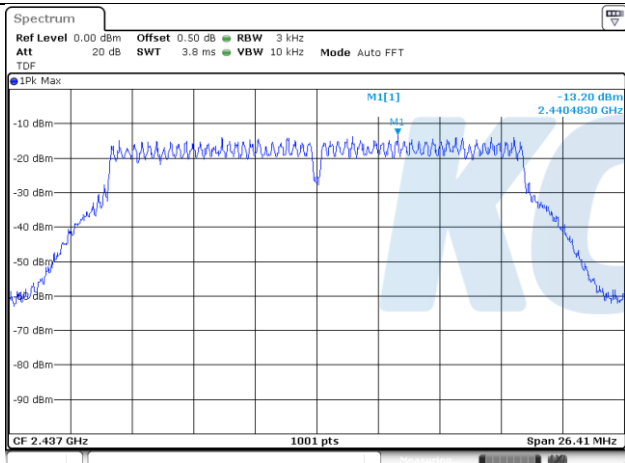


### 2 412 MHz

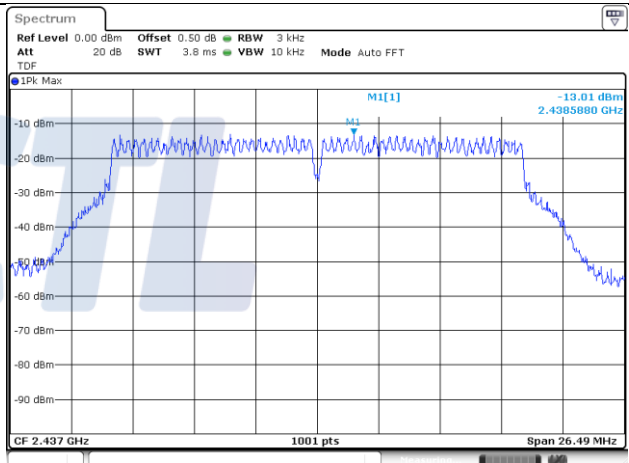

### 2 437 MHz

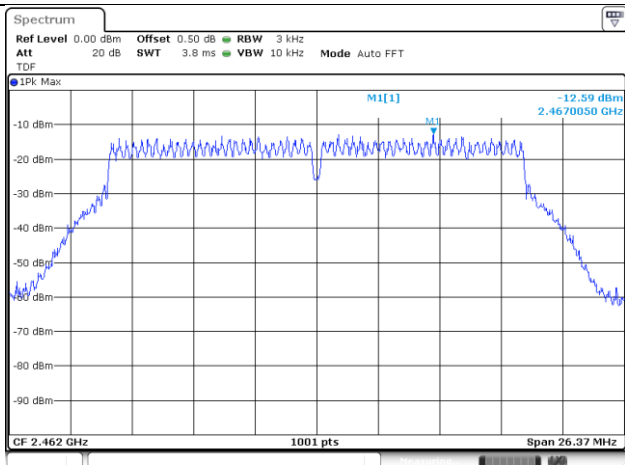

### 2 437 MHz

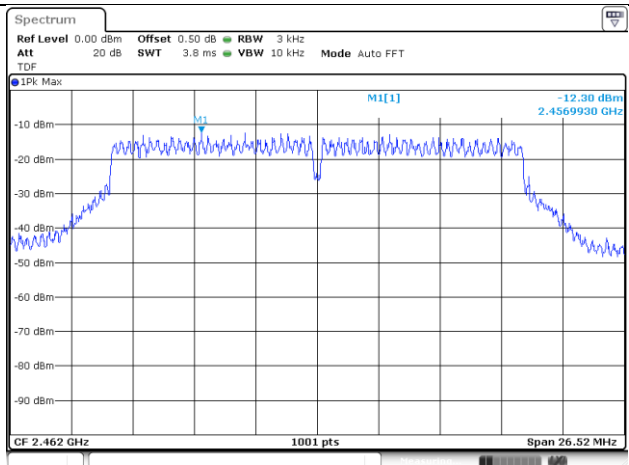

### 2 462 MHz



### 2 462 MHz




This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

### 7.3. 6 dB Bandwidth(DTS Channel Bandwidth)

#### Test setup



#### Limit

According to §15.247(a)(2) Systems using digital modulation techniques may operate in the 902–928 MHz, 2 400–2 483.5 MHz, and 5 725–5 850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### Test procedure

558074 D01 DTS Meas Guidance - Section 8.3,  
 ANSI C63.10 - Section 11.8

#### Test settings

##### DTS bandwidth

One of the following procedures may be used to determine the modulated DTS bandwidth.

##### Option 1

- 1) Set RBW = 100 kHz.
- 2) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Sweep = auto couple.
- 6) Allow the trace to stabilize.
- 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

##### Option 2

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW  $\geq 3 \times$  RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq 6$  dB.

## Test results

### ANT 1

| Test mode    | Frequency(MHz) | 6 dB bandwidth(MHz) | 99 % bandwidth(MHz) |
|--------------|----------------|---------------------|---------------------|
| 802.11b      | 2 412          | 8.59                | 11.44               |
|              | 2 437          | 9.09                | 11.54               |
|              | 2 462          | 8.99                | 11.59               |
| 802.11g      | 2 412          | 16.38               | 17.03               |
|              | 2 437          | 16.41               | 16.83               |
|              | 2 462          | 16.38               | 17.13               |
| 802.11n HT20 | 2 412          | 17.68               | 18.23               |
|              | 2 437          | 17.61               | 18.13               |
|              | 2 462          | 17.68               | 18.23               |

### ANT 2

| Test mode    | Frequency(MHz) | 6 dB bandwidth(MHz) | 99 % bandwidth(MHz) |
|--------------|----------------|---------------------|---------------------|
| 802.11b      | 2 412          | 9.09                | 11.79               |
|              | 2 437          | 9.09                | 11.74               |
|              | 2 462          | 9.09                | 11.69               |
| 802.11g      | 2 412          | 16.38               | 17.08               |
|              | 2 437          | 16.38               | 17.03               |
|              | 2 462          | 16.36               | 17.03               |
| 802.11n HT20 | 2 412          | 17.68               | 18.18               |
|              | 2 437          | 17.66               | 18.18               |
|              | 2 462          | 17.68               | 18.18               |

### MIMO

| Test mode          | Frequency(MHz) | 6 dB bandwidth(MHz) | 99 % bandwidth(MHz) |
|--------------------|----------------|---------------------|---------------------|
| 802.11n HT20_ANT 1 | 2 412          | 17.63               | 18.45               |
|                    | 2 437          | 17.61               | 18.23               |
|                    | 2 462          | 17.58               | 18.16               |
| 802.11n HT20_ANT 2 | 2 412          | 17.68               | 18.02               |
|                    | 2 437          | 17.66               | 18.02               |
|                    | 2 462          | 17.68               | 18.16               |

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0032-A


Page (23) of (96)




## 6 dB bandwidth(MHz)

### ANT 1


#### 802.11b

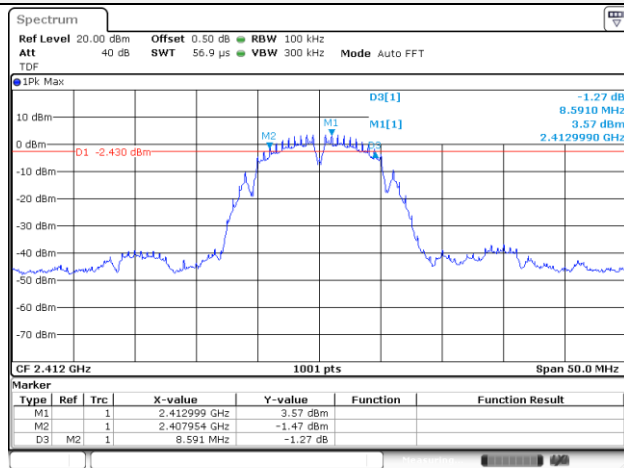


#### 802.11g

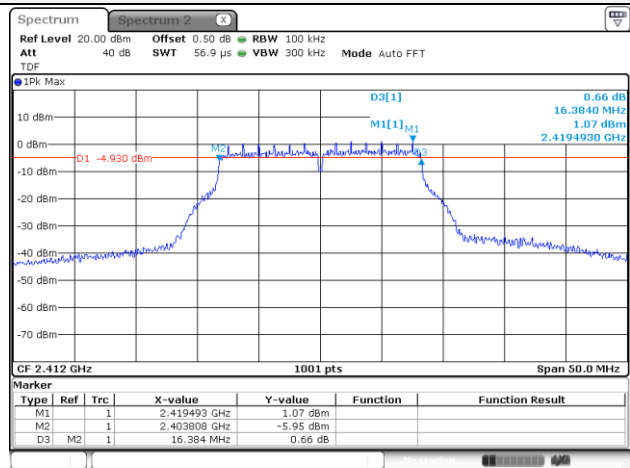


#### 2 412 MHz

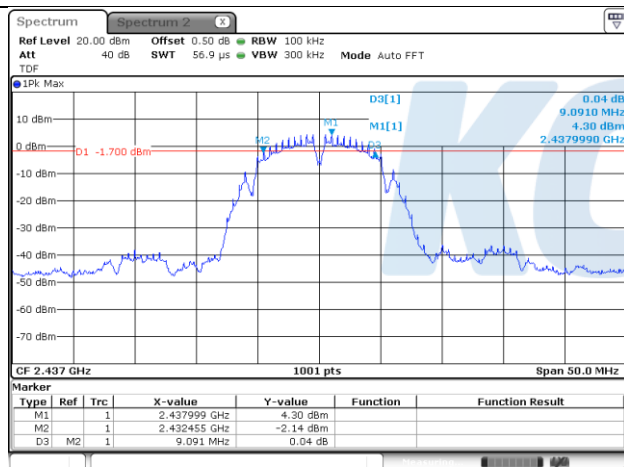


#### 2 412 MHz

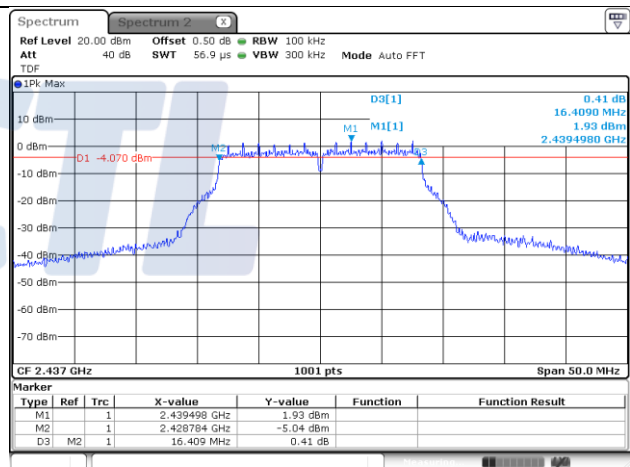

#### 2 437 MHz

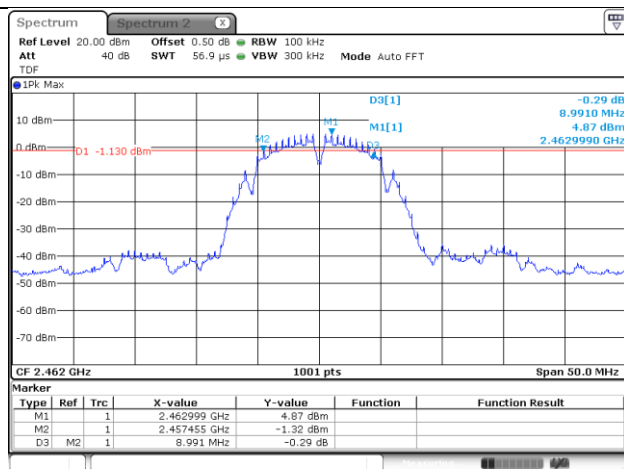

#### 2 437 MHz

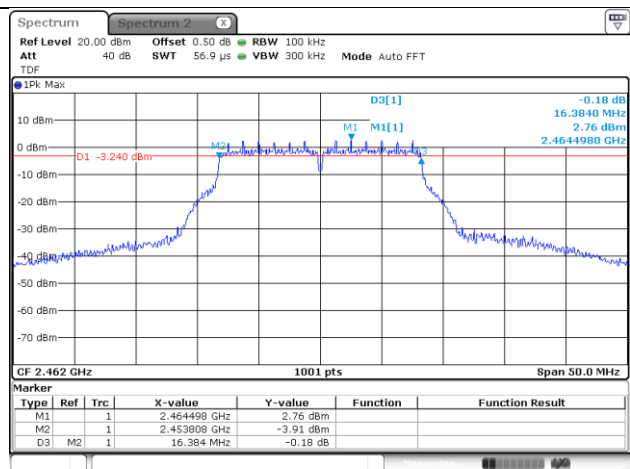

#### 2 462 MHz

#### 2 462 MHz

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR19-SRF0032-A

Page (24) of (96)




## ANT 1

### 802.11n HT20

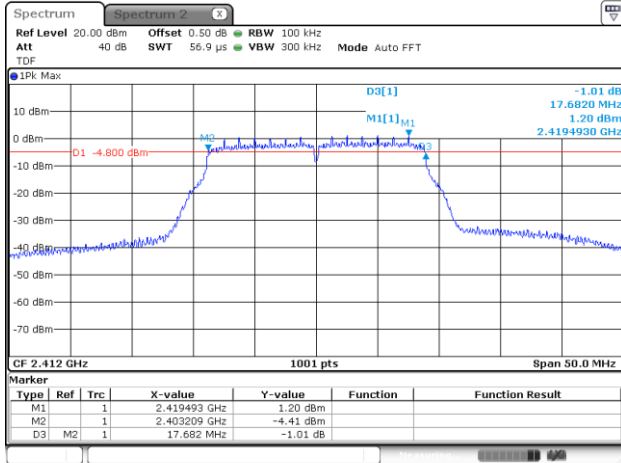


## ANT 2


### 802.11b

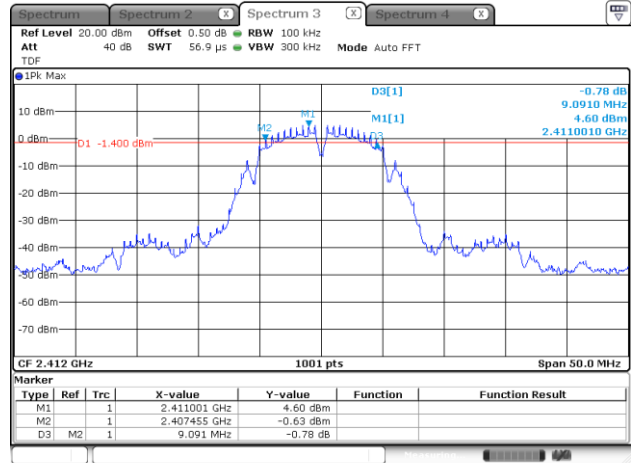


## 2 412 MHz

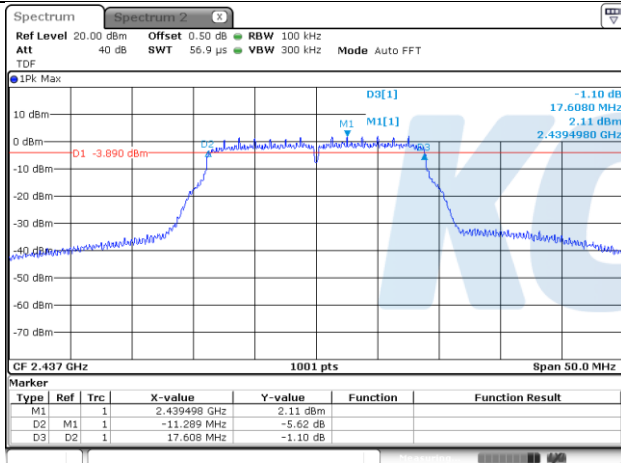


## 2 412 MHz

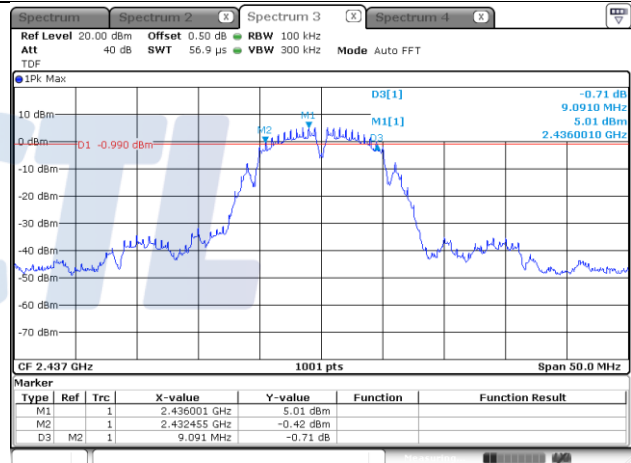

## 2 437 MHz

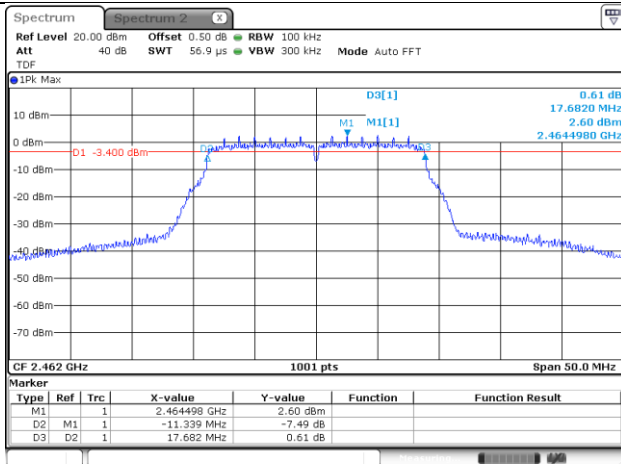

## 2 437 MHz

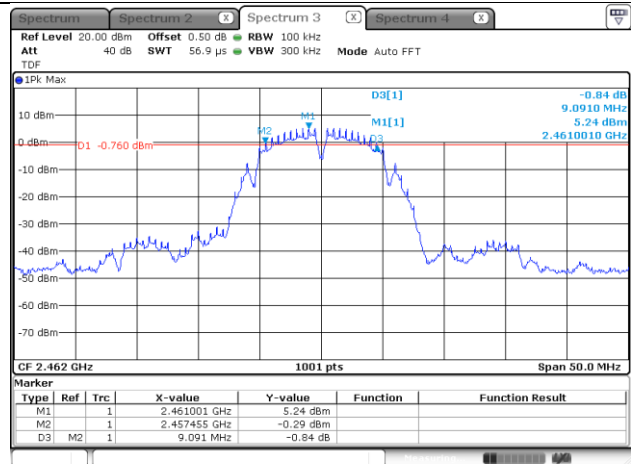

## 2 462 MHz

## 2 462 MHz

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR19-SRF0032-A

Page (25) of (96)




## ANT 2


### 802.11g

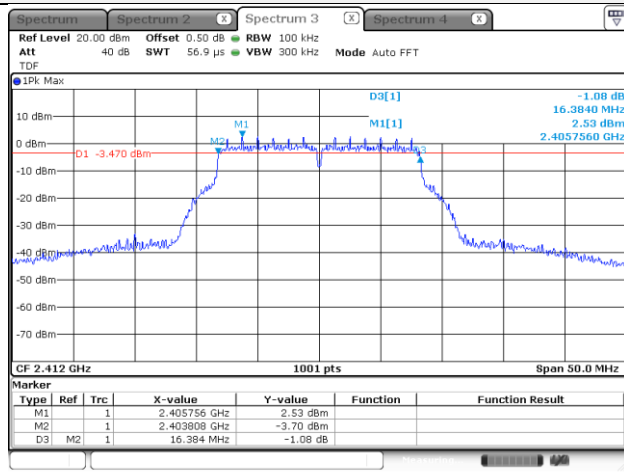


### 802.11n HT20

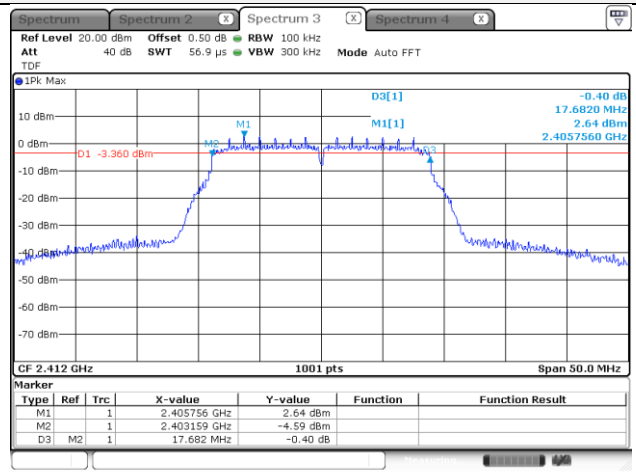


### 2 412 MHz

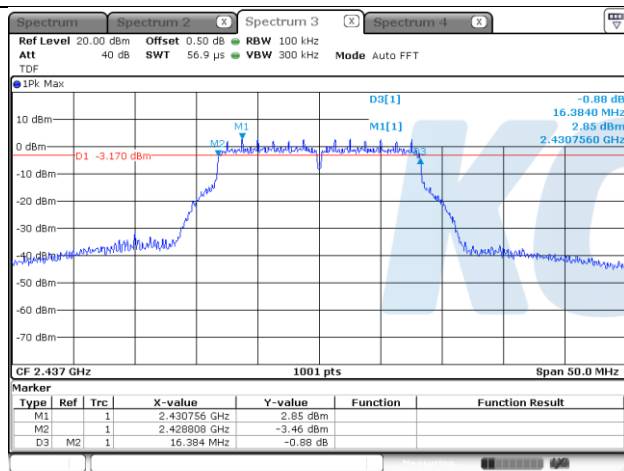


### 2 412 MHz

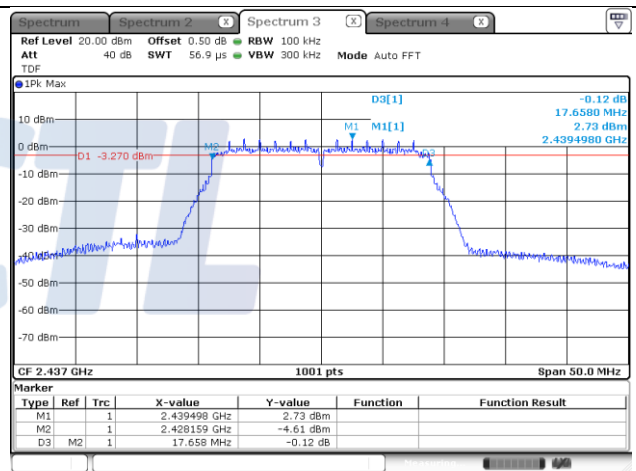

### 2 437 MHz

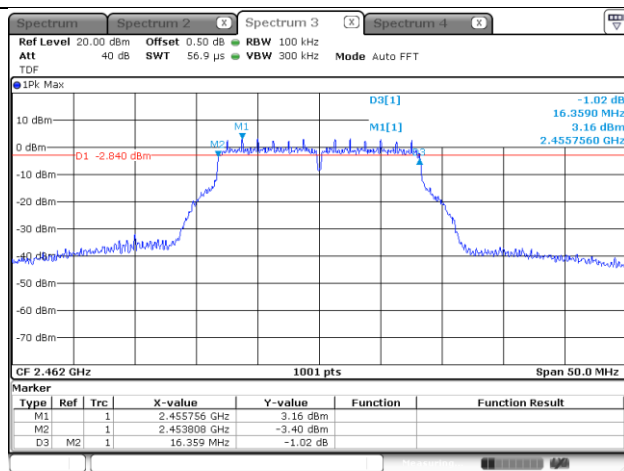

### 2 437 MHz

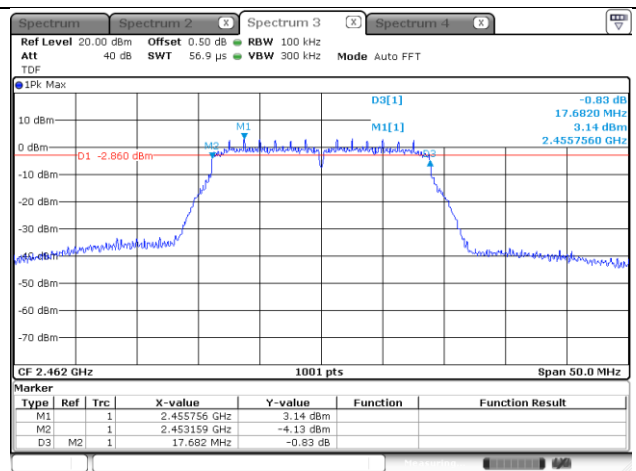

### 2 462 MHz



### 2 462 MHz



# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR19-SRF0032-A

Page (26) of (96)




## MIMO


### 802.11n HT20\_ANT 1

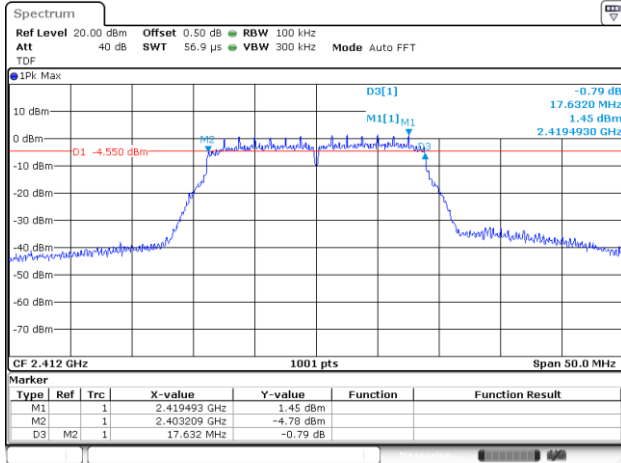


### 802.11n HT20\_ANT 2

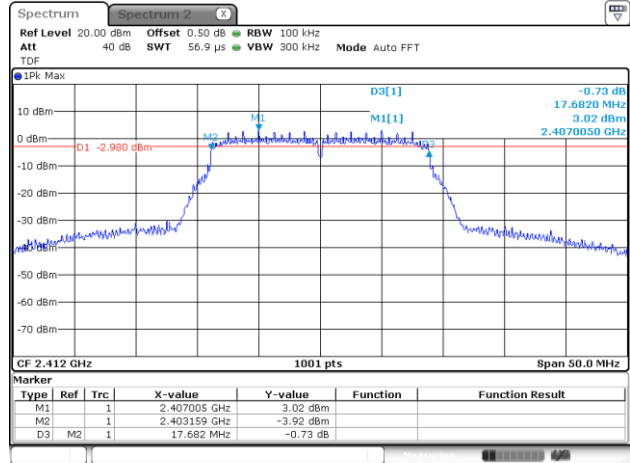


### 2 412 MHz

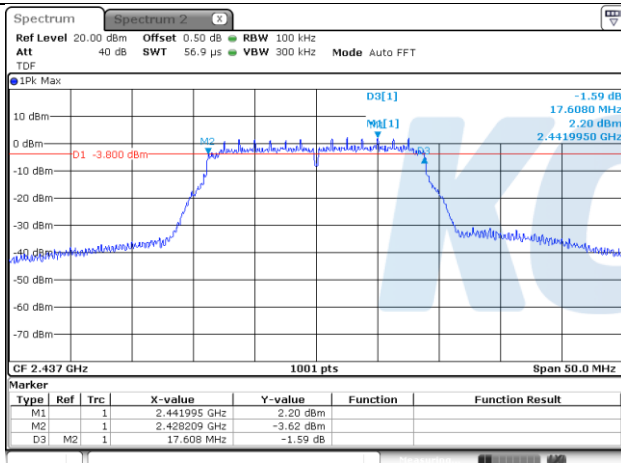


### 2 412 MHz

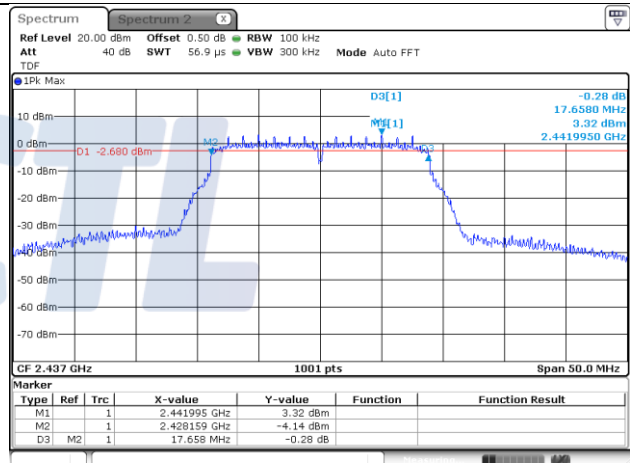

### 2 437 MHz

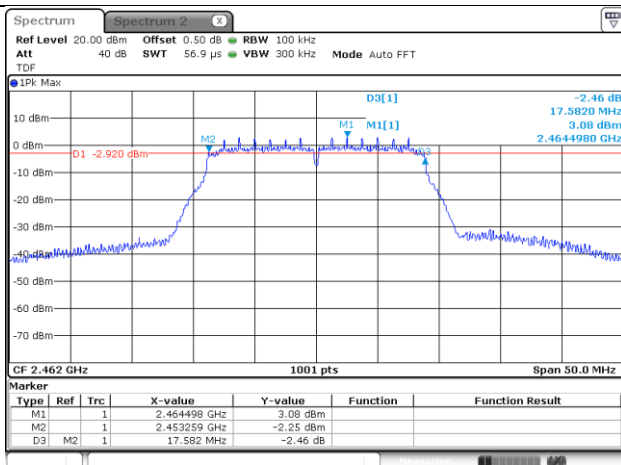

### 2 437 MHz

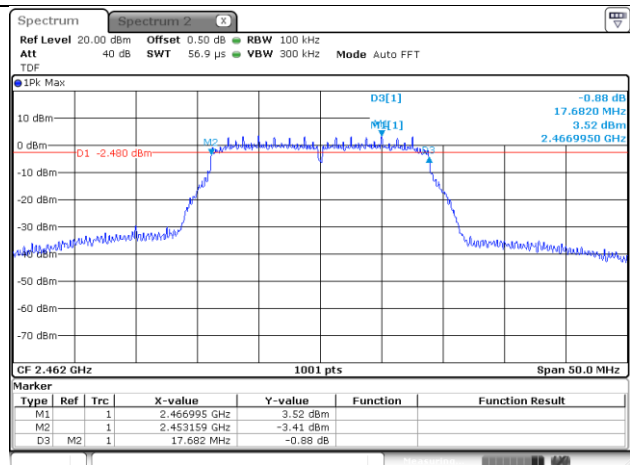

### 2 462 MHz



### 2 462 MHz



# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0032-A

Page (27) of (96)




## 99 % bandwidth(MHz)

### ANT 1

#### 802.11b




#### 802.11g

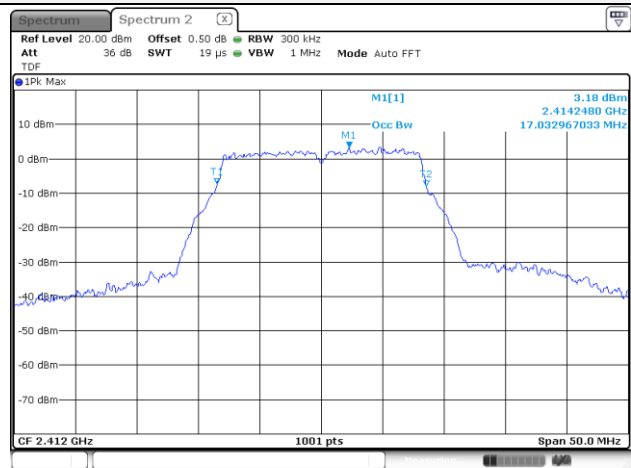


#### 2 412 MHz




#### 2 412 MHz

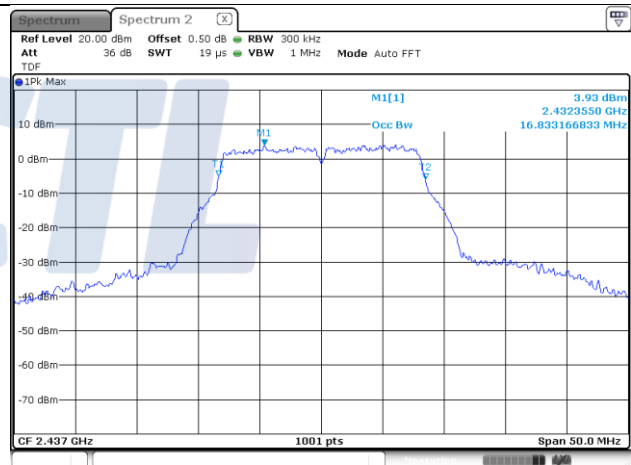

#### 2 437 MHz

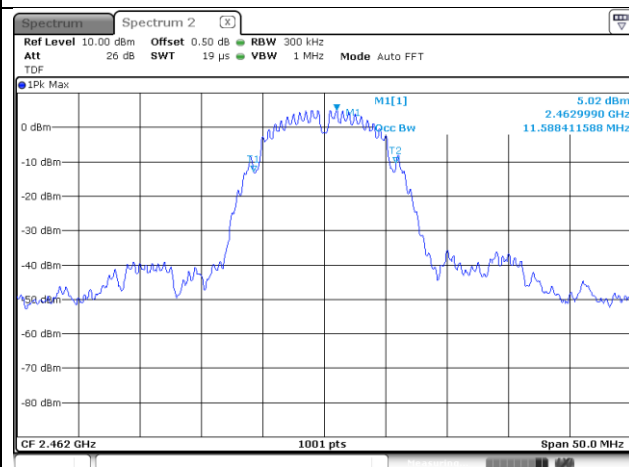

#### 2 437 MHz

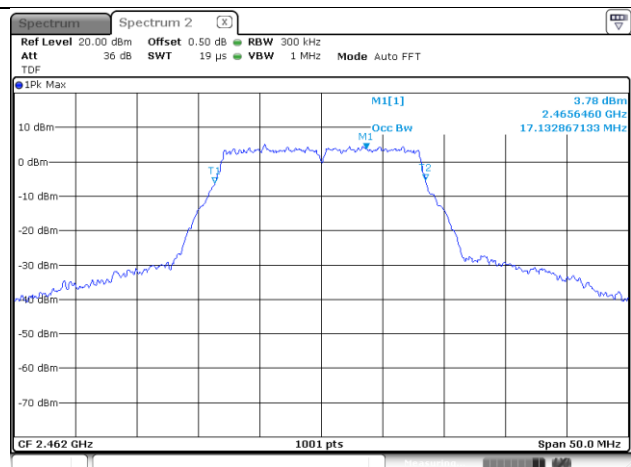

#### 2 462 MHz

#### 2 462 MHz

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR19-SRF0032-A

Page (28) of (96)




## ANT 1

### 802.11n HT20

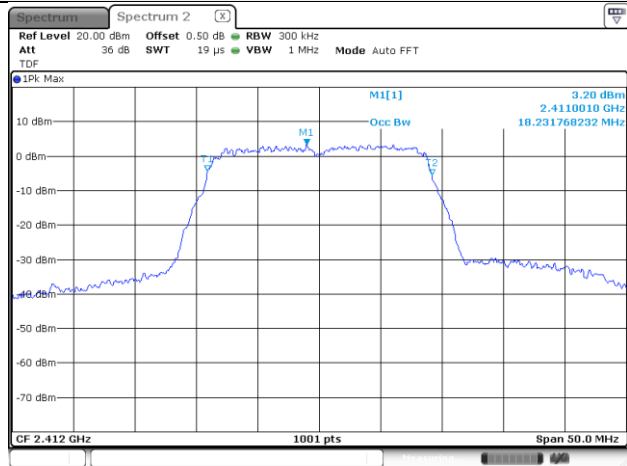


## ANT 2

### 802.11b

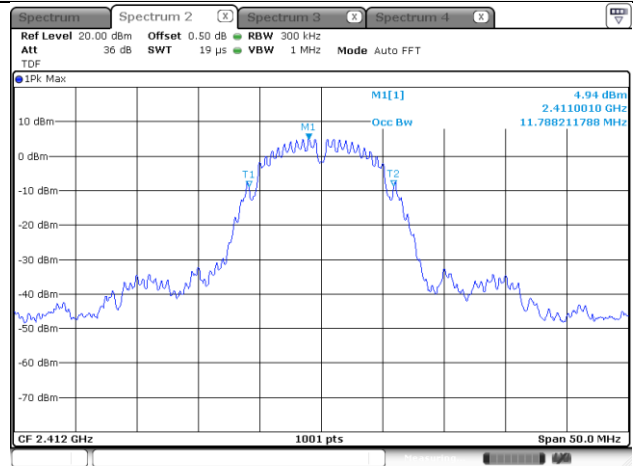


## 2 412 MHz

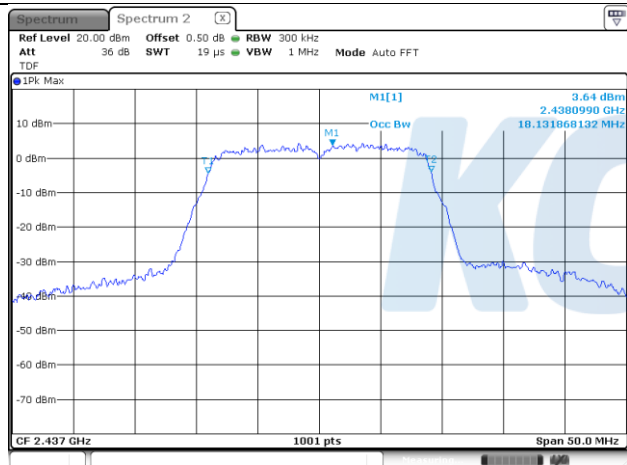


## 2 412 MHz



## 2 437 MHz

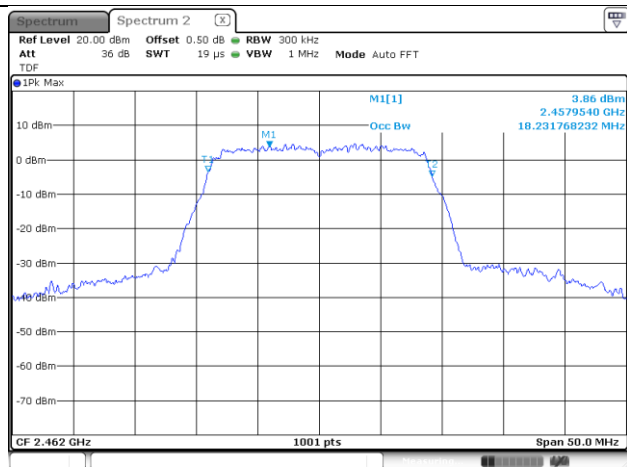

## 2 437 MHz

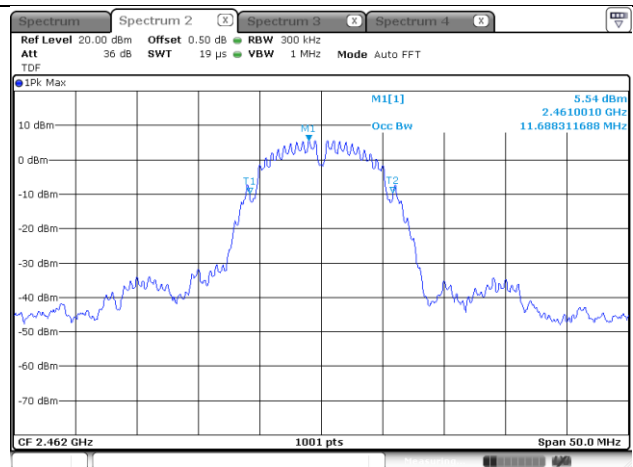

## 2 462 MHz



## 2 462 MHz



# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR19-SRF0032-A

Page (29) of (96)




## ANT 2


### 802.11g

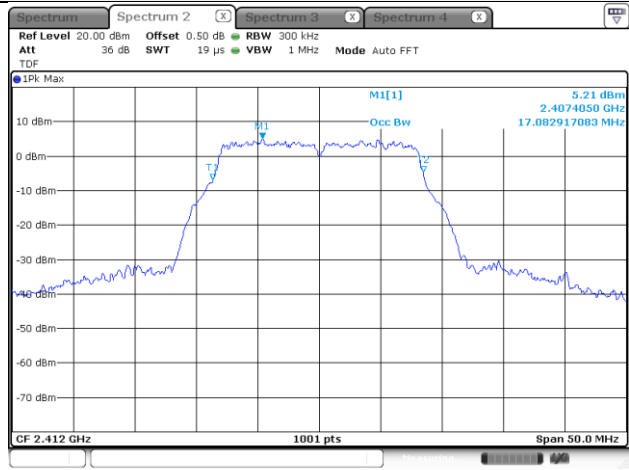

### 802.11n HT20

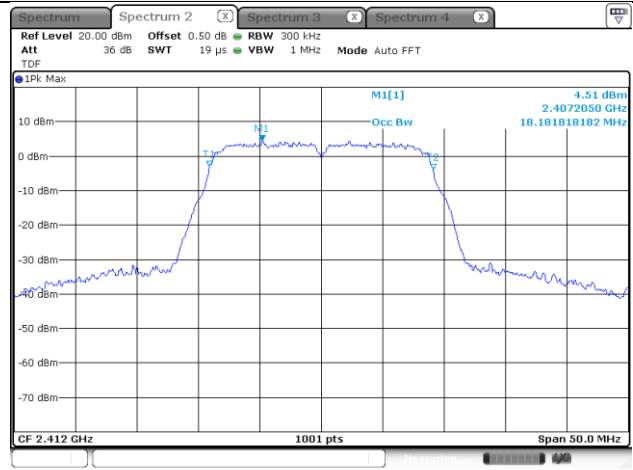


### 2 412 MHz

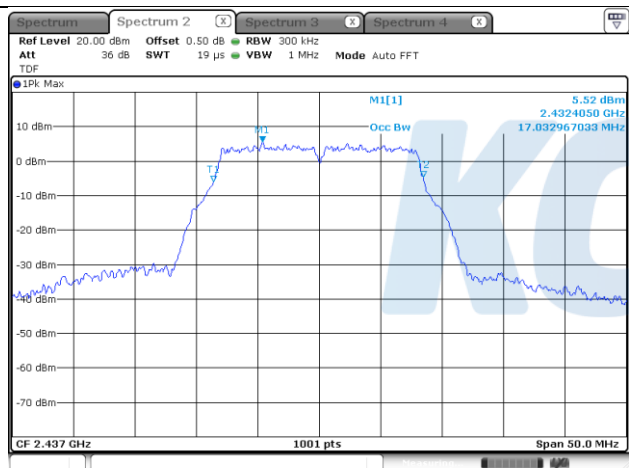


### 2 412 MHz



### 2 437 MHz

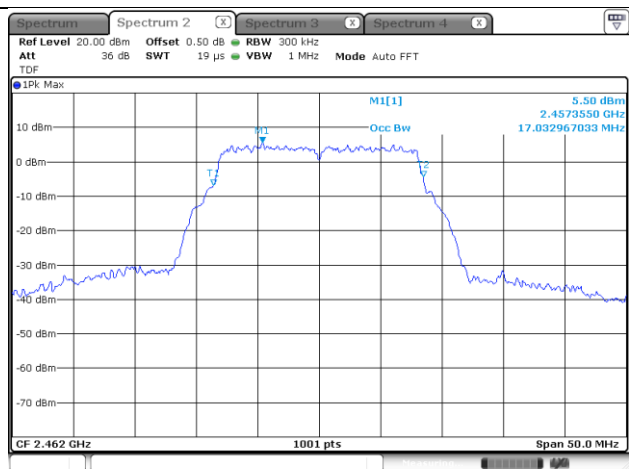

### 2 437 MHz

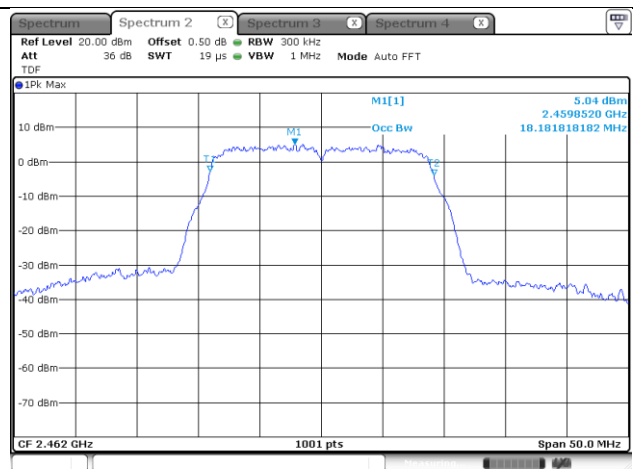

### 2 462 MHz



### 2 462 MHz

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR19-SRF0032-A

Page (30) of (96)




## MIMO


### 802.11n HT20\_ANT 1

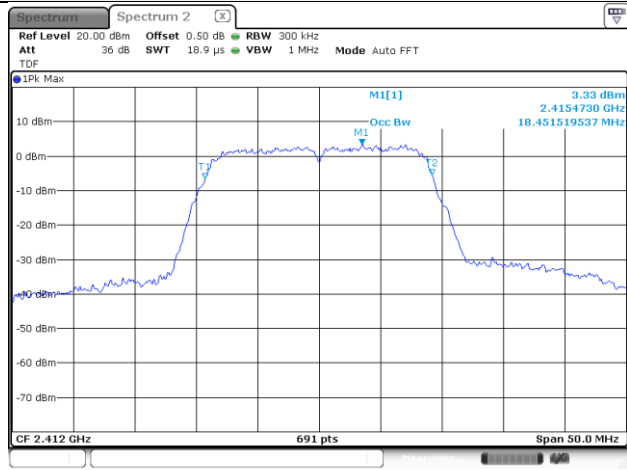


### 802.11n HT20\_ANT 2

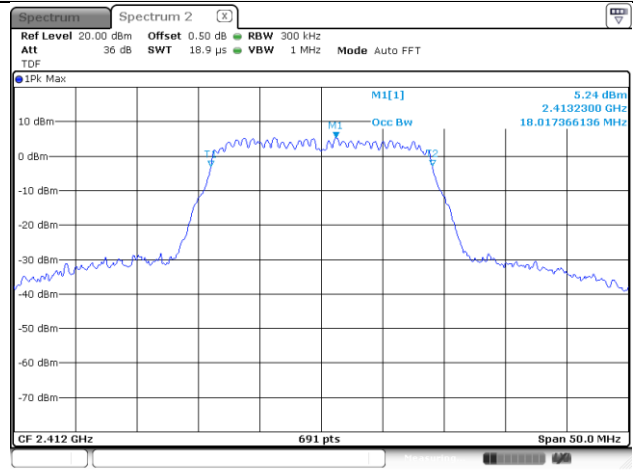


### 2 412 MHz

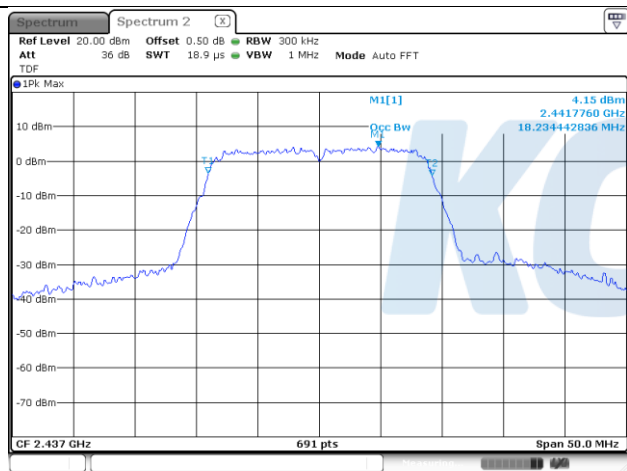


### 2 412 MHz

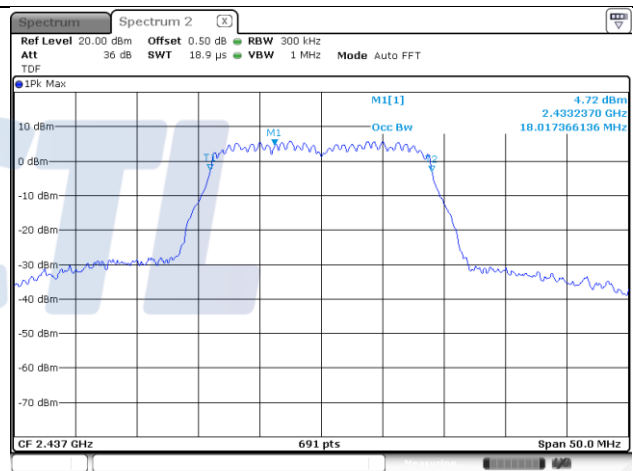

### 2 437 MHz

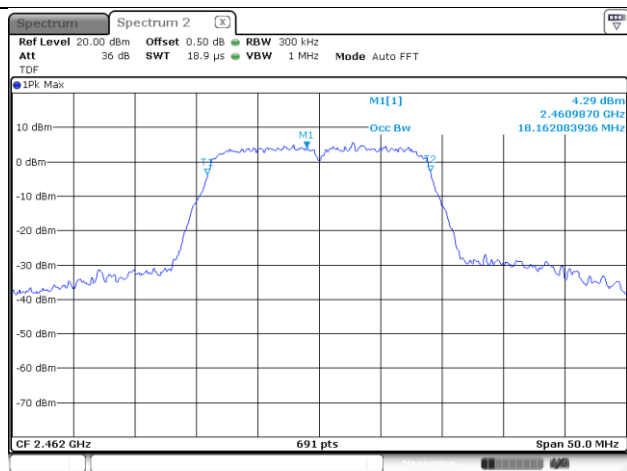

### 2 437 MHz

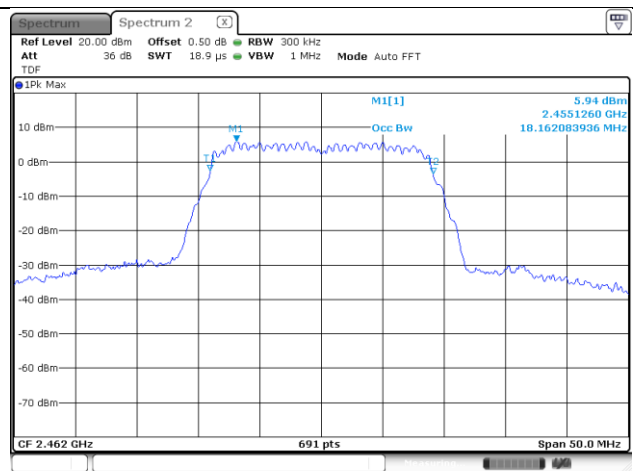

### 2 462 MHz



### 2 462 MHz




This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2


## 7.4. Spurious Emission, Band Edge and Restricted bands

### Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions

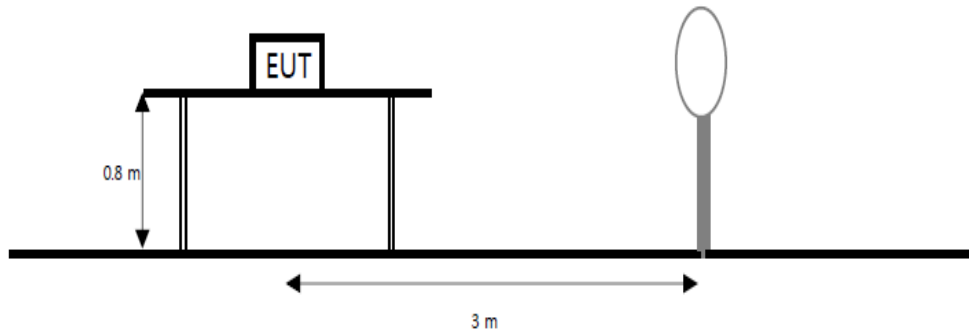

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

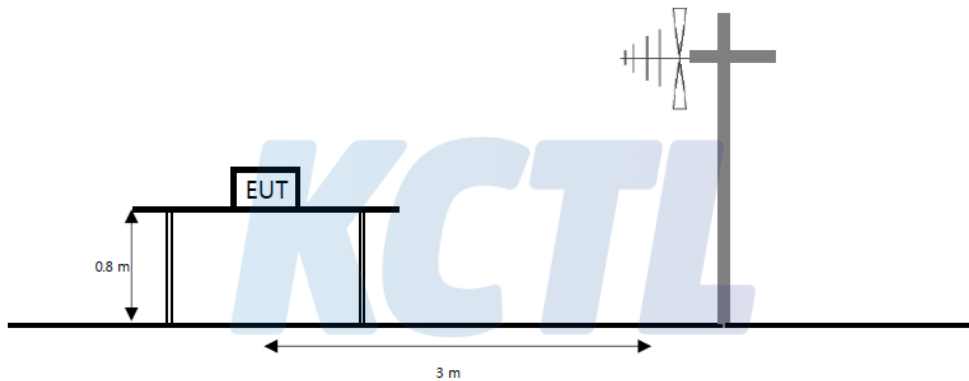

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

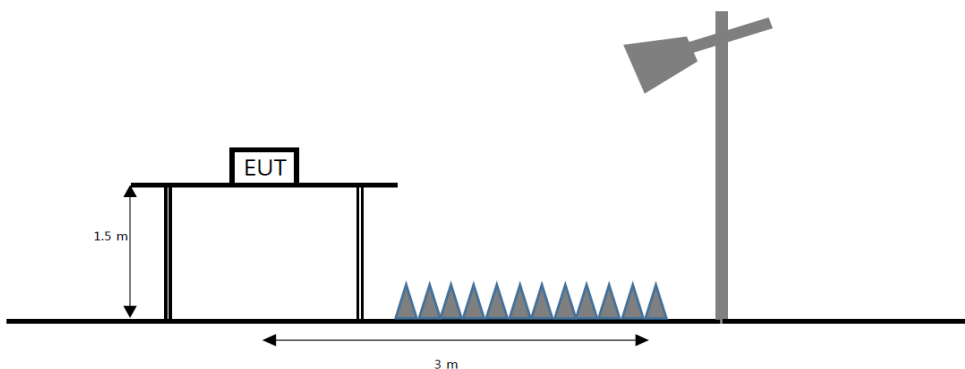

### Limit

According to section 15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field strength ( $\mu V/m$ ) | Measurement distance (m) |
|-----------------|------------------------------|--------------------------|
| 0.009 - 0.490   | 2 400/F(kHz)                 | 300                      |
| 0.490 - 1.705   | 24 000/F(kHz)                | 30                       |
| 1.705 - 30      | 30                           | 30                       |
| 30 - 88         | 100**                        | 3                        |
| 88 - 216        | 150**                        | 3                        |
| 216 - 960       | 200**                        | 3                        |
| Above 960       | 500                          | 3                        |

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

According to section 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                   | MHz                   | MHz               | GHz           |
|-----------------------|-----------------------|-------------------|---------------|
| 0.009 - 0.110         | 16.42 - 16.423        | 399.9 - 410       | 4.5 - 5.15    |
| 0.495 - 0.505         | 16.694 75 - 16.695 25 | 608 - 614         | 5.35 - 5.46   |
| 2.173 5 - 2.190 5     | 16.804 25 - 16.804 75 | 960 - 1 240       | 7.25 - 7.75   |
| 4.125 - 4.128         | 25.5 - 25.67          | 1 300 - 1 427     | 8.025 - 8.5   |
| 4.177 25 - 4.177 75   | 37.5 - 38.25          | 1 435 - 1 626.5   | 9.0 - 9.2     |
| 4.207 25 - 4.207 75   | 73 - 74.6             | 1 645.5 - 1 646.5 | 9.3 - 9.5     |
| 6.215 - 6.218         | 74.8 - 75.2           | 1 660 - 1 710     | 10.6 - 12.7   |
| 6.267 75 - 6.268 25   | 108 - 121.94          | 1 718.8 - 1 722.2 | 13.25 - 13.4  |
| 6.311 75 - 6.312 25   | 123 - 138             | 2 200 - 2 300     | 14.47 - 14.5  |
| 8.291 - 8.294         | 149.9 - 150.05        | 2 310 - 2 390     | 15.35 - 16.2  |
| 8.362 - 8.366         | 156.524 75 - 156.525  | 2 483.5 - 2 500   | 17.7 - 21.4   |
| 8.376 25 - 8.386 75   | 25                    | 2 690 - 2 900     | 22.01 - 23.12 |
| 8.414 25 - 8.414 75   | 156.7 - 156.9         | 3 260 - 3 267     | 23.6 - 24.0   |
| 12.29 - 12.293        | 162.012 5 - 167.17    | 3 332 - 3 339     | 31.2 - 31.8   |
| 12.519 75 - 12.520 25 | 167.72 - 173.2        | 3 345.8 - 3 358   | 36.43 - 36.5  |
| 12.576 75 - 12.577 25 | 240 - 285             | 3 600 - 4 400     | Above 38.6    |
| 13.36 - 13.41         | 322 - 335.4           |                   |               |

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in section 15.35 apply to these measurements.

**Test procedure**

ANSI C63.10-2013

KDB 558074 D01 V05r01

**Test settings****Peak field strength measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW  $\geq$  (3 $\times$ RBW)
4. Detector = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow sweeps to continue until the trace stabilizes

**Table. RBW as a function of frequency**

| Frequency           | RBW                |
|---------------------|--------------------|
| 9 kHz to 150 kHz    | 200 Hz to 300 Hz   |
| 0.15 MHz to 30 MHz  | 9 kHz to 10 kHz    |
| 30 MHz to 1 000 MHz | 100 kHz to 120 kHz |
| > 1 000 MHz         | 1 MHz              |

**Average field strength measurements****Trace averaging with continuous EUT transmission at full power**

If the EUT can be configured or modified to transmit continuously ( $D \geq 98\%$ ), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

1. RBW = 1 MHz (unless otherwise specified).
2. VBW  $\geq$  (3 $\times$ RBW).
3. Detector = RMS (power averaging), if  $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$ . Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
4. Averaging type = power (i.e., rms):
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.

**Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction**

If continuous transmission of the EUT ( $D \geq 98\%$ ) cannot be achieved and the duty cycle is constant (duty cycle variations are less than  $\pm 2\%$ ), then the following procedure shall be used:

1. The EUT shall be configured to operate at the maximum achievable duty cycle.
2. Measure the duty cycle D of the transmitter output signal as described in 11.6.
3. RBW = 1 MHz (unless otherwise specified).
4. VBW  $\geq$  [3  $\times$  RBW].
5. Detector = RMS (power averaging), if  $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$ . Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this

condition cannot be satisfied, then the detector mode shall be set to peak.

6. Averaging type = power (i.e., rms):
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
7. Sweep time = auto.
8. Perform a trace average of at least 100 traces.
9. A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (rms) mode was used in step f), then the applicable correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle.
  - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is  $[20 \log (1 / D)]$ , where D is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous ( $D \geq 98\%$ ) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

**Notes:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz ( $\geq 1/T$ ) for Average detection (AV) at frequency above 1 GHz. (where T = pulse width)
  2.  $f < 30$  MHz, extrapolation factor of 40 dB/decade of distance.  $F_d = 40 \log(D_m/D_s)$   
 $f \geq 30$  MHz, extrapolation factor of 20 dB/decade of distance.  $F_d = 20 \log(D_m/D_s)$   
 Where:  
 $F_d$  = Distance factor in dB  
 $D_m$  = Measurement distance in meters  
 $D_s$  = Specification distance in meters
  3. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or  $F_d$ (dB)
  4. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
  5. Average test would be performed if the peak result were greater than the average limit.
  6. <sup>1)</sup> mean is restricted band.
- According to part 15.31(f)(2), an extrapolation factor of 40 dB/decade is applied because measured distance of radiated emission is 3 m.

**KCTL Inc.**


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0032-A

Page (35) of (96)

**Test results (Below 30 MHz) – Worst case: 802.11n HT20 High frequency\_MIMO**

| Frequency                                                      | Pol.  | Reading        | Cable Loss | Amp Gain | Antenna Factor | DCCF | Result           | Limit            | Margin |
|----------------------------------------------------------------|-------|----------------|------------|----------|----------------|------|------------------|------------------|--------|
| (MHz)                                                          | (V/H) | (dB( $\mu$ V)) | (dB)       | (dB)     | (dB)           | (dB) | (dB( $\mu$ V/m)) | (dB( $\mu$ V/m)) | (dB)   |
| No spurious emissions were detected within 20 dB of the limit. |       |                |            |          |                |      |                  |                  |        |

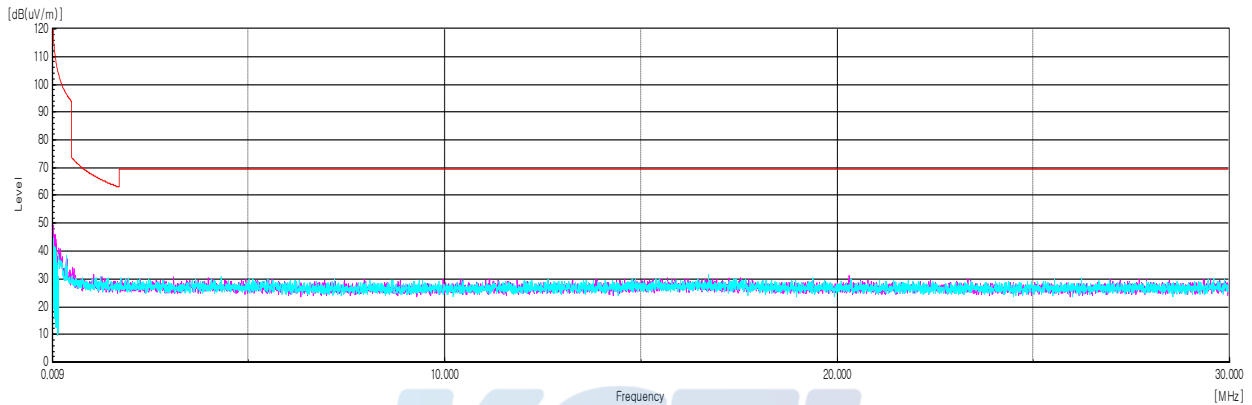**Horizontal/Vertical**

KCTL

**KCTL Inc.**


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0032-A

Page (36) of (96)


**Test results (Below 1 000 MHz) – Worst case: 802.11n HT20 High frequency\_MIMO**

| Frequency              | Pol.  | Reading  | Cable Loss | Amp Gain | Antenna Factor | DCCF | Result     | Limit      | Margin |
|------------------------|-------|----------|------------|----------|----------------|------|------------|------------|--------|
| (MHz)                  | (V/H) | (dB(μV)) | (dB)       | (dB)     | (dB)           | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Quasi peak data</b> |       |          |            |          |                |      |            |            |        |
| 35.82                  | V     | 38.40    | 1.19       | -36.01   | 21.72          | -    | 25.30      | 40.00      | 14.70  |
| 94.87                  | V     | 45.00    | 2.07       | -32.95   | 15.68          | -    | 29.80      | 43.50      | 13.70  |
| 191.99                 | H     | 41.40    | 3.05       | -30.51   | 15.26          | -    | 29.20      | 43.50      | 14.30  |
| 259.41                 | H     | 42.10    | 3.58       | -31.47   | 18.39          | -    | 32.60      | 46.00      | 13.40  |
| 395.93                 | H     | 38.30    | 4.54       | -30.64   | 21.60          | -    | 33.80      | 46.00      | 12.20  |
| 563.14                 | V     | 33.10    | 5.50       | -30.02   | 24.12          | -    | 32.70      | 46.00      | 13.30  |

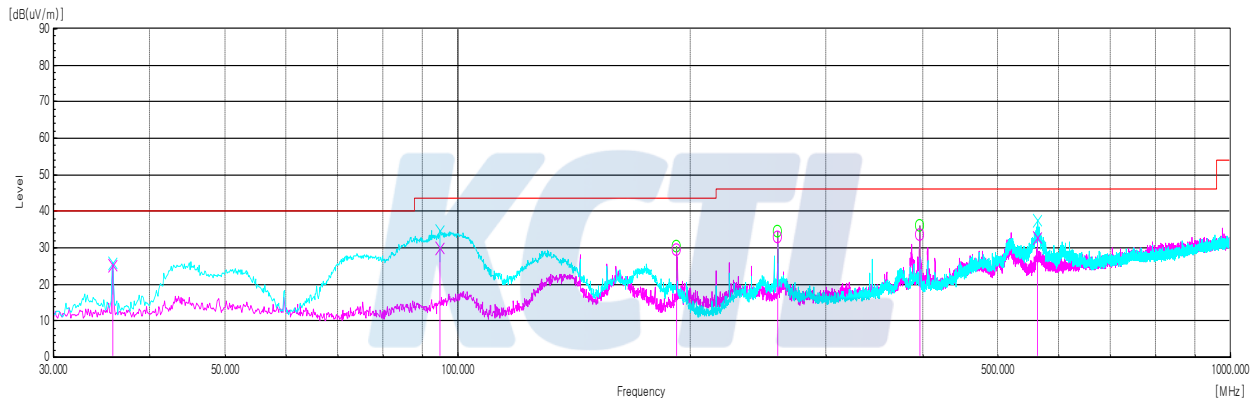**Horizontal/Vertical**


This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0032-A

Page (37) of (96)







**Test results (Above 1 000 MHz) ANT 1**  
**802.11b**

**Lowest Channel**

| Frequency                                                      | Pol.  | Reading         | Cable Loss | Amp Gain | Antenna Factor | DCCF | Result            | Limit             | Margin |
|----------------------------------------------------------------|-------|-----------------|------------|----------|----------------|------|-------------------|-------------------|--------|
| (MHz)                                                          | (V/H) | (dB( $\mu V$ )) | (dB)       | (dB)     | (dB)           | (dB) | (dB( $\mu V/m$ )) | (dB( $\mu V/m$ )) | (dB)   |
| <b>Peak data</b>                                               |       |                 |            |          |                |      |                   |                   |        |
| 1 188.20 <sup>1)</sup>                                         | H     | 79.63           | 2.65       | - 60.18  | 24.55          | -    | 46.65             | 74.00             | 27.35  |
| 1 979.77                                                       | V     | 73.18           | 3.41       | - 59.36  | 27.72          | -    | 44.95             | 74.00             | 29.05  |
| 2 389.82 <sup>1)</sup>                                         | H     | 40.49           | 3.70       | - 30.01  | 28.54          | -    | 42.72             | 74.00             | 31.28  |
| 4 823.58 <sup>1)</sup>                                         | H     | 67.18           | 5.35       | - 60.89  | 32.81          | -    | 44.45             | 74.00             | 29.55  |
| 7 235.56                                                       | V     | 62.55           | 6.72       | - 61.42  | 35.94          | -    | 43.79             | 74.00             | 30.21  |
| <b>Average Data</b>                                            |       |                 |            |          |                |      |                   |                   |        |
| No spurious emissions were detected within 20 dB of the limit. |       |                 |            |          |                |      |                   |                   |        |

**Horizontal/Vertical for Band-edge**



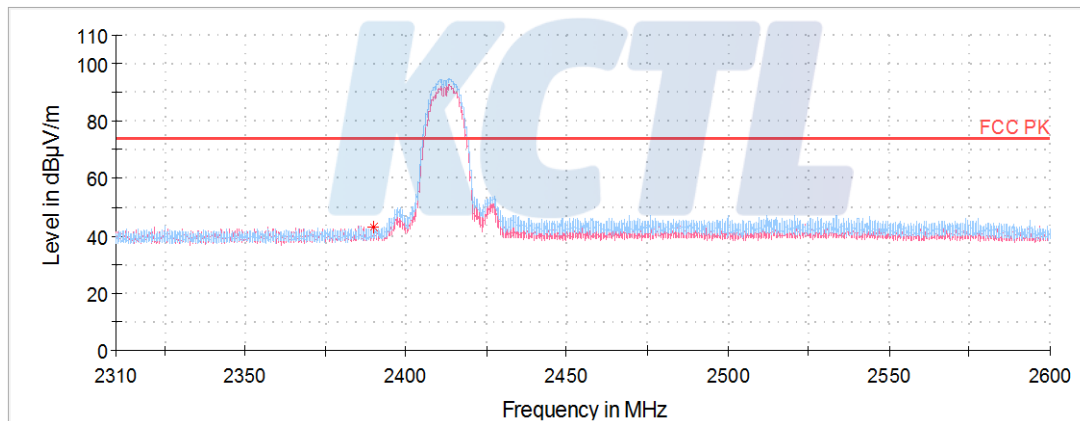


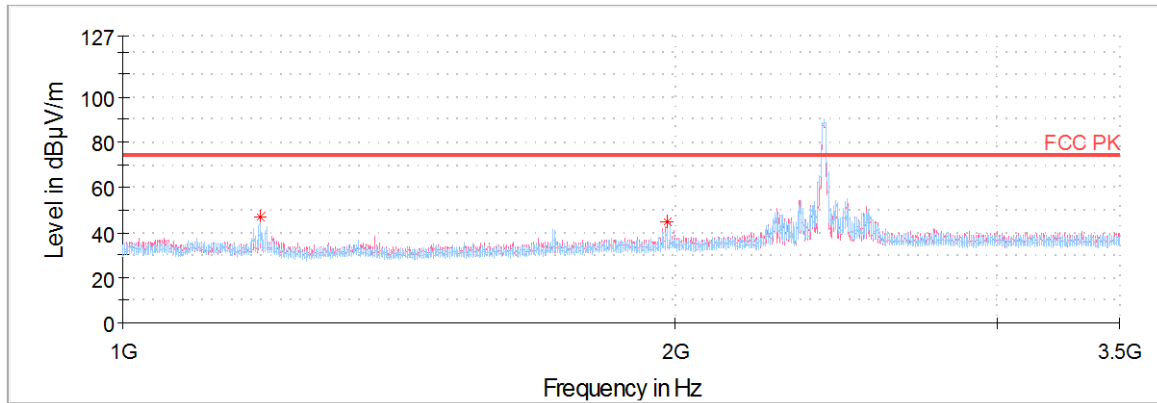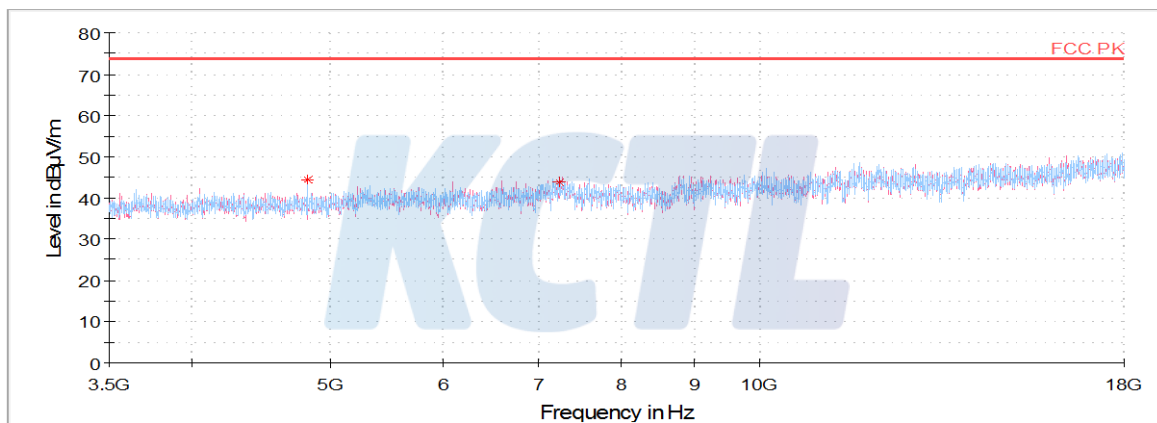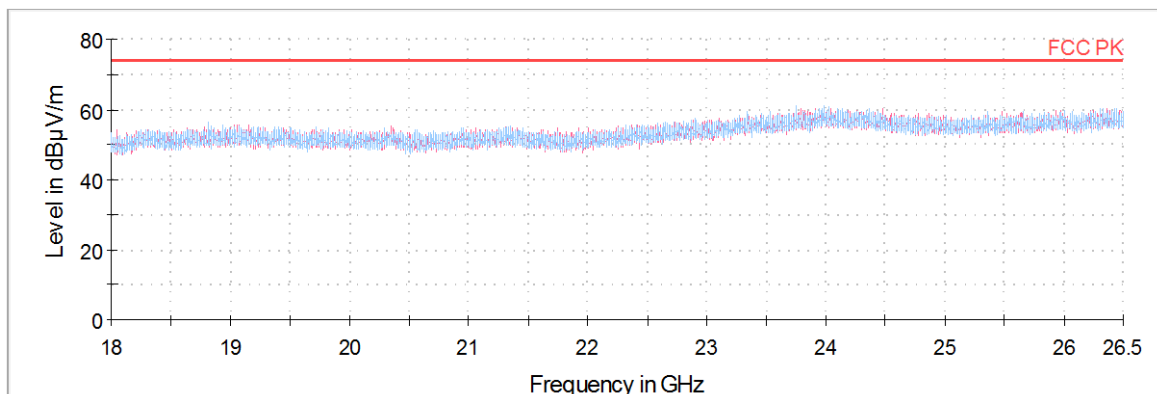**Horizontal/Vertical for 1 GHz ~ 3.5 GHz****Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

### Middle Channel

| Frequency                                                      | Pol.  | Reading         | Cable Loss | Amp Gain | Antenna Factor | DCCF | Result            | Limit             | Margin |
|----------------------------------------------------------------|-------|-----------------|------------|----------|----------------|------|-------------------|-------------------|--------|
| (MHz)                                                          | (V/H) | (dB( $\mu V$ )) | (dB)       | (dB)     | (dB)           | (dB) | (dB( $\mu V/m$ )) | (dB( $\mu V/m$ )) | (dB)   |
| <b>Peak data</b>                                               |       |                 |            |          |                |      |                   |                   |        |
| 1 188.20 <sup>1)</sup>                                         | V     | 77.79           | 2.65       | - 60.18  | 24.55          | -    | 44.81             | 74.00             | 29.19  |
| 1 980.31                                                       | H     | 72.72           | 3.41       | - 59.35  | 27.72          | -    | 44.50             | 74.00             | 29.50  |
| 4 873.88 <sup>1)</sup>                                         | V     | 69.15           | 5.39       | - 61.05  | 32.84          | -    | 46.33             | 74.00             | 27.67  |
| 7 320.30 <sup>1)</sup>                                         | V     | 62.78           | 6.76       | - 61.58  | 36.02          | -    | 43.99             | 74.00             | 30.01  |
| <b>Average Data</b>                                            |       |                 |            |          |                |      |                   |                   |        |
| No spurious emissions were detected within 20 dB of the limit. |       |                 |            |          |                |      |                   |                   |        |

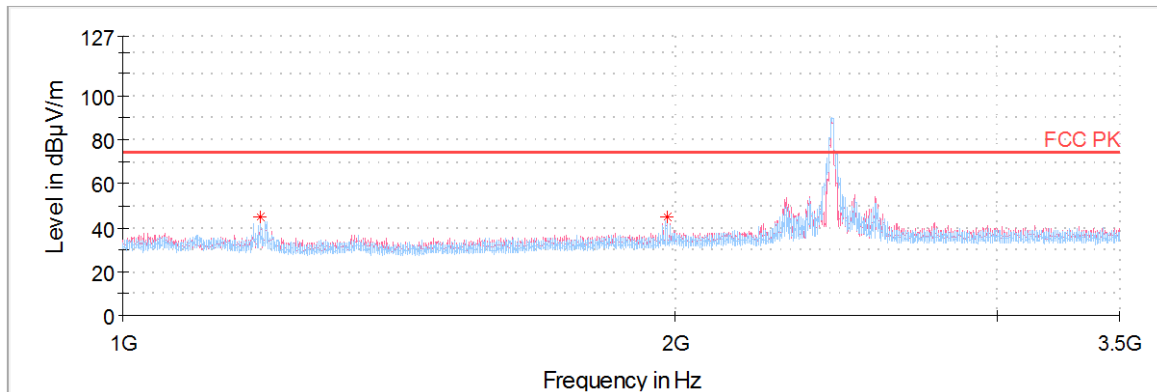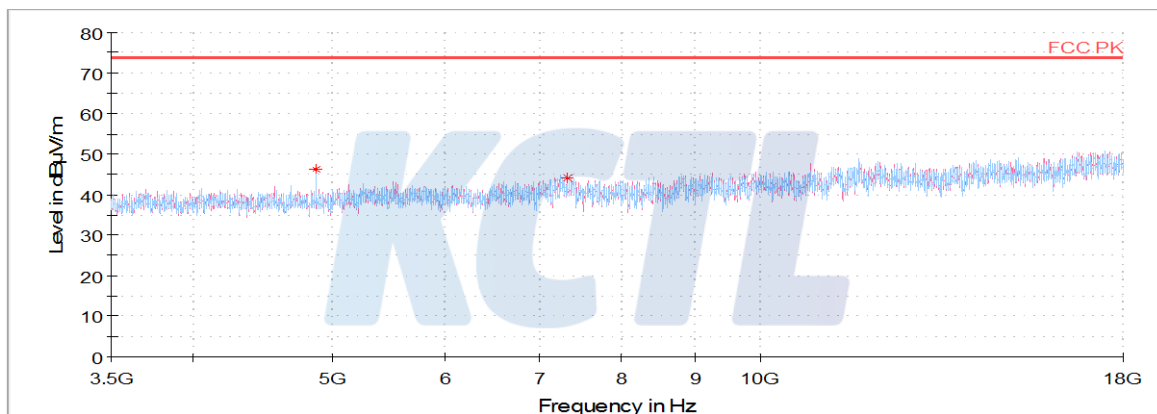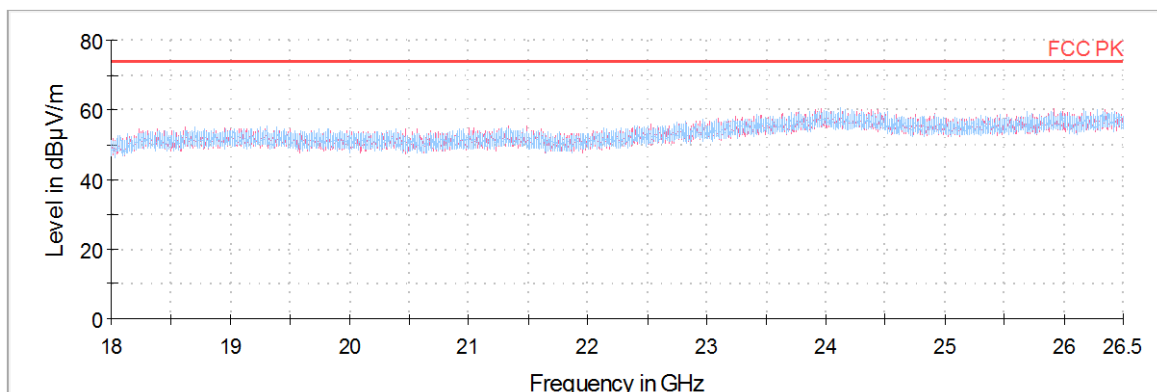

**Horizontal/Vertical for 1 GHz ~ 3.5 GHz****Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

**KCTL Inc.**


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)




Report No.:  
KR19-SRF0032-A

Page (41) of (96)

**Highest Channel**

| Frequency                                                      | Pol.  | Reading        | Cable Loss | Amp Gain | Antenna Factor | DCCF | Result           | Limit            | Margin |
|----------------------------------------------------------------|-------|----------------|------------|----------|----------------|------|------------------|------------------|--------|
| (MHz)                                                          | (V/H) | (dB( $\mu$ V)) | (dB)       | (dB)     | (dB)           | (dB) | (dB( $\mu$ V/m)) | (dB( $\mu$ V/m)) | (dB)   |
| <b>Peak data</b>                                               |       |                |            |          |                |      |                  |                  |        |
| 1 187.89 <sup>1)</sup>                                         | H     | 77.21          | 2.65       | - 60.18  | 24.55          | -    | 44.23            | 74.00            | 29.77  |
| 1 980.16                                                       | V     | 73.63          | 3.41       | - 59.35  | 27.72          | -    | 45.41            | 74.00            | 28.59  |
| 2 483.58 <sup>1)</sup>                                         | H     | 45.19          | 3.77       | - 30.29  | 28.72          | -    | 47.39            | 74.00            | 26.61  |
| 4 924.17 <sup>1)</sup>                                         | H     | 69.13          | 5.42       | - 60.96  | 32.86          | -    | 46.45            | 74.00            | 27.55  |
| 7 364.70                                                       | H     | 63.04          | 6.78       | - 61.66  | 36.06          | -    | 44.23            | 74.00            | 29.77  |
| <b>Average Data</b>                                            |       |                |            |          |                |      |                  |                  |        |
| No spurious emissions were detected within 20 dB of the limit. |       |                |            |          |                |      |                  |                  |        |

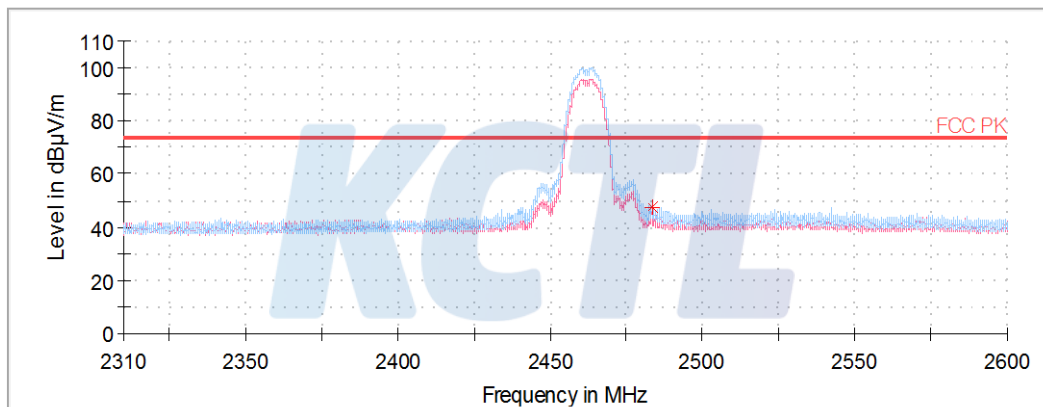**Horizontal/Vertical for Band-edge**

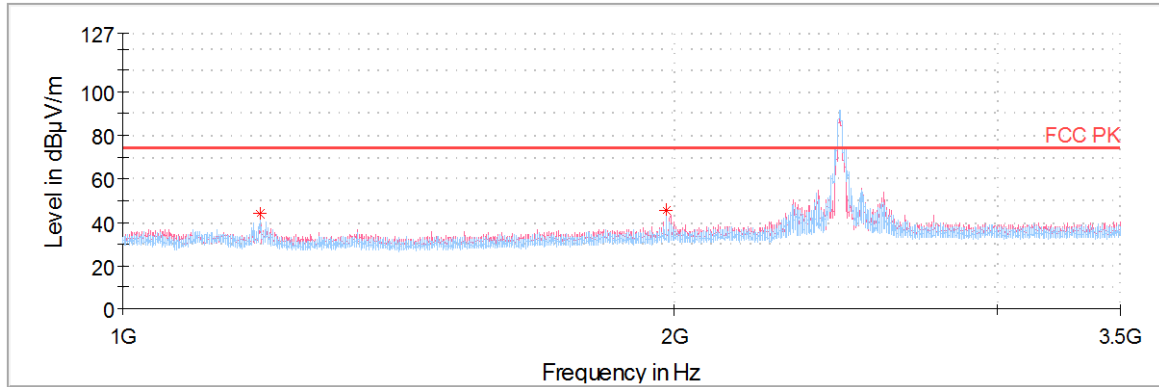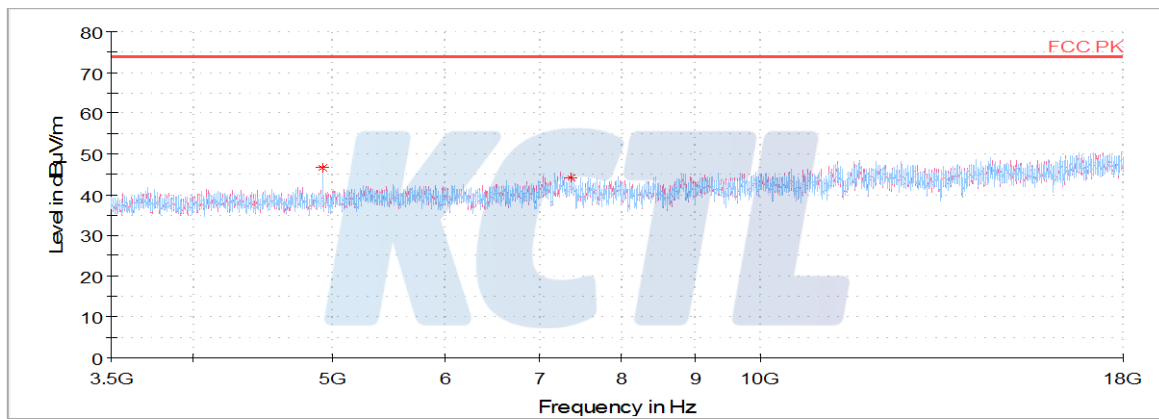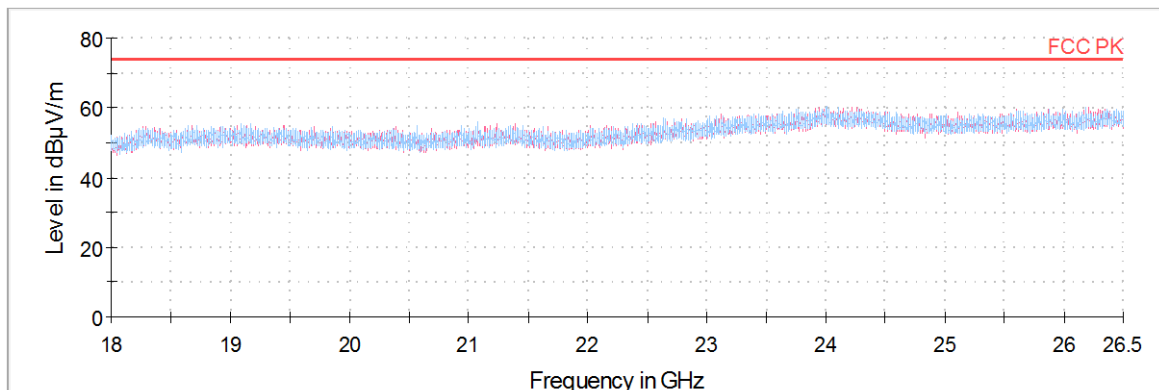**Horizontal/Vertical for 1 GHz ~ 3.5 GHz****Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

**KCTL Inc.**


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)




Report No.:  
KR19-SRF0032-A

Page (43) of (96)

**802.11g****Lowest Channel**

| Frequency                                                      | Pol.  | Reading  | Cable Loss | Amp Gain | Antenna Factor | DCCF | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|------------|----------|----------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)       | (dB)     | (dB)           | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                               |       |          |            |          |                |      |            |            |        |
| 1 187.97 <sup>1)</sup>                                         | V     | 79.26    | 2.65       | - 60.18  | 24.55          | -    | 46.28      | 74.00      | 27.72  |
| 1 980.08                                                       | V     | 72.26    | 3.41       | - 59.35  | 27.72          | -    | 44.04      | 74.00      | 29.96  |
| 2 389.74 <sup>1)</sup>                                         | H     | 46.22    | 3.70       | - 30.01  | 28.54          | -    | 48.45      | 74.00      | 25.55  |
| 4 834.91 <sup>1)</sup>                                         | H     | 66.45    | 5.36       | - 60.93  | 32.82          | -    | 43.71      | 74.00      | 30.29  |
| 7 244.63                                                       | V     | 63.63    | 6.72       | - 61.43  | 35.94          | -    | 44.86      | 74.00      | 29.14  |
| <b>Average Data</b>                                            |       |          |            |          |                |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit. |       |          |            |          |                |      |            |            |        |



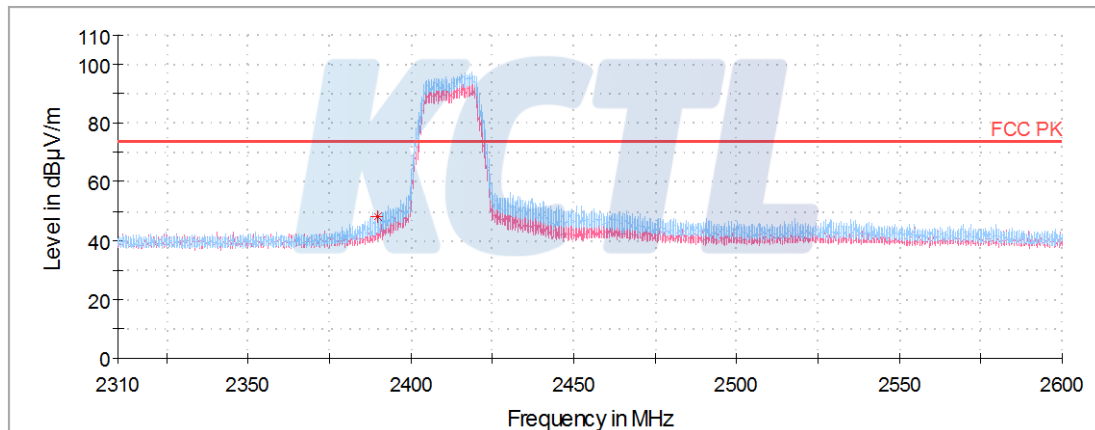
**Horizontal/Vertical for Band-edge**

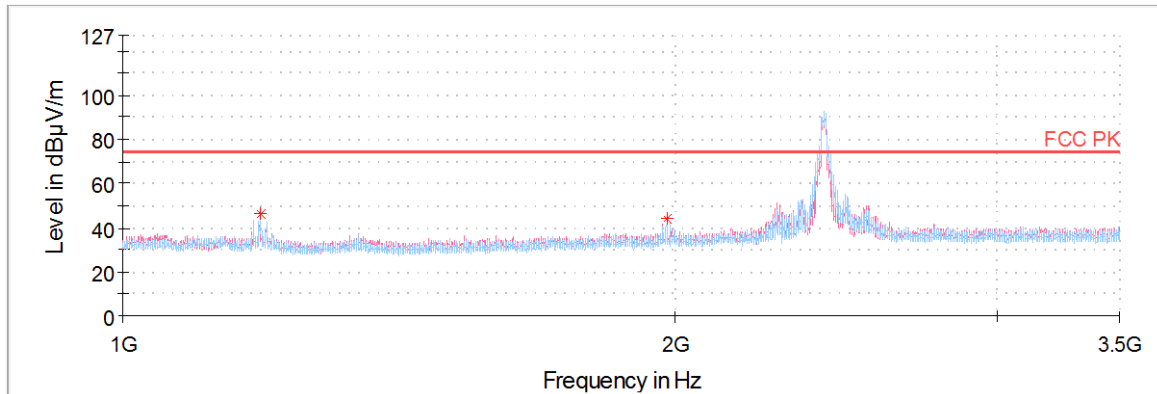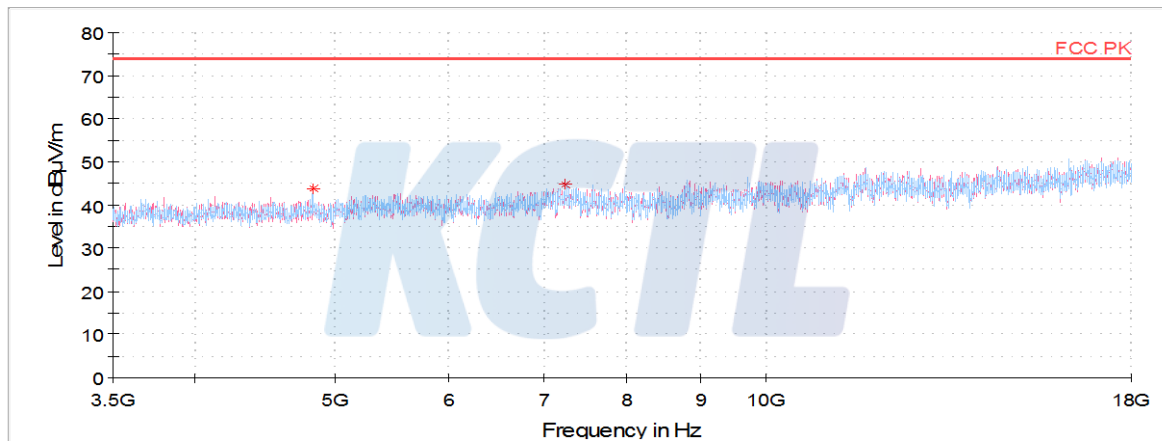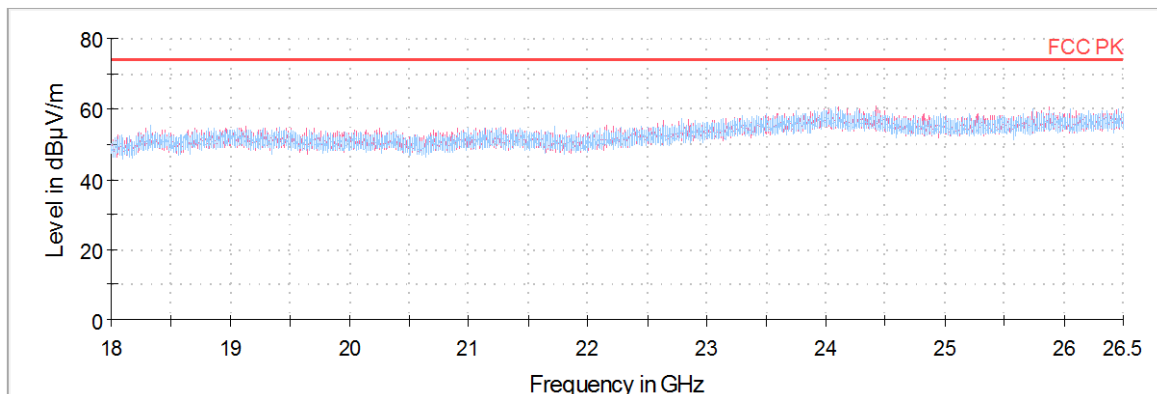**Horizontal/Vertical for 1 GHz ~ 3.5 GHz****Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

### Middle Channel

| Frequency                                                      | Pol.  | Reading  | Cable Loss | Amp Gain | Antenna Factor | DCCF | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|------------|----------|----------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)       | (dB)     | (dB)           | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                               |       |          |            |          |                |      |            |            |        |
| 1 188.28 <sup>1)</sup>                                         | H     | 79.26    | 2.65       | - 60.18  | 24.55          | -    | 46.28      | 74.00      | 27.72  |
| 1 979.77                                                       | V     | 71.58    | 3.41       | - 59.36  | 27.72          | -    | 43.35      | 74.00      | 30.65  |
| 4 870.70 <sup>1)</sup>                                         | V     | 67.14    | 5.38       | - 61.03  | 32.84          | -    | 44.33      | 74.00      | 29.67  |
| 7 240.55                                                       | V     | 64.61    | 6.72       | - 61.42  | 35.94          | -    | 45.85      | 74.00      | 28.15  |
| <b>Average Data</b>                                            |       |          |            |          |                |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit. |       |          |            |          |                |      |            |            |        |

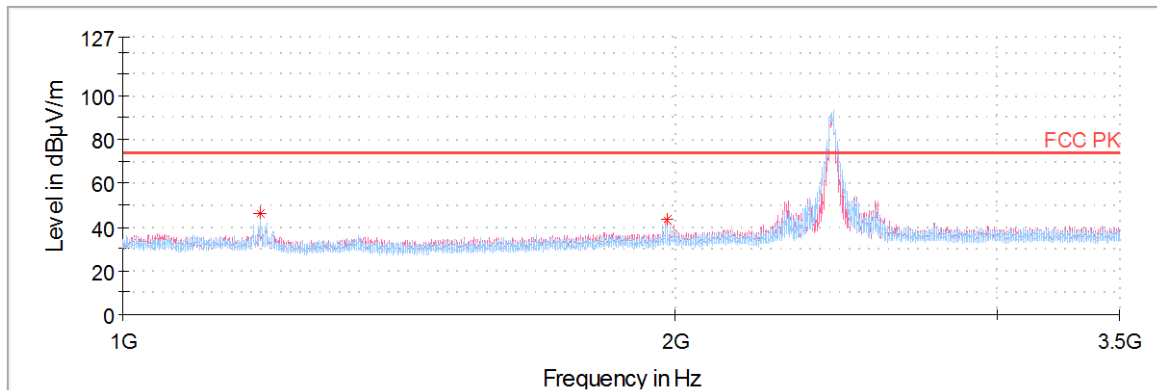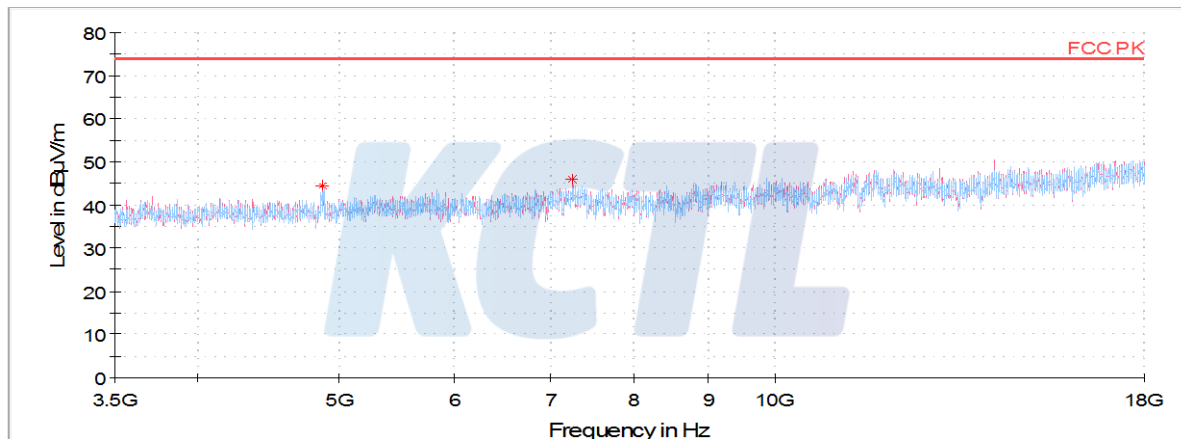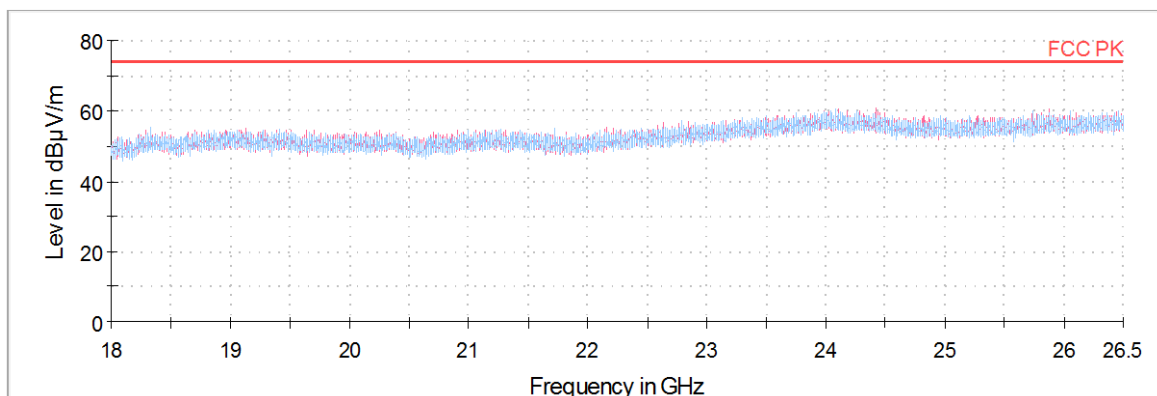

**Horizontal/Vertical for 1 GHz ~ 3.5 GHz****Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

**KCTL Inc.**


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0032-A


Page (47) of (96)

**Highest Channel**

| Frequency              | Pol.  | Reading  | Cable Loss | Amp Gain | Antenna Factor | DCCF | Result     | Limit      | Margin |
|------------------------|-------|----------|------------|----------|----------------|------|------------|------------|--------|
| (MHz)                  | (V/H) | (dB(μV)) | (dB)       | (dB)     | (dB)           | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>       |       |          |            |          |                |      |            |            |        |
| 1 187.97 <sup>1)</sup> | H     | 77.80    | 2.65       | - 60.18  | 24.55          | -    | 44.82      | 74.00      | 29.18  |
| 1 979.61               | V     | 71.73    | 3.41       | - 59.36  | 27.72          | -    | 43.50      | 74.00      | 30.50  |
| 2 485.79 <sup>1)</sup> | H     | 54.88    | 3.77       | - 30.29  | 28.72          | -    | 57.08      | 74.00      | 16.92  |
| 4 924.17 <sup>1)</sup> | H     | 65.96    | 5.42       | - 60.96  | 32.86          | -    | 43.28      | 74.00      | 30.72  |
| 7 379.66               | H     | 63.53    | 6.78       | - 61.69  | 36.08          | -    | 44.70      | 74.00      | 29.30  |
| <b>Average Data</b>    |       |          |            |          |                |      |            |            |        |
| 2 485.79 <sup>1)</sup> | H     | 44.25    | 3.77       | - 30.29  | 28.72          | 0.15 | 46.45      | 54.00      | 7.55   |



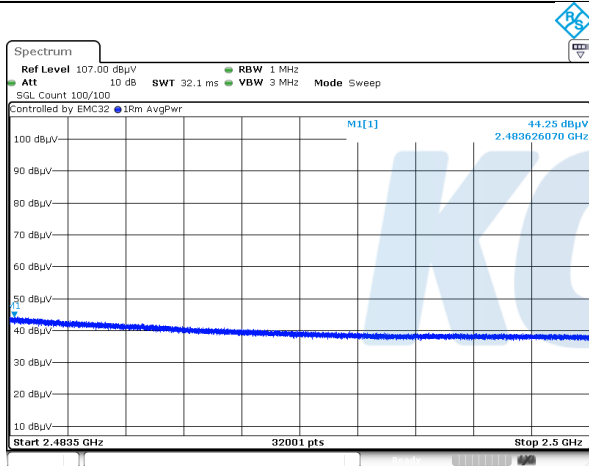
**Average data****Average data**

Blank

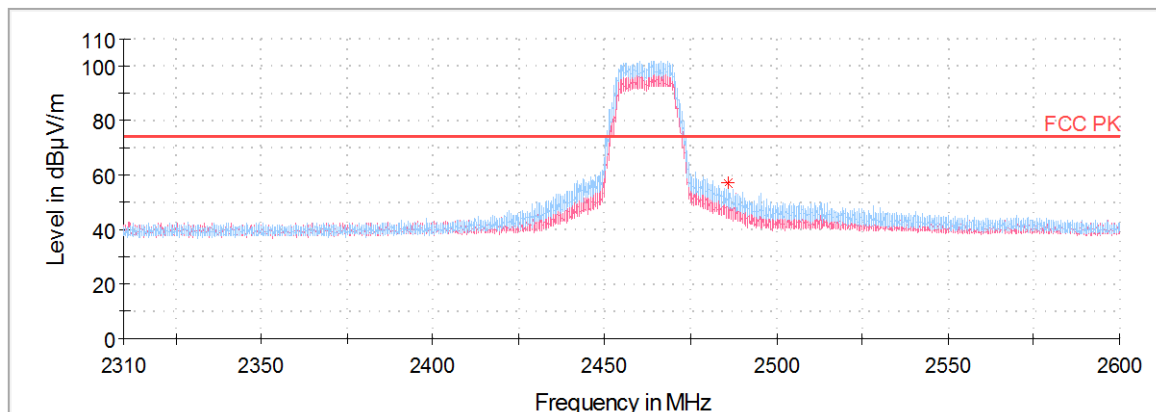**Horizontal/Vertical for Band-edge**

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

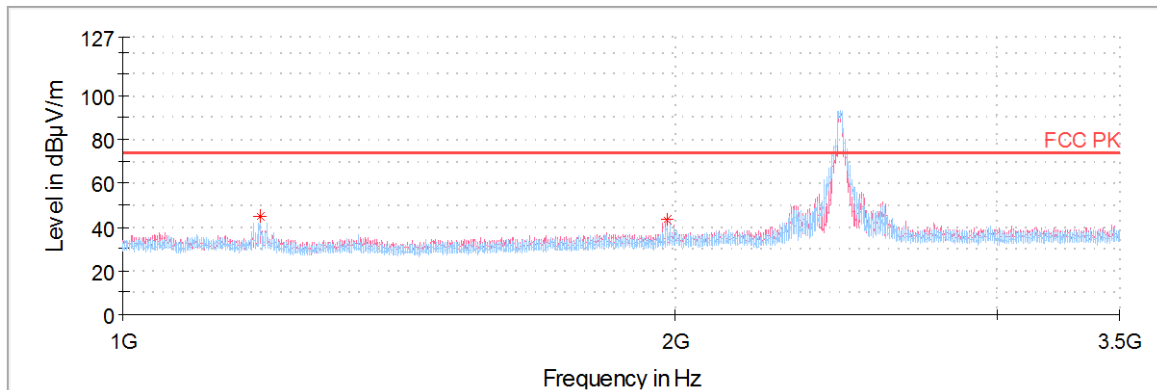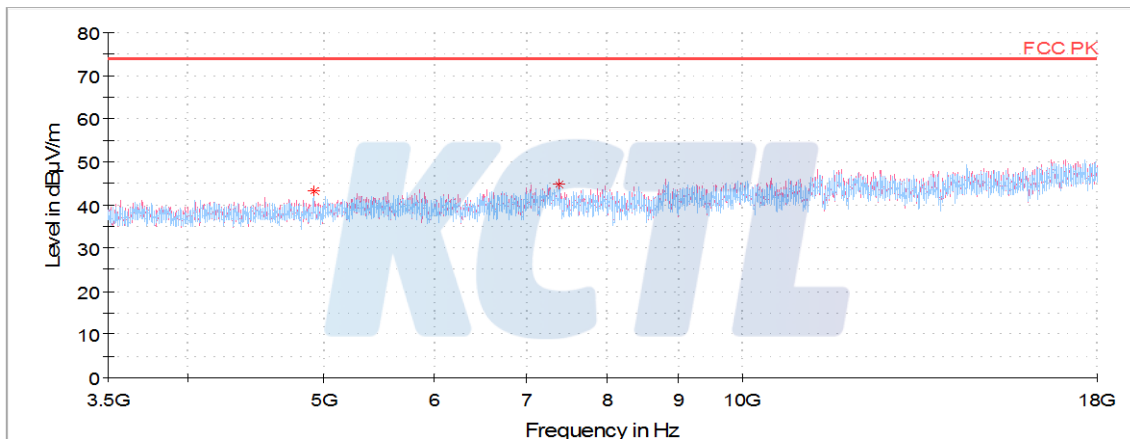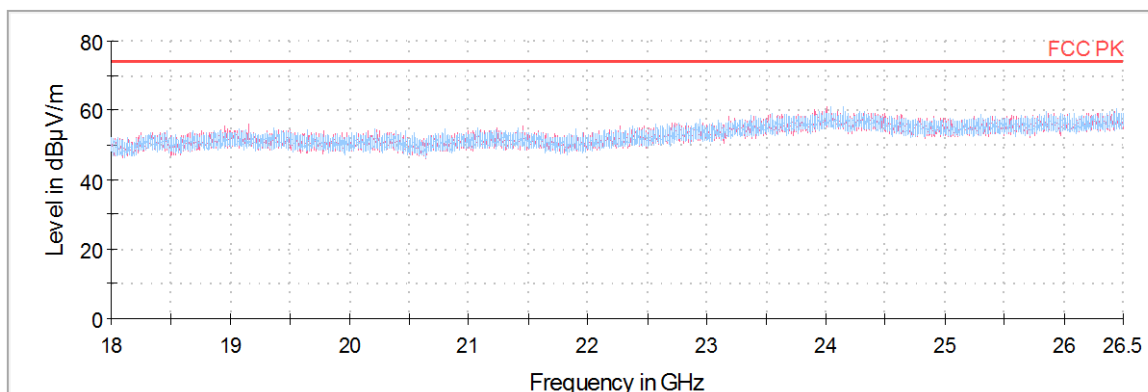**Horizontal/Vertical for 1 GHz ~ 3.5 GHz****Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

**KCTL Inc.**


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)



Report No.:  
KR19-SRF0032-A

Page (49) of (96)

**802.11n HT20****Lowest Channel**

| Frequency                                                      | Pol.  | Reading  | Cable Loss | Amp Gain | Antenna Factor | DCCF | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|------------|----------|----------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)       | (dB)     | (dB)           | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                               |       |          |            |          |                |      |            |            |        |
| 1 187.66 <sup>1)</sup>                                         | H     | 78.86    | 2.65       | - 60.18  | 24.55          | -    | 45.88      | 74.00      | 28.12  |
| 1 980.16                                                       | V     | 75.01    | 3.41       | - 59.35  | 27.72          | -    | 46.79      | 74.00      | 27.21  |
| 2 389.78 <sup>1)</sup>                                         | H     | 48.68    | 3.70       | - 30.01  | 28.54          | -    | 50.91      | 74.00      | 23.09  |
| 4 830.83 <sup>1)</sup>                                         | V     | 65.35    | 5.36       | - 60.92  | 32.82          | -    | 42.61      | 74.00      | 31.39  |
| 7 235.11                                                       | V     | 62.81    | 6.72       | - 61.42  | 35.94          | -    | 44.05      | 74.00      | 29.95  |
| <b>Average Data</b>                                            |       |          |            |          |                |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit. |       |          |            |          |                |      |            |            |        |

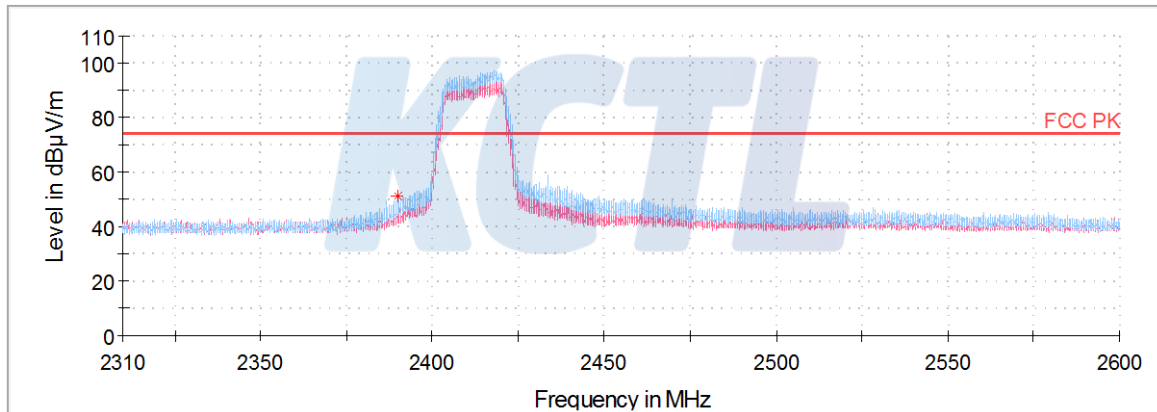**Horizontal/Vertical for Band-edge**

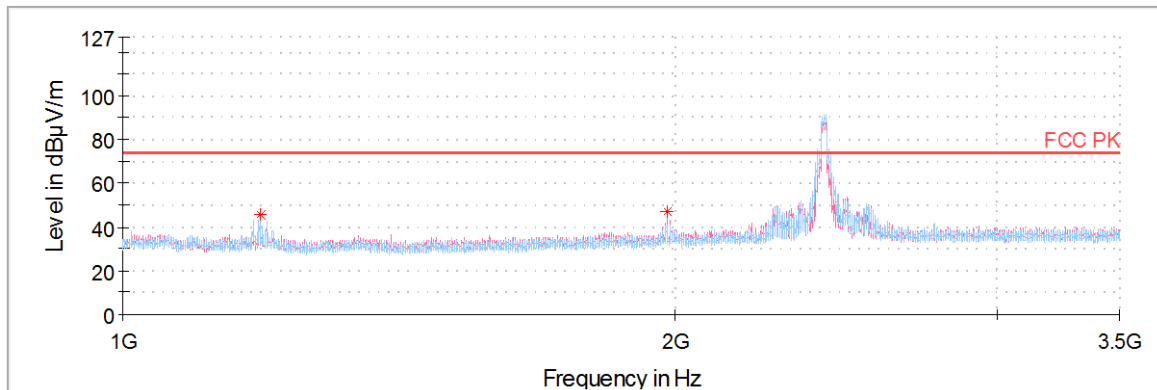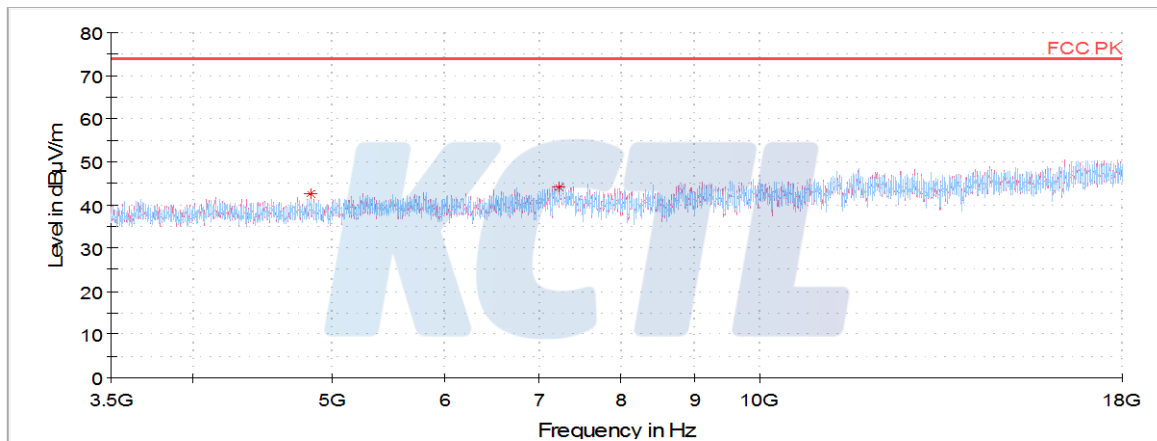**Horizontal/Vertical for 1 GHz ~ 3.5 GHz****Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**