

FCC Radio Test Report

FCC ID: 2A038-AP1000-41

This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1812C016
Equipment : Apex Lifestyle Small Cell
Test Model : AP1000-41
Series Model : N/A
Applicant : Casa Systems, Inc.
Address : 100 Old River Road Suite 100 Andover,
Massachusetts 01810 United States

Date of Receipt : Dec. 04, 2018
Date of Test : Dec. 04, 2018 ~ Dec. 20, 2018
Issued Date : Jan. 03, 2019
Tested by : BTL Inc.

Testing Engineer : Paul Li
(Paul Li)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Certificate #5123.02

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . GENERAL SUMMARY	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	13
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
3.5 DESCRIPTION OF SUPPORT UNITS	14
4 . EMC EMISSION TEST	15
4.1 CONDUCTED EMISSION MEASUREMENT	15
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	15
4.1.2 TEST PROCEDURE	15
4.1.3 DEVIATION FROM TEST STANDARD	15
4.1.4 TEST SETUP	16
4.1.5 EUT OPERATING CONDITIONS	16
4.1.6 EUT TEST CONDITIONS	16
4.1.7 TEST RESULTS	16
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 RADIATED EMISSION LIMITS	17
4.2.2 TEST PROCEDURE	18
4.2.3 DEVIATION FROM TEST STANDARD	18
4.2.4 TEST SETUP	19
4.2.5 EUT OPERATING CONDITIONS	20
4.2.6 EUT TEST CONDITIONS	20
4.2.7 TEST RESULTS (9 KHZ TO 30 MHZ)	20
4.2.8 TEST RESULTS (30 MHZ TO 1000 MHZ)	20
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	20
5 . BANDWIDTH TEST	21
5.1 APPLIED PROCEDURES	21
5.1.1 TEST PROCEDURE	21
5.1.2 DEVIATION FROM STANDARD	21
5.1.3 TEST SETUP	21
5.1.4 EUT OPERATION CONDITIONS	21
5.1.5 EUT TEST CONDITIONS	21
5.1.6 TEST RESULTS	21
6 . MAXIMUM OUTPUT POWER TEST	22

Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	22
6.1.1 TEST PROCEDURE	22
6.1.2 DEVIATION FROM STANDARD	22
6.1.3 TEST SETUP	22
6.1.4 EUT OPERATION CONDITIONS	22
6.1.5 EUT TEST CONDITIONS	22
6.1.6 TEST RESULTS	22
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	23
7.1 APPLIED PROCEDURES / LIMIT	23
7.1.1 TEST PROCEDURE	23
7.1.2 DEVIATION FROM STANDARD	23
7.1.3 TEST SETUP	23
7.1.4 EUT OPERATION CONDITIONS	23
7.1.5 EUT TEST CONDITIONS	23
7.1.6 TEST RESULTS	23
8 . POWER SPECTRAL DENSITY TEST	24
8.1 APPLIED PROCEDURES / LIMIT	24
8.1.1 TEST PROCEDURE	24
8.1.2 DEVIATION FROM STANDARD	24
8.1.3 TEST SETUP	24
8.1.4 EUT OPERATION CONDITIONS	24
8.1.5 EUT TEST CONDITIONS	24
8.1.6 TEST RESULTS	24
9 . MEASUREMENT INSTRUMENTS LIST	25
10 . EUT TEST PHOTO	27
APPENDIX A - CONDUCTED EMISSION	31
APPENDIX B - RADIATED EMISSION (9 KHZ TO 30 MHZ)	34
APPENDIX C - RADIATED EMISSION (30 MHZ TO 1000 MHZ)	39
APPENDIX D - RADIATED EMISSION (ABOVE 1000 MHZ)	46
APPENDIX E - BANDWIDTH	95
APPENDIX F - MAXIMUM OUTPUT POWER	104
APPENDIX G - ANTENNA CONDUCTED SPURIOUS EMISSION	108
APPENDIX H - POWER SPECTRAL DENSITY	145

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Jan. 03, 2019

1. GENERAL SUMMARY

Equipment : Apex Lifestyle Small Cell
Brand Name : N/A
Test Model : AP1000-41
Series Model : N/A
Applicant : Casa Systems, Inc.
Manufacturer : Casa Systems, Inc.
Address : 100 Old River Road Suite 100 Andover, Massachusetts 01810 United States
Date of Test : Dec. 04, 2018 ~ Dec. 20, 2018
Test Sample : Engineering Sample No.: D181211154
Standard(s) : FCC Part15, Subpart C (15.247) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1812C016) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of A2LA according to the ISO/IEC 17025 quality assessment standard and technical standard(s).

Test results included in this report is only for the WLAN 2.4GHz part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C			
Standard(s) Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(d)	Antenna conducted Spurious Emission	PASS	
15.247(a)(2)	6 dB Bandwidth	PASS	
15.247(b)(3)	Maximum output power	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
15.247(d)/ 15.205/ 15.209	Transmitter Radiated Emissions	PASS	

Note:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's Test Firm Registration Number for FCC: 357015

BTL's Designation Number for FCC: CN1240

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty figures shall be calculated according the methods described in the ETSI TR 100 028 and shall correspond to an expansion factor (coverage factor) $k=1.96$ or $k=2$ (which provide confidence levels of respectively 90% and 95.45% in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)). Measurement Uncertainty for a Level of Confidence of 95 %, $U=2xUc(y)$.

The BTL measurement uncertainty as below table:

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 kHz ~ 30 MHz	2.32

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9 KHz~30 MHz	V	3.79
		9 KHz~30 MHz	H	3.57
		30 MHz~200 MHz	V	3.82
		30 MH~200 MHz	H	3.78
		200 MHz~1,000 MHz	V	4.10
		200 MHz~1,000 MHz	H	4.06
		1 GHz~18 GHz	V	3.12
		1 GHz~18 GHz	H	3.68
		18 GHz~40 GHz	V	4.15
		18 GHz~40 GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Apex Lifestyle Small Cell	
Brand Name	N/A	
Test Model	AP1000-41	
Series Model	N/A	
Model Difference	N/A	
Hardware Version	REV1.0	
Software Version	v4.2.3	
Product Description	Operation Frequency	2412MHz ~ 2462MHz
	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM
	Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to 300 Mbps
	Output Power (Max.)	802.11b: 24.32 dBm 802.11g: 25.88 dBm 802.11n(20 MHz): 28.54 dBm 802.11n(40 MHz): 26.54 dBm
Power Source	DC voltage supplied from AC/DC adapter. Model Name: S24B72-120A200-0K	
Power Rating	I/P: 100-240V ~50/60Hz Max. 0.8A O/P: 12V --- 2A	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- Channel List:

CH01 - CH11 for 802.11b, 802.11g, 802.11n(20 MHz) CH03 - CH09 for 802.11n(40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna

Ant.	Brand	P/N	Antenna Type	Connector	Gain(dBi)
1		SSR-1809026	Internal	IPEX	2.91
2		SSR-1805035	Internal	IPEX	2.93

Note:

This EUT supports MIMO 2X2, any transmit signals are correlated with each other, so Directional gain = $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N]$ dBi, that is Directional gain = $10\log[(10^{2.91/20} + 10^{2.93/20})^2 / 2]$ dBi = 5.93.

4. The worst case for 1TX/2TX as follow:

Operating Mode	TX Mode	1TX	2TX
		802.11b	V (ANT 2)
802.11g	V (ANT 2)	-	-
802.11n(20 MHz)		-	V (ANT 1+ANT 2)
802.11n(40 MHz)		-	V (ANT 1+ANT 2)

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09
Mode 5	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode:	Description
Mode 5	TX Mode

For Radiated Test	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

For Band Edge Test	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

6 dB Spectrum Bandwidth	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

Maximum Output Power	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

Power Spectral Density	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1 Mbps)
 802.11g mode: OFDM (6 Mbps)
 802.11n HT20 mode : BPSK (13 Mbps)
 802.11n HT40 mode : BPSK (27 Mbps)
 For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated 30 MHz to 1000 MHz test, the 802.11b is found to be the worst case and recorded.

3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	QATest Application V0.0.1.84		
Frequency (MHz)	2412	2437	2462
802.11b	1E	23	20
802.11g	18	24	1A
802.11n (20 MHz)	17	24	1C
Frequency (MHz)	2422	2437	2452
802.11n (40 MHz)	13	1C	15

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

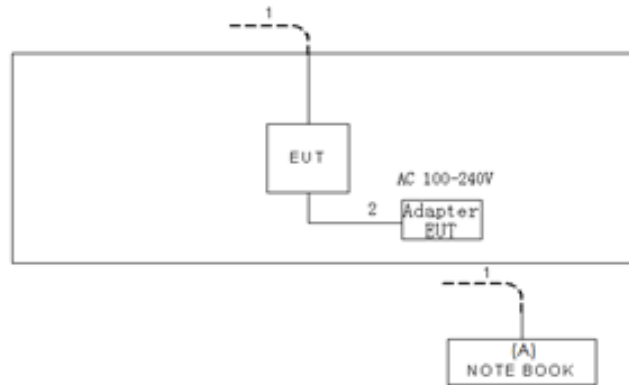

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	NOTEBOOK	DELL	INSPIRON 1420	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	10m	RJ45 Cable
2	NO	NO	1.8m	DC Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150 kHz-30 MHz)

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

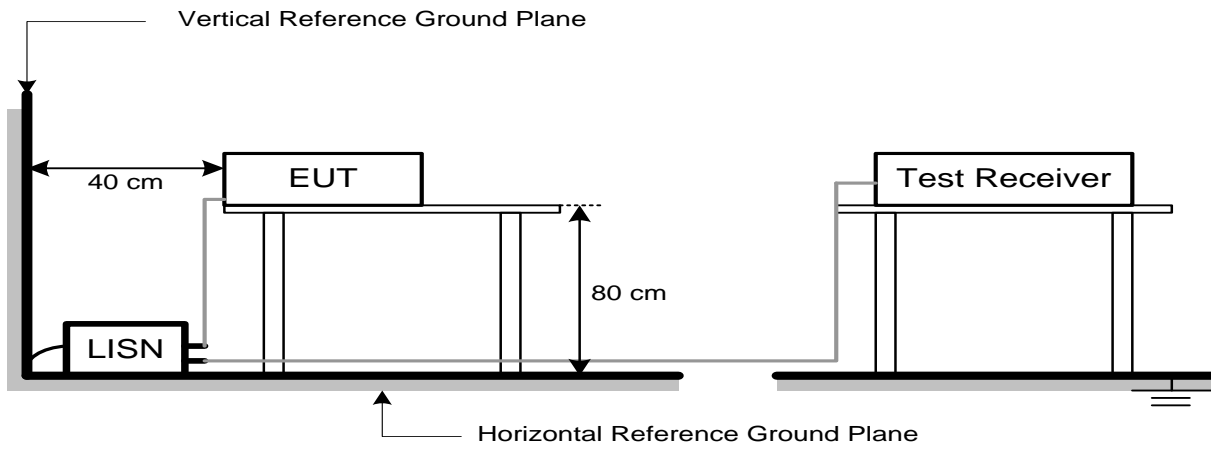

4.1.5 EUT OPERATING CONDITIONS

The EUT was placed on the test table and programmed in normal function.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 53% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Appendix A.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency 30 MHz-1000 MHz

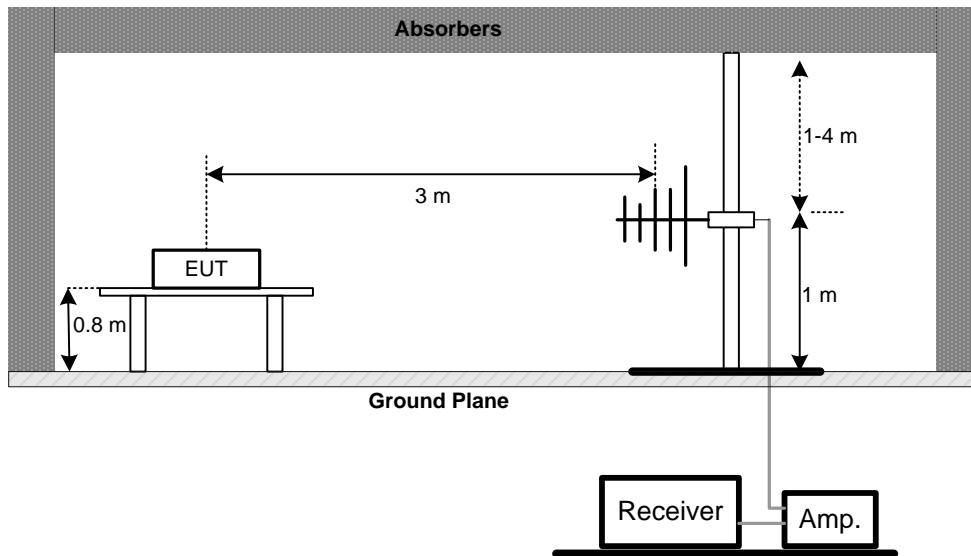

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

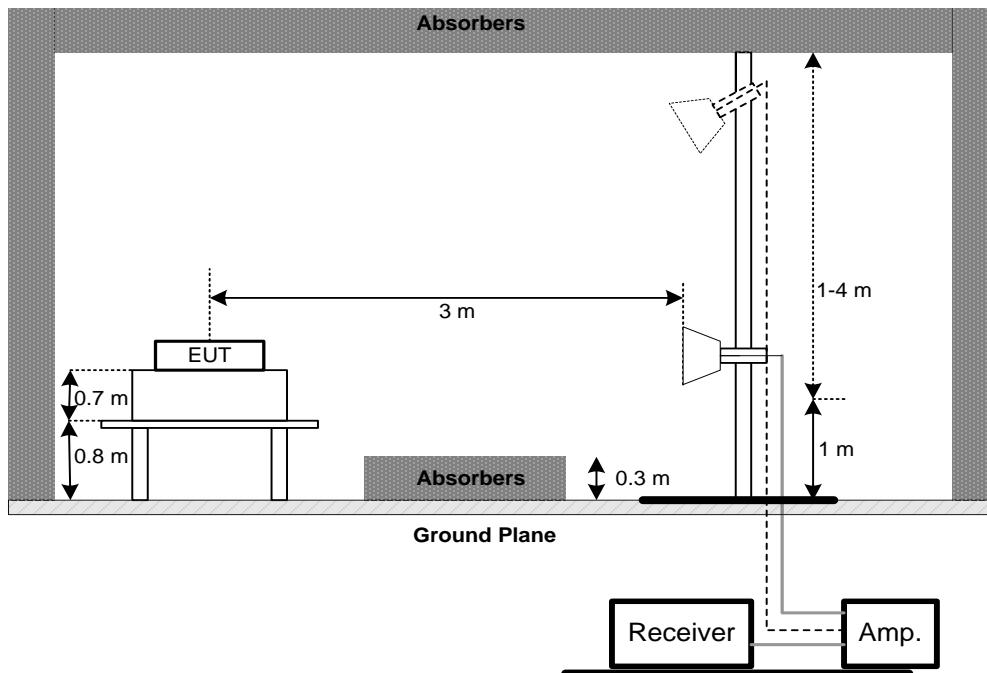

(C) For Radiated Emissions 9 kHz-30 MHz

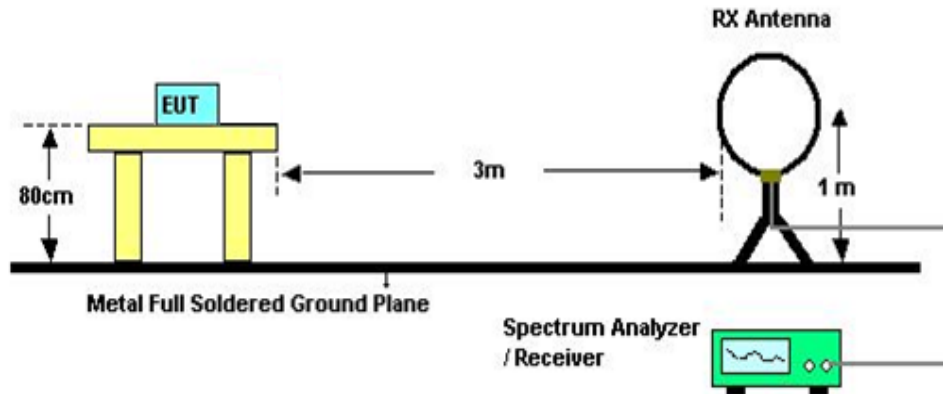

4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9 kHz TO 30 MHz)

Please refer to the Appendix B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30 MHz TO 1000 MHz)

Please refer to the Appendix C.

4.2.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Appendix D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100 kHz, VBW=300 kHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.1.5 EUT TEST CONDITIONS

Temperature: 22.2°C Relative Humidity: 49.9% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Appendix E.

6. MAXIMUM OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 Watt or 30 dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- b. The maximum average output power was performed in accordance with method 11.9.2.3 of ANSI C63.10-2013.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.1.5 EUT TEST CONDITIONS

Temperature: 22.2°C Relative Humidity: 49.9% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Appendix F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100 kHz, VBW=300 kHz, Sweep time = Auto.

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.1.5 EUT TEST CONDITIONS

Temperature: 22.2°C Relative Humidity: 49.9% Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Appendix G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)	2400-2483.5	PASS

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW=3 kHz, VBW=10 kHz, Sweep time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.1.5 EUT TEST CONDITIONS

Temperature: 22.2°C Relative Humidity: 49.9% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Appendix H.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Mar. 11, 2019
2	LISN	EMCO	3816/2	52765	Mar. 11, 2019
3	50Ω Terminator	SHX	TF2-3G-A	8122901	Mar. 11, 2019
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 11, 2019
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 23, 2019

Radiated Emission Measurement-9 kHz TO 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EM	EM-6876-1	230	Feb. 07, 2019
2	Cable	N/A	RG 213/U	C-102	Jun. 01, 2019
3	EMI Test Receiver	R&S	ESCI	100382	Mar. 11, 2019
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement-30 MHz TO 1000 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 11, 2019
2	Amplifier	HP	8447D	2944A09673	Aug. 11, 2019
3	Receiver	Agilent	N9038A	MY52130039	Aug. 11, 2019
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May 25, 2019
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement - Above 1GHz

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 11, 2019
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 30, 2019
3	Amplifier	Agilent	8449B	3008A02274	Mar. 11, 2019
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 11, 2019
5	Receiver	Agilent	N9038A	MY52130039	Aug. 11, 2019
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	mitron	B10-01-01-12M	18072744	Jul. 30, 2019
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

6 dB Bandwidth

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 11, 2019

Maximum output power

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	ANRITSU	ML2495A	1128009	Mar. 11, 2019
2	Pulse Power Sensor	ANRITSU	MA 2411B	1027500	Mar. 11, 2019

Antenna Conducted Spurious Emission

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 11, 2019

Power Spectral Density

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 11, 2019

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

10. EUT TEST PHOTO

Conducted Measurement Photos





Radiated Measurement Photos

9 kHz to 30 MHz




Radiated Measurement Photos

30 MHz to 1000 MHz

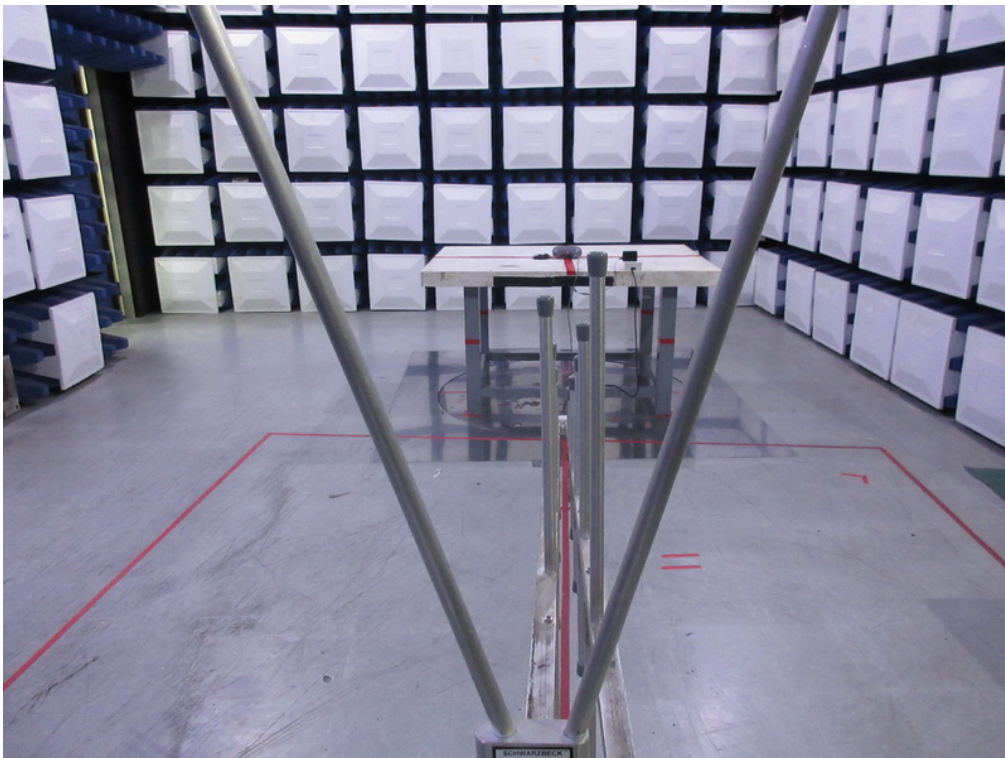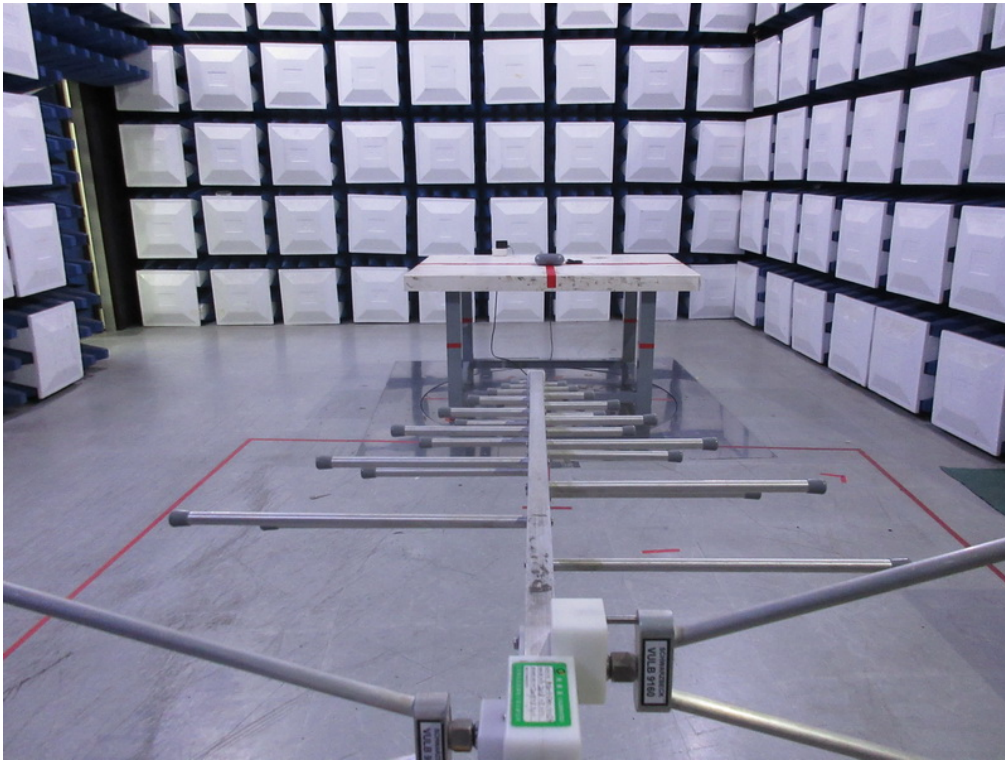

Radiated Measurement Photos


Above 1000 MHz

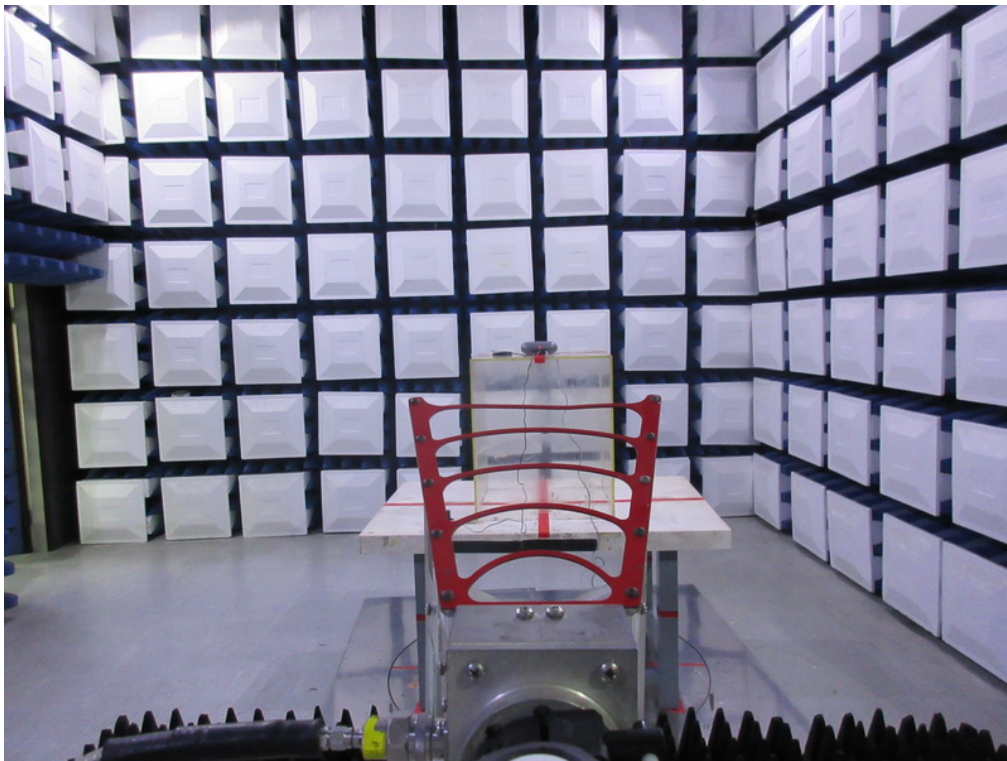

APPENDIX A - CONDUCTED EMISSION

Test Mode: TX Mode


Line

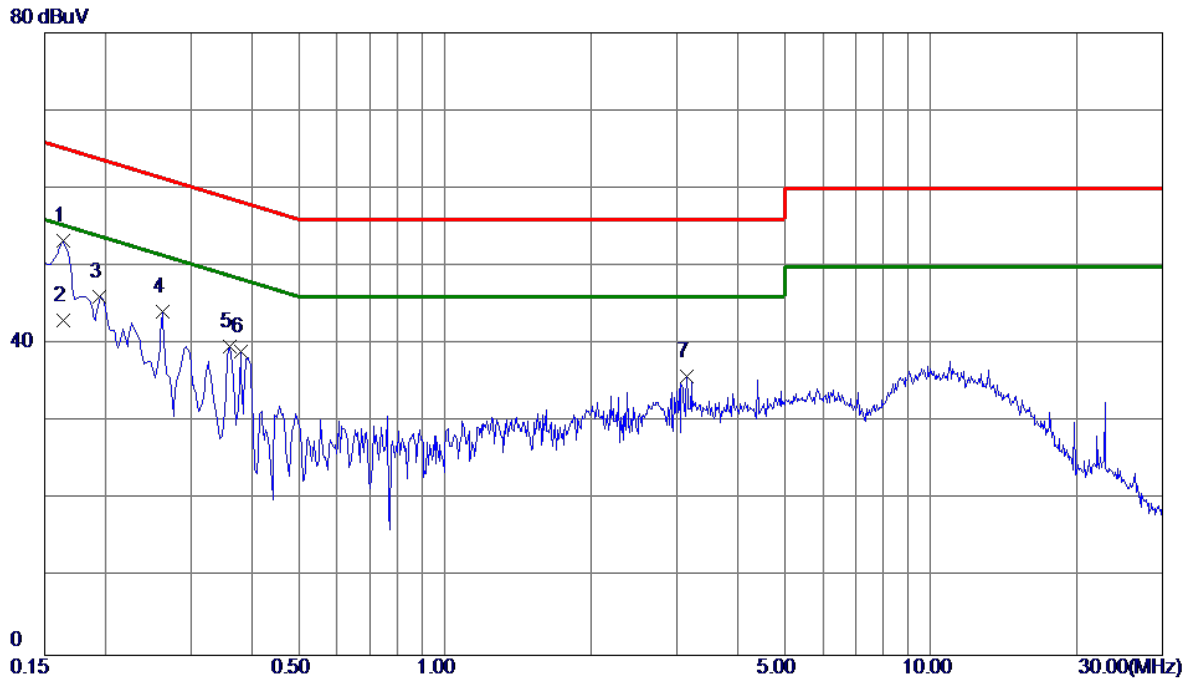

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1635	43.51	9.82	53.33	65.28	-11.95	Peak	
2	0.1635	33.20	9.82	43.02	55.28	-12.26	AVG	
3	0.1949	36.26	9.82	46.08	63.83	-17.75	Peak	
4	0.2625	34.28	9.82	44.10	61.35	-17.25	Peak	
5	0.3615	29.94	9.81	39.75	58.69	-18.94	Peak	
6	0.3795	29.27	9.81	39.08	58.29	-19.21	Peak	
7	3.1470	25.79	10.06	35.85	56.00	-20.15	Peak	

Test Mode: TX Mode

Neutral

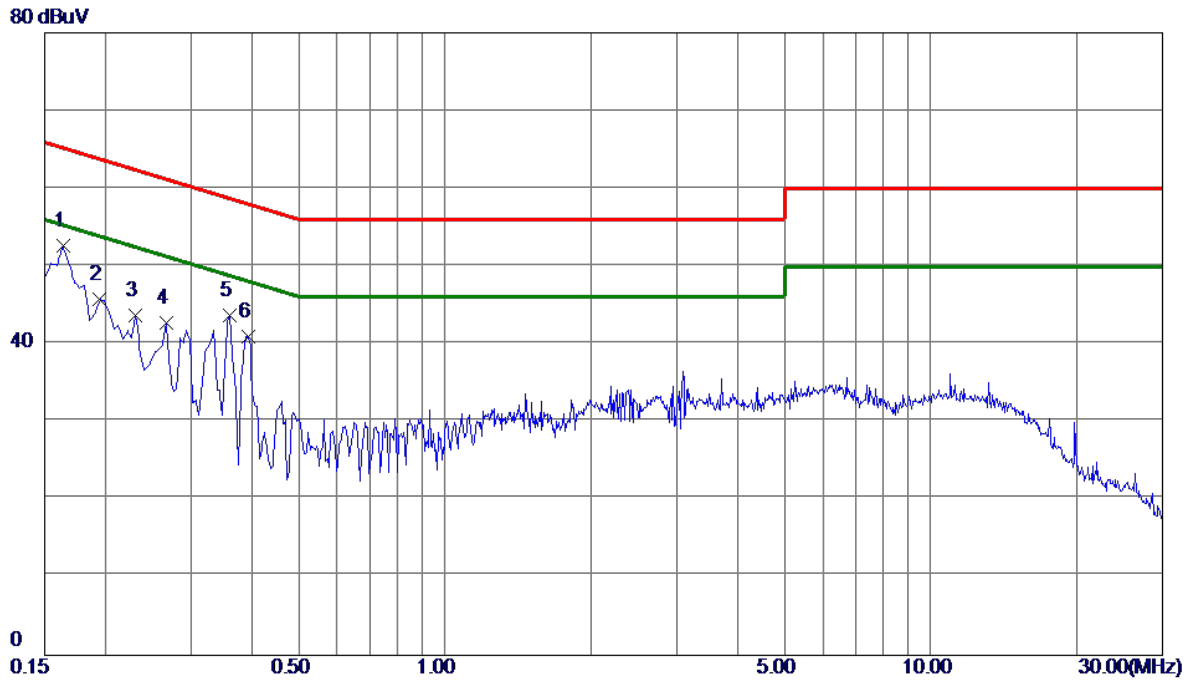


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1635	42.74	9.91	52.65	65.28	-12.63	Peak	
2	0.1949	35.78	9.91	45.69	63.83	-18.14	Peak	
3	0.2310	33.74	9.92	43.66	62.41	-18.75	Peak	
4	0.2670	32.77	9.92	42.69	61.21	-18.52	Peak	
5	0.3615	33.67	9.95	43.62	58.69	-15.07	Peak	
6	0.3930	30.96	9.95	40.91	58.00	-17.09	Peak	

APPENDIX B - RADIATED EMISSION (9 KHZ TO 30 MHZ)

Test Mode: TX Mode


Ant 0°

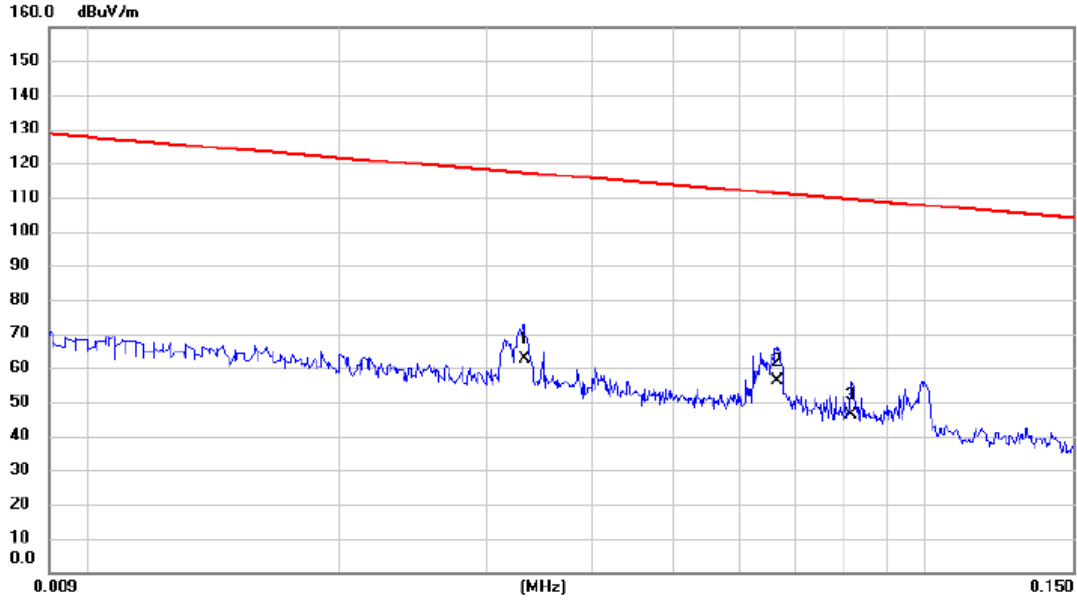

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.0333	42.90	19.81	62.71	117.16	-54.45	AVG	
2		0.0667	36.90	19.20	56.10	111.12	-55.02	AVG	
3		0.0816	27.40	18.88	46.28	109.37	-63.09	AVG	

Test Mode: TX Mode


Ant 0°

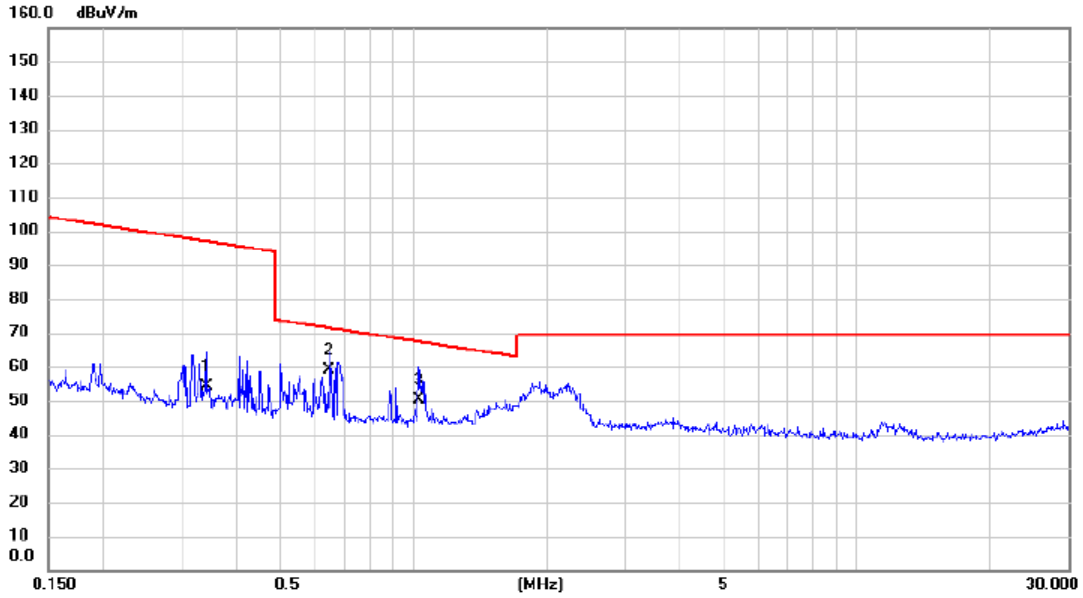

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.3410	37.30	17.02	54.32	96.95	-42.63	AVG	
2	*	0.6440	42.20	16.91	59.11	71.43	-12.32	QP	
3		1.0265	33.40	16.61	50.01	67.38	-17.37	QP	

Test Mode: TX Mode


Ant 90°

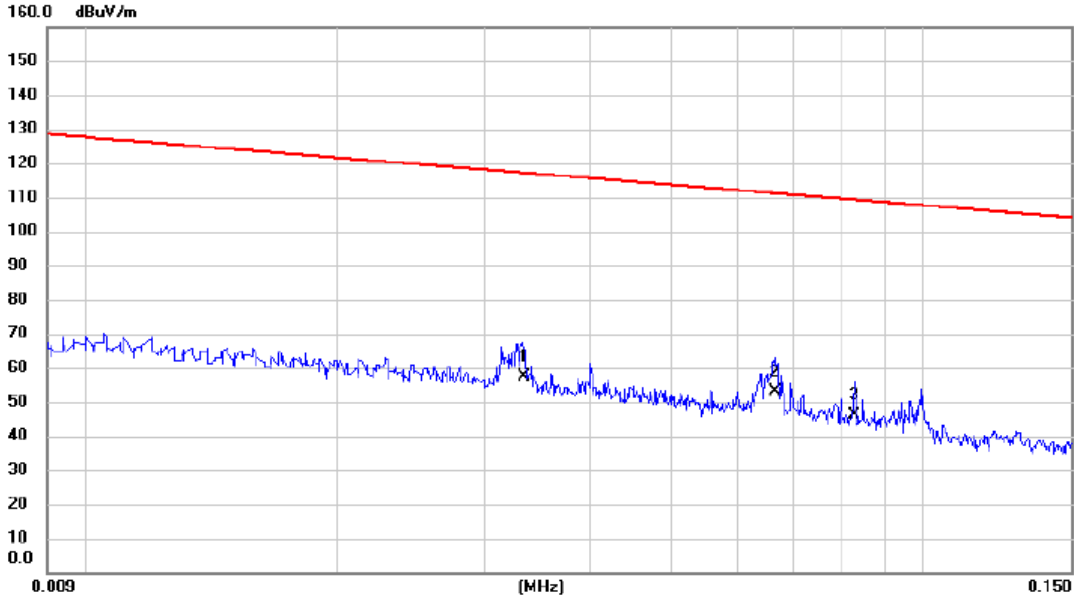

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0334	37.50	19.81	57.31	117.13	-59.82	AVG	
2	*	0.0665	33.80	19.20	53.00	111.15	-58.15	AVG	
3		0.0827	27.19	18.86	46.05	109.25	-63.20	AVG	

Test Mode: TX Mode

Ant 90°

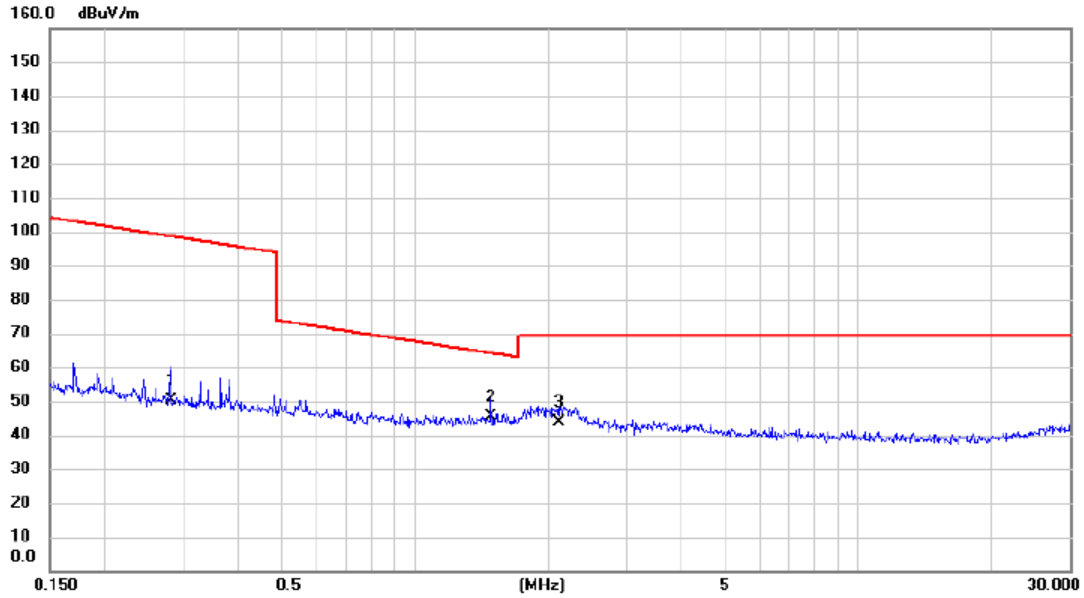


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2818	33.30	17.05	50.35	98.61	-48.26	AVG	
2	*	1.4796	28.60	16.85	45.45	64.20	-18.75	QP	
3		2.1213	26.70	17.05	43.75	69.54	-25.79	QP	

APPENDIX C - RADIATED EMISSION (30 MHZ TO 1000 MHZ)

Test Mode: TX B Mode Channel 01

Vertical

80 dBuV/m

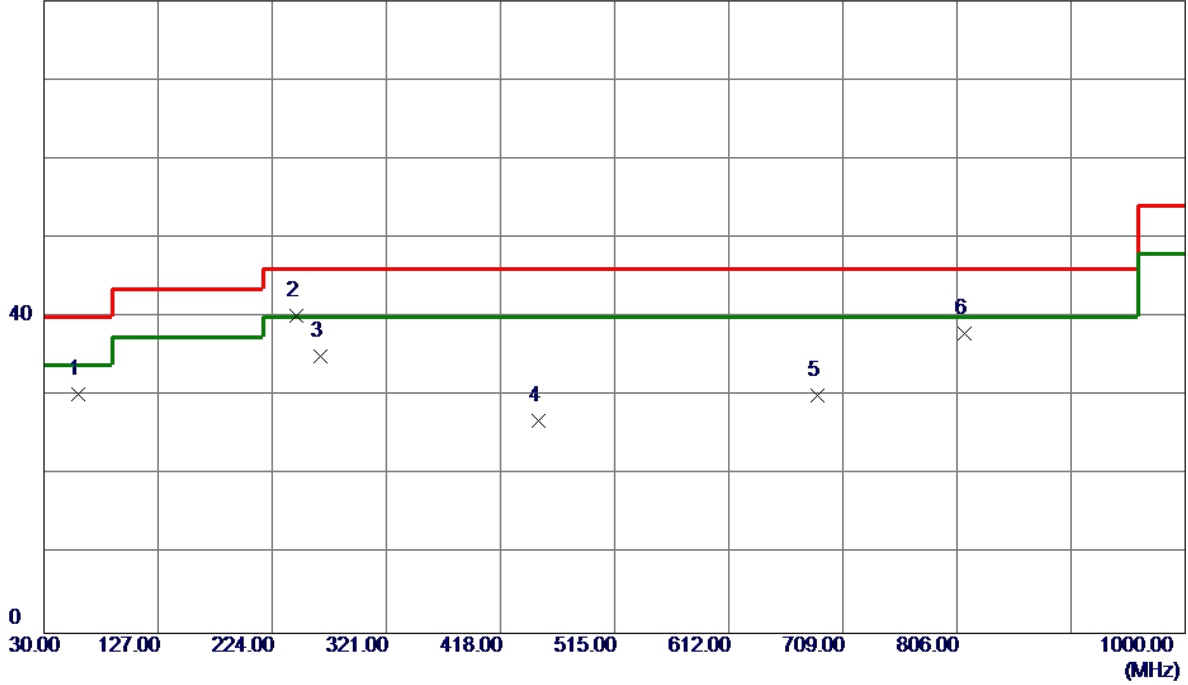


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	59.5850	45.88	-15.62	30.26	40.00	-9.74	Peak	
2 *	244.3700	54.69	-14.51	40.18	46.00	-5.82	Peak	
3	264.7400	48.05	-13.04	35.01	46.00	-10.99	Peak	
4	450.0100	34.28	-7.41	26.87	46.00	-19.13	Peak	
5	687.6599	33.45	-3.34	30.11	46.00	-15.89	Peak	
6	812.3050	39.18	-1.23	37.95	46.00	-8.05	Peak	

Test Mode: TX B Mode Channel 01

Horizontal

80 dBuV/m

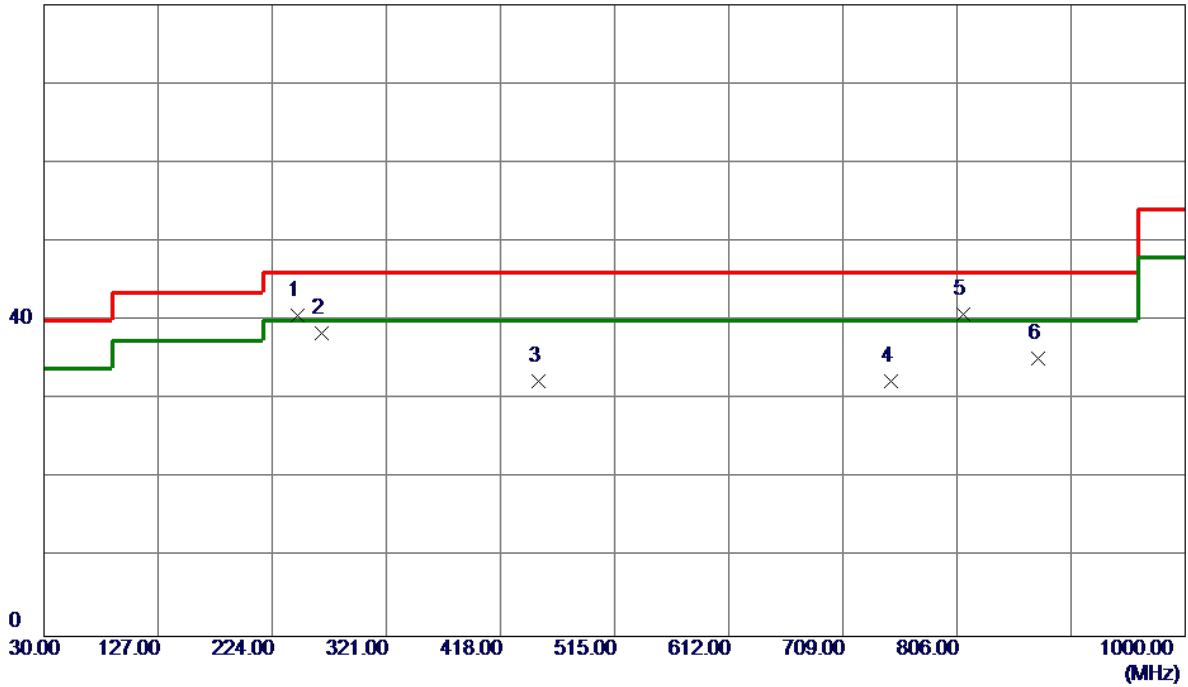


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	245.3400	55.12	-14.47	40.65	46.00	-5.35	QP	
2	265.7100	51.32	-12.94	38.38	46.00	-7.62	Peak	
3	450.0100	39.79	-7.41	32.38	46.00	-13.62	Peak	
4	750.2250	36.36	-4.03	32.33	46.00	-13.67	Peak	
5 *	811.3350	42.05	-1.22	40.83	46.00	-5.17	Peak	
6	874.8700	36.35	-1.21	35.14	46.00	-10.86	Peak	

Test Mode: TX B Mode Channel 06

Vertical

80 dBuV/m

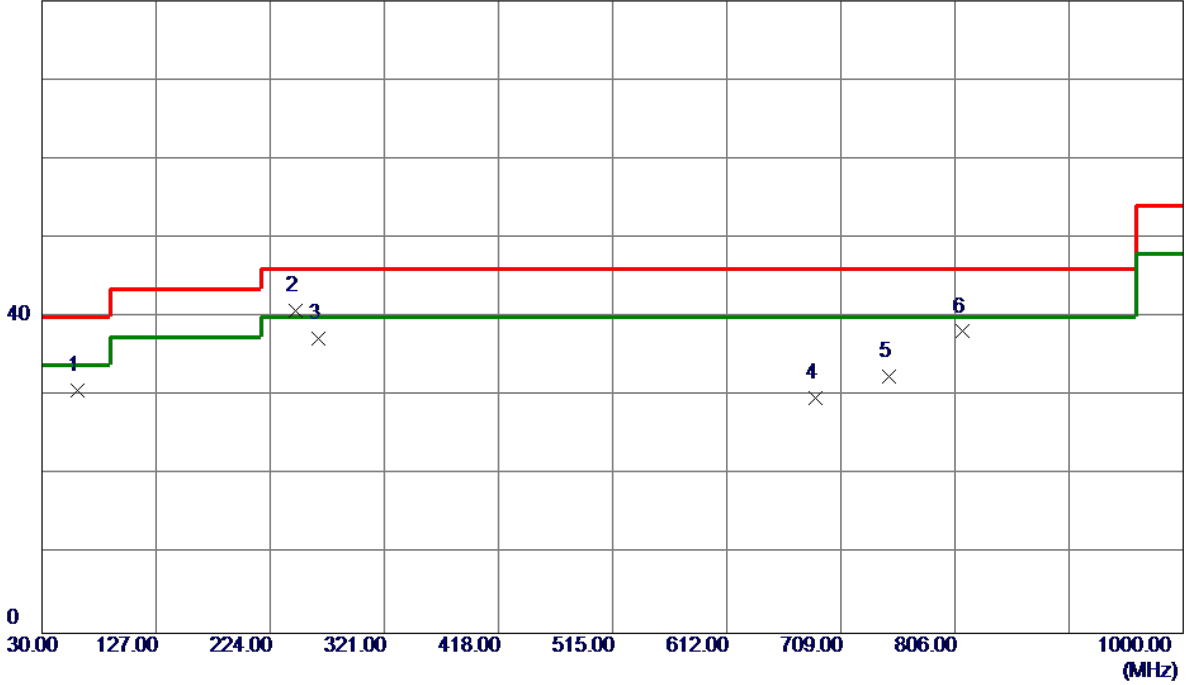


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	60.5550	46.50	-15.78	30.72	40.00	-9.28	Peak	
2 *	245.3400	55.33	-14.47	40.86	46.00	-5.14	Peak	
3	264.7400	50.31	-13.04	37.27	46.00	-8.73	Peak	
4	687.6599	33.03	-3.34	29.69	46.00	-16.31	Peak	
5	750.2250	36.50	-4.03	32.47	46.00	-13.53	Peak	
6	812.3050	39.39	-1.23	38.16	46.00	-7.84	Peak	

Test Mode: TX B Mode Channel 06

Horizontal

80 dBuV/m

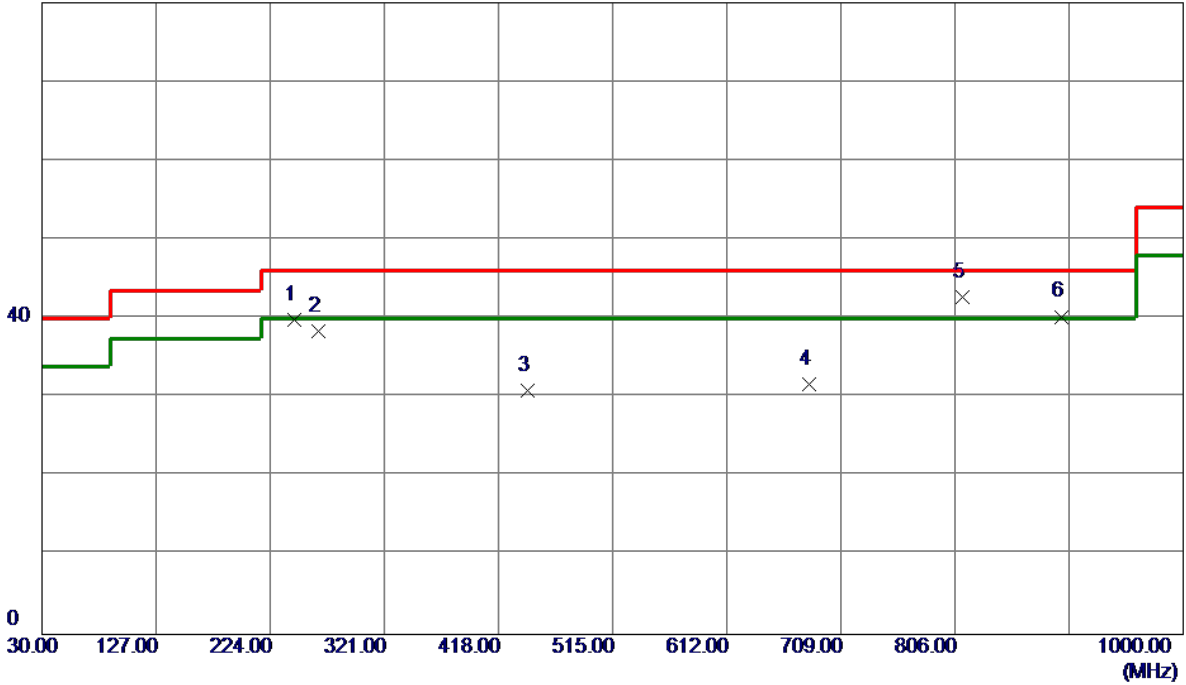


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	244.8550	54.39	-14.49	39.90	46.00	-6.10	QP	
2	264.7400	51.41	-13.04	38.37	46.00	-7.63	Peak	
3	443.2200	38.54	-7.67	30.87	46.00	-15.13	Peak	
4	682.3250	35.34	-3.60	31.74	46.00	-14.26	Peak	
5 *	812.7900	43.98	-1.24	42.74	46.00	-3.26	Peak	
6	896.6950	40.92	-0.68	40.24	46.00	-5.76	Peak	

Test Mode: TX B Mode Channel 11

Vertical

80 dBuV/m

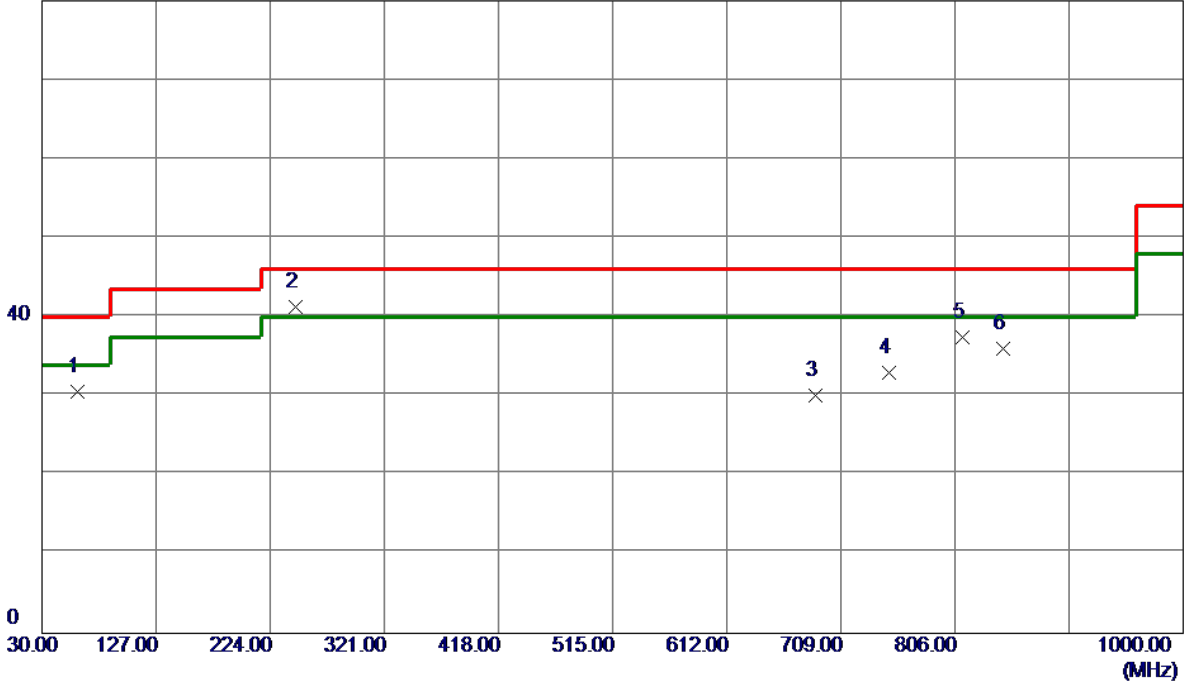


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	60.0700	46.27	-15.69	30.58	40.00	-9.42	Peak	
2 *	245.3400	55.71	-14.47	41.24	46.00	-4.76	Peak	
3	687.6599	33.44	-3.34	30.10	46.00	-15.90	Peak	
4	750.2250	37.01	-4.03	32.98	46.00	-13.02	Peak	
5	812.3050	38.61	-1.23	37.38	46.00	-8.62	Peak	
6	847.2250	37.83	-1.78	36.05	46.00	-9.95	Peak	

Test Mode: TX B Mode Channel 11

Horizontal

80 dBuV/m

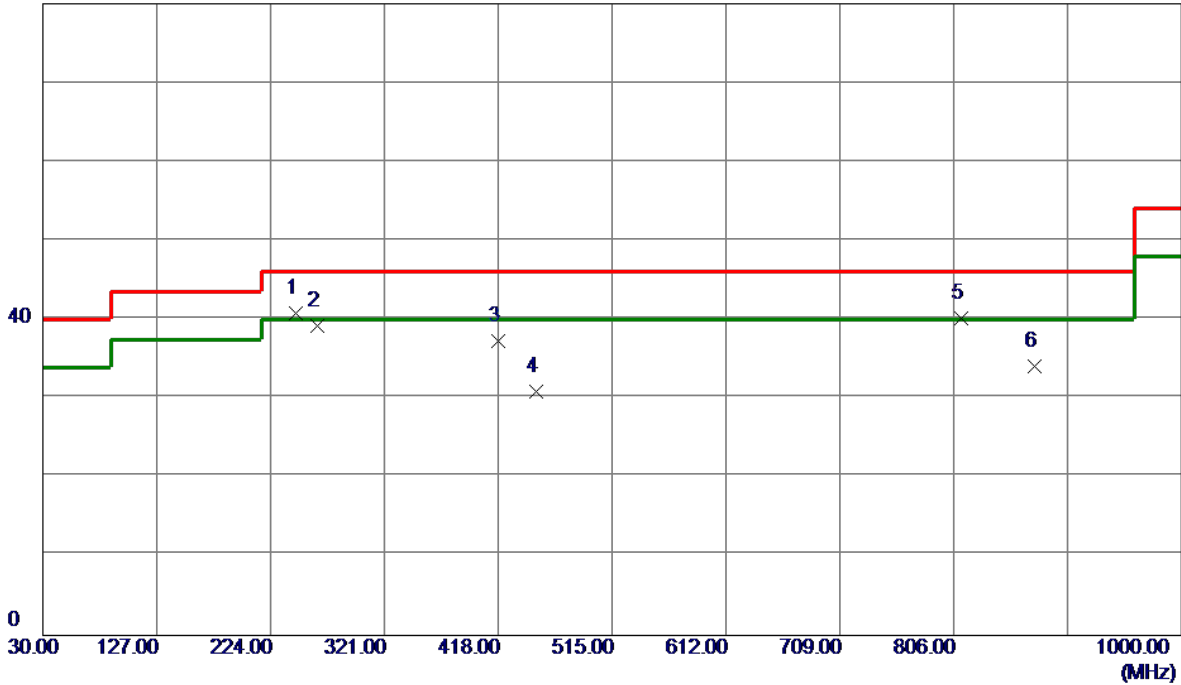


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	245.3400	55.27	-14.47	40.80	46.00	-5.20	QP	
2	264.2550	52.26	-13.09	39.17	46.00	-6.83	Peak	
3	418.0000	46.00	-8.67	37.33	46.00	-8.67	Peak	
4	450.0100	38.32	-7.41	30.91	46.00	-15.09	Peak	
5	812.3050	41.37	-1.23	40.14	46.00	-5.86	Peak	
6	874.8700	35.35	-1.21	34.14	46.00	-11.86	Peak	

APPENDIX D - RADIATED EMISSION (ABOVE 1000 MHZ)

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Vertical

130 dBuV/m

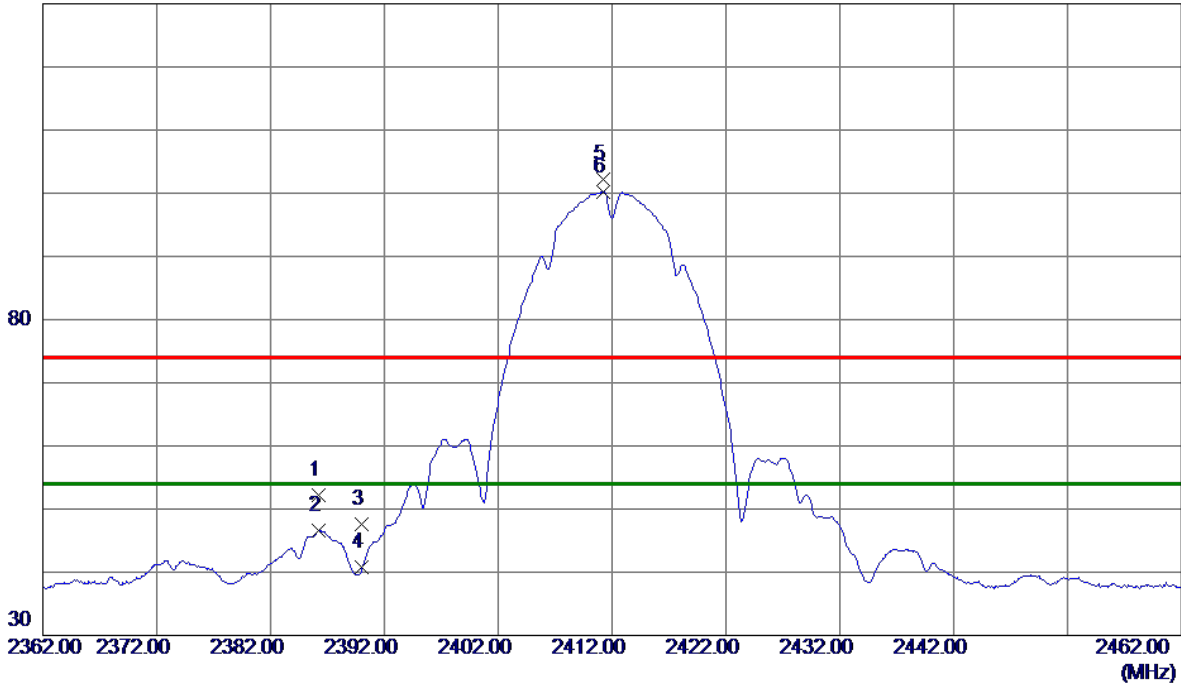


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2386.2500	45.22	7.01	52.23	74.00	-21.77	Peak	
2	2386.2500	39.58	7.01	46.59	54.00	-7.41	AVG	
3	2390.0000	40.67	7.01	47.68	74.00	-26.32	Peak	
4	2390.0000	33.71	7.01	40.72	54.00	-13.28	AVG	
5	2411.2000	95.22	7.02	102.24	74.00	28.24	Peak	No Limit
6 *	2411.2500	93.26	7.02	100.28	54.00	46.28	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Vertical


80 dBuV/m

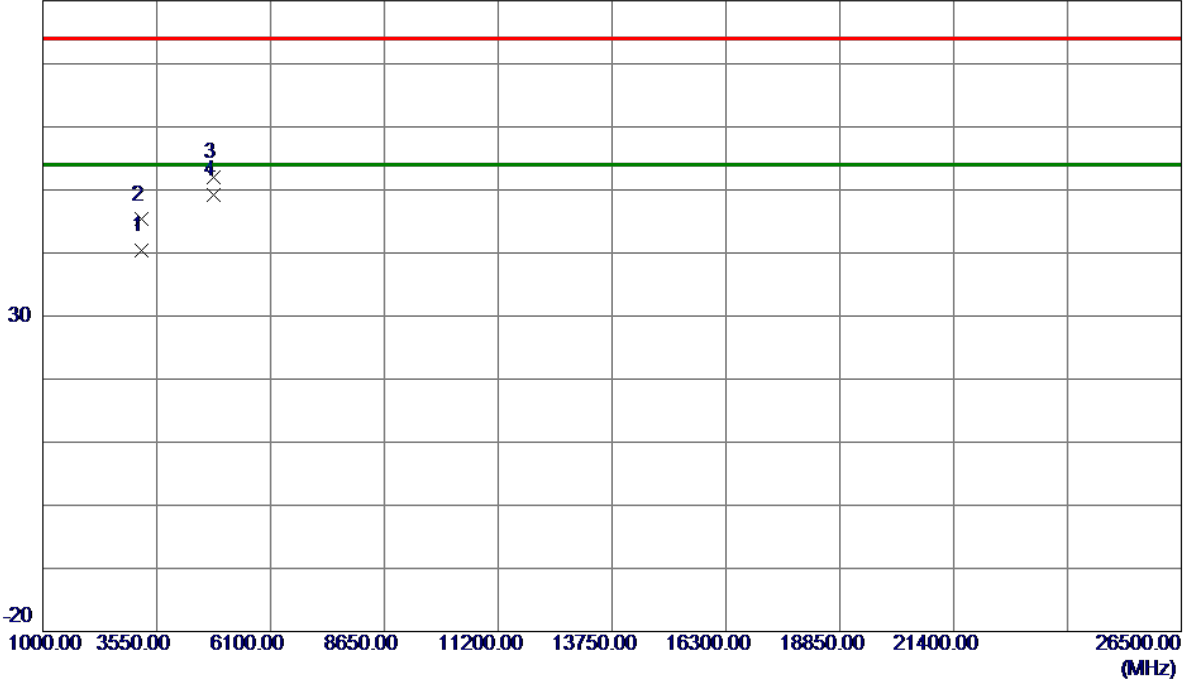

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	3215.9640	39.62	0.77	40.39	54.00	-13.61	AVG	
2	3216.0570	44.53	0.77	45.30	74.00	-28.70	Peak	
3	4823.9680	47.68	4.23	51.91	74.00	-22.09	Peak	
4 *	4824.0240	44.98	4.23	49.21	54.00	-4.79	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Horizontal

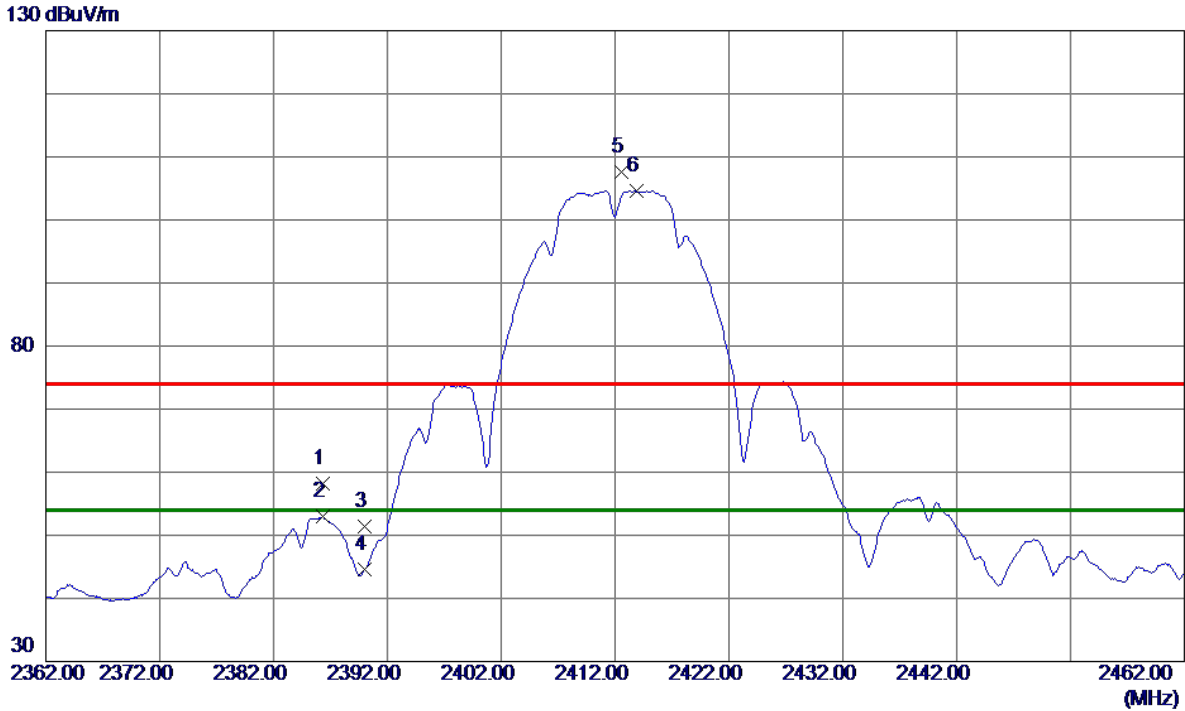


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2386.3500	51.24	7.01	58.25	74.00	-15.75	Peak	
2	2386.3500	45.93	7.01	52.94	54.00	-1.06	AVG	
3	2390.0000	44.44	7.01	51.45	74.00	-22.55	Peak	
4	2390.0000	37.54	7.01	44.55	54.00	-9.45	AVG	
5	2412.5500	100.56	7.02	107.58	74.00	33.58	Peak	No Limit
6 *	2413.8500	97.61	7.02	104.63	54.00	50.63	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Horizontal

80 dBuV/m

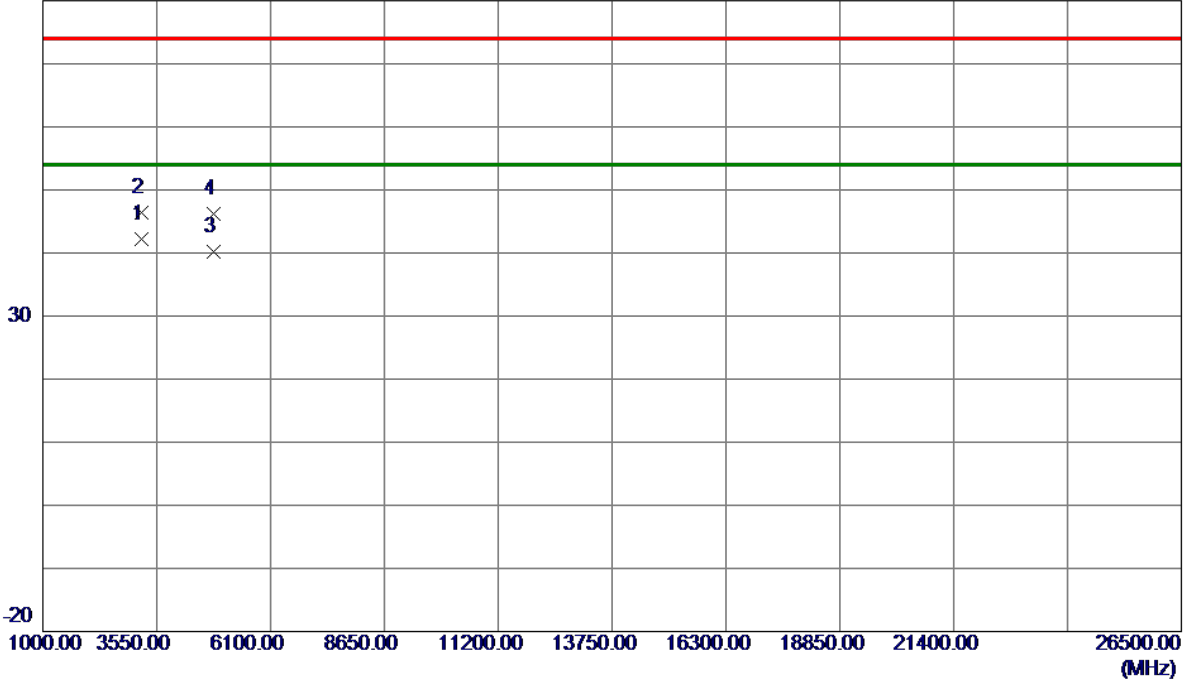


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	3215.9780	41.47	0.77	42.24	54.00	-11.76	AVG	
2	3216.1279	45.63	0.77	46.40	74.00	-27.60	Peak	
3	4824.0099	36.04	4.23	40.27	54.00	-13.73	AVG	
4	4824.0460	41.95	4.23	46.18	74.00	-27.82	Peak	

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Vertical

130 dBuV/m

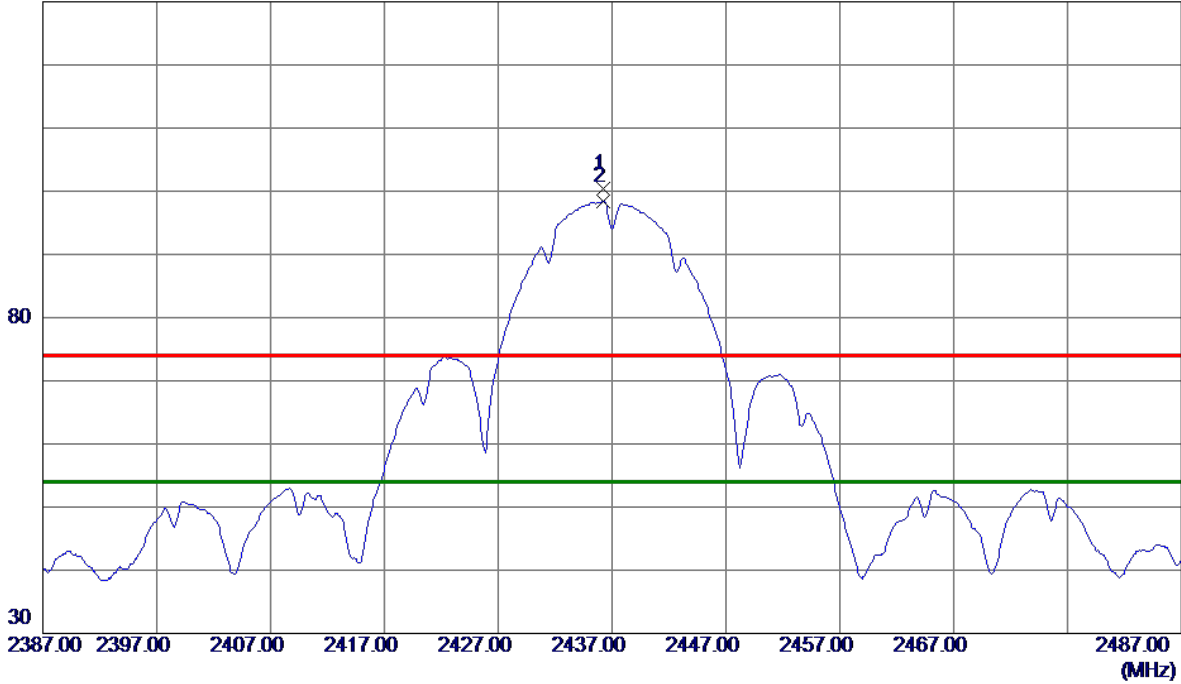


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2436.2000	93.37	7.02	100.39	74.00	26.39	Peak	No Limit
2 *	2436.2500	91.36	7.02	98.38	54.00	44.38	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Vertical


80 dBuV/m

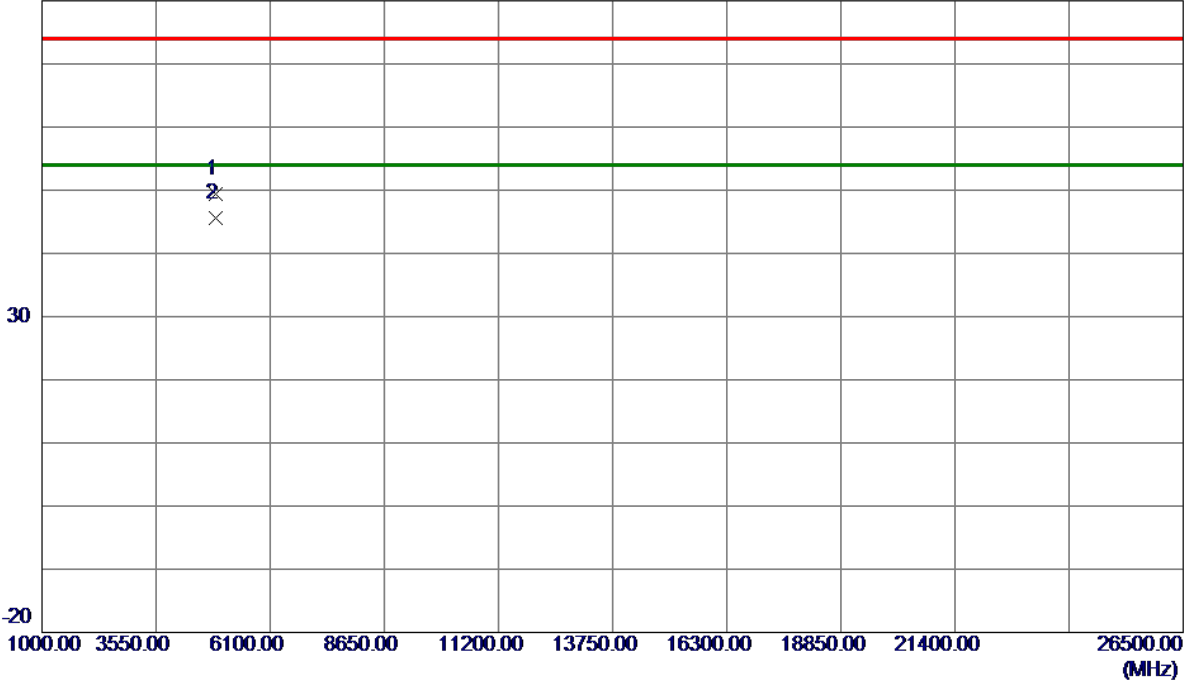

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.0099	45.01	4.34	49.35	74.00	-24.65	Peak	
2 *	4874.0450	41.20	4.34	45.54	54.00	-8.46	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Horizontal

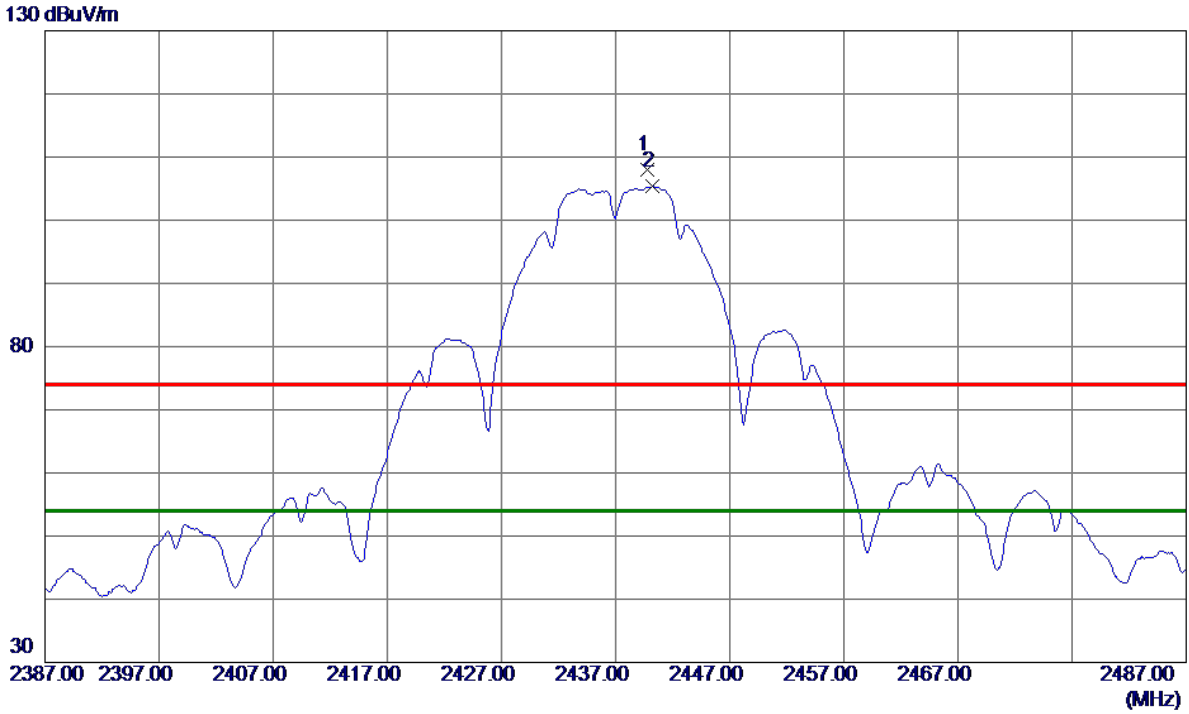


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2439.8000	101.00	7.02	108.02	74.00	34.02	Peak	No Limit
2 *	2440.2500	98.34	7.02	105.36	54.00	51.36	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Horizontal

80 dBuV/m

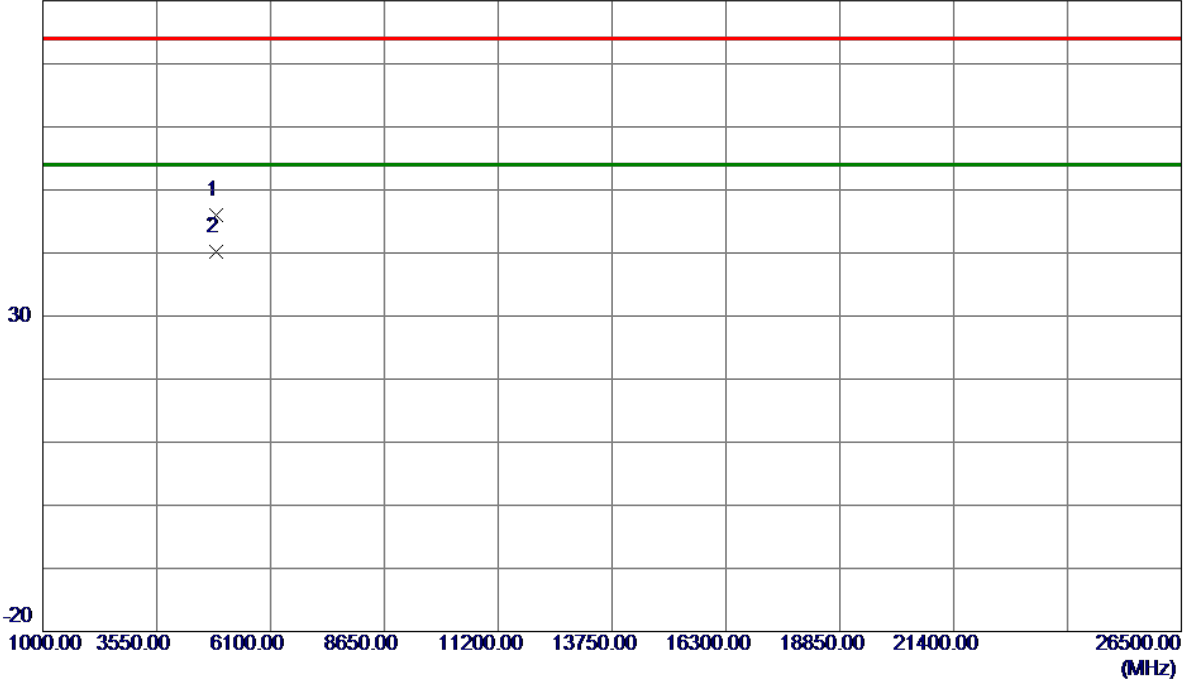


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.9570	41.59	4.34	45.93	74.00	-28.07	Peak	
2 *	4873.9910	35.82	4.34	40.16	54.00	-13.84	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Vertical

130 dBuV/m

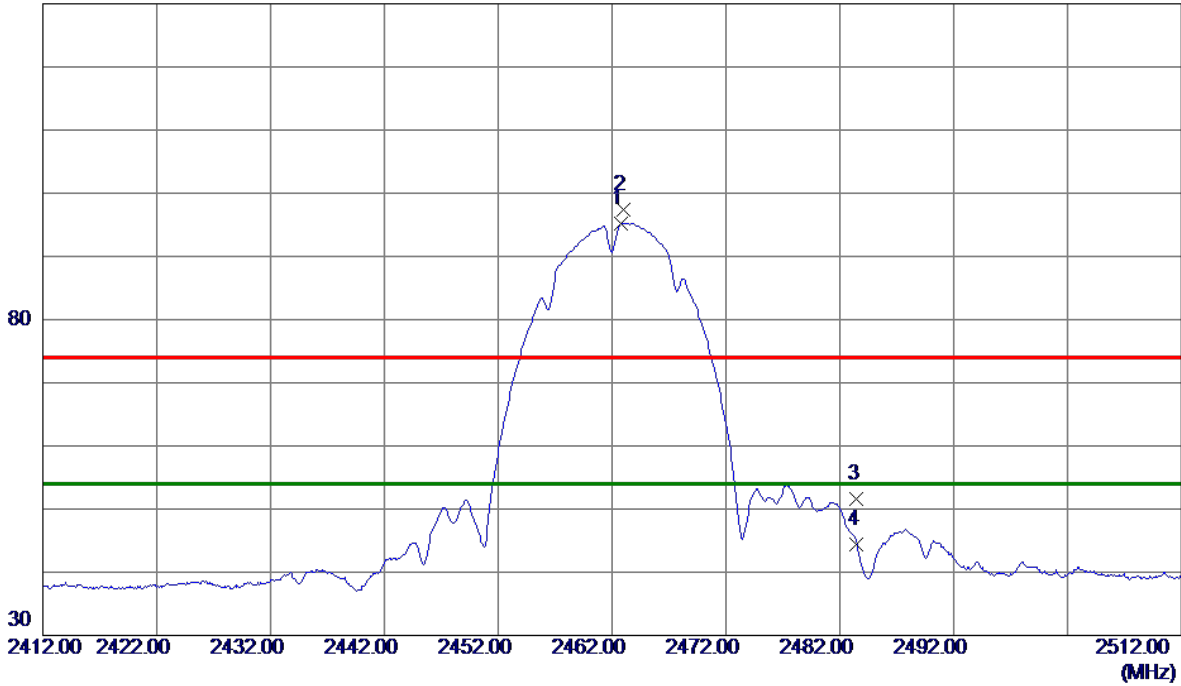


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2462.8000	88.22	7.03	95.25	54.00	41.25	AVG	No Limit
2	2462.9500	90.28	7.03	97.31	74.00	23.31	Peak	No Limit
3	2483.5000	44.57	7.03	51.60	74.00	-22.40	Peak	
4	2483.5000	37.45	7.03	44.48	54.00	-9.52	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Vertical


80 dBuV/m

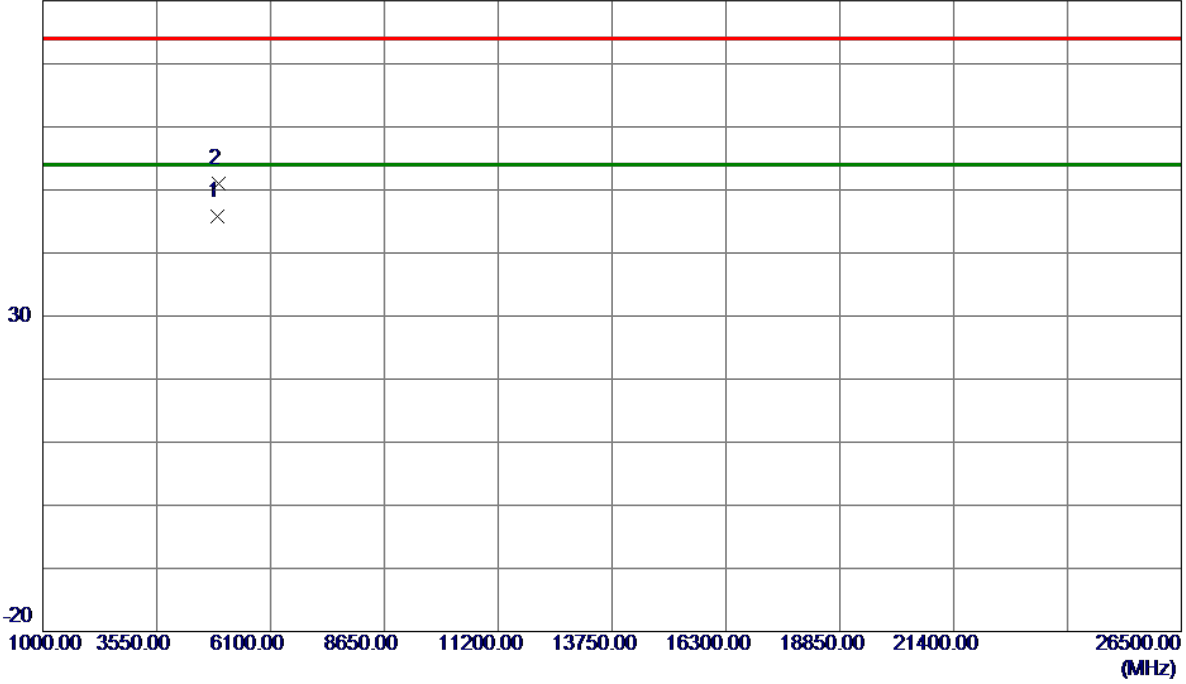

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4924.1250	41.41	4.44	45.85	54.00	-8.15	AVG	
2	4924.3200	46.49	4.44	50.93	74.00	-23.07	Peak	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Horizontal

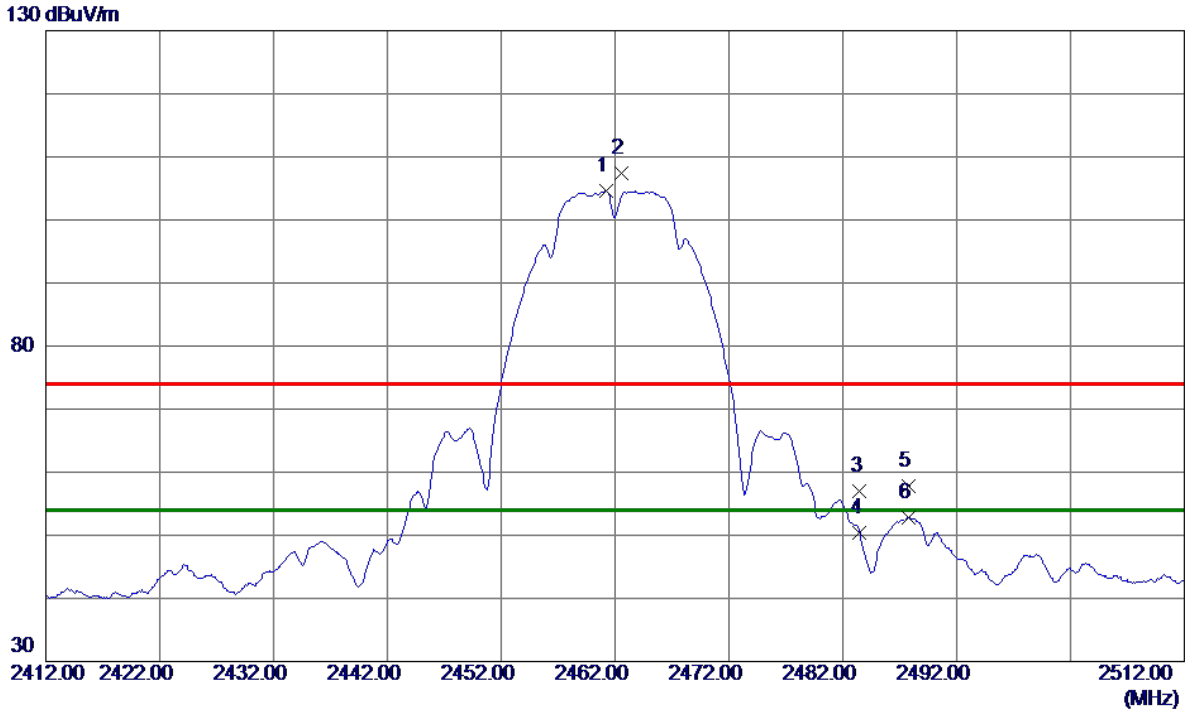


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2461.2000	97.49	7.03	104.52	54.00	50.52	AVG	No Limit
2	2462.5500	100.42	7.03	107.45	74.00	33.45	Peak	No Limit
3	2483.5000	49.98	7.03	57.01	74.00	-16.99	Peak	
4	2483.5000	43.29	7.03	50.32	54.00	-3.68	AVG	
5	2487.7500	50.82	7.03	57.85	74.00	-16.15	Peak	
6	2487.7500	45.77	7.03	52.80	54.00	-1.20	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Horizontal

80 dBuV/m

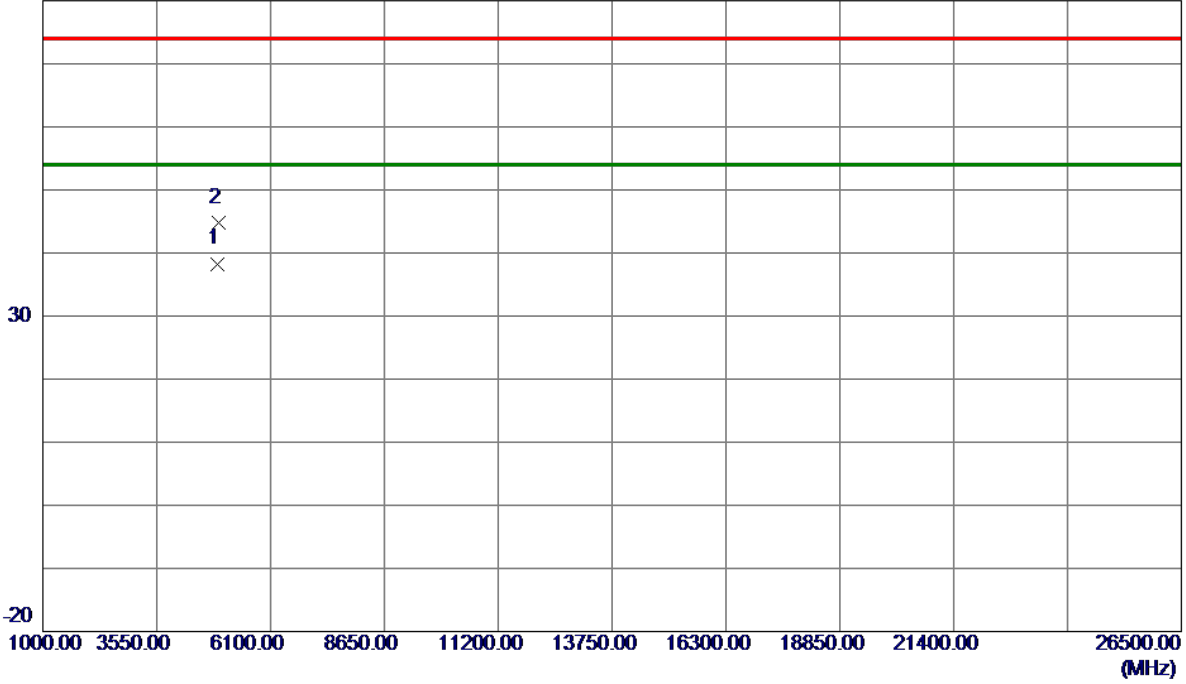


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4924.0320	33.86	4.44	38.30	54.00	-15.70	AVG	
2	4924.3500	40.41	4.44	44.85	74.00	-29.15	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Vertical

130 dBuV/m

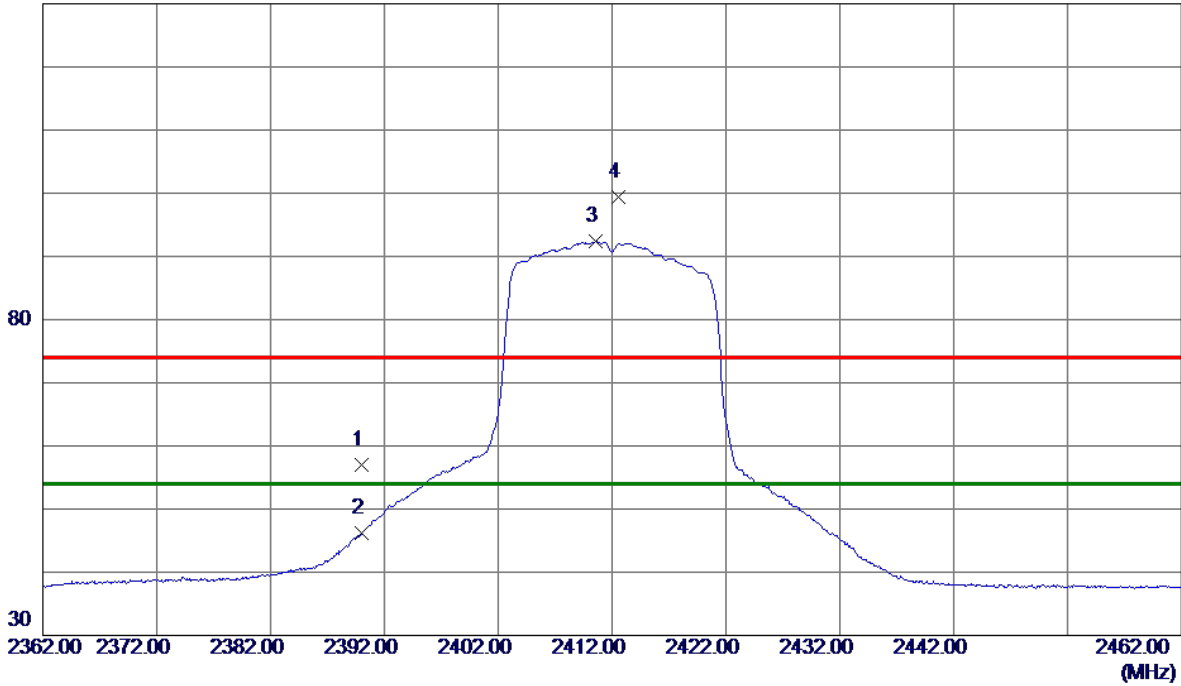


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	49.91	7.01	56.92	74.00	-17.08	Peak	
2	2390.0000	39.18	7.01	46.19	54.00	-7.81	AVG	
3 *	2410.6000	85.41	7.02	92.43	54.00	38.43	AVG	No Limit
4	2412.5500	92.43	7.02	99.45	74.00	25.45	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Vertical


80 dBuV/m

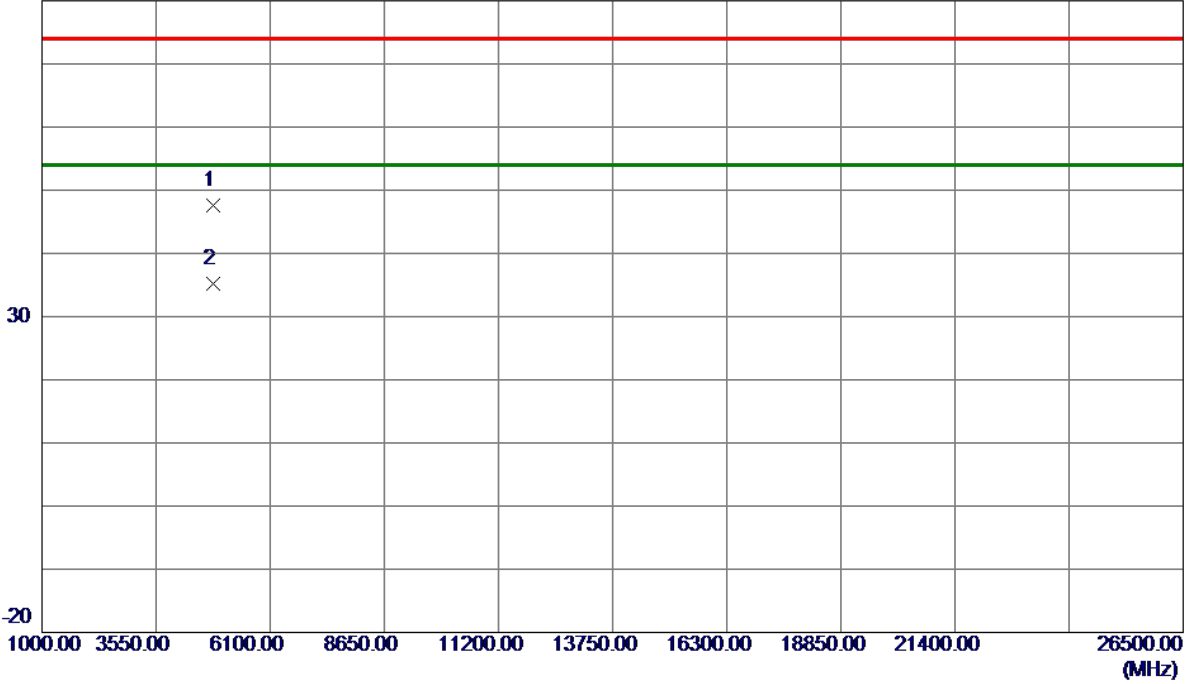

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4823.0550	43.32	4.23	47.55	74.00	-26.45	Peak	
2 *	4823.9670	30.97	4.23	35.20	54.00	-18.80	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Horizontal

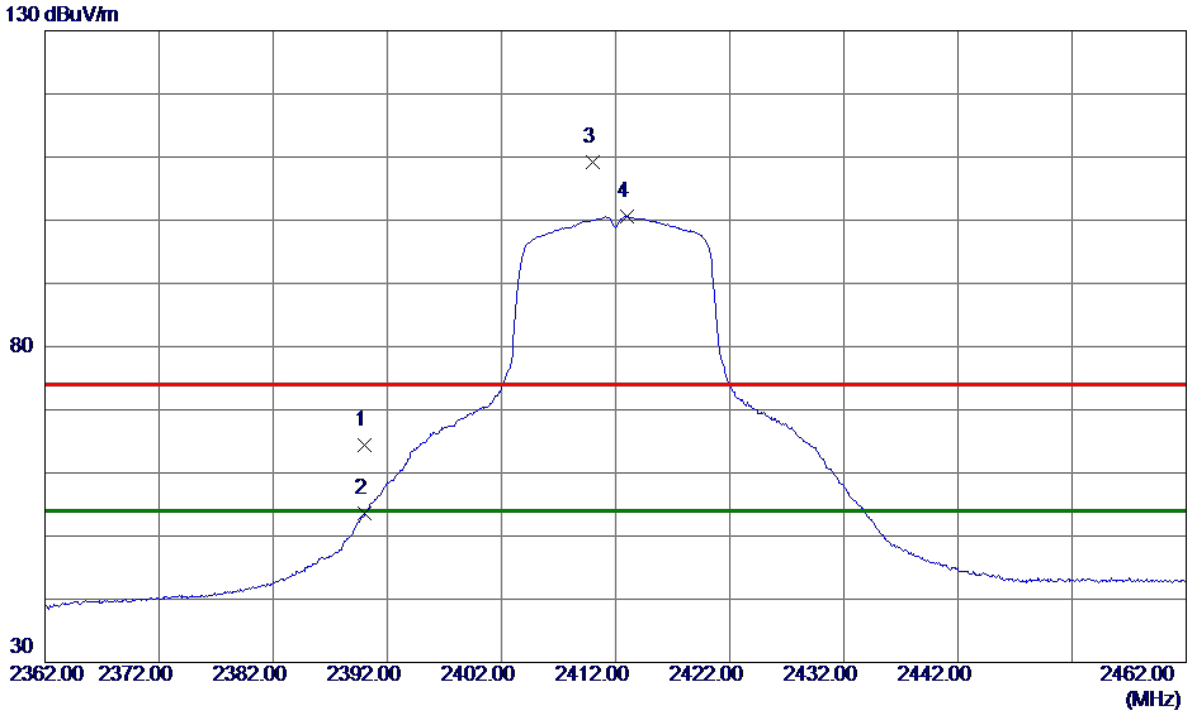


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	57.39	7.01	64.40	74.00	-9.60	Peak	
2	2390.0000	46.59	7.01	53.60	54.00	-0.40	AVG	
3	2410.0500	102.16	7.02	109.18	74.00	35.18	Peak	No Limit
4 *	2412.9500	93.57	7.02	100.59	54.00	46.59	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Horizontal


80 dBuV/m

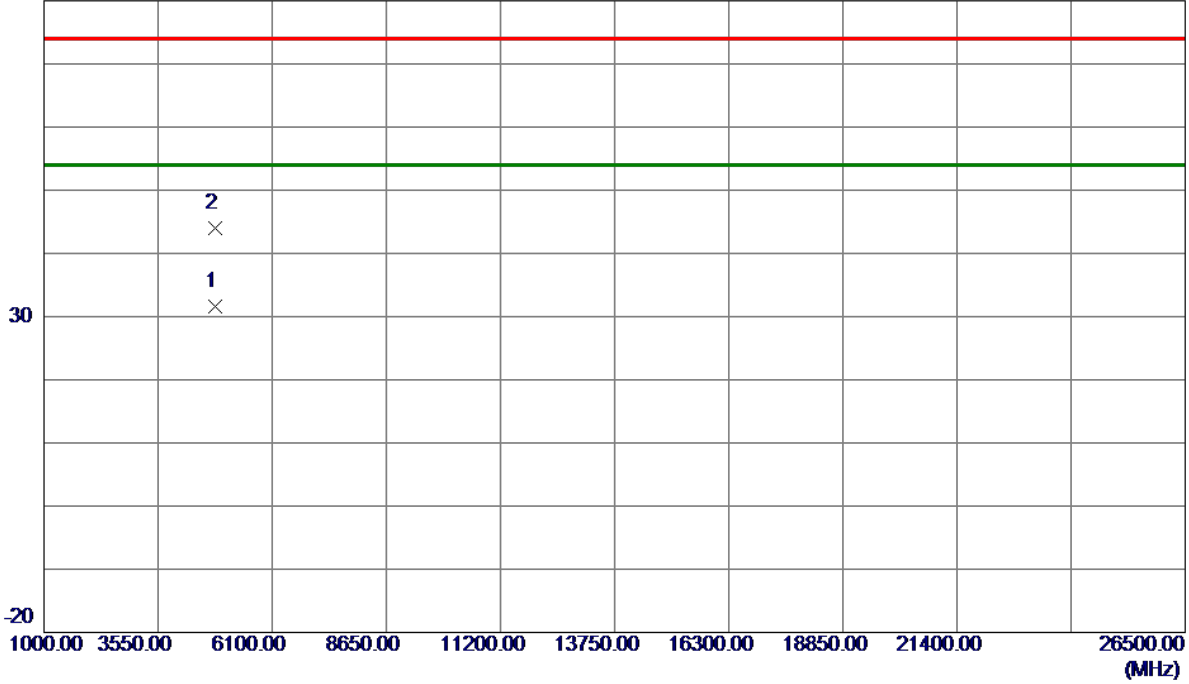

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4824.2780	27.46	4.23	31.69	54.00	-22.31	AVG	
2	4825.5900	39.77	4.24	44.01	74.00	-29.99	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Vertical

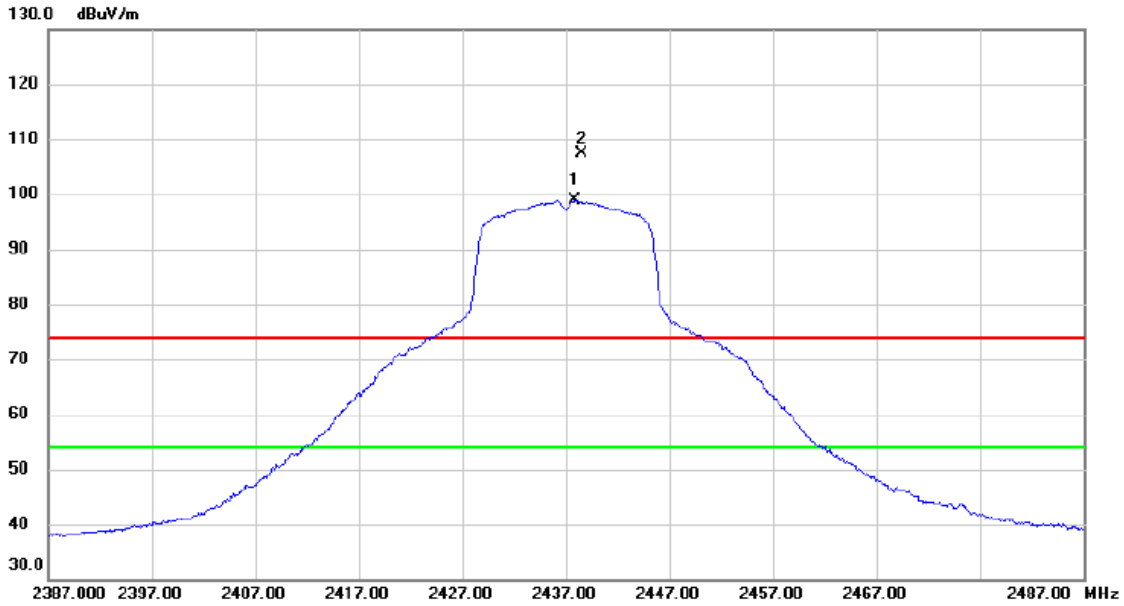


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2437.800	91.83	7.03	98.86	54.00	44.86	AVG	No Limit
2	X	2438.500	100.36	7.03	107.39	74.00	33.39	peak	No Limit

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Vertical


80 dBuV/m

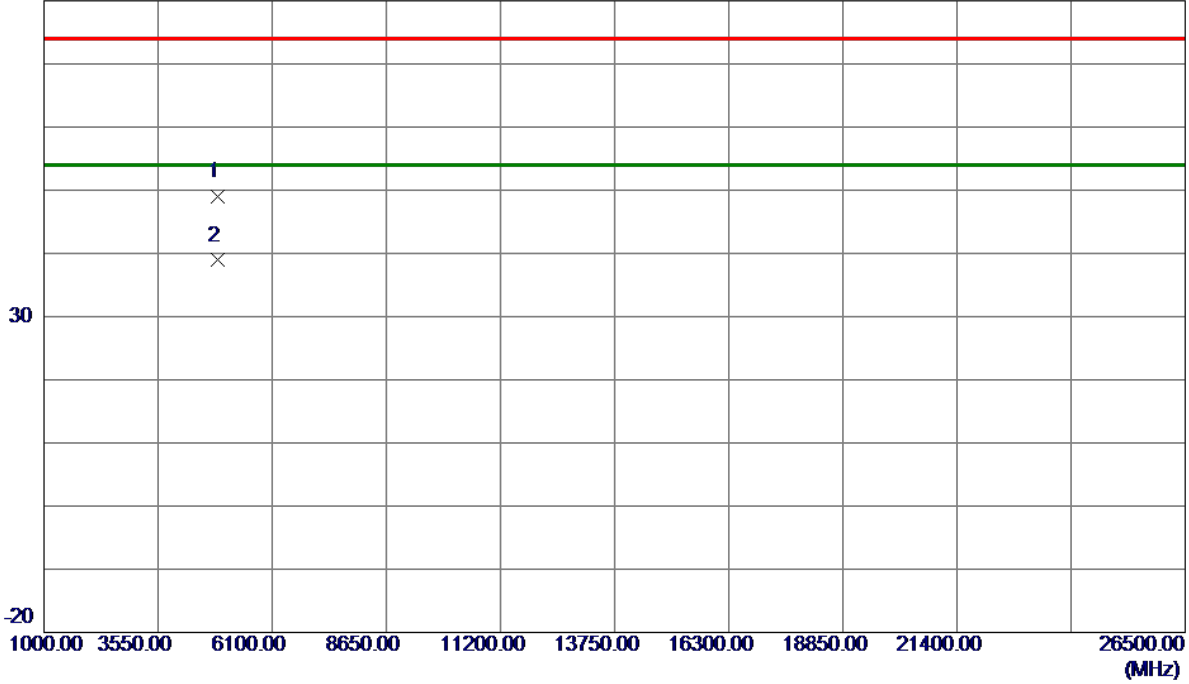

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.9900	44.65	4.34	48.99	74.00	-25.01	Peak	
2 *	4875.0800	34.56	4.34	38.90	54.00	-15.10	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Horizontal

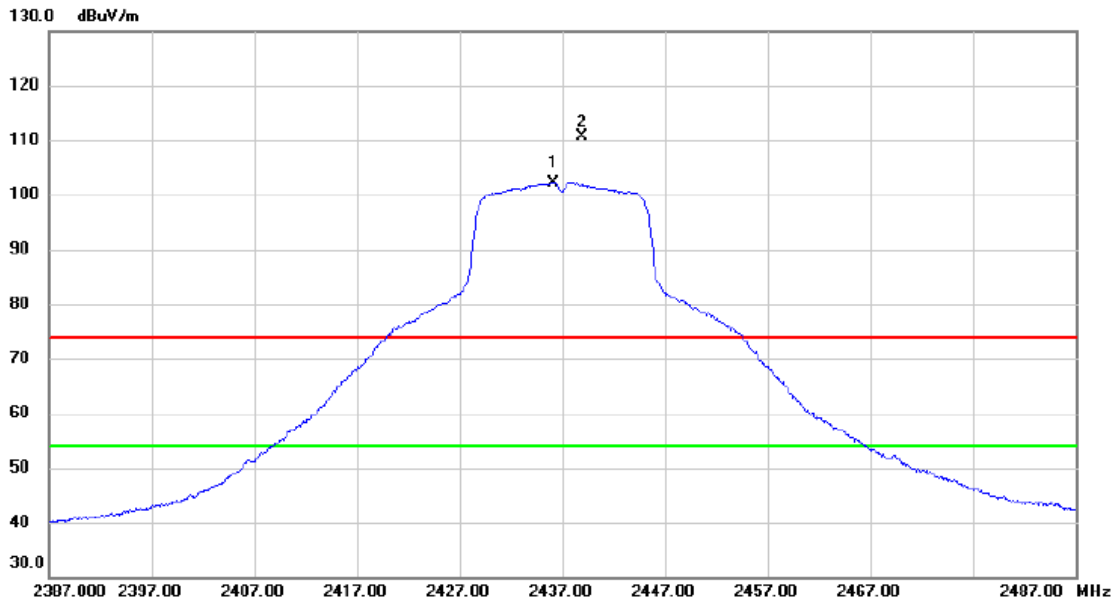


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2436.100	95.20	7.03	102.23	54.00	48.23	AVG	No Limit
2	X	2438.900	103.64	7.03	110.67	74.00	36.67	peak	No Limit

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Horizontal

80 dBuV/m

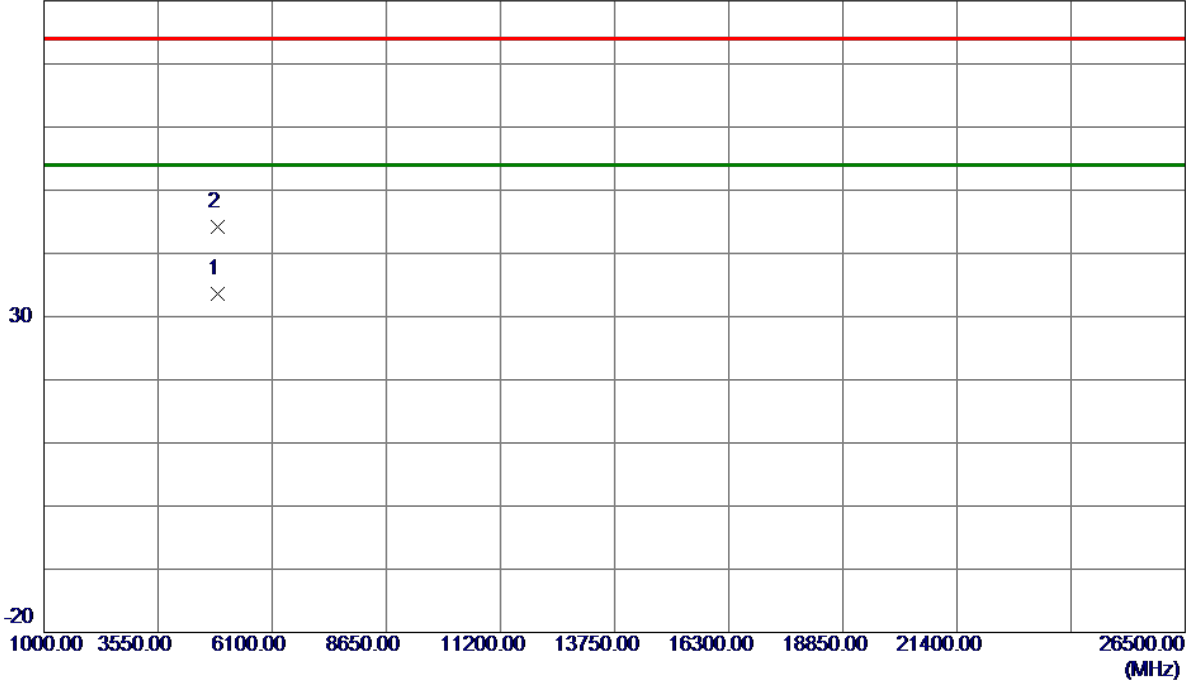


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4875.0350	29.35	4.34	33.69	54.00	-20.31	AVG	
2	4875.0920	39.85	4.34	44.19	74.00	-29.81	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Vertical

130 dBuV/m

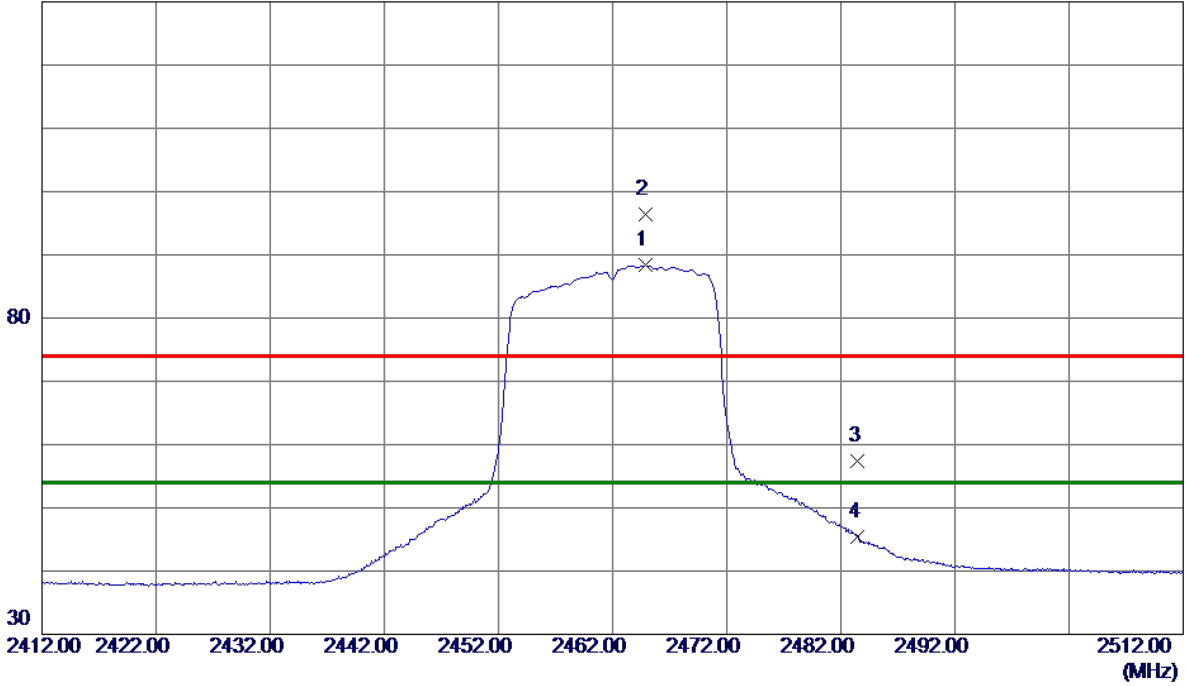


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2464.8500	81.30	7.03	88.33	54.00	34.33	AVG	No Limit
2	2464.9000	89.38	7.03	96.41	74.00	22.41	Peak	No Limit
3	2483.5000	50.40	7.03	57.43	74.00	-16.57	Peak	
4	2483.5000	38.43	7.03	45.46	54.00	-8.54	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Vertical


80 dBuV/m

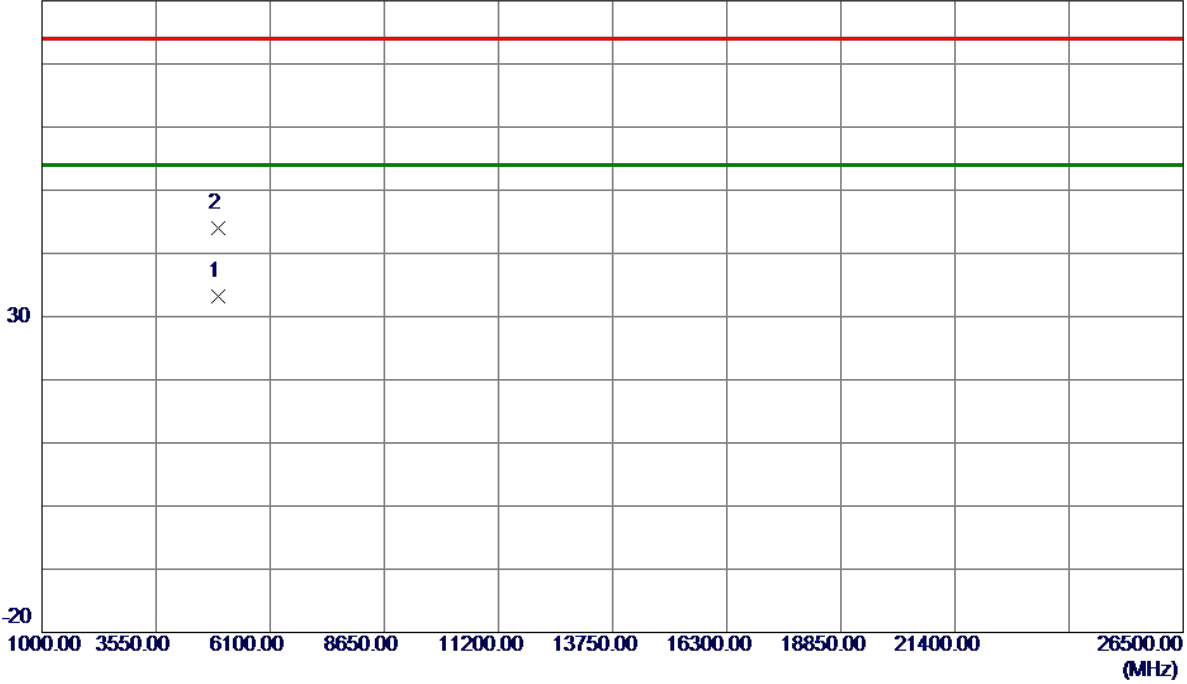

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4924.8570	28.83	4.44	33.27	54.00	-20.73	AVG	
2	4924.9970	39.63	4.44	44.07	74.00	-29.93	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Horizontal

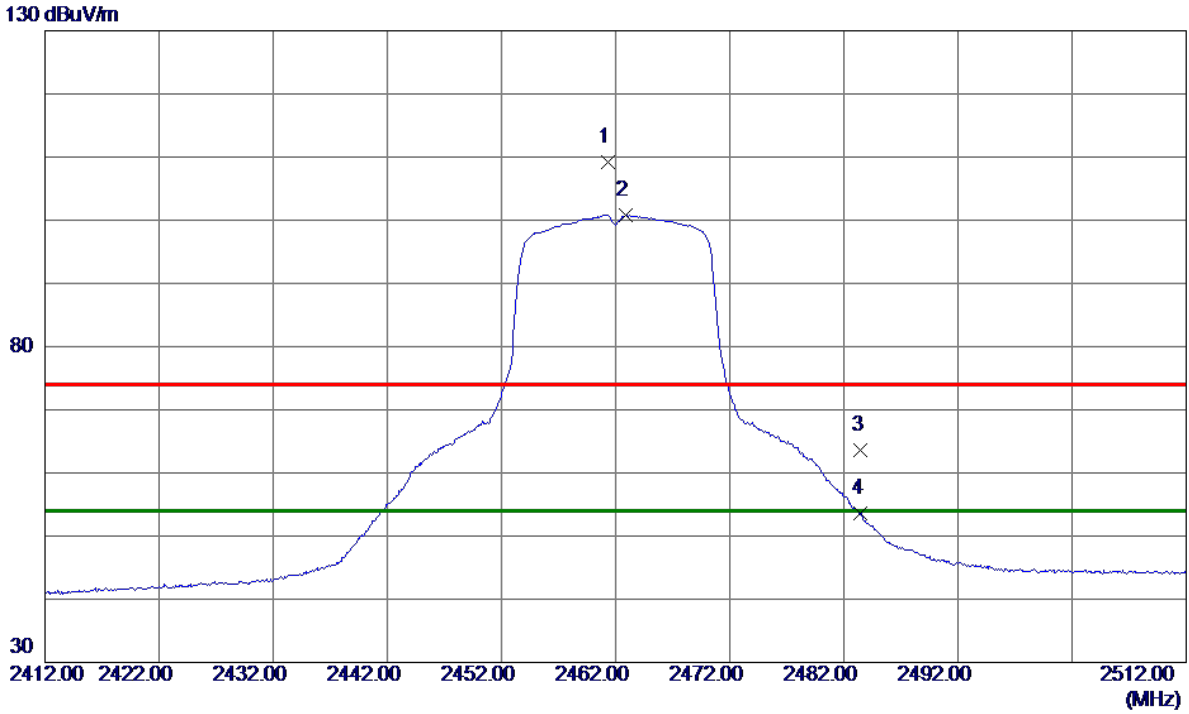


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2461.3500	102.25	7.03	109.28	74.00	35.28	Peak	No Limit
2 *	2462.9000	93.78	7.03	100.81	54.00	46.81	AVG	No Limit
3	2483.5000	56.65	7.03	63.68	74.00	-10.32	Peak	
4	2483.5000	46.57	7.03	53.60	54.00	-0.40	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Horizontal

80 dBuV/m

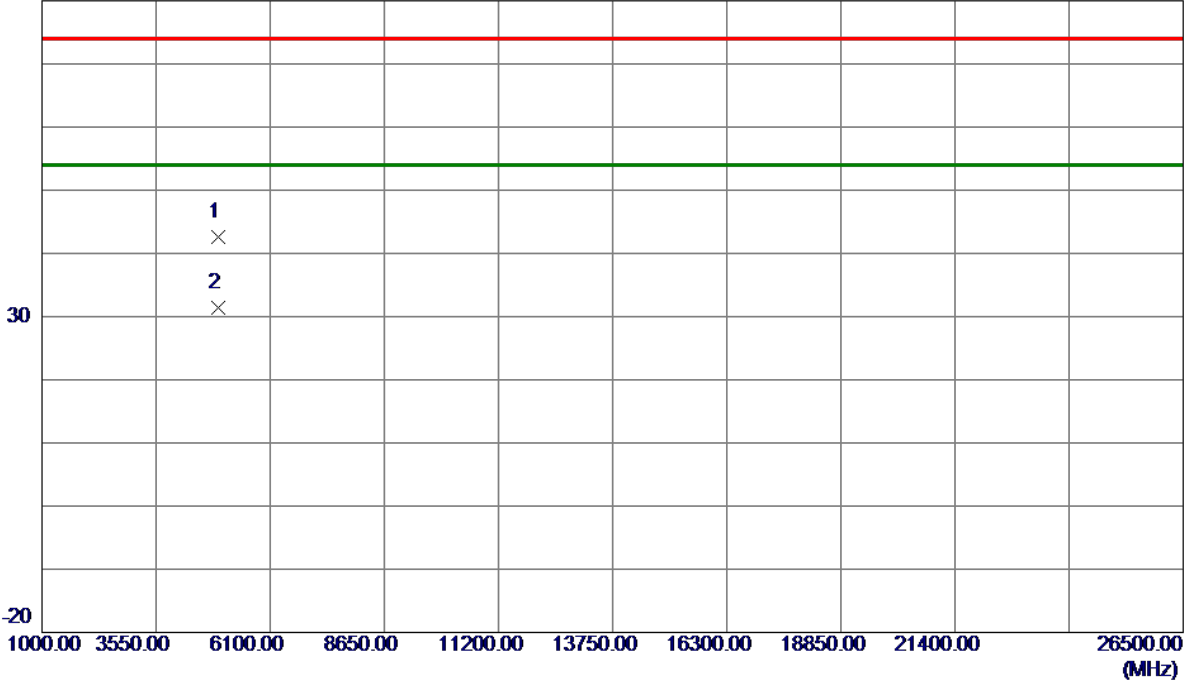


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4924.8240	38.25	4.44	42.69	74.00	-31.31	Peak	
2 *	4924.9980	26.99	4.44	31.43	54.00	-22.57	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Vertical

130 dBuV/m

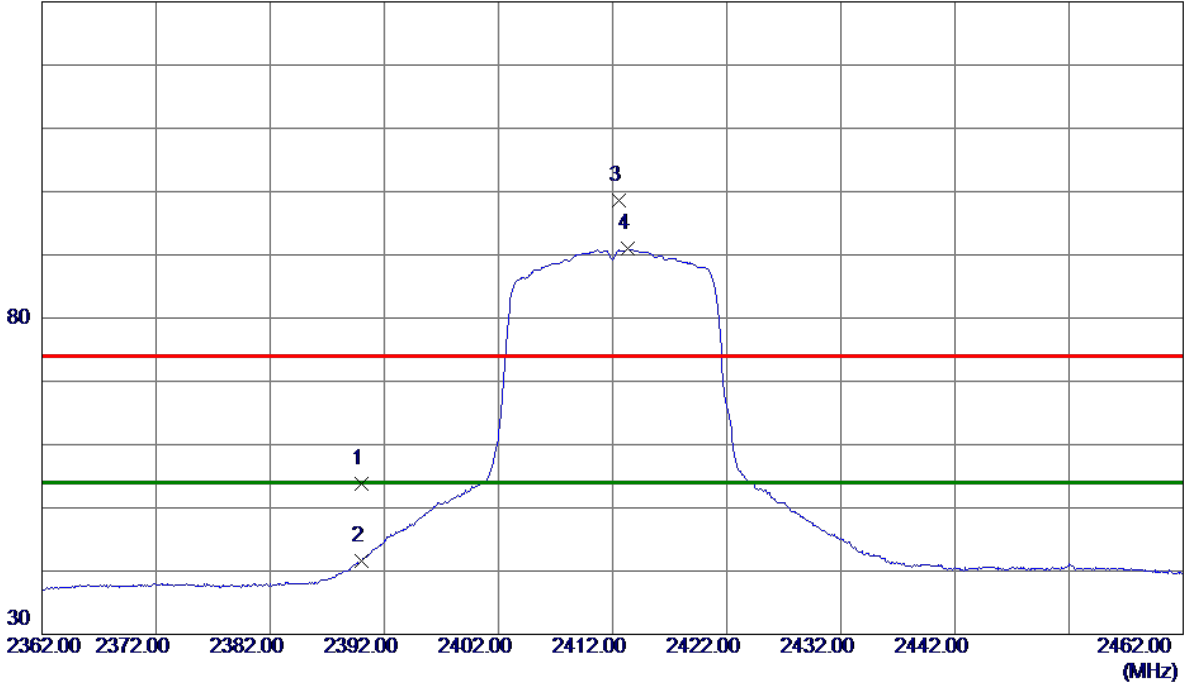


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	46.73	7.01	53.74	74.00	-20.26	Peak	
2	2390.0000	34.63	7.01	41.64	54.00	-12.36	AVG	
3	2412.5500	91.51	7.02	98.53	74.00	24.53	Peak	No Limit
4 *	2413.3500	83.89	7.02	90.91	54.00	36.91	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Vertical


80 dBuV/m

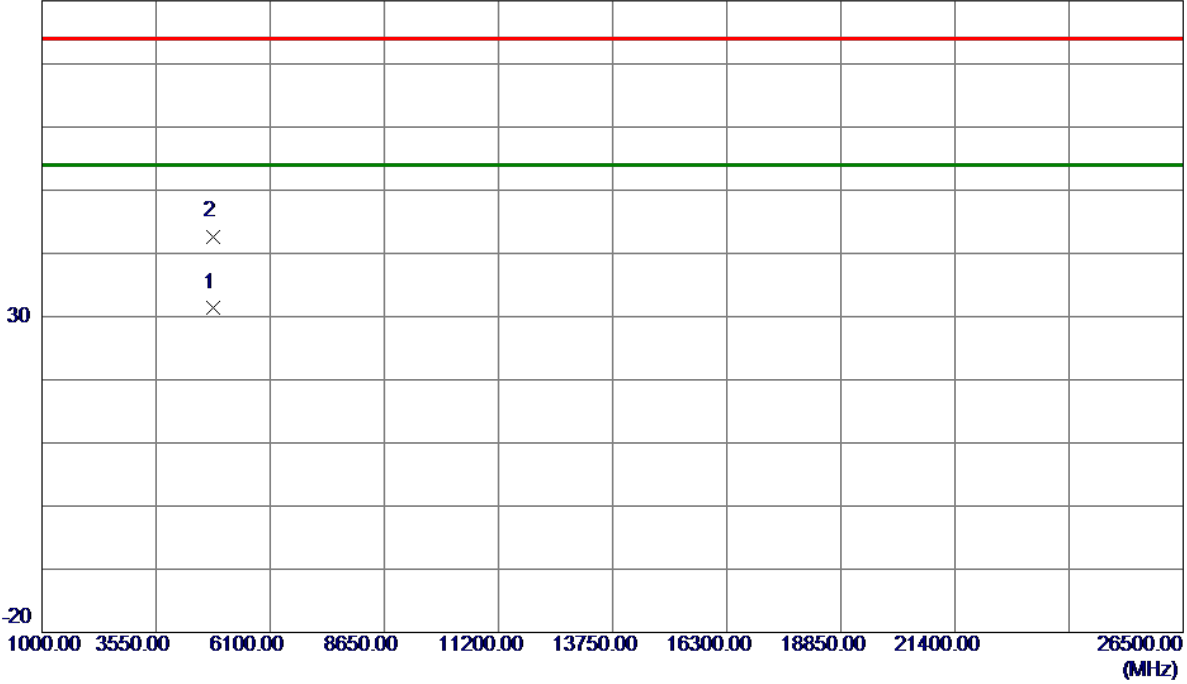

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4821.7850	27.19	4.23	31.42	54.00	-22.58	AVG	
2	4822.4670	38.47	4.23	42.70	74.00	-31.30	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Horizontal

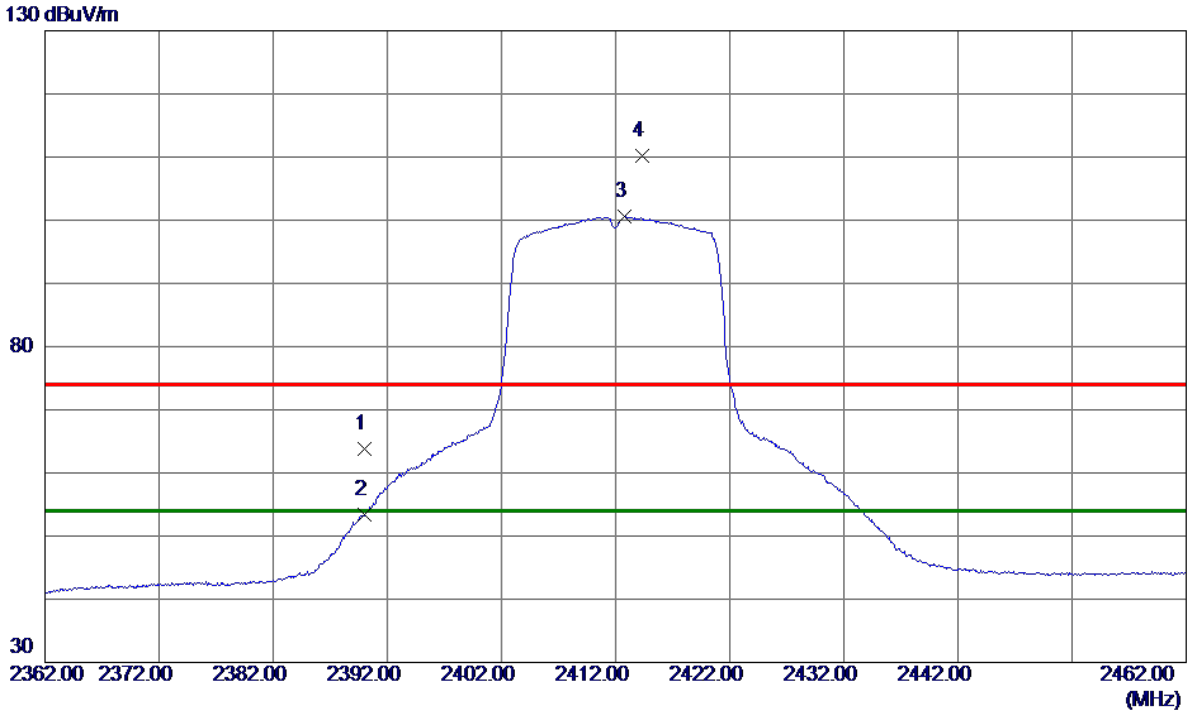


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	56.88	7.01	63.89	74.00	-10.11	Peak	
2	2390.0000	46.34	7.01	53.35	54.00	-0.65	AVG	
3 *	2412.7500	93.53	7.02	100.55	54.00	46.55	AVG	No Limit
4	2414.3000	103.22	7.02	110.24	74.00	36.24	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Horizontal

80 dBuV/m

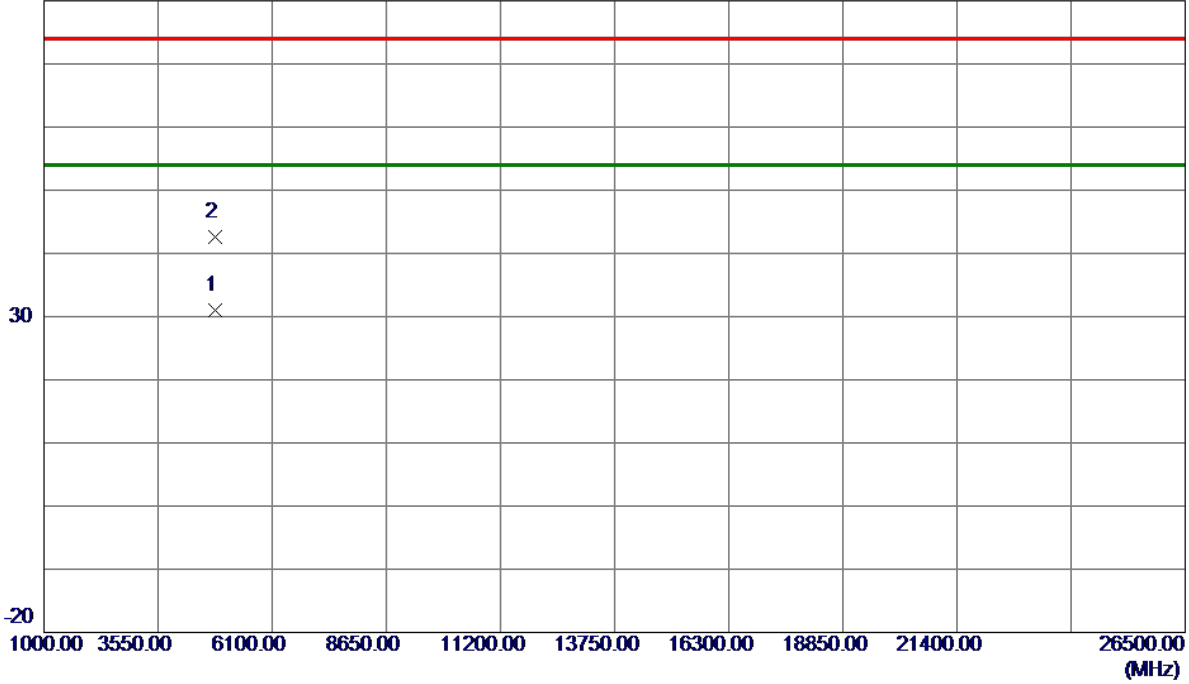


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4821.6050	26.75	4.23	30.98	54.00	-23.02	AVG	
2	4824.2200	38.32	4.23	42.55	74.00	-31.45	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Vertical

130 dBuV/m

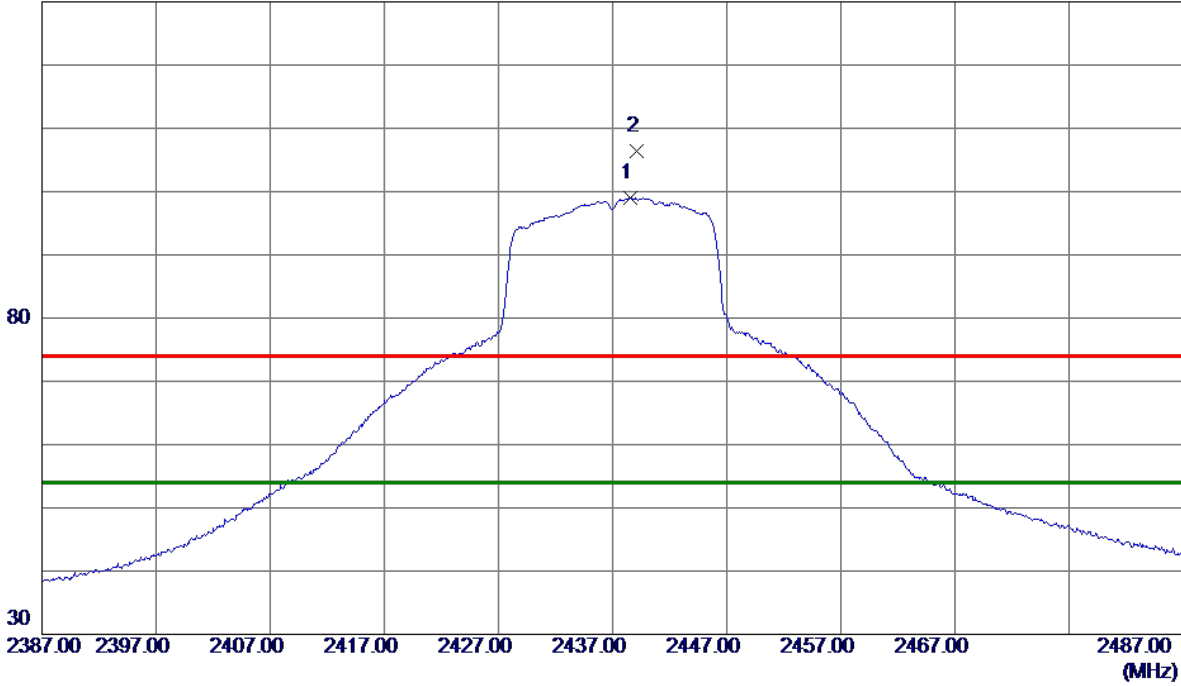


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2438.5500	91.97	7.02	98.99	54.00	44.99	AVG	No Limit
2	2439.1000	99.46	7.02	106.48	74.00	32.48	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Vertical


80 dBuV/m

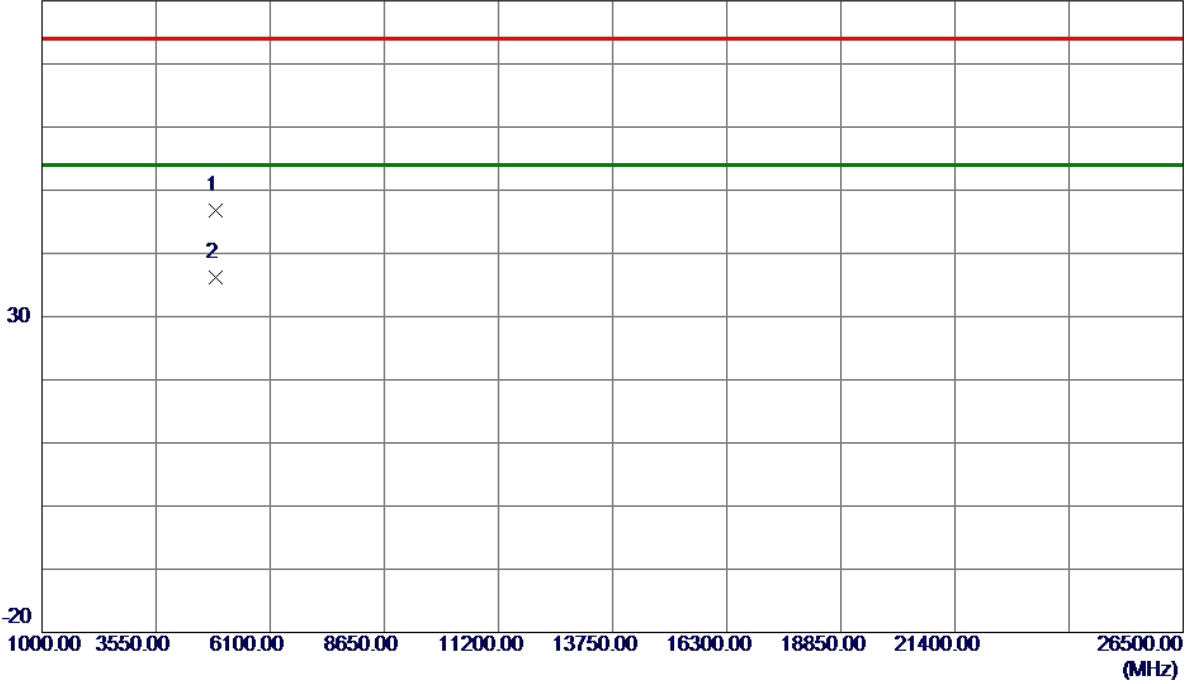

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4875.1130	42.37	4.34	46.71	74.00	-27.29	Peak	
2 *	4875.1800	31.82	4.34	36.16	54.00	-17.84	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Horizontal

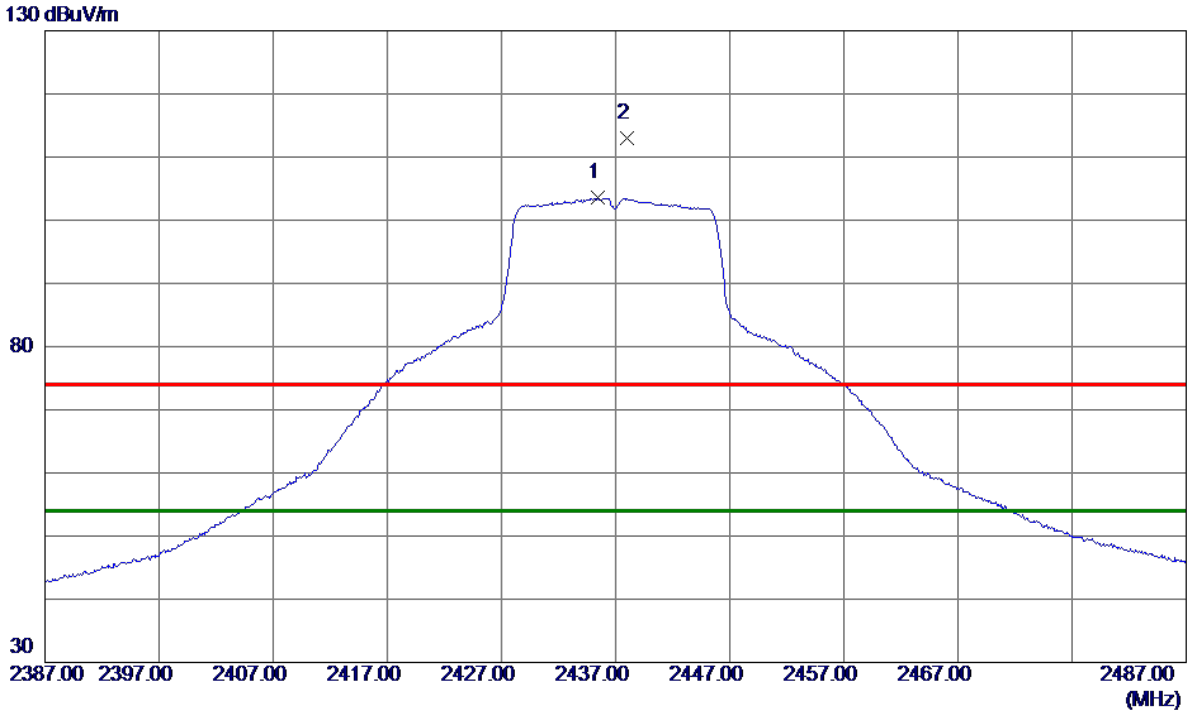


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2435.4500	96.52	7.02	103.54	54.00	49.54	AVG	No Limit
2	2438.0500	105.91	7.02	112.93	74.00	38.93	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Horizontal

80 dBuV/m

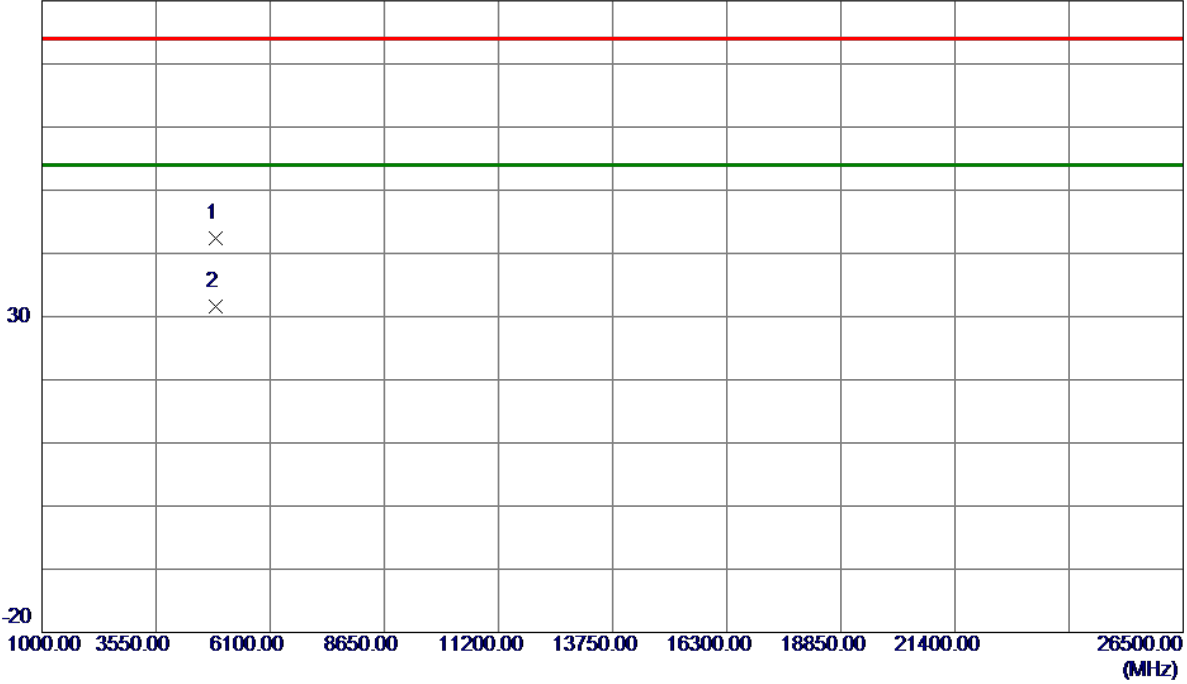


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4872.8150	38.00	4.33	42.33	74.00	-31.67	Peak	
2 *	4875.1300	27.28	4.34	31.62	54.00	-22.38	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Vertical

130 dBuV/m

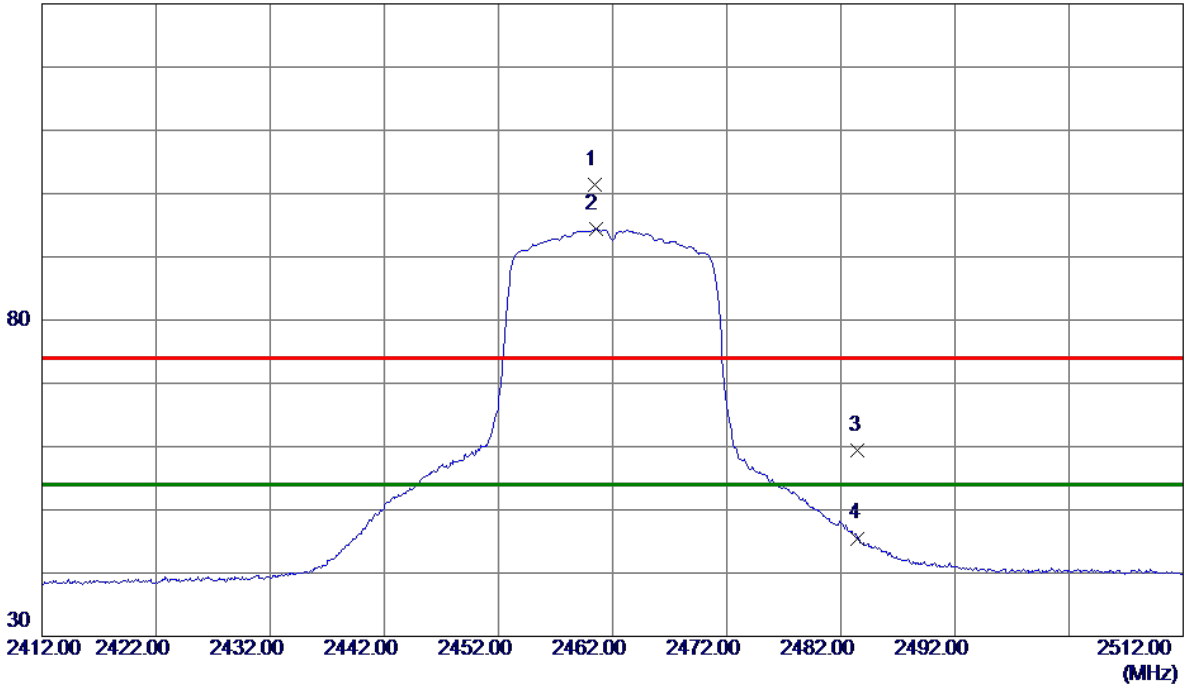


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2460.4000	94.45	7.03	101.48	74.00	27.48	Peak	No Limit
2 *	2460.5000	87.36	7.03	94.39	54.00	40.39	AVG	No Limit
3	2483.5000	52.35	7.03	59.38	74.00	-14.62	Peak	
4	2483.5000	38.47	7.03	45.50	54.00	-8.50	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Vertical


80 dBuV/m

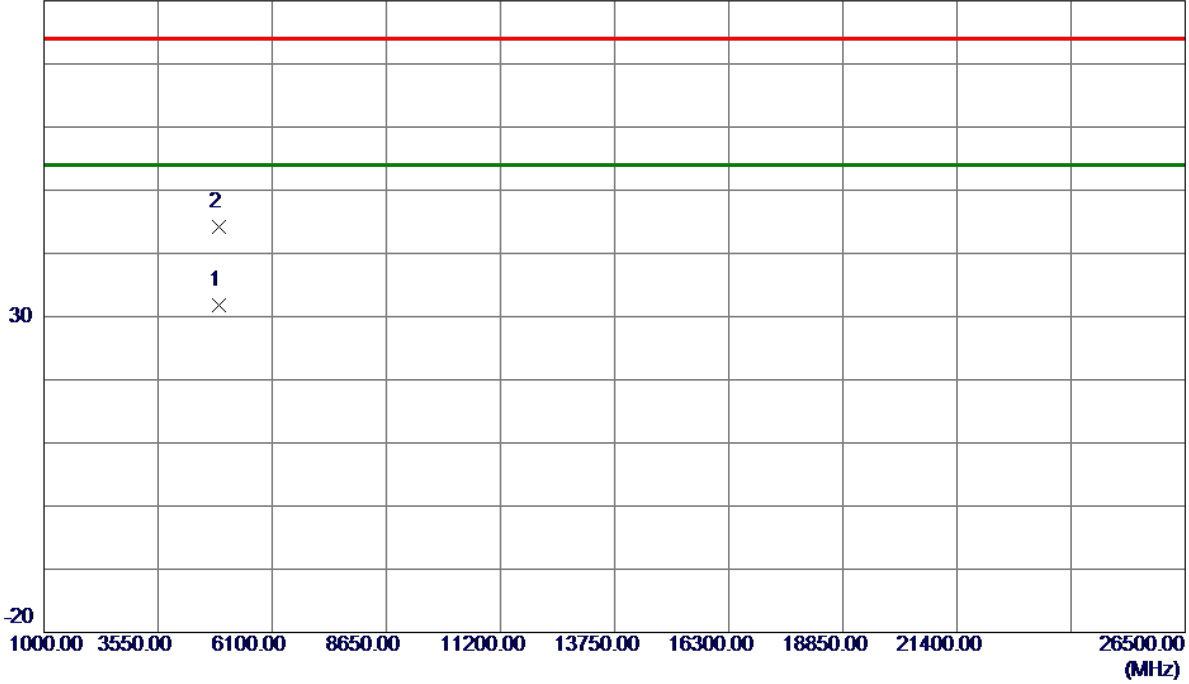

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4923.8700	27.38	4.44	31.82	54.00	-22.18	AVG	
2	4924.0450	39.83	4.44	44.27	74.00	-29.73	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Horizontal

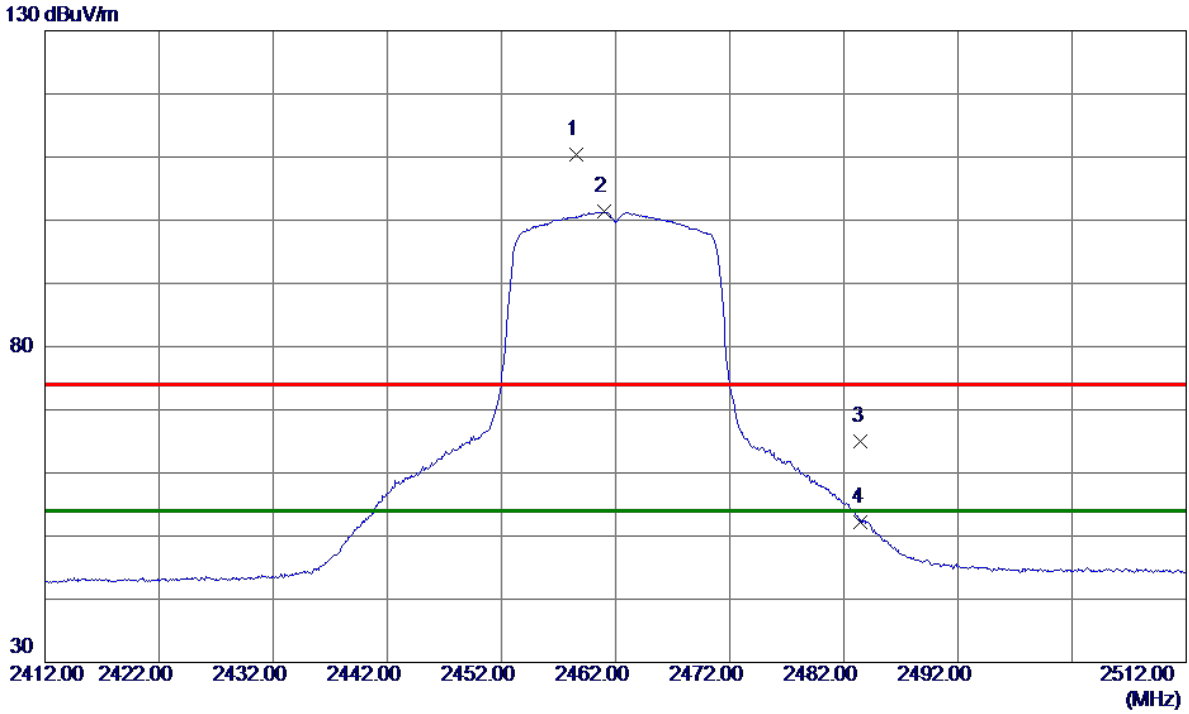


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2458.6000	103.41	7.03	110.44	74.00	36.44	Peak	No Limit
2 *	2460.9500	94.35	7.03	101.38	54.00	47.38	AVG	No Limit
3	2483.5000	57.94	7.03	64.97	74.00	-9.03	Peak	
4	2483.5000	45.24	7.03	52.27	54.00	-1.73	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Horizontal

80 dBuV/m

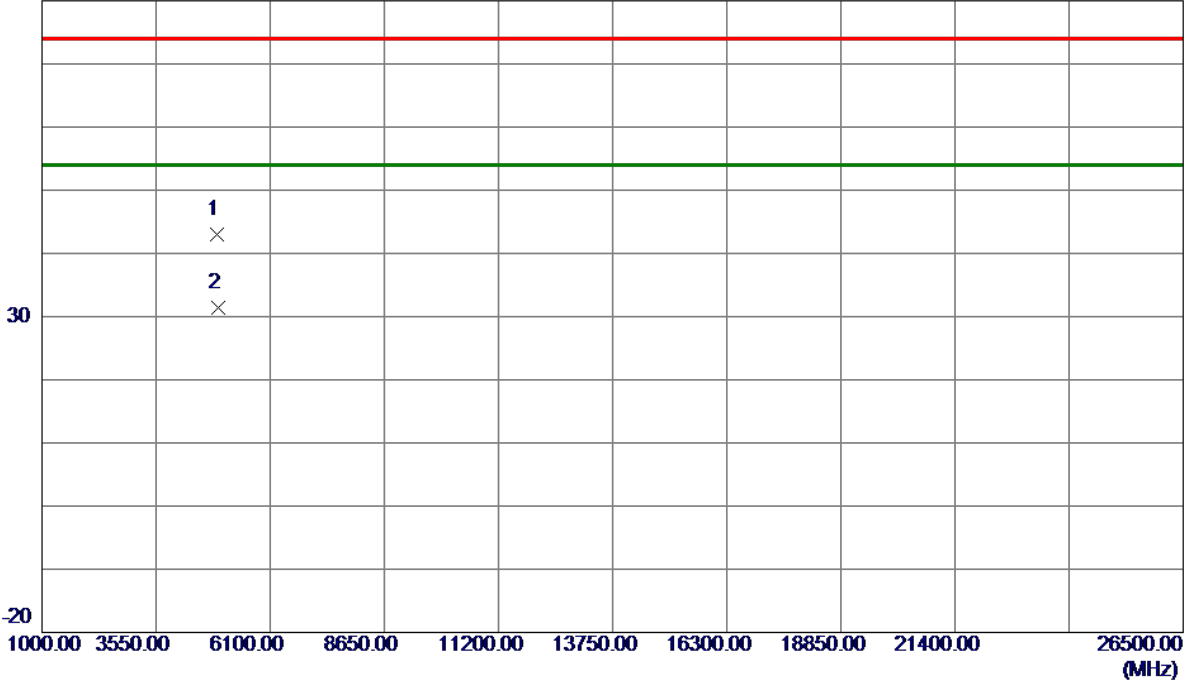


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4924.1100	38.47	4.44	42.91	74.00	-31.09	Peak	
2 *	4924.3800	26.99	4.44	31.43	54.00	-22.57	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Vertical

130 dBuV/m

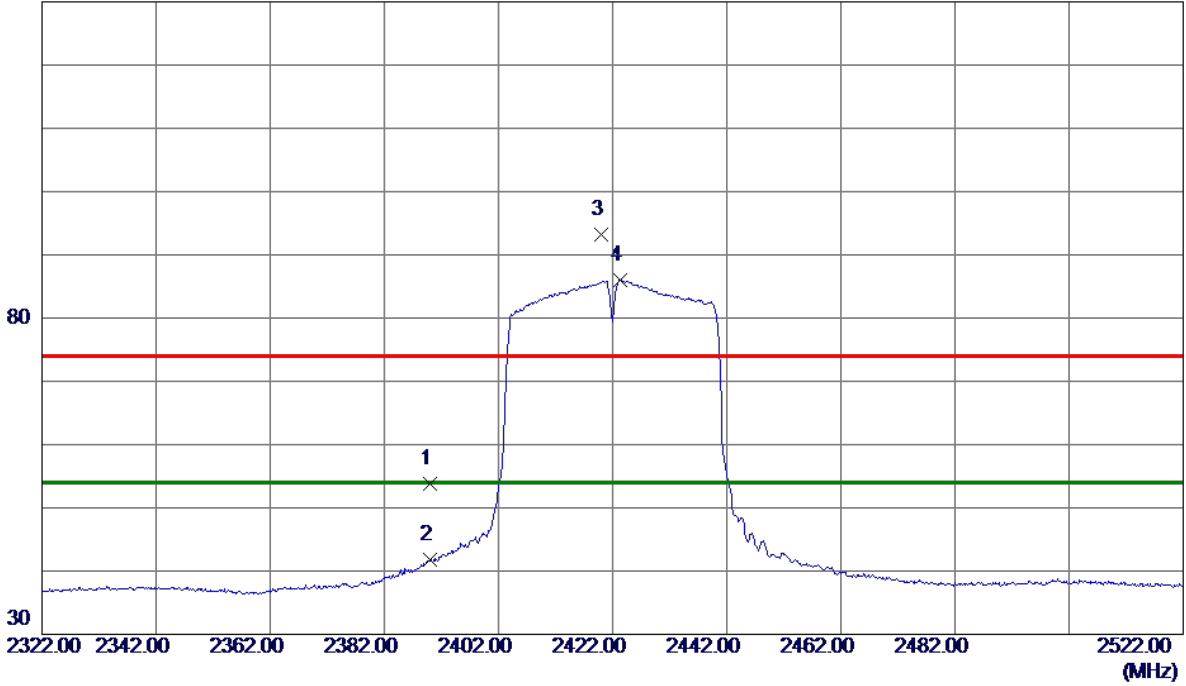


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	46.81	7.01	53.82	74.00	-20.18	Peak	
2	2390.0000	34.84	7.01	41.85	54.00	-12.15	AVG	
3	2420.1000	86.09	7.02	93.11	74.00	19.11	Peak	No Limit
4 *	2423.4000	79.00	7.02	86.02	54.00	32.02	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Vertical


80 dBuV/m

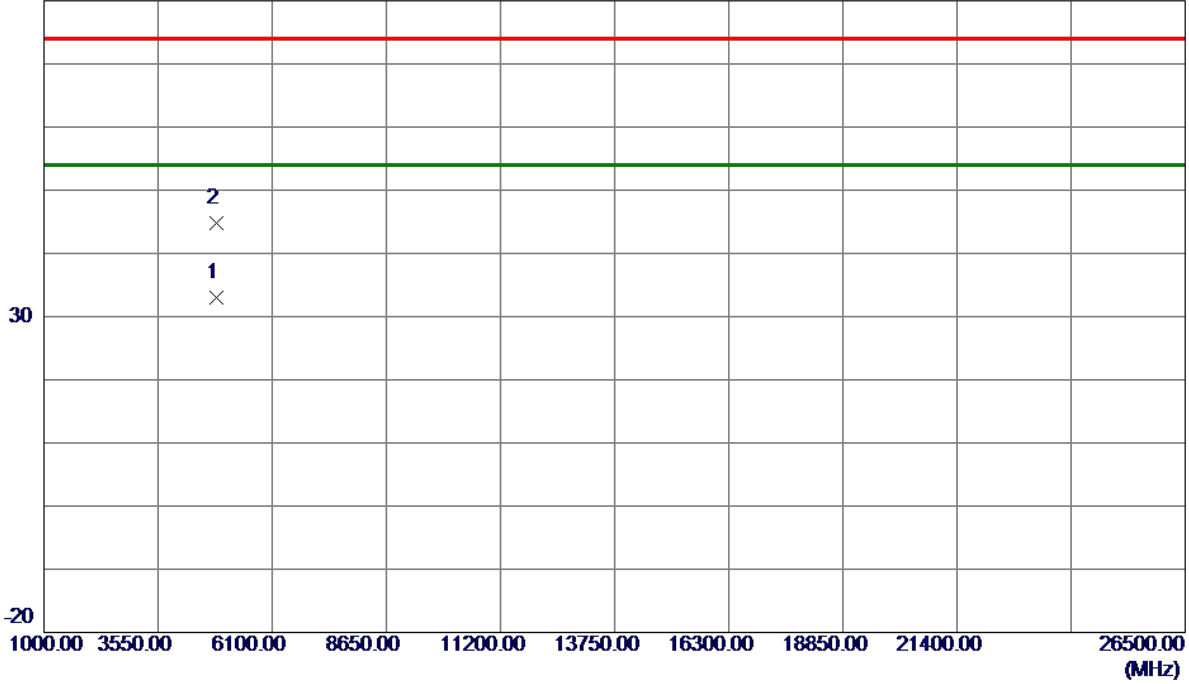

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4842.3600	28.70	4.27	32.97	54.00	-21.03	AVG	
2	4844.0000	40.55	4.27	44.82	74.00	-29.18	Peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Horizontal

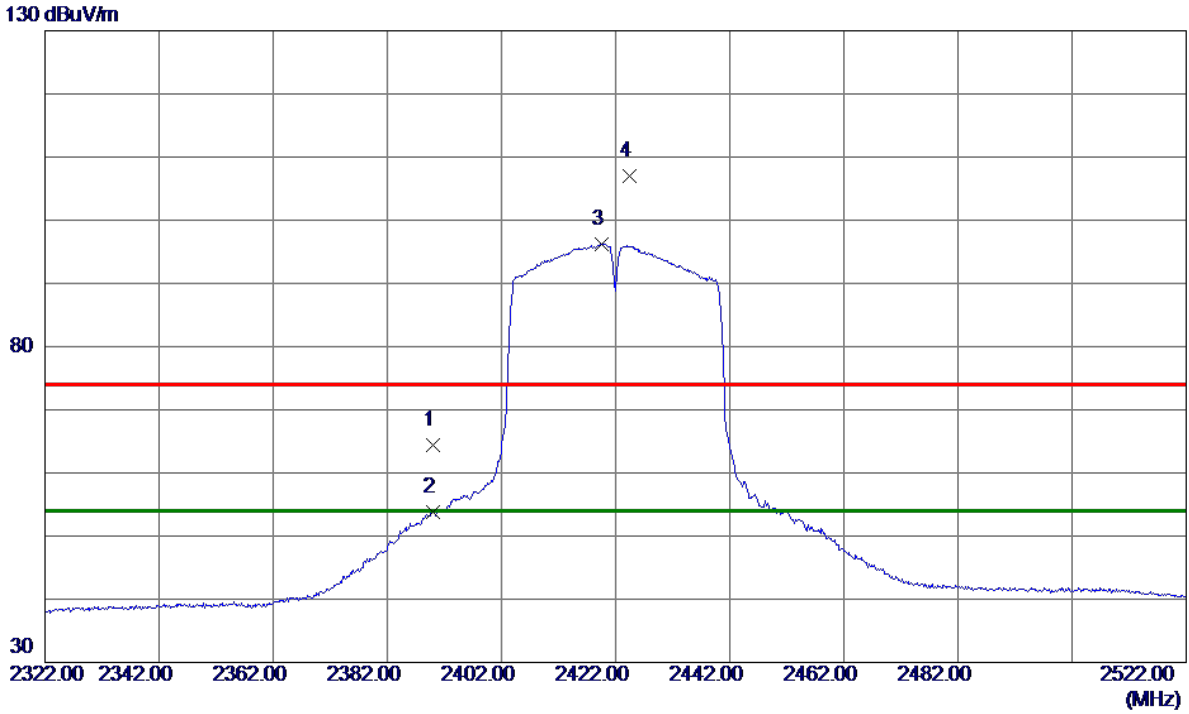


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	57.32	7.01	64.33	74.00	-9.67	Peak	
2	2390.0000	46.76	7.01	53.77	54.00	-0.23	AVG	
3 *	2419.5000	89.27	7.02	96.29	54.00	42.29	AVG	No Limit
4	2424.5000	99.96	7.02	106.98	74.00	32.98	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Horizontal

80 dBuV/m

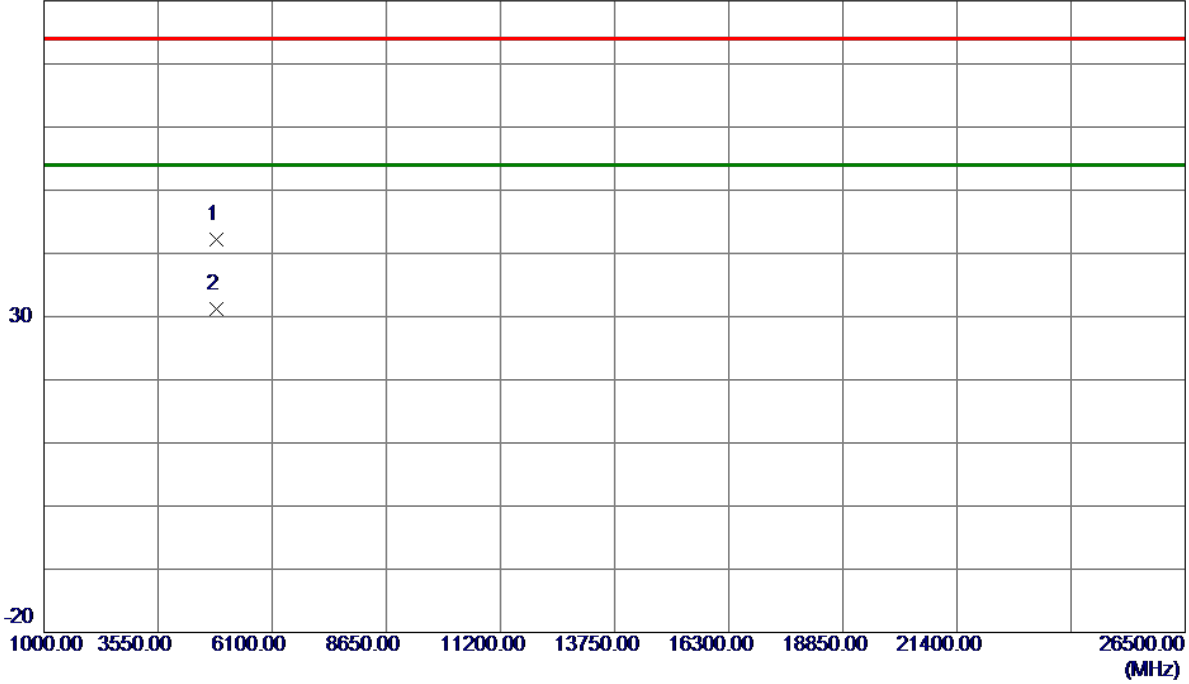


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4842.0520	37.99	4.27	42.26	74.00	-31.74	Peak	
2 *	4842.5050	26.84	4.27	31.11	54.00	-22.89	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Vertical

130 dBuV/m

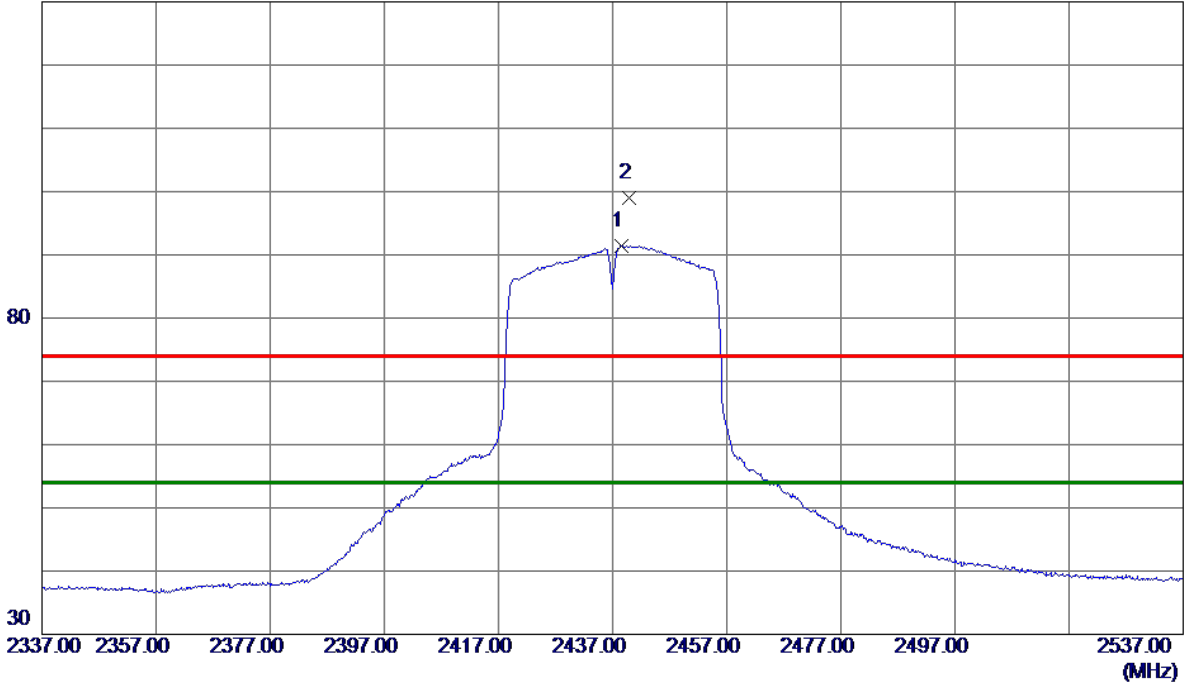


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2438.6000	84.36	7.02	91.38	54.00	37.38	AVG	No Limit
2	2439.9000	92.08	7.02	99.10	74.00	25.10	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Vertical


80 dBuV/m

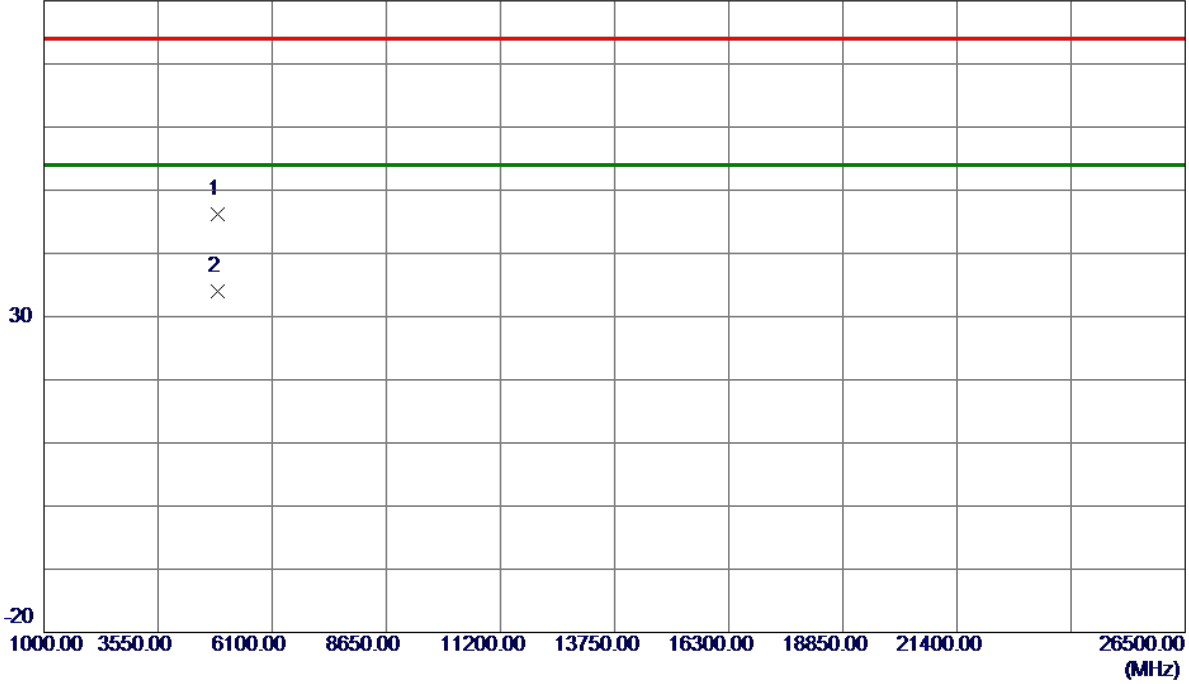

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4875.0379	41.93	4.34	46.27	74.00	-27.73	Peak	
2 *	4875.2599	29.66	4.34	34.00	54.00	-20.00	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Horizontal

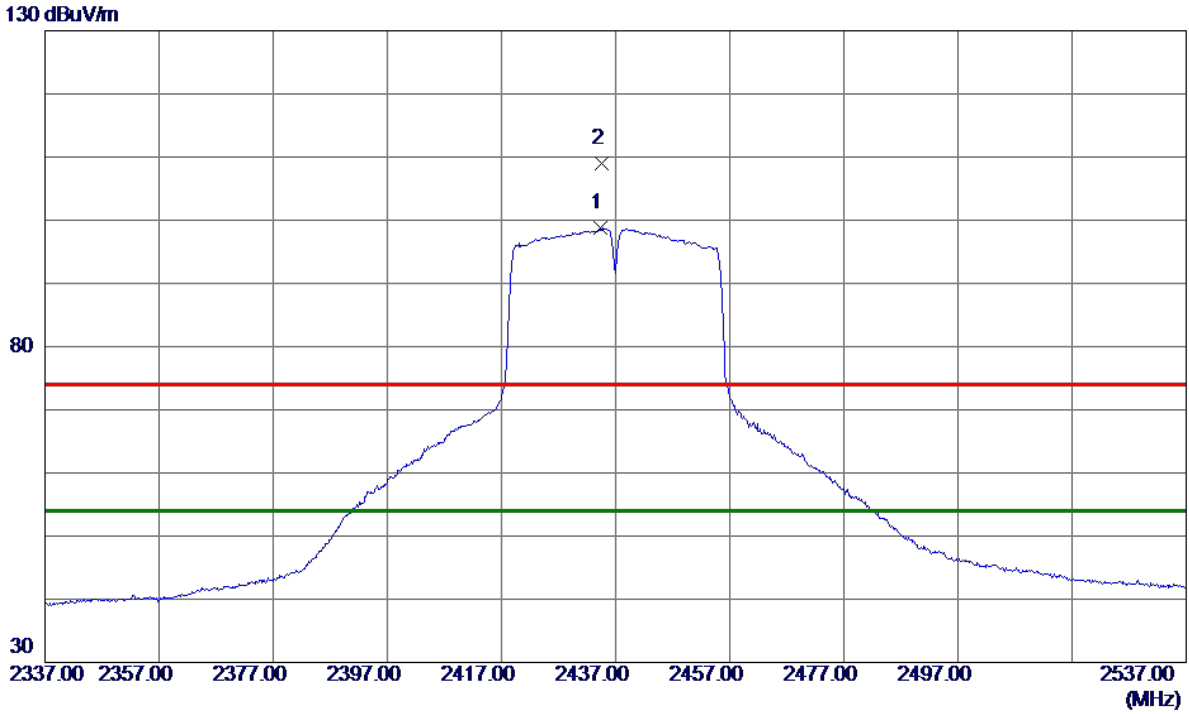


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2434.3000	91.72	7.02	98.74	54.00	44.74	AVG	No Limit
2	2434.5000	102.06	7.02	109.08	74.00	35.08	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Horizontal

80 dBuV/m

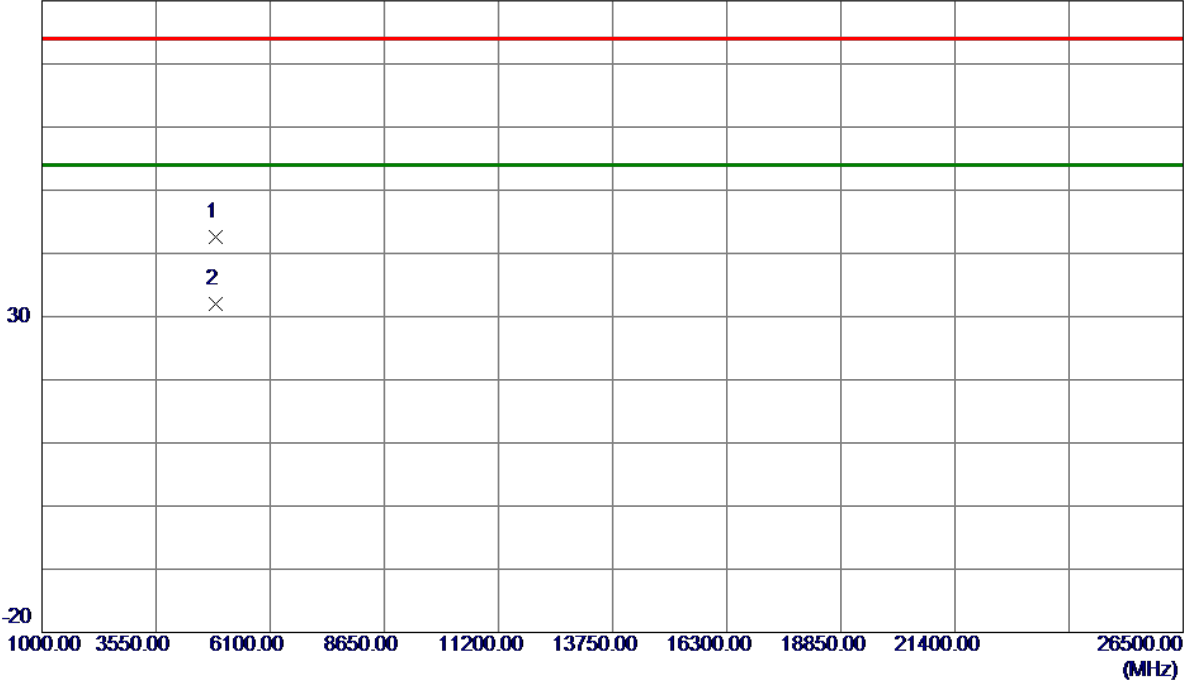


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.3820	38.22	4.34	42.56	74.00	-31.44	Peak	
2 *	4875.0970	27.75	4.34	32.09	54.00	-21.91	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Vertical

130 dBuV/m

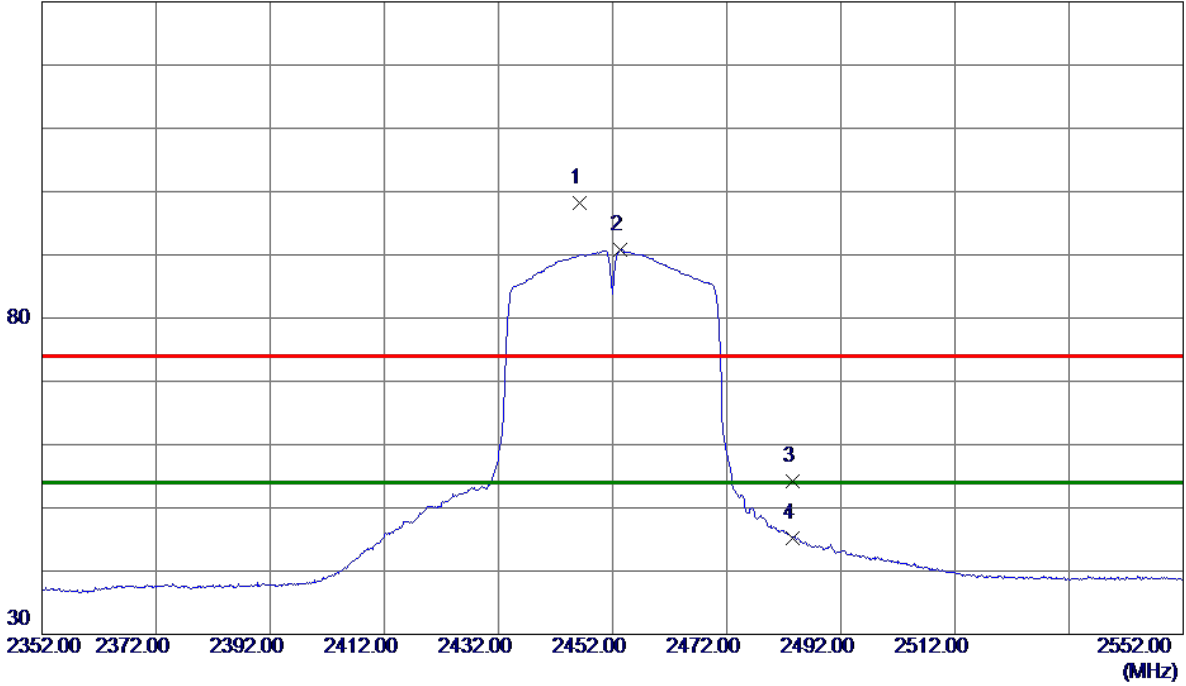


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2446.3000	91.17	7.02	98.19	74.00	24.19	Peak	No Limit
2 *	2453.4000	83.73	7.03	90.76	54.00	36.76	AVG	No Limit
3	2483.5000	47.19	7.03	54.22	74.00	-19.78	Peak	
4	2483.5000	38.21	7.03	45.24	54.00	-8.76	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Vertical


80 dBuV/m

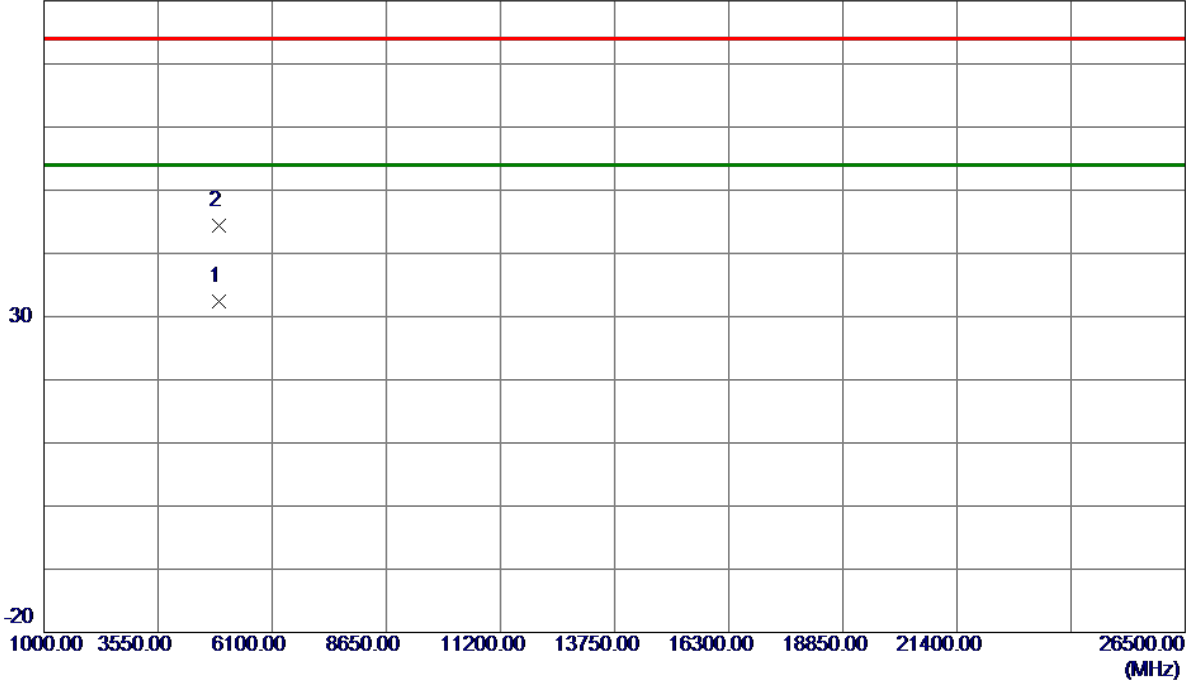

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4903.6200	27.98	4.40	32.38	54.00	-21.62	AVG	
2	4905.7120	39.94	4.40	44.34	74.00	-29.66	Peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Horizontal

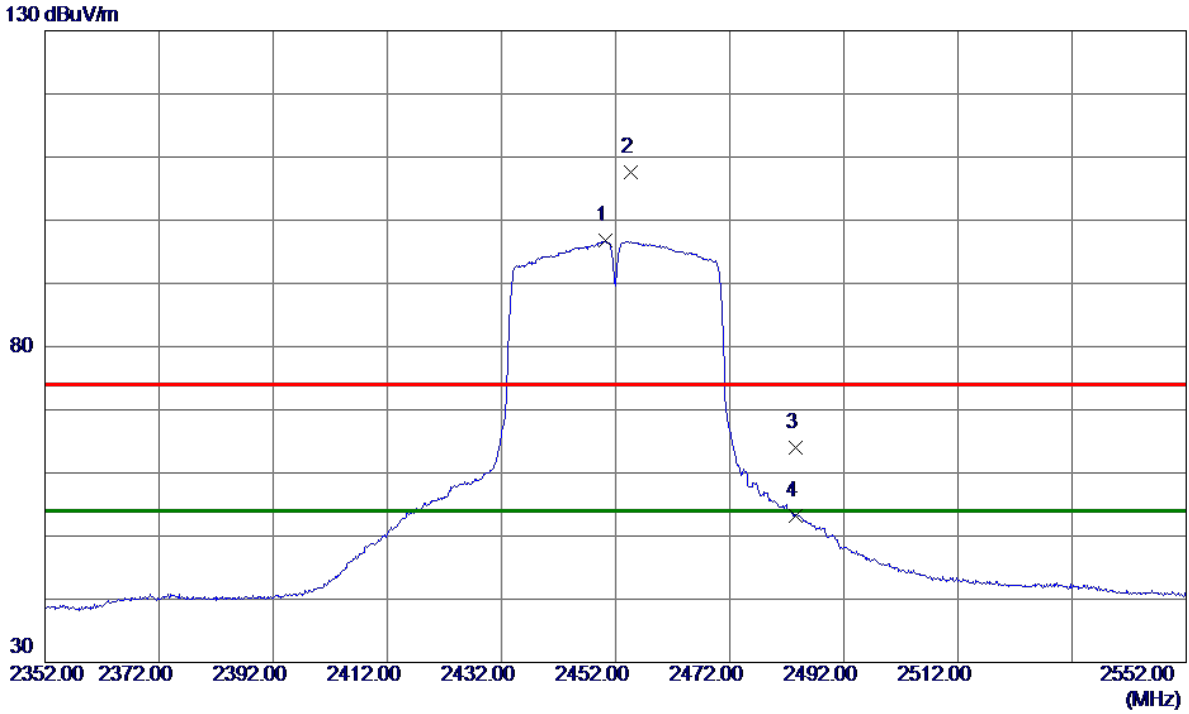


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2450.2000	89.69	7.02	96.71	54.00	42.71	AVG	No Limit
2	2454.7000	100.52	7.03	107.55	74.00	33.55	Peak	No Limit
3	2483.5000	56.88	7.03	63.91	74.00	-10.09	Peak	
4	2483.5000	46.11	7.03	53.14	54.00	-0.86	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Horizontal

80 dBuV/m

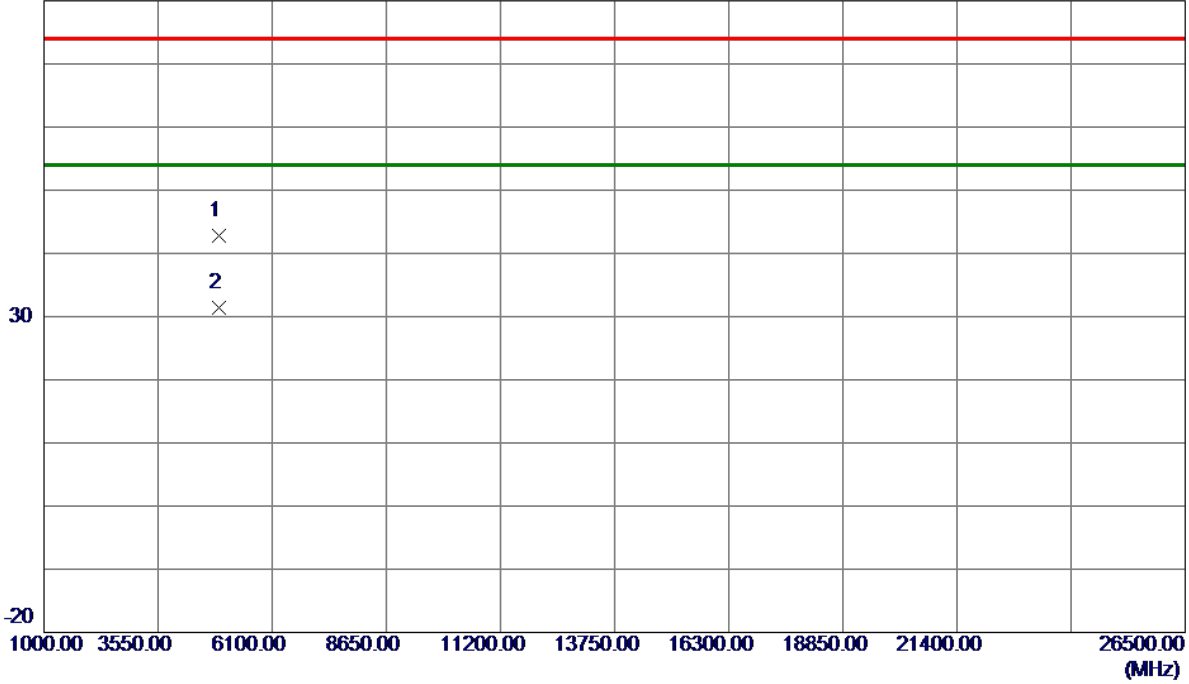


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4902.4150	38.49	4.40	42.89	74.00	-31.11	Peak	
2 *	4905.4250	27.05	4.40	31.45	54.00	-22.55	AVG	

APPENDIX E - BANDWIDTH

Test Mode: TX B Mode_CH01/06/11


Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	9.58	14.20	500	Complies
2437	10.06	15.00	500	Complies
2462	9.16	13.92	500	Complies

TX CH01

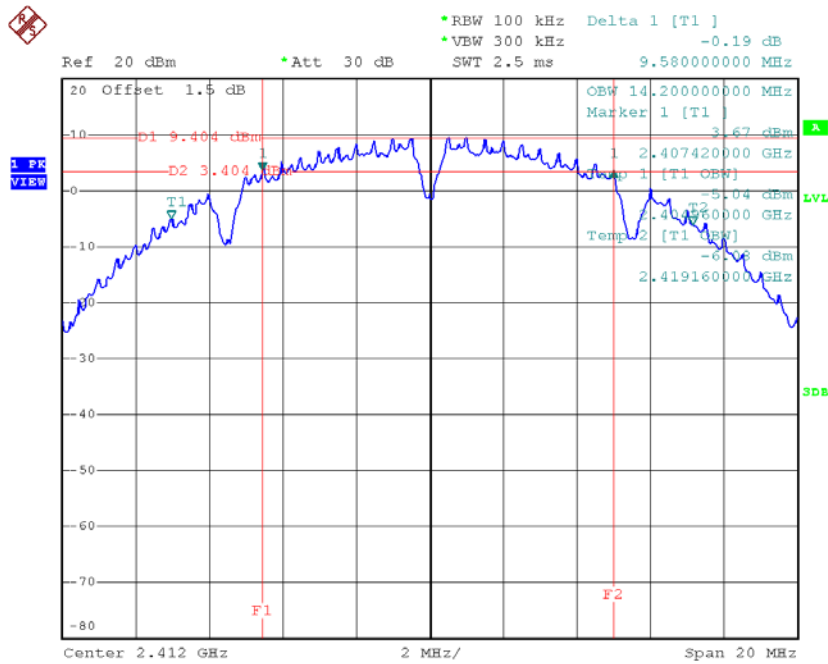


Date: 19.DEC.2018 14:58:37

TX CH06

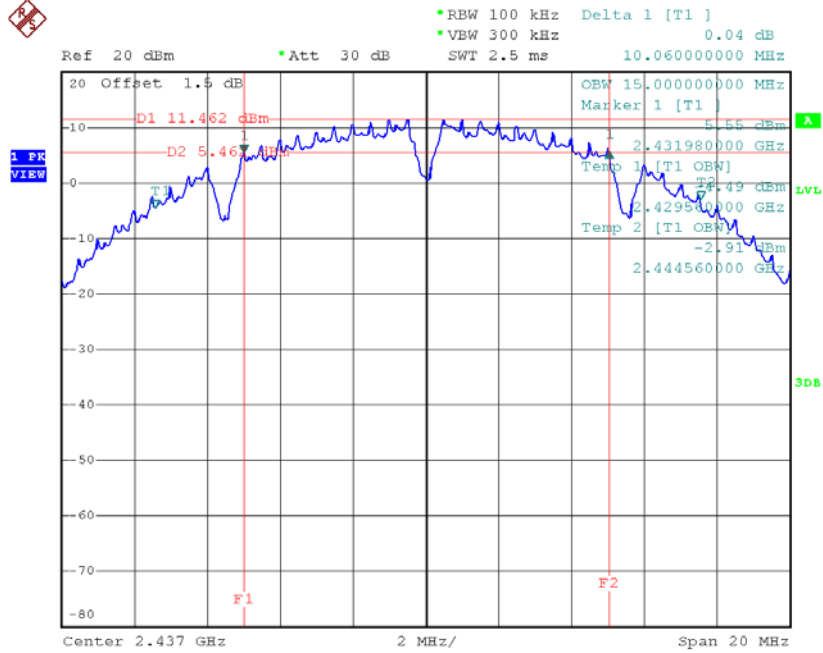

Date: 19.DEC.2018 15:02:16


TX CH11

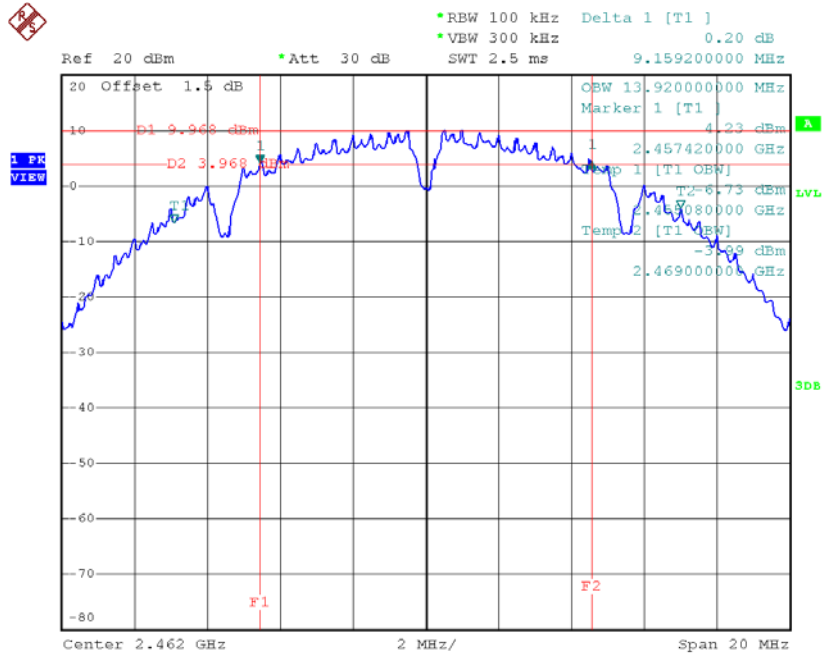

Date: 19.DEC.2018 15:03:38


Test Mode: TX G Mode_CH01/06/11

Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	13.90	16.36	500	Complies
2437	15.11	16.44	500	Complies
2462	15.71	16.36	500	Complies

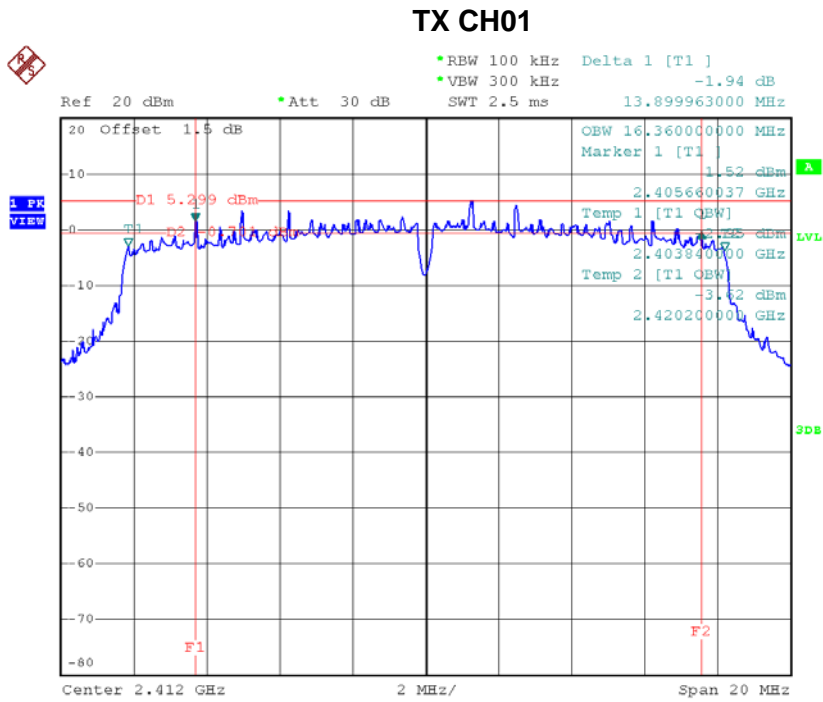


Date: 19.DEC.2018 15:10:26

TX CH06

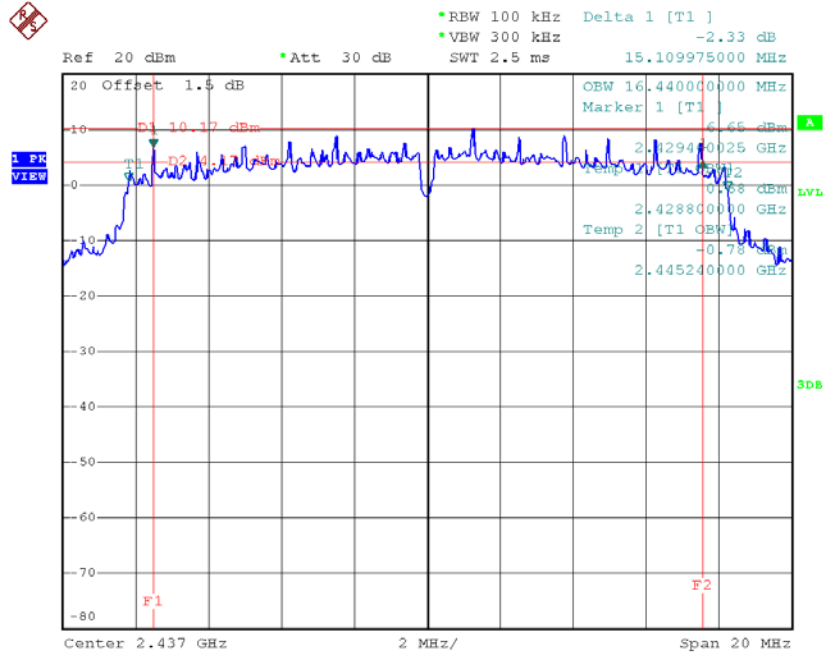

Date: 19.DEC.2018 15:11:20


TX CH11

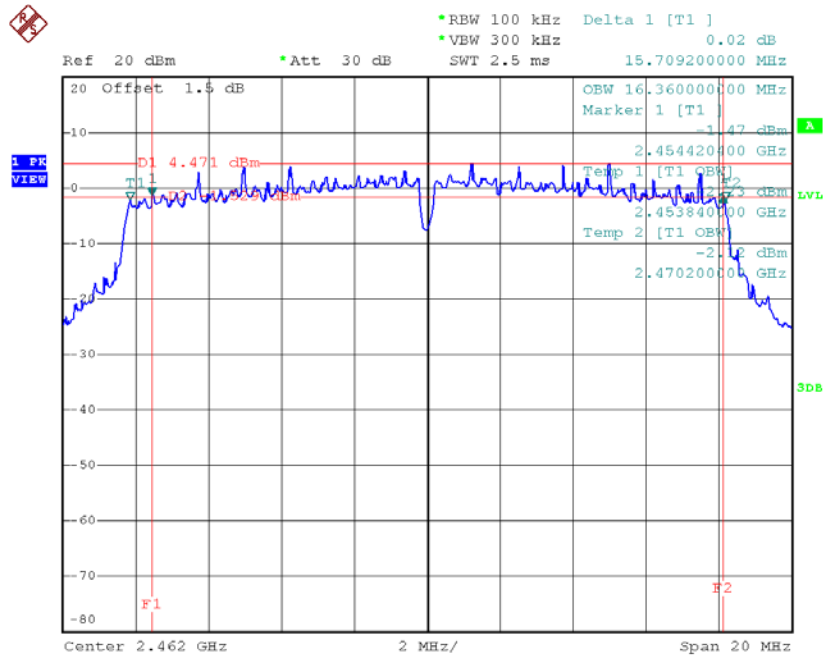

Date: 19.DEC.2018 15:12:23


Test Mode: TX N-20MHz Mode_CH01/06/11

Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	15.16	17.56	500	Complies
2437	15.11	17.60	500	Complies
2462	15.12	17.56	500	Complies

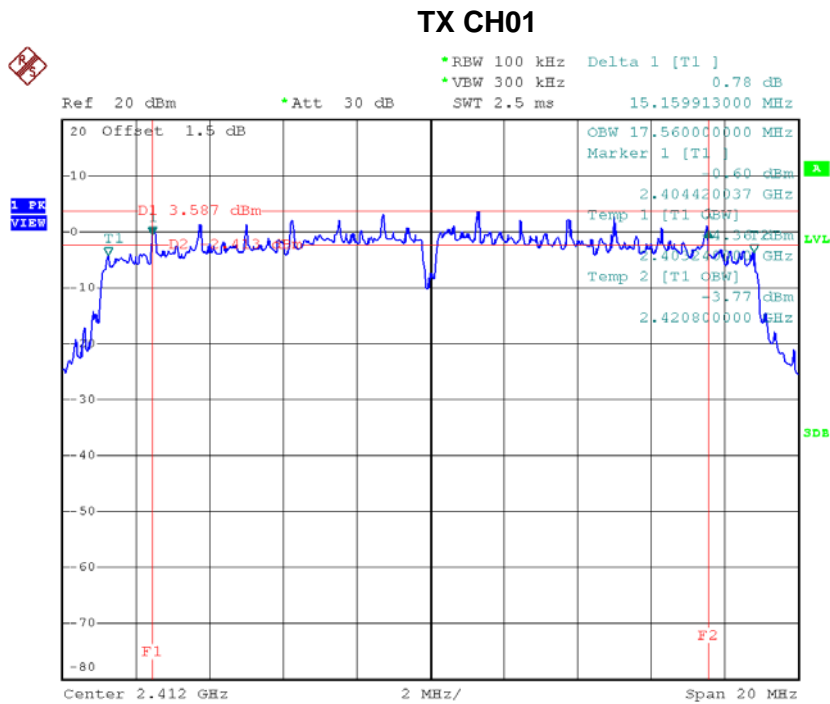


Date: 19.DEC.2018 15:22:36

TX CH06

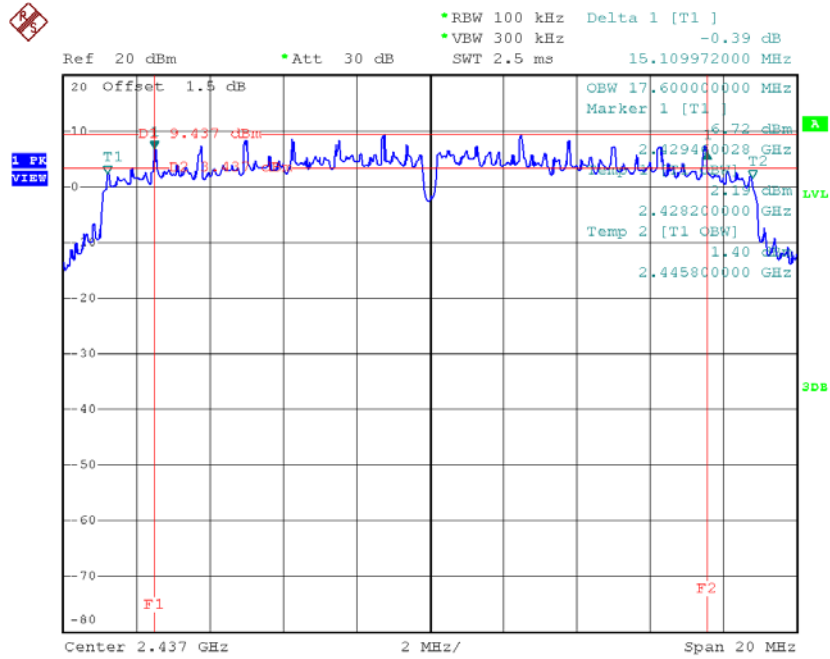

Date: 19.DEC.2018 15:24:38

TX CH11

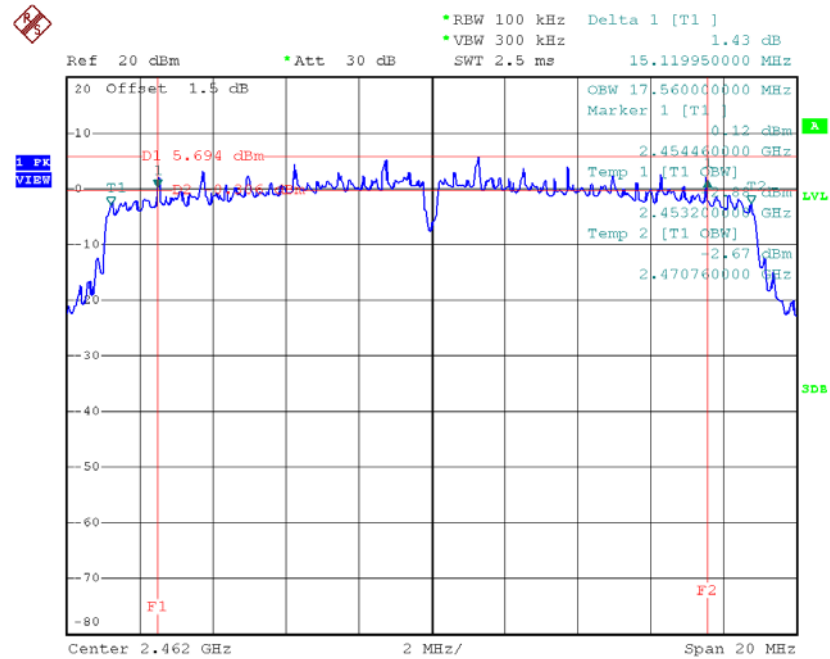


Date: 19.DEC.2018 15:25:54

Test Mode: TX N-40MHz Mode_CH03/06/09


Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2422	35.21	35.84	500	Complies
2437	35.20	35.76	500	Complies
2452	35.08	35.76	500	Complies

TX CH03

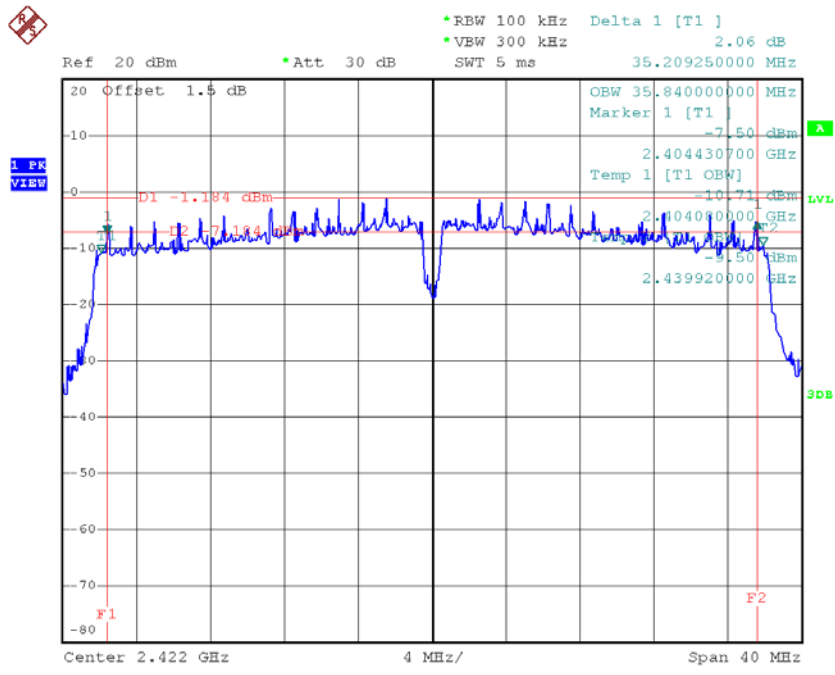


Date: 19.DEC.2018 18:33:19

TX CH06

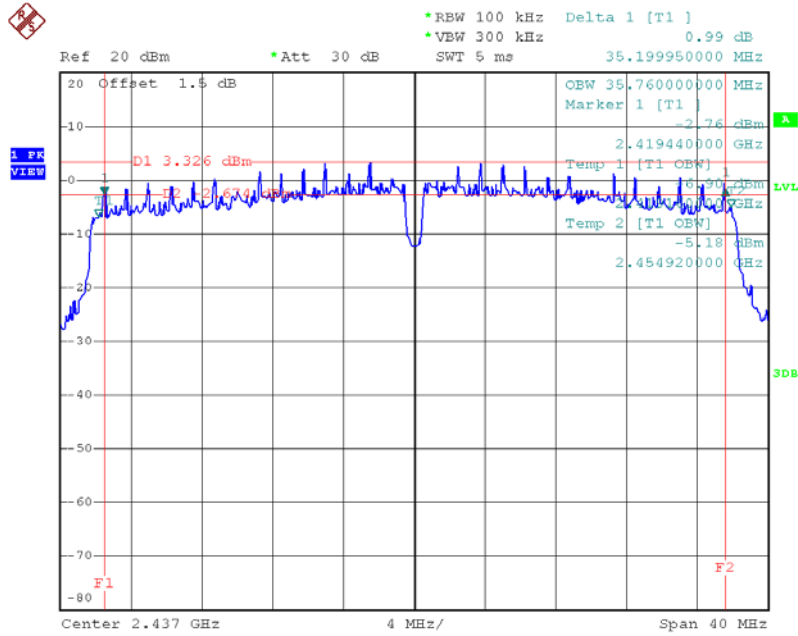

Date: 19.DEC.2018 18:34:30

TX CH09

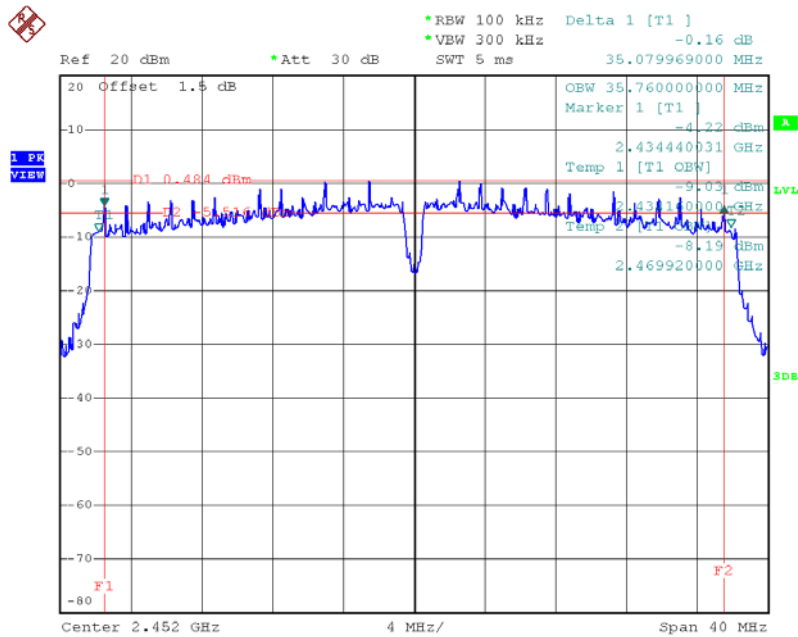

Date: 19.DEC.2018 18:36:55

APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode: TX B Mode_CH01/06/11					
Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	22.13	0.16	30.00	1.00	Complies
2437	24.32	0.27	30.00	1.00	Complies
2462	22.65	0.18	30.00	1.00	Complies

Test Mode: TX G Mode_CH01/06/11					
Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	23.52	0.22	30.00	1.00	Complies
2437	25.88	0.39	30.00	1.00	Complies
2462	24.51	0.28	30.00	1.00	Complies

Test Mode: TX N20 Mode_CH01/06/11_ANT 1					
Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	21.82	0.15	30.00	1.00	Complies
2437	25.57	0.36	30.00	1.00	Complies
2462	23.45	0.22	30.00	1.00	Complies

Test Mode: TX N20 Mode_CH01/06/11_ANT 2					
Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	22.03	0.16	30.00	1.00	Complies
2437	25.48	0.35	30.00	1.00	Complies
2462	23.81	0.24	30.00	1.00	Complies

Test Mode: TX N20 Mode_CH01/06/11_Total					
Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	24.94	0.31	30.00	1.00	Complies
2437	28.54	0.71	30.00	1.00	Complies
2462	26.64	0.46	30.00	1.00	Complies

Test Mode: TX N40 Mode_CH03/06/09_ANT 1					
Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	20.67	0.12	30.00	1.00	Complies
2437	23.59	0.23	30.00	1.00	Complies
2452	22.31	0.17	30.00	1.00	Complies


Test Mode: TX N40 Mode_CH03/06/09_ANT 2					
Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	20.44	0.11	30.00	1.00	Complies
2437	23.47	0.22	30.00	1.00	Complies
2452	22.18	0.17	30.00	1.00	Complies

Test Mode: TX N40 Mode_CH03/06/09_Total					
Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	23.57	0.23	30.00	1.00	Complies
2437	26.54	0.45	30.00	1.00	Complies
2452	25.26	0.34	30.00	1.00	Complies

APPENDIX G - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode: TX B Mode

TX B mode CH01

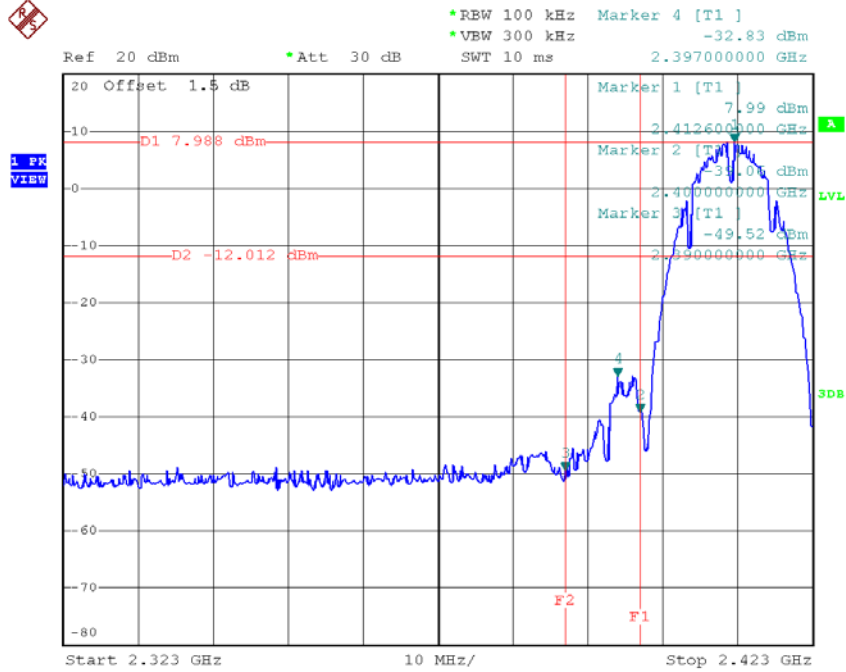


Date: 15.DEC.2018 11:45:19

TX B mode CH11

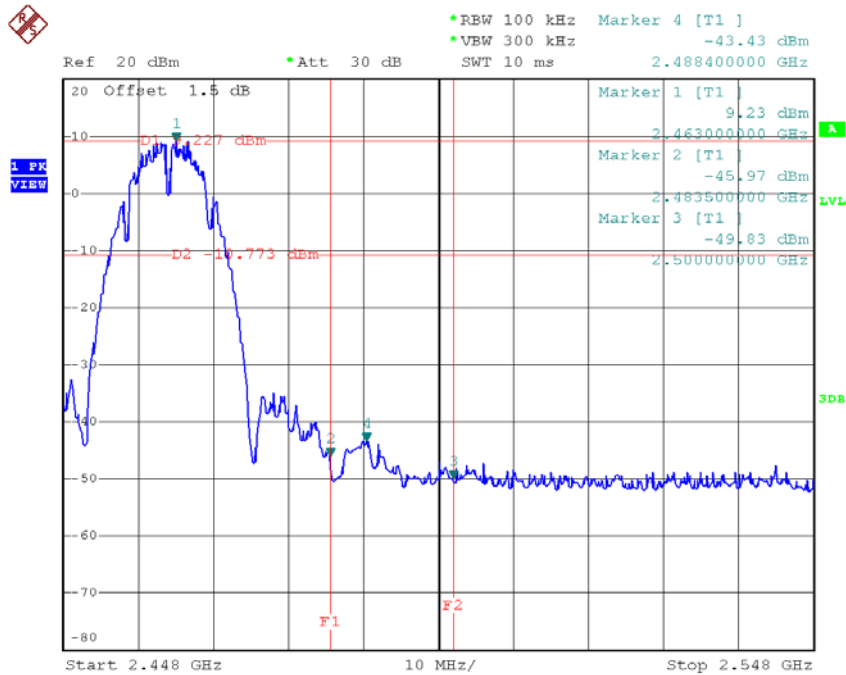


Date: 15.DEC.2018 11:49:21


TX B mode CH01 (10 Harmonic of the frequency)

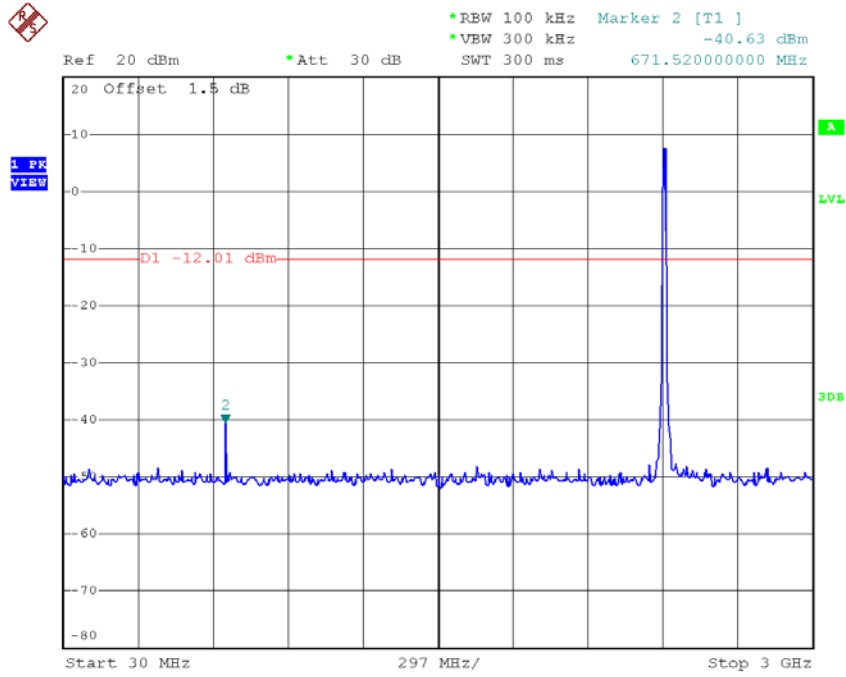

Date: 15.DEC.2018 11:45:33

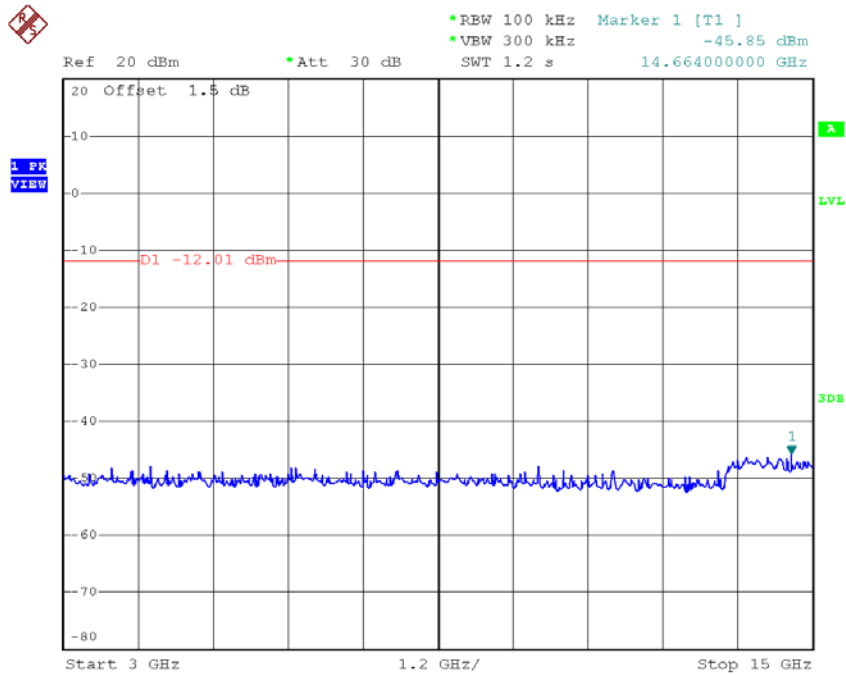


Date: 15.DEC.2018 11:45:41

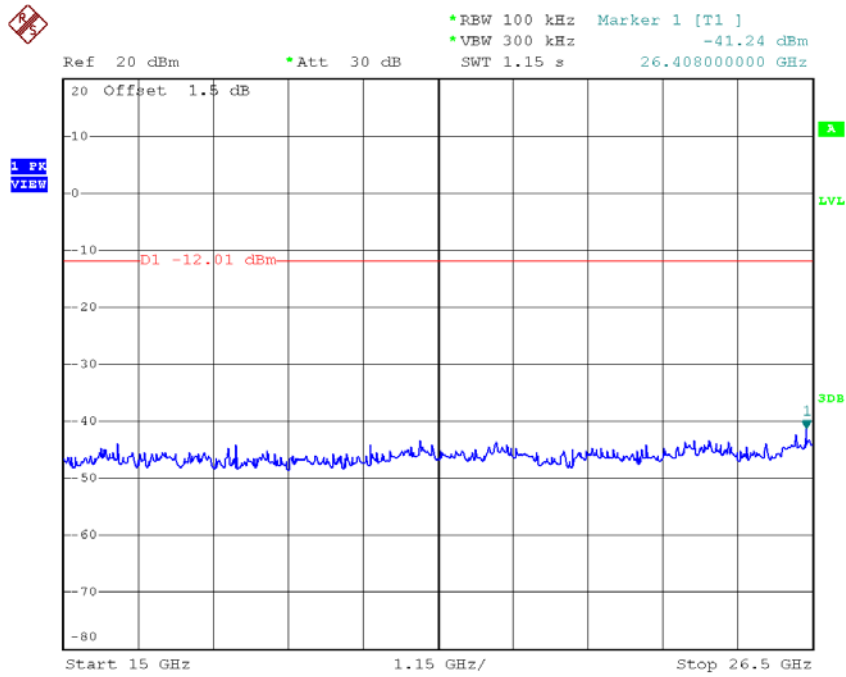


Date: 15.DEC.2018 11:45:50


TX B mode CH06 (10 Harmonic of the frequency)

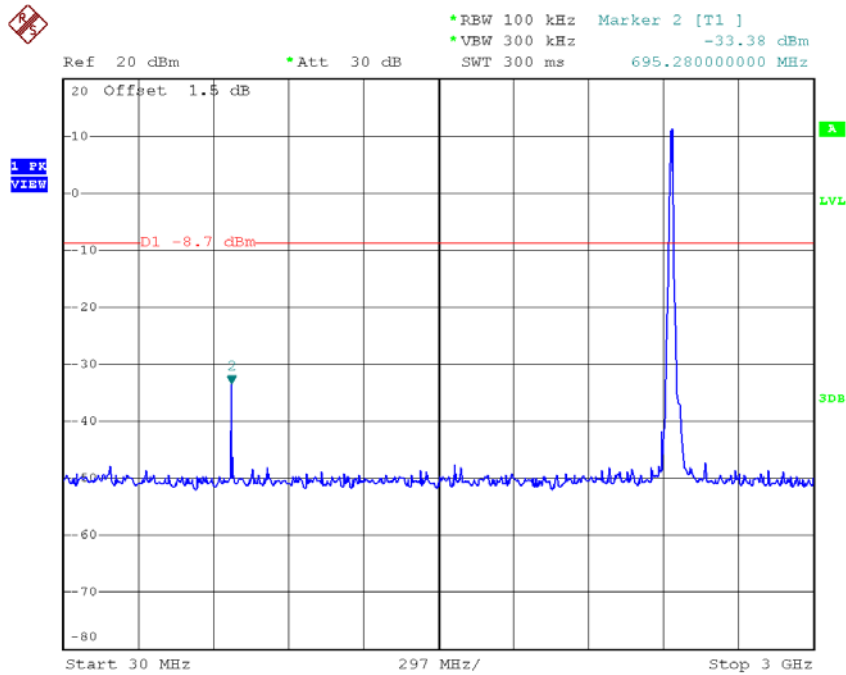

Date: 15.DEC.2018 11:47:45

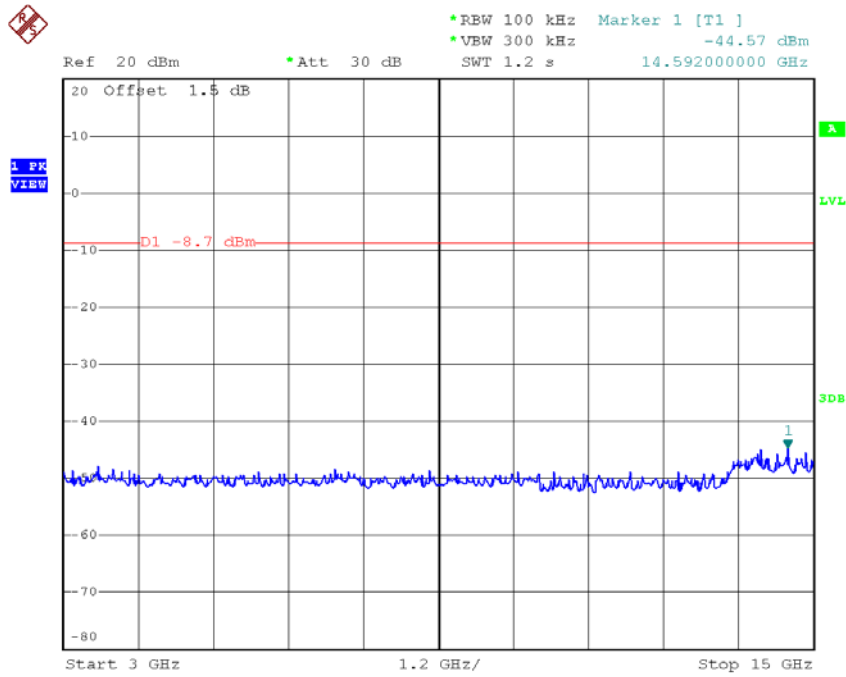


Date: 15.DEC.2018 11:47:54

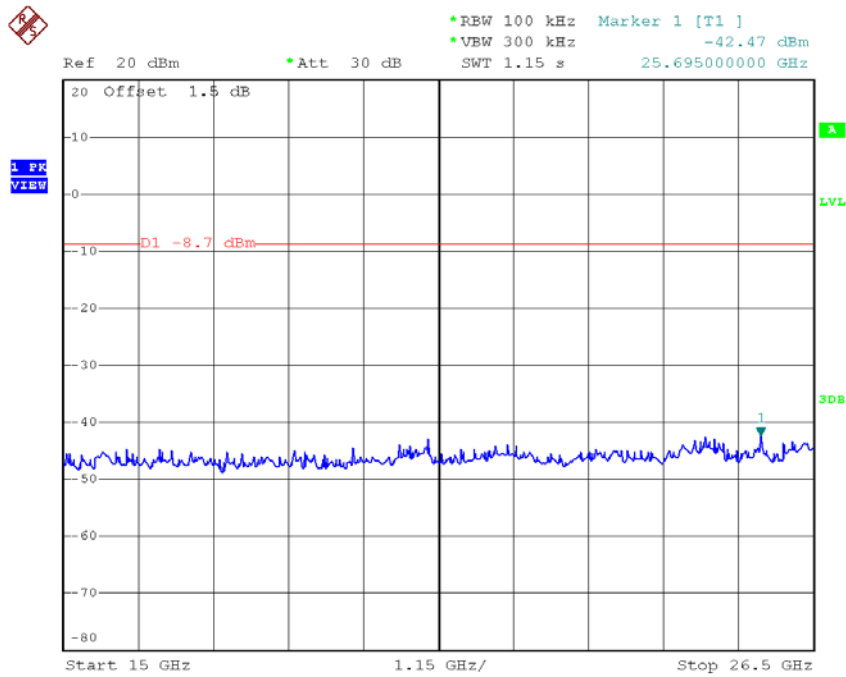


Date: 15.DEC.2018 11:48:02


TX B mode CH11 (10 Harmonic of the frequency)

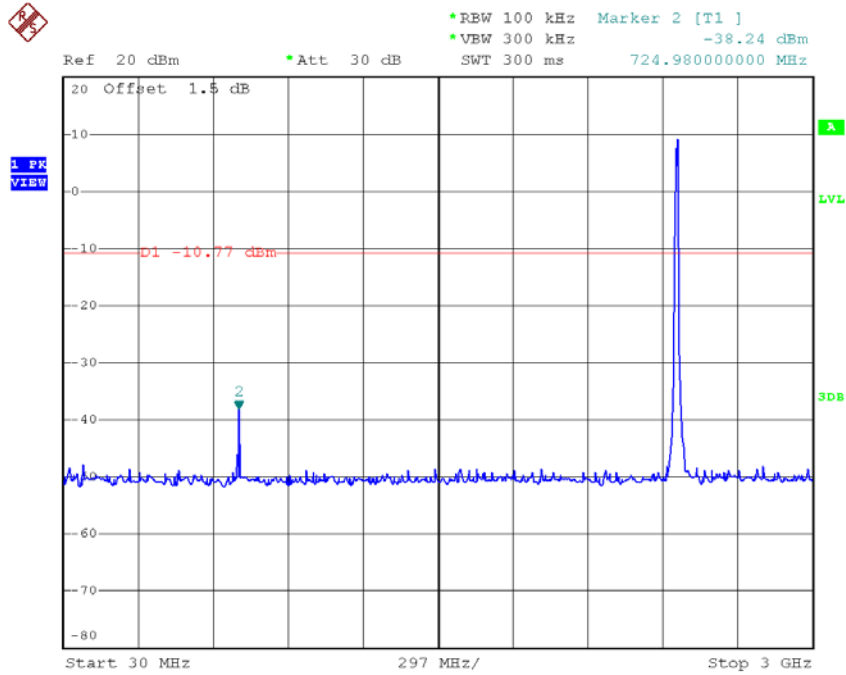

Date: 15.DEC.2018 11:49:35

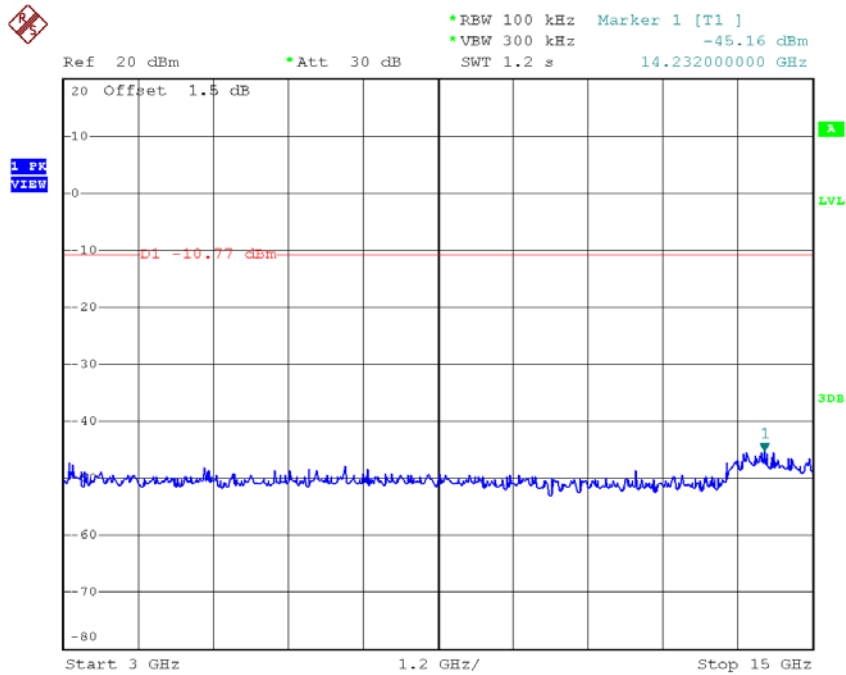


Date: 15.DEC.2018 11:49:43

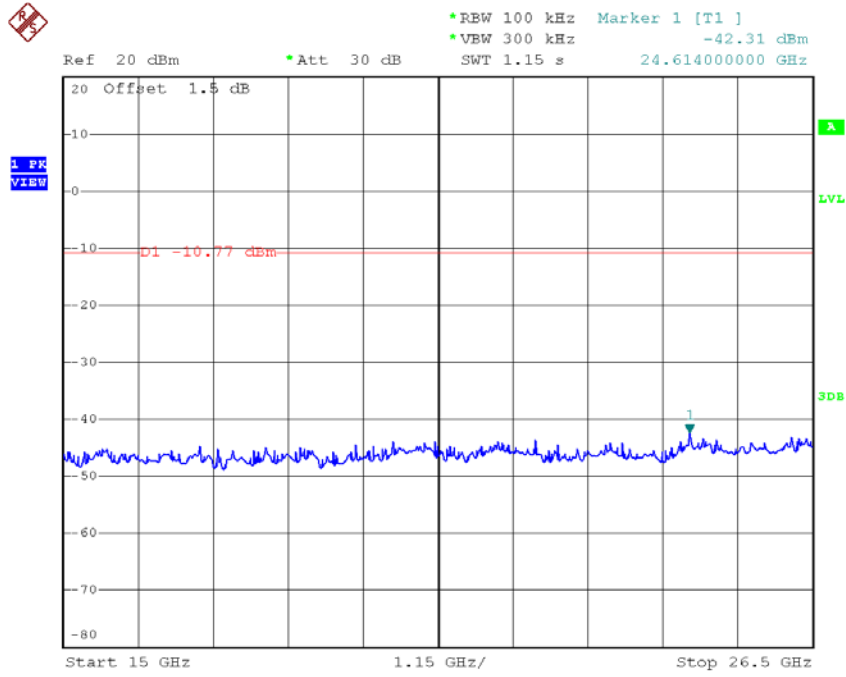

Date: 15.DEC.2018 11:49:52


Test Mode: TX G Mode

TX G mode CH01

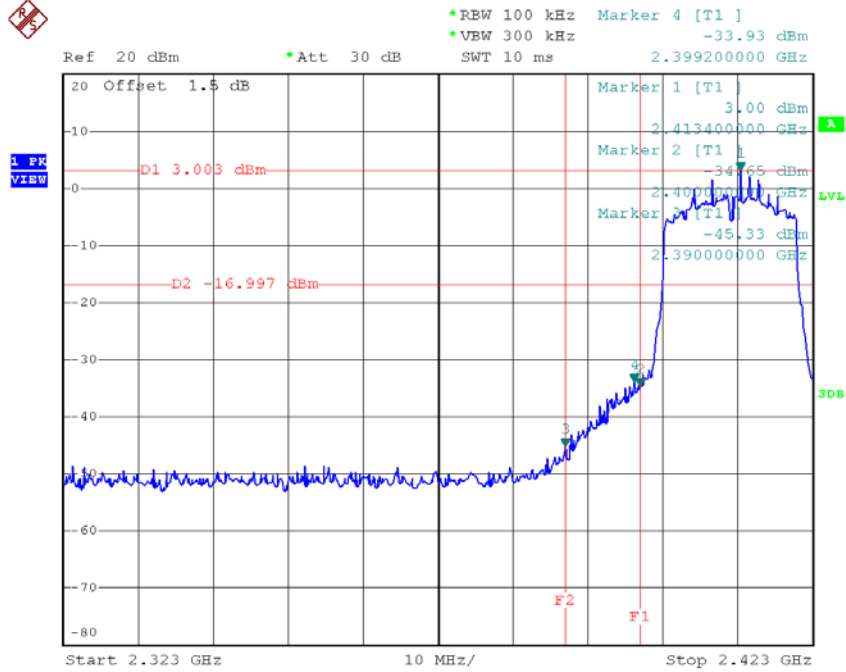


Date: 15.DEC.2018 11:51:31

TX G mode CH11

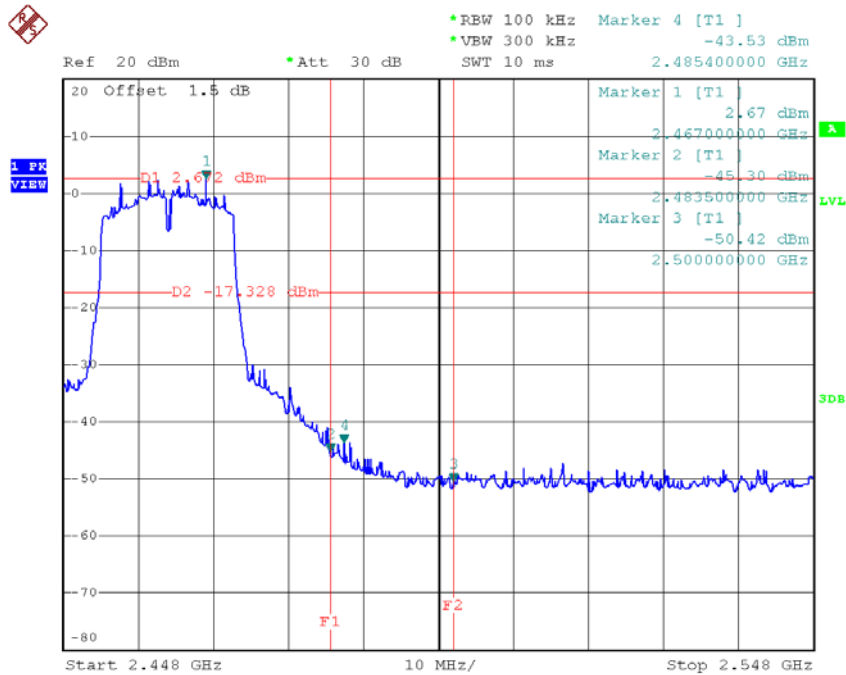


Date: 15.DEC.2018 11:55:38


TX G mode CH01 (10 Harmonic of the frequency)

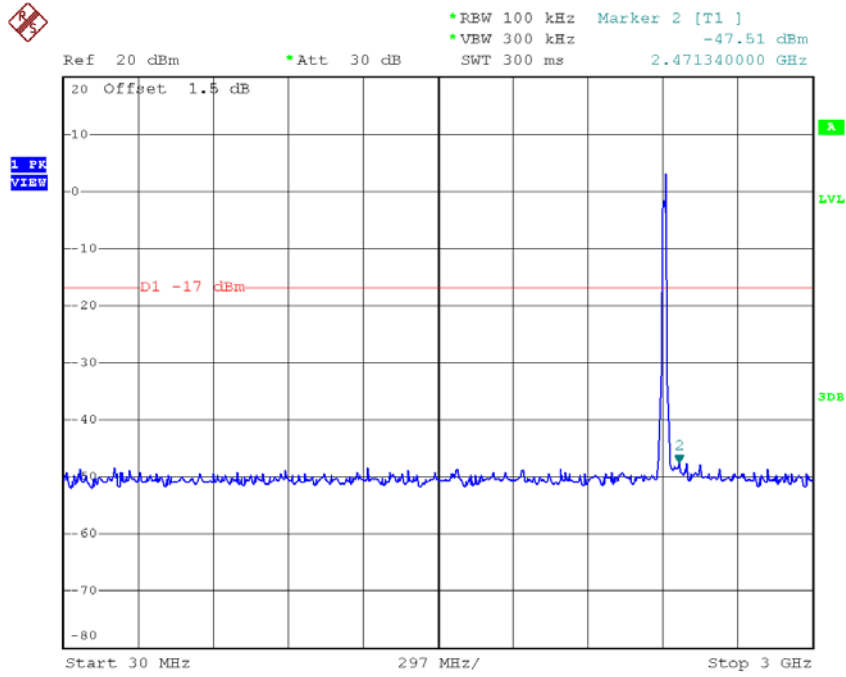

Date: 15.DEC.2018 11:51:45

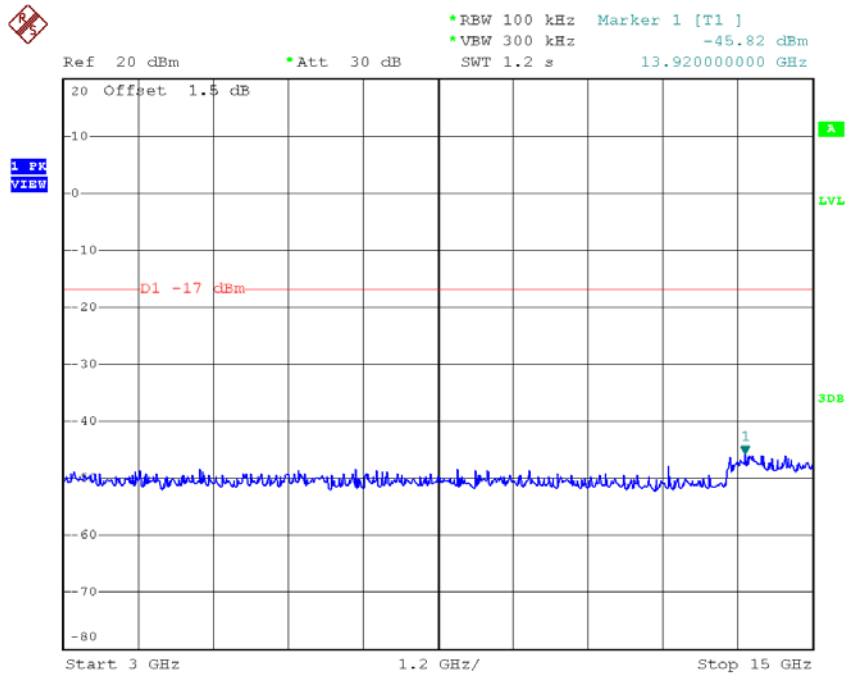


Date: 15.DEC.2018 11:51:53

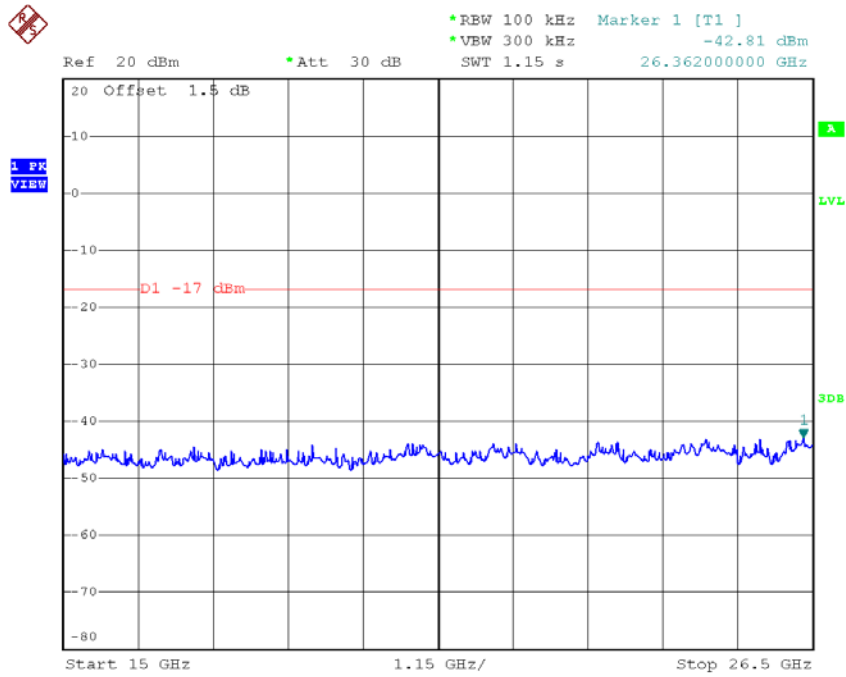


Date: 15.DEC.2018 11:52:02


TX G mode CH06 (10 Harmonic of the frequency)

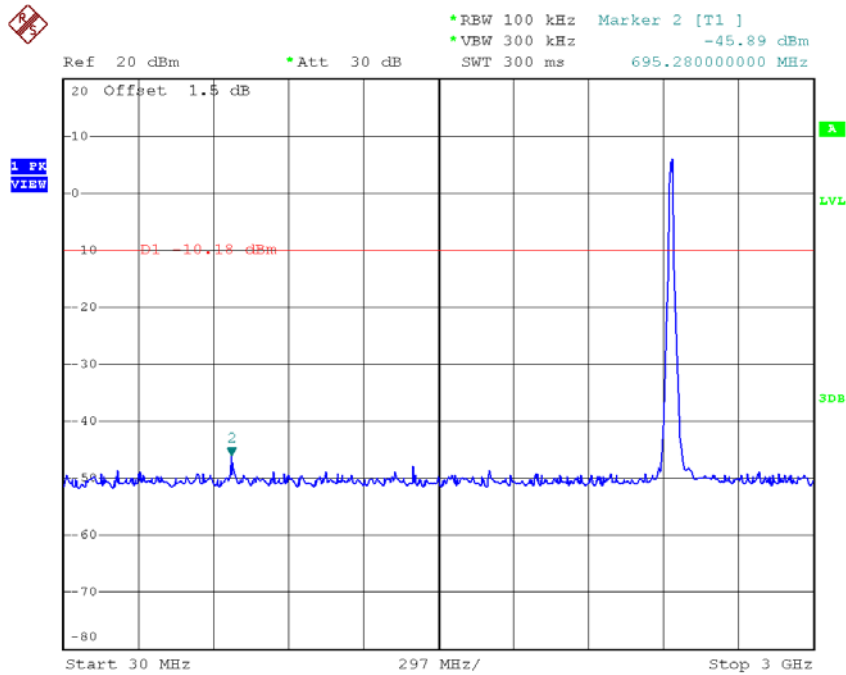

Date: 15.DEC.2018 11:53:25

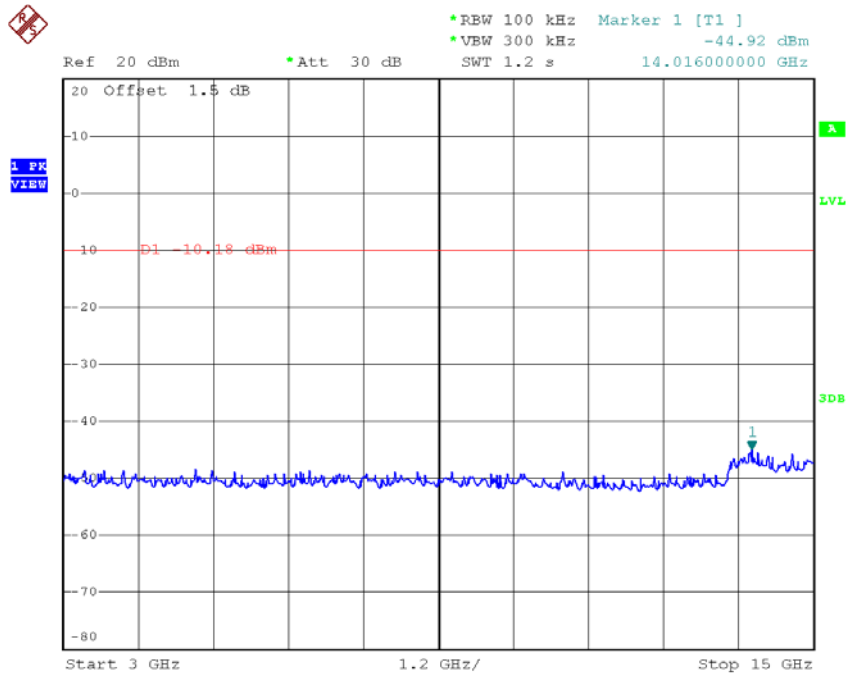


Date: 15.DEC.2018 11:53:33

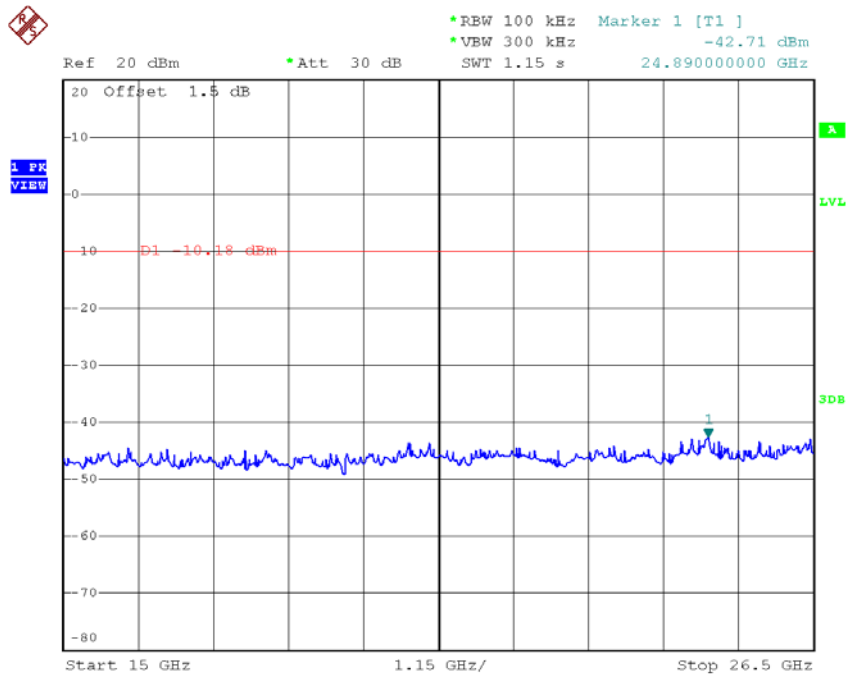


Date: 15.DEC.2018 11:53:42


TX G mode CH11 (10 Harmonic of the frequency)

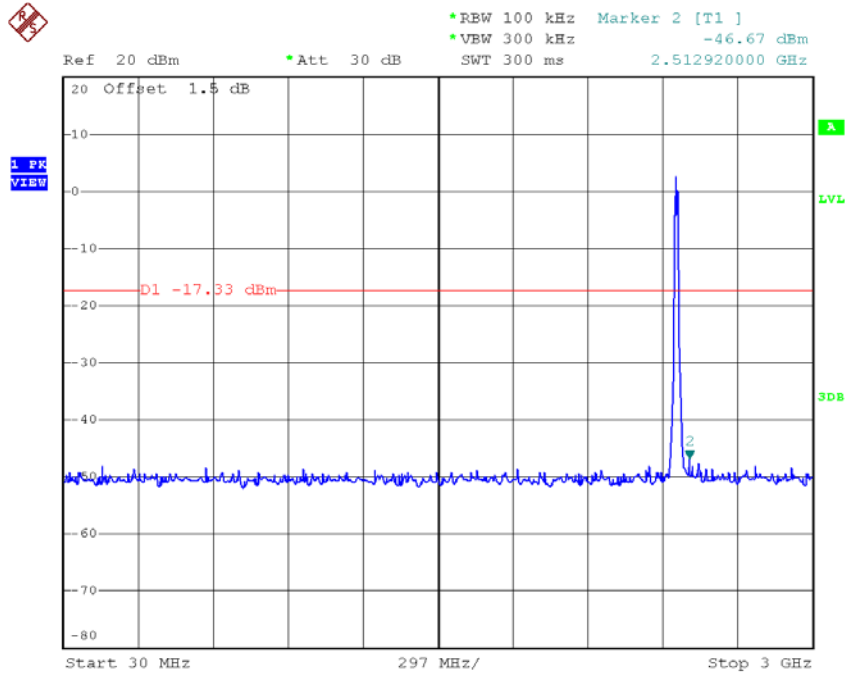

Date: 15.DEC.2018 11:55:52

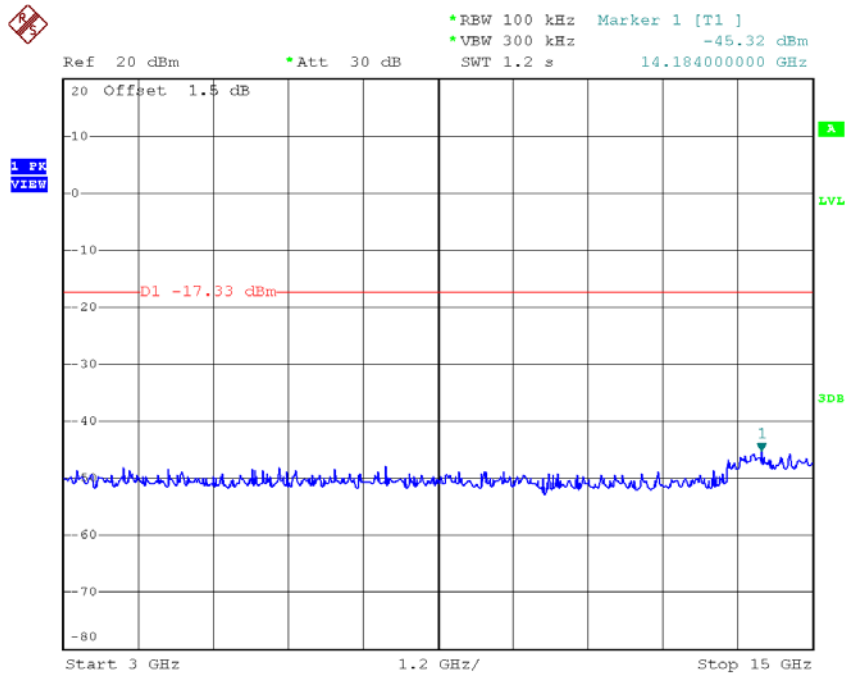


Date: 15.DEC.2018 11:56:01

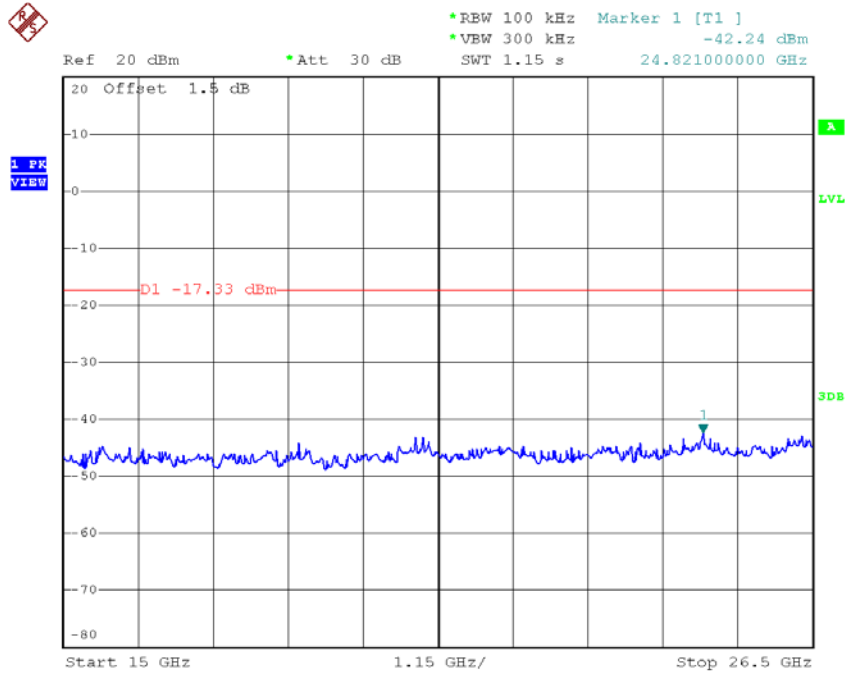

Date: 15.DEC.2018 11:56:09


Test Mode: TX N-20M Mode_ANT 1

TX HT20 mode CH01

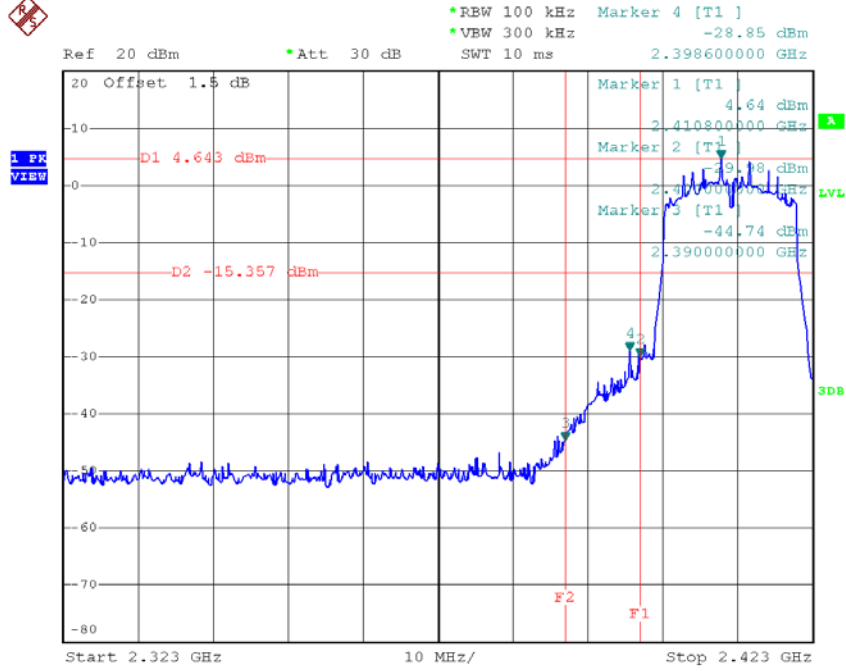

Date: 15.DEC.2018 18:09:44

TX HT20 mode CH11

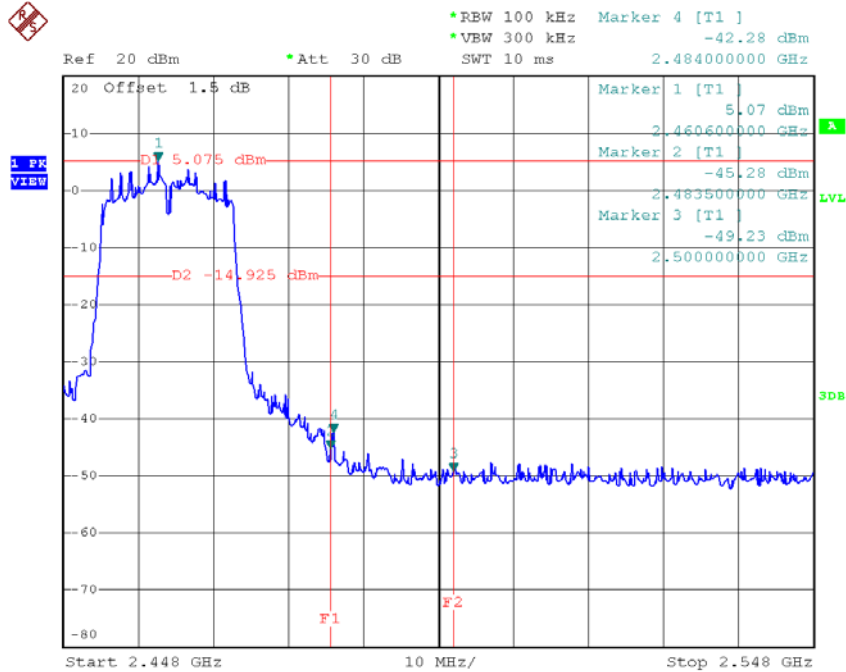

Date: 15.DEC.2018 18:13:11