





Appendix A

RF Test Data for BT (Conducted Measurement)

Product Name: INTEGRATED AMPLIFIER

Test Model: 6000A PLAY

Environmental Conditions

Temperature:	23.5°C
Relative Humidity:	52.2%
ATM Pressure:	100.0 kPa
Test Engineer:	 Bill Zhu
Supervised by:	 Li Huan





A.1 -20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.97	0	Pass
NVNT	1-DH5	2441	Ant1	1.034	0	Pass
NVNT	1-DH5	2480	Ant1	0.958	0	Pass
NVNT	2-DH5	2402	Ant1	1.282	0	Pass
NVNT	2-DH5	2441	Ant1	1.309	0	Pass
NVNT	2-DH5	2480	Ant1	1.302	0	Pass
NVNT	3-DH5	2402	Ant1	1.311	0	Pass
NVNT	3-DH5	2441	Ant1	1.3	0	Pass
NVNT	3-DH5	2480	Ant1	1.28	0	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen
 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity



Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1

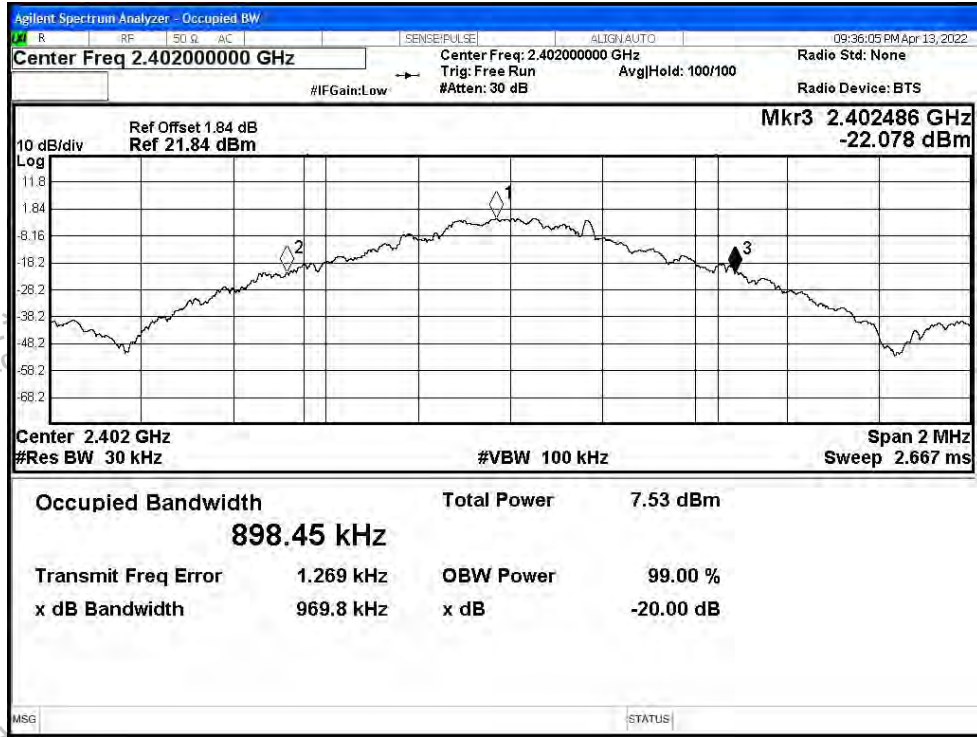

-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1






-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1




-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

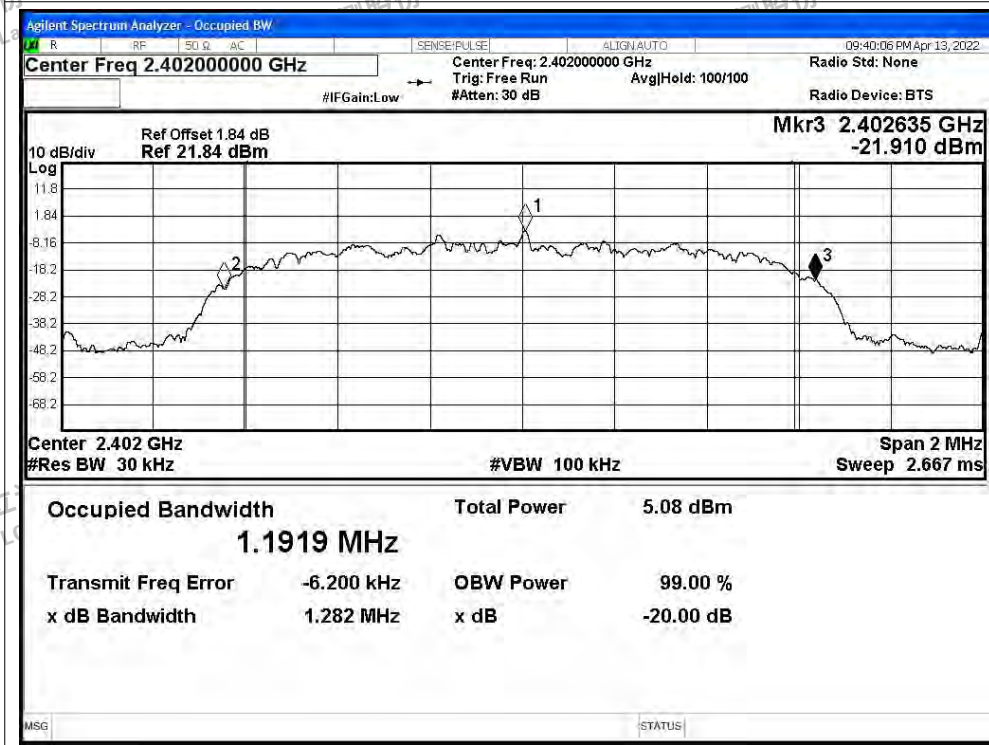




-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

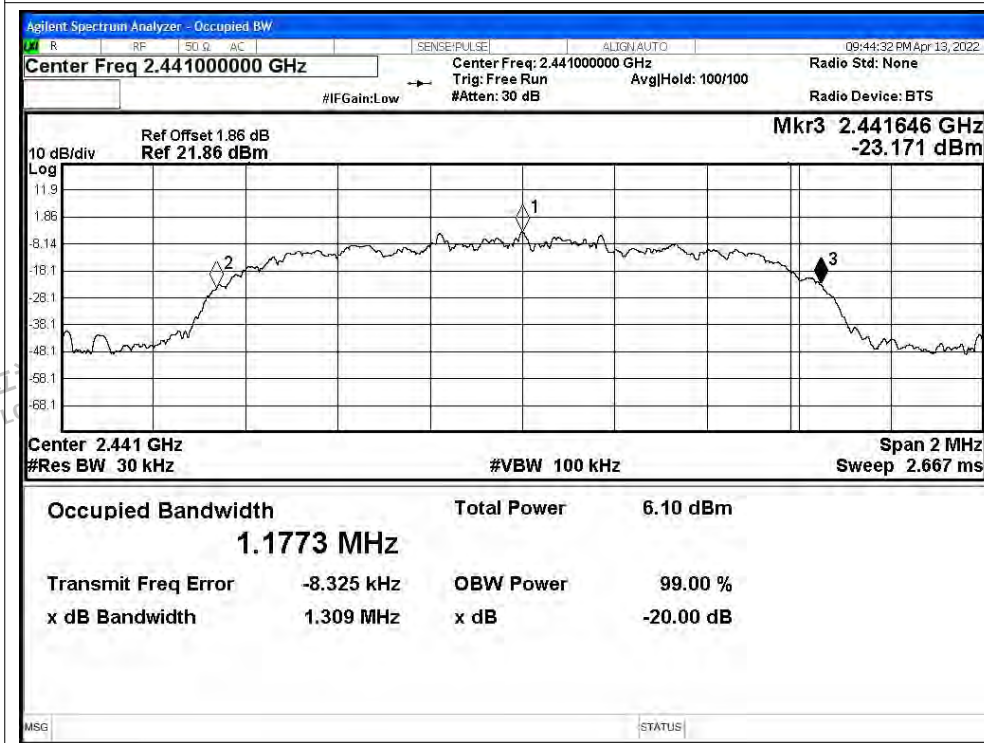

-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

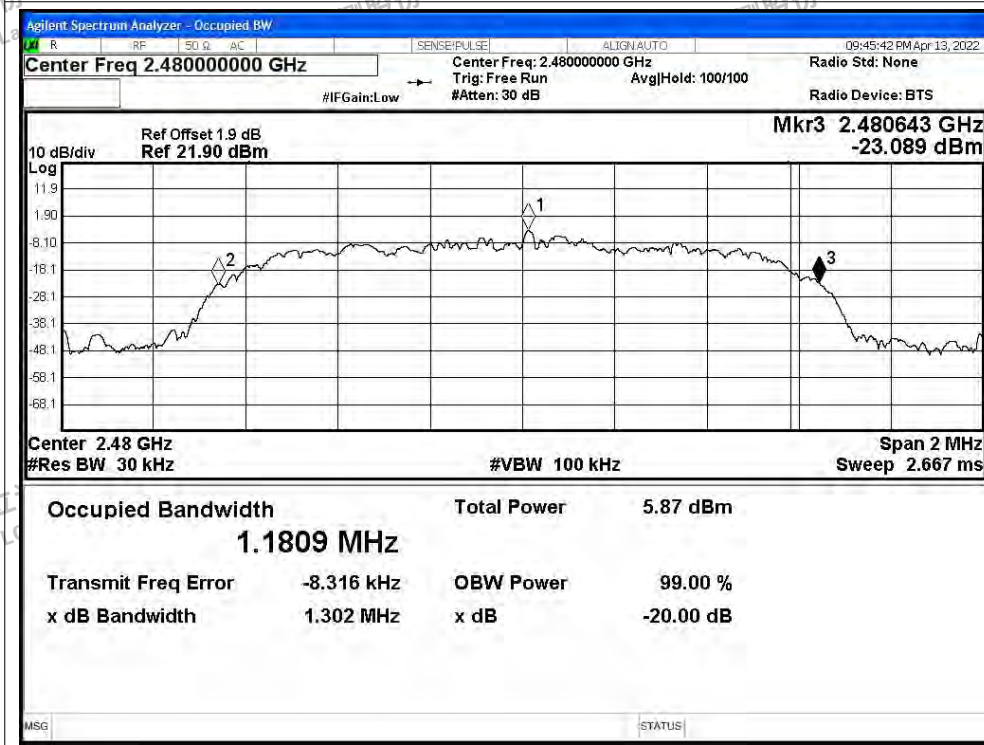




-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1




-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

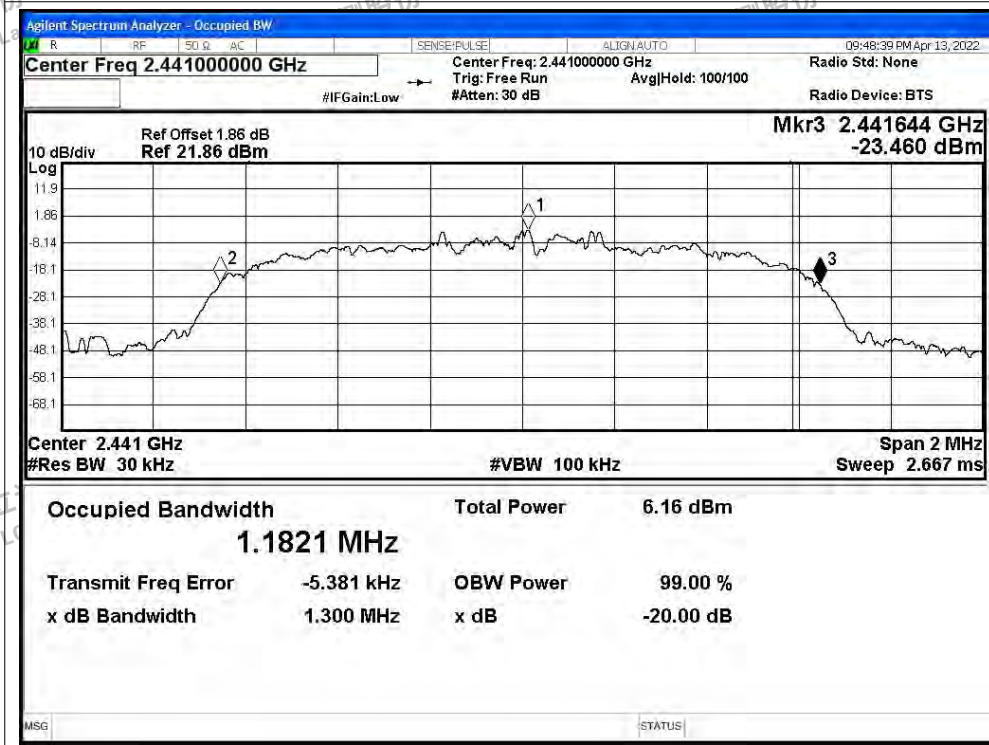



-20dB Bandwidth NVNT 3-DH5 2480MHz Ant1

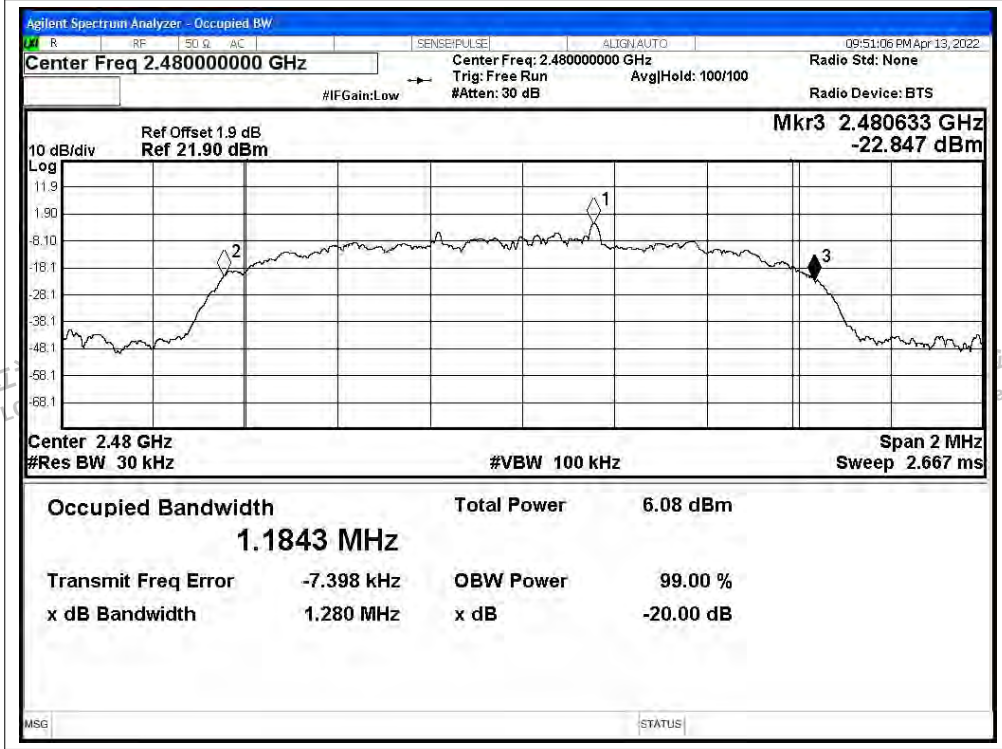



A.2 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH5	2402	Ant1	0.912
NVNT	1-DH5	2441	Ant1	0.911
NVNT	1-DH5	2480	Ant1	0.896
NVNT	2-DH5	2402	Ant1	1.181
NVNT	2-DH5	2441	Ant1	1.181
NVNT	2-DH5	2480	Ant1	1.172
NVNT	3-DH5	2402	Ant1	1.191
NVNT	3-DH5	2441	Ant1	1.187
NVNT	3-DH5	2480	Ant1	1.184




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen
 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

OBW NVNT 1-DH5 2402MHz Ant1

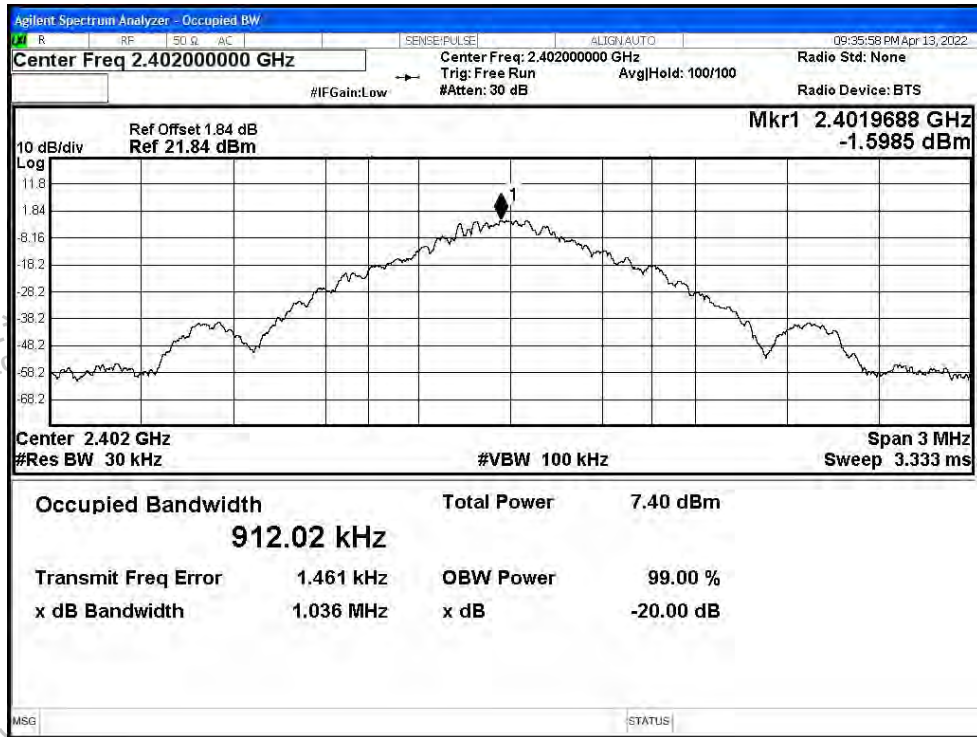

OBW NVNT 1-DH5 2441MHz Ant1

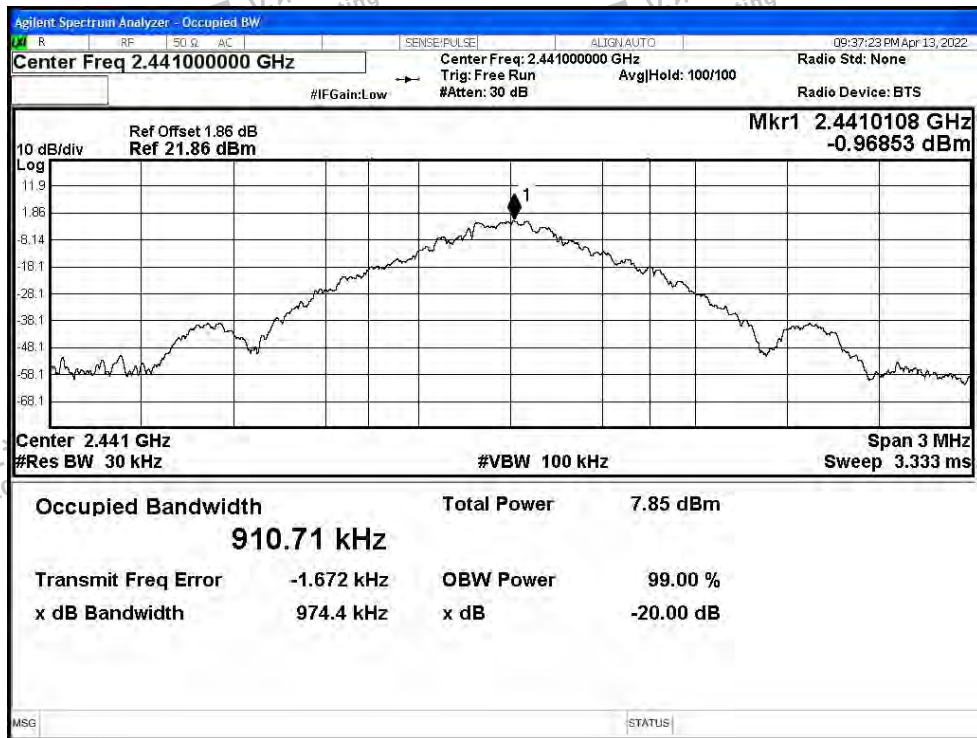




OBW NVNT 1-DH5 2480MHz Ant1




OBW NVNT 2-DH5 2402MHz Ant1

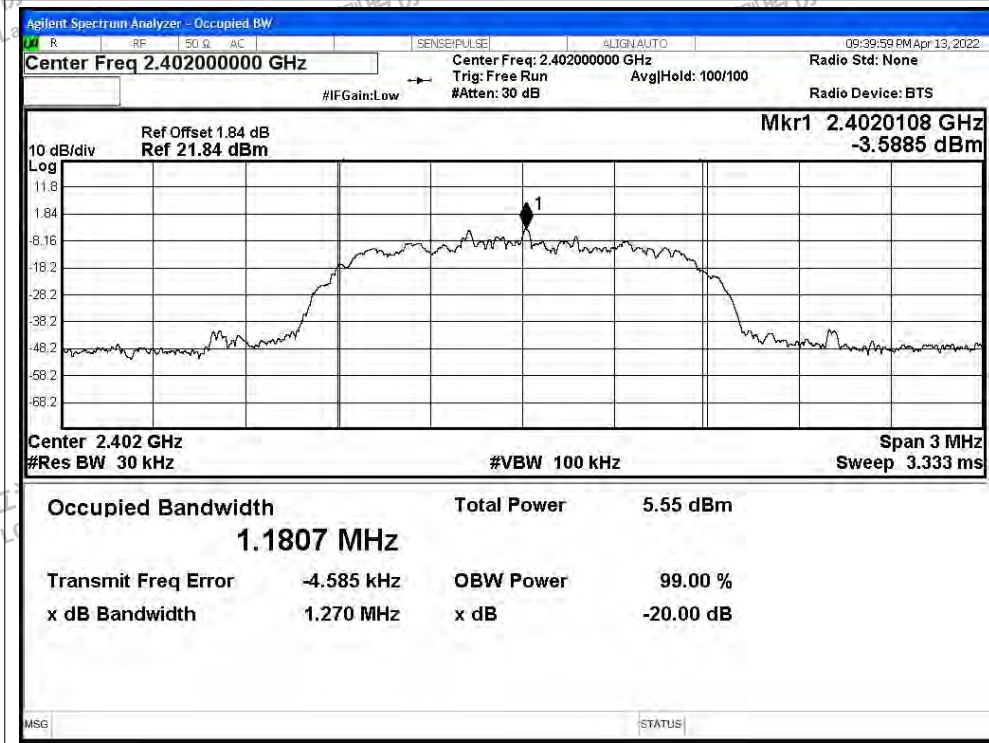




OBW NVNT 2-DH5 2441MHz Ant1

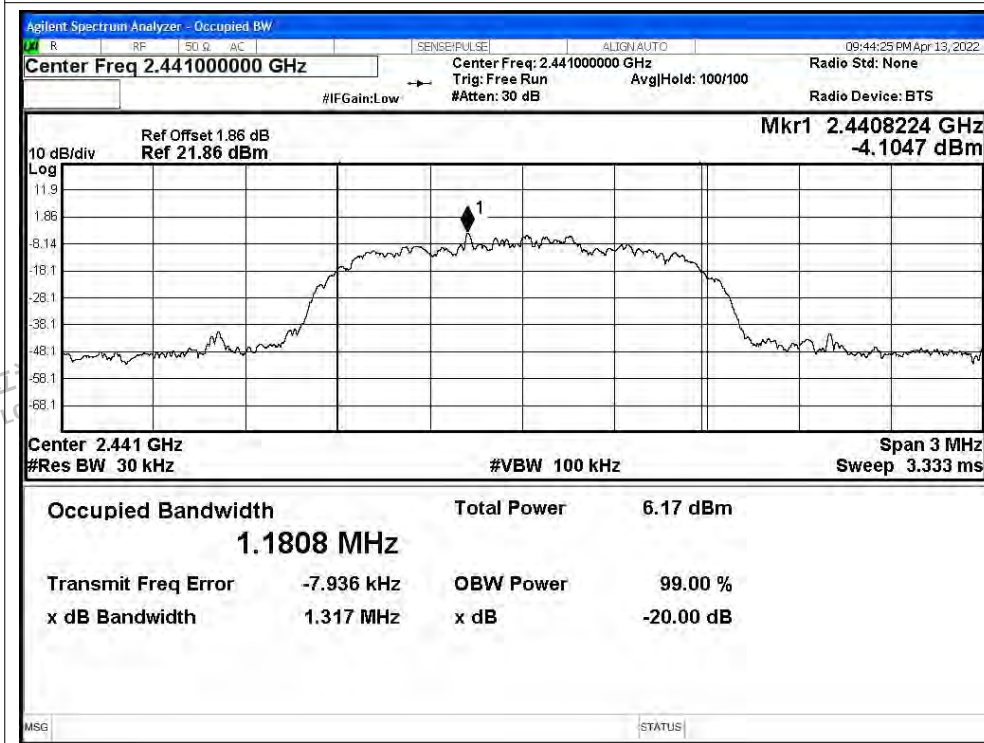


OBW NVNT 2-DH5 2480MHz Ant1

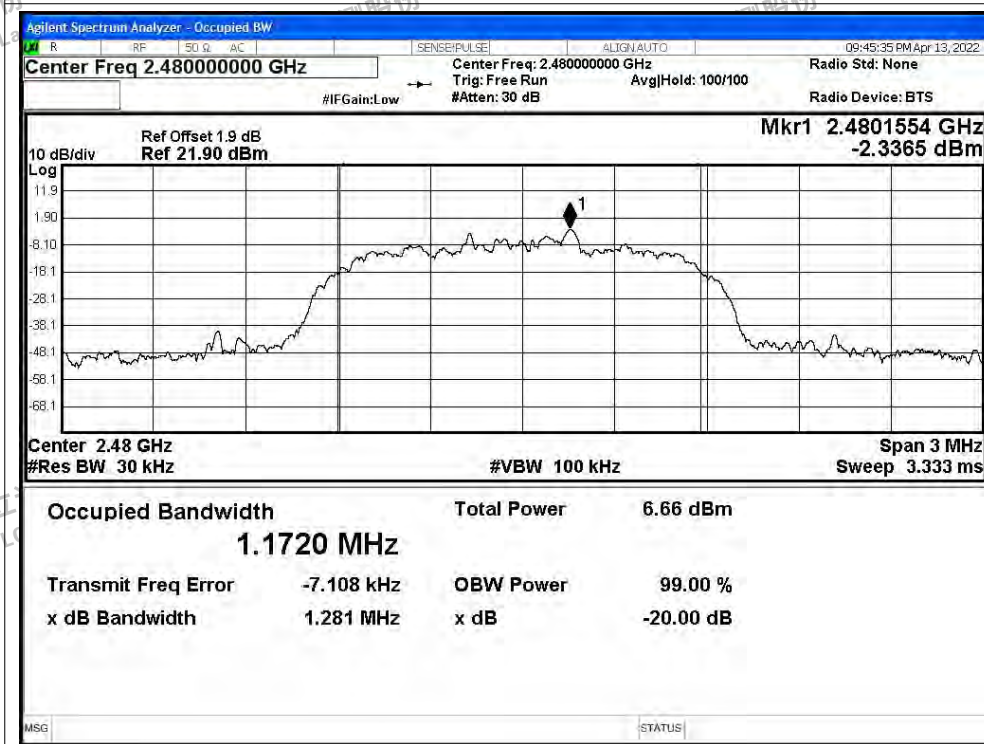




OBW NVNT 3-DH5 2402MHz Ant1

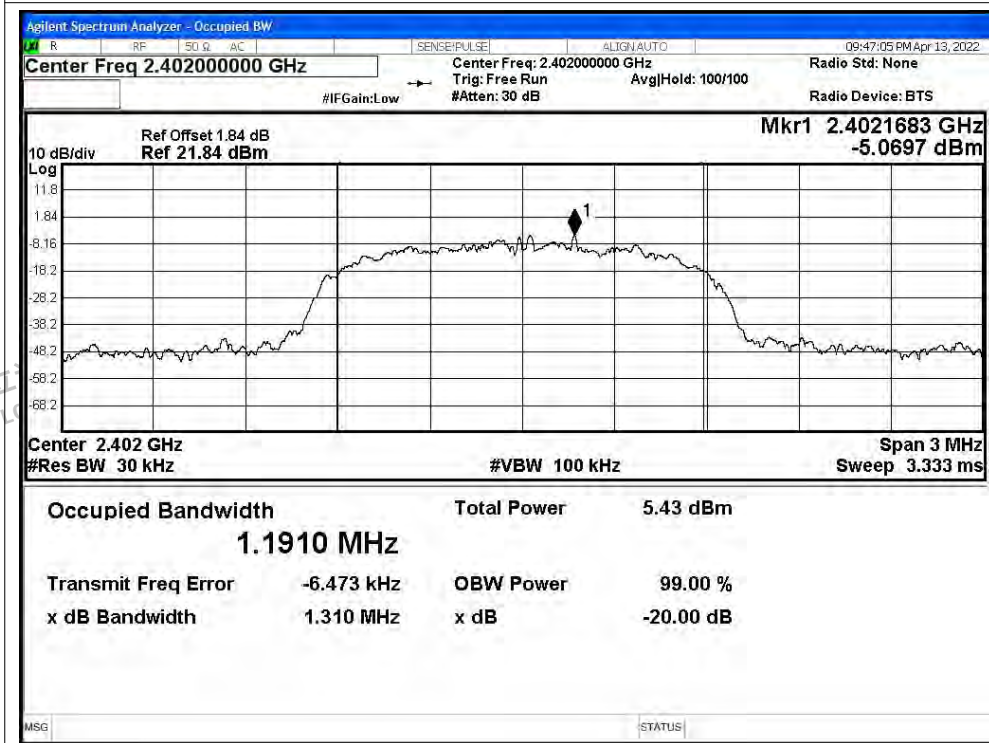

OBW NVNT 3-DH5 2441MHz Ant1

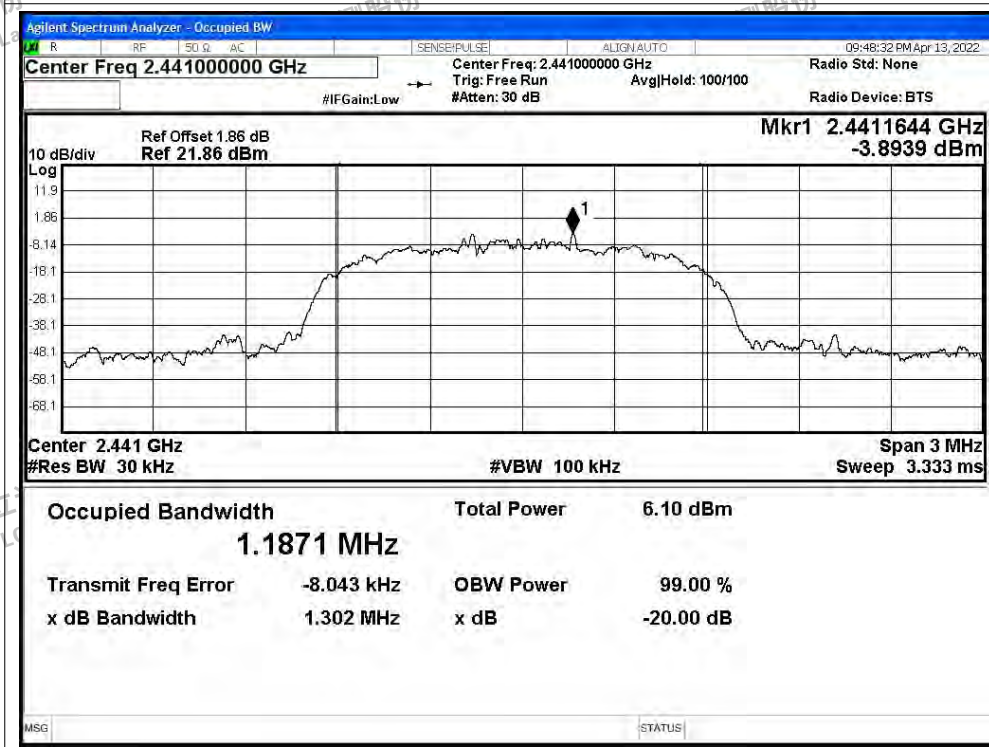

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



OBW NVNT 3-DH5 2480MHz Ant1





A.3 Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	1.25	0	1.25	21	Pass
NVNT	1-DH5	2441	Ant1	1.79	0	1.79	21	Pass
NVNT	1-DH5	2480	Ant1	1.76	0	1.76	21	Pass
NVNT	2-DH5	2402	Ant1	1.02	0	1.02	21	Pass
NVNT	2-DH5	2441	Ant1	1.56	0	1.56	21	Pass
NVNT	2-DH5	2480	Ant1	1.53	0	1.53	21	Pass
NVNT	3-DH5	2402	Ant1	1.05	0	1.05	21	Pass
NVNT	3-DH5	2441	Ant1	1.61	0	1.61	21	Pass
NVNT	3-DH5	2480	Ant1	1.56	0	1.56	21	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen
 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

Power NVNT 1-DH5 2402MHz Ant1

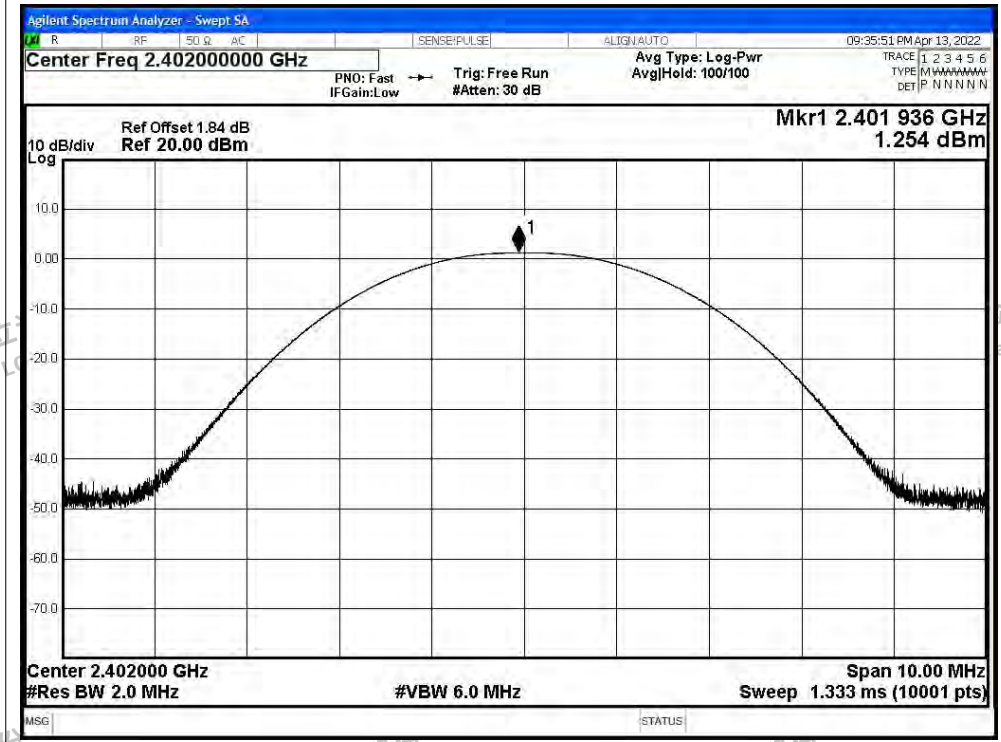


Power NVNT 1-DH5 2441MHz Ant1

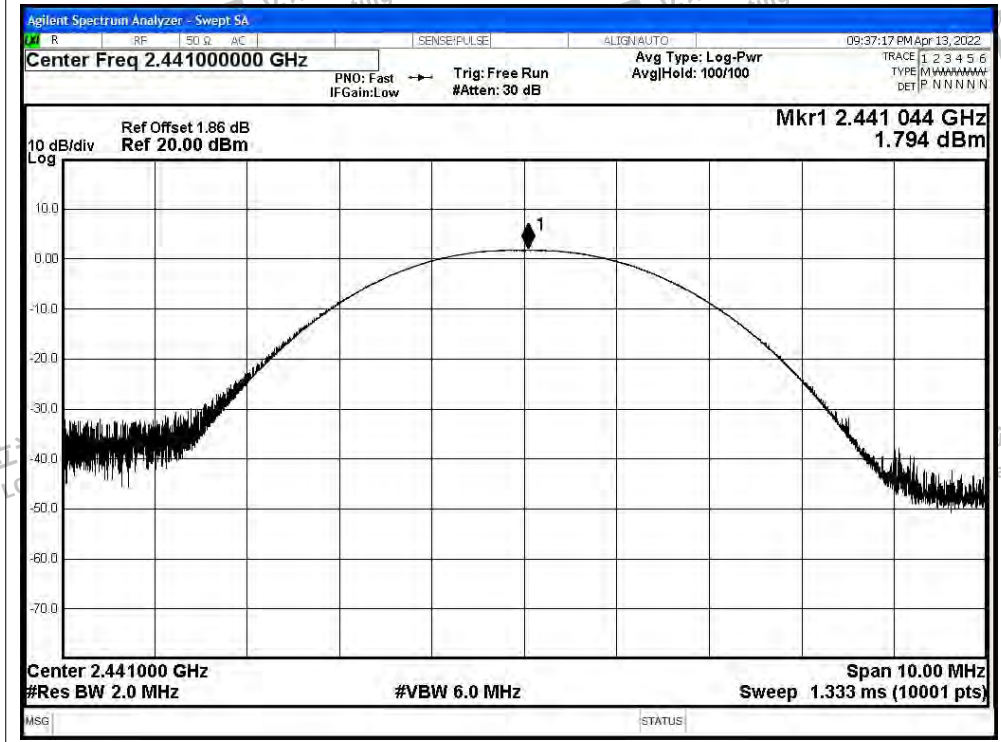




Power NVNT 1-DH5 2480MHz Ant1

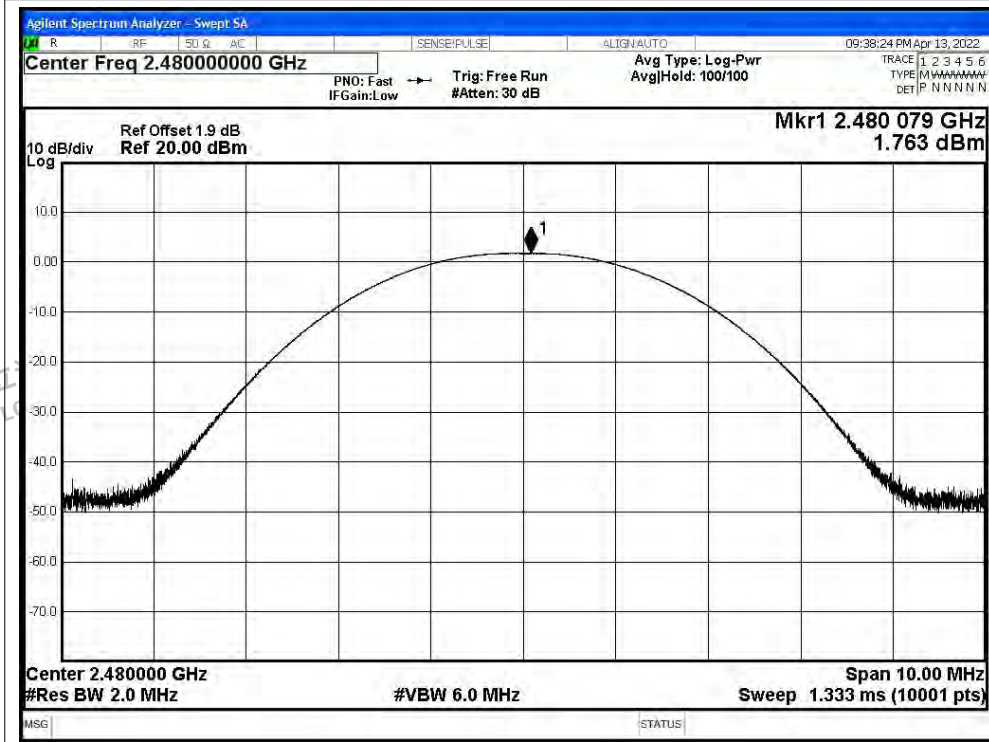


Power NVNT 2-DH5 2402MHz Ant1

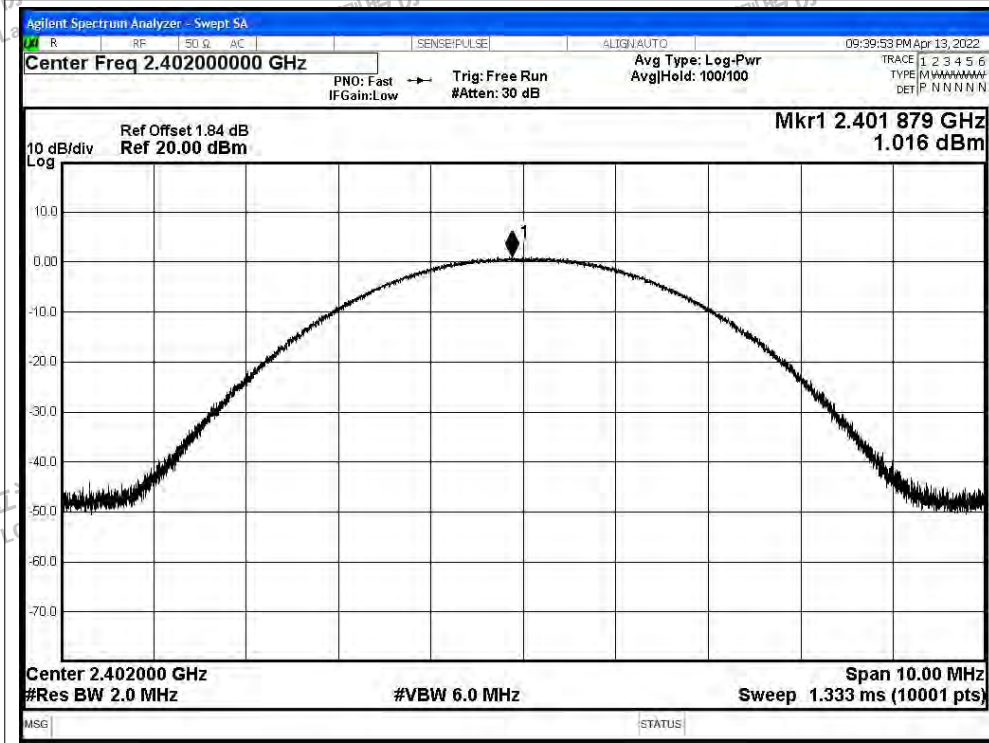




Power NVNT 2-DH5 2441MHz Ant1

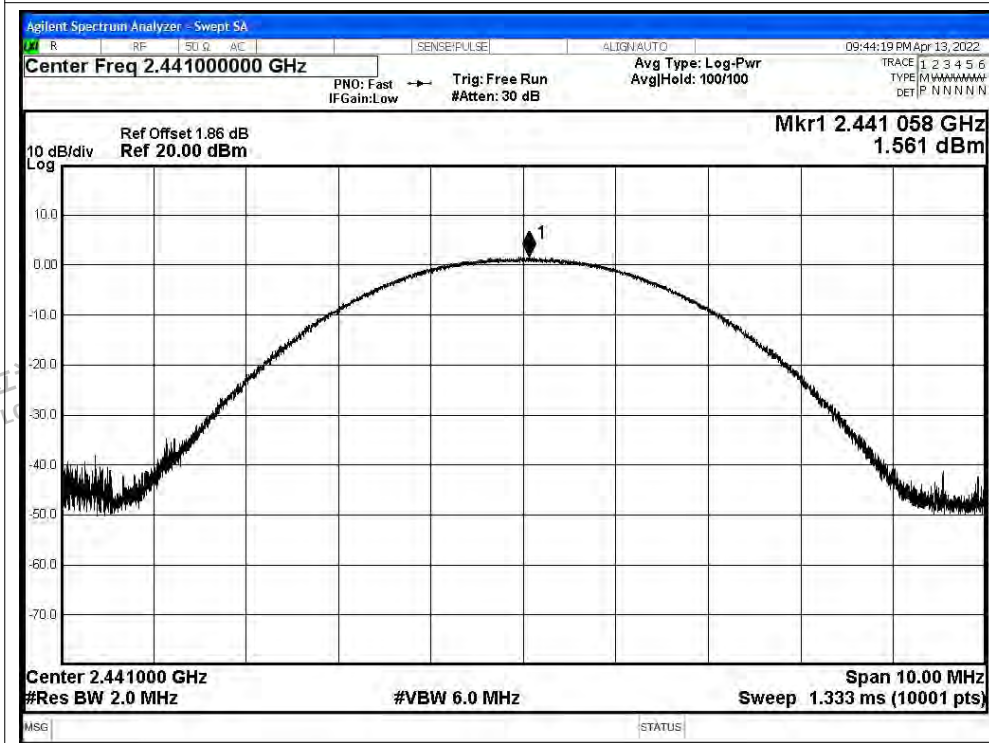


Power NVNT 2-DH5 2480MHz Ant1

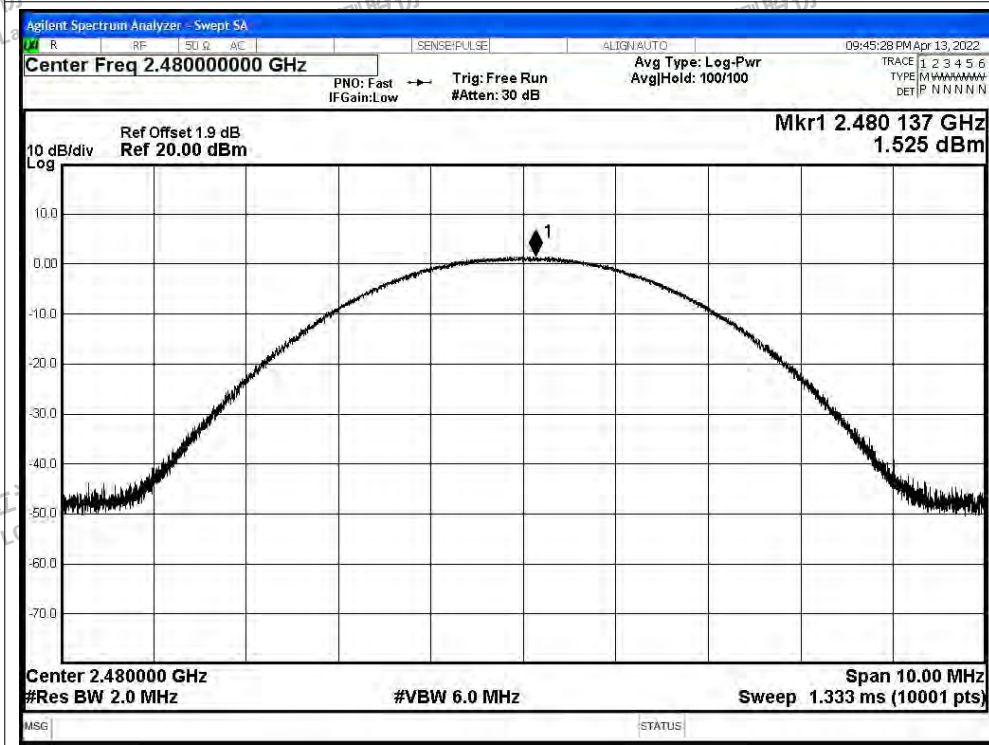





Power NVNT 3-DH5 2402MHz Ant1

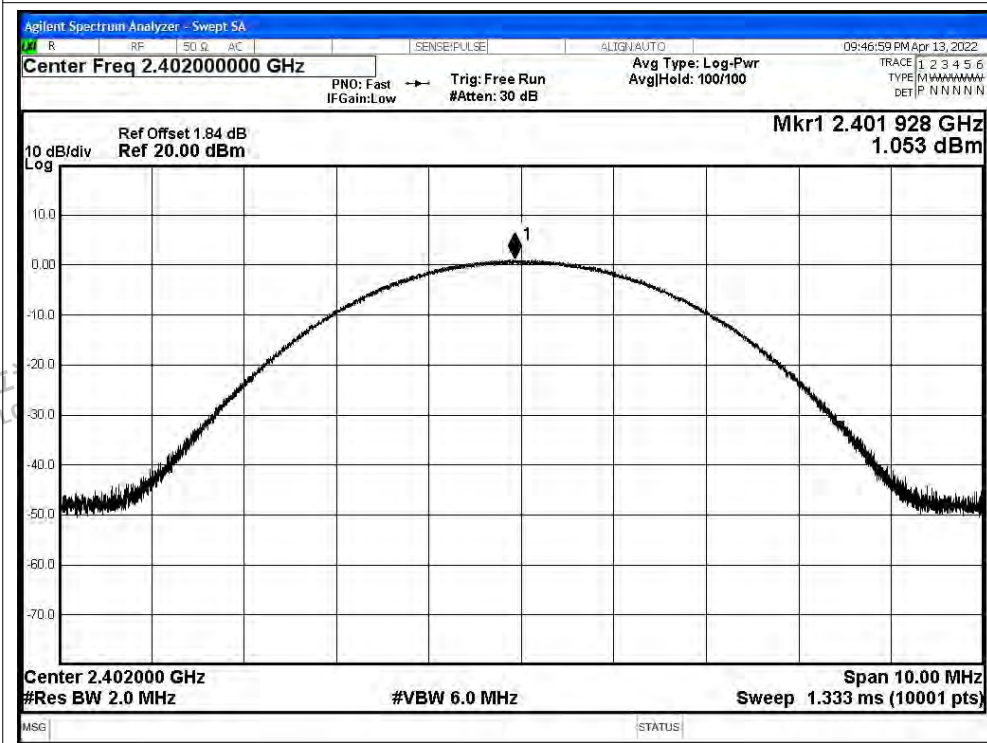

Power NVNT 3-DH5 2441MHz Ant1

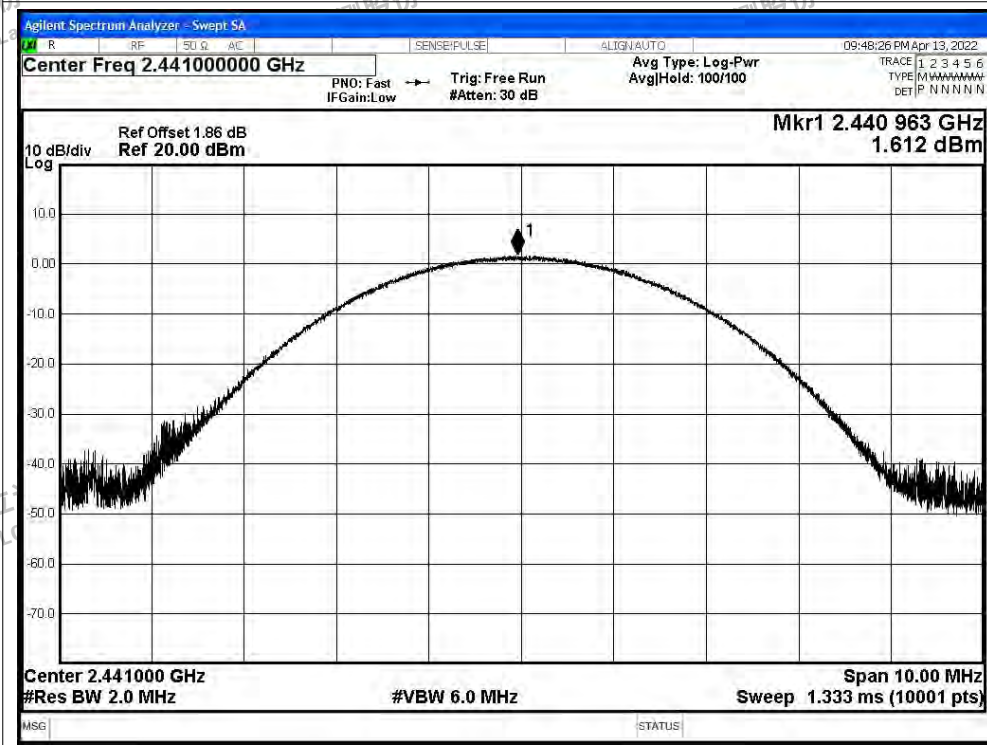

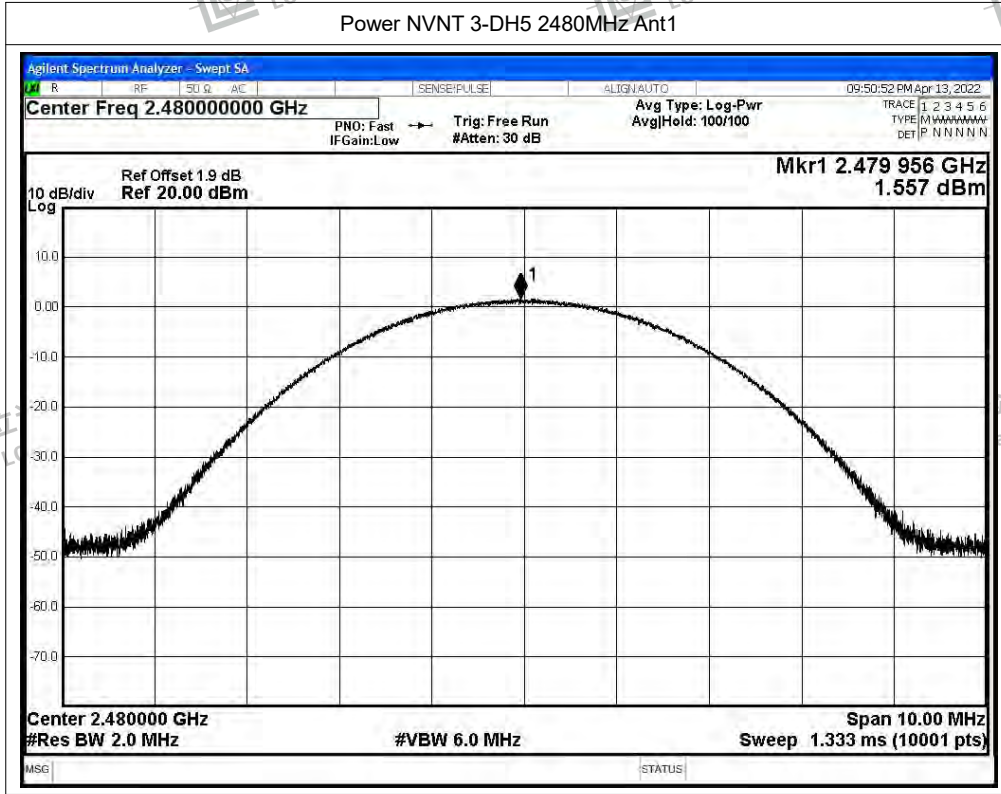



A.4 Carrier Frequencies Separation

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2401.962	2402.97	1.008	0.647	Pass
NVNT	2-DH5	Ant1	2401.986	2402.996	1.01	0.855	Pass
NVNT	3-DH5	Ant1	2401.914	2402.992	1.078	0.874	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen
 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity





Test Graphs

CFS NVNT 1-DH5 2402MHz Ant1

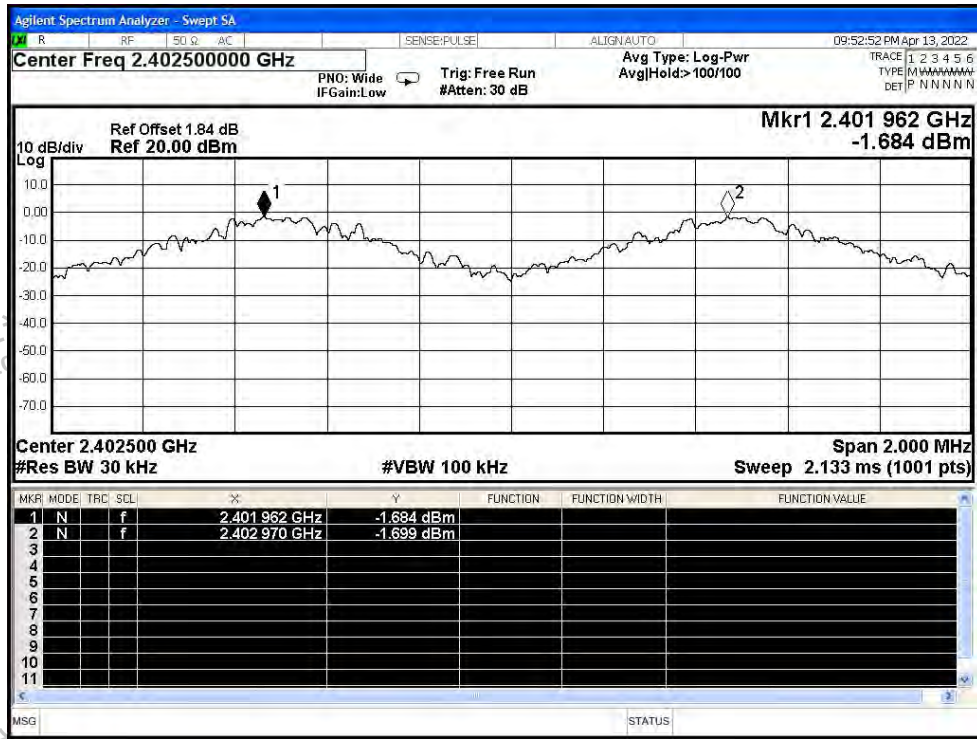

CFS NVNT 2-DH5 2402MHz Ant1

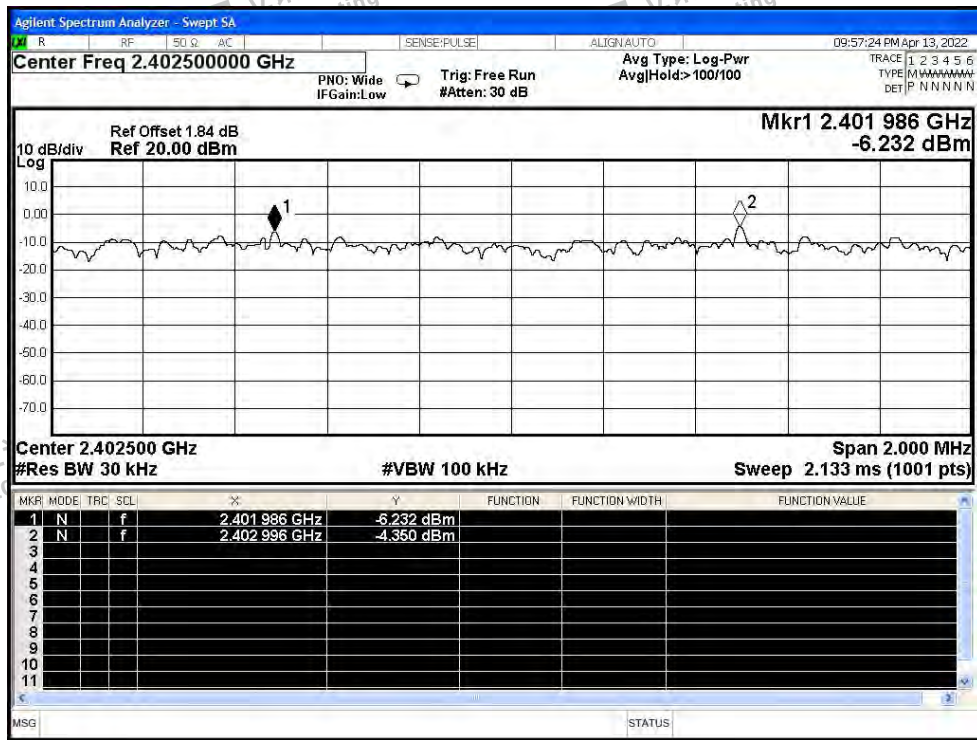

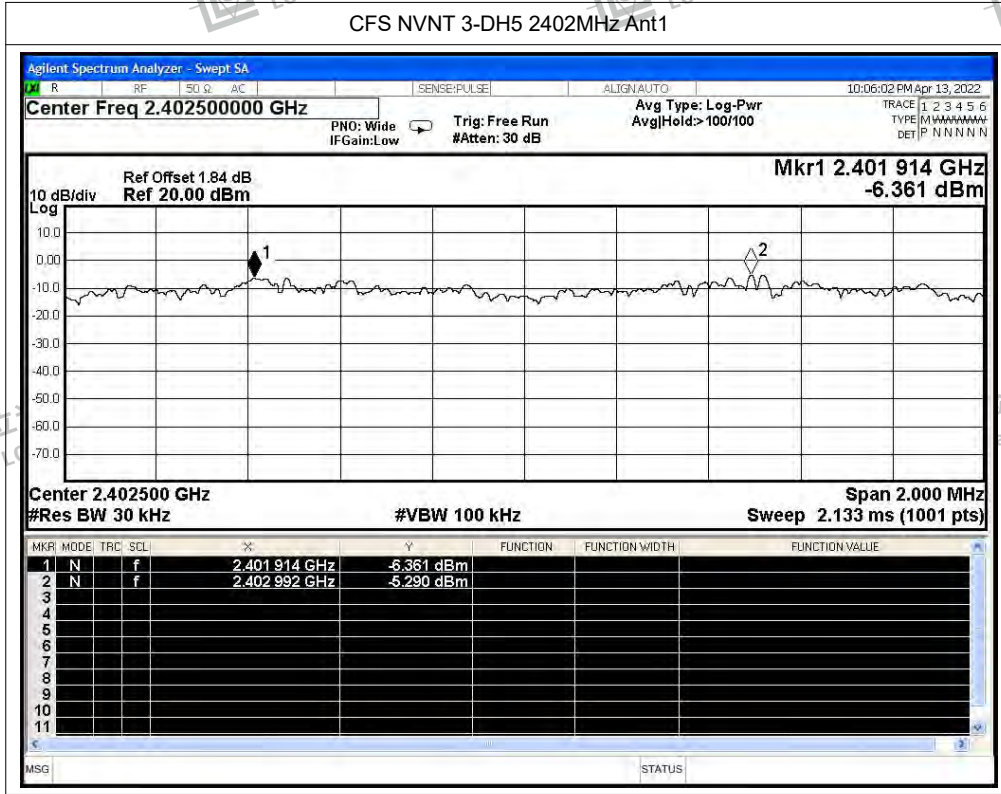



A.5 Dwell Time

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2402	Ant1	2.882	279.554	97	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.881	314.029	109	31600	400	Pass
NVNT	1-DH5	2480	Ant1	2.882	282.436	98	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.88	325.44	113	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.881	276.576	96	31600	400	Pass
NVNT	2-DH5	2480	Ant1	2.885	305.81	106	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.886	279.942	97	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.885	291.385	101	31600	400	Pass
NVNT	3-DH5	2480	Ant1	2.887	254.056	88	31600	400	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen
 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

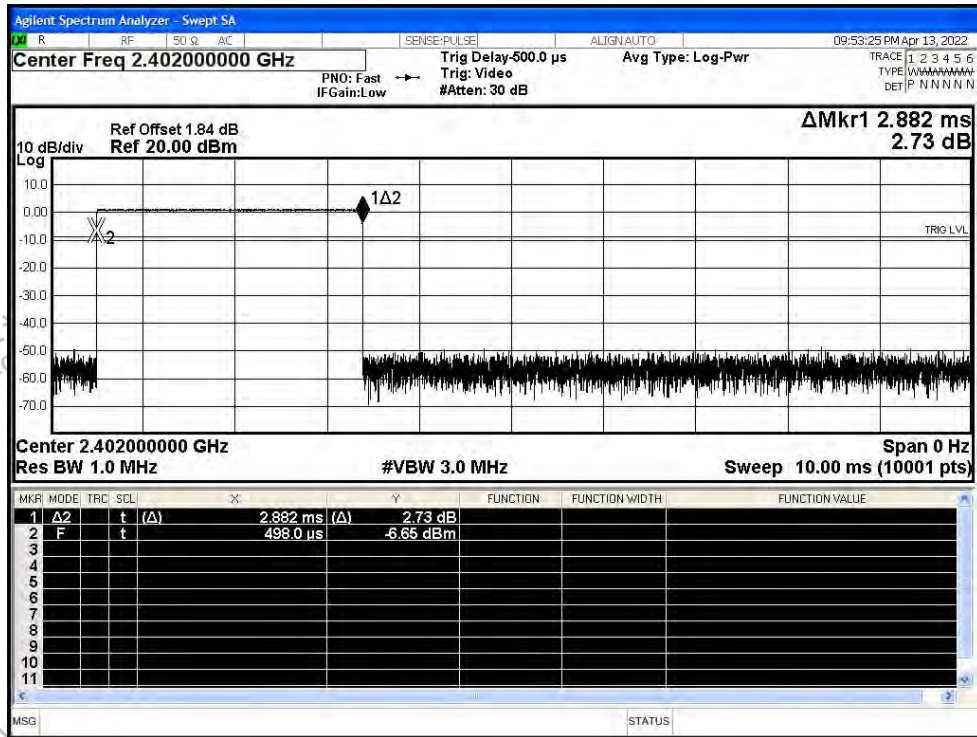


Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated

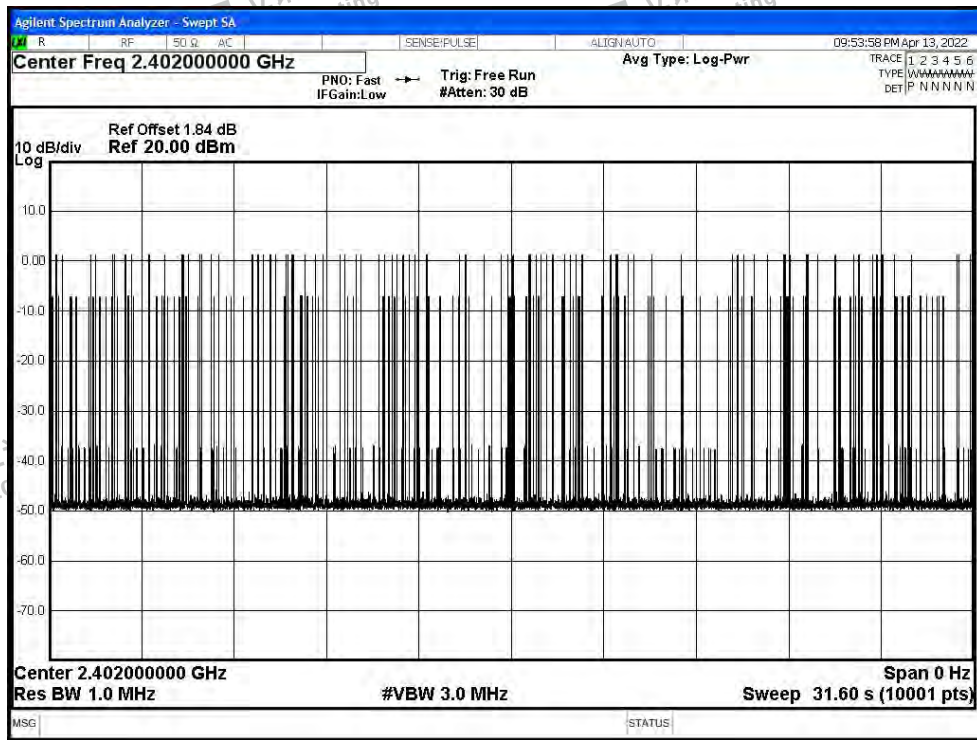




Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

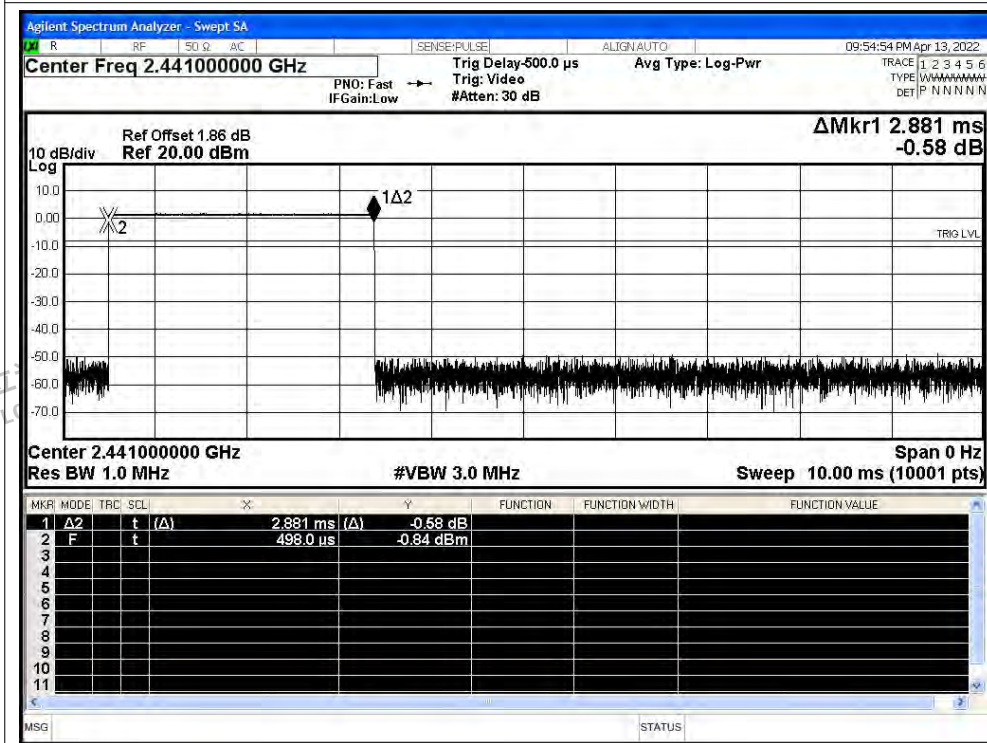


Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

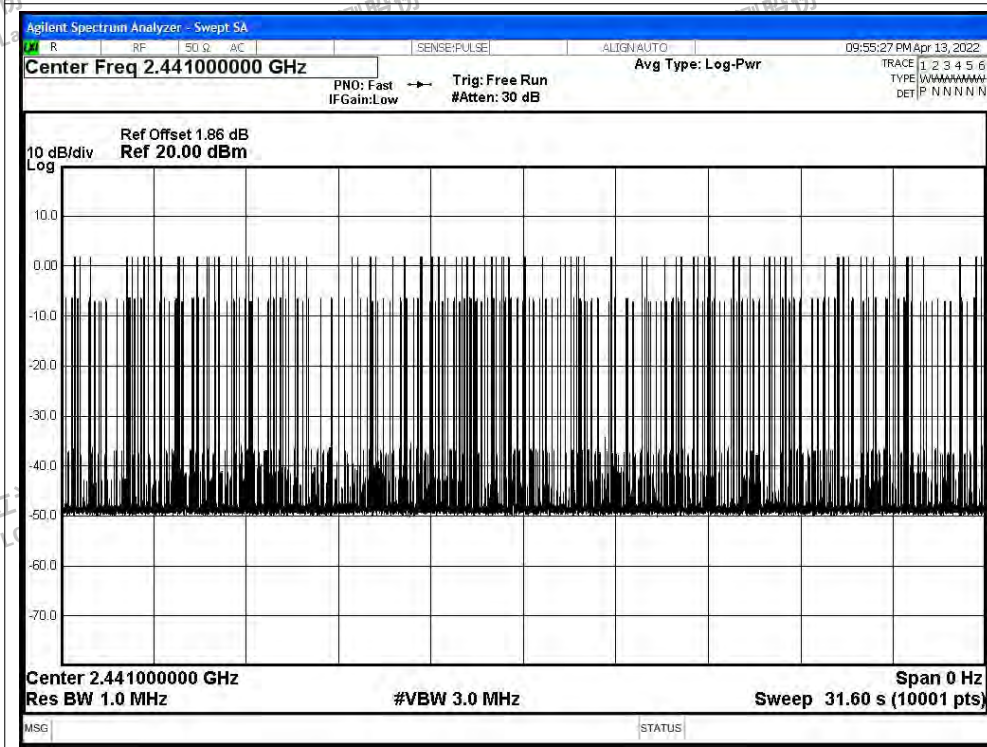




Dwell NVNT 1-DH5 2480MHz Ant1 One Burst

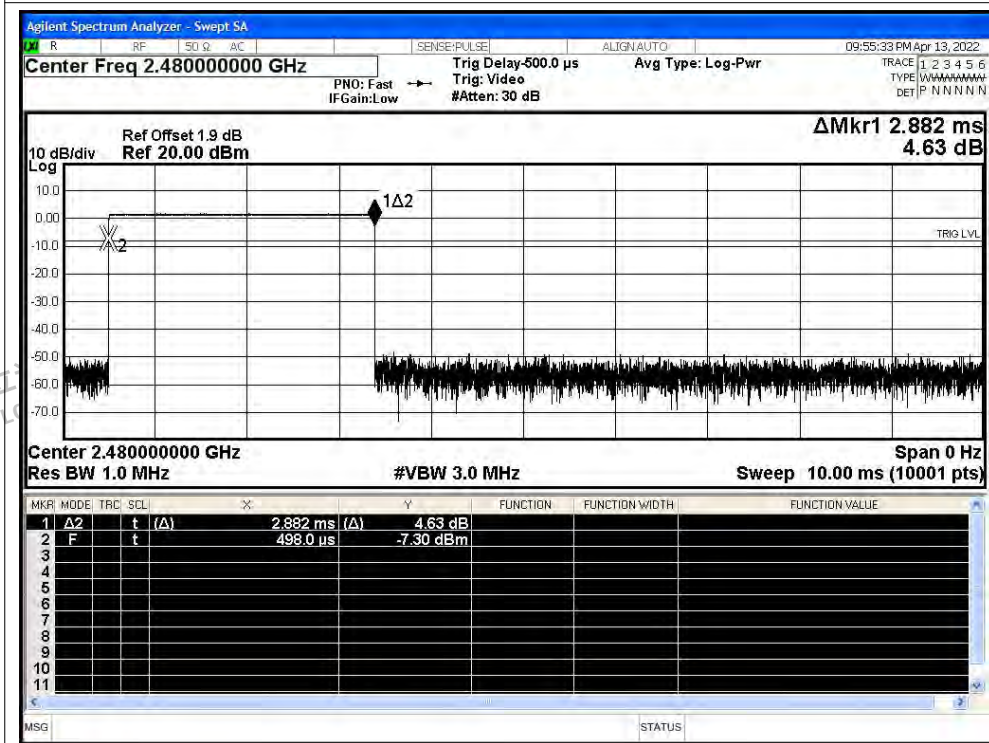


Dwell NVNT 1-DH5 2480MHz Ant1 Accumulated

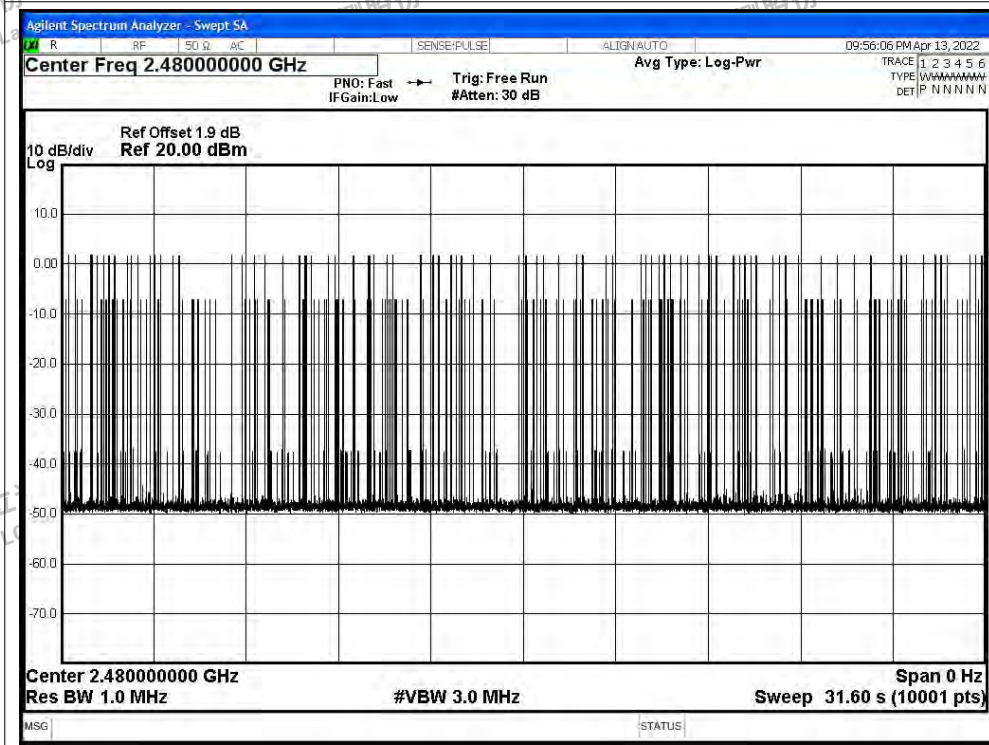




Dwell NVNT 2-DH5 2402MHz Ant1 One Burst

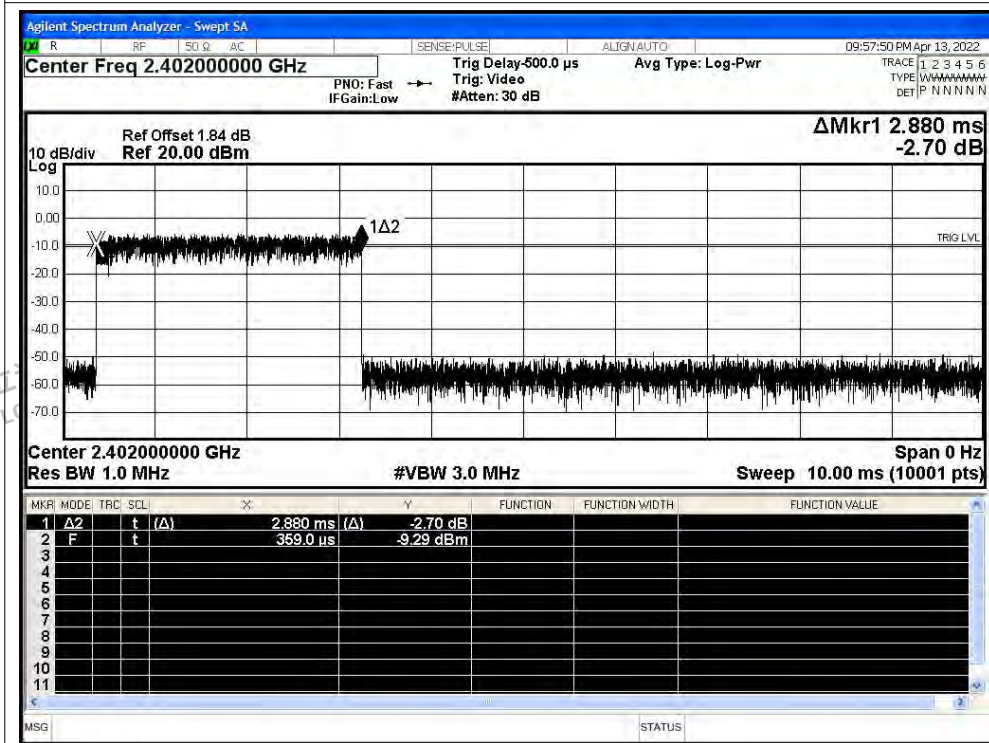


Dwell NVNT 2-DH5 2402MHz Ant1 Accumulated

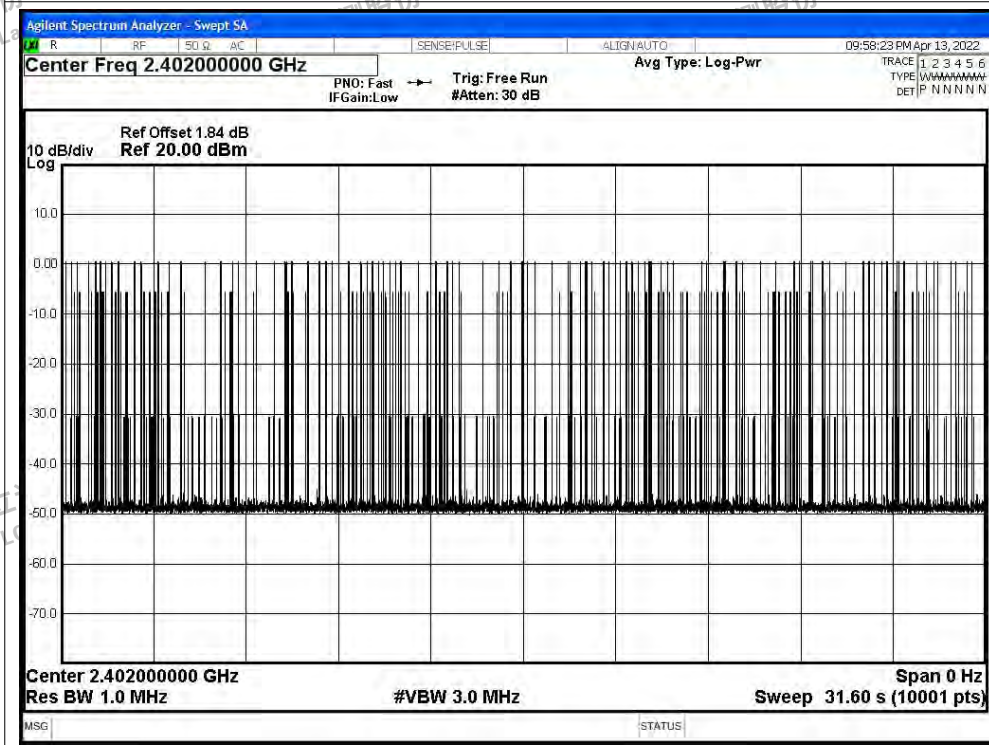




Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

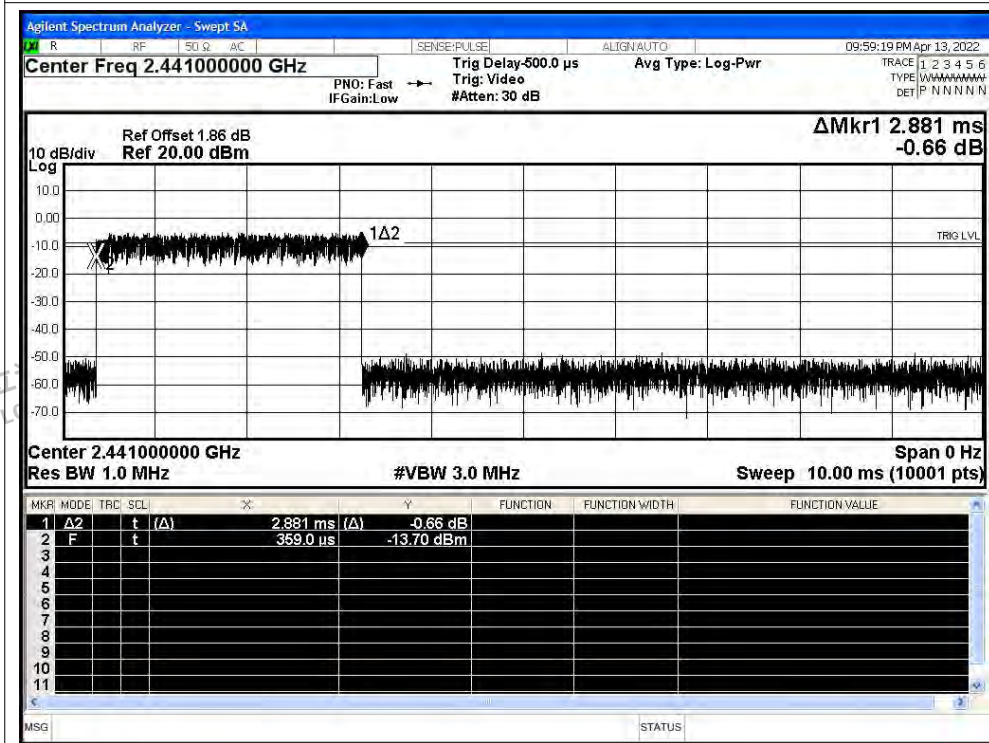


Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

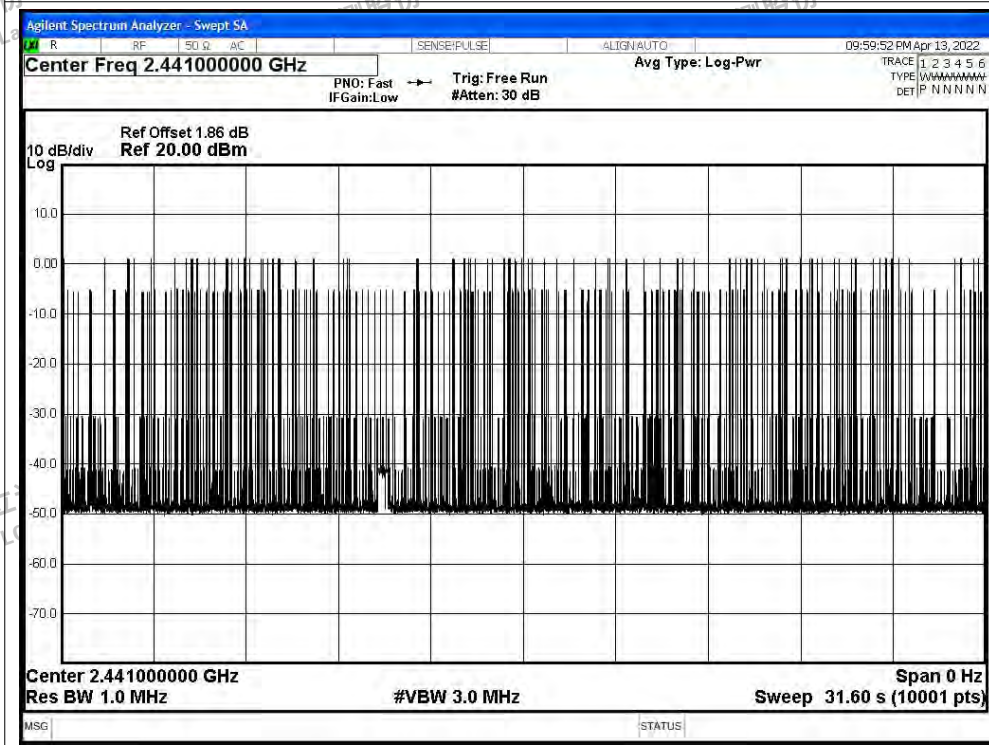




Dwell NVNT 2-DH5 2480MHz Ant1 One Burst

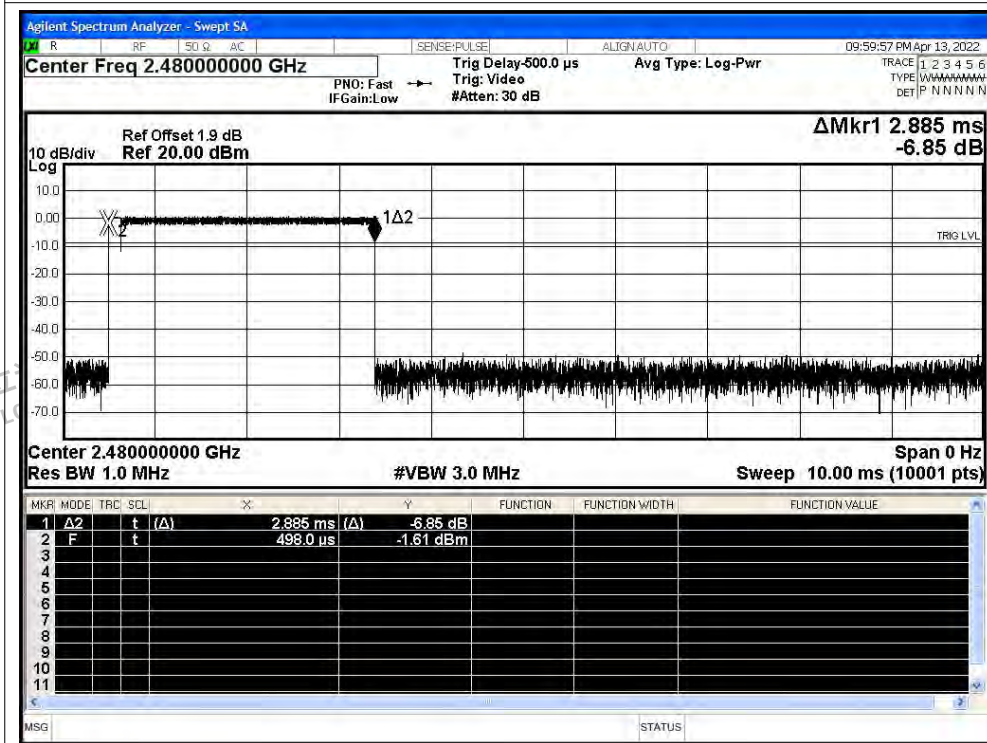


Dwell NVNT 2-DH5 2480MHz Ant1 Accumulated

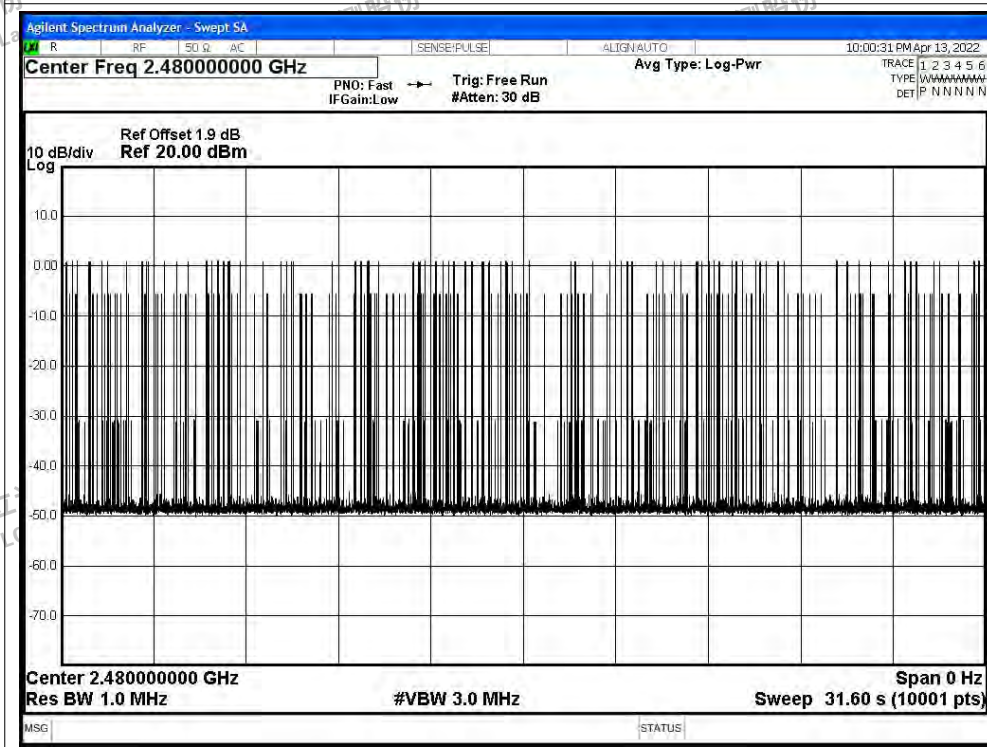




Dwell NVNT 3-DH5 2402MHz Ant1 One Burst

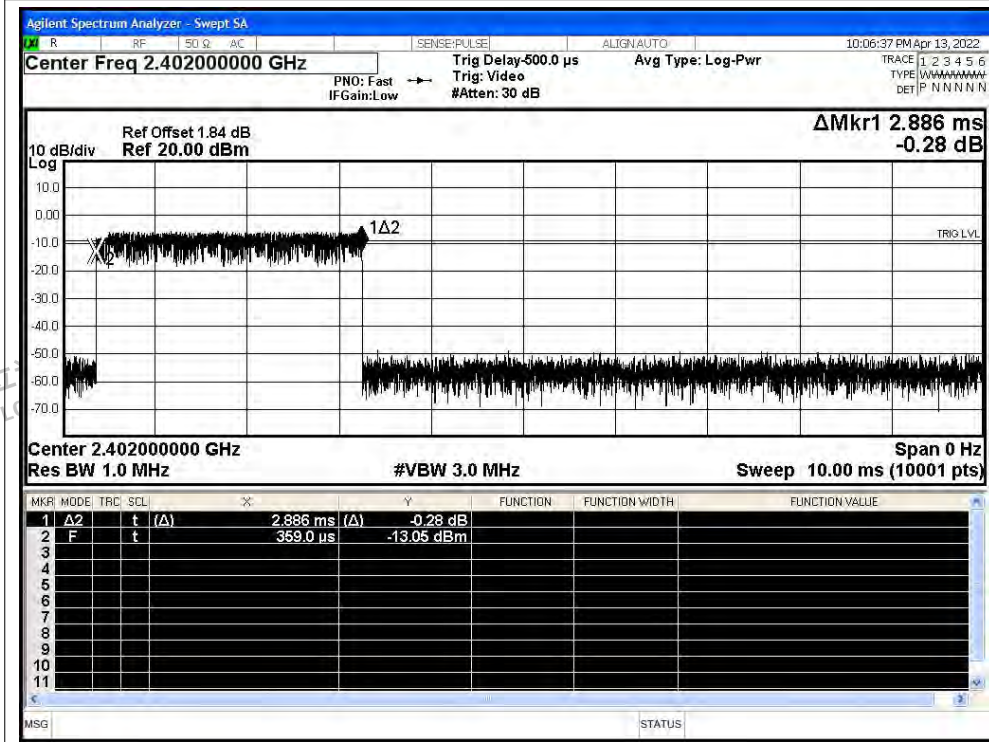


Dwell NVNT 3-DH5 2402MHz Ant1 Accumulated

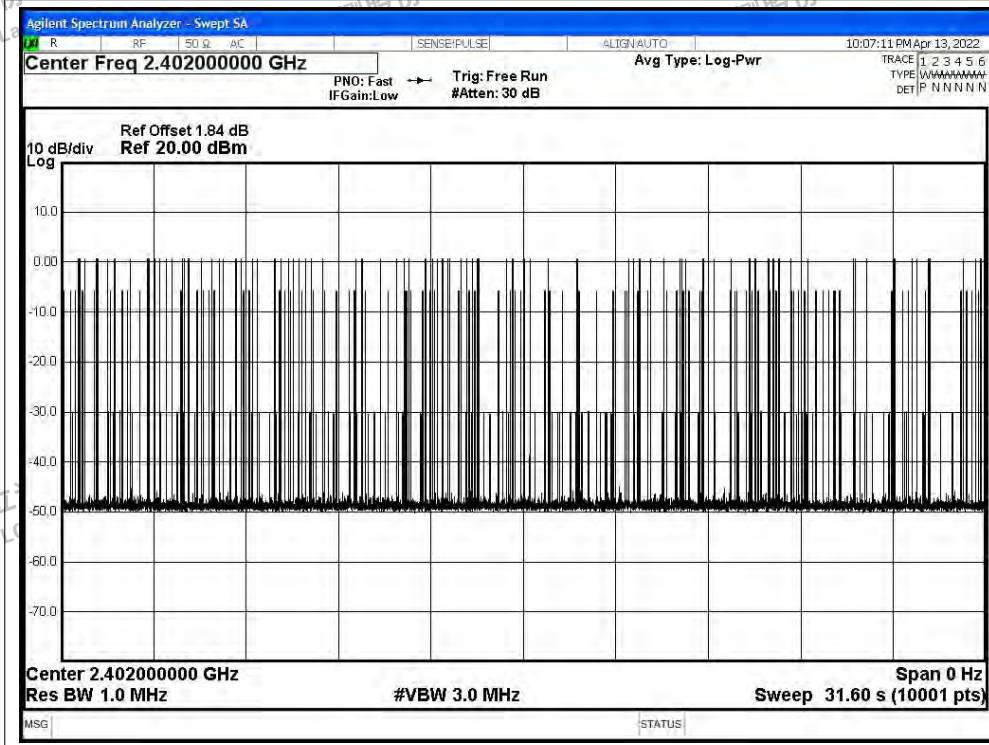




Dwell NVNT 3-DH5 2441MHz Ant1 One Burst

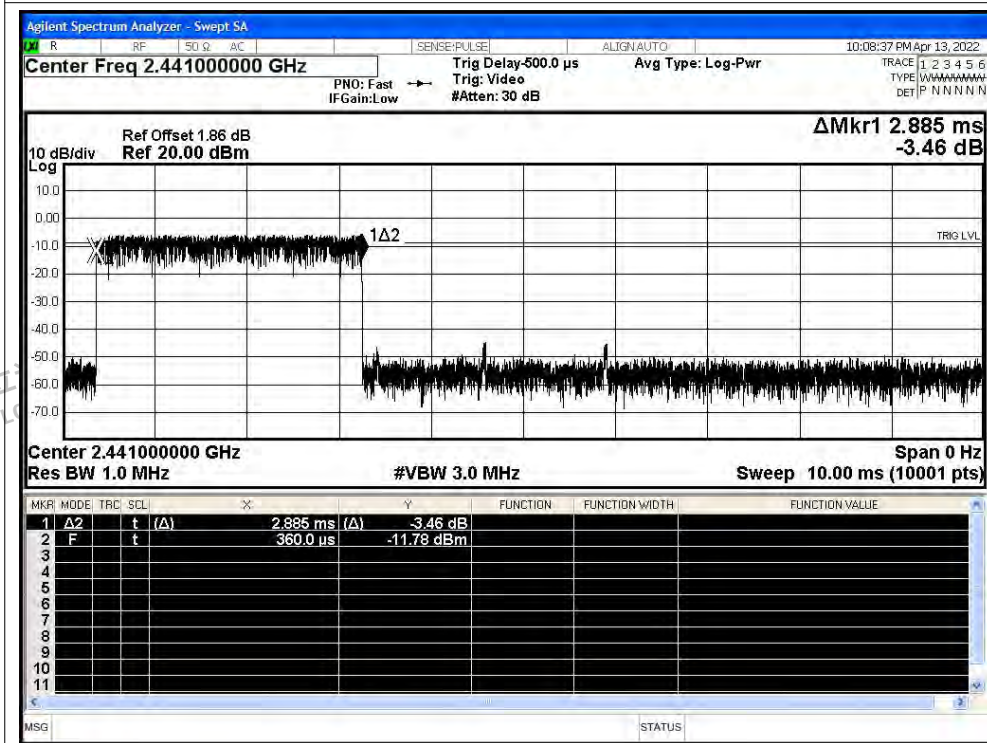


Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

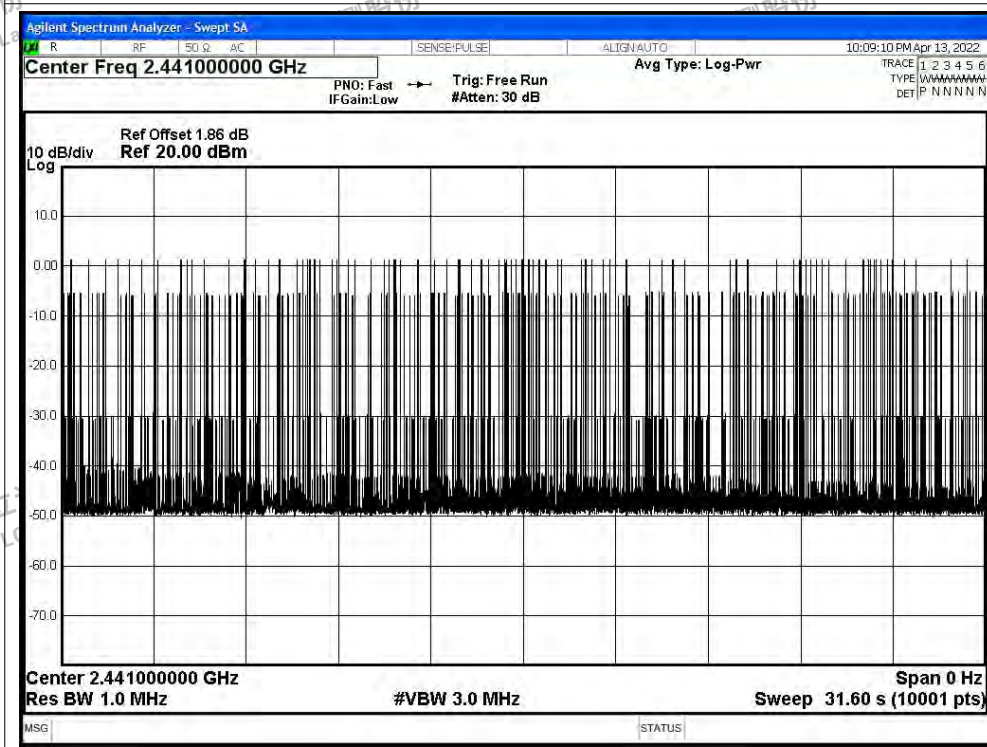




Dwell NVNT 3-DH5 2480MHz Ant1 One Burst

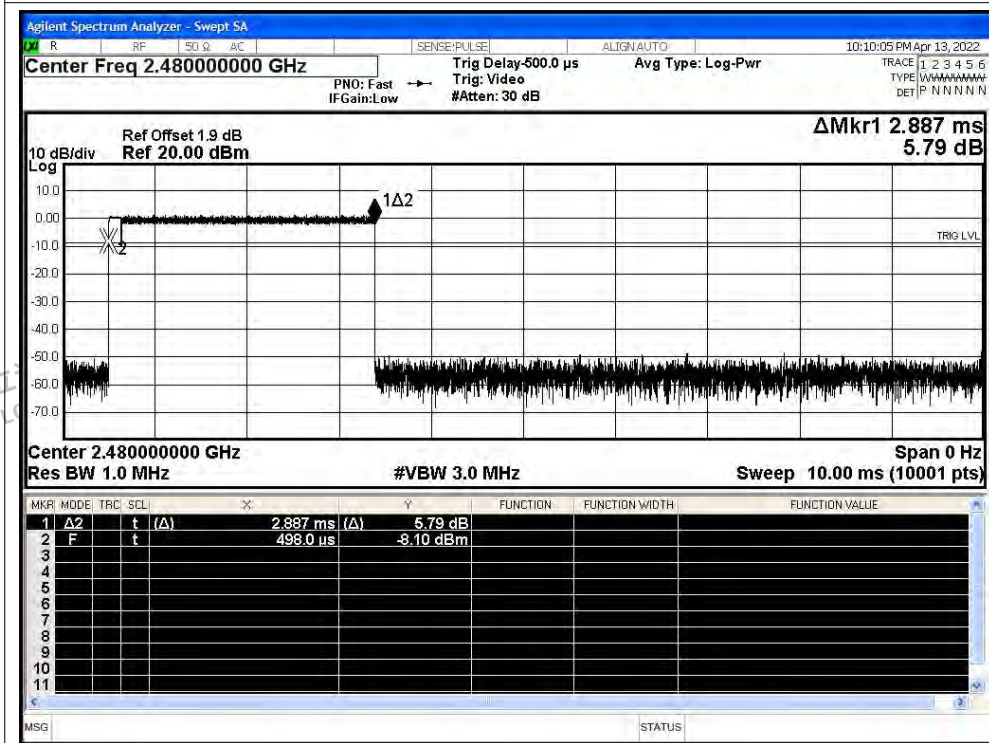

Dwell NVNT 3-DH5 2480MHz Ant1 Accumulated

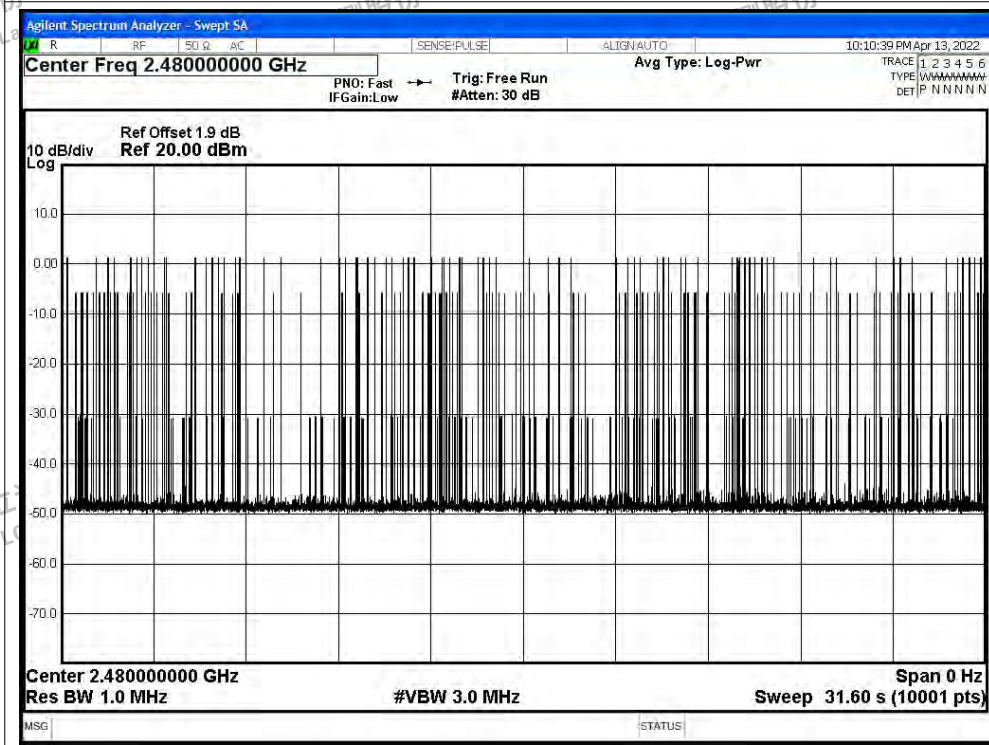



A.6 Number of Hopping Channel


Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass






Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

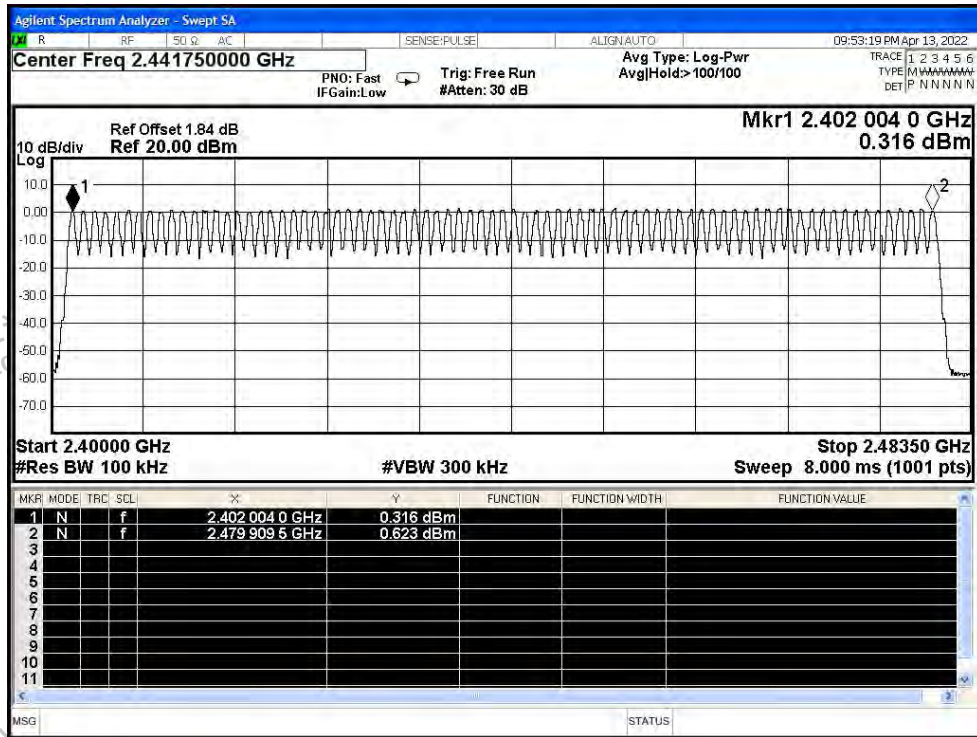

Hopping No. NVNT 2-DH5 2402MHz Ant1

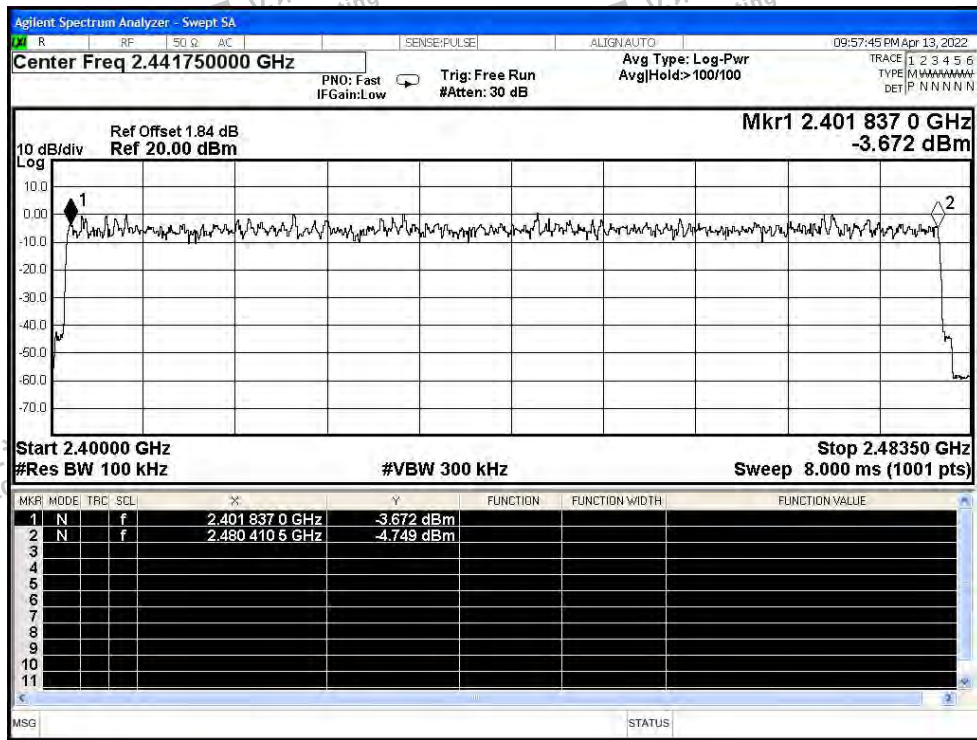

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Hopping No. NVNT 3-DH5 2402MHz Ant1

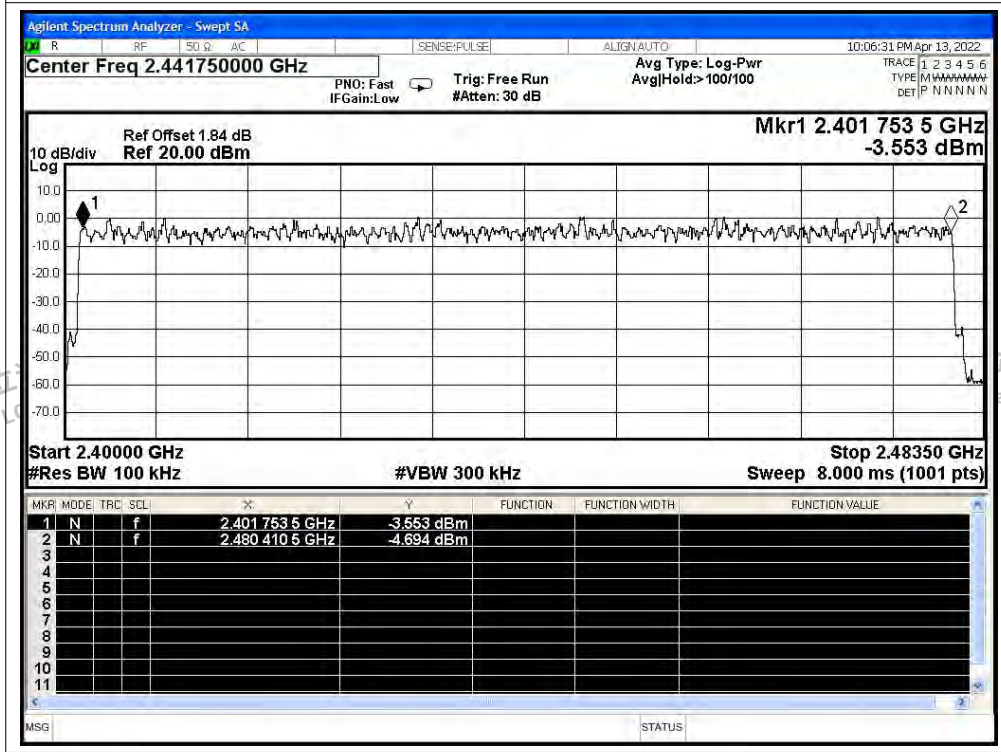

Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen
 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity





A.7 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-57.91	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-58.99	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-51.97	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-54.69	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-53.53	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-56.39	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

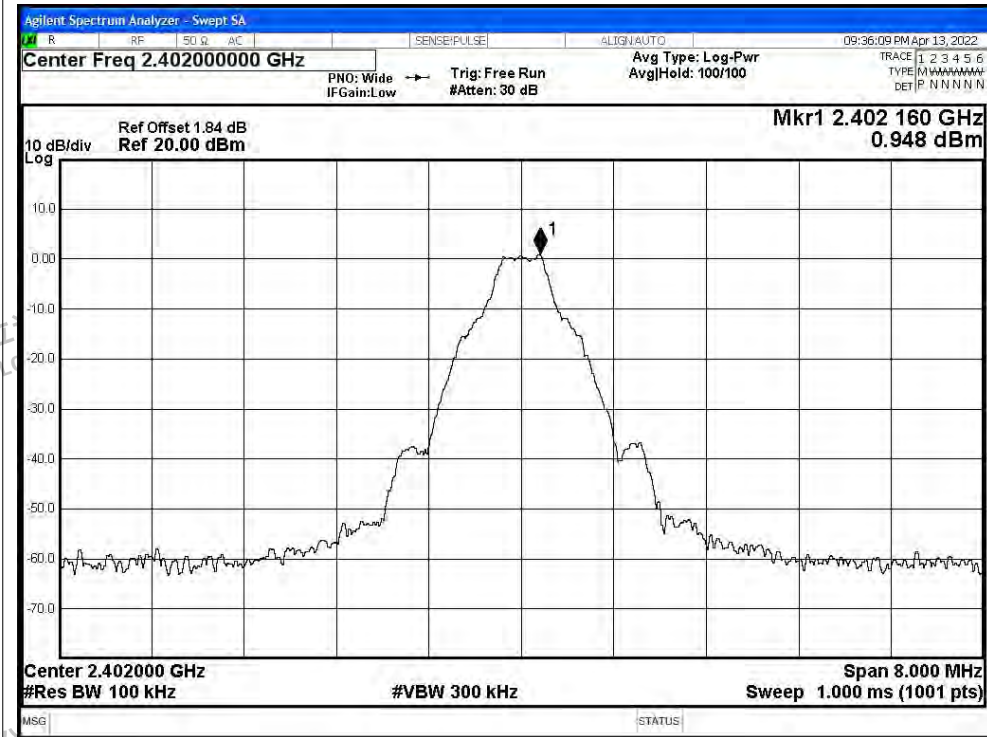


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

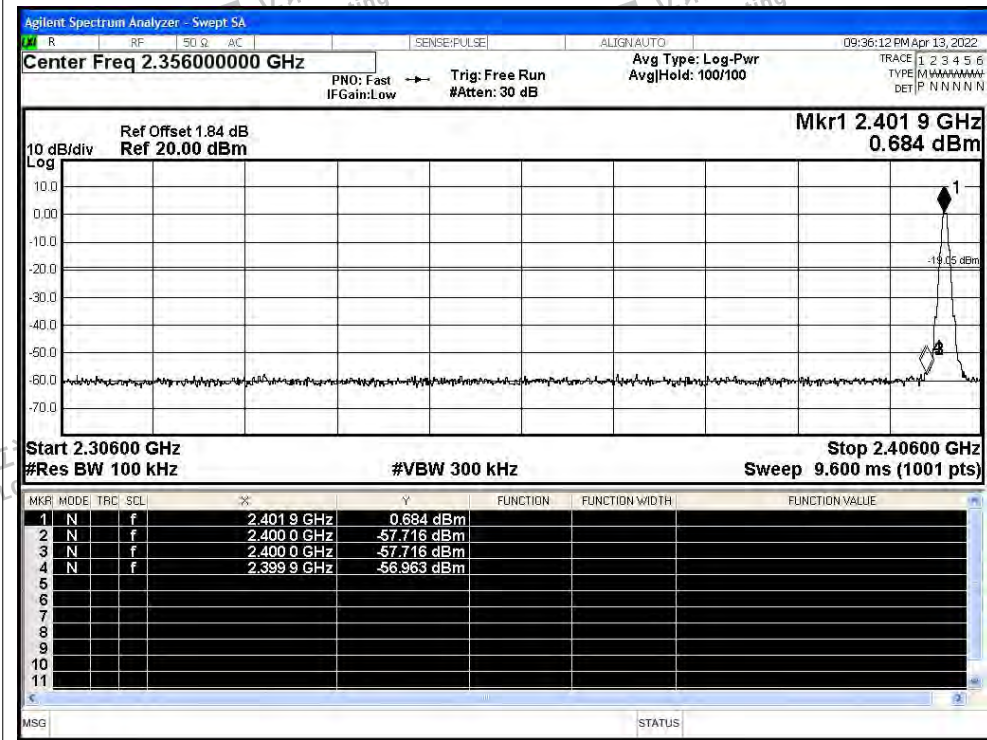




Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

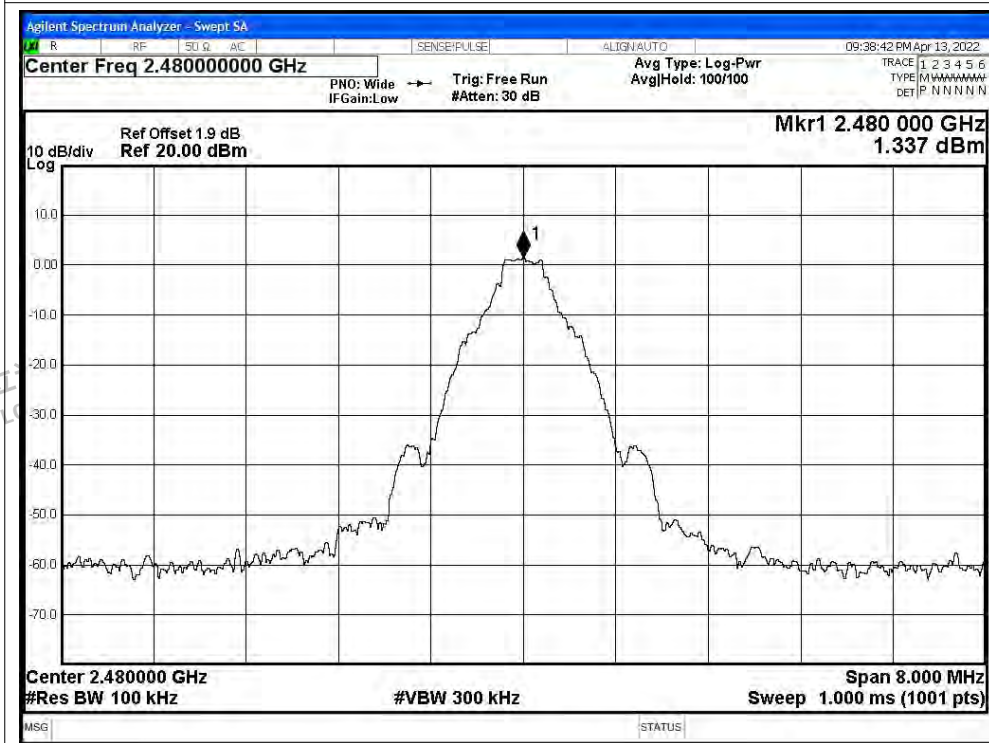


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

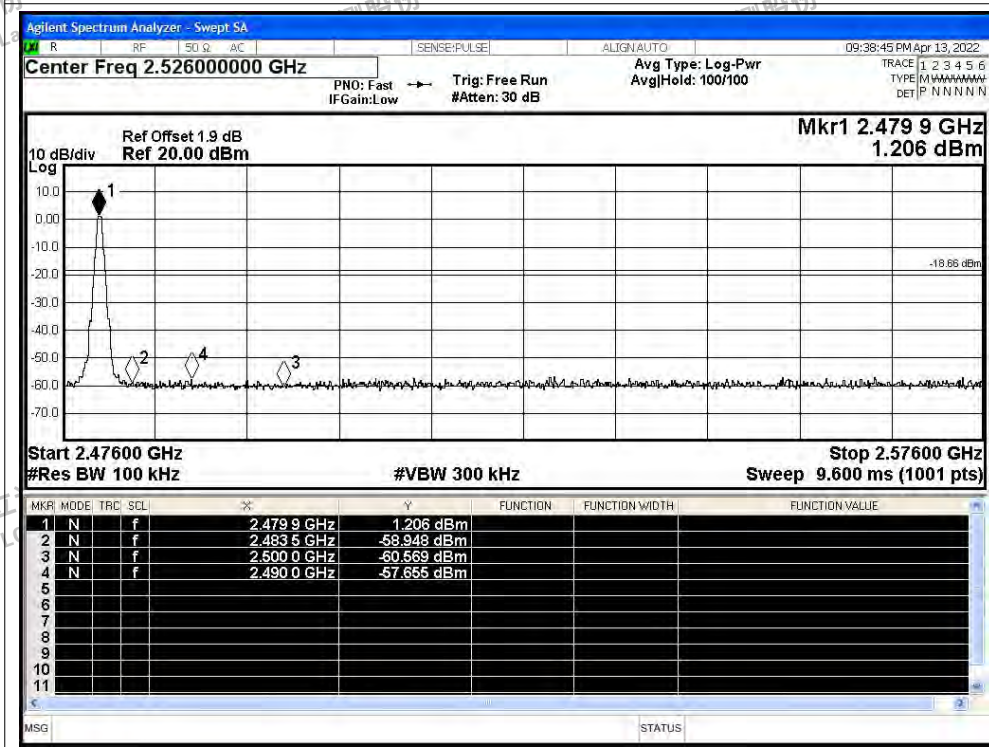




Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

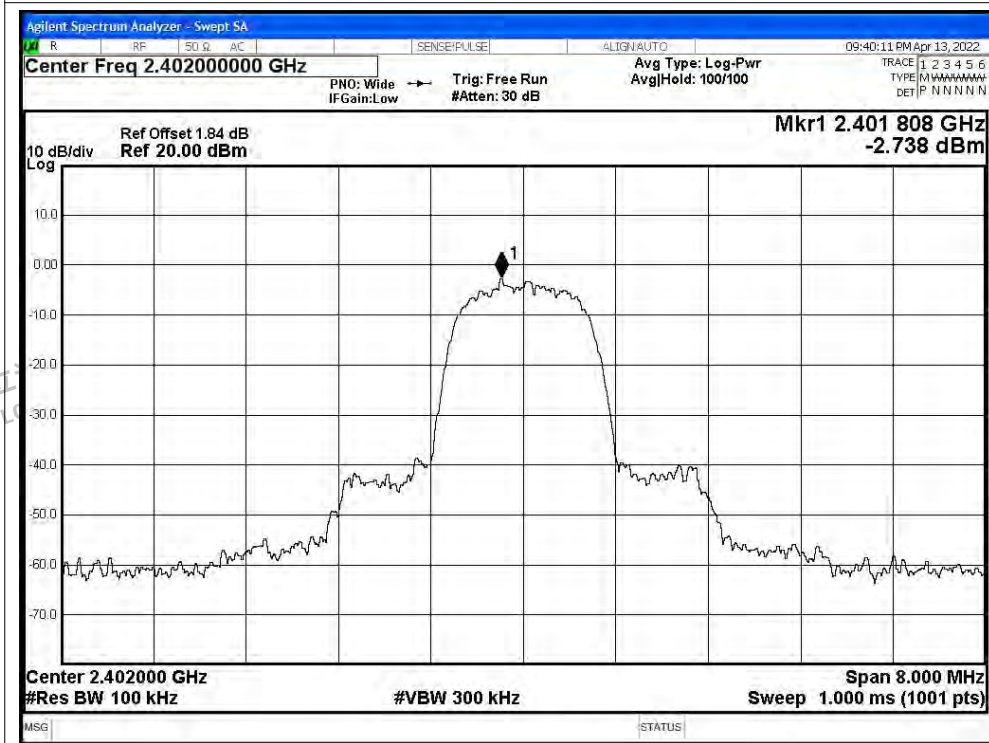


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

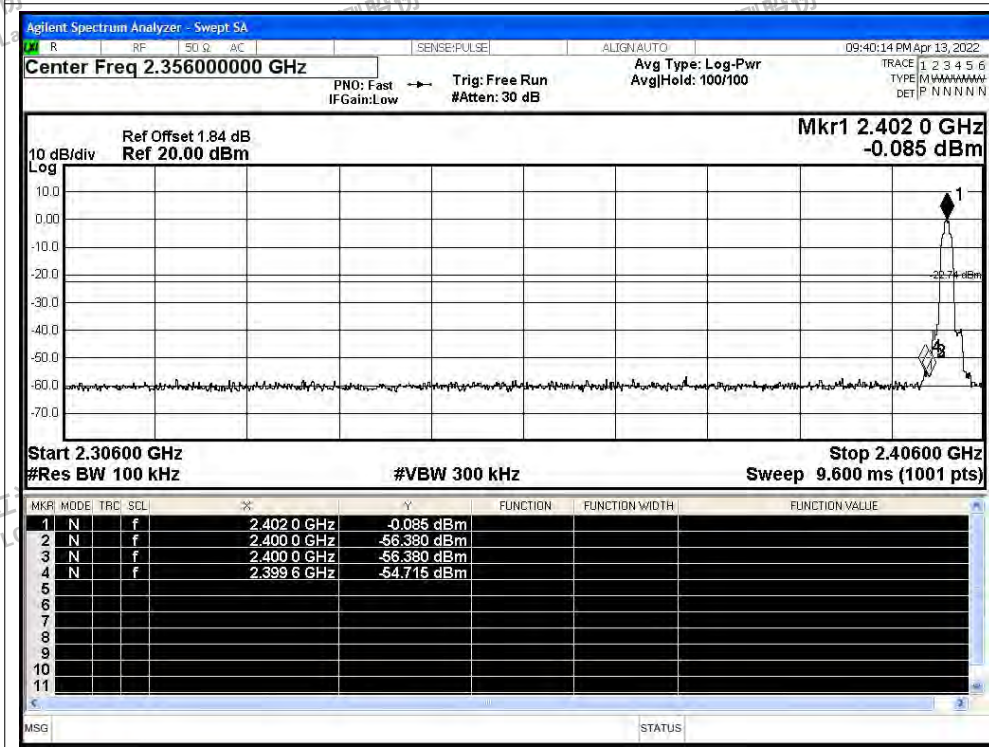




Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

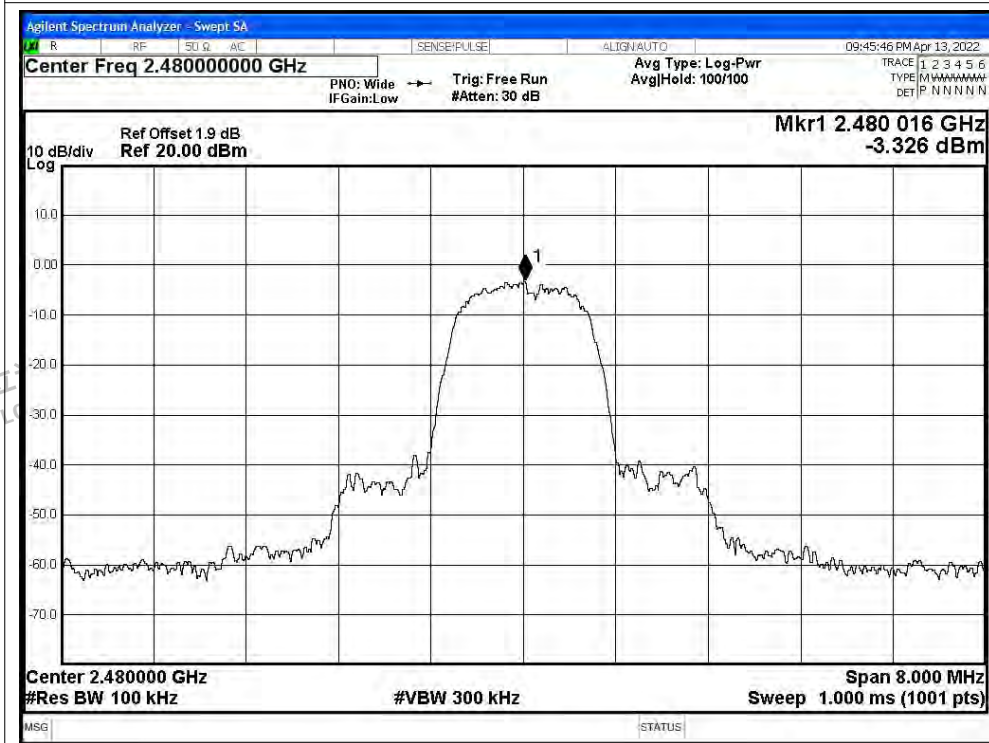


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

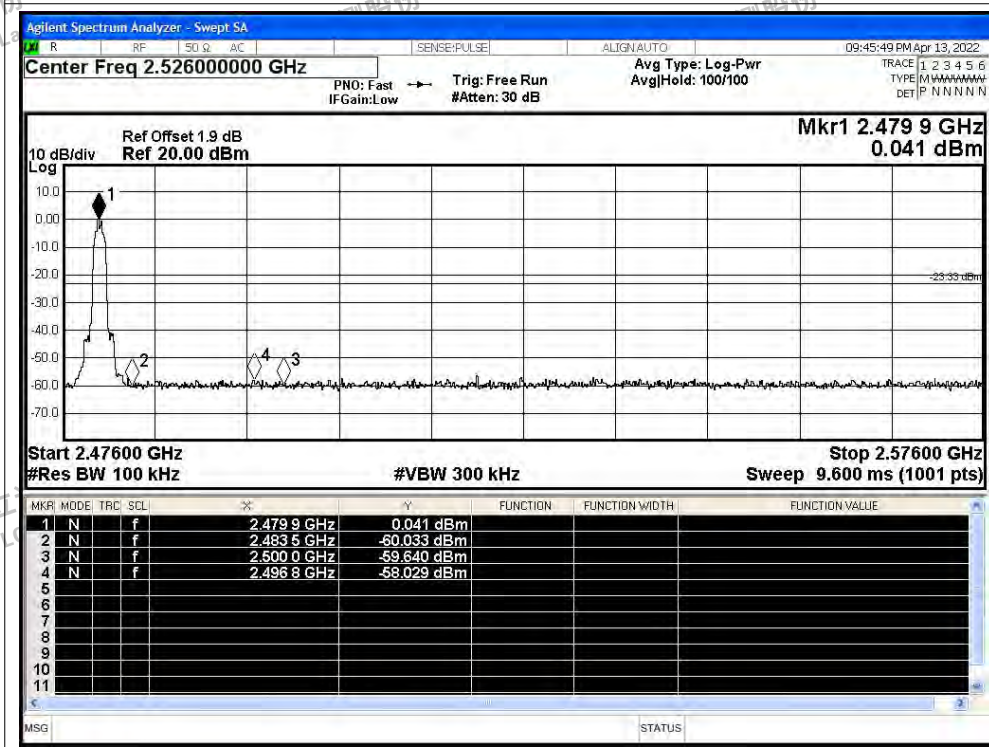




Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

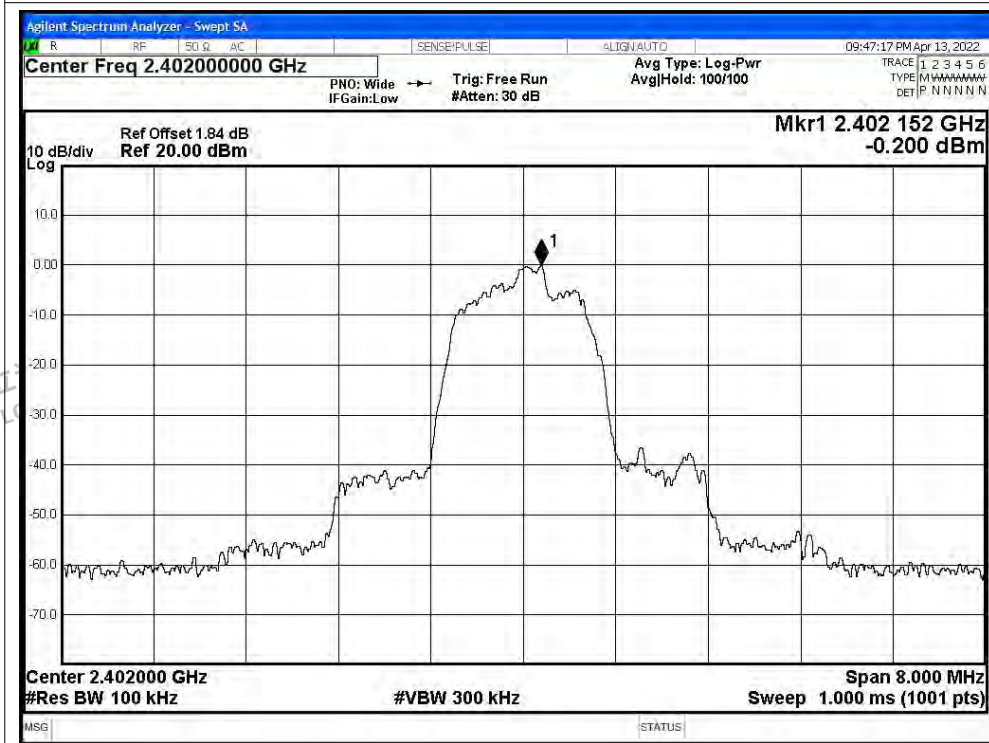


Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

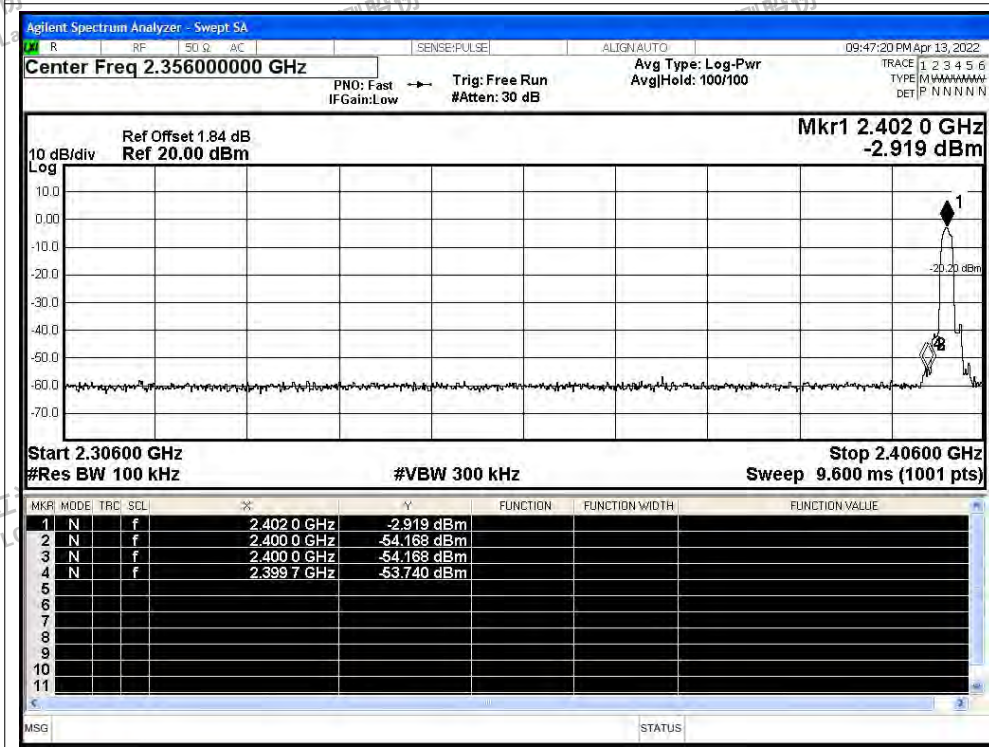




Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

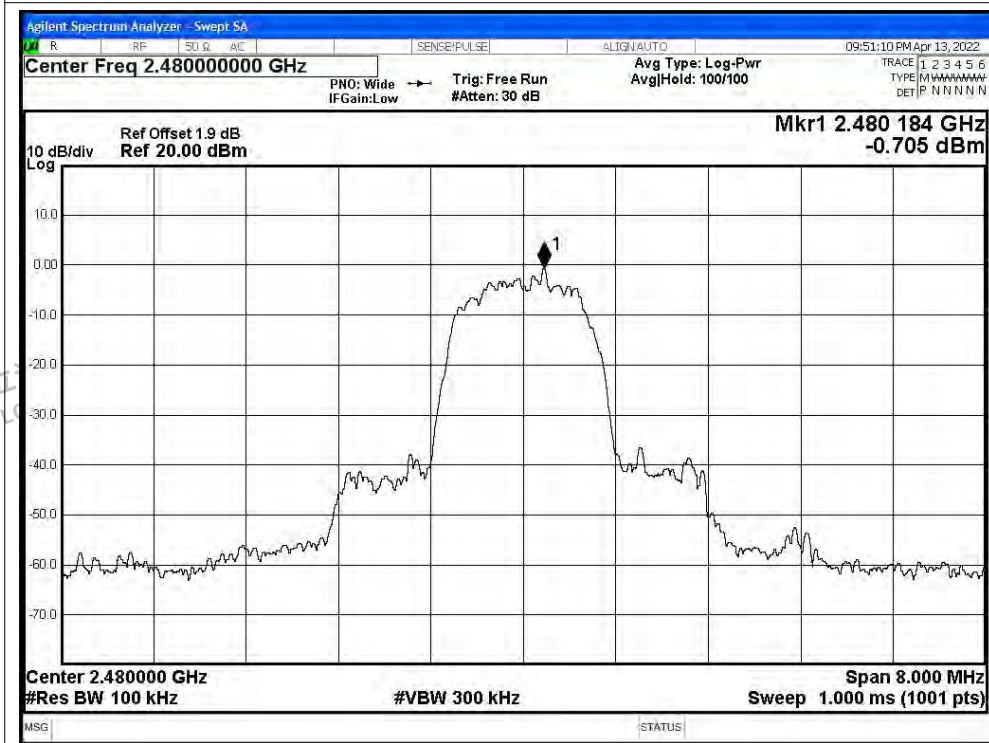

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

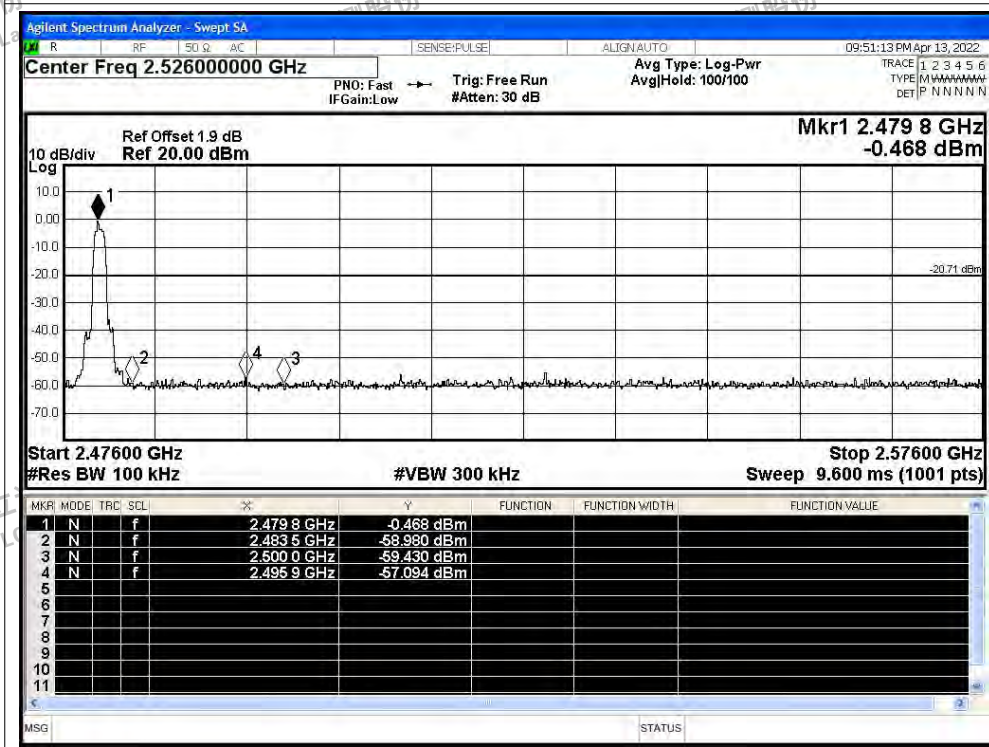





(Hopping)

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-57.26	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-57.49	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-56.23	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-56.44	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-56.78	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-56.45	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity






Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

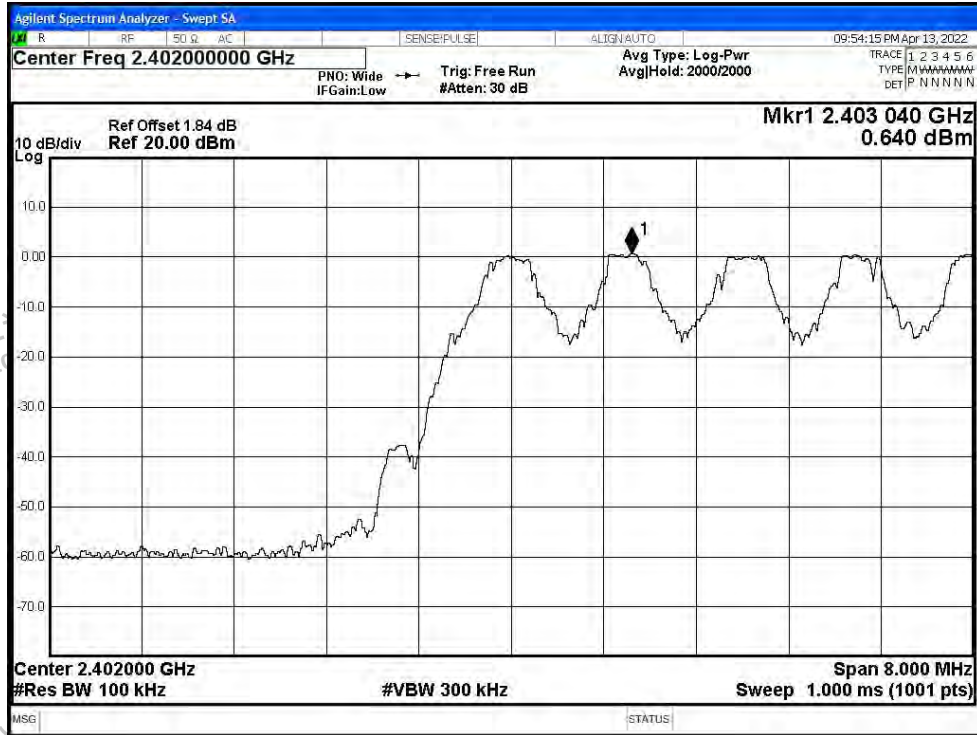


Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

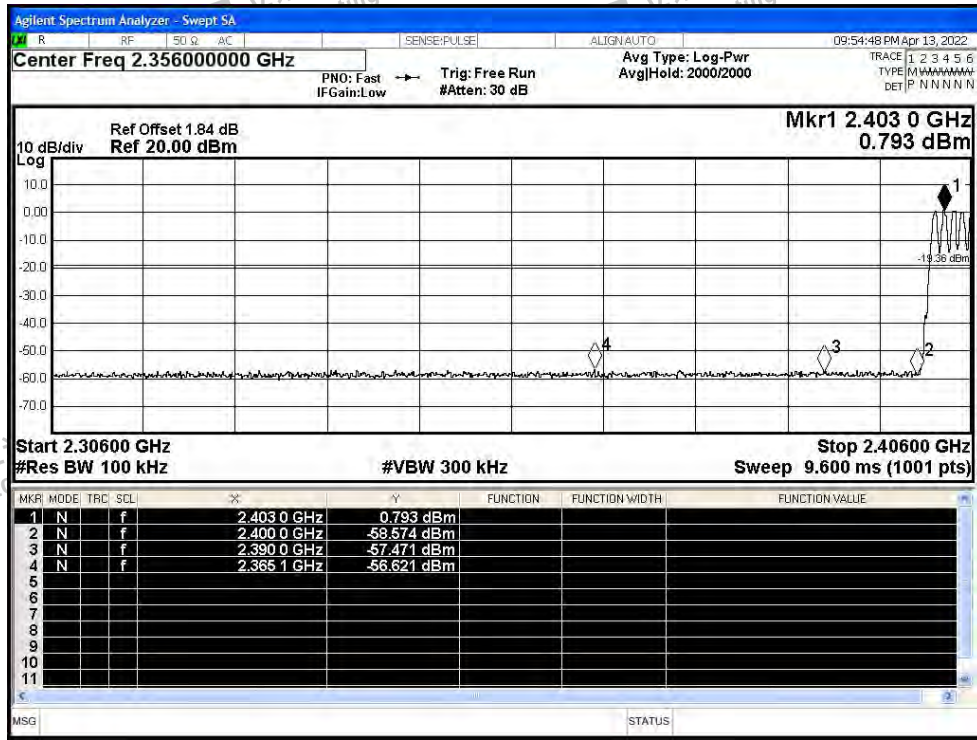




Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref

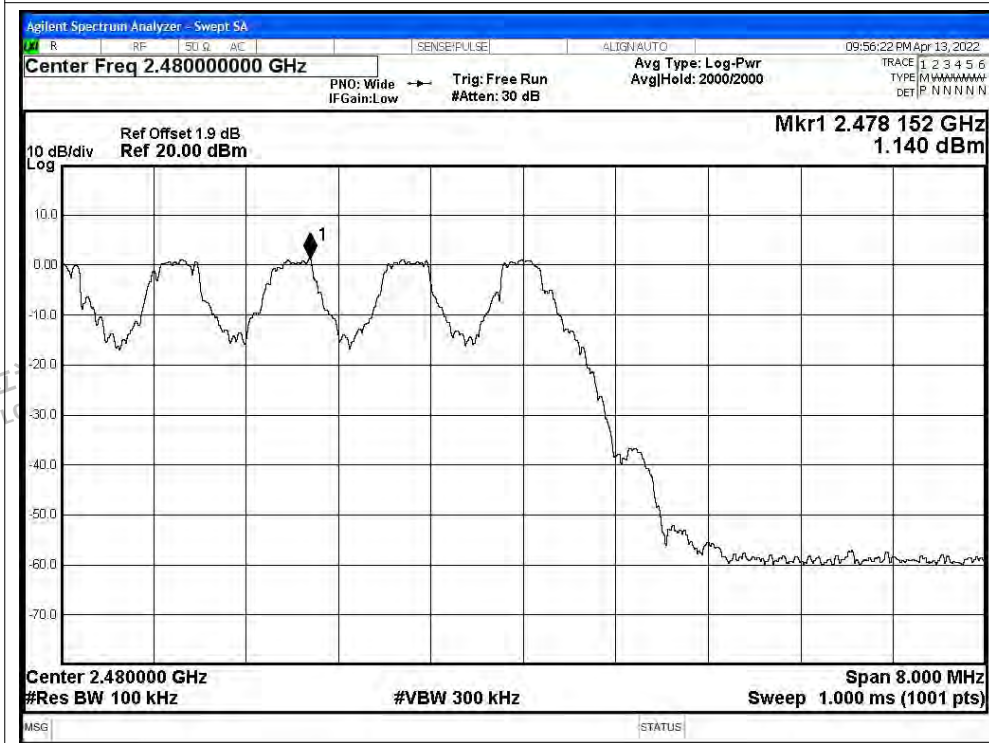

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

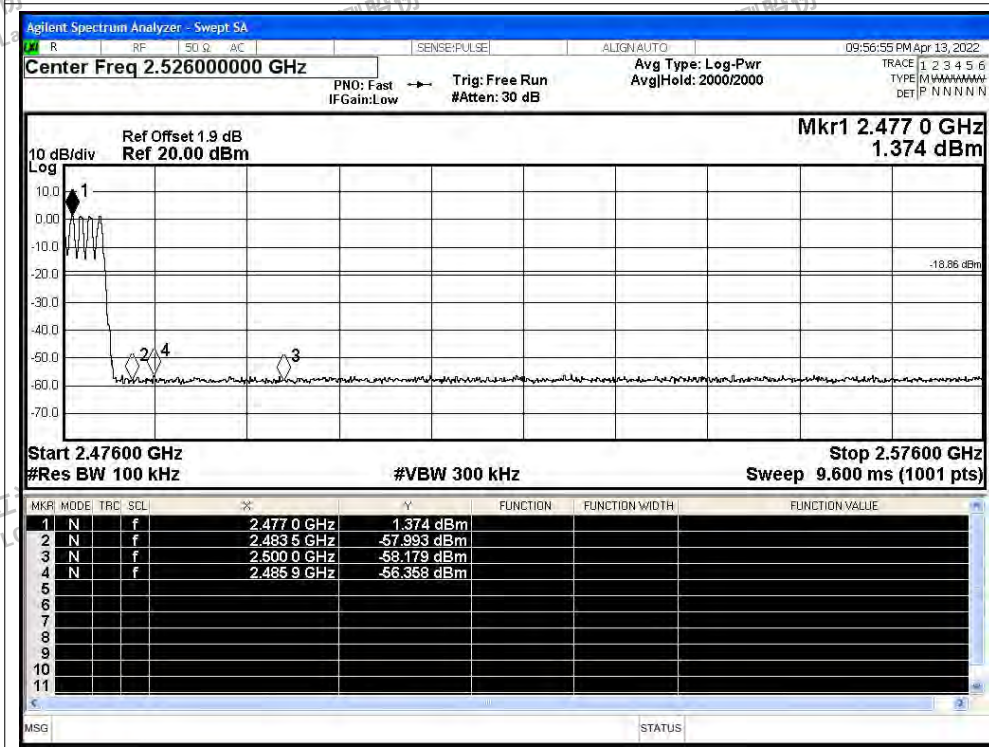




Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

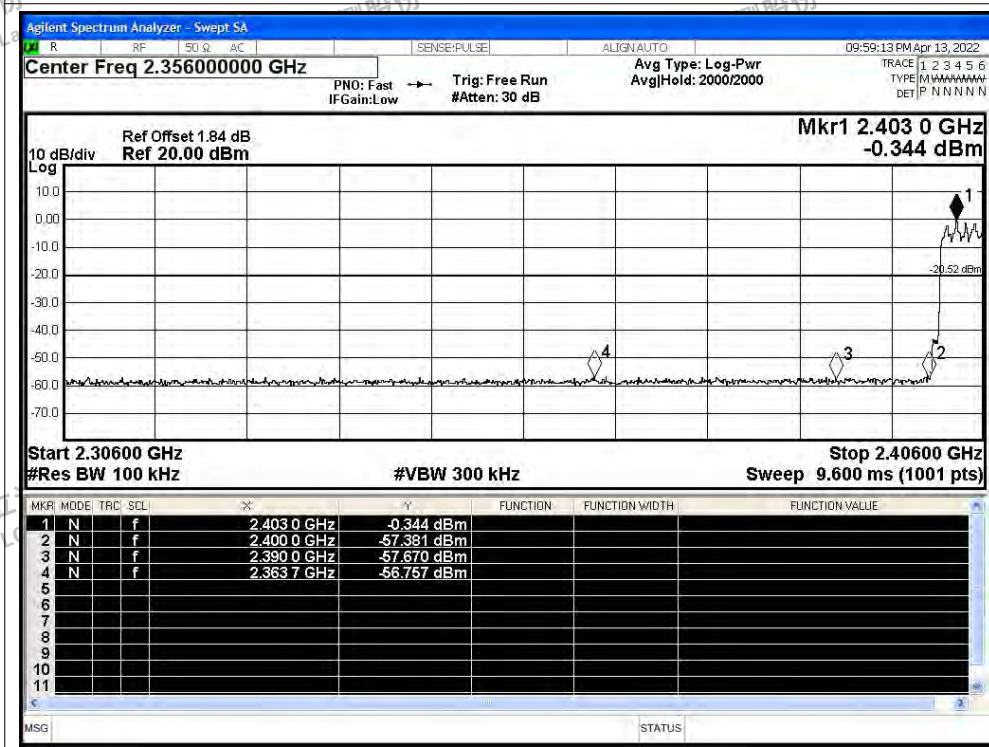




Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref

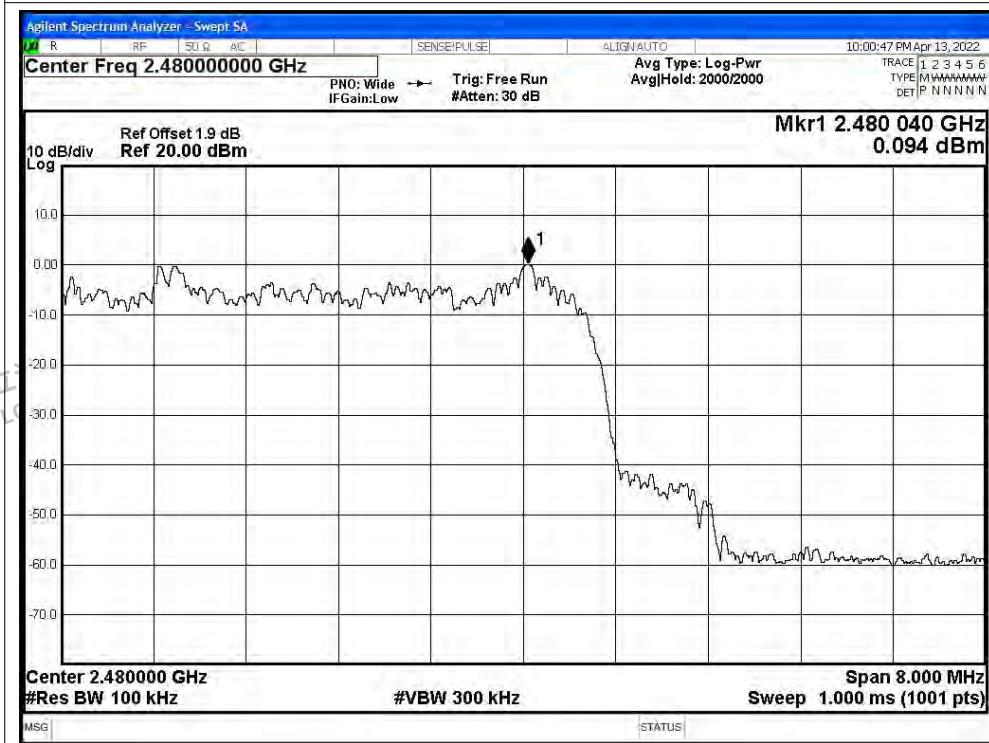

Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

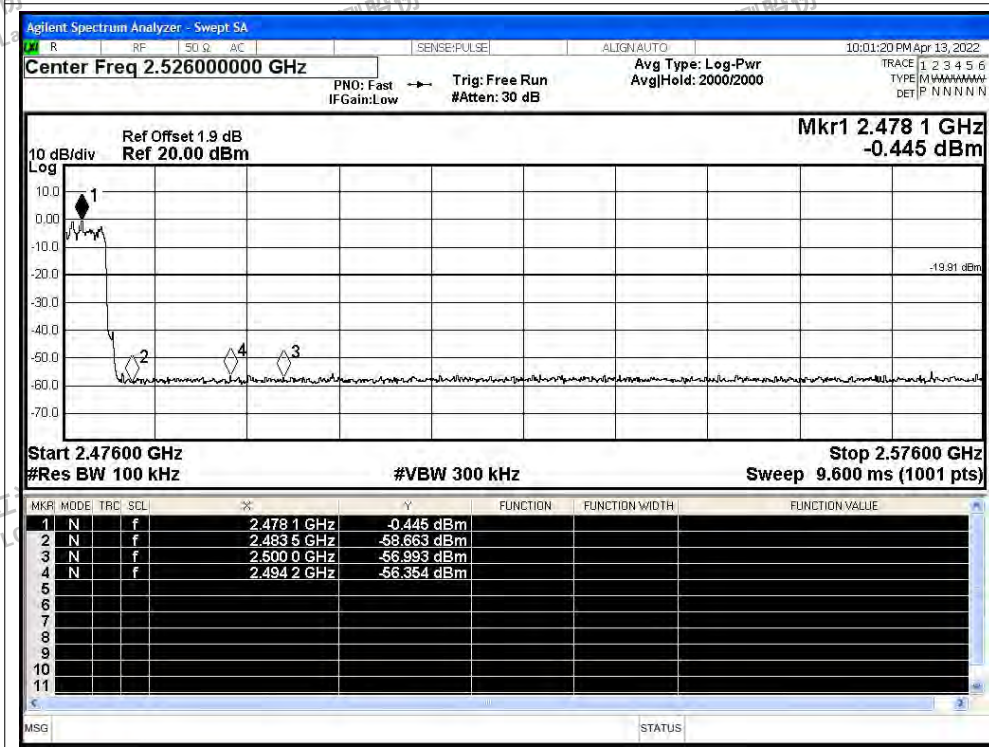




Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

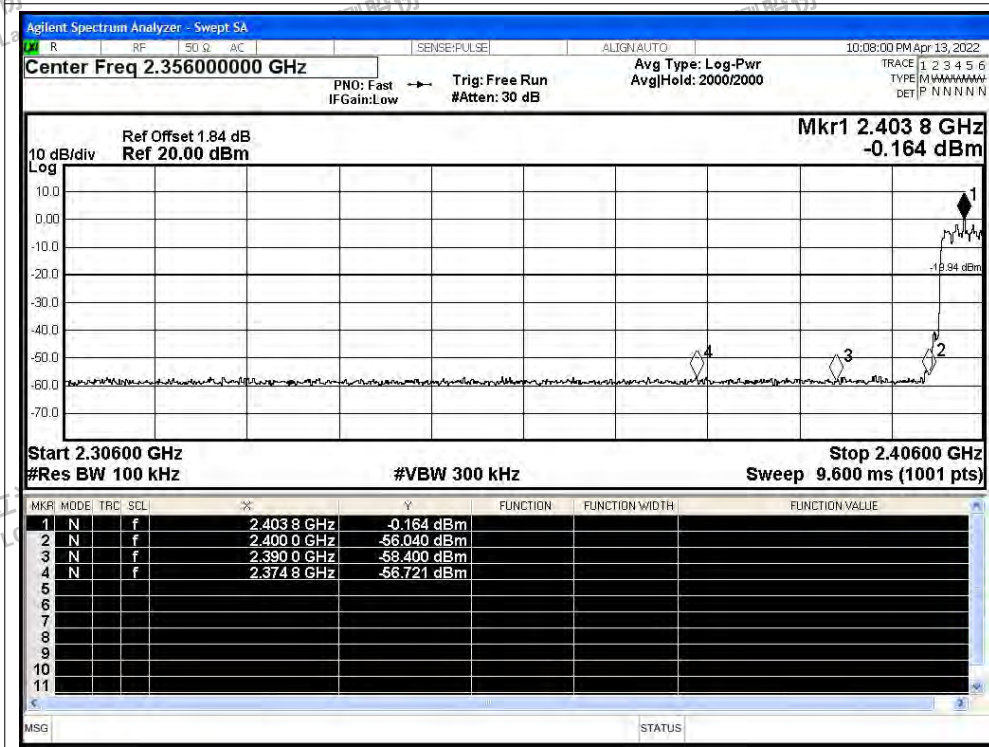




Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref

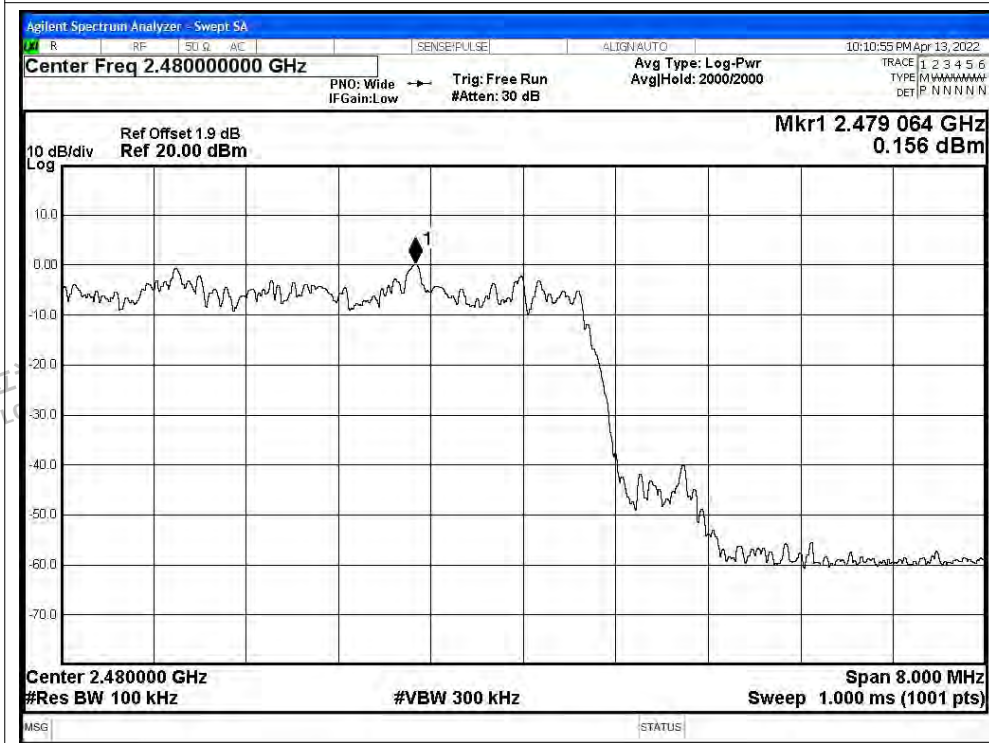

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission

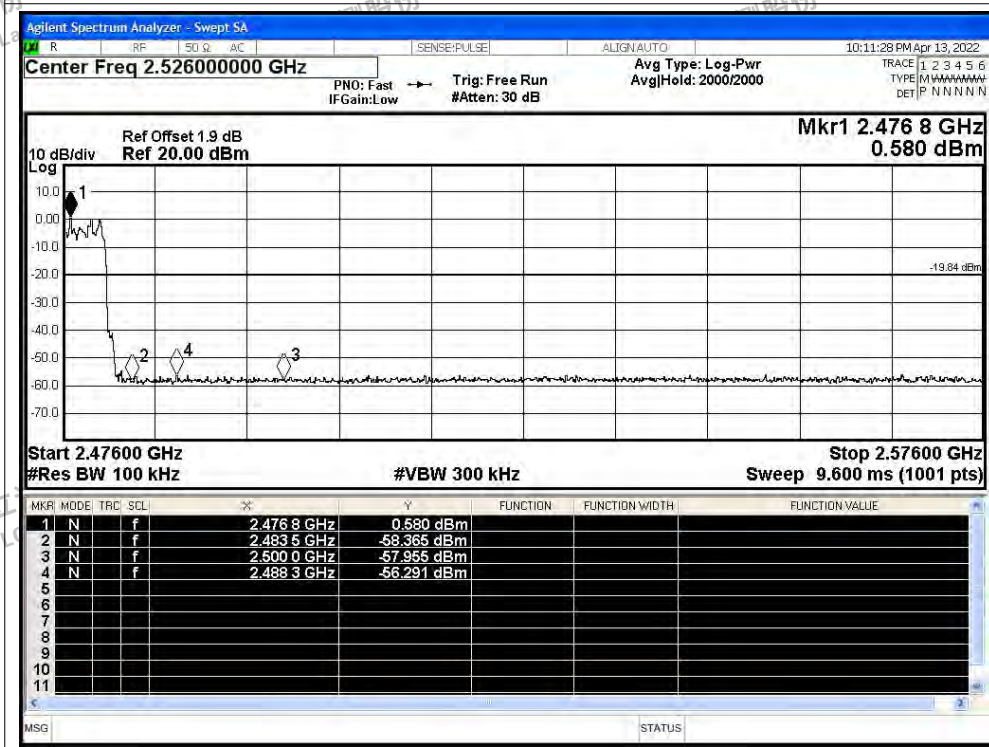





A.8 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-50.54	-20	Pass
NVNT	1-DH5	2441	Ant1	-55.21	-20	Pass
NVNT	1-DH5	2480	Ant1	-53.46	-20	Pass
NVNT	2-DH5	2402	Ant1	-48.73	-20	Pass
NVNT	2-DH5	2441	Ant1	-44.83	-20	Pass
NVNT	2-DH5	2480	Ant1	-46.27	-20	Pass
NVNT	3-DH5	2402	Ant1	-52.84	-20	Pass
NVNT	3-DH5	2441	Ant1	-52.53	-20	Pass
NVNT	3-DH5	2480	Ant1	-55.93	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen
 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity






Test Graphs

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

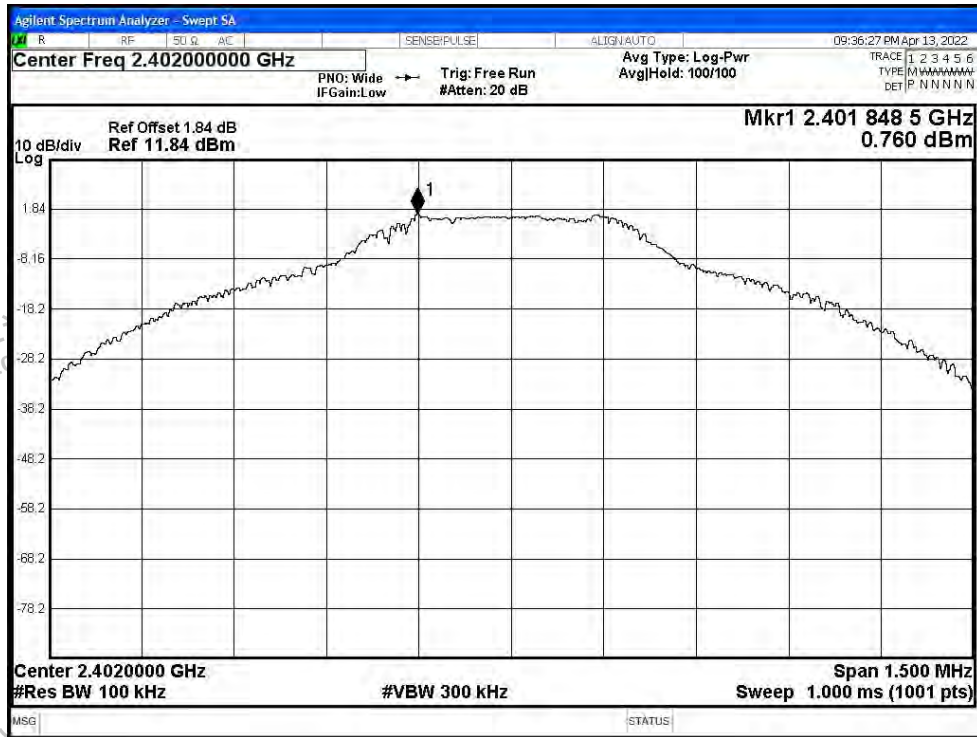


Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

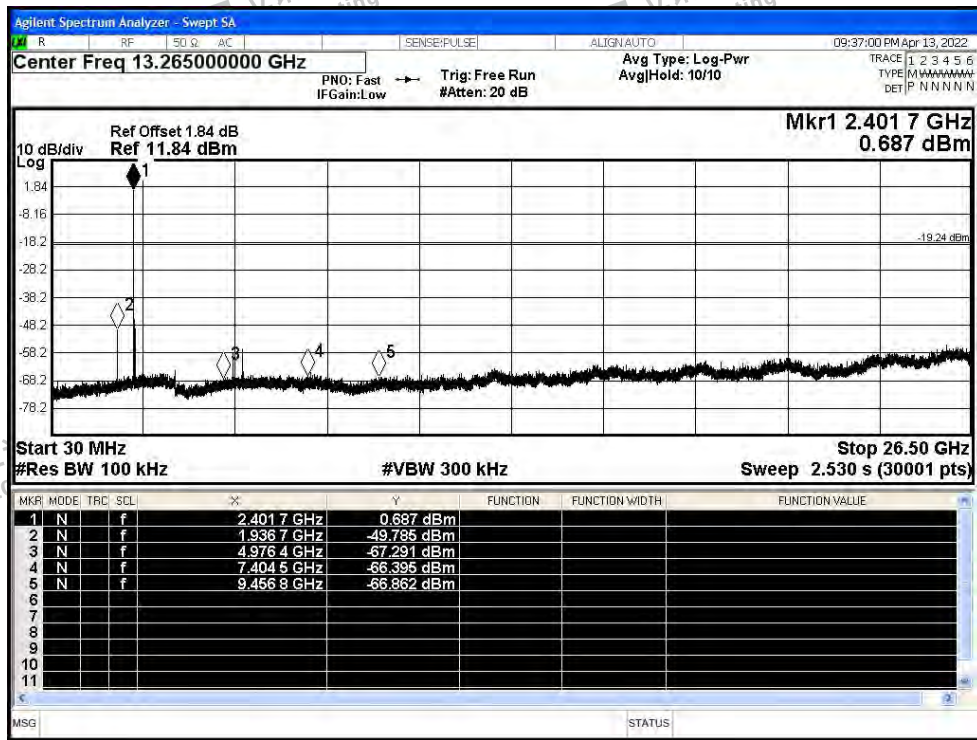




Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref

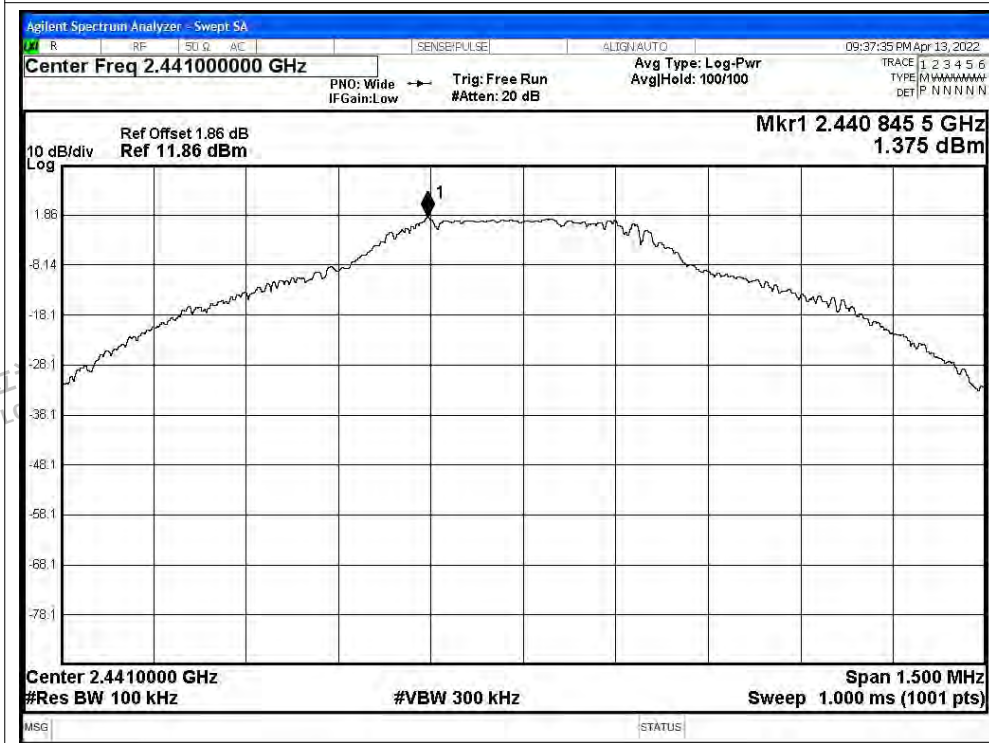

Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

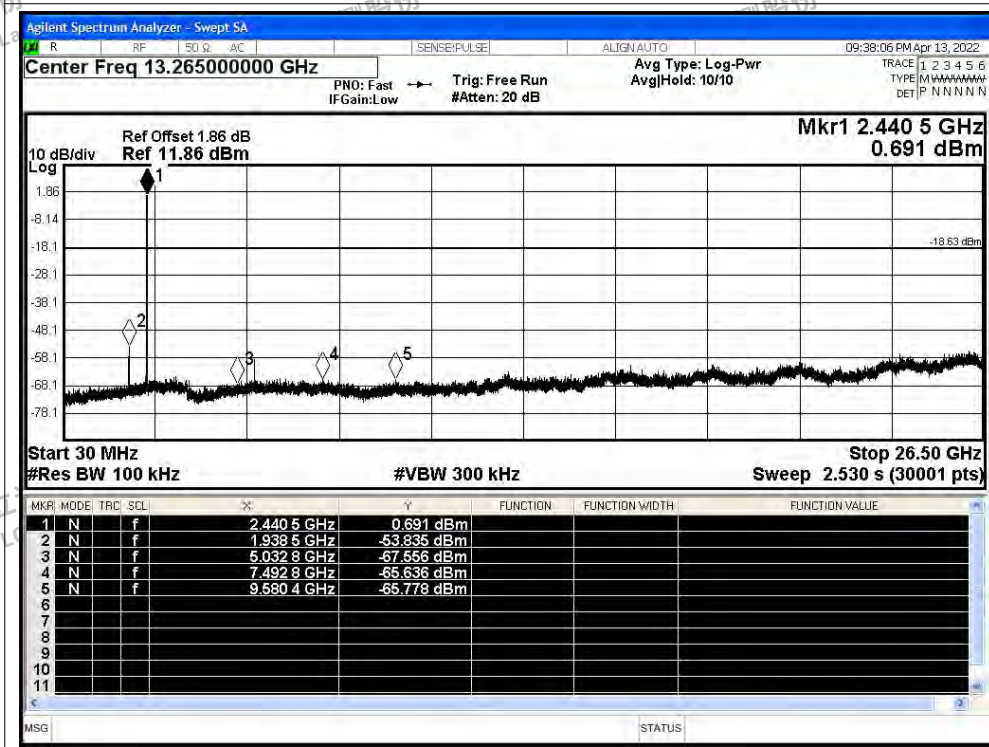

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

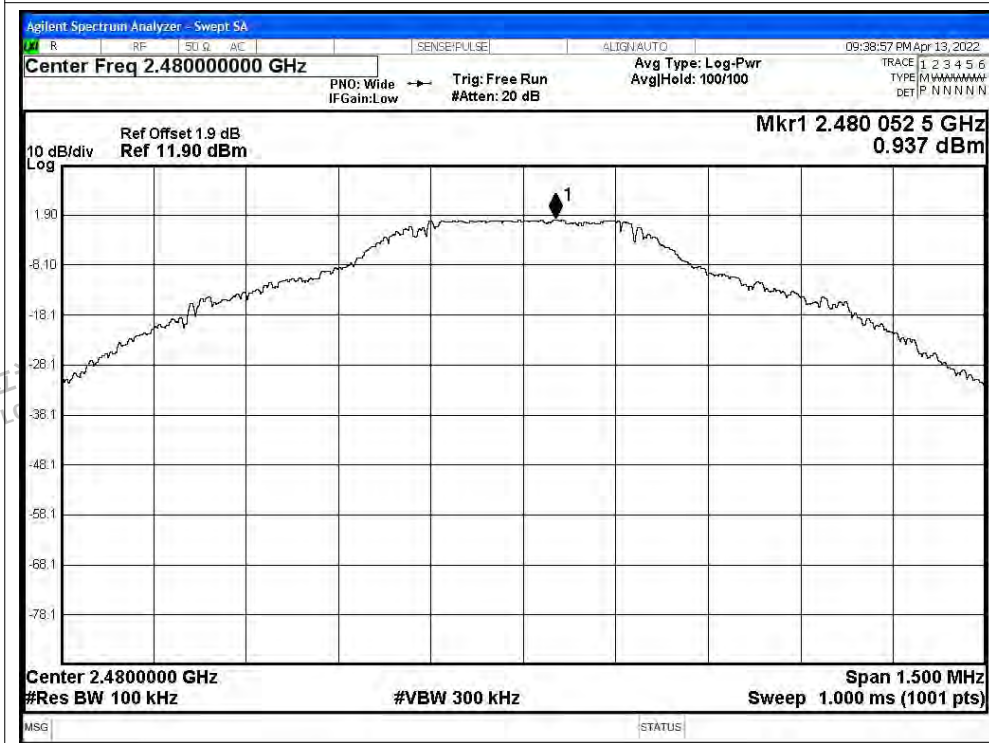


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

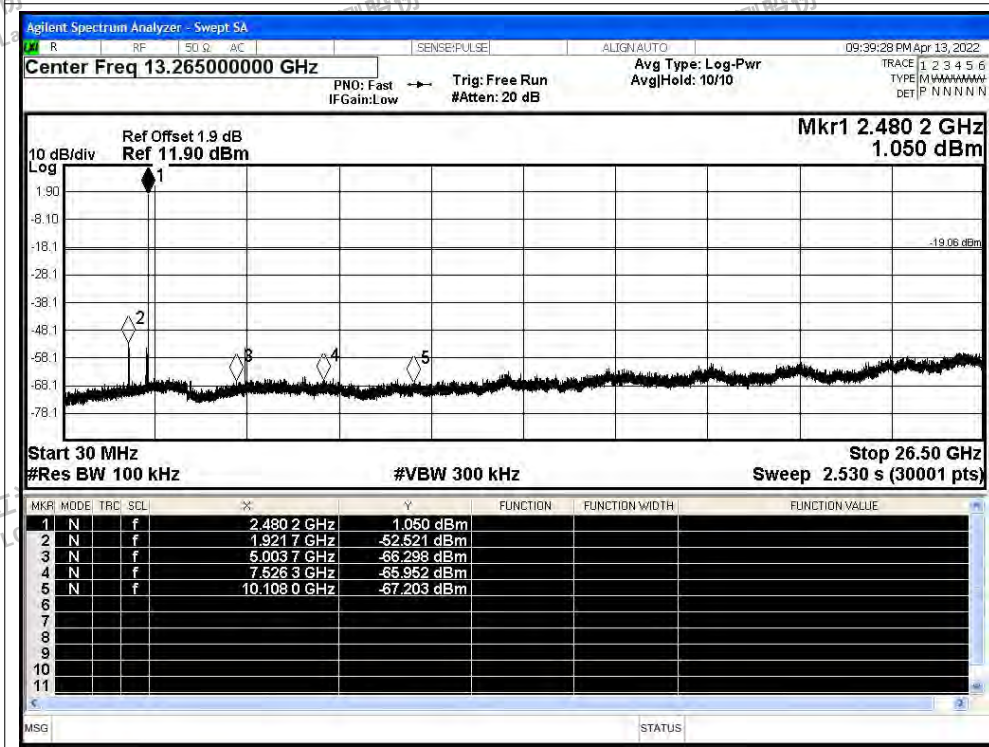




Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

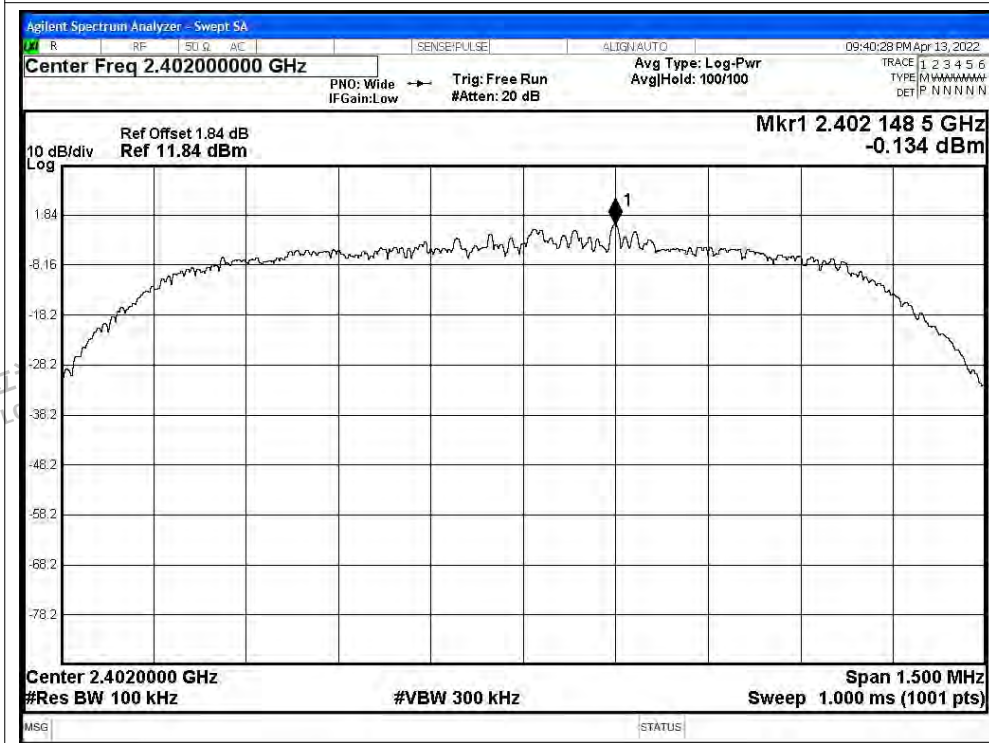


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

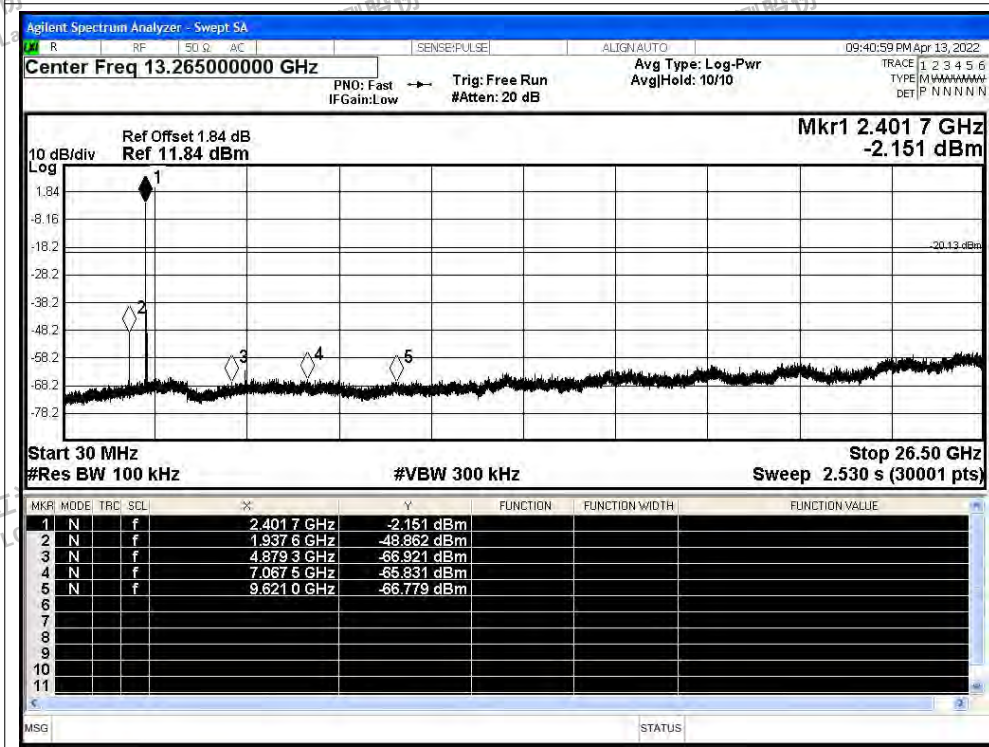




Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

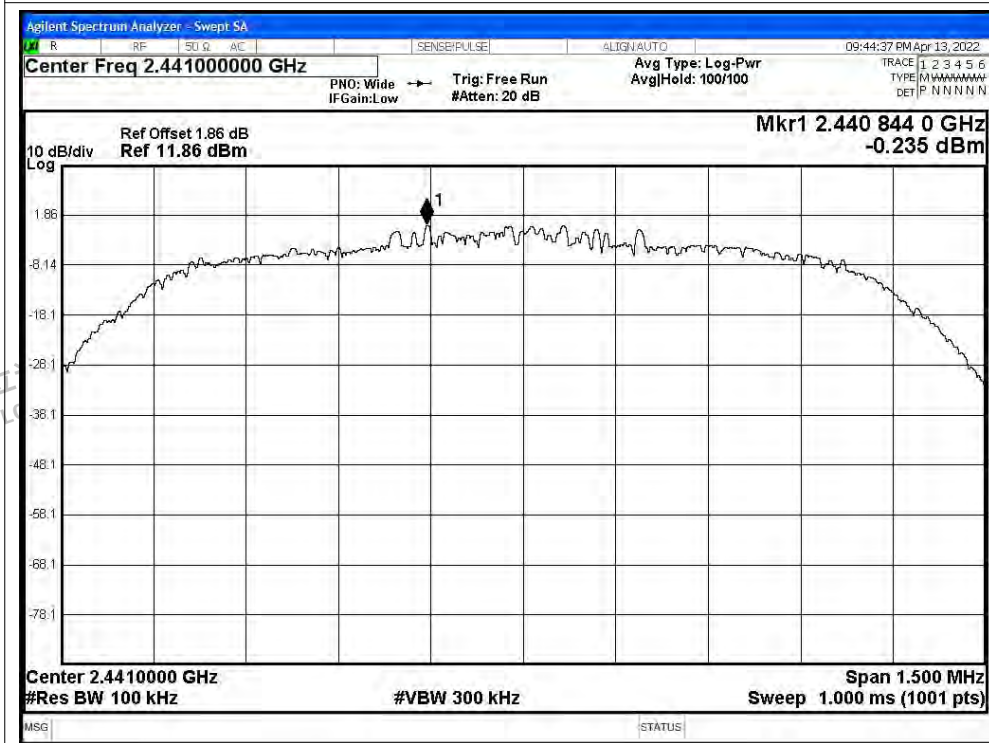


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

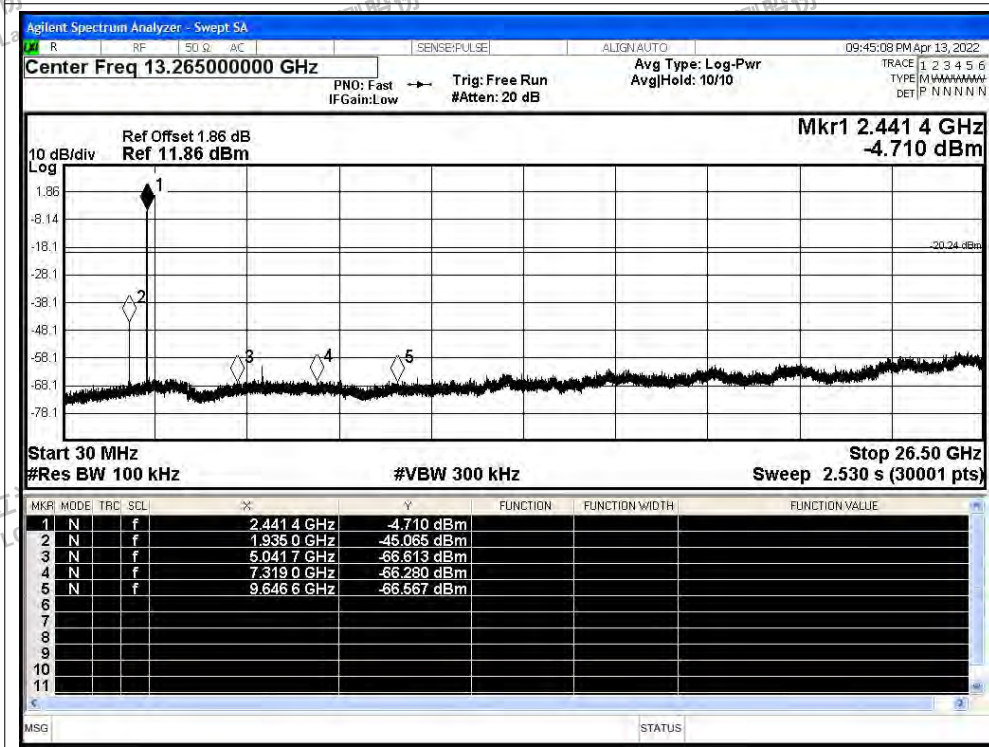




Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

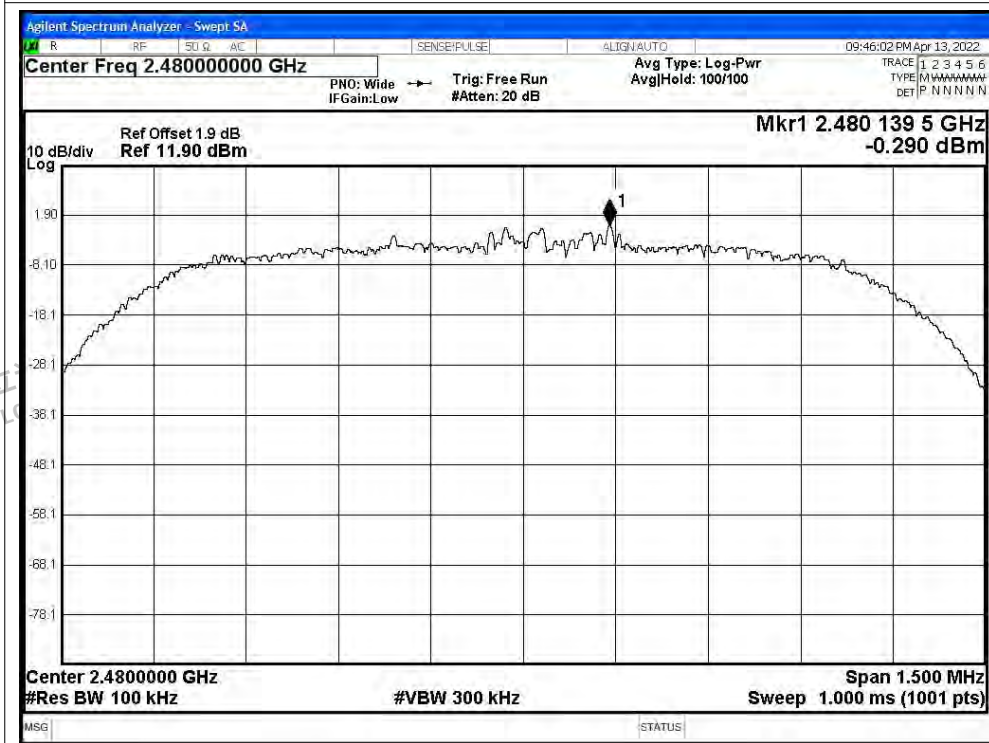

Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

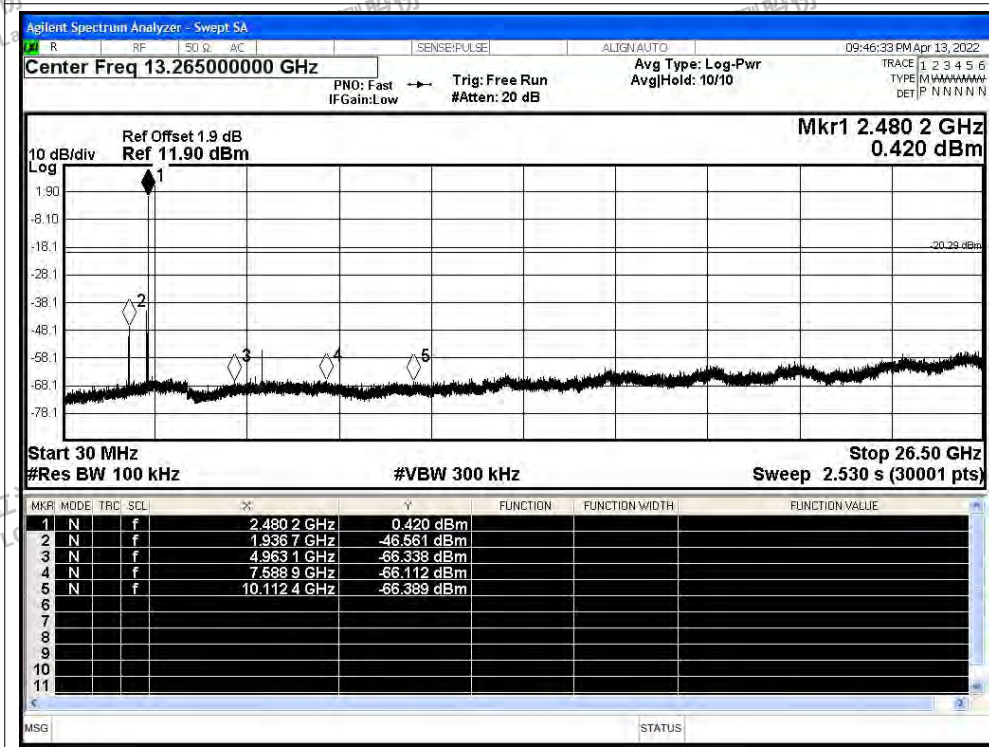

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

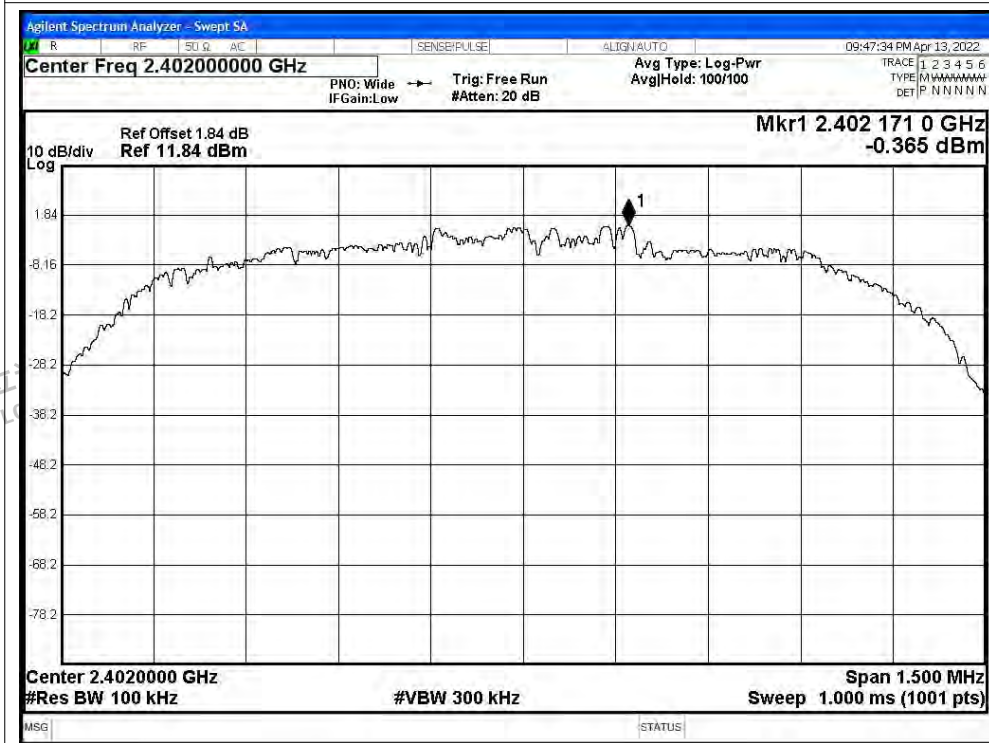


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

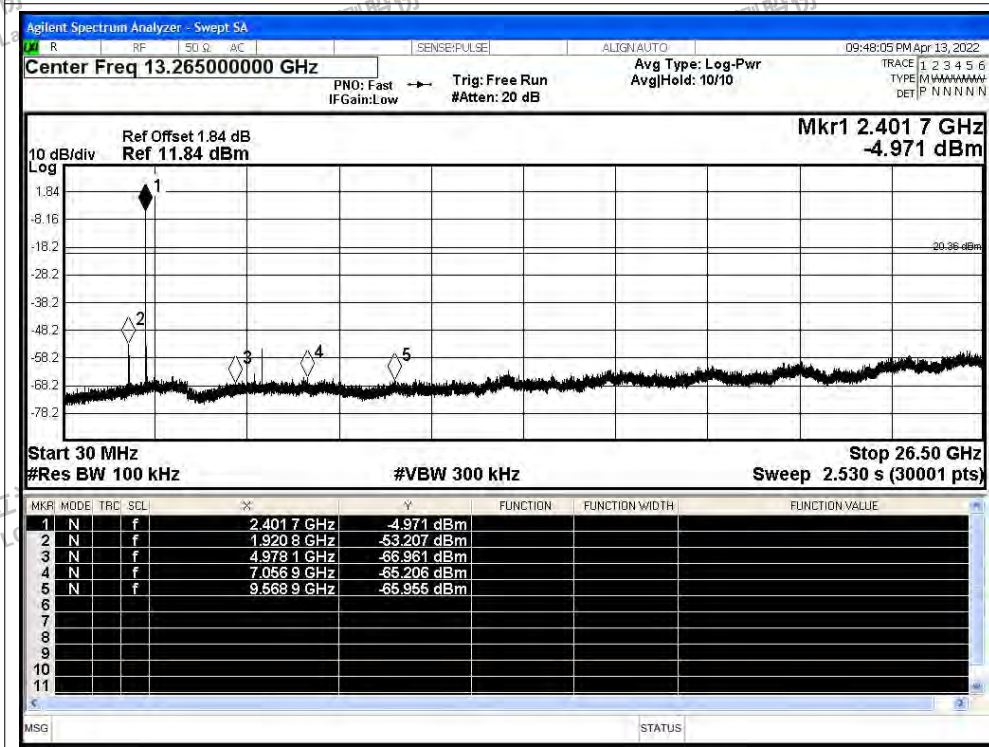





Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref

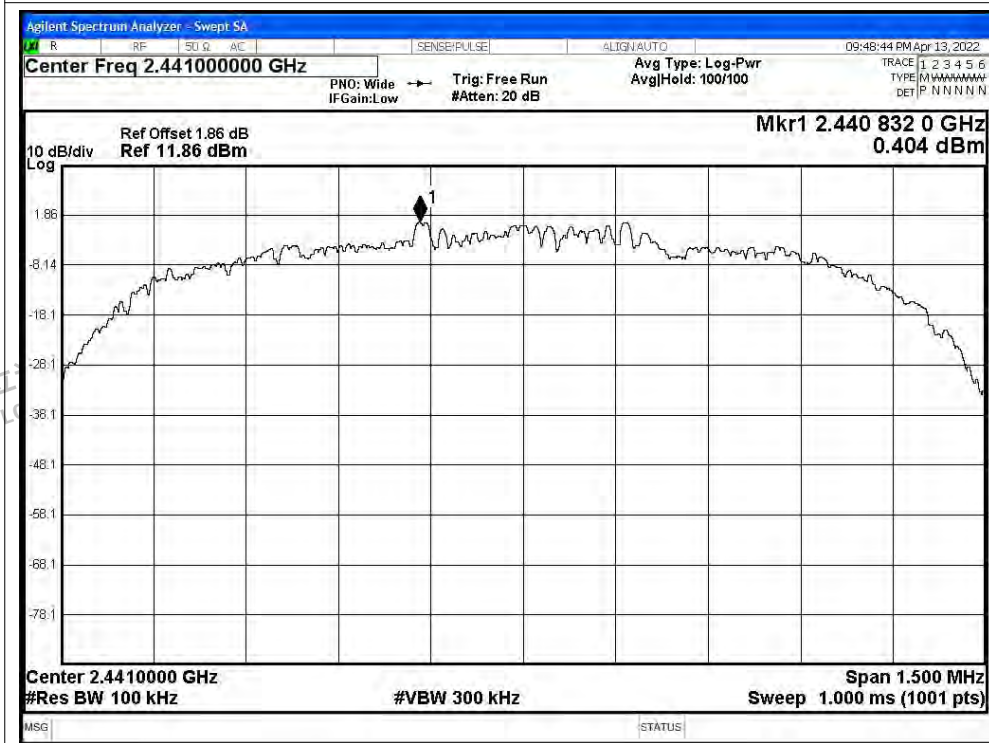


Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

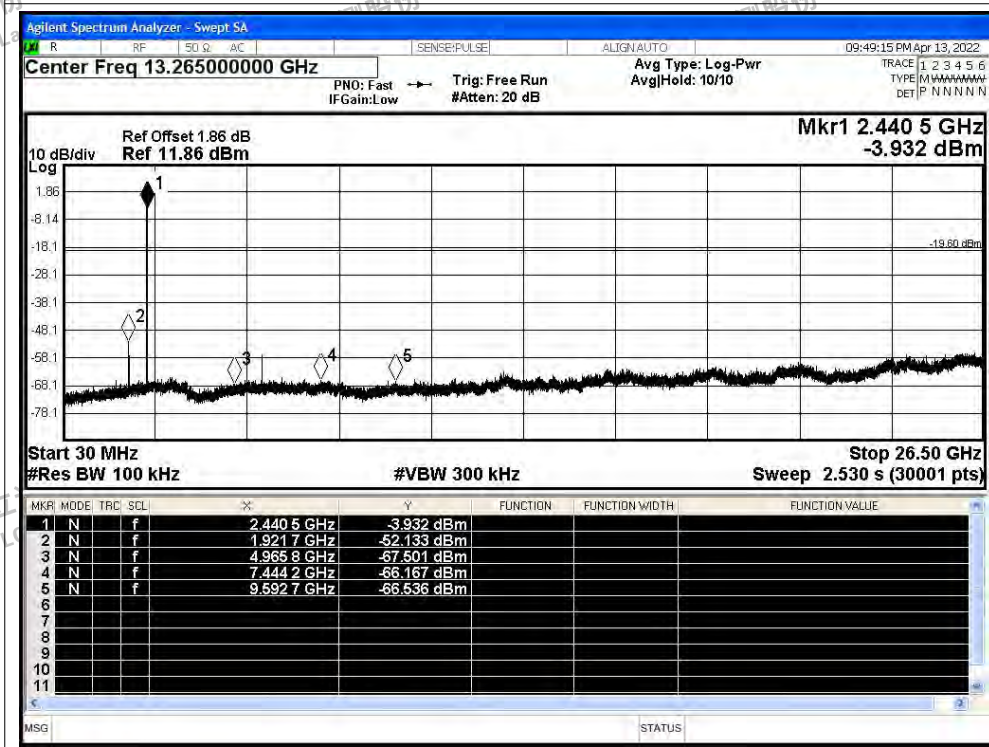

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

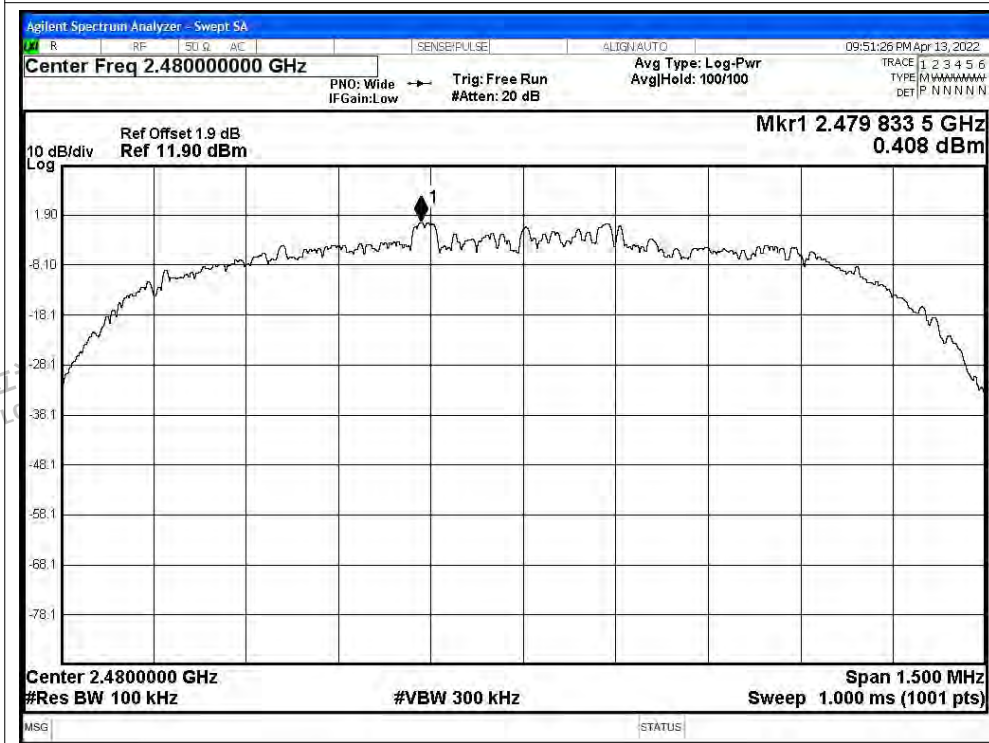

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

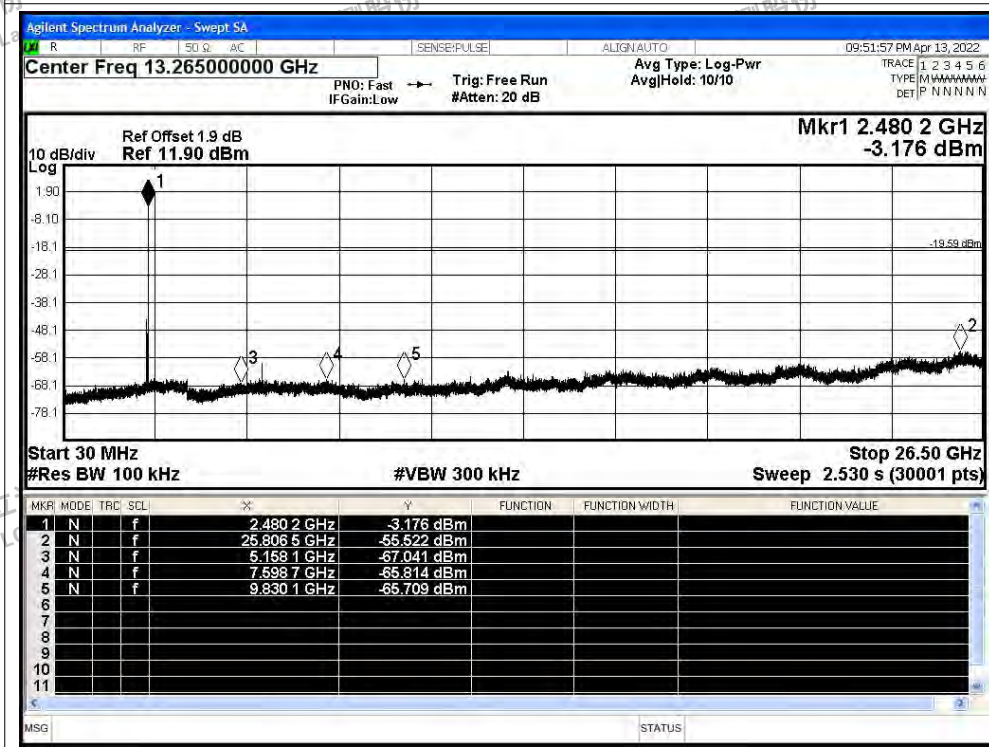



A.9 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	2310	-51.46	2	45.8	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2310	-60.82	2	36.44	Average	54	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2336.016	-47.89	2	49.37	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2375.472	-60.24	2	37.02	Average	54	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2390	-51.69	2	45.57	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2390	-60.31	2	36.95	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.5	-51.81	2	45.45	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.5	-59.73	2	37.53	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2498.656	-47.54	2	49.72	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.512	-59.73	2	37.53	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2500	-49.06	2	48.2	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2500	-59.99	2	37.27	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2310	-50.94	2	46.32	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2310	-60.81	2	36.45	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2389.104	-47.68	2	49.58	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2379.024	-60.14	2	37.12	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2390	-49.96	2	47.3	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2390	-60.41	2	36.85	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.5	-50.09	2	47.17	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.5	-59.78	2	37.48	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2487.688	-46.93	2	50.33	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.584	-59.67	2	37.59	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2500	-49.99	2	47.27	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2500	-60.03	2	37.23	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2310	-50.19	2	47.07	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2310	-60.75	2	36.51	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2385.84	-47.46	2	49.8	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2384.976	-60.29	2	36.97	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2390	-50.89	2	46.37	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2390	-60.46	2	36.8	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.5	-49.47	2	47.79	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.5	-59.74	2	37.52	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2484.592	-47.27	2	49.99	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2484.112	-59.67	2	37.59	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2500	-50.26	2	47	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2500	-60.11	2	37.15	Average	54	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




Test Graphs

Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Peak

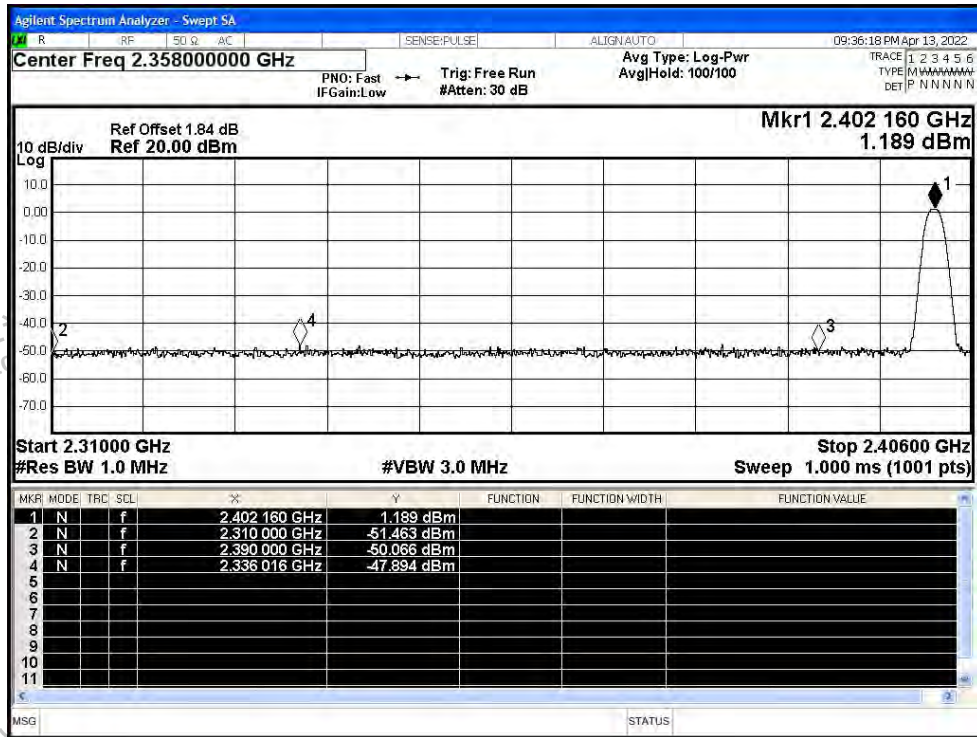


Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Average

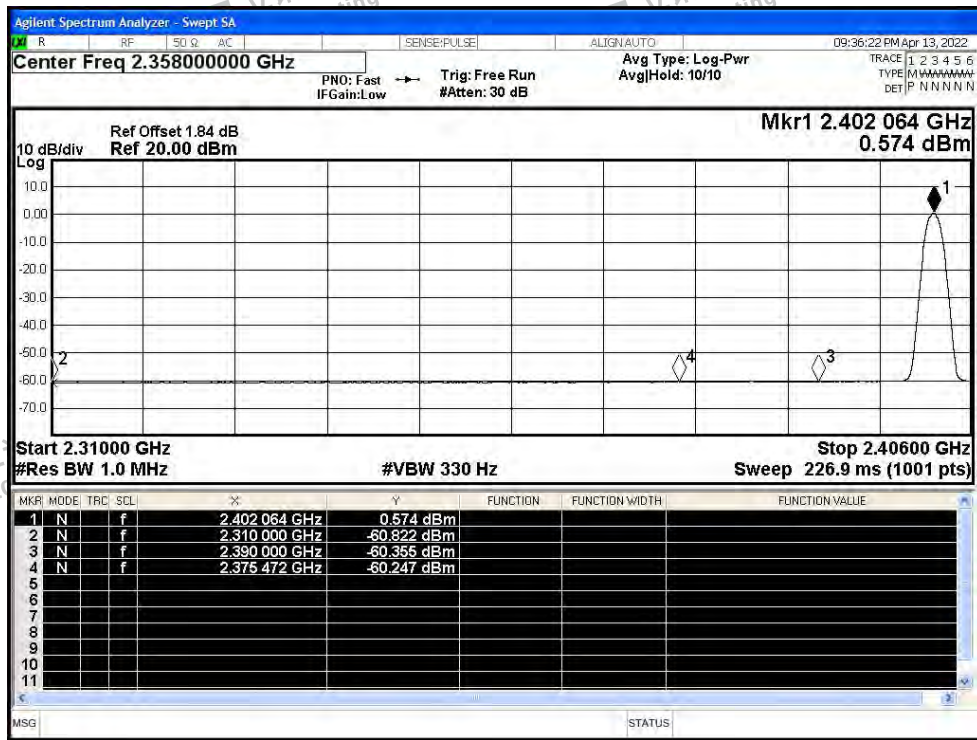




Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Peak

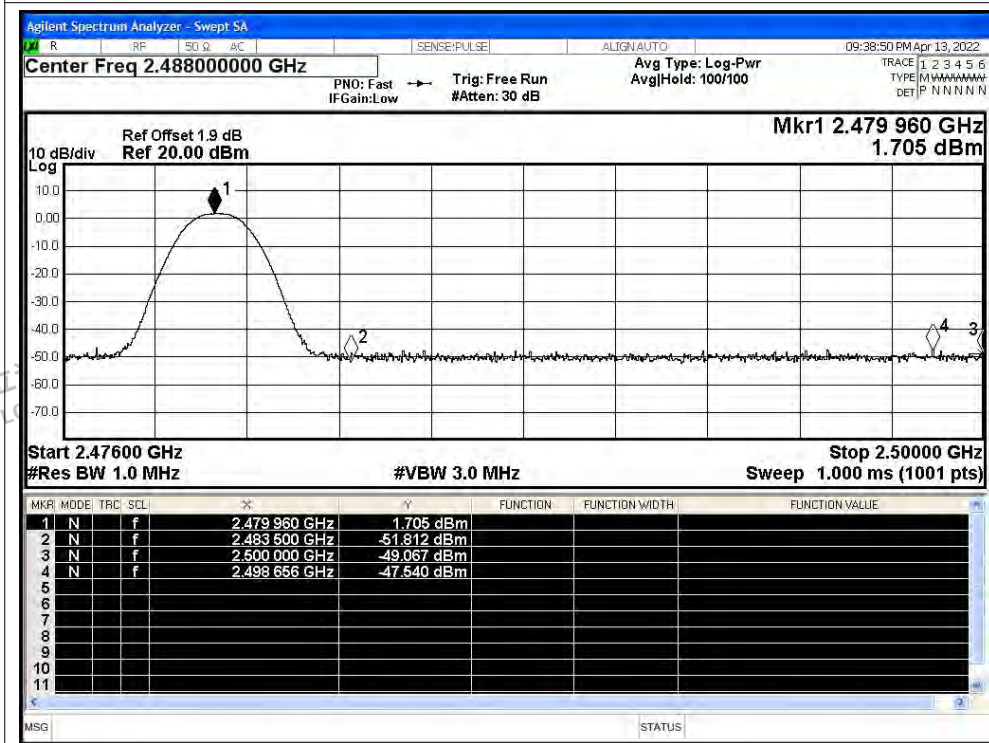


Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Average

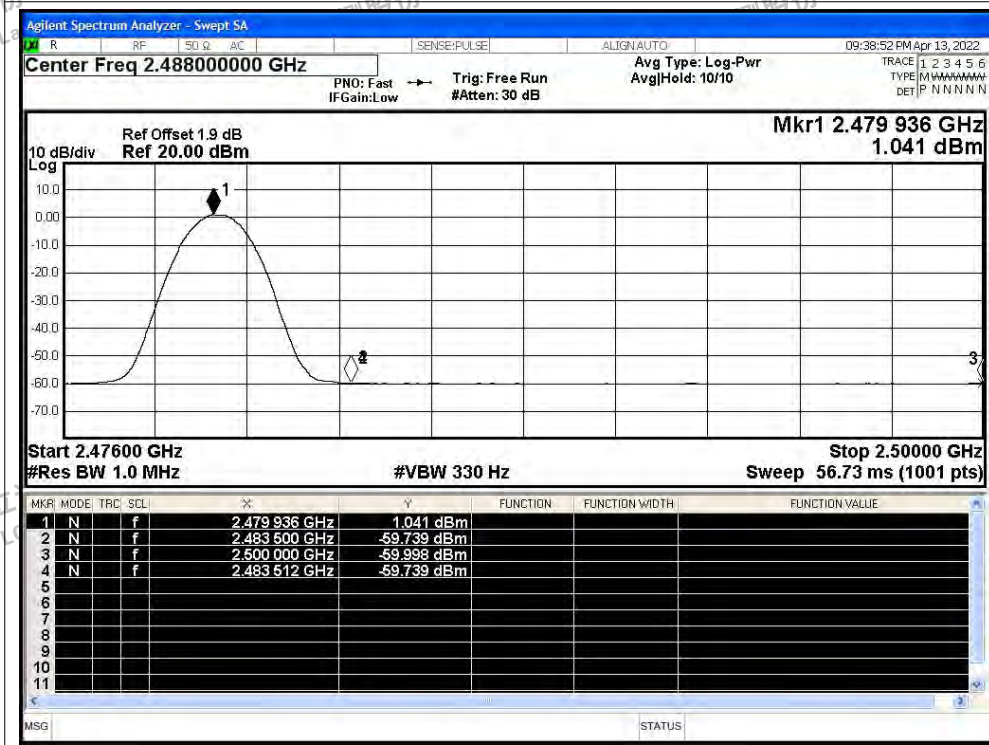




Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Peak

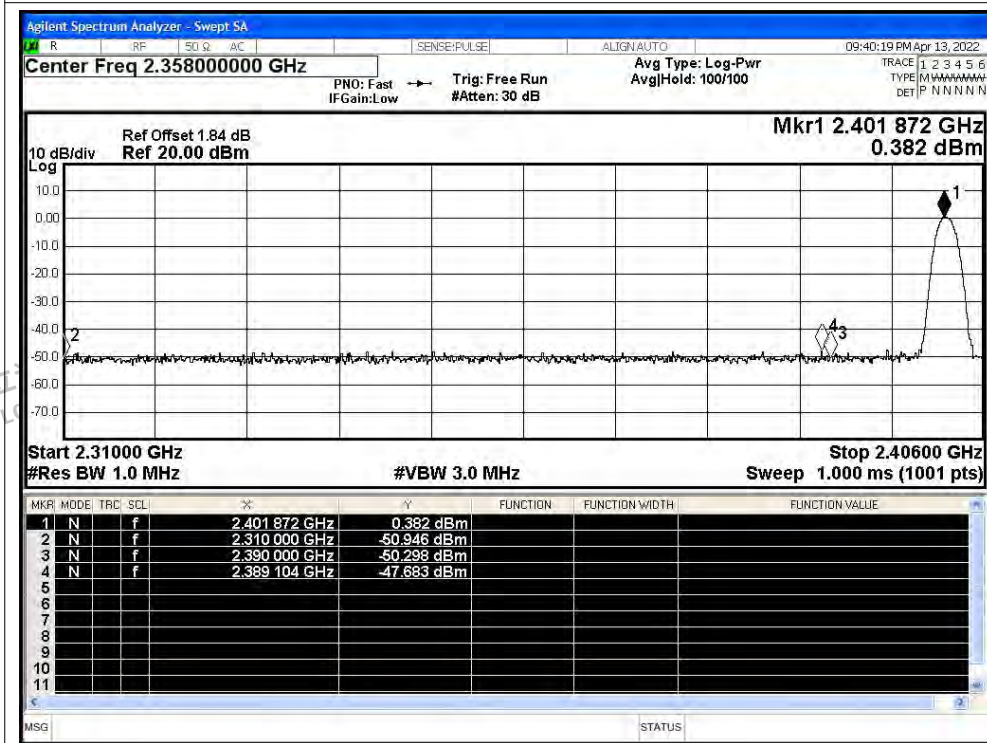


Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Average

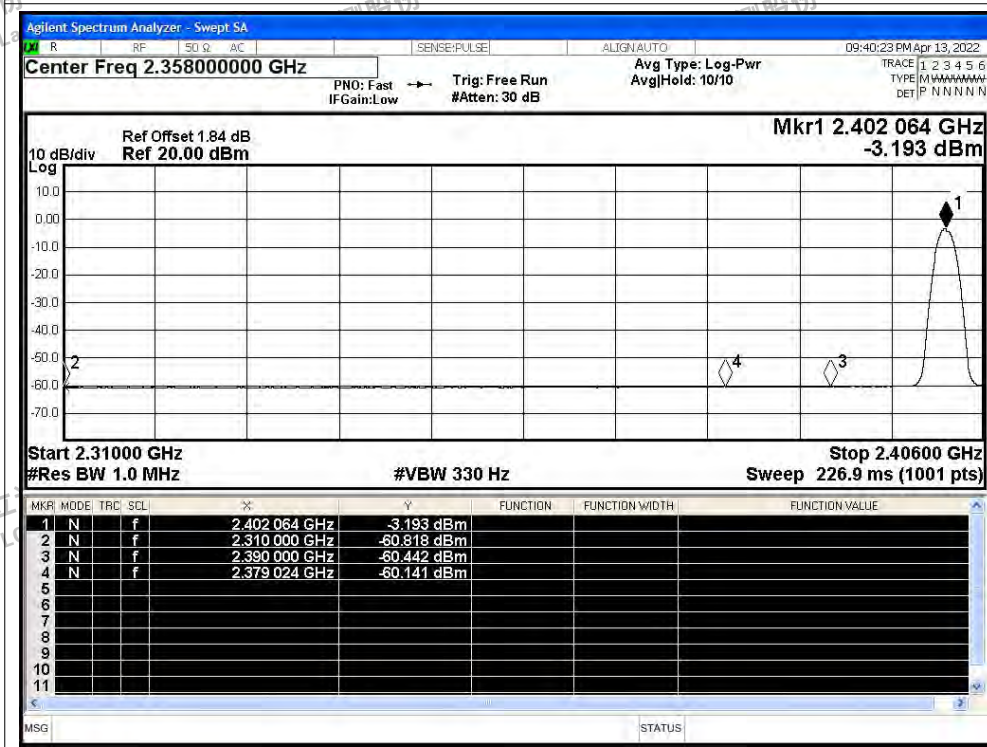




Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Peak

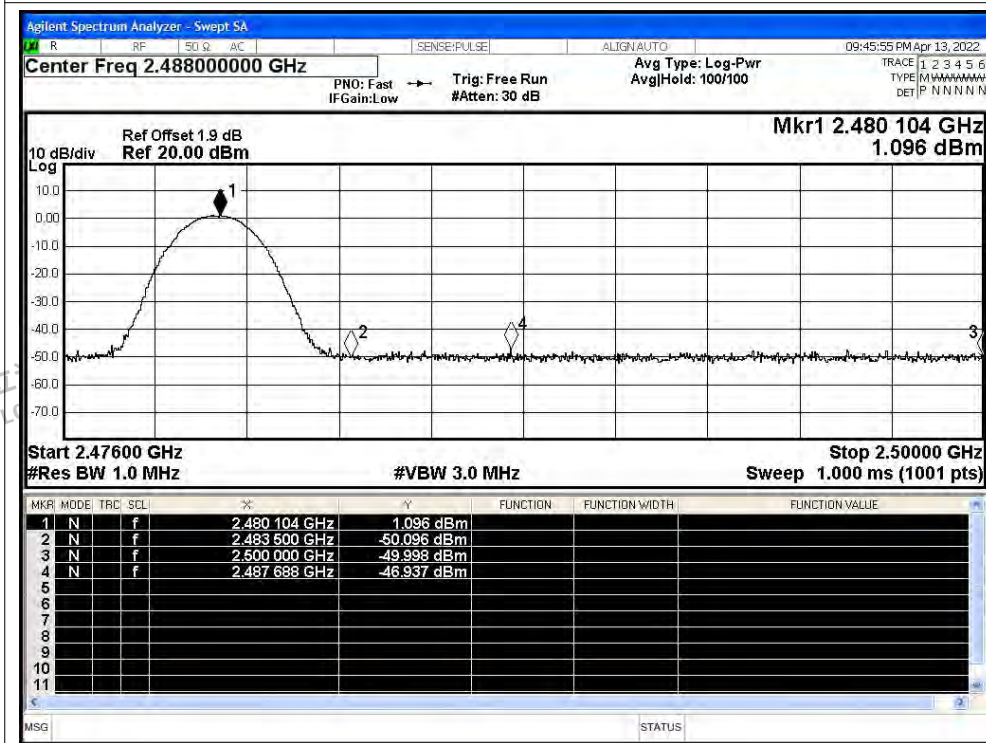

Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Average

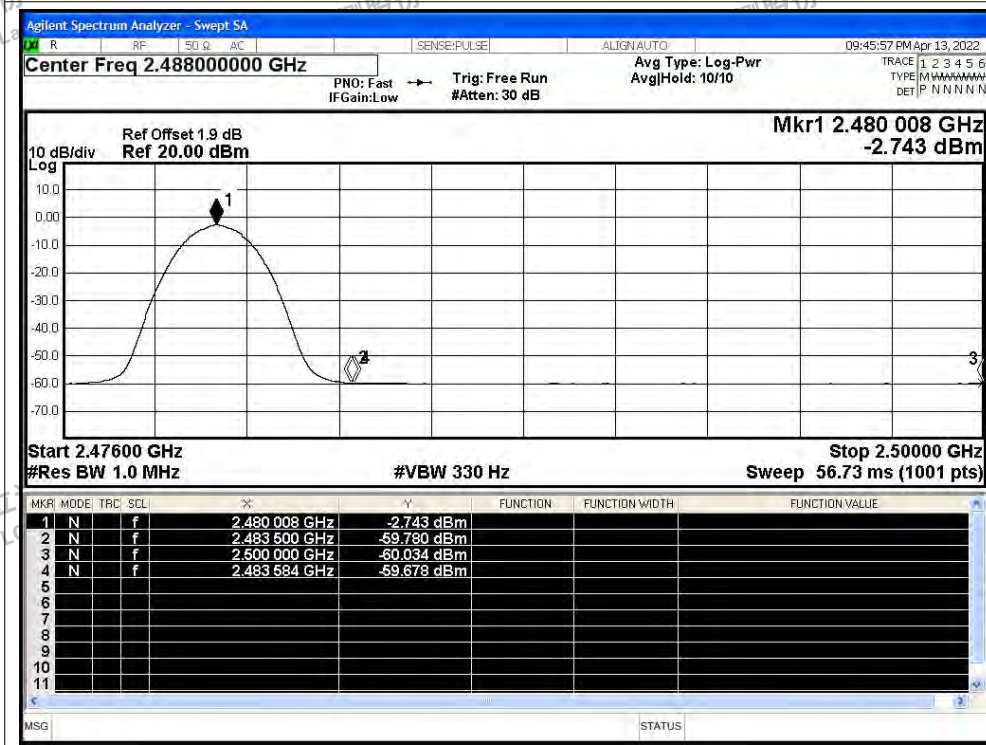

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Peak

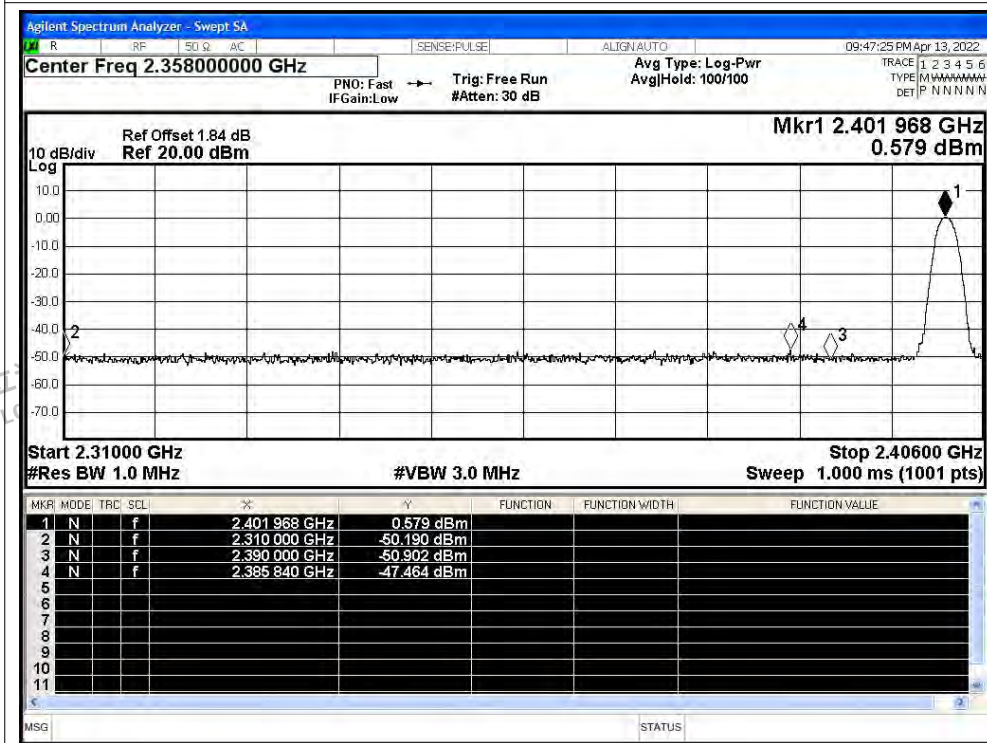


Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Average

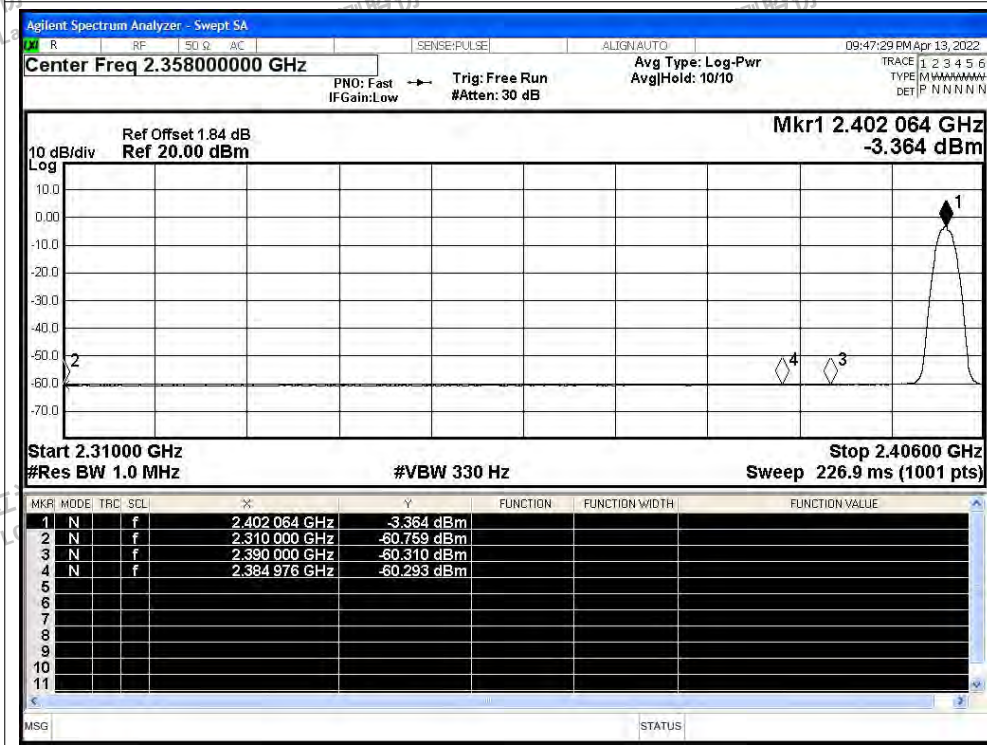




Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Peak

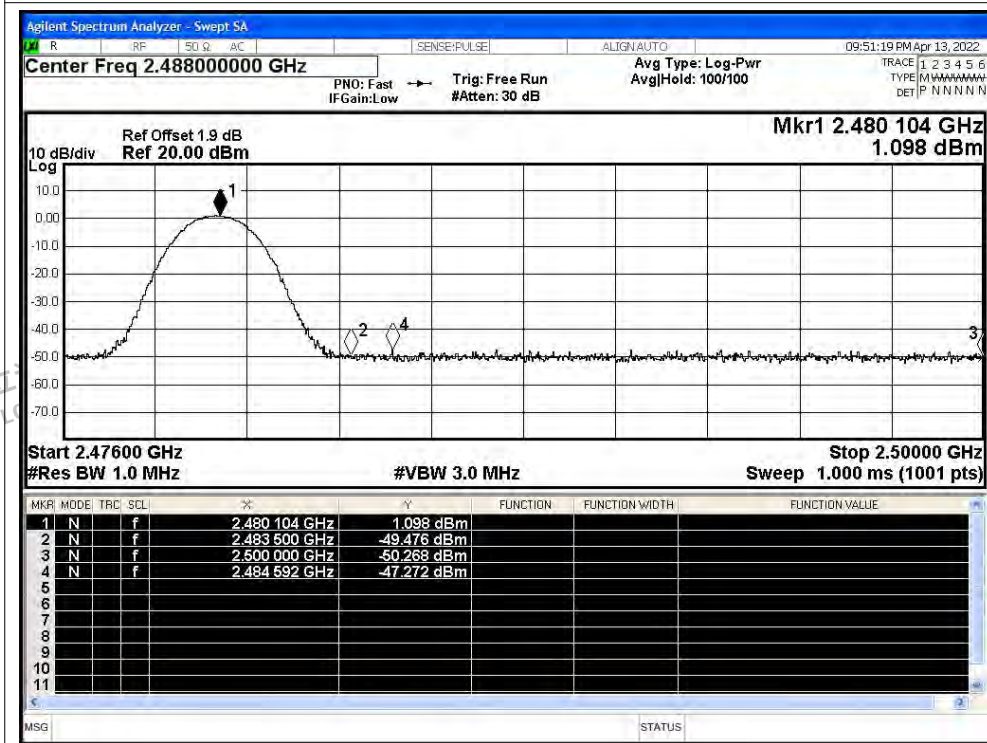

Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Average

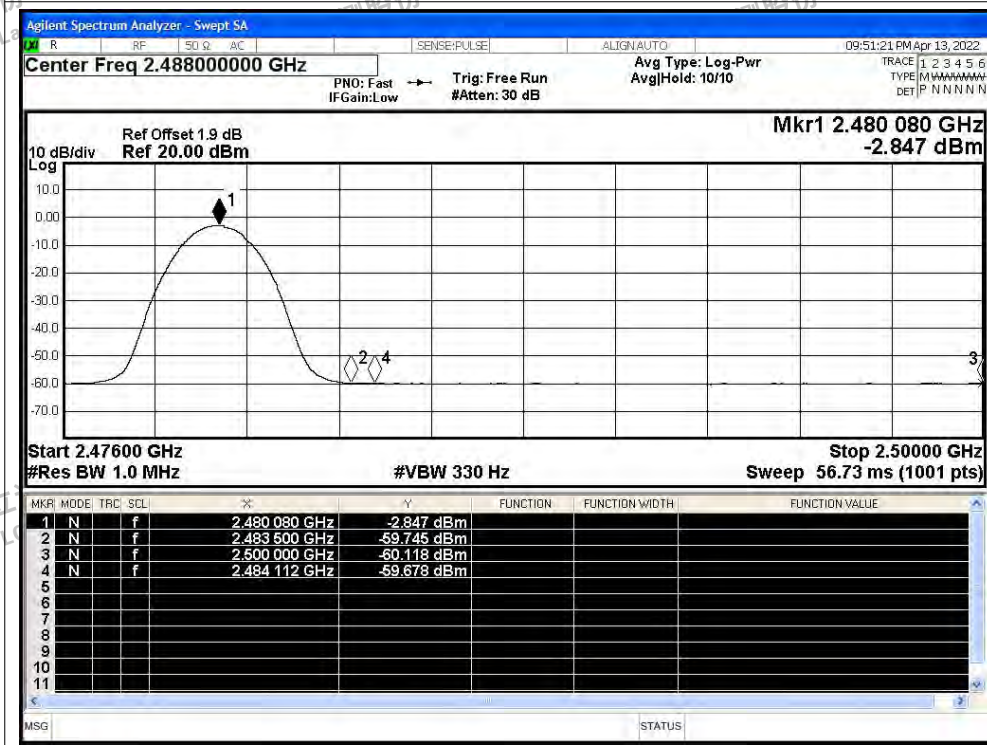

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity