

TEST REPORT

Applicant Name : Shenzhen Junge Yunchuang Technology Co., Ltd.
Address : 1204, Unit 3, Building C, Fu Gui Yuan, Fu Gui Road, Fu Hua
Community, Xixiang Street, Baoan District, Shenzhen, China
Report Number : RA230324-14579E-RF-00A
FCC ID: 2A3FP-P11

Test Standard (s)
FCC PART 15.247

Sample Description

Product Type: Projector
Model No.: PJ-SK500W, F501, F502, F503, F504, F505, F506
Trade Mark: N/A
Date Received: 2023-03-24
Date of Test: 2023-04-13 to 2023-05-31
Report Date: 2023-05-31

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Bob. Liao

Bob Liao
EMC Engineer

Approved By:

Candy. Li

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86 755-26503290 Fax: +86 755-26503290 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
SPECIAL ACCESSORIES	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS.....	10
TEST EQUIPMENT LIST	11
FCC §1.1310 & §2.1091- RF EXPOSURE.....	12
FCC §15.203 – ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP.....	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	16
FACTOR & OVER LIMIT CALCULATION.....	16
TEST DATA	16
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	19
APPLICABLE STANDARD	19
EUT SETUP.....	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	20
FACTOR & MARGIN CALCULATION	20
TEST DATA	20
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST DATA	26
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH.....	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST DATA	30
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST DATA	40
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	43

APPLICABLE STANDARD	43
TEST PROCEDURE	43
TEST DATA	43
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	53
APPLICABLE STANDARD	53
TEST PROCEDURE	53
TEST DATA	53
FCC §15.247(d) - BAND EDGES TESTING	59
APPLICABLE STANDARD	59
TEST PROCEDURE	59
TEST DATA	59

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230324-14579E-RF-00A	Original Report	2023-05-31

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product Type	Projector
Tested Model	PJ-SK500W
Multiple Model	F501, F502, F503, F504, F505, F506
Model Difference	Please refer to DOS Letter
Frequency Range	Bluetooth:2402-2480MHz
Maximum Conducted Peak Output Power	-1.26dBm
Modulation Technique	BDR(GFSK)/EDR($\pi/4$ -DQPSK)/EDR(8DPSK)
Antenna Specification*	Internal Antenna: -0.68dBi(provided by the applicant)
Voltage Range	AC 100-240V
Sample number	RA230324-14579E-RF-S1(CE&RE) RA230324-14579E-RF-S2(RF Conducted Test) (Assigned by ATC, Shenzhen)
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.71dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.74B
Emissions, Radiated	30MHz - 1GHz	5.08dB
	1GHz - 18GHz	4.96dB
	18GHz - 26.5GHz	5.16dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 30241.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

Software “fcc assist1.0.2.2**” was used during testing and the power level was 10*.

Special Accessories

The AC power cable and HDMI Cable with ferrite cord.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
LENOVO	Notebook	ThinkPad x240	SL10F31638JS
Hasee	Notebook	CV15S01	K6406H01120953
Unknown	Earphone	Unknown	Unknown
Unknown	Passive speaker	Unknown	Unknown
Kingston	USB flash disk	DTKN	Unknown
Unknown	SD Card	Unknown	Unknown

External I/O Cable

Cable Description	Length(m)	From/Port	To
Un-shielding Detachable AC Cable	1.4	EUT	L.I.S.N
Shielding Detachable HDMI Cable	1.2	EUT	Notebook
Un-shielding Detachable VAG Cable	1.0	EUT	Notebook
Un-shielding Detachable Earphone Cable	1	EUT	Earphone
Un-shielding Detachable AV Cable	0.9	EUT	Passive speaker


Block Diagram of Test Setup

For Conducted Emission

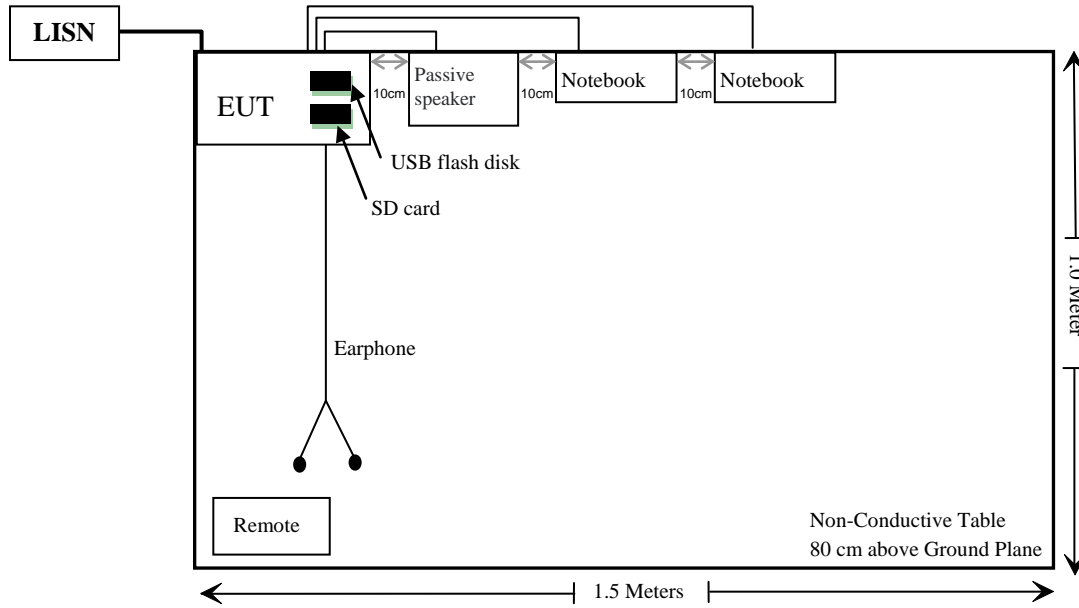


For Radiated Emission

Below 1G

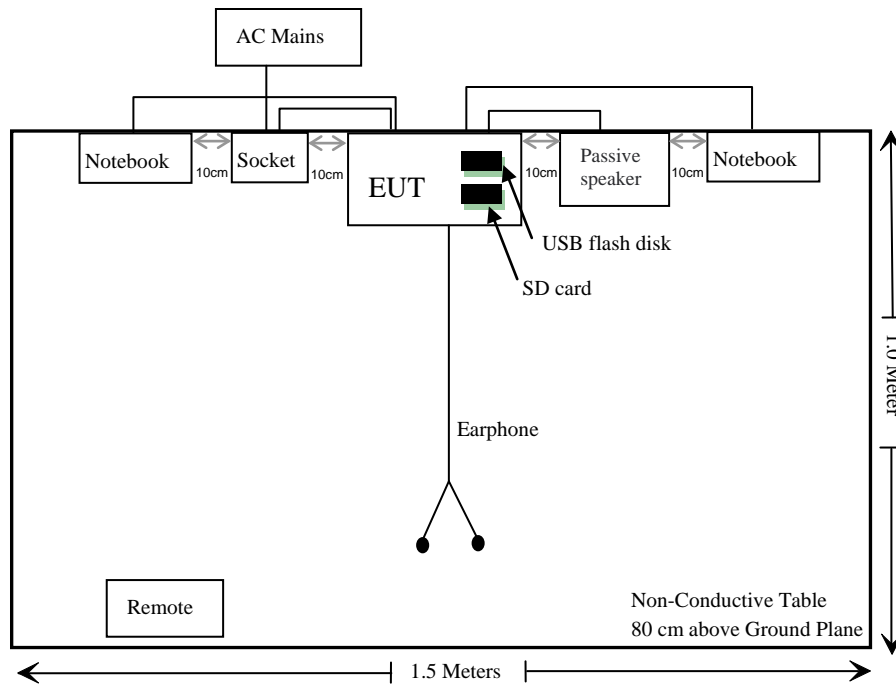

Note: the support table edge was flush with center of turntable

Above 1G

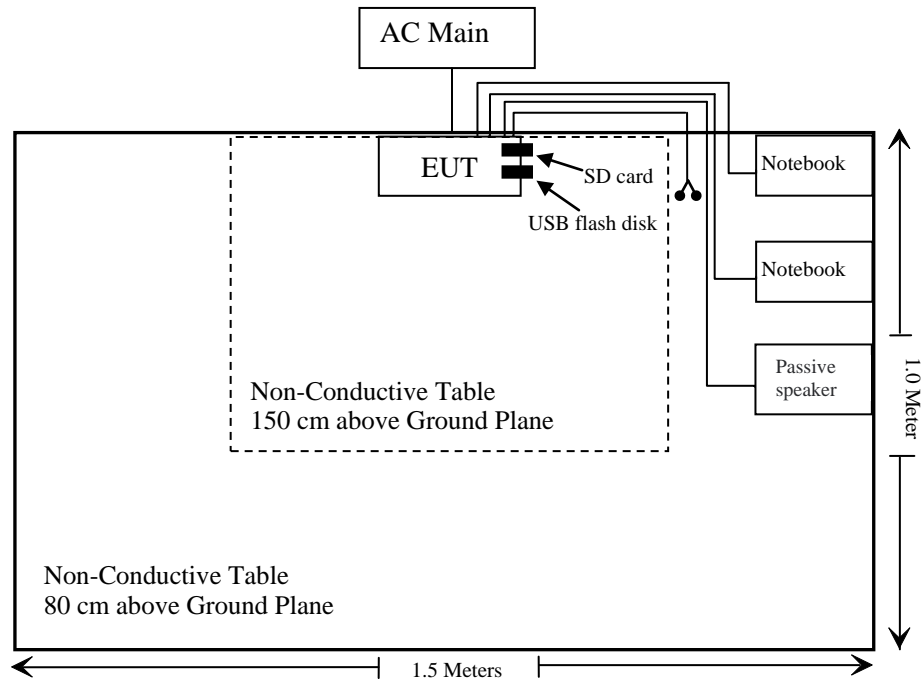

Note: the support table edge was flush with center of turntable

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2022/11/25	2023/11/24
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2022/12/07	2023/12/06
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Conducted Emission Test Software: e3 191218 (V9)					
Radiated Emissions Test					
Rohde & Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-194	2023/02/14	2026/02/13
Schwarzbeck	Horn Antenna	BBHA9120D	837	2023/02/22	2026/02/21
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2022/12/26	2025/12/25
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2022/11/25	2023/11/24
Radiated Emission Test Software: e3 191218 (V9)					
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2022/11/25	2023/11/24
Rohde & Schwarz	Open Switch and Control Unit	OSP120 + OSP-B157	101244 + 100866	2022/11/25	2023/11/24
WEINSCHHEL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091- RF EXPOSURE

Applicable Standard

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.4 –MPE-Based Exemption:

An alternative to the SAR-based exemption is provided in § 1.1307(b)(3)(i)(C), for a much wider frequency range, from 300 kHz to 100 GHz, applicable for separation distances greater or equal to $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. The MPE-based test exemption condition is in terms of ERP, defined as the product of the maximum antenna gain and the delivered maximum time-averaged power. For this case, a RF source is an RF exempt device if its ERP (watts) is no more than a frequency-dependent value, as detailed tabular form in Appendix B. These limits have been derived based on the basic specifications on Maximum Permissible Exposure (MPE) considered for the FCC rules in § 1.1310(e)(1).

Table to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2f$.
1,500-100,000	$19.2R^2$.

f = frequency in MHz;

R = minimum separation distance from the body of a nearby person (appropriate units, e.g., m);

Test result

For worst case:

Mode	Frequency Range (MHz)	Tune-up Output Power		Antenna Gain		ERP		Evaluation Distance (cm)	MPE-Based Exemption Threshold (W)
		(dBm)	(mW)	(dBi)	(dBd)	(dBm)	(W)		
BT	2402-2480	-1	0.79	-0.68	-2.83	-3.83	0.0004	20	0.768
2.4G Wi-Fi	2412-2462	19	79.43	3.35	1.2	20.2	0.1047	20	0.768
5G Wi-Fi	5150-5250	14.5	28.18	1.88	-0.27	14.23	0.0265	20	0.768

Note 1: The tune-up power was declared by the applicant.

Note 2: 0dBd=2.15dBi.

Note 3: The BT function can transmit at the same time with the Wi-Fi function.

Simultaneous transmitting consideration:

The ratio= $MPE_{BT}/limit + MPE_{2.4G\ Wi-Fi}/limit = 0.0004/0.768 + 0.1047/0.768 = 0.137 < 1.0$

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is -0.68dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

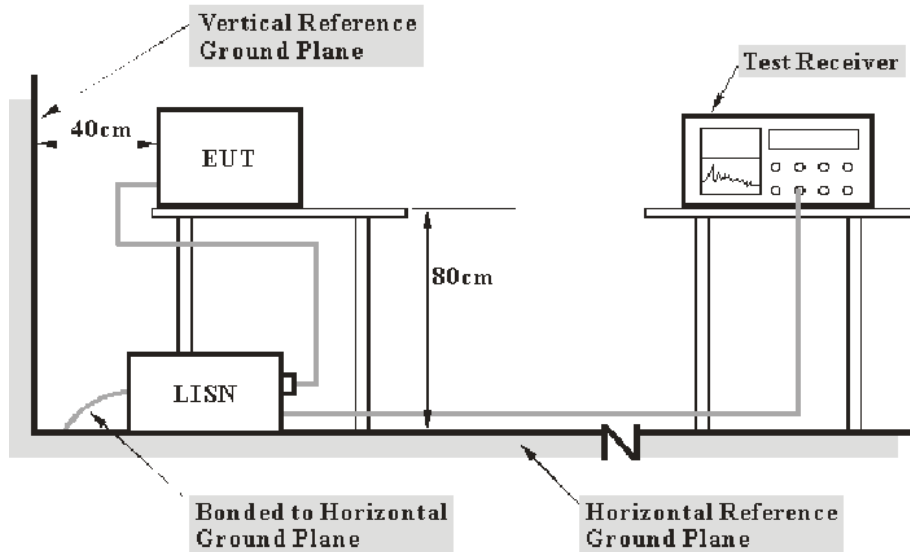

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Data


Environmental Conditions

Temperature:	22°C
Relative Humidity:	59%
ATM Pressure:	101kPa

The testing was performed by Jerry Wu on 2023-04-26.

EUT operation mode: Full load + BT Transmitting (worst case 8DPSK low channel)


AC 120V/60 Hz, Line

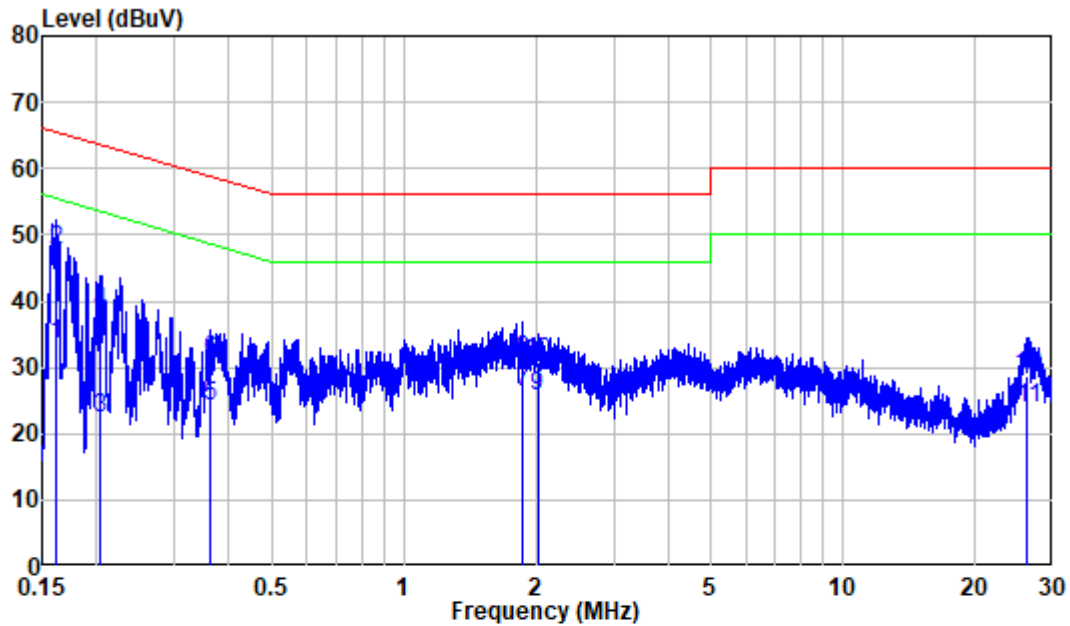

Site : Shielding Room
 Condition: Line
 Job No. : RA230324-14579-RF
 Mode : Full load+BT Transmite
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.162	10.11	23.27	33.38	55.38	-22.00	Average
2	0.162	10.11	37.69	47.80	65.38	-17.58	QP
3	0.203	10.19	12.27	22.46	53.50	-31.04	Average
4	0.203	10.19	28.15	38.34	63.50	-25.16	QP
5	0.361	10.23	13.88	24.11	48.69	-24.58	Average
6	0.361	10.23	20.81	31.04	58.69	-27.65	QP
7	1.861	10.39	15.93	26.32	46.00	-19.68	Average
8	1.861	10.39	20.81	31.20	56.00	-24.80	QP
9	2.013	10.40	15.36	25.76	46.00	-20.24	Average
10	2.013	10.40	20.38	30.78	56.00	-25.22	QP
11	26.261	10.04	13.84	23.88	50.00	-26.12	Average
12	26.261	10.04	18.76	28.80	60.00	-31.20	QP

AC 120V/60 Hz, Neutral


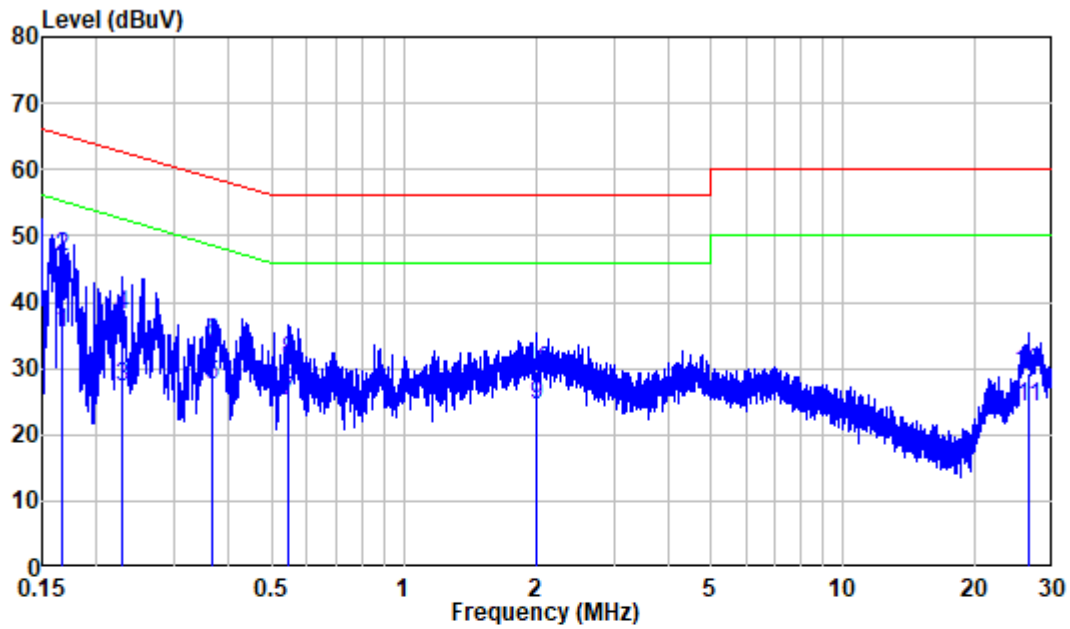


Site : Shielding Room
 Condition: Neutral
 Job No. : RA230324-14579-RF
 Mode : Full load+BT Transmite
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.166	9.68	25.57	35.25	55.15	-19.90	Average
2	0.166	9.68	37.06	46.74	65.15	-18.41	QP
3	0.228	9.70	17.48	27.18	52.52	-25.34	Average
4	0.228	9.70	28.41	38.11	62.52	-24.41	QP
5	0.366	9.73	17.88	27.61	48.60	-20.99	Average
6	0.366	9.73	24.19	33.92	58.60	-24.68	QP
7	0.546	9.77	15.28	25.05	46.00	-20.95	Average
8	0.546	9.77	21.31	31.08	56.00	-24.92	QP
9	2.004	9.80	14.61	24.41	46.00	-21.59	Average
10	2.004	9.80	19.74	29.54	56.00	-26.46	QP
11	26.313	10.07	14.08	24.15	50.00	-25.85	Average
12	26.313	10.07	19.30	29.37	60.00	-30.63	QP

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

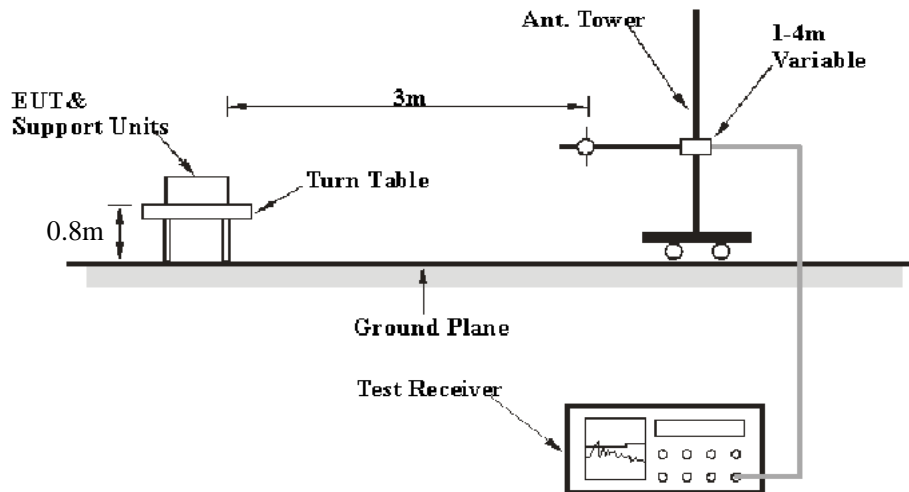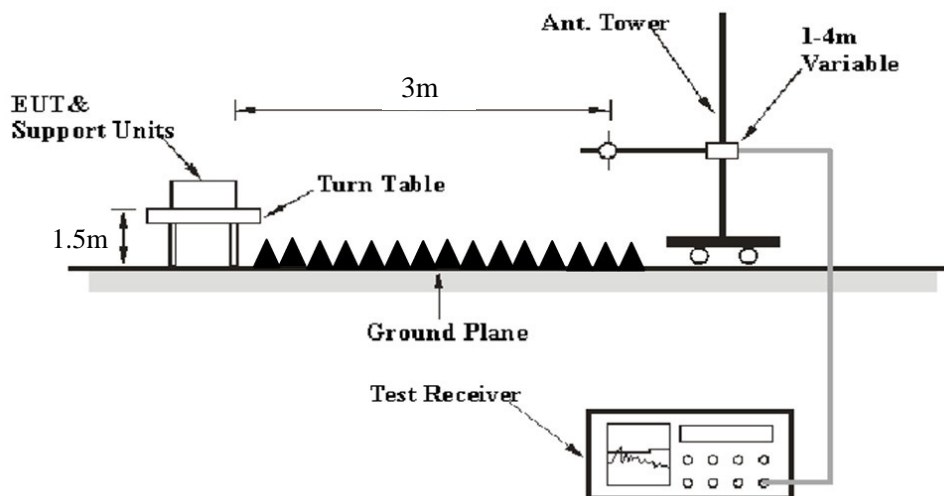EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

If the maximized peak measured value complies with the limit, then it is unnecessary to perform an QP/Average measurement

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	23-24°C
Relative Humidity:	56-57%
ATM Pressure:	101kPa

The Below 1G testing was performed by Jason Liu on 2023-05-12 and the Above 1G testing was performed by Jimi Zheng on 2023-04-13 and 2023-05-31.


EUT operation mode: Full load+ BT Transmitting

Note: Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded

Below 1GHz:

Worst case for 8DPSK, low Channel:


Horizontal

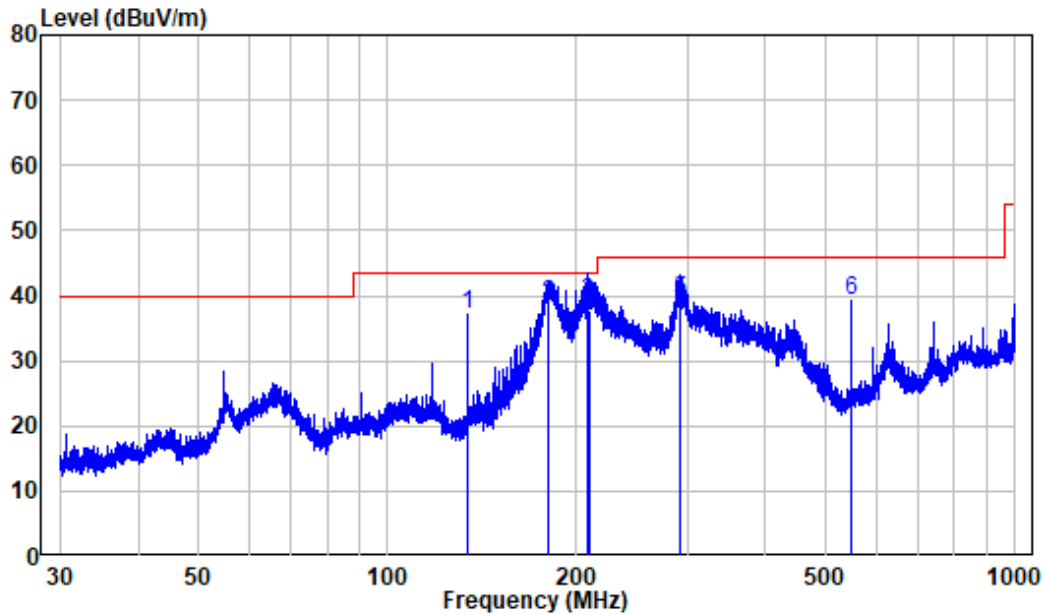

Site : chamber
 Condition: 3m HORIZONTAL
 Job No. : RA230324-14579E-RF
 Test Mode: Full load+BT Transmite

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	134.029	-14.99	51.98	36.99	43.50	-6.51	Peak
2	180.412	-12.63	51.40	38.77	43.50	-4.73	QP
3	207.850	-12.03	51.11	39.08	43.50	-4.42	QP
4	210.325	-12.03	49.79	37.76	43.50	-5.74	QP
5	292.956	-9.22	48.60	39.38	46.00	-6.62	QP
6	547.098	-3.66	42.91	39.25	46.00	-6.75	Peak

Vertical

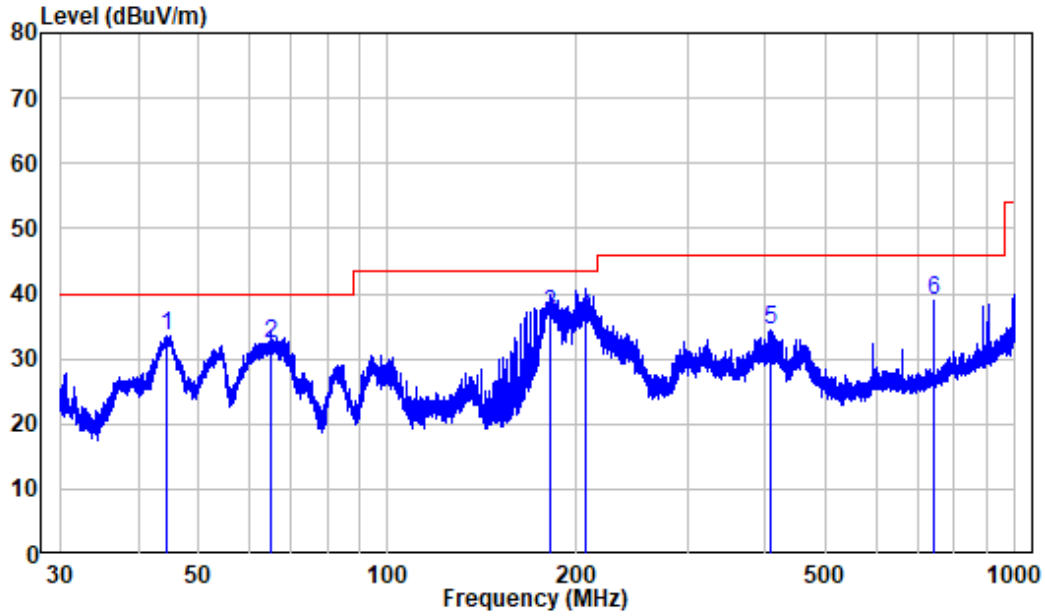

Site : chamber
 Condition: 3m VERTICAL
 Job No. : RA230324-14579E-RF
 Test Mode: Full load+BT Transmite

	Read	Limit	Over				
Freq	Factor	Level	Level	Line			
MHz	dB/m	dBuV	dBuV/m	dBuV/m			
1	44.489	-10.03	43.56	33.53	40.00	-6.47	Peak
2	65.143	-12.65	44.89	32.24	40.00	-7.76	QP
3	181.045	-12.56	49.33	36.77	43.50	-6.73	QP
4	206.760	-12.02	48.21	36.19	43.50	-7.31	QP
5	407.693	-6.07	40.50	34.43	46.00	-11.57	Peak
6	741.934	-0.71	39.59	38.88	46.00	-7.12	Peak

Above 1GHz (worst case for 8DPSK):

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel									
2310	47.11	PK	63	1.5	H	-10.36	36.75	74	-37.25
2310	47.76	PK	307	2.1	V	-10.36	37.4	74	-36.6
2390	53.85	PK	296	1.7	H	-10.71	43.14	74	-30.86
2390	53.57	PK	167	1.4	V	-10.71	42.86	74	-31.14
4804	52.52	PK	296	1.7	H	-6.11	46.41	74	-27.59
4804	54.51	PK	240	2.0	V	-6.11	48.4	74	-25.6
7206	57.86	PK	296	1.7	H	0.05	57.91	74	-16.09
7206	45.26	AVG	194	1.5	H	0.05	45.31	54	-7.02
7206	56.54	PK	240	2.0	V	0.05	56.59	74	-17.41
7206	45.44	AVG	250	1.8	V	0.05	45.49	54	-8.51
9608	56.12	PK	240	2.0	H	3.56	59.68	74	-14.32
9608	41.78	AVG	240	2.2	H	3.56	45.34	54	-8.66
9608	54.1	PK	227	2.1	V	3.56	57.66	74	-16.34
9608	44.21	AVG	227	1.7	V	3.56	47.77	54	-6.23
Middle Channel									
4882	54.01	PK	262	1.8	H	-5.9	48.11	74	-25.89
4882	54.98	PK	269	1.1	V	-5.9	49.08	74	-24.92
7323	59.57	PK	262	1.8	H	0.25	59.82	74	-14.18
7323	44.65	AVG	350	1.4	H	0.25	44.90	54	-9.10
7323	58.34	PK	269	1.1	V	0.25	58.59	74	-15.41
7323	45.52	AVG	162	1.5	V	0.25	45.76	54	-8.24
9764	55.19	PK	269	1.1	H	3.65	58.84	74	-15.16
9764	42.64	AVG	252	1.3	H	3.65	46.29	54	-7.71
9764	53.28	PK	61	1.4	V	3.65	56.93	74	-17.07
9764	42.62	AVG	272	1.6	V	3.65	46.27	54	-7.73
High Channel									
2483.5	51.95	PK	174	2.1	H	-10.55	41.4	74	-32.6
2483.5	59.02	PK	44	1.1	V	-10.55	48.47	74	-25.53
2500	53.2	PK	75	1.4	H	-10.42	42.78	74	-31.22
2500	52.95	PK	336	1.3	V	-10.42	42.53	74	-31.47
4960	54.43	PK	75	1.4	H	-5.47	48.96	74	-25.04
4960	56.38	PK	111	1.2	V	-5.47	50.91	74	-23.09
7440	57.36	PK	75	1.4	H	0.52	57.88	74	-16.12
7440	44.76	AVG	75	1.4	H	0.52	45.28	54	-8.72
7440	57.97	PK	111	1.2	V	0.52	58.49	74	-15.51
7440	44.99	AVG	134	1.6	V	0.52	45.49	54	-8.51
9920	55.7	PK	111	1.2	H	3.88	59.58	74	-14.42
9920	42.46	AVG	145	1.3	H	3.88	46.34	54	-7.66
9920	53.66	PK	130	1.4	V	3.88	57.54	74	-16.46
9920	41.57	AVG	120	1.6	V	3.88	45.45	54	-8.55

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading

Margin = Corrected Amplitude – Limit


The other spurious emission which is in the noise floor level was not recorded.

For above 1GHz, when the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, just peak value was recorded.


1 GHz - 18 GHz: (Pre-Scan plots)

Worst case for 8DPSK, Middle Channel:

Horizontal

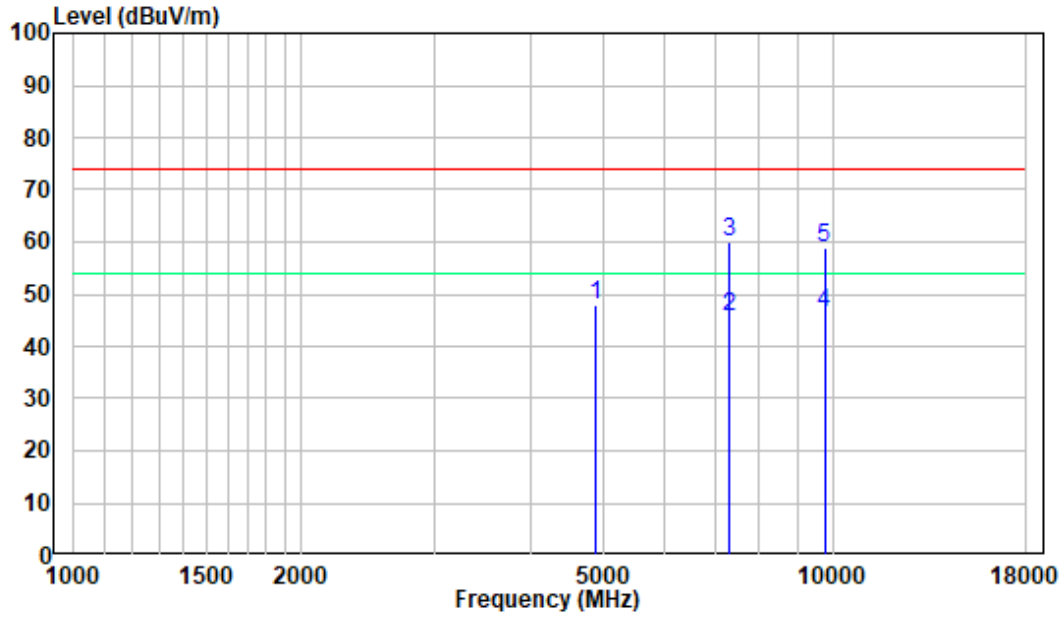


Vertical

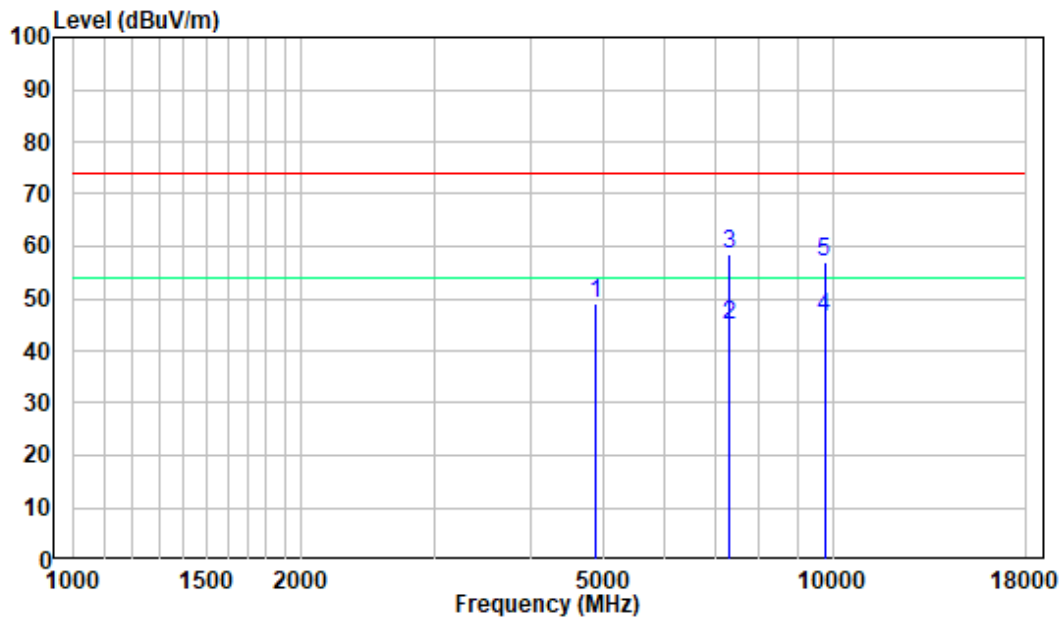


18-25GHz: (Pre-Scan plots)

Worst case for 8DPSK, Middle Channel:

Horizontal

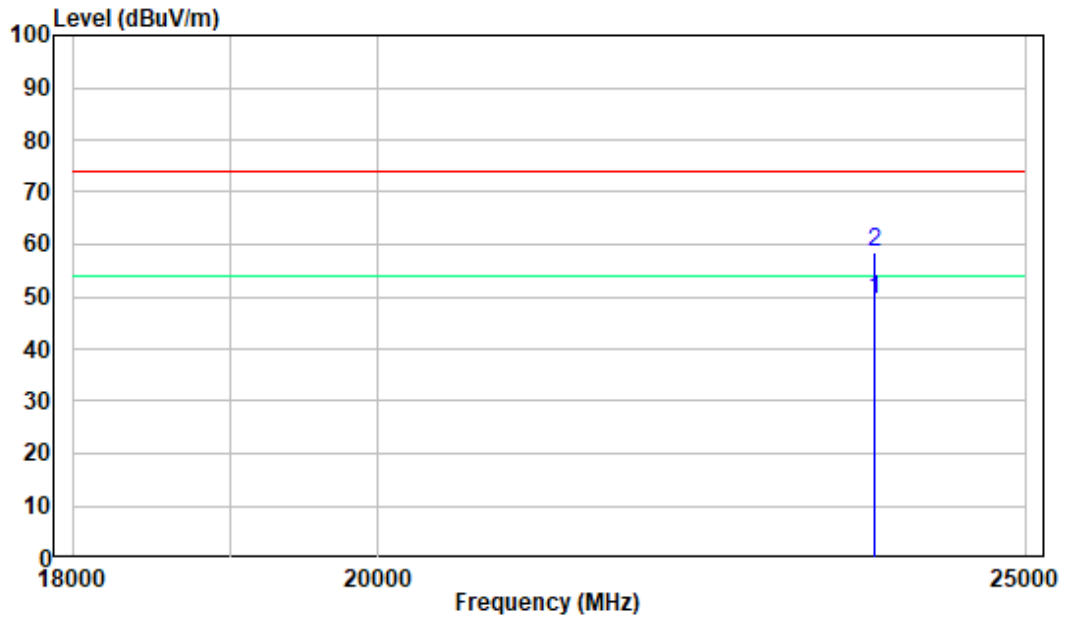

Vertical

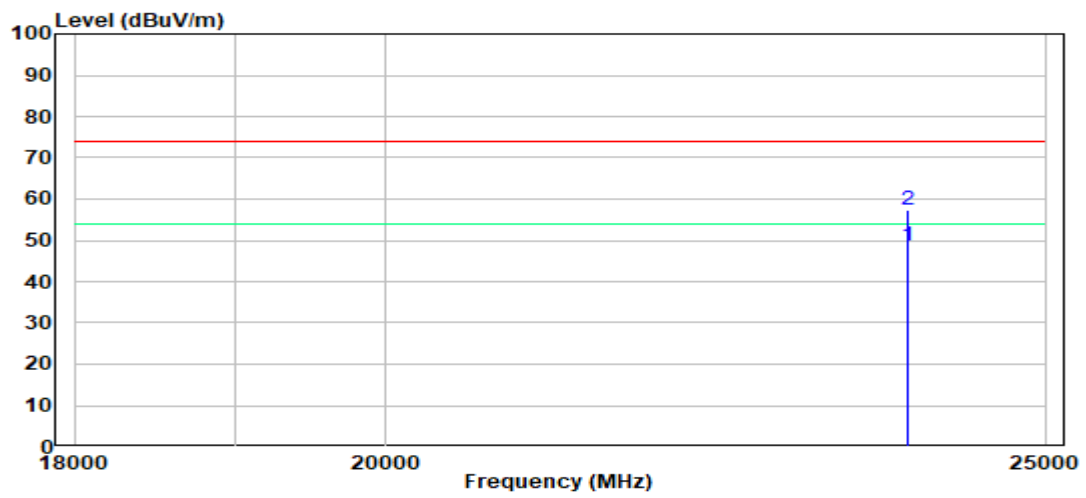

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST


Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

According to ANSI C63.10-2013, section 7.8.2

1. Set the EUT in TX mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.



Test Data

Environmental Conditions

Temperature:	24°C
Relative Humidity:	47%
ATM Pressure:	101kPa

The testing was performed by Matt Liang on 2023-05-05.

EUT operation mode: Transmitting


Test Result: Compliant.

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1	≥0.693	PASS
2DH5	Ant1	Hop	1.003	≥0.933	PASS
3DH5	Ant1	Hop	1.003	≥0.913	PASS


Note: The limit = (2/3) * 20dB bandwidth

Please refer to the below plots:


DH5_Ant1_Hop

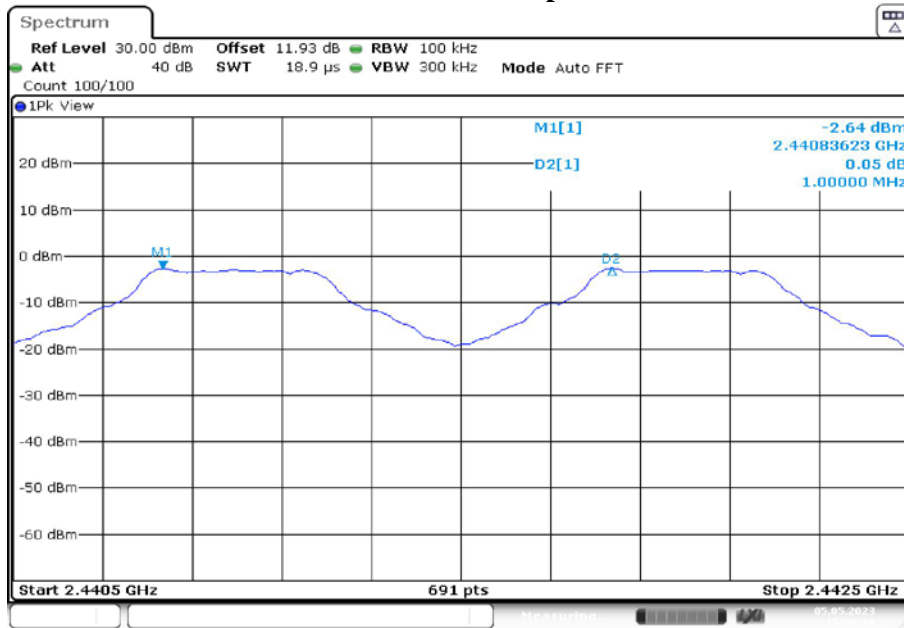

2DH5_Ant1_Hop

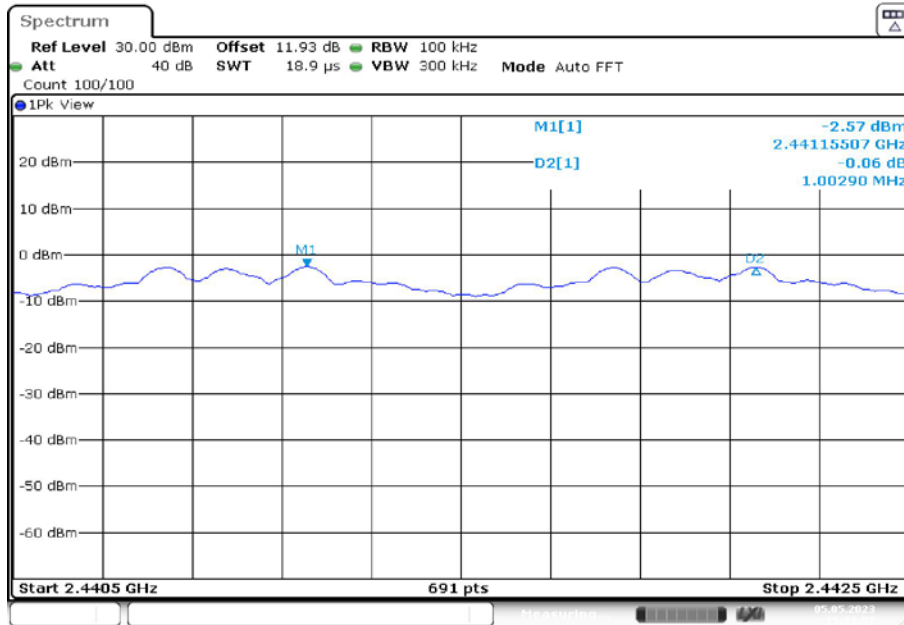

3DH5_Ant1_Hop

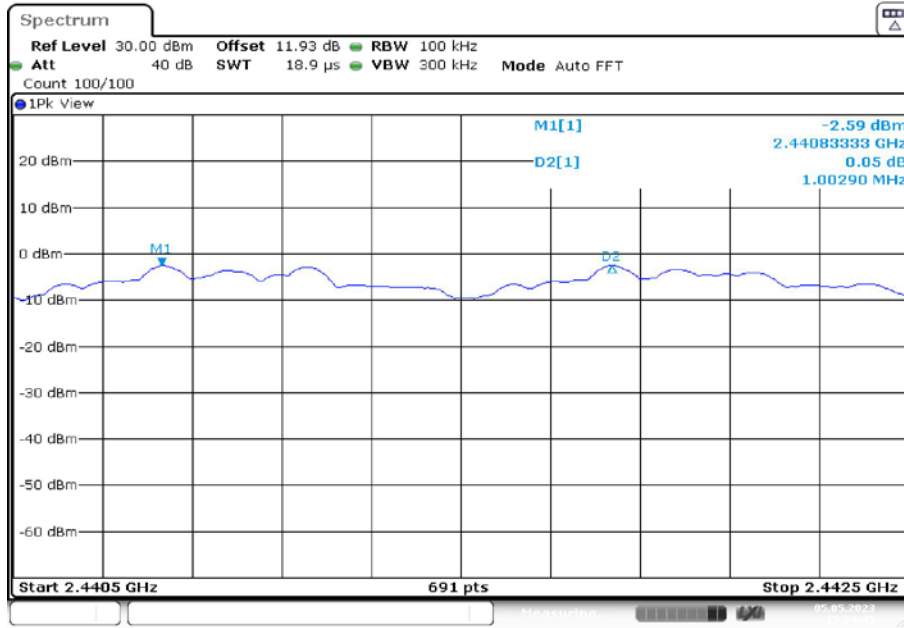

Date: 5.MAY.2023 15:24:45

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure


According to ANSI C63.10-2013, section 7.8.7 and section 6.9.2

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not TX continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



Test Data**Environmental Conditions**

Temperature:	24°C
Relative Humidity:	47%
ATM Pressure:	101kPa

The testing was performed by Matt Liang on 2023-05-05.


EUT operation mode: Transmitting

Test Result: Compliant.


Test Mode	Antenna	Channel	20db EBW[MHz]	OCB [MHz]	Verdict
DH5	Ant1	2402	1.04	0.932	PASS
		2441	1.04	0.929	PASS
		2480	1.04	0.941	PASS
2DH5	Ant1	2402	1.40	1.63	PASS
		2441	1.39	1.558	PASS
		2480	1.39	1.454	PASS
3DH5	Ant1	2402	1.37	1.636	PASS
		2441	1.35	1.522	PASS
		2480	1.35	1.406	PASS

Please refer to the below plots:


20 dB EMISSION BANDWIDTH_DH5_Ant1_2402

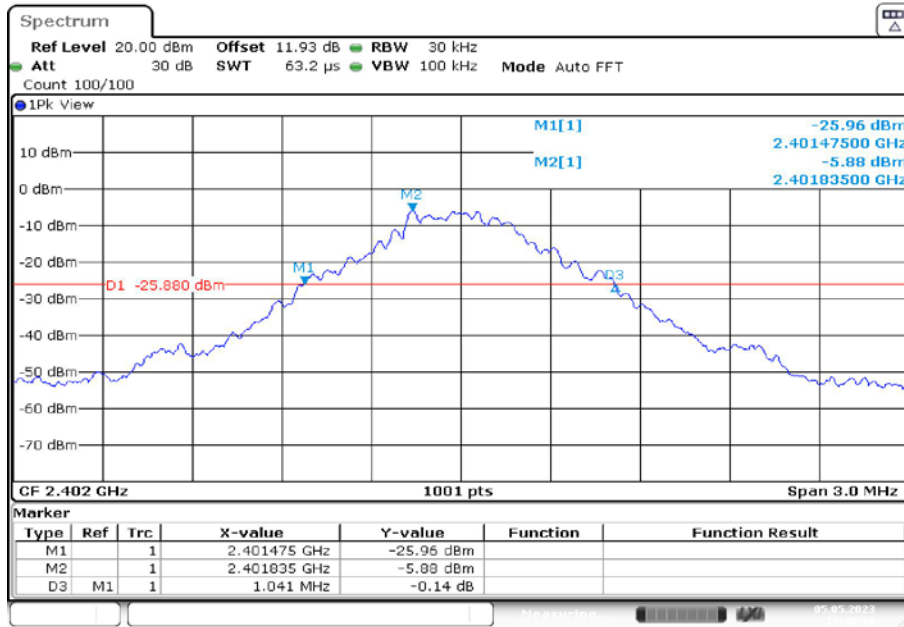

99% OCCUPIED BANDWIDTH_DH5_Ant1_2402

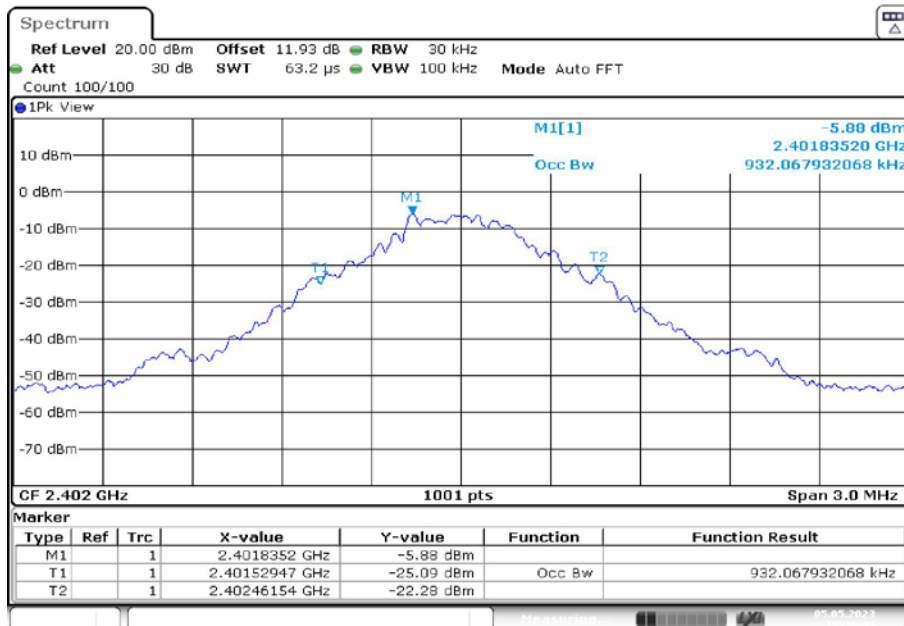


20 dB EMISSION BANDWIDTH_DH5_Ant1_2441

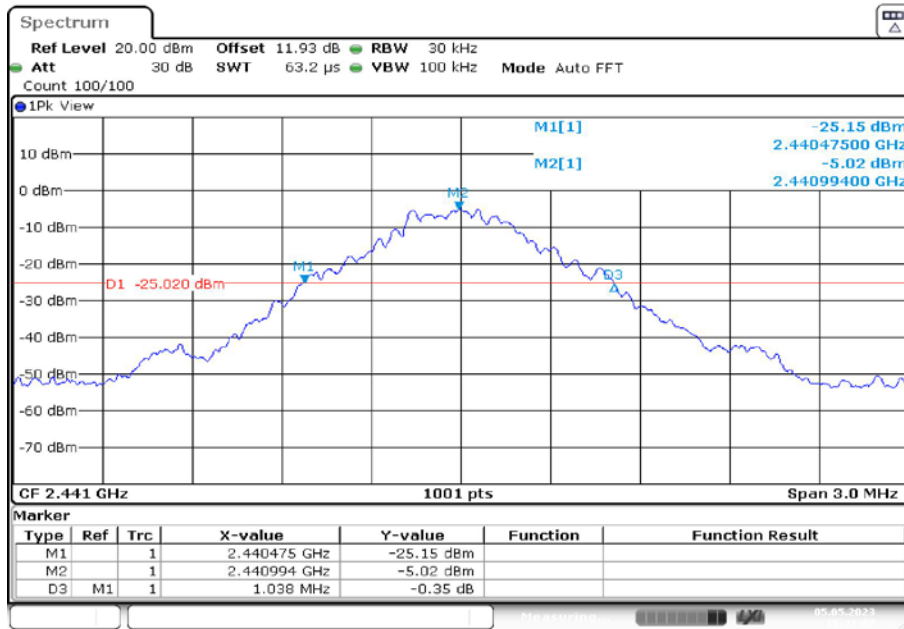


Date: 5.MAY.2023 15:41:07

99% OCCUPIED BANDWIDTH_DH5_Ant1_2441

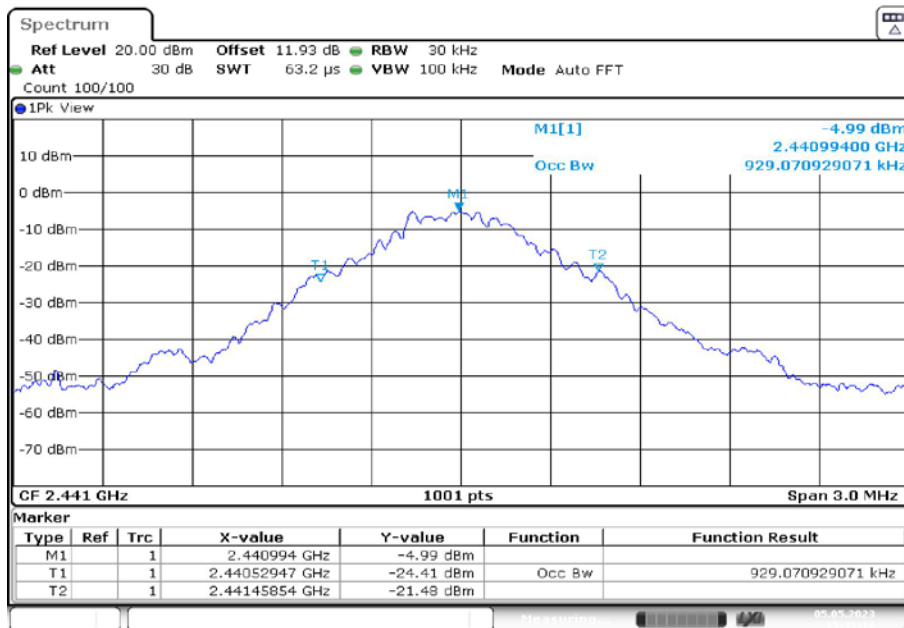


Date: 5.MAY.2023 15:41:12

20 dB EMISSION BANDWIDTH_DH5_Ant1_2480

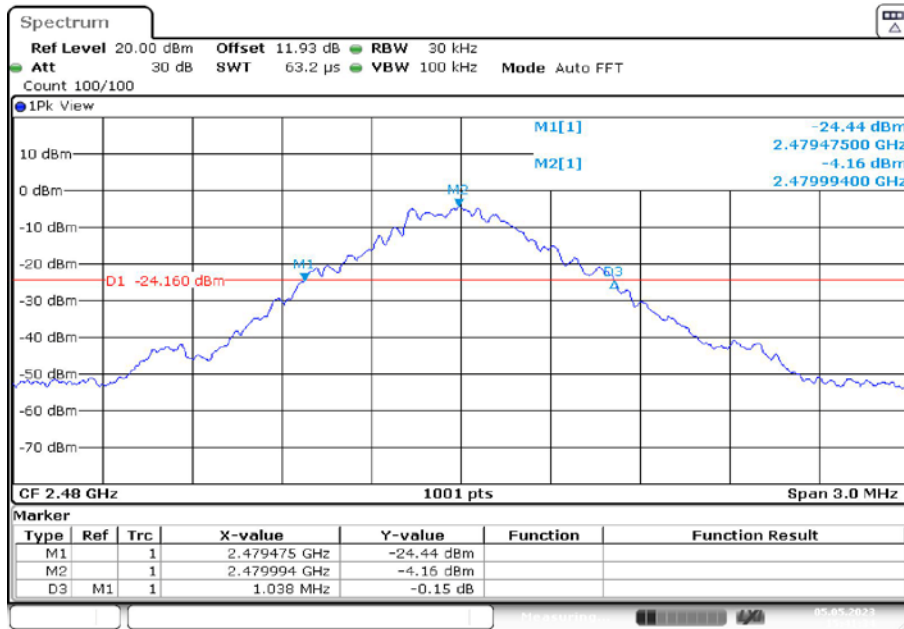


Date: 5.MAY.2023 15:41:34

99% OCCUPIED BANDWIDTH_DH5_Ant1_2480

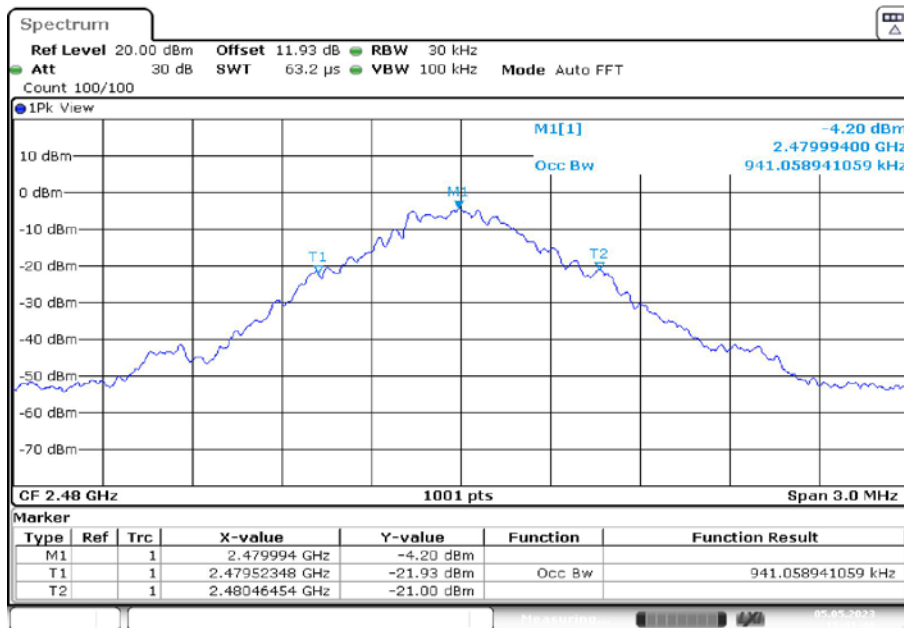


Date: 5.MAY.2023 15:41:40

20 dB EMISSION BANDWIDTH_2DH5_Ant1_2402

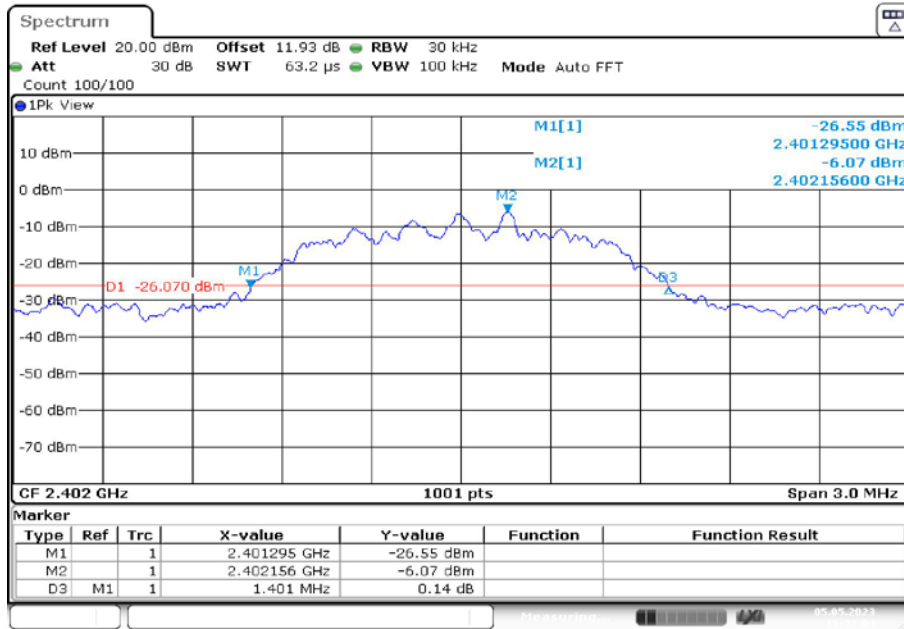


Date: 5.MAY.2023 15:42:04

99% OCCUPIED BANDWIDTH_2DH5_Ant1_2402

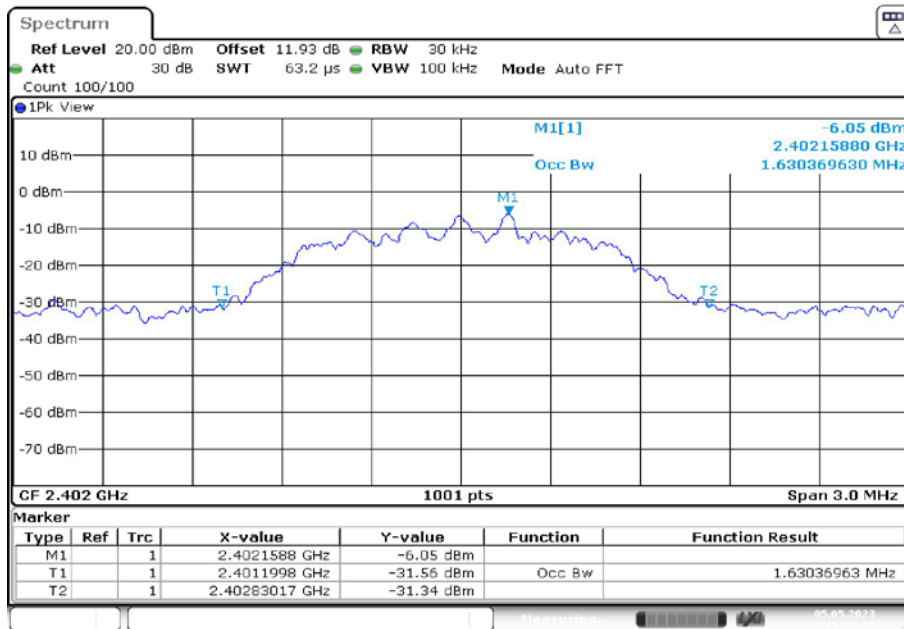


Date: 5.MAY.2023 15:42:09

20 dB EMISSION BANDWIDTH_2DH5_Ant1_2441

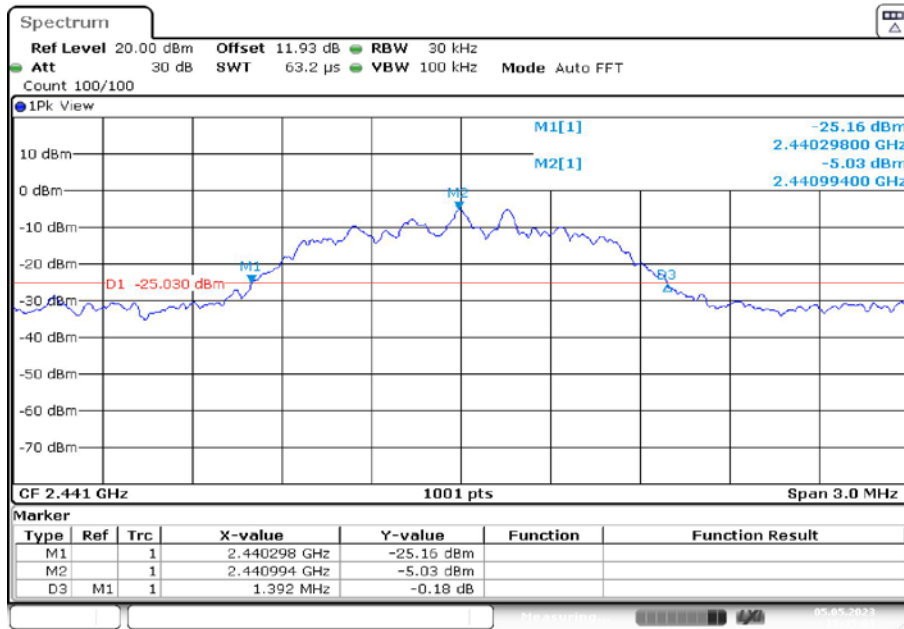


Date: 5.MAY.2023 15:45:03

99% OCCUPIED BANDWIDTH_2DH5_Ant1_2441

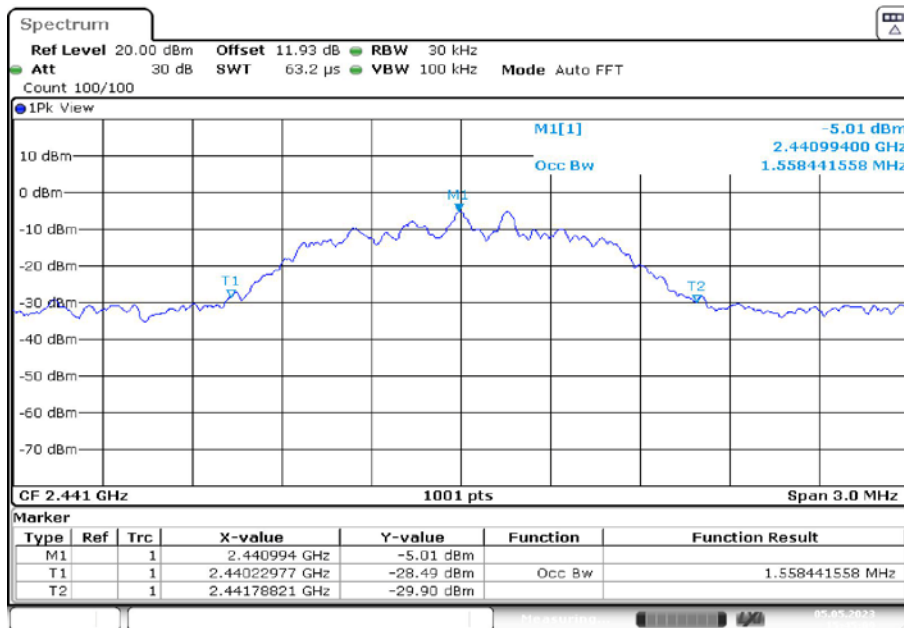


Date: 5.MAY.2023 15:45:09

20 dB EMISSION BANDWIDTH _2DH5_Ant1_2480

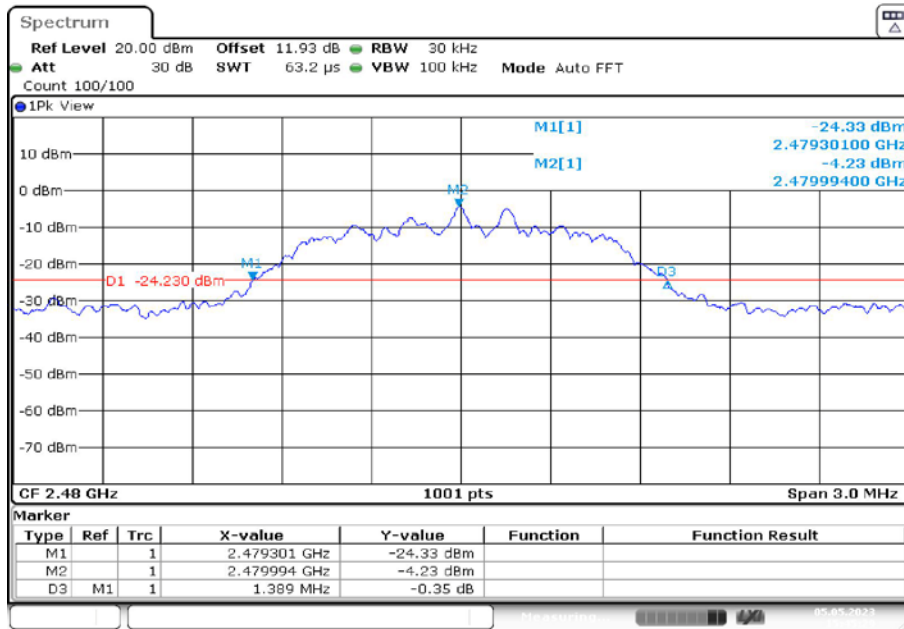


Date: 5.MAY.2023 15:45:29

99% OCCUPIED BANDWIDTH _2DH5_Ant1_2480

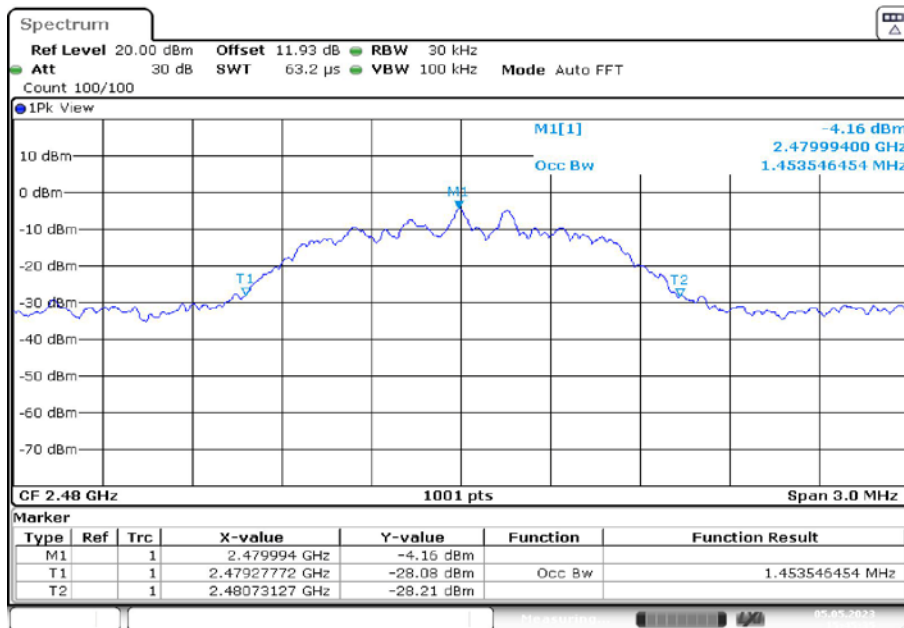


Date: 5.MAY.2023 15:45:35

20 dB EMISSION BANDWIDTH _3DH5_Ant1_2402

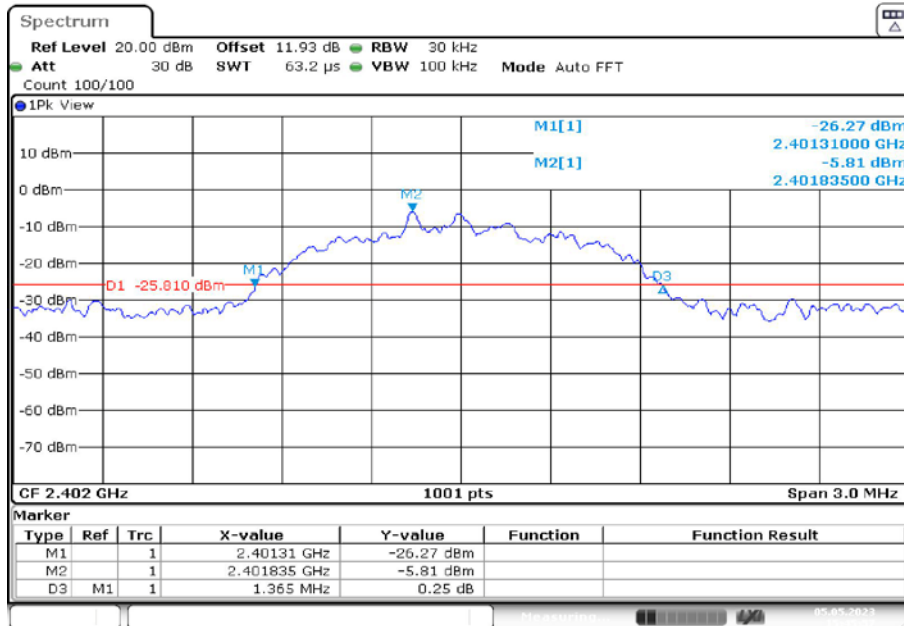


Date: 5.MAY.2023 15:45:57

99% OCCUPIED BANDWIDTH _3DH5_Ant1_2402

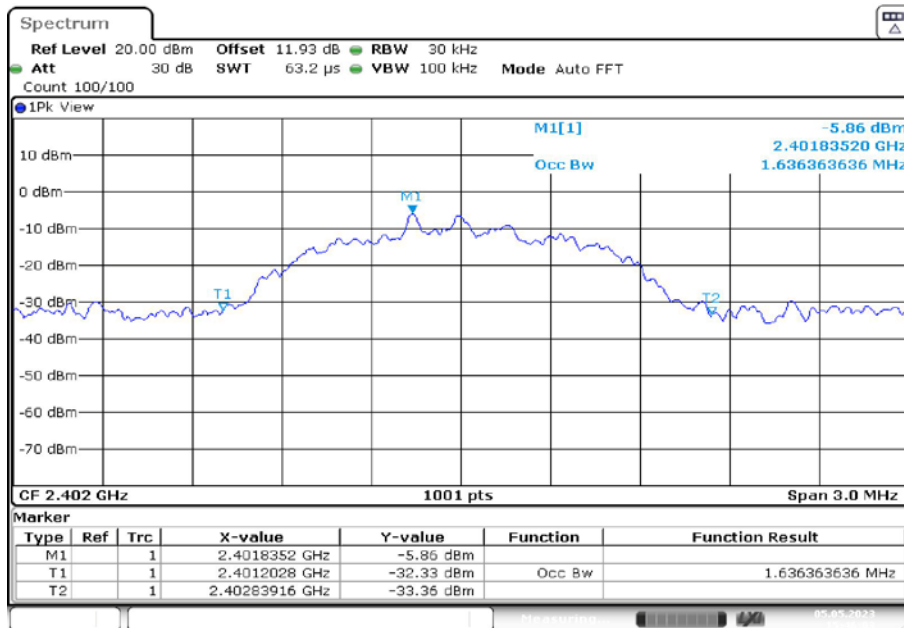


Date: 5.MAY.2023 15:46:03

20 dB EMISSION BANDWIDTH _3DH5_Ant1_2441

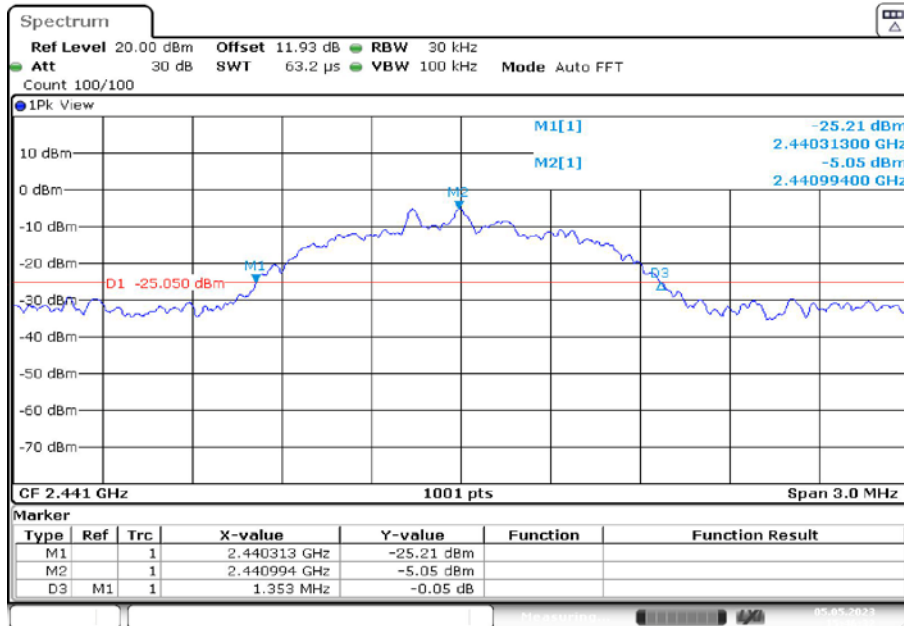


Date: 5.MAY.2023 15:16:32

99% OCCUPIED BANDWIDTH _3DH5_Ant1_2441

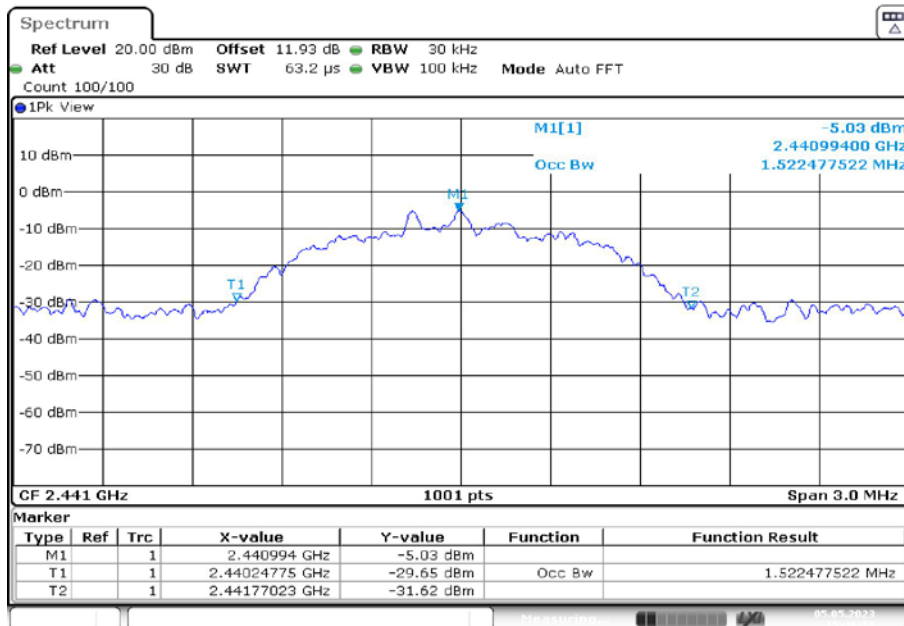


Date: 5.MAY.2023 15:16:38

20 dB EMISSION BANDWIDTH _3DH5_Ant1_2480

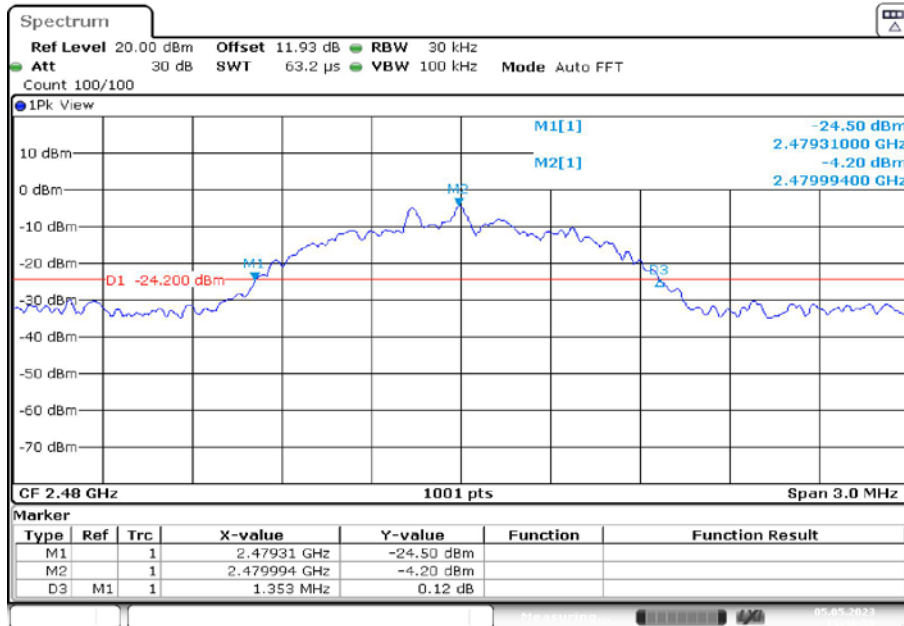

Date: 5.MAY.2023 15:46:56

99% OCCUPIED BANDWIDTH _3DH5_Ant1_2480

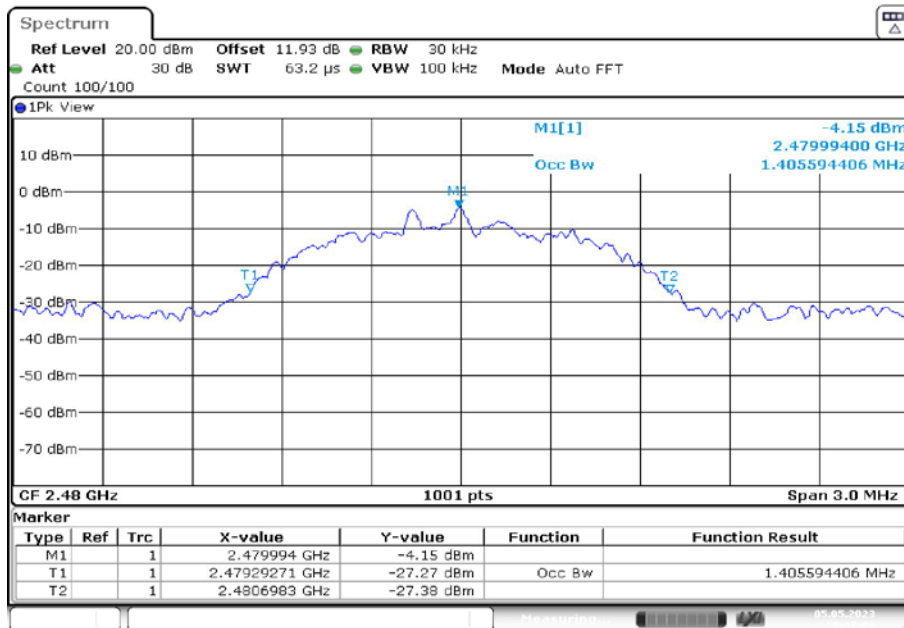

Date: 5.MAY.2023 15:47:02

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST


Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

According to ANSI C63.10-2013, section 7.8.3

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.



Test Data

Environmental Conditions

Temperature:	24°C
Relative Humidity:	47%
ATM Pressure:	101kPa

The testing was performed by Matt Liang on 2023-05-05.


EUT operation mode: Transmitting

Test Result: Compliant.

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥ 15	PASS
2DH5	Ant1	Hop	79	≥ 15	PASS
3DH5	Ant1	Hop	79	≥ 15	PASS


Please refer to the below plots:

DH5_Ant1_Hop

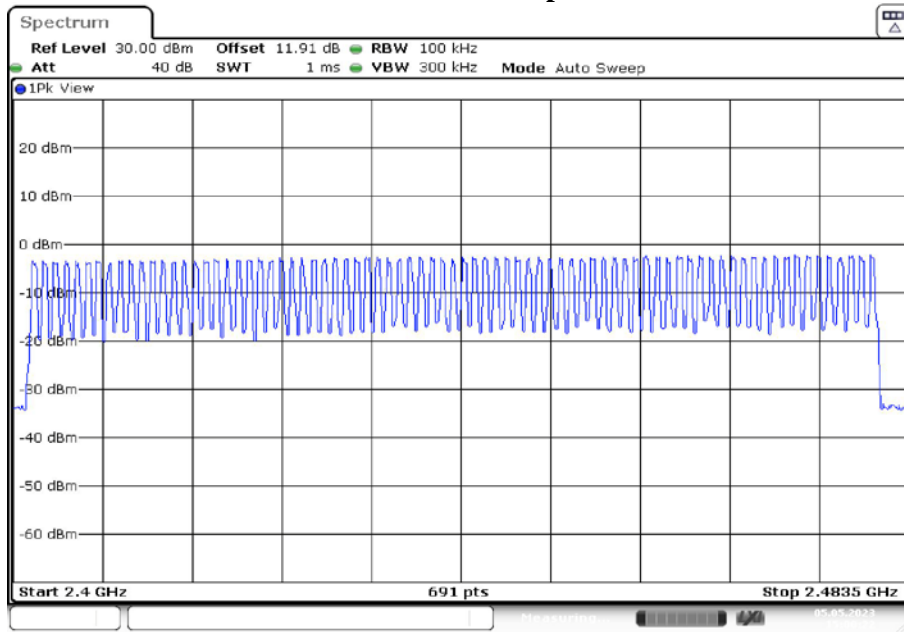


Date: 5.MAY.2023 15:00:22

2DH5_Ant1_Hop

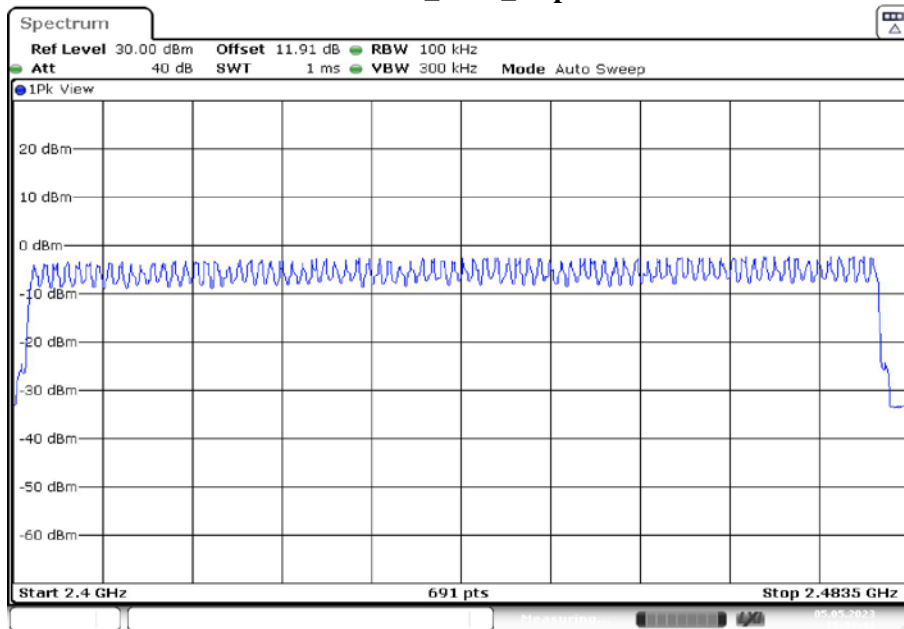

Date: 5.MAY.2023 15:03:43

3DH5_Ant1_Hop

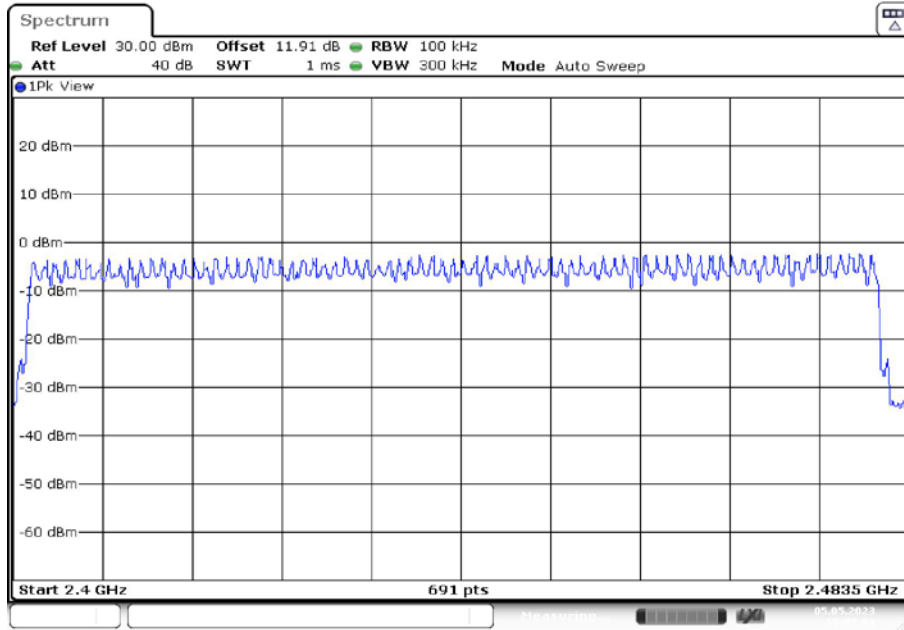

Date: 5.MAY.2023 15:07:03