



Connect the Receiver to 110V power outlet with the supplied MicroUSB cable and wall outlet.

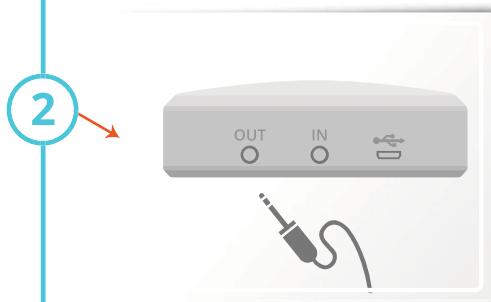


Plug the Receiver into your existing speakers or amplifier with the supplied 3.5mm Stereo Cable from the "OUT" port on the back of the Receiver.

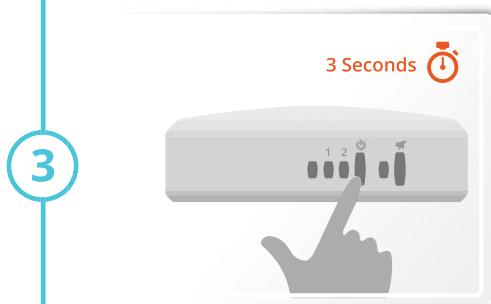


Press and hold power button on the Receiver for 3 seconds, the blue #1 light will blink on and off indicating the Receiver is in Sync mode.



On the side of the Microphone place the switch in Low Power mode.

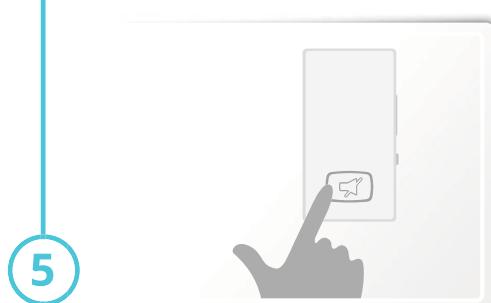


Press and hold the power button on the Microphone for three seconds. The blinking blue light indicates the Microphone is in Sync mode.

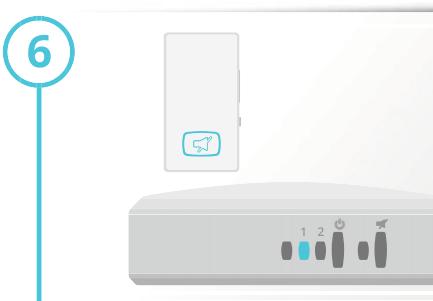

After the Microphone paired with Receiver, it successfully connected 2.4G, once a connection has been established the light on the Receiver and Microphone will change to a solid blue.




Once the Receiver and Microphone are Sync'd you may adjust the volume of the Microphone with the volume button on the side of the microphone.

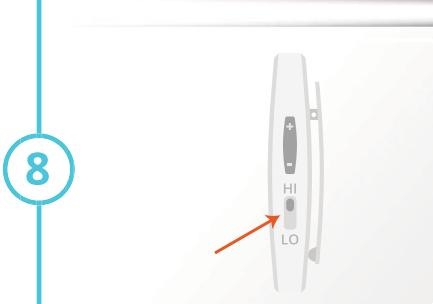

After the volume has been adjusted, walk the perimeter of the room while speaking into the microphone. If the audio cuts out, place the switch on the side of the microphone into High Power mode.



To open the Qball, turn the black microphone cover 1/8th of a turn counter-clockwise and pull out. Insert the microphone with the rubber grip facing up making sure the clip fits over the top of the mic securely. Replace the cover and you are ready to go

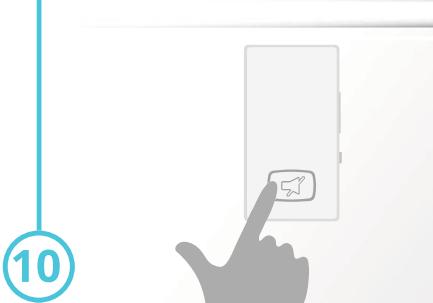

The Microphone may be muted/unmuted by pressing the power button on the front of the microphone.

To turn off the microphone, press and hold the power button for 3 seconds.



CHARGING

To charge the Microphone, connect the included MicroUSB cable into the charging port on the side of the Microphone. A solid red light indicates the Microphone is charging. Once the light turns green the Microphone is fully charged.

AUTO MUTE

The Microphone will automatically mute when being thrown in order to avoid loud thumps over the speakers.

The Auto-Mute may be disabled by inserting a paperclip into the pinhole above the charging port for 2 seconds. The lights on the Microphone will alternatively blink to indicate the automate has been disabled. To re-enable repeat the same process.

AUTO SLEEP

In order to save on battery life, the Microphone will automatically go into standby mode if no movement is sensed for 15 minutes. Once movement is sensed, the Microphone will automatically reconnect.

AUTO SHUTDOWN

If no movement is sensed for two hours, the microphone will shutdown completely. In order to re-connect, the power button on the front of the microphone will need to be pressed.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.


This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Qball

Quick Setup Guide

Microphone Diagram

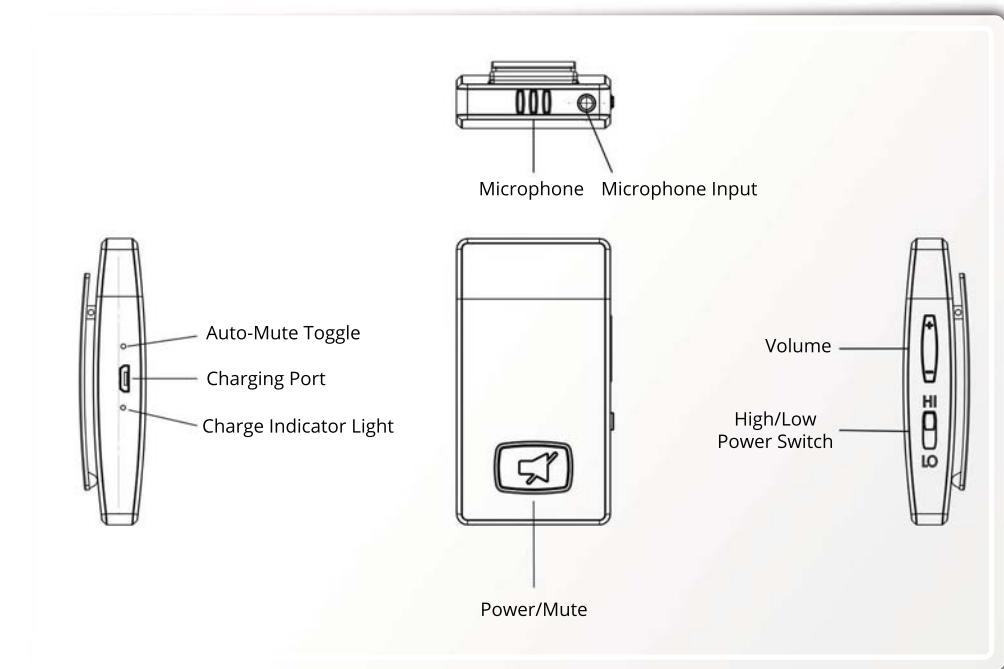

Receiver Diagram

