

## Appendix B

### RF Test Data for BT V5.0(LE) (Conducted Measurement)

Product Name: Bluetooth earphone

Trade Mark: Candiecouture


Test Model: CCBT-1001-RS

#### Environmental Conditions

Temperature:	24.5 ° C
Relative Humidity:	53.6%
ATM Pressure:	100.0 kPa
Test Engineer:	JERRY.ZENG
Supervised by:	Wang.Chuang


#### B.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

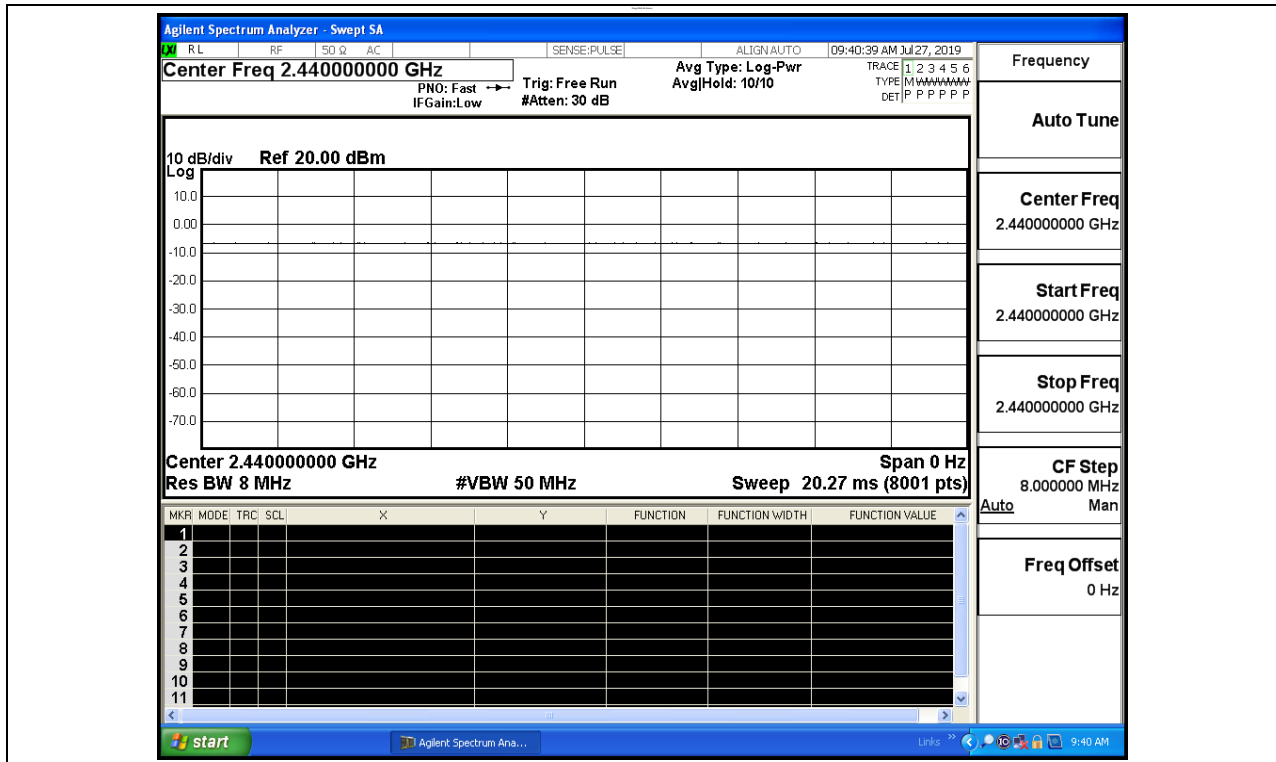

### B.2 Maximum Conducted Peak Output Power

Mode	Channel	Conduct Peak Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	0.642	30	PASS
BT LE	MCH	1.457	30	PASS
BT LE	HCH	0.158	30	PASS


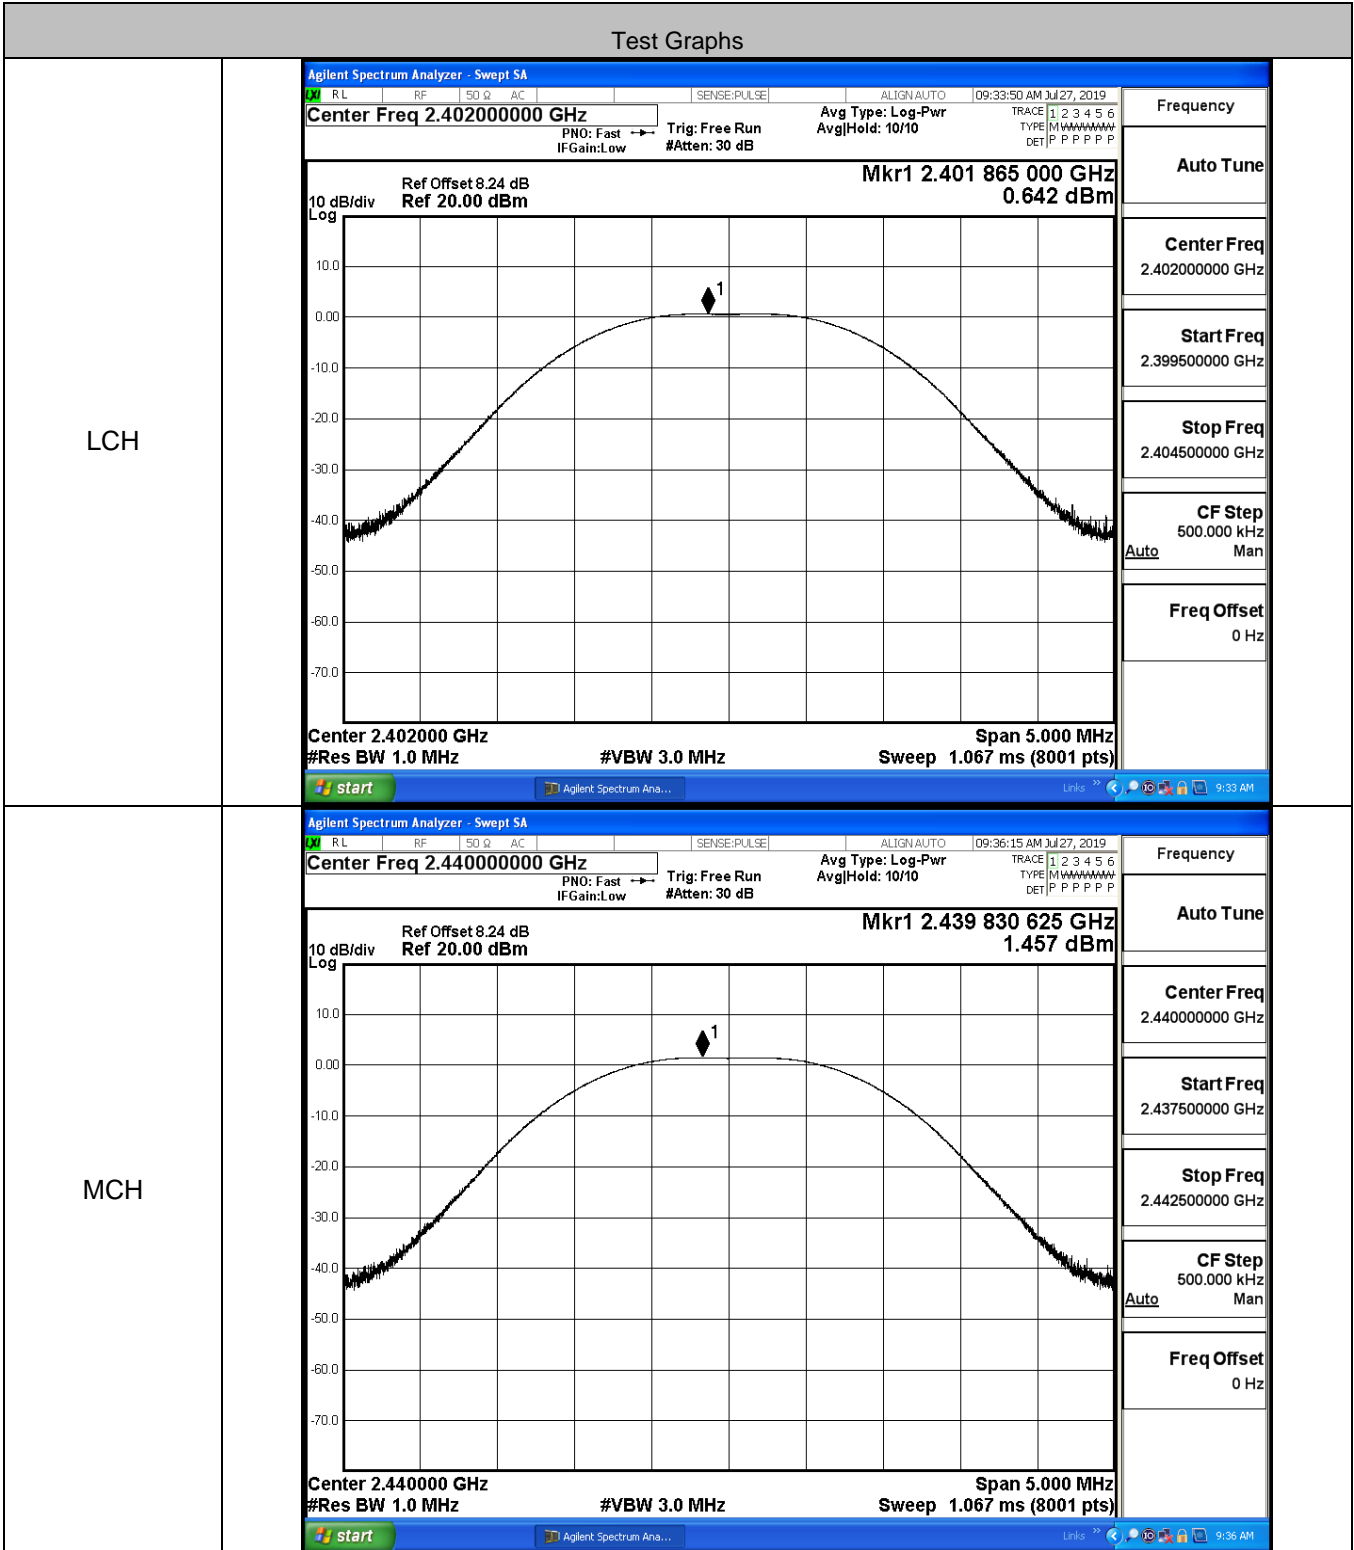





### B.3 Maximum Power Spectral Density

Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-14.371	8	PASS
BT LE	MCH	-13.527	8	PASS
BT LE	HCH	-14.886	8	PASS

#### Test Graphs

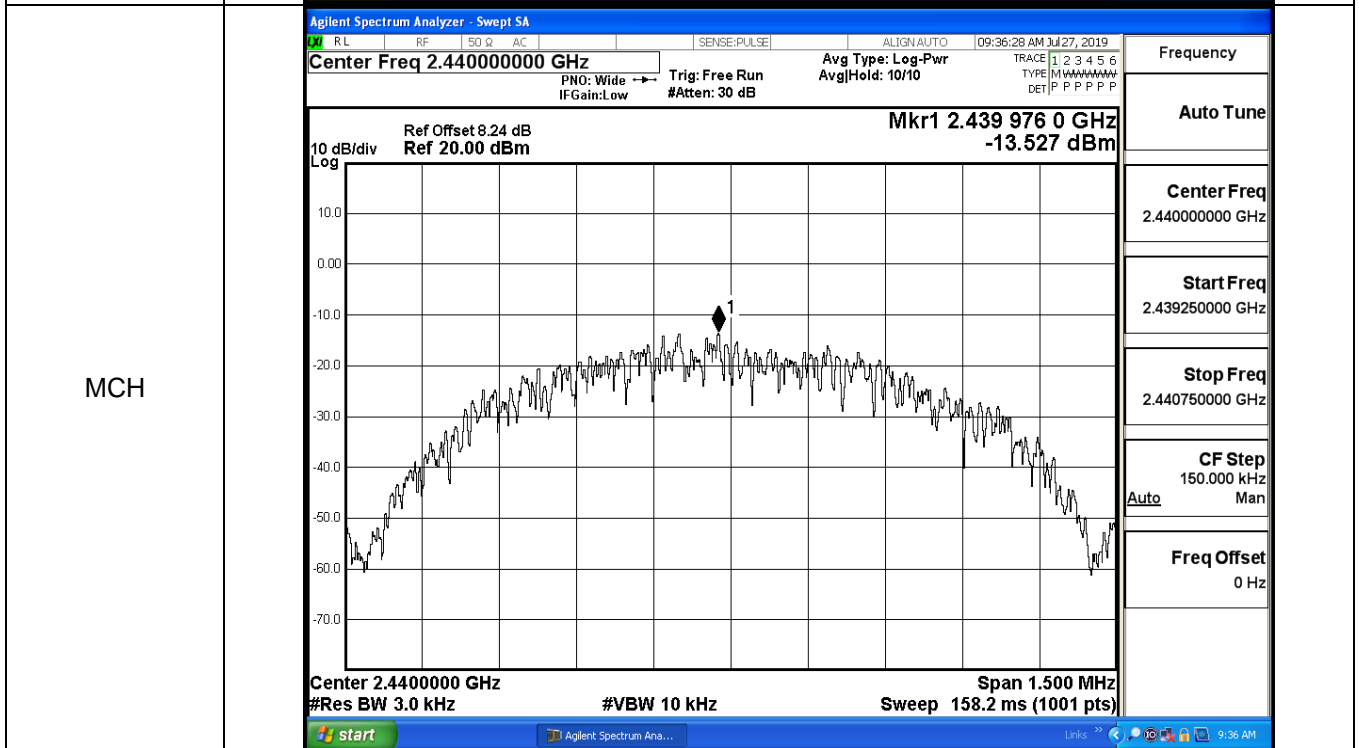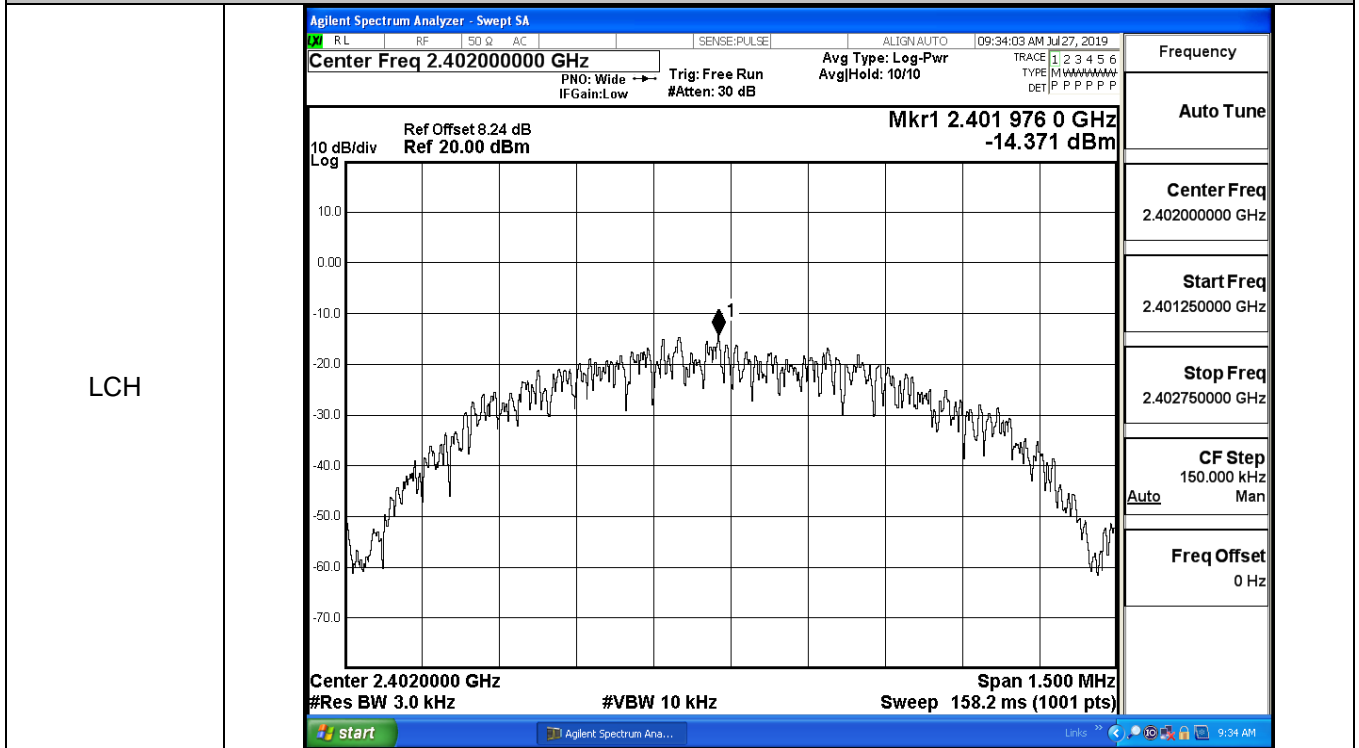

HCH

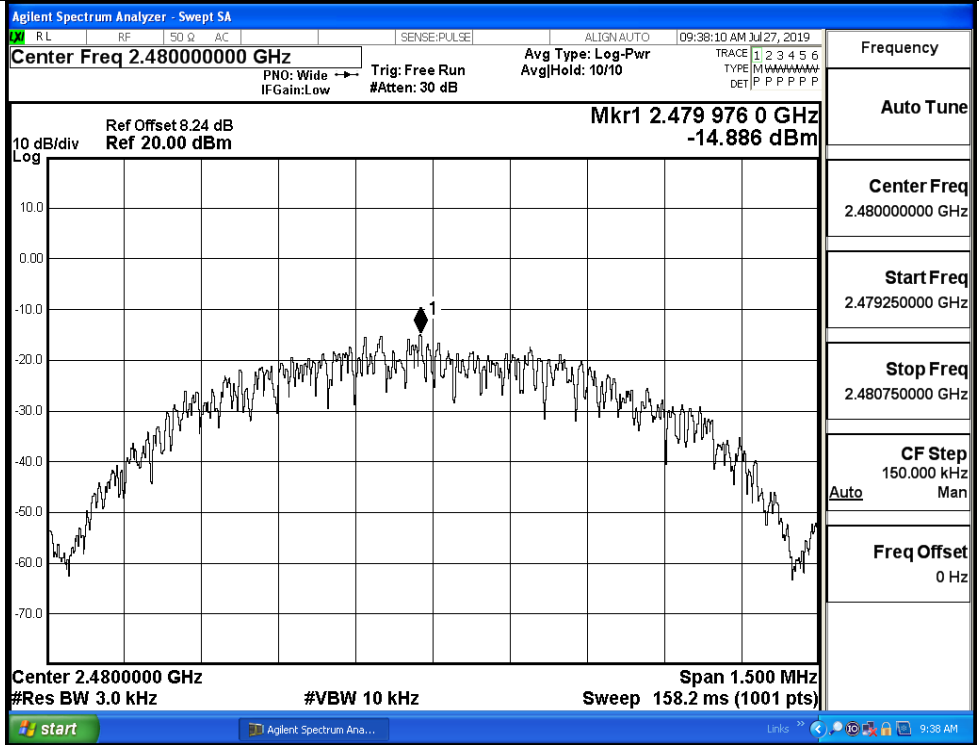

**B.4 6dB Bandwidth**

Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.7027	≥0.5	PASS
BT LE	MCH	0.6992	≥0.5	PASS
BT LE	HCH	0.6948	≥0.5	PASS

**Test Graphs**

LCH		<p>Frequency</p> <p>Center Freq 2.40200000 GHz</p> <p>CF Step 300.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
MCH		<p>Frequency</p> <p>Center Freq 2.44000000 GHz</p> <p>CF Step 300.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>

HCH

Agilent Spectrum Analyzer - Occupied BW

RL	RF	50 Ω	AC	SENSE:PULSE	ALIGN:AUTO	09:37:45 AM Jul 27, 2019
<b>Center Freq 2.480000000 GHz</b>			Center Freq: 2.480000000 GHz		Radio Std: None	
			Trig: Free Run		AvgHold>1/1	
#IFGain:Low			#Atten: 30 dB		Radio Device: BTS	

10 dB/div  
Log

**Mkr1 2.4799951 GHz**  
**-0.66190 dBm**

Center 2.48 GHz	#VBW 300 kHz	Span 3 MHz
#Res BW 100 kHz		Sweep 1.067 ms

<b>Occupied Bandwidth</b>	<b>Total Power</b>	<b>6.44 dBm</b>
<b>1.0407 MHz</b>		
Transmit Freq Error	209 Hz	OBW Power
x dB Bandwidth	694.8 kHz	x dB
		99.00 %
		-6.00 dB

Ref Offset 8.24 dB  
Ref 20.00 dBm

CF Step  
300.000 kHz  
Auto Man



Freq Offset  
0 Hz

start
Agilent Spectrum Ana...
Links >>
9:37 AM

**B.5 RF Conducted Spurious Emissions**

Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-0.148	-44.124	-20.148	PASS
BT LE	MCH	0.674	-43.669	-19.326	PASS
BT LE	HCH	-0.643	-44.075	-20.643	PASS


BT LE\_LCH\_Graphs

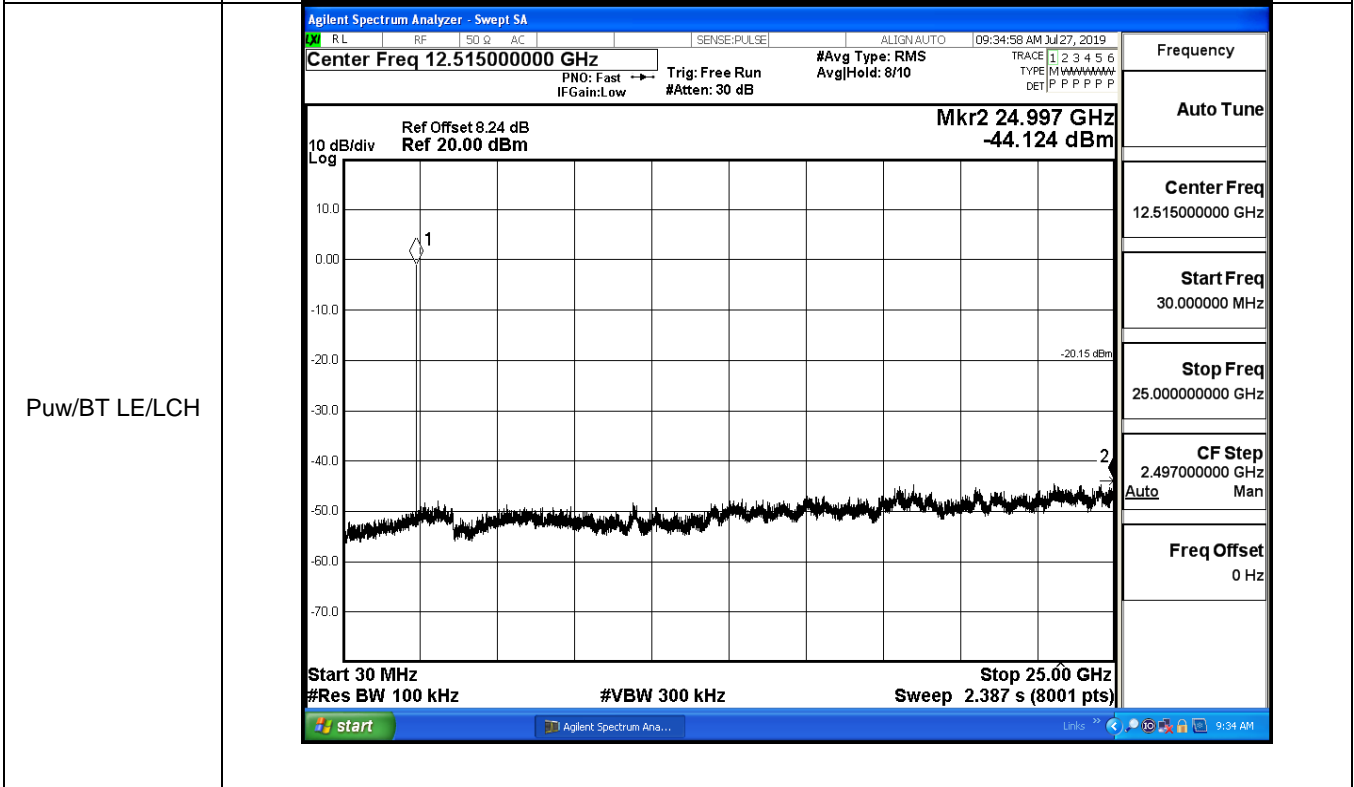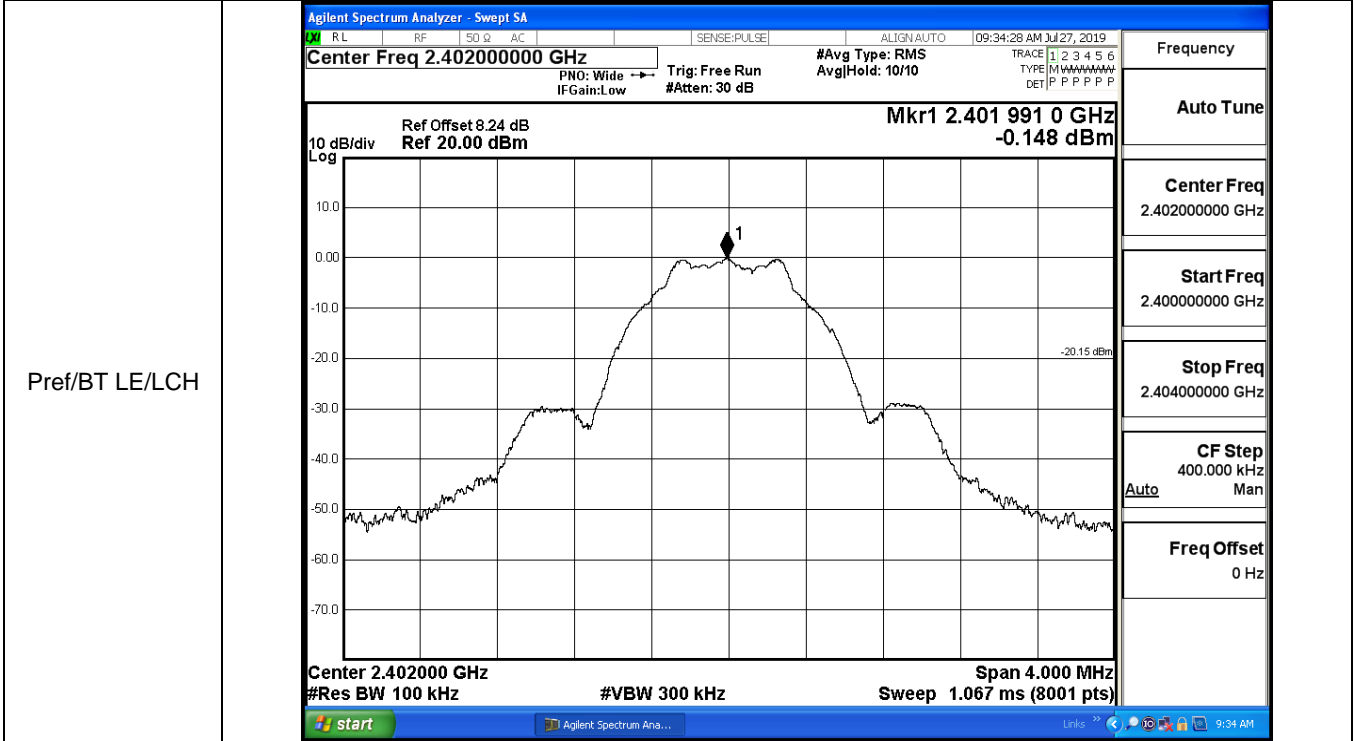




BT LE\_MCH\_Graphs

Pref/BT LE/MCH

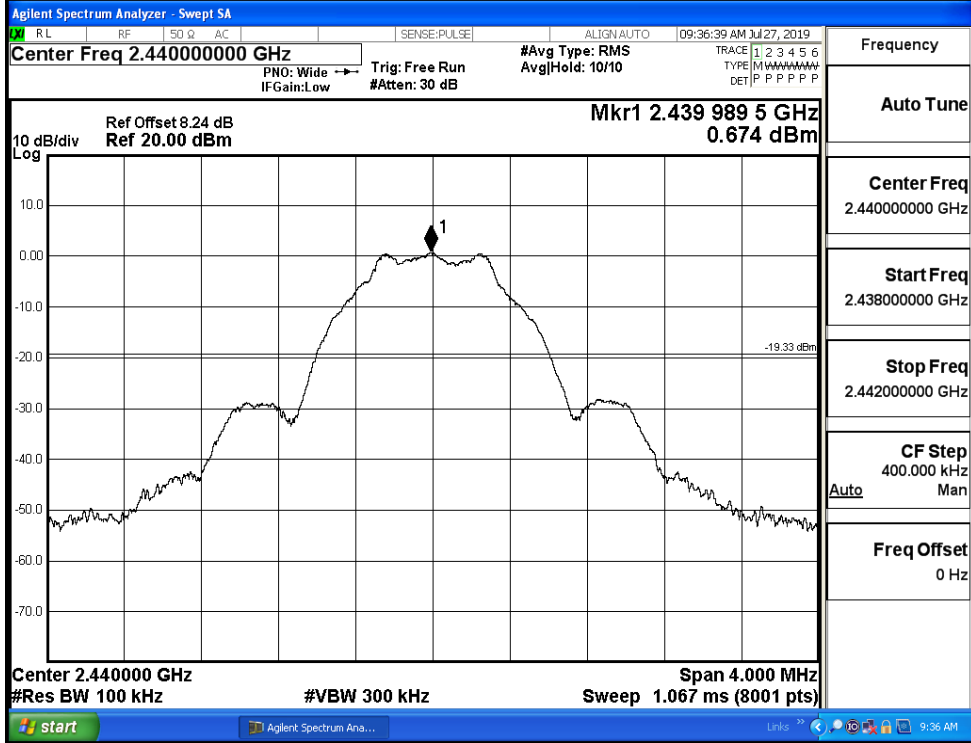

Frequency
Auto Tune
Center Freq 2.440000000 GHz
Start Freq 2.438000000 GHz
Stop Freq 2.442000000 GHz
CF Step 400.000 kHz Auto Man
Freq Offset 0 Hz

Puw/BT LE/MCH

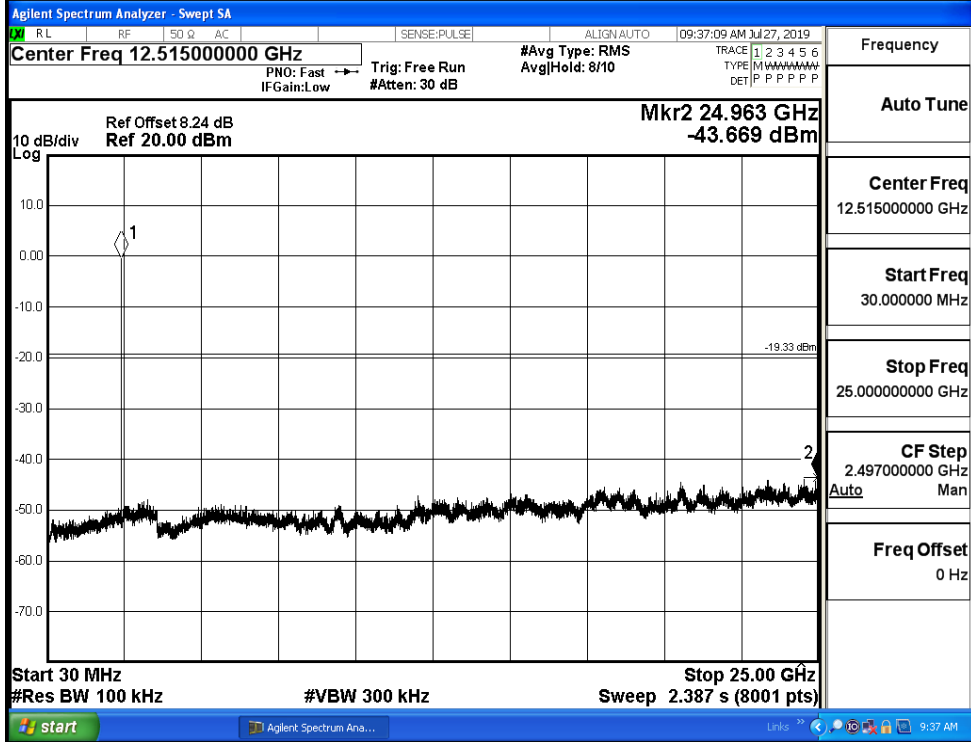


Frequency
Auto Tune
Center Freq 12.515000000 GHz
Start Freq 30.000000 MHz
Stop Freq 25.000000000 GHz
CF Step 2.497000000 GHz Auto Man
Freq Offset 0 Hz

BT LE\_HCH\_Graphs

Pref/BT LE/HCH



Puw/BT LE/HCH

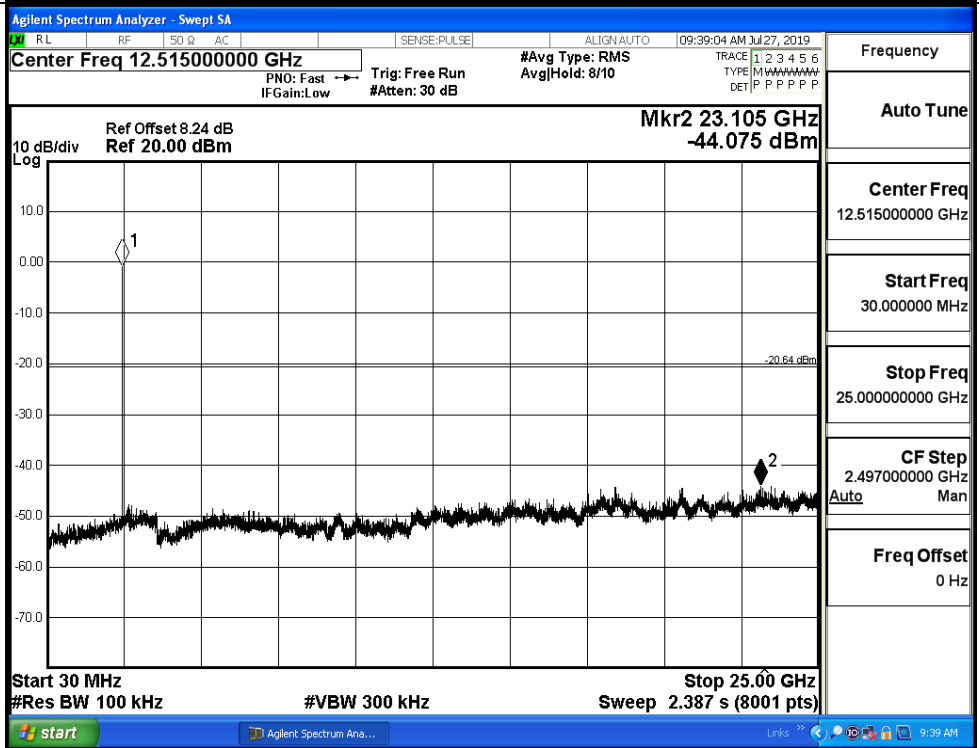

### B.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-0.606	-50.046	-20.61	PASS
BT LE	HCH	-0.572	-20.57	PASS	


#### Test Graphs

LCH	<p>Agilent Spectrum Analyzer - Swept SA                  Center Freq 2.35700000 GHz                  #Avg Type: RMS                  AvgHold: 10/10                  Mkr4 2.363 275 GHz                  -50.046 dBm                  Start 2.31000 GHz                  #Res BW 100 kHz                  #VBW 300 kHz                  Stop 2.40400 GHz                  Sweep 9.067 ms (8001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.401791 GHz</td><td>-0.606 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.400000 GHz</td><td>-54.287 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.390000 GHz</td><td>-54.495 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.363275 GHz</td><td>-50.046 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.401791 GHz	-0.606 dBm				2	N	f		2.400000 GHz	-54.287 dBm				3	N	f		2.390000 GHz	-54.495 dBm				4	N	f		2.363275 GHz	-50.046 dBm				Frequency Auto Tune Center Freq 2.35700000 GHz Start Freq 2.31000000 GHz Stop Freq 2.40400000 GHz CF Step 9.400000 MHz Freq Offset 0 Hz
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	f		2.401791 GHz	-0.606 dBm																																										
2	N	f		2.400000 GHz	-54.287 dBm																																										
3	N	f		2.390000 GHz	-54.495 dBm																																										
4	N	f		2.363275 GHz	-50.046 dBm																																										
HCH	<p>Agilent Spectrum Analyzer - Swept SA                  Center Freq 2.489000000 GHz                  #Avg Type: RMS                  AvgHold: 10/10                  Mkr4 2.499 766 25 GHz                  -49.513 dBm                  Start 2.47800 GHz                  #Res BW 100 kHz                  #VBW 300 kHz                  Stop 2.50000 GHz                  Sweep 2.133 ms (8001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.47976000 GHz</td><td>-0.572 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.48350000 GHz</td><td>-52.638 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.50000000 GHz</td><td>-52.383 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.49976625 GHz</td><td>-49.513 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.47976000 GHz	-0.572 dBm				2	N	f		2.48350000 GHz	-52.638 dBm				3	N	f		2.50000000 GHz	-52.383 dBm				4	N	f		2.49976625 GHz	-49.513 dBm				Frequency Auto Tune Center Freq 2.489000000 GHz Start Freq 2.478000000 GHz Stop Freq 2.500000000 GHz CF Step 2.200000 MHz Freq Offset 0 Hz
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	f		2.47976000 GHz	-0.572 dBm																																										
2	N	f		2.48350000 GHz	-52.638 dBm																																										
3	N	f		2.50000000 GHz	-52.383 dBm																																										
4	N	f		2.49976625 GHz	-49.513 dBm																																										


**B.7 Restrict-band band-edge measurements**

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdi
BT LE	2402	Ant1	2310.0	-44.19	2.0	0	51.07	PEAK	74	PASS
		Ant1	2310.0	-53.50	2.0	0	41.75	AV	54	PASS
		Ant1	2390.0	-43.69	2.0	0	51.57	PEAK	74	PASS
		Ant1	2390.0	-53.18	2.0	0	42.08	AV	54	PASS
	2480	Ant1	2483.5	-43.25	2.0	0	52.01	PEAK	74	PASS
		Ant1	2483.5	-52.92	2.0	0	42.34	AV	54	PASS
		Ant1	2500.0	-43.01	2.0	0	52.25	PEAK	74	PASS
		Ant1	2500.0	-52.58	2.0	0	42.68	AV	54	PASS


Restrict-band band-edge measurements\_BT LE\_2402\_Ant1\_PEAK

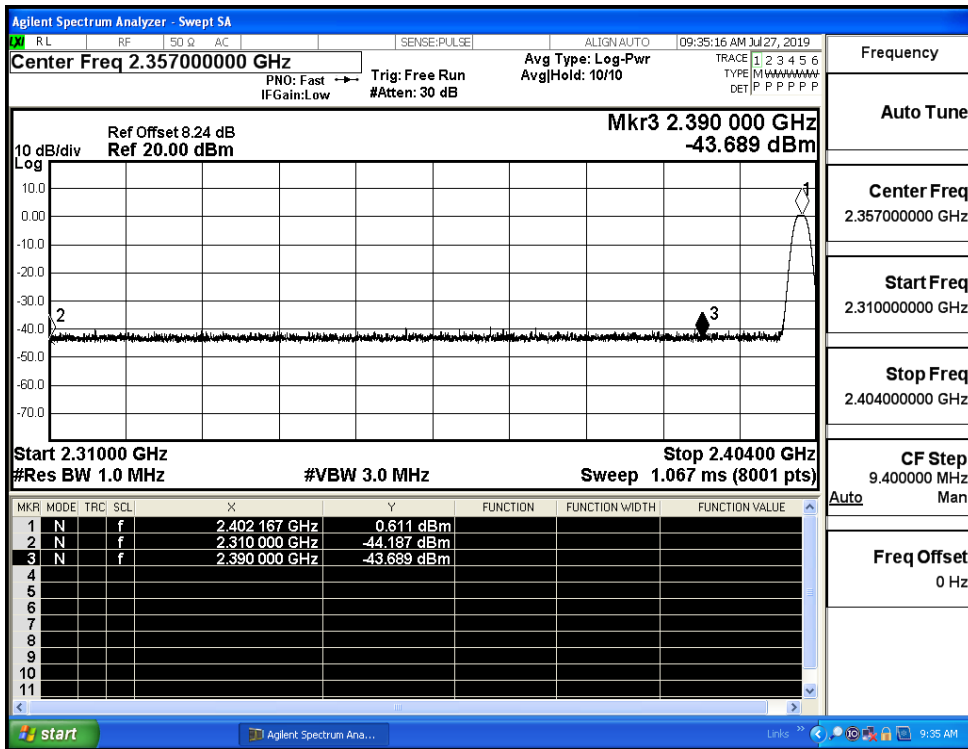

Restrict-band band-edge measurements\_BT LE\_2402\_Ant1\_AV

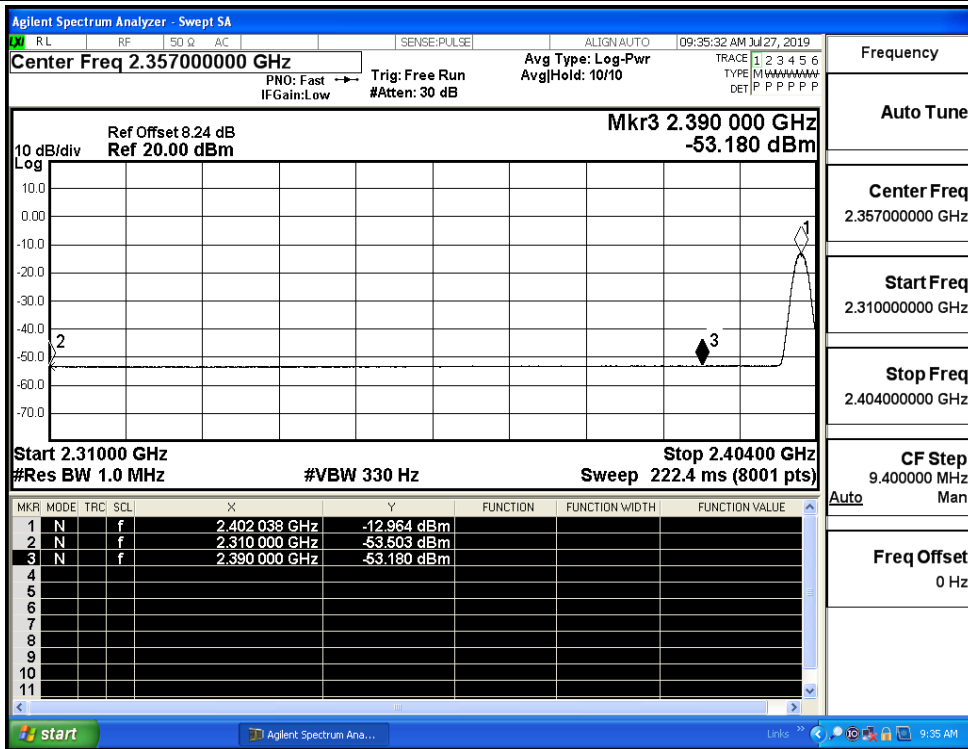

Restrict-band band-edge measurements\_BT LE\_2480\_Ant1\_PEAK

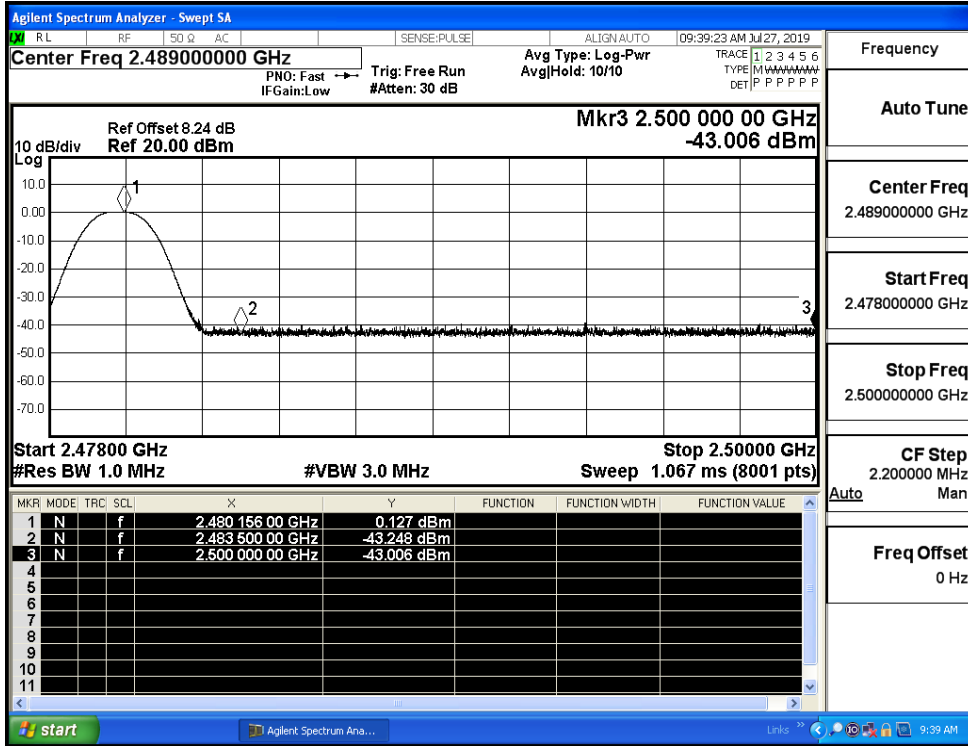

Restrict-band band-edge measurements\_BT LE\_2480\_Ant1\_AV

