



USER MANUAL


Soundsync Bluetooth Transmitter

Safety Instructions

- Do not drop, knock, or shake the device.
- Do not disassemble. Do not attempt to open the device.
- Keep the device dry and away from all types of liquids or moisture that will corrode the electronic circuits. If the device gets wet, dry it immediately.
- Avoid extreme temperatures.
- Do not use outdoors during thunderstorms.
- Use original or certified cables only.
- Do not use any corrosive cleaner / oil to clean.

The device should be charged at least once a month to preserve battery life.

What's Included




Soundsync Bluetooth Transmitter



User Manual



3.5 mm Audio Adapter



micro USB Cable



3.5 mm Audio Cable

At a Glance



- 1 Multi-function Button
- 2 LED Indicator
- 3 3.5 mm AUX Input
- 4 Micro USB Charging Port

- 5 Multipoint Connection LED Indicator
- 6 Volume Down
- 7 Volume Up

Charge the Bluetooth Transmitter before first use.


If Soundsync freezes, press and hold the multi-function button, insert the Micro USB cable to start charging, then restart Soundsync.

LED Indicator Guide

Flashing blue twice	Power on
Flashing red twice	Power off
Flashing red and blue alternately	Bluetooth pairing mode
Steady blue	Connected to a device / Connected to two devices simultaneously
Flashing blue once every 2 seconds	Disconnected from a device
Flashing blue once every second	Reconnected to a device
Steady blue (LED indicator and Multipoint connection LED indicator)	Two devices are connected simultaneously
Flashing red and blue alternately	Pairing deleted


Using Your Soundsync

Turn on / off

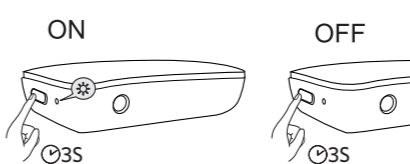

- ON** Press and hold for about 3 seconds
- OFF** Press and hold for about 3 seconds

Connect Soundsync to a Bluetooth Device

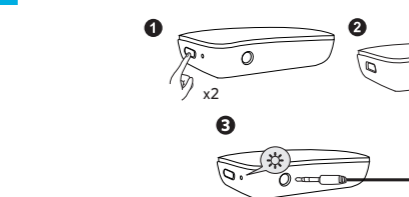

- When Soundsync is turned on, press the multifunction button twice to enter Bluetooth pairing mode. The LED indicator will flash red and blue alternately.
- Enable Bluetooth on your Bluetooth headphones or speaker and pair it with Soundsync. When successfully paired, the LED indicator will turn blue.
- Connect Soundsync to your device using the provided 3.5 mm audio cable.


For FAQs and more information, please visit:

anker.com/support

- @Anker
- @Anker Japan
- @Anker Deutschland
- @AnkerOfficial
- @Anker_JP
- @Anker

Product Number: A8327
 Soundsync Bluetooth Transmitter
 5100500XXXX V01

Connect Soundsync to two devices at the same time



1. Follow the steps in the "Connecting Soundsync to a Bluetooth device" section to connect Soundsync to the first Bluetooth headphone or speaker.
 2. Press the multifunction button twice to re-enter Bluetooth pairing mode.
 3. Enable Bluetooth on the second Bluetooth headphone or speaker and pair it with Soundsync. When successfully paired, the LED indicator and Multipoint connection LED indicator will turn blue simultaneously.
 4. Connect Soundsync to your device using the provided 3.5 mm audio cable.
- Now you can listen to music from both Bluetooth headphones or speakers.

► 07

If there is still no sound coming from your devices, turn off Soundsync and then reconnect two devices. If connection fails again, repeat the steps above.


AUX mode



Soundsync will automatically switch to AUX mode when a 3.5 mm audio cable is plugged in.

► 08

Charging Your Soundsync

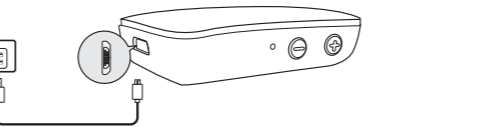

Flashing red	Low battery
Steady red	Charging (When Soundsync is turned off)
Off	Fully Charged

- Use the included Micro USB cable to charge your Soundsync and make sure it is fully charged before first use.
- When not in use, store your Soundsync in a cool place.

► 09

Specifications

Specifications are subject to change without notice.

DC input	5V \equiv 0.5A
Battery capacity	180mAh
AUX playtime	12 hours
Charging time	2 hours
Bluetooth version	V5.0
Support format	A2DP AVRCP
Supported codec	apt [™] X Low Latency apt [™] X SBC
Size	50 × 29 × 10 mm / 2.0 × 1.1 × 0.4 in
Weight (without packaging)	13.5g / 0.5oz

► 10

Declaration of Conformity

Hereby, Anker Innovations Limited declares that the radio equipment type A8327 is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <https://www.anker.com>

Maximum output power: 3.891 dBm

Frequency band: 2.4G band (2.4000GHz-2.4835GHz)

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

► 11

Warning

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

► 12

Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

The following importer is the responsible party.

Company Name: Fantasia Trading LLC
Address: 5350 Ontario Mills Pkwy, Suite 100, Ontario, CA 91764
Telephone: +1-800-988-7973

Anker Innovations Limited
Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon,
Hong Kong

► 13

Operating temperature range

14°F to 131°F / -10°C to 55°C

Range

10 m / 33 ft

► 14