



TEST REPORT

APPLICANT	: Anker Innovations Limited
PRODUCT NAME	: Nebula Solar Portable
MODEL NAME	: D2131
BRAND NAME	: NEBULA
FCC ID	: 2AOKB-D2131
STANDARD(S)	: 47 CFR Part 15 Subpart C
RECEIPT DATE	: 2020-07-01
TEST DATE	: 2020-07-29 to 2020-08-09
ISSUE DATE	: 2020-08-28

Edited by:

Pong Mi Peng Mi (Rapporteur)

Approved by:

Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.cn

Fax: 86-755-36698525 E-mail: service@morlab.cn





DIRECTORY

1. Technical Information 3
1.1. Applicant and Manufacturer Information 3
1.2. Equipment Under Test (EUT) Description 3
1.3. The Channel Number and Frequency 5
1.4. Test Standards and Results ······ 6
1.5. Environmental Conditions ······7
2. 47 CFR Part 15C Requirements ······ 8
2.1. Antenna Requirement ······ 8
2.2. Duty Cycle of Test Signal 9
2.3. Maximum Peak Conducted Output Power ······10
2.4. Maximum Average Conducted Output Power ······13
2.5. 6 dB Bandwidth ······14
2.6. Conducted Spurious Emissions and Band Edge17
2.7. Power Spectral Density (PSD)21
2.8. Conducted Emission ······24
2.9. Restricted Frequency Bands28
2.10. Radiated Emission ·······32
Annex A Test Uncertainty
Annex B Testing Laboratory Information40

Change History					
Version Date Reason for change					
1.0 2020-08-28		First edition			





1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Anker Innovations Limited			
Applicant Address:	Room 1318-19,Hollywood Plaza,610 Nathan Road, Mongkok,			
	Kowloon, Hong Kong			
Manufacturer:	Anker Innovations Limited			
Manufacturer Address: Room 1318-19,Hollywood Plaza,610 Nathan Road, Mongko				
	Kowloon, Hong Kong			

1.2. Equipment Under Test (EUT) Description

Product Name:	Nebula Solar Portable					
Serial No.:	(N/A, marked #1 by test site	(N/A, marked #1 by test site)				
Hardware Version:	V0.2					
Software Version:	H2_V2.0.1					
Equipment Type:	Bluetooth LE					
Bluetooth Version:	4.2					
Modulation Type:	GFSK					
Operating Frequency Range:	2402MHz-2480MHz					
Antenna Type:	FPC Antenna					
Antenna Gain:	0dBi					
Accessory Information:	Battery					
	Brand Name:	fuji				
	Model No.:	INR18650F1L(3INR19/66-2)				
	Serial No.: (N/A, marked #1 by test site)					
	Capacity: 6700mAh					
	Rated Voltage: 10.89V					
	Charge Limit:	12.60V				





	AC Adapter 1	
	Brand Name:	N/A
	Model No.:	PN653I
	Serial No.:	(N/A, marked #1 by test site)
	Rated Output:	5V=3A or 9V=3A or 12V=3A or 15V=3A or 20VDC=3.25A
	Rated Input:	100-240V ~ 50/60Hz 1.5A
	AC Adapter 2	
	Brand Name:	N/A
	Model No.:	PN653UP
Accessory Information:	Serial No.:	(N/A, marked #1 by test site)
	Rated Output:	5V=3A or 9V=3A or 12V=3A or 15V=3A or 20VDC=3.25A
	Rated Input:	100-240V ~ 50/60Hz 1.5A
	AC Adapter 3	
	Brand Name:	N/A
	Model No.:	A2713
	Serial No.:	(N/A, marked #1 by test site)
	Rated Output:	5V=3A or 9V=3A or 15V=3A or 20V=3.25A
	Rated Input:	100-240V ~ 50/60Hz 2.1A

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



Http://www.morlab.cn

Fax: 86-755-36698525



Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

1.3. The Channel Number and Frequency

Note 1: The black bold channels were selected for test.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn



1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title	
1	47 CFR Part 15	Radio Frequency Devices	

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark	
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation	
2	N/A	Duty Cycle of Test Signal	Jul 29, 2019	Lu Qiang	PASS	No deviation	
3	15.247(b)	Maximum Peak Conducted Output Power	Jul 29, 2019	Lu Qiang	PASS	No deviation	
4	15.247(b)	Maximum Average Conducted Output Power	Jul 29, 2019	Lu Qiang	PASS	No deviation	
5	15.247(a)	Bandwidth	Jul 29, 2019	Lu Qiang	PASS	No deviation	
6	15.247(d)	Conducted Spurious Emission and Band Edge	Jul 29, 2019	Lu Qiang	PASS	No deviation	
7	15.247(e)	Power Spectral Density (PSD)	Jul 29, 2019	Lu Qiang	PASS	No deviation	
8	15.207	Conducted Emission	Jul 25, 2020	Huang Zhiye	PASS	No deviation	
9	15.247(d)	Restricted Frequency Bands	Aug 09, 2020	Gao Jianrou	PASS	No deviation	
10	15.209, 15.247(d)	Radiated Emission	Aug 09, 2020	Gao Jianrou	PASS	No deviation	
Note	Note 1: The tests were performed according to the method of measurements prescribed in						

ANSIC63.10-2013 and KDB558074 D01 v05r02.



Http://www.morlab.cn



Note 2: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The Ref offset 2.0dB means the cable loss is 2.0dB.

Note 3: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 4: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% risk level.

1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:


Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn





2.47 CFR Part 15C Requirements

2.1. Antenna Requirement

2.1.1.Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2.Test Result: Compliant

Inside of the EUT have PIFA antennas coupled with the I-PEX connector. Please refer to the EUT internal photos.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 E-mail: service@morlab.cn Http://www.morlab.cn

Page 8 of 42




2.2. Duty Cycle of Test Signal

2.2.1.Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%).When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered). When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than ±2%; otherwise, the duty cycle is considered to be non constant.

2.2.2.Test Description

Test Setup:



ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.

2.2.3.Test Result

Test Mode	Duty Cycle(%) (D)	Duty Factor (10*lg[1/D])	
GFSK	62.90	2.01	



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel:
 86-755-36698555
 Fax:
 86-755-36698525

 Http://www.morlab.cn
 E-mail:
 service@morlab.cn



2.3. Maximum Peak Conducted Output Power


2.3.1.Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.3.2.Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

2.3.3.Test Procedure

The measured output power was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for Peak Output Power test on the spectrum analyzer: a) Set analyzer center frequency to channel center frequency

- b) Set RBW to1MHz
- c) Set VBW to 3MHz
- d) Set span to 3MHz
- e) Sweep time = auto couple
- f) Detector = peak
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use peak marker function to determine the peak amplitude level





2.3.4.Test Result

A.Test Verdict:

Channel		Measured Output Peak Power		Limit		Verdict
Channel	(MHz)	dBm	W	dBm	W	verdict
0	2402	6.44	0.0044			PASS
19	2440	7.20	0.0052	30	1	PASS
39	2480	6.65	0.0046			PASS

B.Test Plot:

Agilent Spectrum Analyzer -					
Marker 1 2.402204	ΩΩ AC 0000000 GHz	SENSE:INT	ALIGNAUTO Avg Type: Log-Pwr	1:57:17 AM Jul 29, 2020 TRACE 123456	Peak Search
	PNO: Fast IFGain:Low	Trig: Free Run Atten: 24 dB	Avg Hold>100/100	TYPE M UMANAN DET PNNNNN	NextPeak
Ref Offset 10 dB/div Ref 15.00			Mkr1	2.402 204 GHz 6.444 dBm	NextPeak
5.00			1		Next Pk Right
-5.00					
-15.0					Next Pk Left
-25.0					
-35.0					Marker Delta
-45.0					
-55.0					Mkr→CF
-65.0					Mkr→RefLvl
-75.0					
					More 1 of 2
Center 2.402000 GH #Res BW 1.0 MHz	iz #VI	BW 3.0 MHz	Sweep 1	Span 3.000 MHz .000 ms (1001 pts)	1012
MSG					

(Channel 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525 E-mail: service@morlab.cn

Http://www.morlab.cn





(Channel 19, 2440MHz)



(Channel 39, 2480MHz)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn



2.4. Maximum Average Conducted Output Power


2.4.1.Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

2.4.2.Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

2.4.3.Test Procedure

KDB 558074 Section 8.3.2 was used in order to prove compliance.

2.4.4.Test Result

			Averag	e Power		dBm W		
Channel	Frequency (MHz)	Measured	Duty Factor	Duty Factor Calculated		Lin	nit	Verdict
		dBm	гасю	dBm	W	dBm	W	
0	2402	3.84		5.85	0.0038			PASS
19	2440	4.62	2.01	6.63	0.0046	30	1	PASS
39	2480	4.15		6.16	0.0041			PASS



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




2.5.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

2.5.2.Test Description

Test Setup:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

2.5.3.Test Procedure

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize

h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by6 dB relative to the maximum level measured in the fundamental emission





The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW \ge 3 \times RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \ge 6 dB.

2.5.4.Test Result

A.Test	Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
0	2402	0.714	≥500	PASS
19	2440	0.716	≥500	PASS
39	2480	0.713	≥500	PASS

B.Test Plot:



(Channel 0, 2402MHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-m



Meas Setup Center Freq: 2.440000000 GHz Trig: Free Run Avg|Hold:>10/10 #Atten: 24 dB VBW 300.00 kHz Radio Std: None θ Radio Device: BTS Avg/Hold Num #IFGain:Low Of <u>0n</u> Ref 15.00 dBm 0 dB/div og Avg Mode Exp Repea **OBW** Power 99.00 % Center 2.44 GHz #Res BW 100 kHz Span 3 MHz Sweep 1 ms #VBW 300 kHz Occupied Bandwidth **Total Power** 13.5 dBm 1.0854 MHz x dB -6.00 dB -17.220 kHz Transmit Freq Error **OBW Power** 99.00 % x dB Bandwidth 715.8 kHz x dB -6.00 dB More 1 of 2 **STATUS**





(Channel 39, 2480MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn

-






2.6. Conducted Spurious Emissions and Band Edge

2.6.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.6.2.Test Description

Test Setup:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

2.6.3.Test Procedure

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



2.6.4.Test Result

A.Test Verdict:

	(MHz) Band Emission 2402 -42.33	Measured Max. Out of	Limit	(dBm)	
Channel		Band Emission (dBm) Carrier Level Calculated Verdict -20dBc Limit -20dBc Limit -20dBc Limit -20dBc Limit	Verdict		
	0.400	10.00	5.00		5400
0	2402	-42.33	5.39	-14.61	PASS
19	2440	-43.95	6.27	-13.73	PASS
39	2480	-44.36	5.90	-14.10	PASS

B.Test Plot:



(30MHz to 25GHz, Channel 0)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn

E-mail: service@morlab.cn



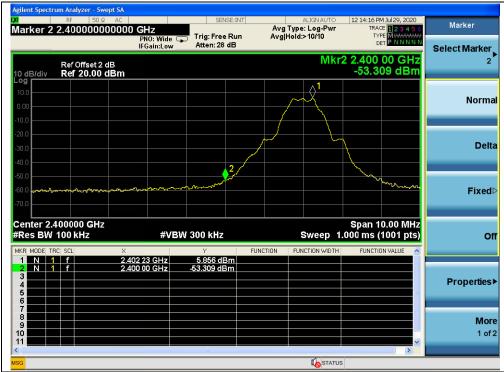


(Band Edge, Channel 0)



(30MHz to 25GHz, Channel 19)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn











(Band Edge, Channel 39)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Fax: 86-755-36698525 E-mail: service@morlab.cn






2.7. Power Spectral Density (PSD)

2.7.1.Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.7.2.Test Description

Test Setup:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

2.7.3.Test Procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level within the RBW





2.7.4.Test Result

A.Test Verdict:

	Spe	ctral Power Density (dBm/3kH	lz)	
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
0	2402	-7.62	8	PASS
19	2440	-6.91	8	PASS
39	2480	-7.41	8	PASS

B.Test Plot:



(Channel 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn

E-mail: service@morlab.cn







(Channel 19, 2440MHz)



(Channel 39, 2480MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn

Fax: 86-755-36698525 E-mail: service@morlab.cn



2.8. Conducted Emission

2.8.1.Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dBµV)	
Frequency range (initiz)	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50


Note:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.8.2.Test Description

Test Setup:

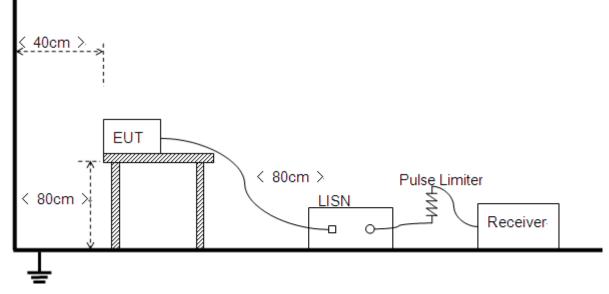

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



2.8.3.Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.


A.Test Setup:

Test Mode: <u>EUT+ADPTER+BT TX</u> Test voltage: <u>AC 120V/60Hz</u> The measurement results are obtained as below: E [dB μ V] =U_R + L_{Cable loss} [dB] + A_{Factor} U_R: Receiver Reading A_{Factor}: Voltage division factor of LISN



```
Fax: 86-755-36698525
```



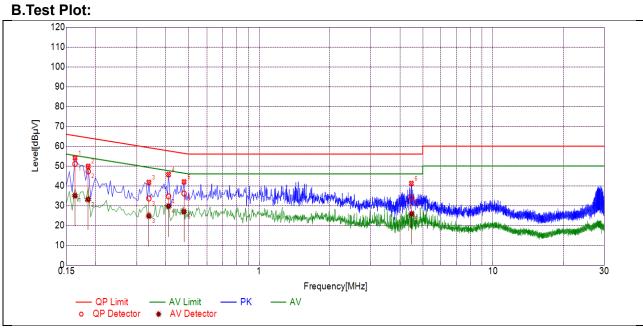

(L	Phase)
----	--------


NO.	Fre.	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict	
	(MHz)	Quai-peak	Average	Quai-peak	Average			
1	0.1634	51.04	35.03	65.29	55.29		PASS	
2	0.1860	47.28	33.17	64.21	54.21		PASS	
3	0.3389	33.61	24.79	59.23	49.23	Lino	PASS	
4	0.4109	34.69	29.74	57.63	47.63	Line	PASS	
5	0.4785	36.11	27.00	56.37	46.37		PASS	
6	4.4784	34.09	25.84	56.00	46.00		PASS	



Tel: 86-755-36698555

Fax: 86-755-36698525 E-mail: service@morlab.cn



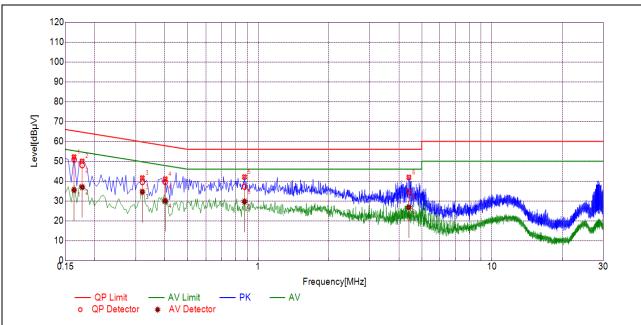

(N Phase)

NO.	Fre.	Emission L	evel (dBµV)	Limit (dBµV)	Power-line	Verdict	
	(MHz)	Quai-peak	Average	Quai-peak	Average		Voralet	
1	0.1636	50.77	35.52	65.28	55.28		PASS	
2	0.1771	47.94	36.97	64.62	54.62		PASS	
3	0.3209	39.45	34.60	59.68	49.68	Neutral	PASS	
4	0.4019	39.48	30.07	57.81	47.81	neutrai	PASS	
5	0.8746	37.13	29.70	56.00	46.00		PASS	
6	4.4064	34.71	26.81	56.00	46.00		PASS	



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn

E-mail: service@morlab.cn






2.9. Restricted Frequency Bands

2.9.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.9.2.Test Description

Test Setup

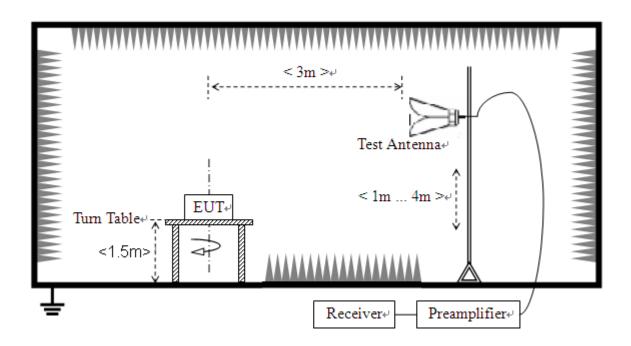

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.





2.9.3.Test Result

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

A.Test Verdict:

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
Onanner	(MHz)	PK/ AV	U _R (dBµV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Verdiet
0	2387.54	PK	48.13	-29.67	32.56	51.02	74	PASS
0	2386.81	AV	44.86	-29.67	32.56	47.75	54	PASS
39	2485.80	PK	47.90	-29.67	32.56	50.79	74	PASS
39	2483.50	AV	44.66	-29.67	32.56	47.55	54	PASS



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn


E-mail: service@morlab.cn



B.Test Plot:

- đ ×									Analyzer -		
Marker	PM Aug 07, 2020		ALIGN OFF	Avg T	NSE:INT	SE	CH7	Ω DC	SEL 50		L kor 1
Select Marker		TYF De	d:>100/100	Avg Ho		Trig: Fre Atten: 1	PNO: Fast C IFGain:Low	000000	57550	2,30	Ker
1	536 GHz 25 dBµV	2.387 5 48.12	Mkr1					9 dBµV	f 106.9	Ref	B/div
Norma	A										
Delta		.1.0									
		↓ ↓ ↓ ↓ 2	congresse faithered	an a		4 99-40-00-00-00-00-00-00-00-00-00-00-00-00-	m	hann an star a star		eherret Branderster	and ag
Fixed▷											
Off	0400 GHz (1001 pts)	.000 ms (Sweep 1	NCTION		N 3.0 MHz	#VB	1Hz ×	R) 1 M	0000 (CISP	BW
Properties►		FUNCTIO		NCTION	βµV	48.125 dE 46.123 dE	536 GHz 000 GHz	2.387		RC SCL 1 f 1 f	Ν
, spenes	E										
More 1 of 2											
	- F					m					


(PEAK, Channel 0)

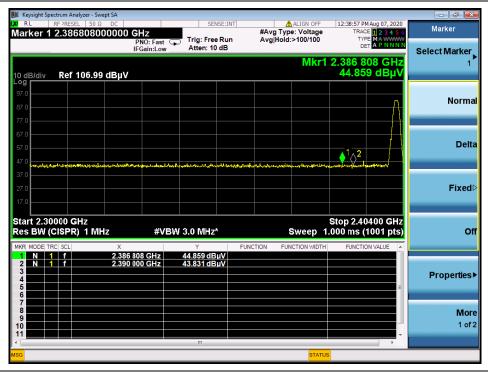

(AVERAGE, Channel 0)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn





					A	Analyzer - Swep	t Spectrum a	🎉 Keysight
Marker	01:09:20 PM Aug 07, 2020 TRACE 1 2 3 4 5 6	ALIGN OFF	SENSE:INT			ESEL 50 Ω		<mark>w</mark> RL Marker
Select Marker	DET P P N N N N	vg Hold:>100/100	g: Free Run ten: 10 dB		PNO: Fas IFGain:Lo			
2	2.485 804 GHz 47.895 dBµV	Mkr2			3µV	f 106.99 (iv Re	10 dB/di
Normal								97.0 97.0
Delta	arnuret filturet og også kan statet	diget of later an of the back of solar		¢ ²	1	A. Maria	A A A A A A A A A A A A A A A A A A A	77.0 67.0 57.0 47.0
Fixed⊳								37.0 27.0 17.0
Off	Stop 2.50000 GHz .000 ms (1001 pts)		۲ I	VBW 3.	Х	R) 1 MHz	N (CISP	
Properties►	E		87 dBµV 95 dBµV		2.483 500 GHz 2.485 804 GHz		1 f 1 f	1 N 2 N 3 4 5 6
More 1 of 2	•							7 8 9 10 11
		STATUS						MSG

(PEAK, Channel 39)

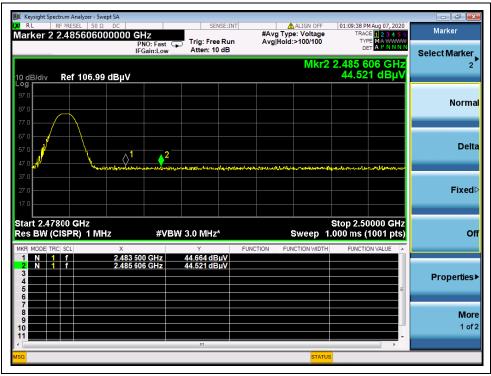

(AVERAGE, Channel 39)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn



2.10. Radiated Emission

2.10.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. **Note2:**For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).







2.10.2.Test Description

Test Setup:

1) For radiated emissions from 9kHz to 30MHz

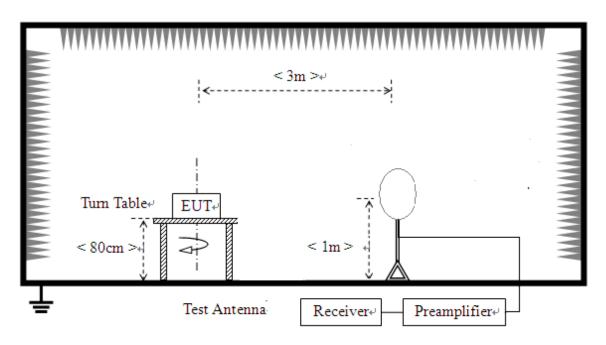

2) For radiated emissions from 30MHz to1GHz

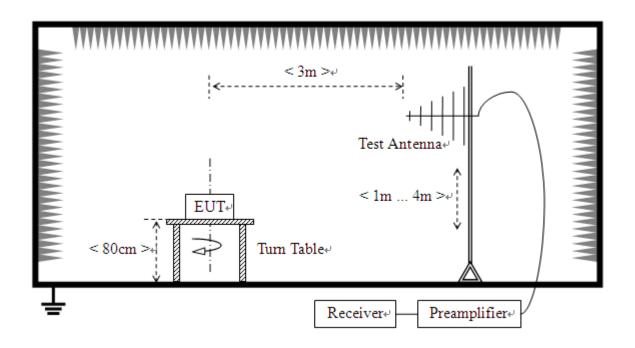




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel:
 86-755-36698555
 Fax:
 86-755-36698525

 Http://www.morlab.cn
 E-mail:
 service@morlab.cn



3) For radiated emissions above 1GHz

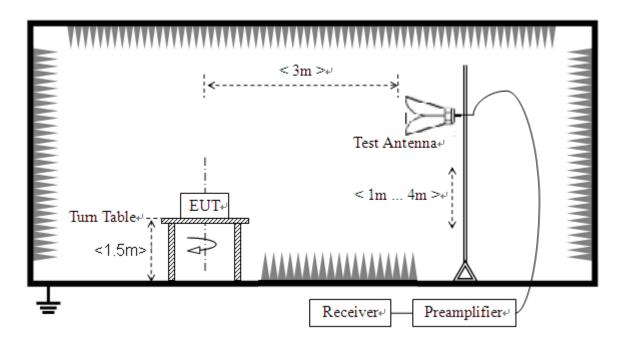

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10:2013. For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, for radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10:2013.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT.

Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

2.10.3.Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China






Plot for Channel 0

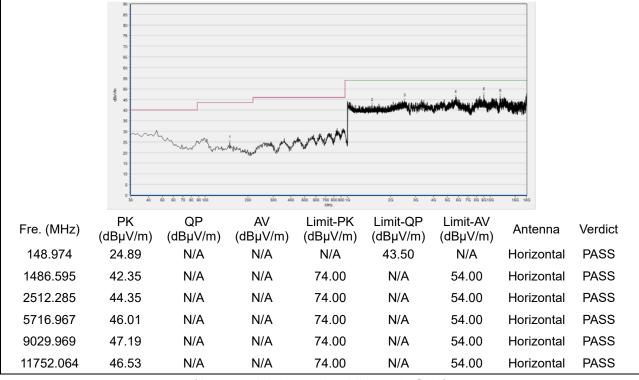

(Antenna Horizontal, 30MHz to 18GHz)

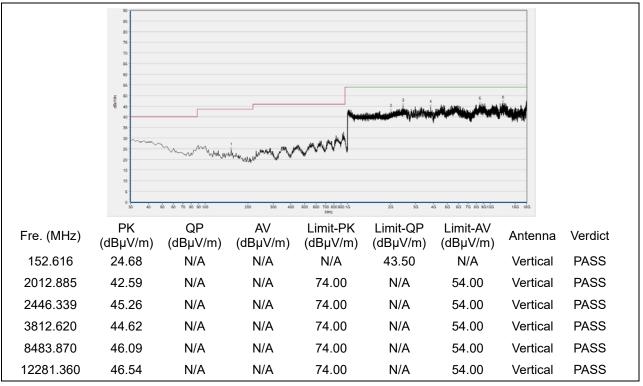


(Antenna Vertical, 30MHz to 18GHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525 E-mail: service@morlab.cn

Http://www.morlab.cn






Plot for Channel 19

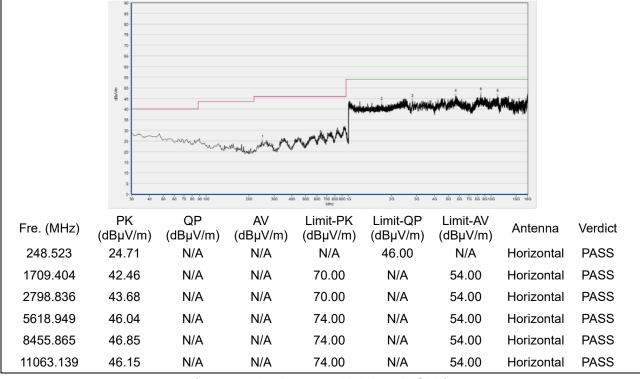

(Antenna Horizontal, 30MHz to 18GHz)

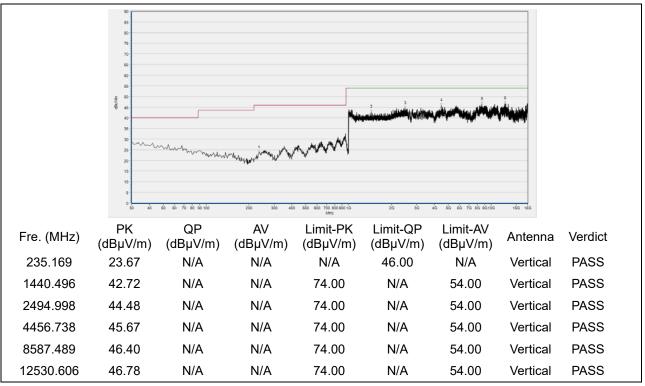

(Antenna Vertical, 30MHz to 18GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn

E-mail: service@morlab.cn






Plot for Channel 39

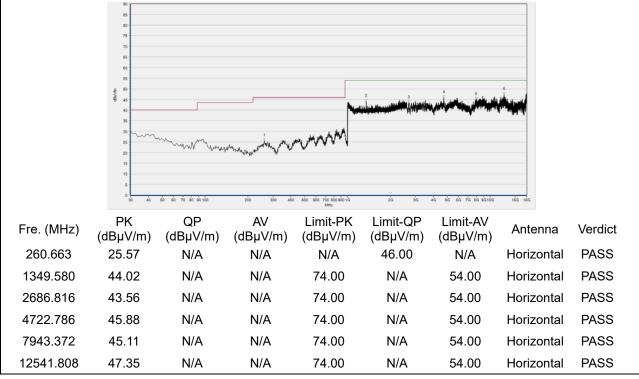

(Antenna Horizontal, 30MHz to 18GHz)

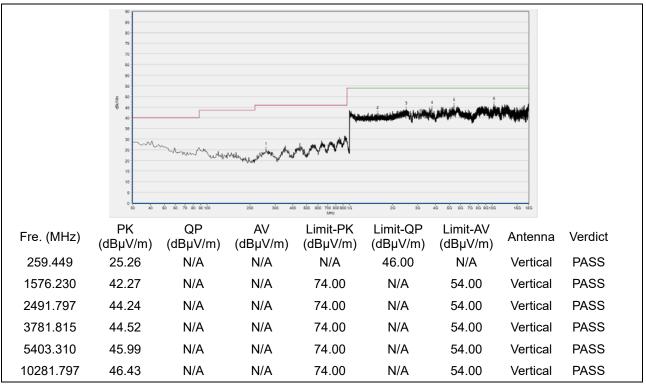

(Antenna Vertical, 30MHz to 18GHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn

E-mail: service@morlab.cn



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test Items	Uncertainty
Peak Output Power	±2.22dB
Power Spectral Density (PSD)	±2.22dB
Bandwidth	±5%
Conducted Spurious Emission	±2.77dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn

-



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.				
	Morlab Laboratory				
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang				
	Road, Block 67, BaoAn District, ShenZhen, GuangDong				
	Province, P. R. China				
Telephone:	+86 755 36698555				
Facsimile:	+86 755 36698525				

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.





4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
EXA Signal Analzyer	MY53470836	N9010A	Agilent	2020.04.01	2021.03.31
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNE R	N/A	N/A
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
Receiver	MY5640009 3	N9038A	KEYSIGHT	2020.03.26	2021.03.25
LISN	8127449	NSLK 8127	Schwarzbeck	2020.03.26	2021.03.25
Pulse Limiter	VTSD 9561	VTSD	Schwarzbeck	2020.07.24	2021.07.23
(10dB)	F-B #206	9561-F			
Coaxial					
cable(BNC)	CB01	EMC01	Morlab	N/A	N/A
(30MHz-26GHz)					
NOTEBOOK	DF2DR A01	VOSTRO	DELL	NA	NA
NUTEDUUK	DPC	5370	DELL		
USB drive	NA	DTSE9	Kingston	NA	NA

4.3 List of Software Used

Description	Manufacturer	Software Version
Test System	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn



4.4 Radiated Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal.Due
Receiver	MY54130016	N9038A	Agilent	2020.07.21	2021.07.20
Test Antenna - Bi-Log	9163-520	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Loop	1520-022	FMZB1520	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna – Horn	BBHA9170 #774	BBHA 9170	Schwarzbeck	2019.07.26	2022.07.25
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable(N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2020.07.21	2021.07.20
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-2400- 2483.5-60SS	Wainwright	2020.07.21	2021.07.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

____ END OF REPORT ____



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn