

TEST REPORT

: Anker Innovations Limited

PRODUCT NAME	: HomeBase 2
MODEL NAME	: T8010
BRAND NAME	: eufy SECURITY

APPLICANT

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2019-08-16

- **TEST DATE** : 2019-08-28 to 2019-09-08
- **ISSUE DATE** : 2019-09-18

Edited by:

ong /Viz

Peng Mi(Rapporteur)

Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

Approved by:



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: Http://www.morlab.cn E-ma

Fax: 86-755-36698525 E-mail: service@morlab.cn





DIRECTORY

1. T	echnical Information 4
1.1.	Applicant and Manufacturer Information 4
1.2.	Equipment Under Test (EUT) Description 4
1.3.	Test Standards and Results 6
1.4.	Environmental Conditions 7
2. 4	7 CFR Part 15C Requirements 8
2.1.	Antenna requirement 8
2.2.	Duty Cycle Of Test Signal 8
2.3.	Maximum Peak and Average Conducted Output Power12
2.4.	Bandwidth ······15
2.5.	Conducted Spurious Emissions and Band Edge22
2.6.	Power spectral density (PSD)
2.7.	Conducted Emission39
2.8.	Restricted Frequency Bands43
2.9.	Radiated Emission53
Anne	ex A Test Uncertainty66
Anne	ex B Testing Laboratory Information67





Change History			
Version Date Reason for change			
1.0	2019-09-18	First edition	



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn

Page 3 of 69



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Anker Innovations Limited	
Applicant Address:	Room 1318-19, Hollywood Plaza,610 Nathan Road, Mongkok,	
	Kowloon, Hong Kong	
Manufacturer:	Anker Innovations Limited	
Manufacturer Address:	Room 1318-19, Hollywood Plaza,610 Nathan Road, Mongkok,	
	Kowloon, Hong Kong	

1.2. Equipment Under Test (EUT) Description

Product Name:	HomeBase 2		
Serial No:	(N/A, marked #1 by test site)	
Hardware Version:	V3		
Software Version:	V3.0.0.3		
Equipment type:	WLAN2.4G		
Modulation Type:	DSSS, OFDM		
Operating Frequency Range:	802.11b/g/ n(HT20): 2.412GHz - 2.462GHz		
Antenna Type:	PCB Antenna		
Antenna Gain:	Ant 0: 0 dBi; Ant 1: 0 dBi		
Directional Gain:	3.01 dBi _{Note 3}		
	AC Adapter		
	Brand Name:	N/A	
Accessory Information.	Model No.:	ASSA67A-120200	
Accessory Information:	Serial No.:	(N/A, marked #1 by test site)	
	Rated Voltage:	12V2A	
	Charge Limit:	100-240V ~ 50/60Hz 0.8A	

Note 1: We use the dedicated software to control the EUT continuous transmission. **Note 2:** The EUT has two antennas, all modulation modes support SISO function.

Modulation Mode:	TX Function	Relationship between the two output signals
802.11b	1TX	Uncorrelated
802.11g	1TX	Uncorrelated
802.11n	1TX	Uncorrelated



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



Note 3: According to KDB 662911 D01, the directional gain = G_{ANT} + 10log(N_{ANT}) dBi, where G_{ANT} is the maximum antenna gain in dBi, N_{ANT} is the number of outputs.

Note 4: For conducted test item Peak Power and Power spectral density of each modulation mode, we recorded the test result of two antennas separately, for other conducted test items both of the two antennas were tested separately, we only recorded the worst test result(Ant 0) in this report. **Note 5:** All radiation test items for all modulation modes operate at SISO mode, both of the two antennas were tested separately, we only recorded the worst test result (Ant 0) in this report. **Note 6:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
	1	2412	8	2447
	2	2417	9	2452
000 11h/a/	3	2422	10	2457
802.11b/g/	4	2427	11	2462
n(HT20)	5	2432		
	6	2437		
	7	2442		

1.3. The channel number and frequency

Note1: The Lowest Channel (1), Middle Channel (6) and Highest Channel (11) was selected test for 802.11b/g/n(HT20) mode;





1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

N	dentity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle Of Test Signal	Aug 28, 2019	Zhou Chuang	PASS	No deviation
3	15.247(b)	Maximum Peak and Average Conducted Output Power	Aug 28, 2019	Zhou Chuang	PASS	No deviation
4	15.247(a)	Bandwidth	Aug 28, 2019	Zhou Chuang	PASS	No deviation
5	15.247(d)	Conducted Spurious Emission and Band Edge	Aug 28, 2019	Zhou Chuang	PASS	No deviation
6	15.247(e)	Power spectral density (PSD)	Aug 28, 2019	Zhou Chuang	PASS	No deviation
7	15.207	Conducted Emission	Aug 29, 2019	Lin Jiayong	PASS	No deviation
8	15.247(d)	Restricted Frequency Bands	Sep 11, 2019	Gao Jianrou	PASS	No deviation
9	15.209, 15.247(d)	Radiated Emission	Sep 11, 2019	Gao Jianrou	PASS	No deviation

Note1: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013, KDB558074 D01 v05r02 and KDB662911 D01 v02r01.

Note2: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 12dB contains two parts that cable loss 2dB and Attenuator 10dB.

Note 3: Additions to, deviation, or exclusions from the method should be judged in the "method



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



determination" column of add, deviate or exclude from the specific method should be explained in the "Remark" of the above table.

1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106





2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Duty Cycle Of Test Signal

2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this subclause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



2.2.2. Test Description

A. Test Set:



ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.

2.2.3. Test Result

A. Test Verdict:

Test Mode	Duty Cycle (%) (D)	Duty Factor (10*lg[1/D])
802.11b	98.59	0.06
802.11g	89.71	0.47
802.11n(HT20)	97.39	0.11






B. Test Plots

🎉 Agilent Spectrum Analyzer - Swept SA 05:41:44 PM Aug 28, 2019 TRACE 2 3 4 5 ALIGN AUTO Avg Type: Log-Pwr Marker <u>3 Δ</u> 8.52000 ms Marker Trig: Free Run Atten: 40 dB TYPE WWWWW DET PNNN PNO: Fast IFGain:Low Select Marker ΔMkr3 8.520 ms 1.00 dE Ref Offset 12 dB Ref 35.00 dBm 10 dB/c Log r 3∆1 \bigcirc Norma Delta **Fixed** Center 2.412000000 GHz Res BW 8 MHz Span 0 Hz Sweep 30.00 ms (1001 pts) #VBW 8.0 MHz Off FUNCTION FUNCTION WIDTH 26.59 dBi 1 t (Δ) 1 t (Δ) 8.400 ms (Δ) 8.520 ms (Δ) 0.33 dE 1.00 dE Δ1 **Properties** 456 More 1 of 2 10 11 STATUS MSG

(Channel 1, 2412MHz, 802.11b)

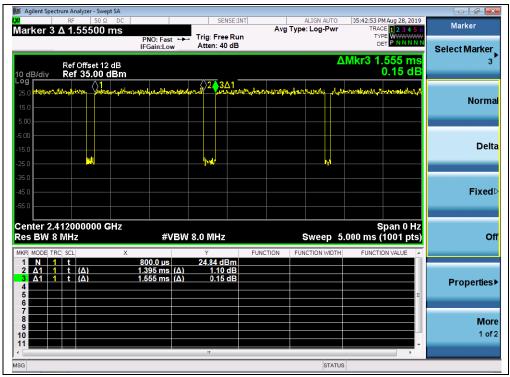

(Channel 1, 2412MHz, 802.11g)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel:
 86-755-36698555
 Fax:
 86-755-36698525

 Http://www.morlab.cn
 E-mail:
 service@morlab.cn



🃁 Agilent Spectrum Analyzer - Swept SA				
Marker 3 Δ 1.34000 ms	SENSE:IN	Avg Type: Log-Pwr	05:43:48 PM Aug 28, 2019 TRACE 1 2 3 4 5 6	Marker
	PNO: Fast ++ Trig: Free Run IFGain:Low Atten: 40 dB	1	TYPE WWWWWW DET PNNNN	Select Marker
Ref Offset 12 dB 10 dB/div Ref 35.00 dBm			Mkr3 1.340 ms -0.31 dB	3
Log 25.0 4	hand and a second s	And	animuly proba	Normal
-5.00 -15.0 -25.0				Delta
-35.0 -45.0 -55.0				Fixed⊳
Center 2.412000000 GHz Res BW 8 MHz	#VBW 8.0 MHz	Sweep 5.	Span 0 Hz .000 ms (1001 pts)	Off
1 N 1 t 2 Δ1 1 t (Δ) 3 Δ1 1 t (Δ) 4 5 6 6 6	2.060 ms 25.15 dBm 1.305 ms (Δ) -0.36 dB 1.340 ms (Δ) -0.31 dB		=	Properties▶
7 8 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9			-	More 1 of 2
MSG		STATUS		

(Channel 1, 2412MHz, 802.11 n(HT20))





2.3. Maximum Peak and Average Conducted Output Power


2.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed1 Watt.

2.3.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

A. Test Setup:



The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.





2.3.3. Test Result

Maximum Peak Conducted Output Power

802.11b Test Mode

	Frequency		Measured Peak Power					
Channel Frequency		ANT 0		AN	(dBm)		Verdict	
	(MHz)	dBm	W	dBm	W	dBm	W	
1	2412	21.95	0.157	19.08	0.081			PASS
6	2437	22.28	0.169	19.35	0.086	30	1	PASS
11	2462	21.77	0.150	19.83	0.096			PASS


802.11g Test mode

	Frequency		Measured Peak Power					
Channel	Channel Frequency		ANT 0		ANT 1			Verdict
	(MHz)	dBm	W	dBm	W	dBm	W	
1	2412	28.47	0.703	28.12	0.649			PASS
6	2437	27.41	0.551	28.19	0.659	30	1	PASS
11	2462	27.62	0.578	28.64	0.731			PASS

802.11n(HT20) Test mode

	Frequency		Measured Peak Power					
Channel	Channel Frequency (MHz)		ANT 0		ANT 1			Verdict
	(101112)	dBm	W	dBm	W	dBm	W	
1	2412	28.86	0.769	28.54	0.714			PASS
6	2437	28.65	0.733	28.56	0.718	30	1	PASS
11	2462	28.52	0.711	28.27	0.671			PASS







Maximum Average Conducted Output Power

802.11b Test Mode

	Average Power									
Frequency	Meas	sured	Duty	Duty Duty factor Calculated				Lim	it	Verdict
(MHz)	ANT0	ANT1	Factor	ctor ANTO ANT1						vertici
	dBm	dBm		dBm	W	dBm	W	dBm	W	
2402	20.02	17.12		20.08	0.102	17.18	0.052			PASS
2440	19.93	17.45	0.06	19.99	0.100	17.51	0.056	30	1	PASS
2480	19.59	17.78		19.65	0.092	17.84	0.061			PASS

802.11g Test Mode

			Average Power							
Frequency	Meas	sured	Duty	Duty Duty factor Calculated				Limit		Verdict
(MHz)	ANT0	ANT1	Factor	r ANTO ANT1					veruici	
	dBm	dBm		dBm	W	dBm	W	dBm	W	
2402	17.97	18.03		18.44	0.070	18.50	0.071			PASS
2440	17.62	17.96	0.47	18.09	0.064	18.43	0.070	30	1	PASS
2480	16.44	18.55		16.91	0.049	19.02	0.080			PASS

802.11 n(HT20) Test Mode

Frequency	Meas	sured	Duty Duty factor Calculated			Calculated		Duty factor Calculated		Lim	it	Verdict
(MHz)	ANT0	ANT1	Factor	ANTO ANT1				veruici				
	dBm	dBm		dBm	W	dBm	W	dBm	W			
2402	18.09	18.11		18.20	0.066	18.22	0.066			PASS		
2440	17.47	18.19	0.11	17.58	0.057	18.30	0.068	30	1	PASS		
2480	17.06	18.60		17.17	0.052	18.71	0.074			PASS		






2.4.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.4.2. Test Description

A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

2.4.3. Test procedure

KDB 558074 Section 8.2 was used in order to prove compliance.





2.4.4. Test Result

802.11b Test mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	9.083	≥500	PASS
6	2437	9.759	≥500	PASS
11	2462	9.759	≥500	PASS

B. Test Plots




(Channel 1, 802.11b)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn







(Channel 6, 802.11b)



(Channel 11, 802.11b)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



802.11g Test mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	15.10	≥500	PASS
6	2437	15.10	≥500	PASS
11	2462	15.10	≥500	PASS

B. Test Plots:



(Channel 1, 802.11g)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn





(Channel 6, 802.11g)



(Channel 11, 802.11g)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



802.11n(HT20) Test mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	15.64	≥500	PASS
6	2437	15.70	≥500	PASS
11	2462	16.29	≥500	PASS

B. Test Plots:



(Channel 1, 802.11n(HT20))



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn





(Channel 6, 802.11n(HT20))



(Channel 11, 802.11n(HT20))

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn




2.5. Conducted Spurious Emissions and Band Edge

2.5.1. Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.5.2. Test Description

A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

2.5.3. Test procedure

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.






2.5.4. Test Result

802.11b Test mode

A. Test Verdict:

		Measured Max. Out	Limi	t (dBm)	
Channel	Frequency (MHz)	of Band Emission	Carrier	Calculated	Verdict
		(dBm)	Level	-20dBc Limit	
1	2412	-27.05	12.39	-7.61	PASS
6	2437	-27.55	12.24	-7.76	PASS
11	2462	-25.40	12.46	-7.54	PASS

B. Test Plots:

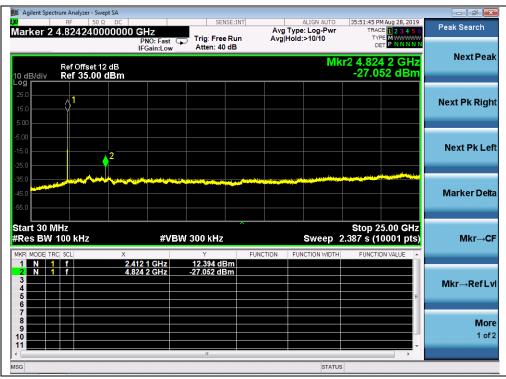


(Channel = 1, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel:
 86-755-36698555
 Fax:
 86-755-36698525


 Http://www.morlab.cn
 E-mail:
 service@morlab.cn





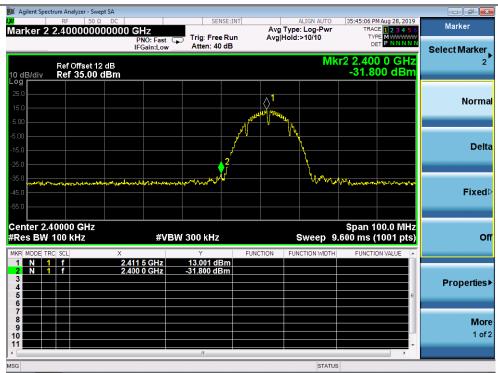

(Band Edge, Channel = 1)

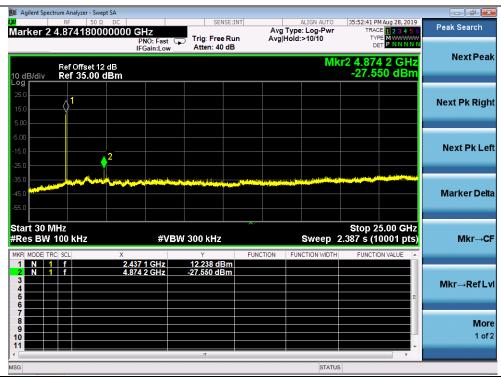


(Channel = 6, 30MHz to 25GHz)

MORLAB



🎉 Agilent Spectrum Analyzer - Swept S						
₩ 50 Ω 1 Marker 2 4.924120000		SENSE:I	Avg Ty	ALIGN AUTO pe: Log-Pwr ld:>10/10	05:48:54 PM Aug 28, 20 TRACE 1 2 3 4 TYPE MWWW	Peak Search
Ref Offset 12 df 10 dB/div Ref 35.00 dB	IFGain:Low	Atten: 40 dB		Mk	r2 4.924 1 GH -25.398 dBi	Next Peak
25.0 15.0 5.00						Next Pk Right
-5.00 -15.0 -25.0						Next Pk Left
-35.0 -45.0 -55.0						Marker Delta
Start 30 MHz #Res BW 100 kHz	#VE	300 kHz	FUNCTION F	Sweep 2	Stop 25.00 GH 2.387 s (10001 pt FUNCTION VALUE	
1 N 1 f 2 N 1 f 3 4 5 6 6	2.462 1 GHz 4.924 1 GHz	12.455 dBm -25.398 dBm				Mkr→RefLv
0 7						More 1 of 2
MSG		m		STATUS	•	

(Channel = 11, 30MHz to 25GHz)

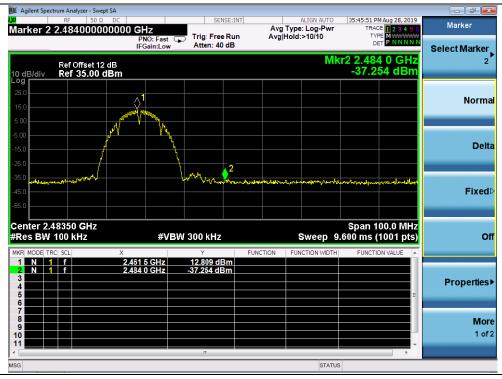

(Band Edge, Channel = 11)

MORLAB




802.11g Test mode

A. Test Verdict:

		Measured Max. Out	Limi			
Channel	Frequency (MHz)	of Band Emission	Carrier	Calculated	Verdict	
		(dBm)	(dBm) Level -20dBc Lim			
1	2412	-32.96	8.27	-11.73	PASS	
6	2437	-30.12	10.85	-9.15	PASS	
11	2462	-31.70	10.11	-9.89	PASS	

B. Test Plots:

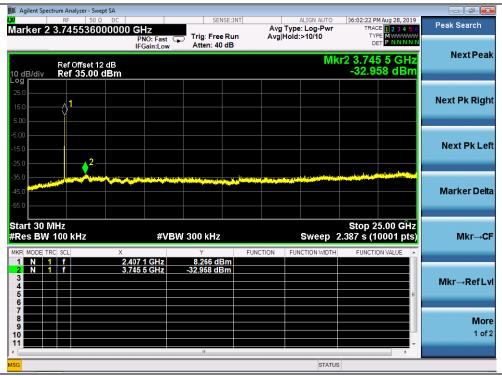


(Channel = 1, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



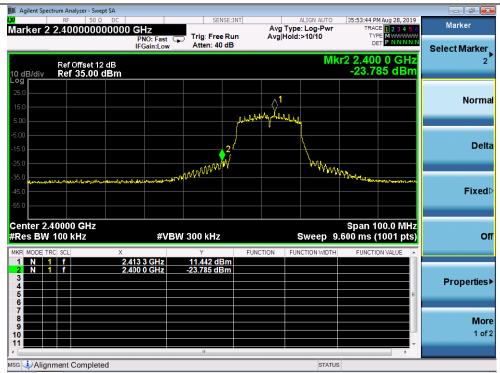

(Band Edge, Channel = 1)

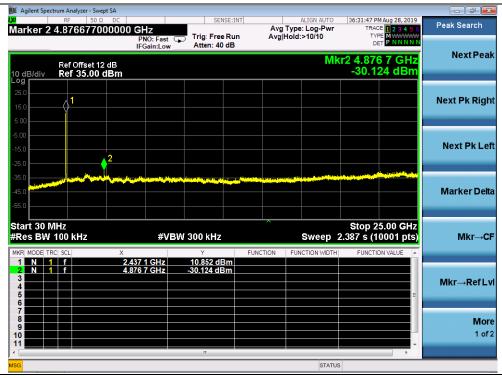

(Channel = 6, 30MHz to 25GHz)


MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



15.0 Next Pk Left 25.0 2 Next Pk Left								ot SA	nalyzer - Swep	nt Spectrum	📕 Agile
Ref Offset 12 dB Mkr2 3.710 6 GHz Next Peak 0 dB/div Ref 35.00 dBm -31.696 dBm Next Pk Right 0 dB/div 1 -31.696 dBm Next Pk Right 0 dB/div 2 -31.696 dBm Next Pk Right 0 dB/div -31.696 dBm -31.696 dBm Next Pk Right 0 dB/div -31.696 dBm -31.696 dBm Next Pk Right 0 dB/div -31.696 dBm -31.696 dBm Next Pk Right 0 dB/div -31.696 dBm -31.696 dBm Next Pk Right 0 dB/div -31.696 dBm -31.696 dBm Next Pk Right 0 dB/div -31.696 dBm -31.696 dBm Next Pk Right	Peak Search	E 1 2 3 4 5 6	TRAC	e: Log-Pwr		 	Hz	00000 G			<mark>.x</mark> Mark
250 1 1 1 Next Pk Right 150 1 1 1 1 1 500 1 1 1 1 1 150 1 1 1 1 1 500 1 1 1 1 1 150 1 1 1 1 1 150 1 1 1 1 1 150 1 1 1 1 1 150 1 1 1 1 1 150 1 1 1 1 1 150 1 1 1 1 1 150 1 1 1 1 1 150 1 1 1 1 1 150 1 1 1 1 1 150 1 1 1 1 1 150 1 1 1 1 1 150 1 1 1 1 1 150 1 1 1 1 1 150 1 1 1 1 1 <td< th=""><th>Next Peak</th><th>0 6 GHz</th><th>r2 3.71</th><th></th><th></th><th></th><th></th><th>dB</th><th></th><th></th><th>10 dB</th></td<>	Next Peak	0 6 GHz	r2 3.71					dB			10 dB
15.0 Next Pk Left	Next Pk Right								1		25.0 - 15.0 -
	Next Pk Left								2		-5.00 - -15.0 - -25.0 -
	Marker Delta		en al se principal de la se del Record de la seconda de		2				and the state of the		-35.0 - -45.0 -
Start 30 MHz Stop 25.00 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.387 s (10001 pts) MKR_MODE[TRC] SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE -	Mkr→CF	0001 pts)	2.387 s (1			Y				BW 10	#Res
1 N 1 f 2.457 1 GHz 10.109 dBm 2 N 1 f 3.710 6 GHz -31.696 dBm 3 4 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	Mkr→RefLvl	E									2 3 4 5
7 8 8 8 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9											7 8
		•	1	CTATU		 m					K ■

(Channel = 11, 30MHz to 25GHz)

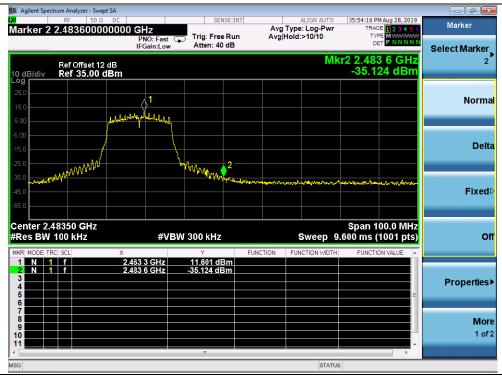

(Band Edge, Channel = 11)

MORLAB




802.11n(HT20) Test mode

A. Test Verdict:

		Measured Max. Out	Limit		
Channel	Frequency (MHz)	of Band Emission	Carrier	Calculated	Verdict
		(dBm)	Level	-20dBc Limit	
1	2412	-32.13	10.49	-9.51	PASS
6	2437	-31.72	11.29	-8.71	PASS
11	2462	-30.16	11.87	-8.13	PASS


B. Test Plots:

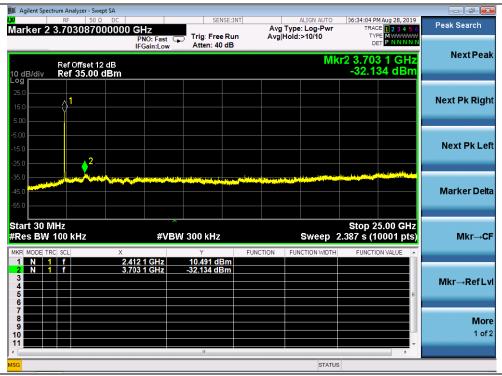


(Channel = 1, 30MHz to 25GHz)





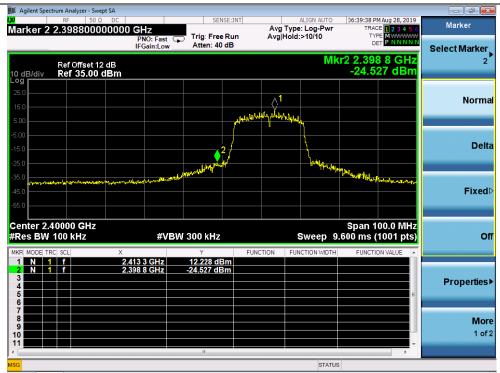

(Band Edge, Channel = 1)

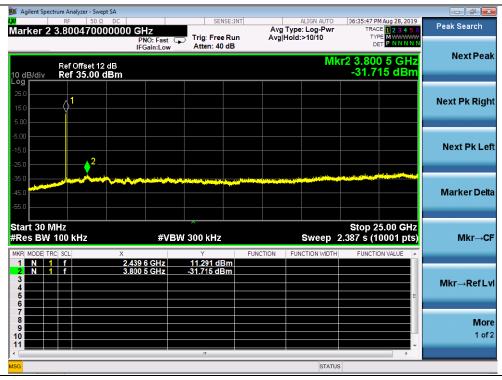

(Channel = 6, 30MHz to 25GHz)


MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



🗾 Agilent Spectrum Analyzer - Swept SA				
₩ RF 50 Ω DC Marker 2 22.582904000000	0 GHz	Avg Type: Log-Pwr	06:38:02 PM Aug 28, 2019 TRACE 1 2 3 4 5 6	Peak Search
Ref Offset 12 dB	PNO: Fast Trig: Free Run IFGain:Low Atten: 40 dB	-	2 22.582 9 GHz -30.155 dBm	Next Peak
25.0 15.0 5.00 CBIII				Next Pk Right
-5.00			2	Next Pk Left
-35.0 -45.0 -55.0				Marker Delta
Start 30 MHz #Res BW 100 kHz	#VBW 300 kHz	Sweep 2	Stop 25.00 GHz 2.387 s (10001 pts)	Mkr→CF
1 N 1 f 2.4 2 N 1 f 22.5 3 4 - - 6 - - 6	64 6 GHz 11.873 dBm 82 9 GHz -30.155 dBm		<u>е</u>	Mkr→RefLvl
7 8 9 10 11				More 1 of 2
MSG		STATUS	i	

(Channel = 11, 30MHz to 25GHz)

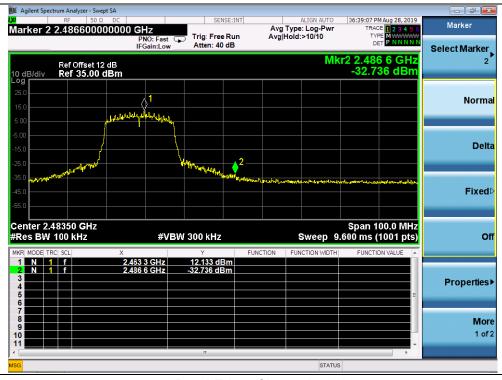

(Band Edge, Channel = 11)

MORLAB

MORLA




2.6. Power spectral density (PSD)

2.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.6.2. Test Description

A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

2.6.3. Test procedure

KDB 558074 Section 8.4 was used in order to prove compliance.





2.6.4. Test Result

802.11b Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PSI	Limit	Verdict	
		ANT 0	ANT 1	(dBm/3kHz)	, er allet
1	2412	1.69	5.57	8	PASS
6	2437	-7.75	6.60	8	PASS
11	2462	5.06	3.89	8	PASS

B. Test Plots:



(Channel = 1, 802.11b, ANT 0)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn







(Channel = 6, 802.11b, ANT 0)



(Channel = 11, 802.11b, ANT 0)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn




802.11g Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PSI	Limit	Verdict	
		ANT 0	ANT 1	(dBm/3kHz)	
1	2412	-4.52	-8.49	8	PASS
6	2437	-4.78	-9.54	8	PASS
11	2462	-2.90	-8.37	8	PASS


B. Test Plots:

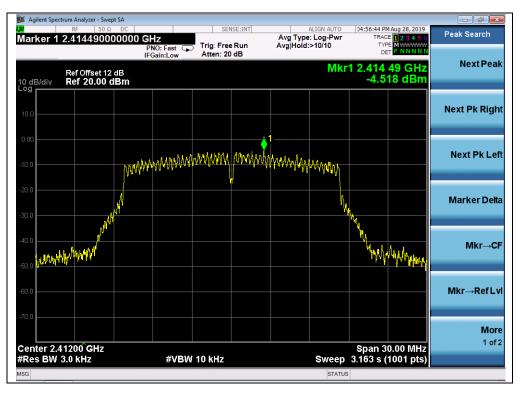


(Channel = 1, 802.11g, ANT 0)





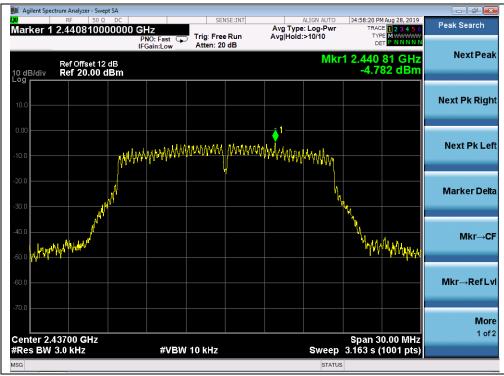

(Channel = 6, 802.11g, ANT 0)

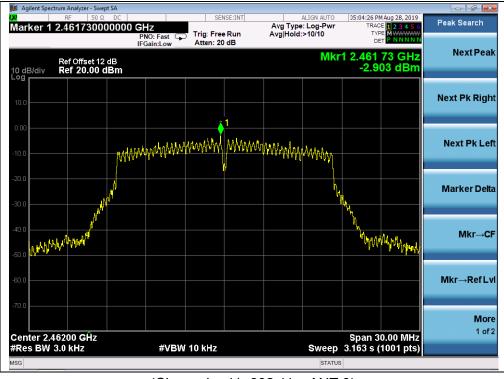

(Channel = 11, 802.11g, ANT 0)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn




802.11n (HT20) Test mode

A. Test Verdict:

Channel	Frequency	Measured PSI	D (dBm/3kHz)	Limit	Verdict
Channel	(MHz)	ANT 0	ANT 1	(dBm/3kHz)	v or allot
1	2412	-2.57	-8.85	8	PASS
6	2437	-3.27	-8.77	8	PASS
11	2462	-3.33	-7.62	8	PASS


B. Test Plots:

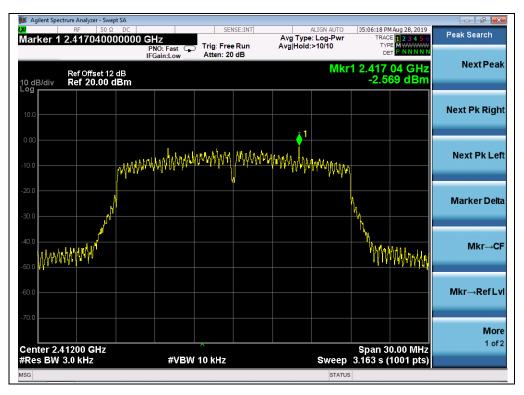

(Channel = 1, 802.11n(HT20), ANT0)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China








(Channel = 6, 802.11n(HT20), ANT0)

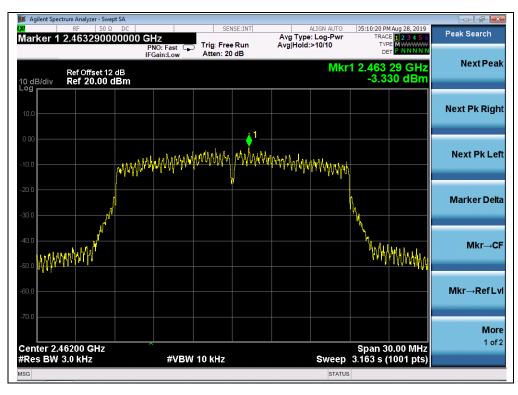

(Channel = 11, 802.11n(HT20), ANT0)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





2.7. Conducted Emission

2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μ H/50 Ω line impedance stabilization network (LISN).

Frequency range	Conducted	Limit (dBµV)
(MHz)	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50


NOTE:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2. Test Description

A. Test Setup:

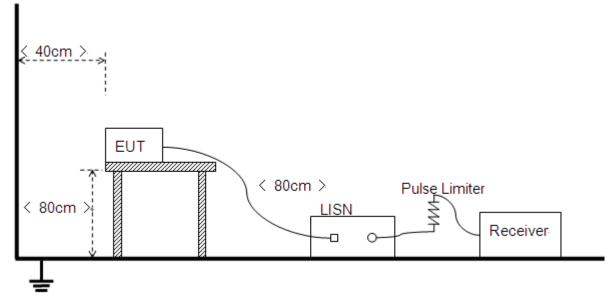

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10 2013.

MORLAB



2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.


A. Test setup:

Test Mode: <u>EUT + WIFI TX</u> Test Voltage: <u>AC 120V/60Hz</u> The measurement results are obtained as below: E [dB μ V] =U_R + L_{Cable loss} [dB] + A_{Factor} U_R: Receiver Reading A_{Factor}: Voltage division factor of LISN





B. Test Plots:

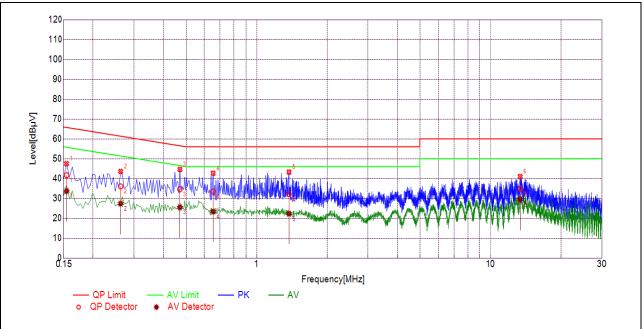


(L Phase)

NO.	Fre.	Emission L	evel (dBµV)	Limit (dBµV)	Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak	Average		
1	0.1546	41.70	33.71	65.75	55.75		PASS
2	0.2625	36.08	27.38	61.35	51.35		PASS
3	0.4695	34.61	25.53	56.52	46.52	Line	PASS
4	0.6540	33.46	23.40	56.00	46.00	LINE	PASS
5	1.3778	32.23	22.32	56.00	46.00		PASS
6	13.4217	35.01	29.46	60.00	50.00		PASS





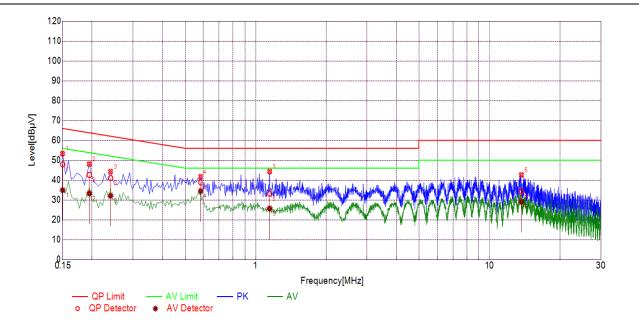


(N Phase)	
-----------	--

NO.	Fre.	Emission L	evel (dBµV)	Limit (d	dBµV)	Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak	Average		
1	0.1502	47.91	34.94	65.99	55.99		PASS
2	0.1951	42.56	33.30	63.82	53.82		PASS
3	0.2402	41.05	32.11	62.09	52.09	Noutral	PASS
4	0.5821	38.80	34.51	56.00	46.00	Neutral	PASS
5	1.1440	33.16	25.63	56.00	46.00		PASS
6	13.7104	34.50	29.09	60.00	50.00		PASS



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China






2.8. Restricted Frequency Bands

2.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2. Test Description

A. Test Setup

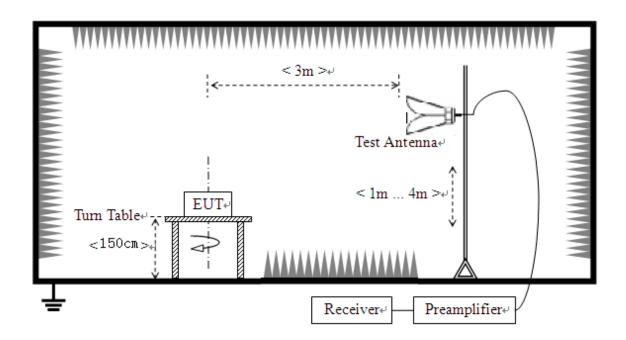

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.





2.8.3. Test procedure

KDB 558074 Section 8.6 and 8.7 was used in order to prove compliance.

2.8.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

AFactor: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

802.11b Test mode

A. Test Verdict:


Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
	(MHz)	PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	
1	2390.00	PK	47.00	-29.67	32.56	49.89	74	PASS
1	2385.91	AV	44.98	-29.67	32.56	47.87	54	PASS
11	2486.13	PK	48.41	-29.67	32.56	51.30	74	PASS
11	2486.77	AV	45.32	-29.67	32.56	48.21	54	PASS



B. Test Plots:

Keysight Spectrum Analyzer - Swept SA RI REPRESEL 50 Q DC Marker 1 2.384568000000 GHz PNO: Fast IFGein:Low Trig: Free Run Atten: 10 dB 03:48:47 AM Sep 11, 2019 TRACE 1 2 3 4 5 6 TYPE MA WWWW DET P P N N N N ALIGN OFF Avg Type: Voltage Avg|Hold:>100/100 SENSE:INT Marker Select Marker Mkr1 2.384 57 GHz 46.629 dBµV 1 ADIAN Ref 106.99 dBµV Normal Delta **Fixed** Start 2.30000 GHz Res BW (CISPR) 1 MHz Stop 2.41200 GHz Sweep 1.000 ms (1001 pts) #VBW 3.0 MHz Off 2.384 57 GHz 2.390 00 GHz 46.629 dBµ\ 47.002 dBµ\ N **Properties** More 1 of 2


(Channel = 1 PEAK, 802.11b)

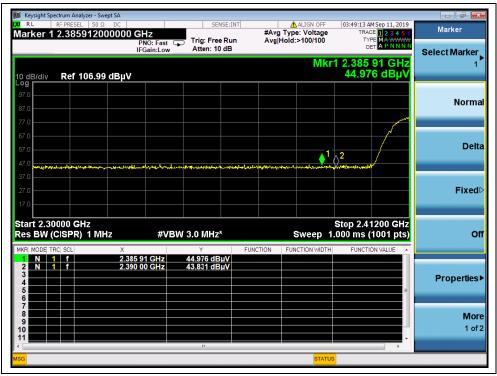

(Channel = 1 AVG, 802.11b)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





									pt SA	nalyzer - Swe	ctrum A	sight Spec	📕 Key
Marker	1 AM Sep 11, 2019 RACE 1 2 3 4 5 6	TRA	ALIGN OFF			SENSE:I		-Iz	DC 10000 GI	EL 50 Ω			r RL Mark
Select Marker	TYPE MWWWWW DET P P N N N N	דו ב	1:>100/100	Avg H			Trig: Fr Atten: 1	NO:Fast ⊂ Gain:Low	Р				
2	128 GHz 407 dBµV	2.486 48.40	Mkr2						dBµV	106.99	Ref	3/div	10 dE
													L og 97.0
Norma											~		87.0
									`				77.0 67.0
Delta				2 -	1								57.0
	*********	alangen ngan ngan din sega	64	an-stree	Flynn a Samuely	-strandard	colono plintes an	Herensen	y New York				47.0
Fixed													37.0 27.0
TIXCU													17.0
	.50000 GHz	Stop 2.5								GHz	200 (t 2.46	Star
Of	s (1001 pts)	.000 ms	Sweep 1			IZ	/ 3.0 MH	#VB		R) 1 MH			
	CTION VALUE	FUNCT	NCTION WIDTH	TION	FUNC		Y 46.629 d	0 GHz	× 2.483 50		f	IODE TRO	1
Properties						iΒμV	48.407 d	8 GHz	2.486 12		f	N 1	2 3 4
	E												5
More													7 8
1 of 2													9 10
	•		_				"						11
		8	STATUS										ISG

(Channel = 11 PEAK, 802.11b)



(Channel = 11 AVG, 802.11b)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn




802.11g Test mode

A. Test Verdict:

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
Channel	(MHz)	PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	verdict
1	2385.02	PK	46.81	-29.67	32.56	49.70	74	PASS
1	2379.86	AV	45.61	-29.67	32.56	48.50	54	PASS
11	2484.00	PK	46.51	-29.67	32.56	49.40	74	PASS
11	2483.50	AV	44.67	-29.67	32.56	47.56	54	PASS

B. Test Plots:

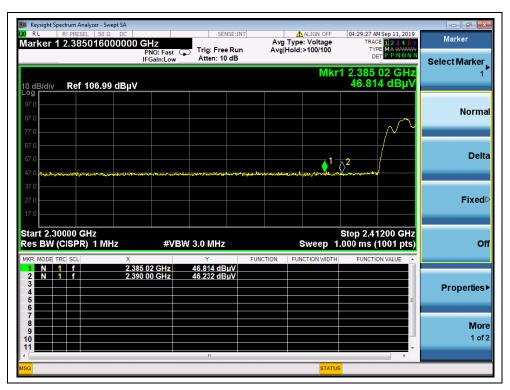

(Channel = 1 PEAK, 802.11g)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



									ot SA	nalyzer - Sw	trum Ar	aht Spect	🔟 Kevs
Marker	M Sep 11, 2019 E 1 2 3 4 5 6 E M A WWWW T A P N N N N	TRAC	ALIGN OFF : Voltage •100/100	Avg Typ		SENSE:I	Trig	HZ PNO: Fast	DC 0000 G	EL 50 Ω	F PRES	R	XI RL
Select Marker	86 GHz 3 dBµV	1 2.379	Mkr			n: 10 dB	Atte	Gain:Low	I	106.99	Ref	div	10 dB
Norma													Log 97.0 87.0
Delta	\bigwedge	A 2	<u>1</u>										77.0 67.0 57.0
Fixed▷)~ 	ulauro a darros	utert geschen er	horiona	nnodra _n a Na	rhentwenthow	n for for side in the second	im. vieterije	4 ⁽¹ 84), 18 4		leren og til for	47.0 37.0 27.0
	200 GHz											2.300	
Of	1001 pts)		weep 1.		FUNCT	iHZ" 3 dBµV	W 3.0 N Y 45.613	#VE	Х	r) 1 MH			
Properties •	E) dBµV	43.479	00 GHz	2.390		f	1	2 3 4 5 6
More 1 of 2													7 8 9 10
	•		STATUS				m						


(Channel = 1 AVG, 802.11g)



(Channel = 11 PEAK, 802.11g)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





	05:41:10 AM Sep 11, 2019	ALIGN OFF		NSE:IN	CE			nalyzer - Swej EL 50 Ω	RE PRE	/sight S
Marker	TRACE 1 2 3 4 5 6 TYPE MA WWWW DET A P N N N N	Type: Voltage Hold:>100/100	#Avg Avg	e Run	Trig: Fre	IZ NO: Fast 😱	0000 GI			
Select Marker 2	2.485 710 GHz 44.554 dBµV	Mkr2		0 dB	Atten: 1	Gain:Low		106.99	Re	3/div
Norm										
Del	all she as a boat of the		¹ ²			Martineer	V V V V V V			
Fixed	, , , , , , , , , , , , , , , , , , ,	fe-fu-fu-fu-fu-fu-fu-fu-fu-fu-fu-fu-fu-fu-			dag 452 (74) (74)					
c	Stop 2.50000 GHz .000 ms (1001 pts)	Sweep 1		*	3.0 MHz	#VBW		GHz R) 1 MH		BW
Properties	FUNCTION VALUE	FUNCTION WIDTH	FUNCTION	βµV βµV	Y 44.665 dE 44.554 dE	0 GHz 0 GHz	× 2.483 50 2.485 71		RC SCL 1 f 1 f	N N N
Mo 1 of										
	> •	STATUS			11					

(Channel = 11 AVG, 802.11g)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



802.11 n(HT20) Test mode

A. Test Verdict:

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
	(MHz)	PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	
1	2381.20	PK	47.78	-29.67	32.56	50.67	74	PASS
1	2383.10	AV	45.44	-29.67	32.56	48.33	54	PASS
11	2485.79	PK	47.74	-29.67	32.56	50.63	74	PASS
11	2487.84	AV	44.82	-29.67	32.56	47.71	54	PASS


B. Test Plots:



(Channel = 1 PEAK, 802.11n(HT20))

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





						er - Swept SA	trum Analyz	sight Spect	Ke
9 Marker	05:50:11 AM Sep 11, 2019 TRACE 1 2 3 4 5 6	ALIGN OFF	#Av	SENSE:II	GHz	50 Ω DC 04000000 0	F PRESEL	R	LXI R
Select Marker	TYPE MA WWWW DET A P N N N N	Hold:>100/100	n Avg	Trig: Free Ru Atten: 10 dB	PNO: Fast G				
z 1 [▶]	1 2.383 10 GHz 45.443 dBµV	Mkr				6.99 dBµV	Ref 10	3/div	10 d Log
Normal									97.0
									87.0 77.0
Delta									67.0
Denu	2	hardhan dia dia d	And Incorrect	n to the state of the second		المعاور والمعاومة المعاومة المعاومة	و زوار المراجع	A da	57.0 47.0
Fixed⊳									37.0 27.0
Fixed									27.0 17.0
	Stop 2.41200 GHz						00 GH		
Off	.000 ms (1001 pts)	Sweep 1.	FUNCTION	3.0 MHz*	#VBV		SPR)		
				5.443 dBµV 3.986 dBµV	3 10 GHz) 00 GHz	2.383 2.390	f f	N 1 N 1	1 2
Properties►	=								3 4 5
									6 7 8
More 1 of 2									9 10
-	• •			п					11
		STATUS							MSG


(Channel = 1 AVG, 802.11n(HT20))



(Channel = 11 PEAK, 802.11n(HT20))

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn





										nalyzer - Swe			eysigł R L
Marker	Sep 11, 2019 1 2 3 4 5 6 E MA WWWW	TRACI	ALIGN OFF e: Voltage :>100/100			SENSE:	Trian		0000 G		PRES		
Select Marker	APNNNN	DE	>100/100	Avgino		n: 10 dB		NO:Fast (Gain:Low					
2	38 GHz 7 dBµV	2.487 8 44.81	Mkr2						dBµV	106.99	Ref	liv	lB/d
Norm													
Norm									~	~	~~~	- and	
Del			2		_∧1				-				
	and also reading	مالى دەپرالى دەيە ^ر دارى	o ch rolo low barden-	unation and a	A Block	ut an	morection	worken.					
Fixed													
o	000 GHz 1001 pts)	Stop 2.50 .000 ms (1	Sweep 1.			Hz*	V 3.0 N	#VB	z	GHZ R) 1 MH		2.462 W (Cl	
	N VALUE	FUNCTIO	ICTION WIDTH	TION	FUNC	dBµV	Y 44 33		× 2.483 50		SCL	DE TRC	MOD
Properties						dBµV			2.487 83		f	1	Ň
Properties	=												
Mo 1 of													
			STATUS										-

(Channel = 11 AVG, 802.11n(HT20))



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



2.9. Radiated Emission

2.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

- For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
- For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)







2.9.2. Test Description

A. Test Setup:

1) For radiated emissions from 9kHz to 30MHz

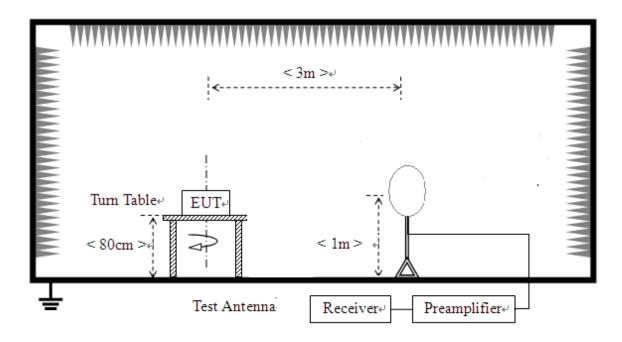

2) For radiated emissions from 30MHz to1GHz

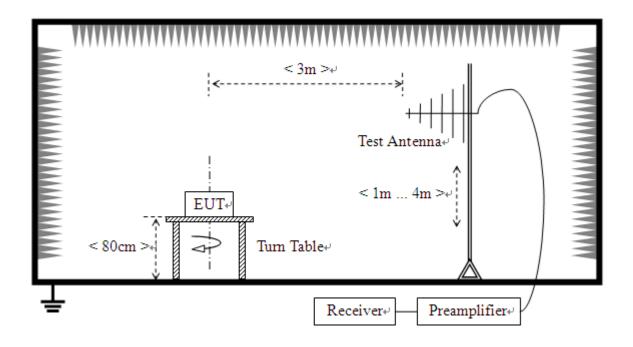




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



3) For radiated emissions above 1GHz

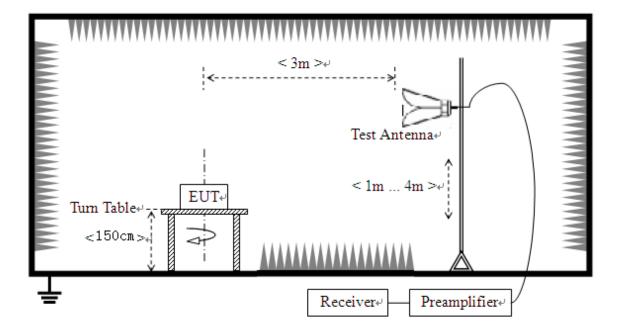

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of

the site as factors are calculated to correct the reading



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

2.9.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below: $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$ A_T : Total correction Factor except Antenna U_R : Receiver Reading G_{preamp} : Preamplifier Gain A_{Factor} : Antenna Factor at 3m During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Note3: For the frequency, which started from 25GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.






802.11b Test mode

Plots for Channel = 1

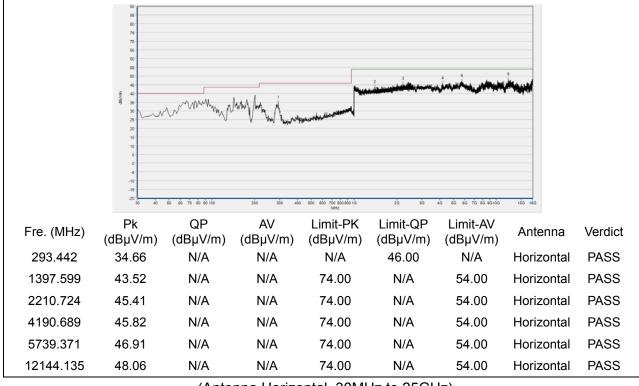

(Antenna Horizontal, 30MHz to 25GHz)

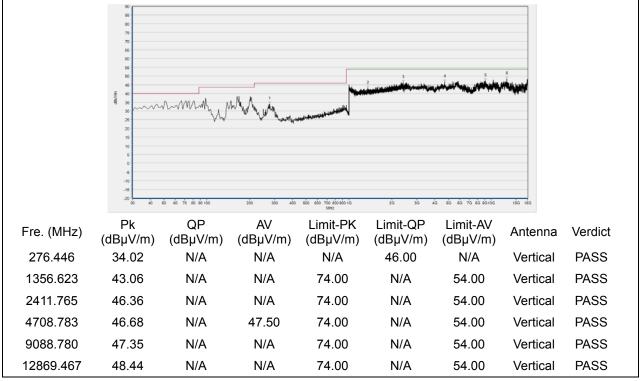

(Antenna Vertical, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn


E-mail: service@morlab.cn



Plot for Channel = 6

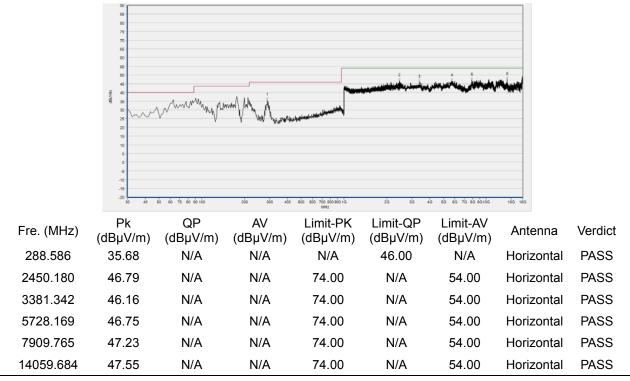

(Antenna Horizontal, 30MHz to 25GHz)

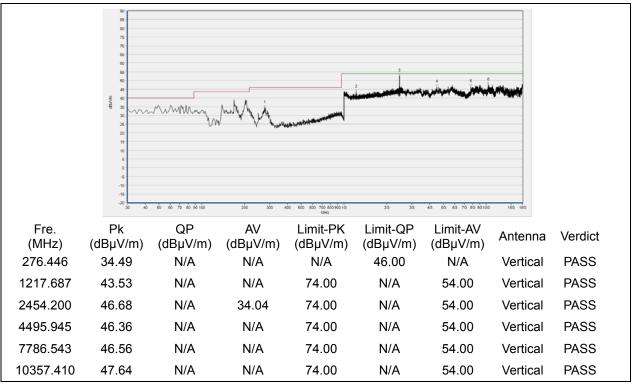

(Antenna Vertical, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 E-mail: service@morlab.cn Http://www.morlab.cn


Fax: 86-755-36698525



Plot for Channel = 11

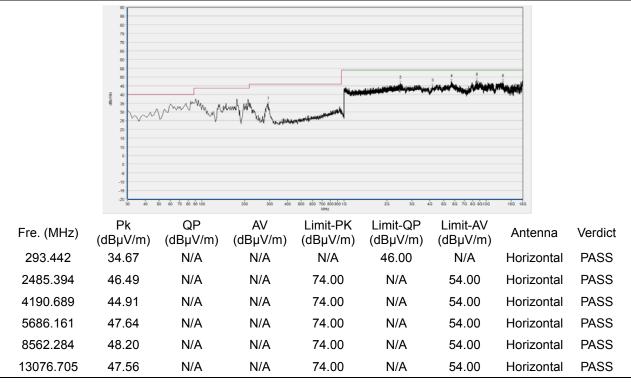

(Antenna Horizontal, 30MHz to 25GHz)

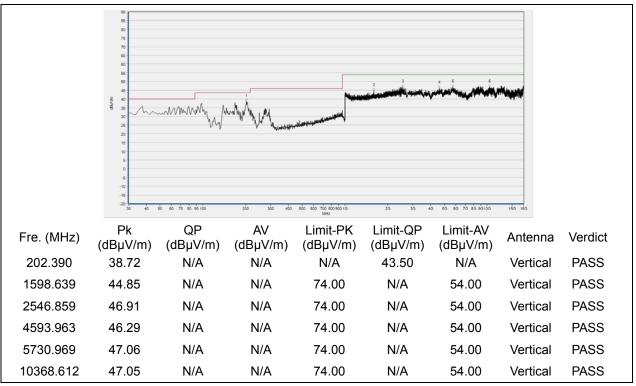

(Antenna Vertical, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 E-mail: service@morlab.cn Http://www.morlab.cn

Fax: 86-755-36698525




802.11g Test mode

Plots for Channel = 1

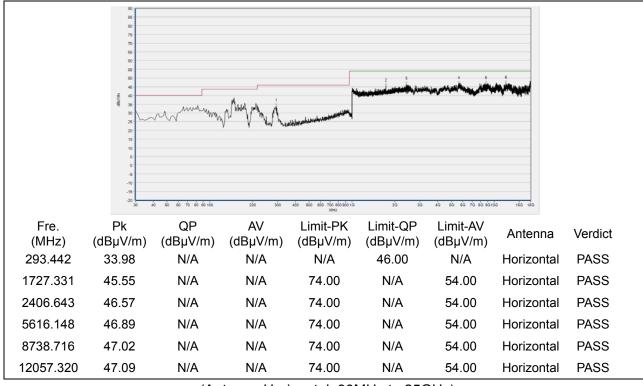

(Antenna Horizontal, 30MHz to 25GHz)

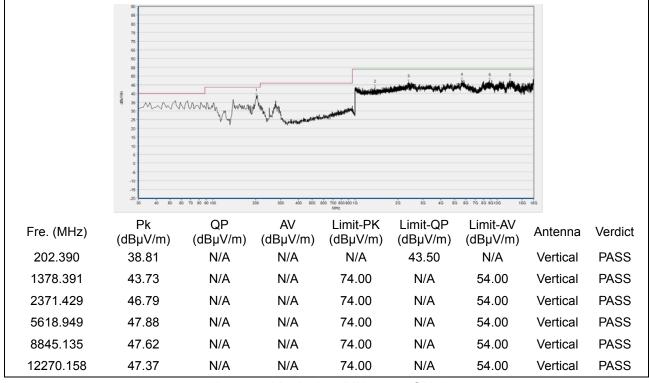

(Antenna Vertical, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 E-mail: service@morlab.cn Http://www.morlab.cn


Page 60 of 69



Plot for Channel = 6

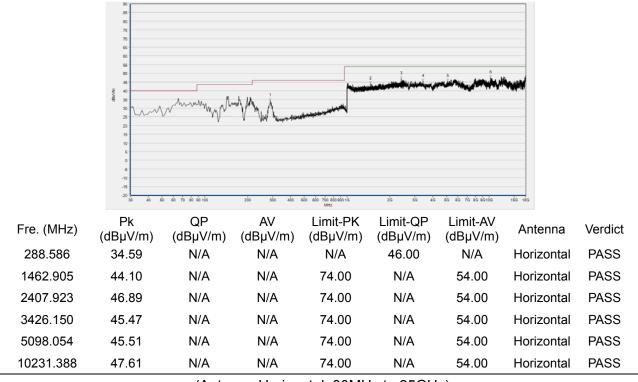

(Antenna Horizontal, 30MHz to 25GHz)

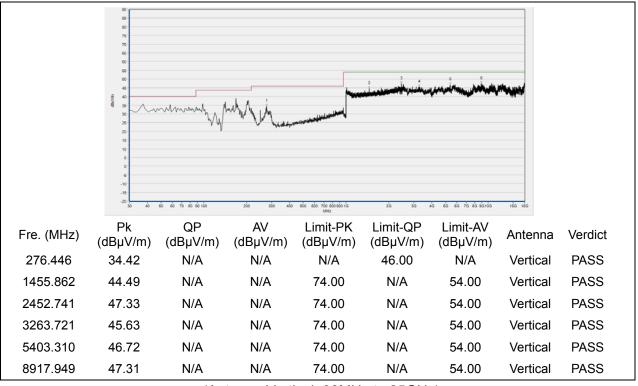


(Antenna Vertical, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 E-mail: service@morlab.cn Http://www.morlab.cn



Plot for Channel = 11

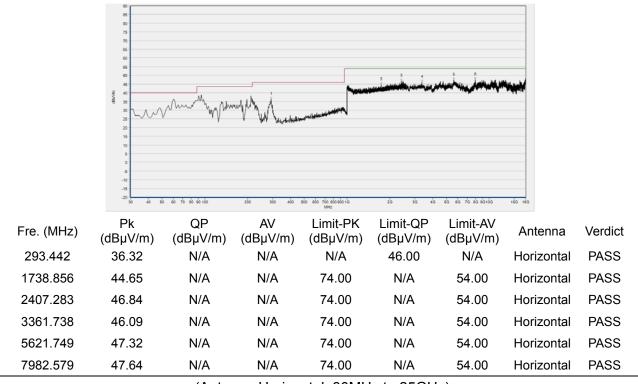

(Antenna Horizontal, 30MHz to 25GHz)

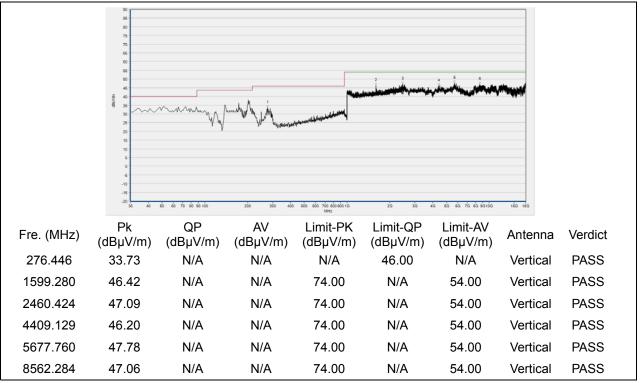

(Antenna Vertical, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 E-mail: service@morlab.cn Http://www.morlab.cn

Fax: 86-755-36698525




802.11n(HT20) Test mode

Plots for Channel = 1

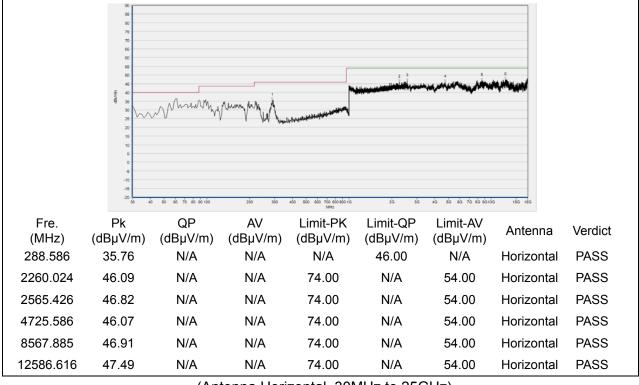


(Antenna Horizontal, 30MHz to 25GHz)

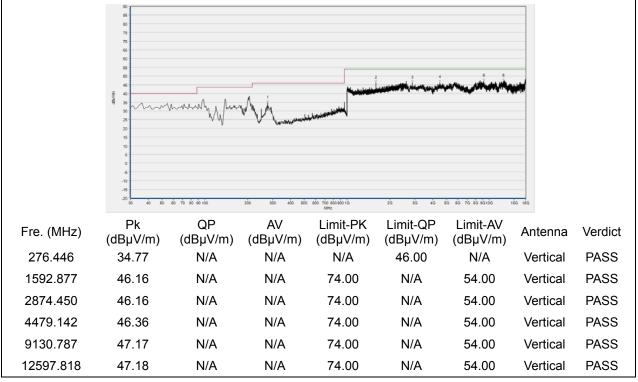

(Antenna Vertical, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China






Plot for Channel = 6

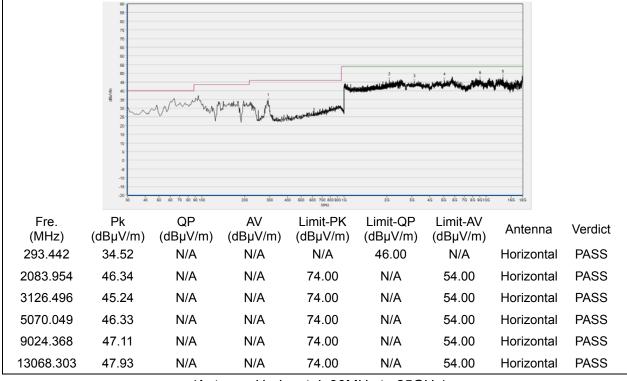


(Antenna Horizontal, 30MHz to 25GHz)

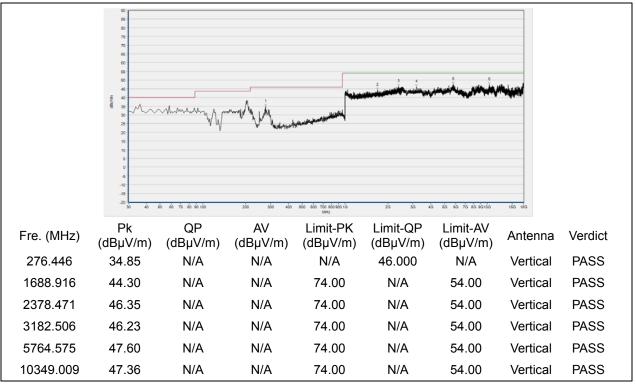

(Antenna Vertical, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 E-mail: service@morlab.cn Http://www.morlab.cn






Plot for Channel = 11

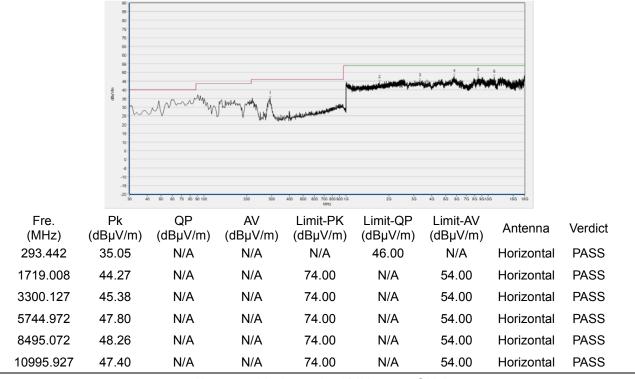

(Antenna Horizontal, 30MHz to 25GHz)

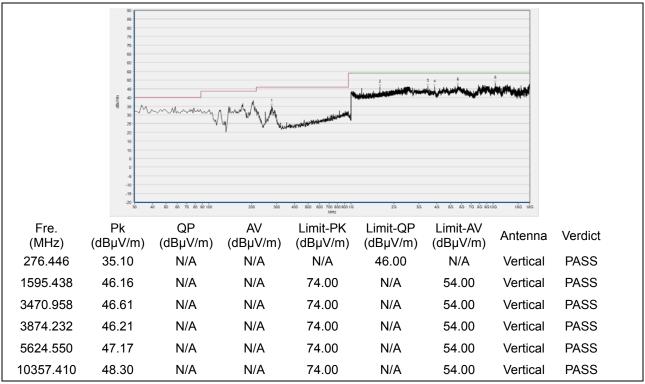

(Antenna Vertical, 30MHz to 25GHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 E-mail: service@morlab.cn Http://www.morlab.cn



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	±2.22dB
Power spectral density (PSD)	±2.22dB
Bandwidth	±5%
Conducted Spurious Emission	±2.77 dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.				
	Morlab Laboratory				
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang				
	Road, Block 67, BaoAn District, ShenZhen, GuangDong				
	Province, P. R. China				
Telephone:	+86 755 36698555				
Facsimile:	+86 755 36698525				

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Name.	Morlab Laboratory
	FL.3, Building A, FeiYang Science Park, No.8 LongChang
Address:	Road, Block 67, BaoAn District, ShenZhen, GuangDong
	Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.





4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
Attenuator 1	(N/A.)	10dB	Resnet	N/A	N/A
EXA Signal Analzyer	MY53470836	N9010A	Agilent	2019.04.09	2020.04.08
USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2019.04.16	2020.04.15
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2019.05.08	2020.05.09
LISN	812744	NSLK 8127	Schwarzbeck	2019.05.08	2020.05.09
Pulse Limiter (20dB)	9391	VTSD	Schwarzbeck	2019.05.08	2020.05.09
	9391	9561-D	Schwarzbeck	2010.00.00	2020.00.00
Coaxial cable(BNC)		EMC01	Morlab	N/A	N/A
(30MHz-26GHz)	CB01	ENICUT	INIOLIAD	IN/A	IN/A

4.3 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V 1.0





4.4 Radiated Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2019.07.26	2020.07.25
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.08	2020.05.09
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2019.02.15	2020.02.14
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2020.07.25
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2019.07.26	2020.07.25
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2019.05.08	2020.05.09
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2019.05.08	2020.05.09
Notch Filter	N/A	WRCG-2400- 2483.5-60SS	Wainwright	2018.12.01	2019.11.30
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

_____ END OF REPORT ____

