


Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
EGPRS1900 1 Slot	512	1850.2	26.08	PASS
EGPRS1900 1 Slot	661	1880	25.97	PASS
EGPRS1900 1 Slot	810	1909.8	25.79	PASS
EGPRS1900 2 Slot	512	1850.2	24.44	PASS
EGPRS1900 2 Slot	661	1880	24.40	PASS
EGPRS1900 2 Slot	810	1909.8	25.35	PASS
EGPRS1900 3 Slot	512	1850.2	21.65	PASS
EGPRS1900 3 Slot	661	1880	22.37	PASS
EGPRS1900 3 Slot	810	1909.8	23.06	PASS
EGPRS1900 4 Slot	512	1850.2	20.20	PASS
EGPRS1900 4 Slot	661	1880	20.74	PASS
EGPRS1900 4 Slot	810	1909.8	20.98	PASS
EGPRS850 1 Slot	128	824.2	25.29	PASS
EGPRS850 1 Slot	189	836.4	25.30	PASS
EGPRS850 1 Slot	251	848.8	24.87	PASS
EGPRS850 2 Slot	128	824.2	24.52	PASS
EGPRS850 2 Slot	189	836.4	24.03	PASS
EGPRS850 2 Slot	251	848.8	24.18	PASS
EGPRS850 3 Slot	128	824.2	22.44	PASS
EGPRS850 3 Slot	189	836.4	21.93	PASS
EGPRS850 3 Slot	251	848.8	21.75	PASS
EGPRS850 4 Slot	128	824.2	20.77	PASS
EGPRS850 4 Slot	189	836.4	20.15	PASS
EGPRS850 4 Slot	251	848.8	20.40	PASS


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
EGPRS1900	512	1850.2	7.15	13	PASS
EGPRS1900	661	1880	6.35	13	PASS
EGPRS1900	810	1909.8	6.93	13	PASS
EGPRS850	128	824.2	10.27	13	PASS
EGPRS850	189	836.4	10.33	13	PASS
EGPRS850	251	848.8	10.65	13	PASS


EGPRS1900 Channel=512

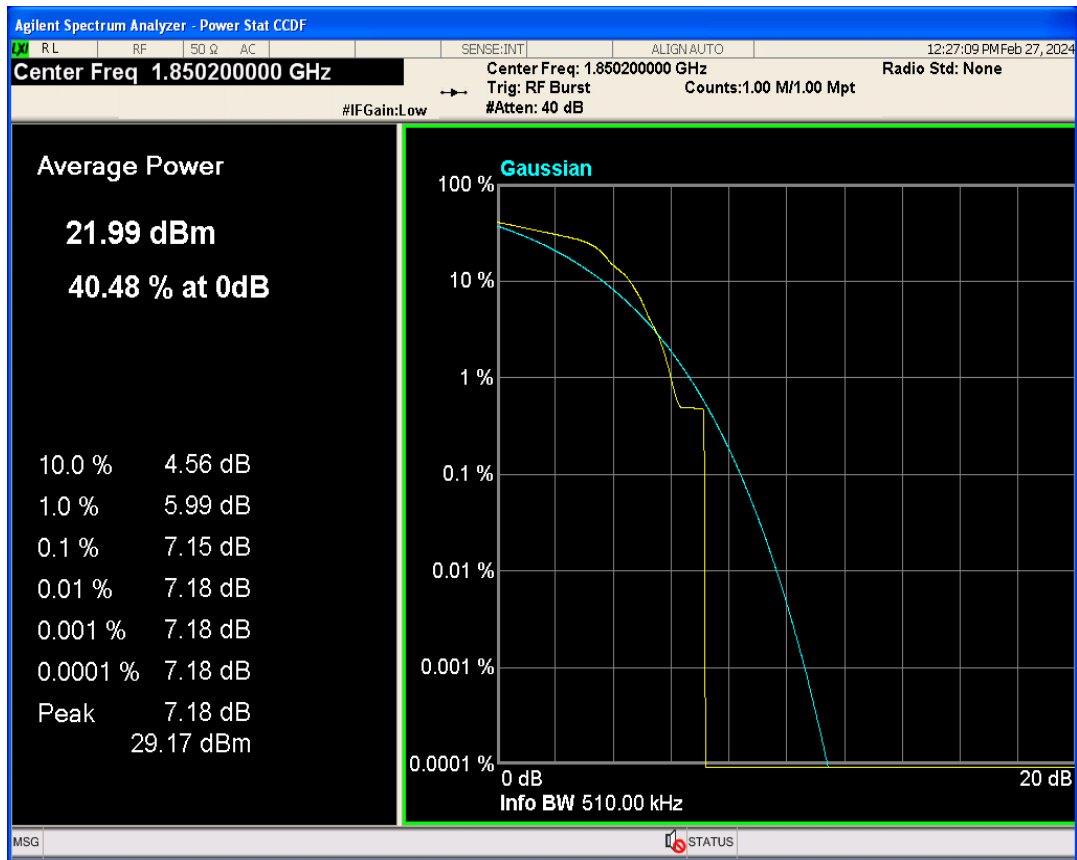


EGPRS1900 Channel=661

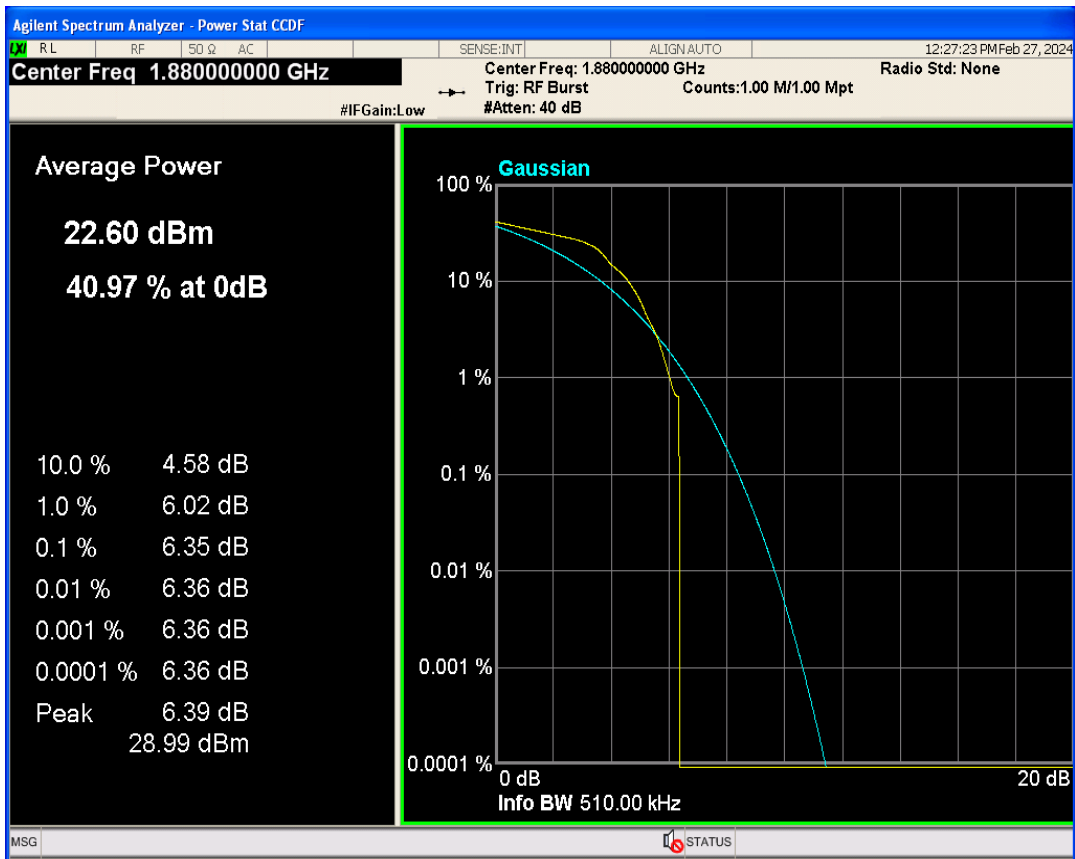


EGPRS1900 Channel=810

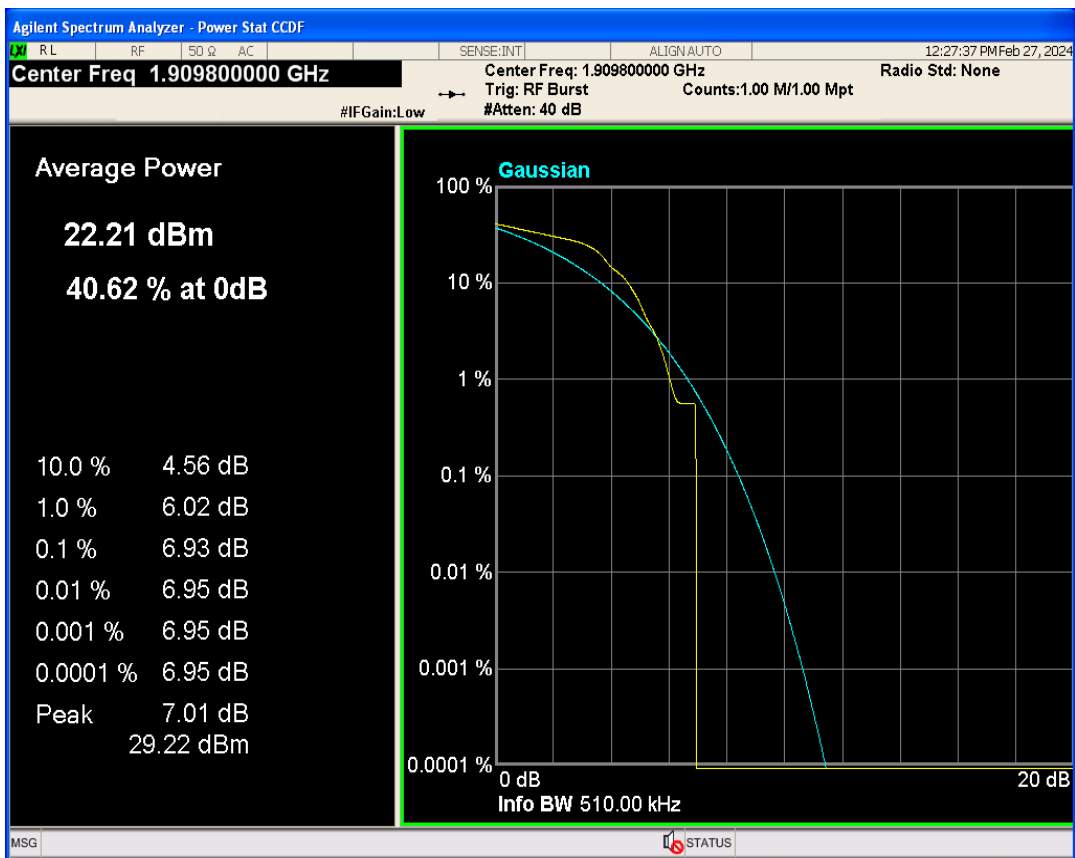


EGPRS850 Channel=128

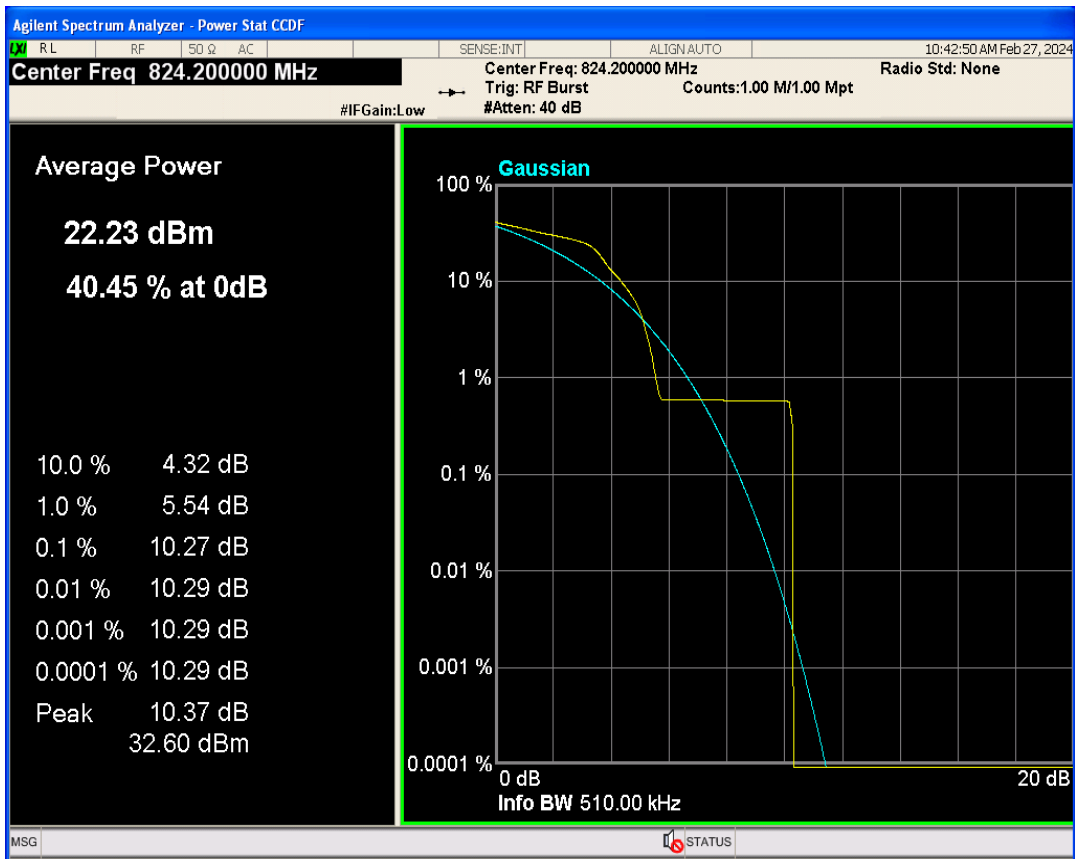

EGPRS850 Channel=189

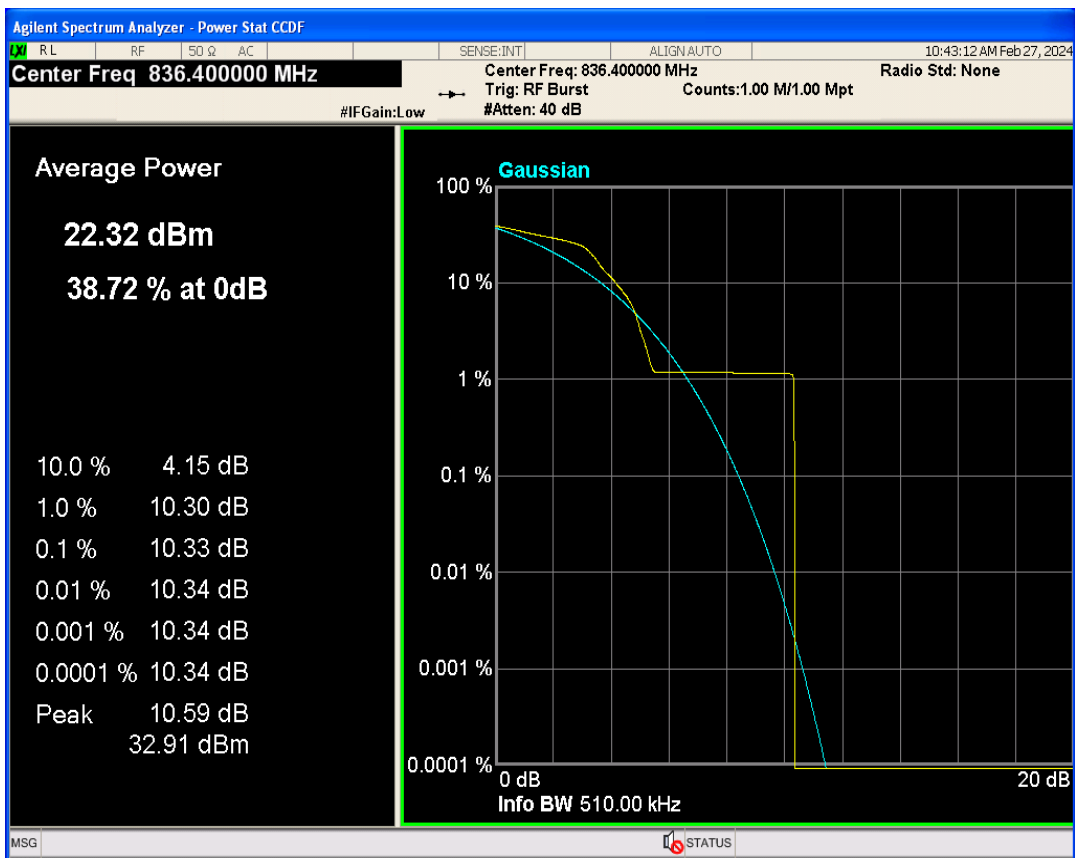


EGPRS850 Channel=251

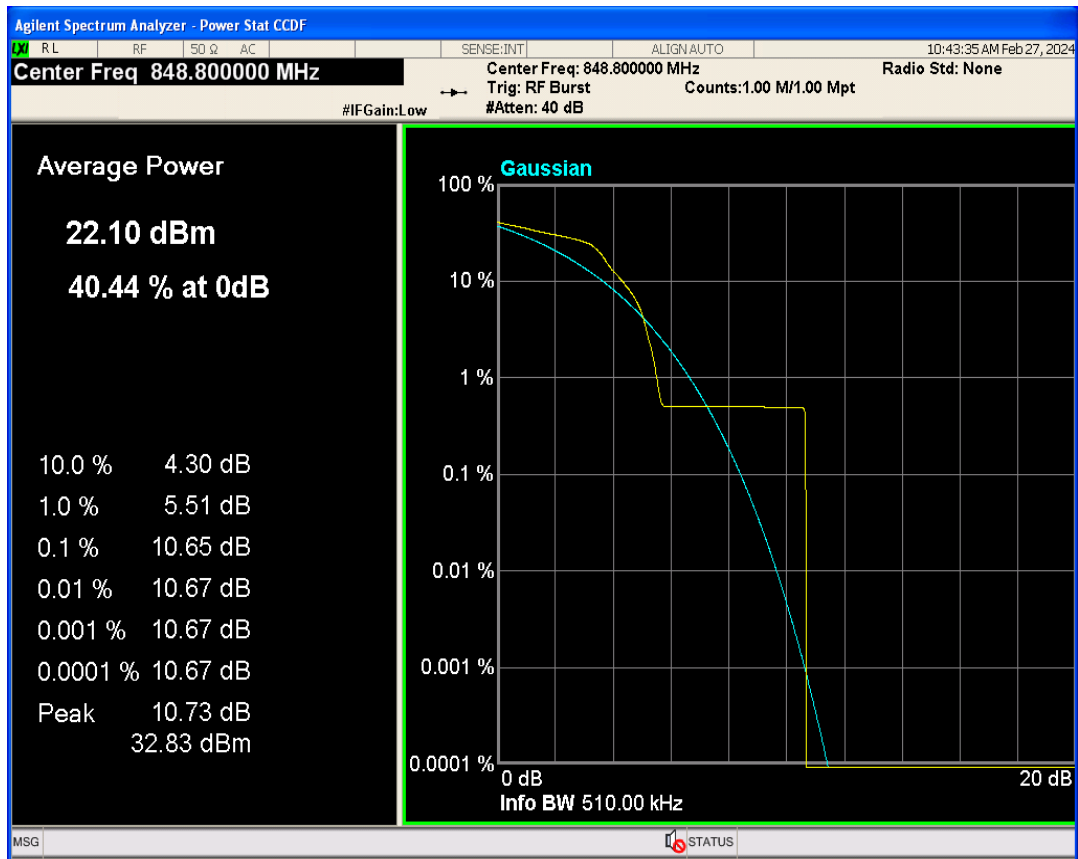


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
EGPRS1900	512	1850.2	250.763	313.566	PASS
EGPRS1900	661	1880	247.119	318.122	PASS
EGPRS1900	810	1909.8	257.700	304.553	PASS
EGPRS850	128	824.2	248.021	304.269	PASS
EGPRS850	189	836.4	255.223	298.566	PASS
EGPRS850	251	848.8	241.020	308.061	PASS


EGPRS1900 Channel=512

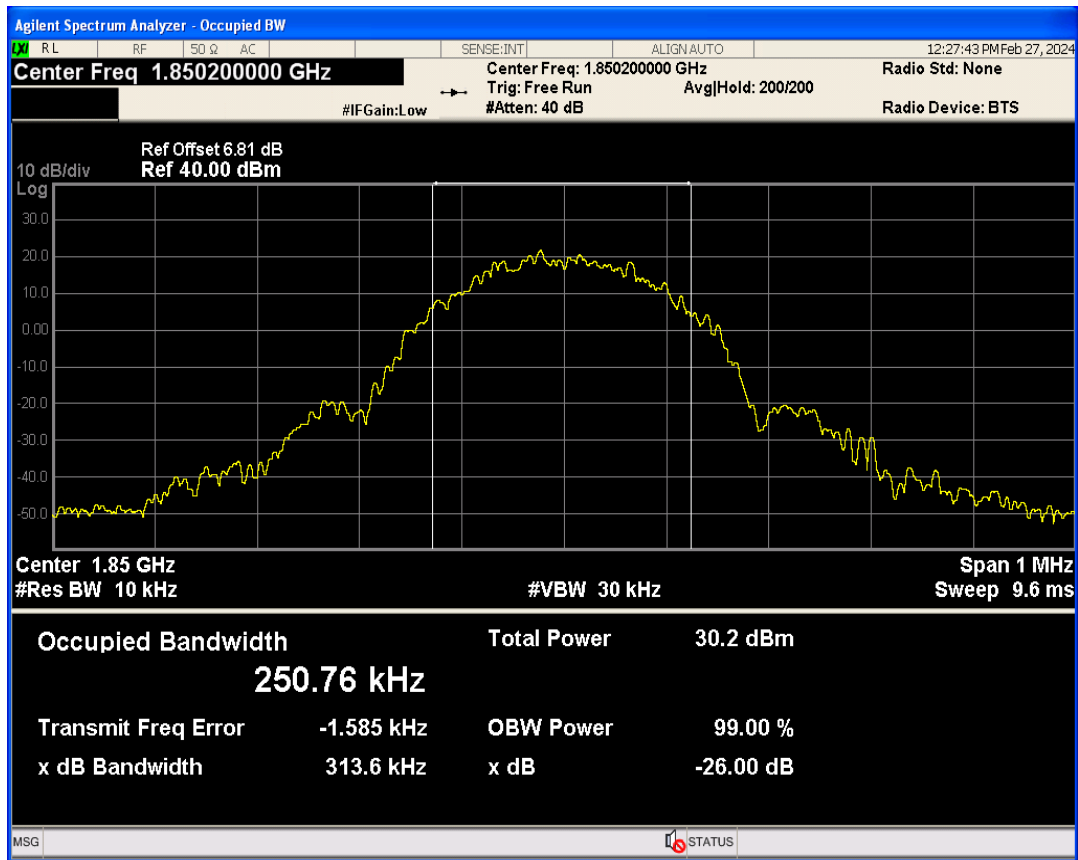


EGPRS1900 Channel=661

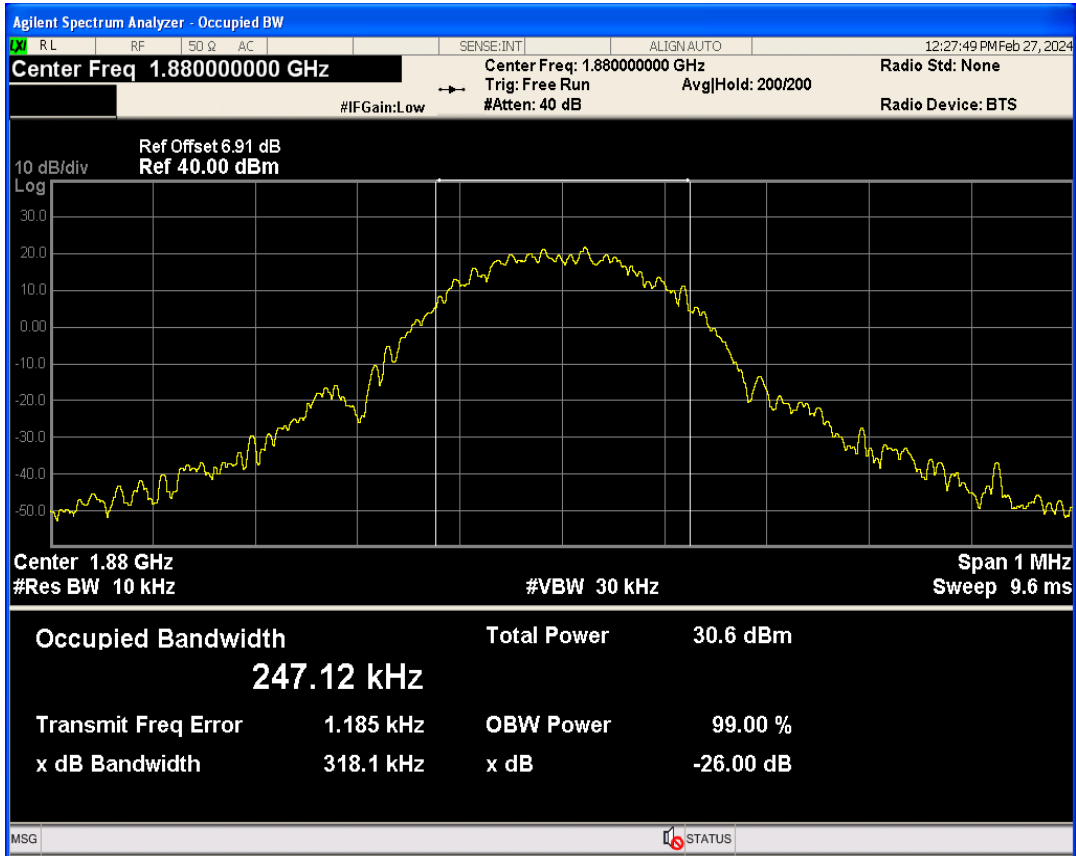


EGPRS1900 Channel=810

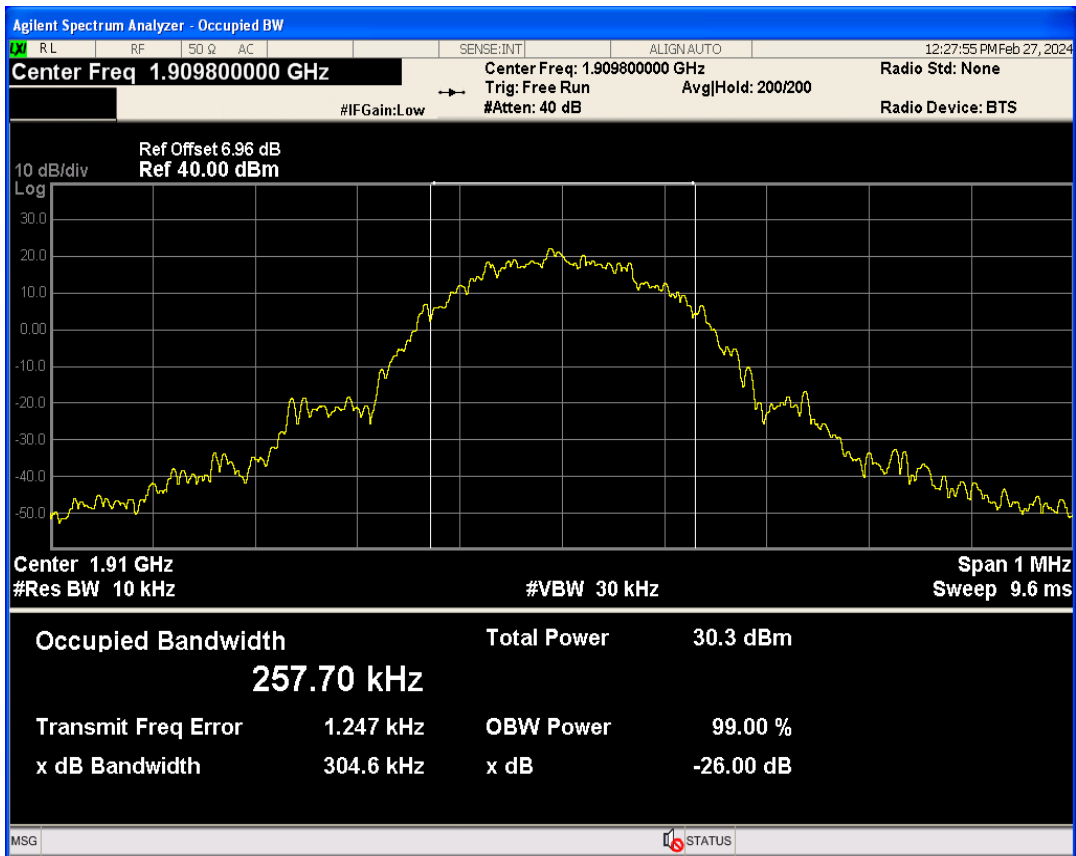


EGPRS850 Channel=128

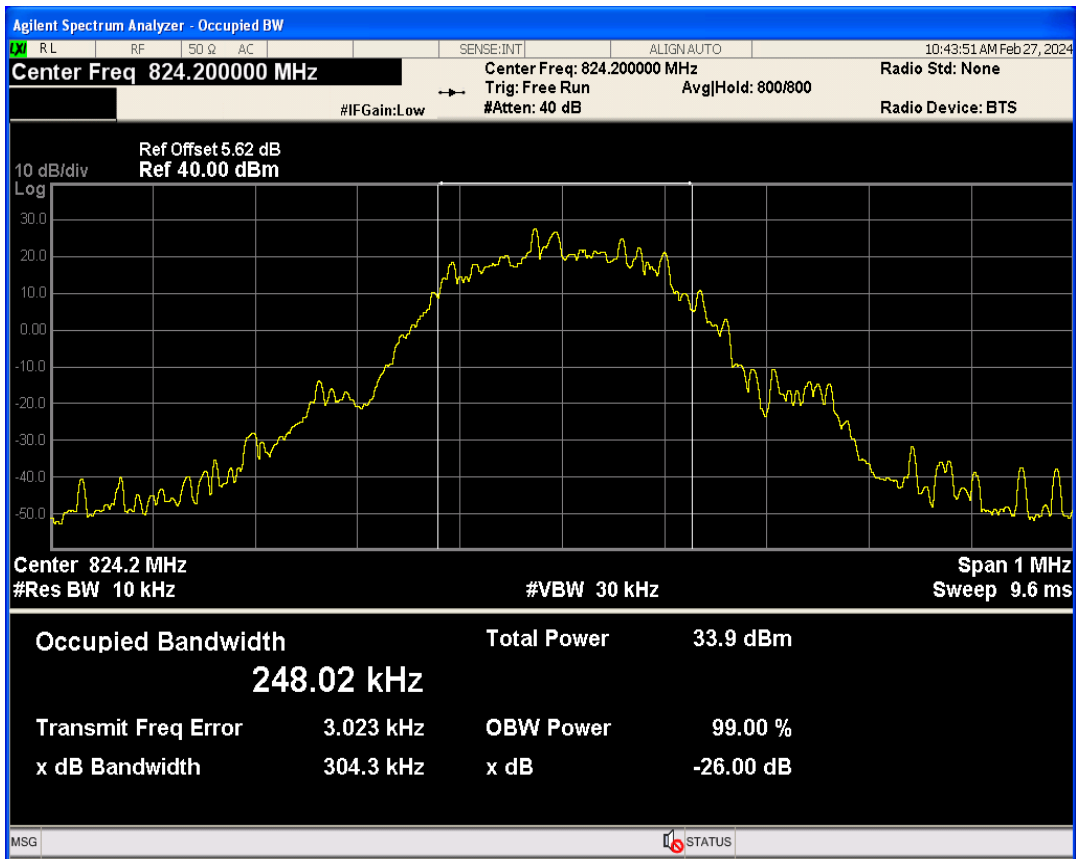

EGPRS850 Channel=189

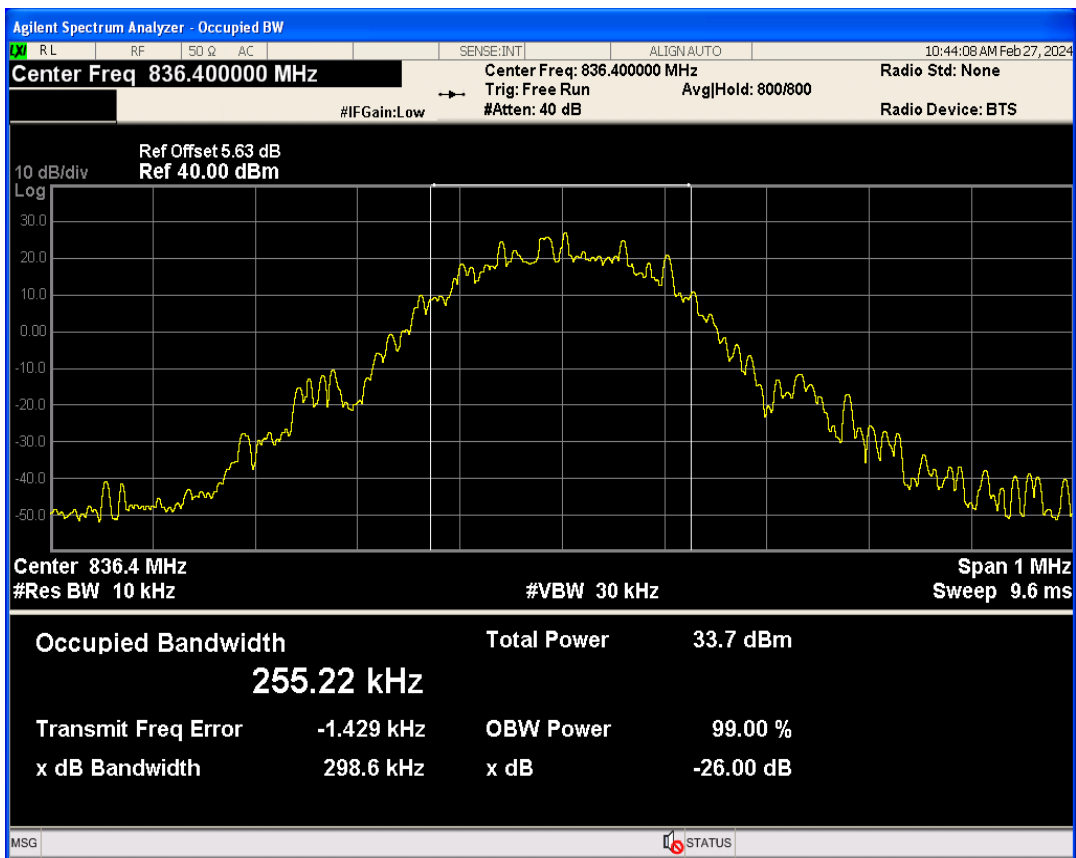


EGPRS850 Channel=251

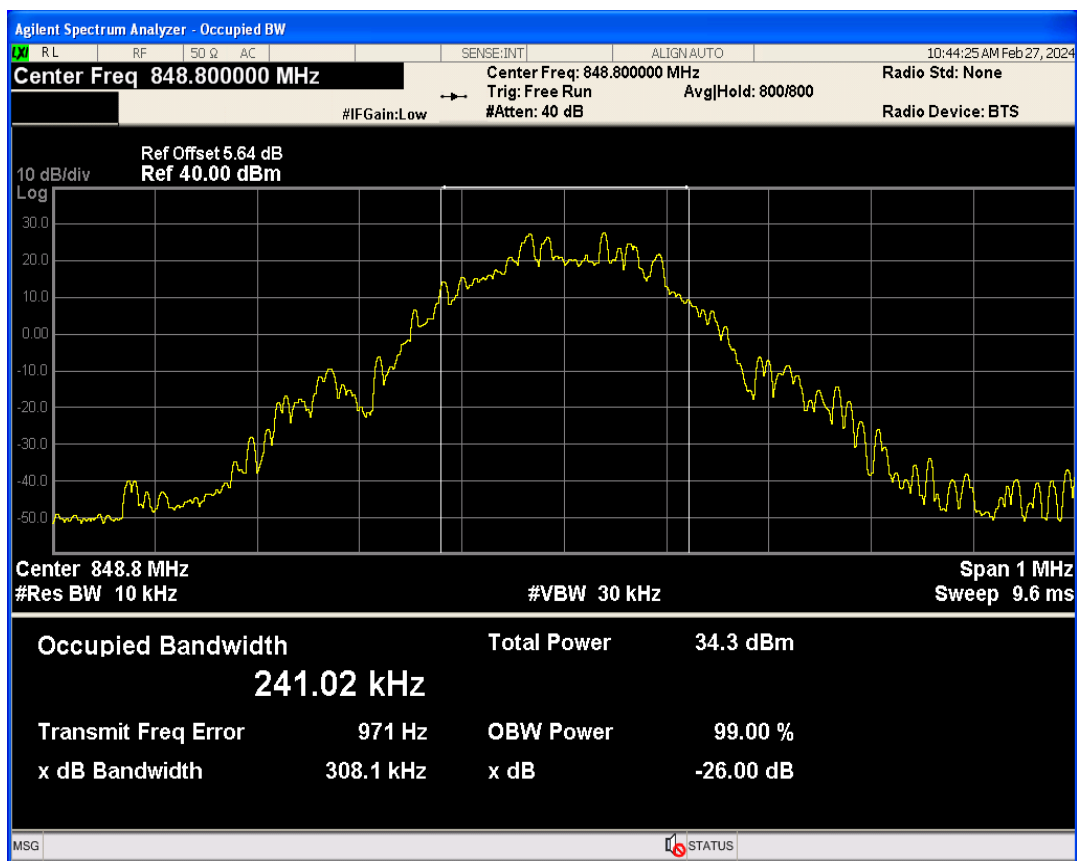


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	1849.97	-38.82	-13	PASS
EGPRS1900	810	1909.8	1910.02	-39.28	-13	PASS
EGPRS850	128	824.2	823.99	-38.42	-13	PASS
EGPRS850	251	848.8	849.02	-40.66	-13	PASS


EGPRS1900 Channel=512

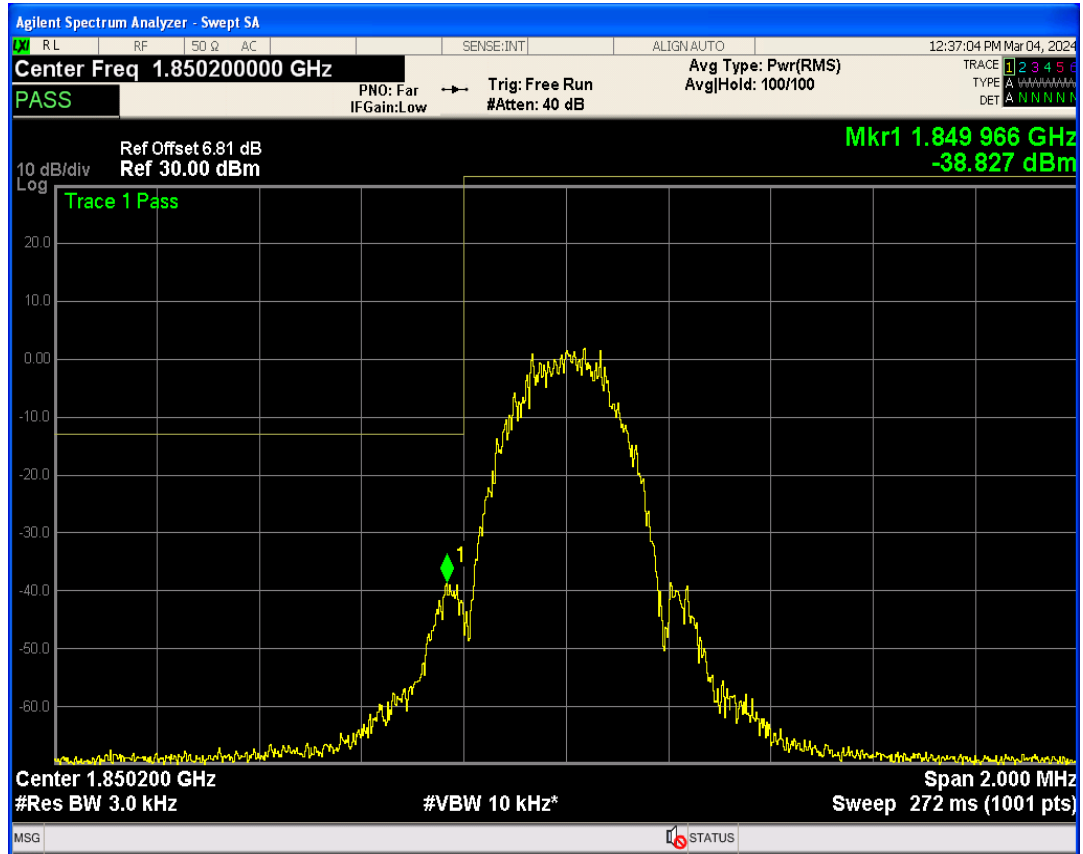


EGPRS1900 Channel=810

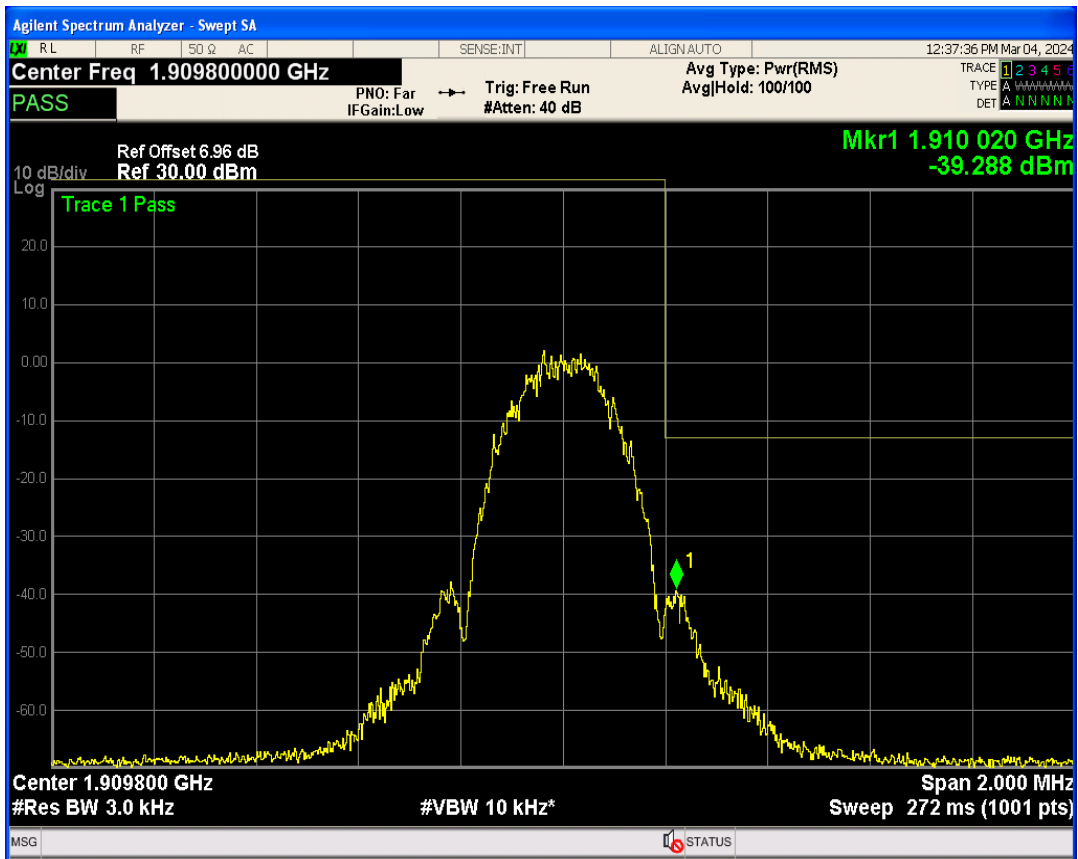

EGPRS850 Channel=128

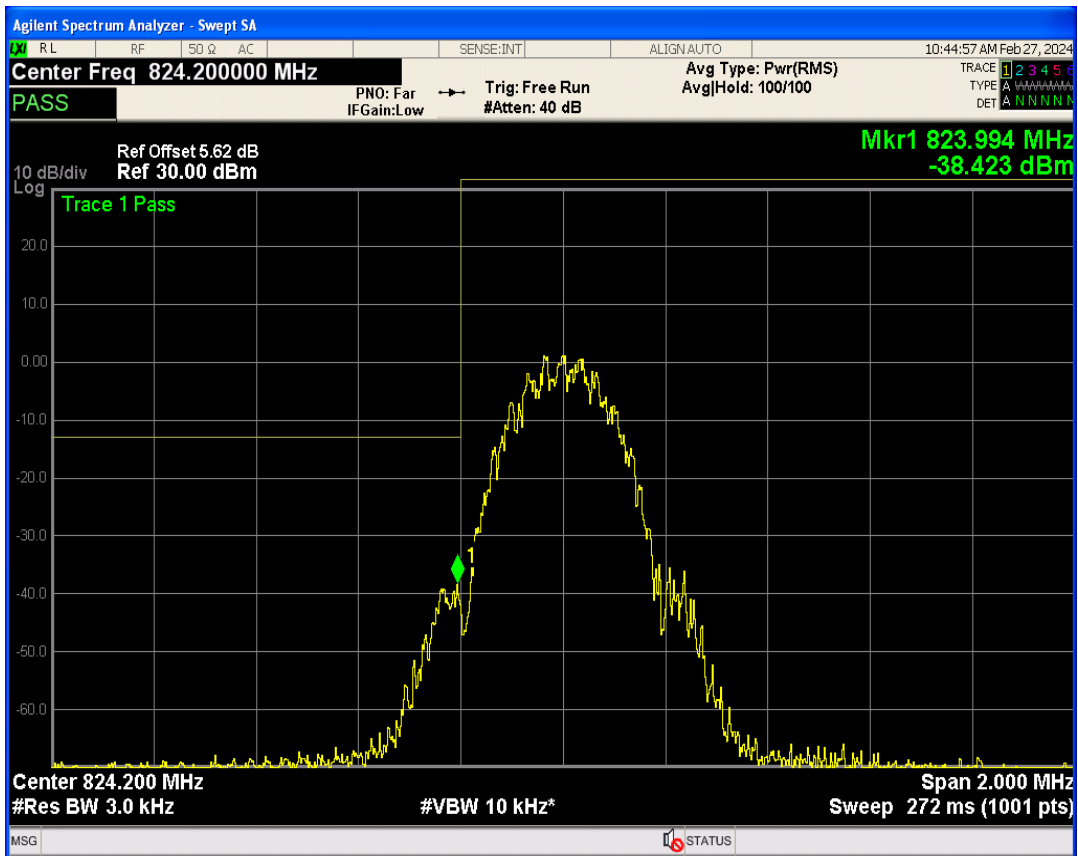


EGPRS850 Channel=251

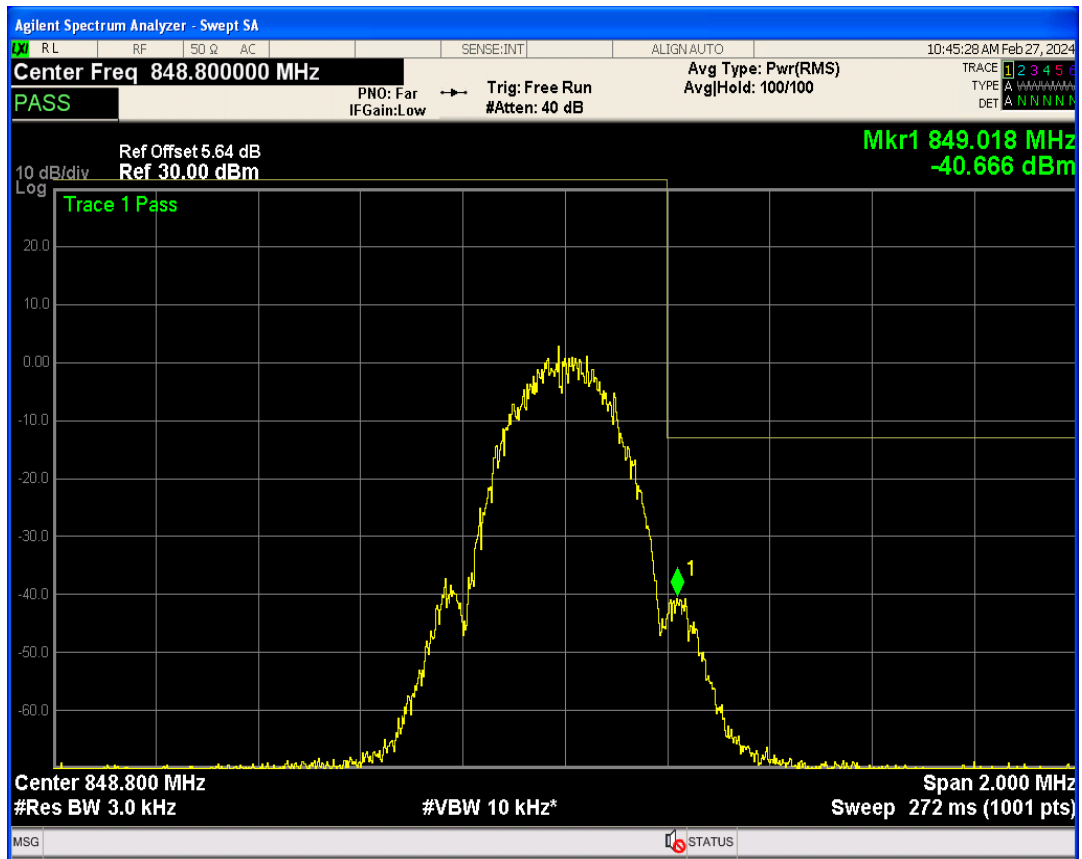


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	25420.02	-20.07	-13	PASS
EGPRS1900	661	1880	26029.50	-19.39	-13	PASS
EGPRS1900	810	1909.8	25432.60	-20.07	-13	PASS
EGPRS850	128	824.2	26075.82	-20.58	-13	PASS
EGPRS850	189	836.4	25944.79	-20.27	-13	PASS
EGPRS850	251	848.8	25911.04	-20.31	-13	PASS


EGPRS1900 Channel=512

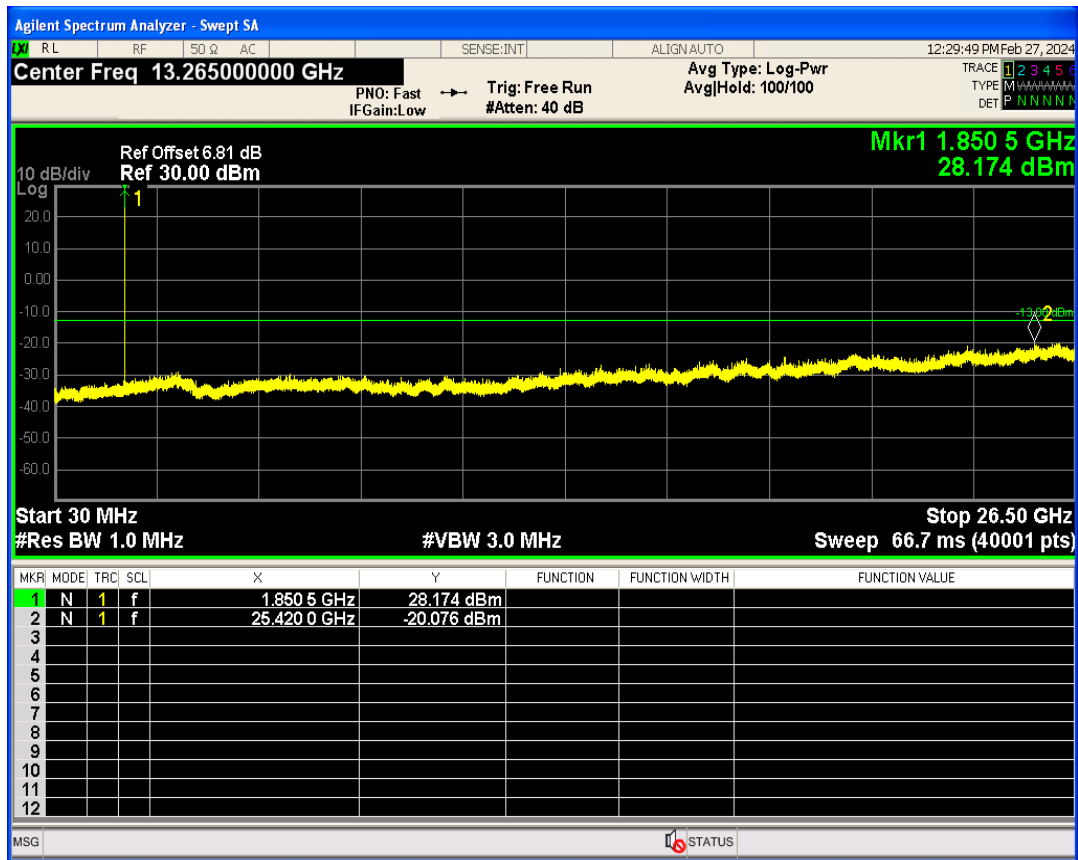


EGPRS1900 Channel=661

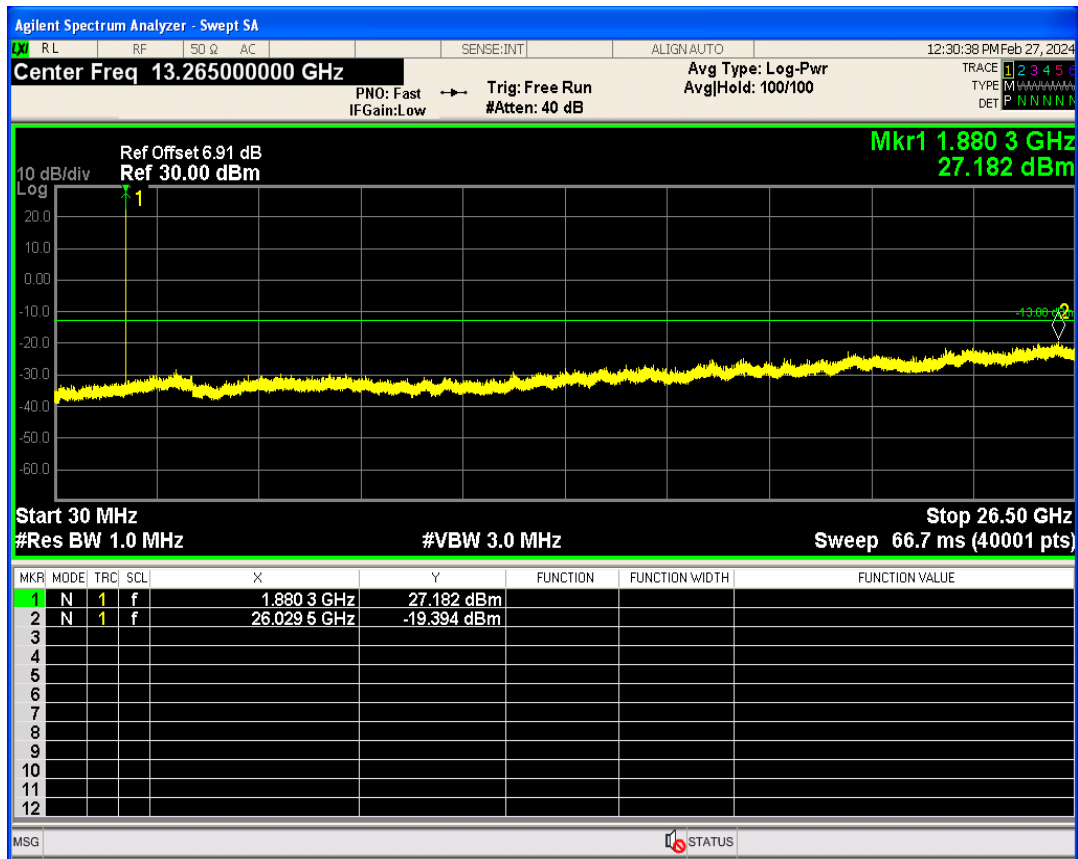


EGPRS1900 Channel=810

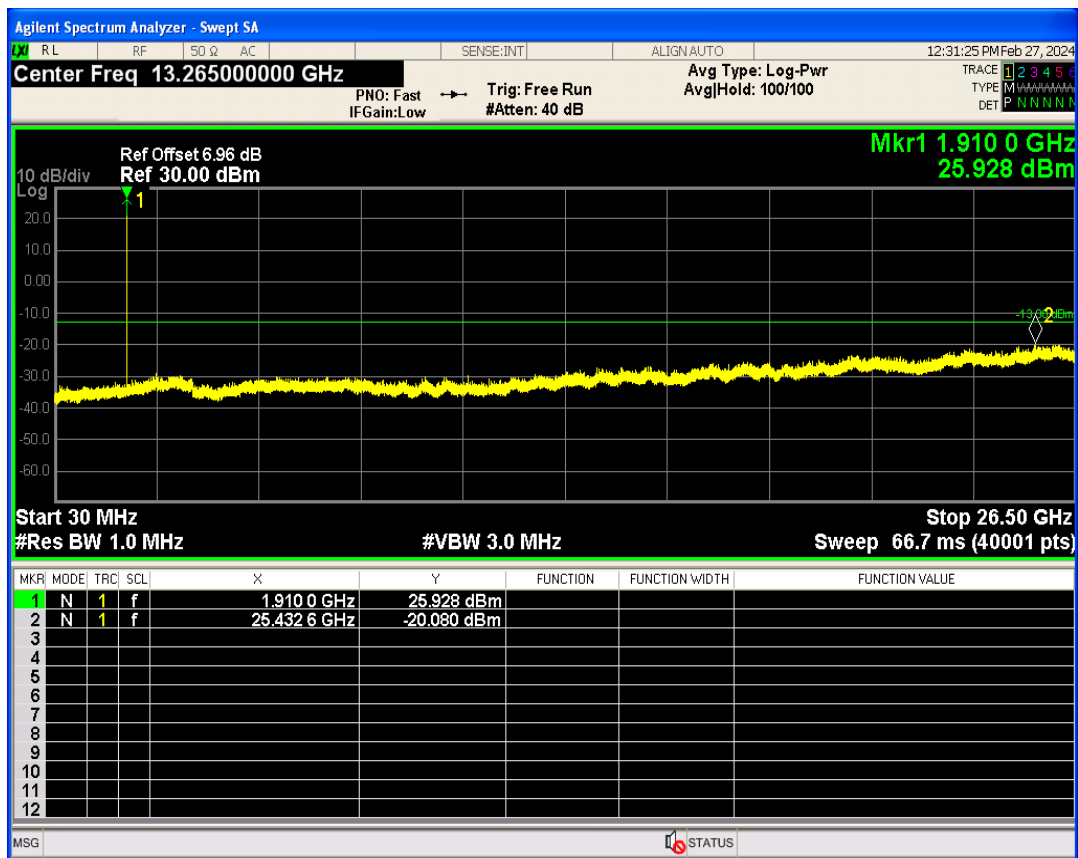


EGPRS850 Channel=128

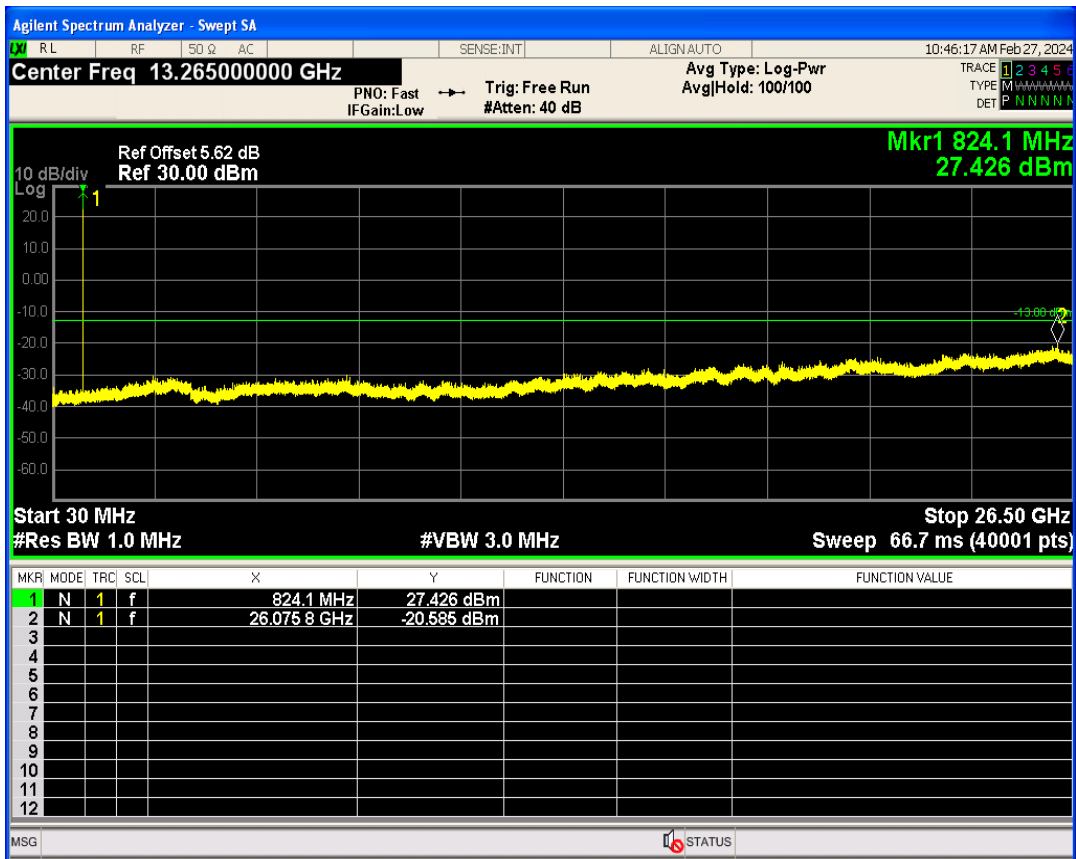

EGPRS850 Channel=189

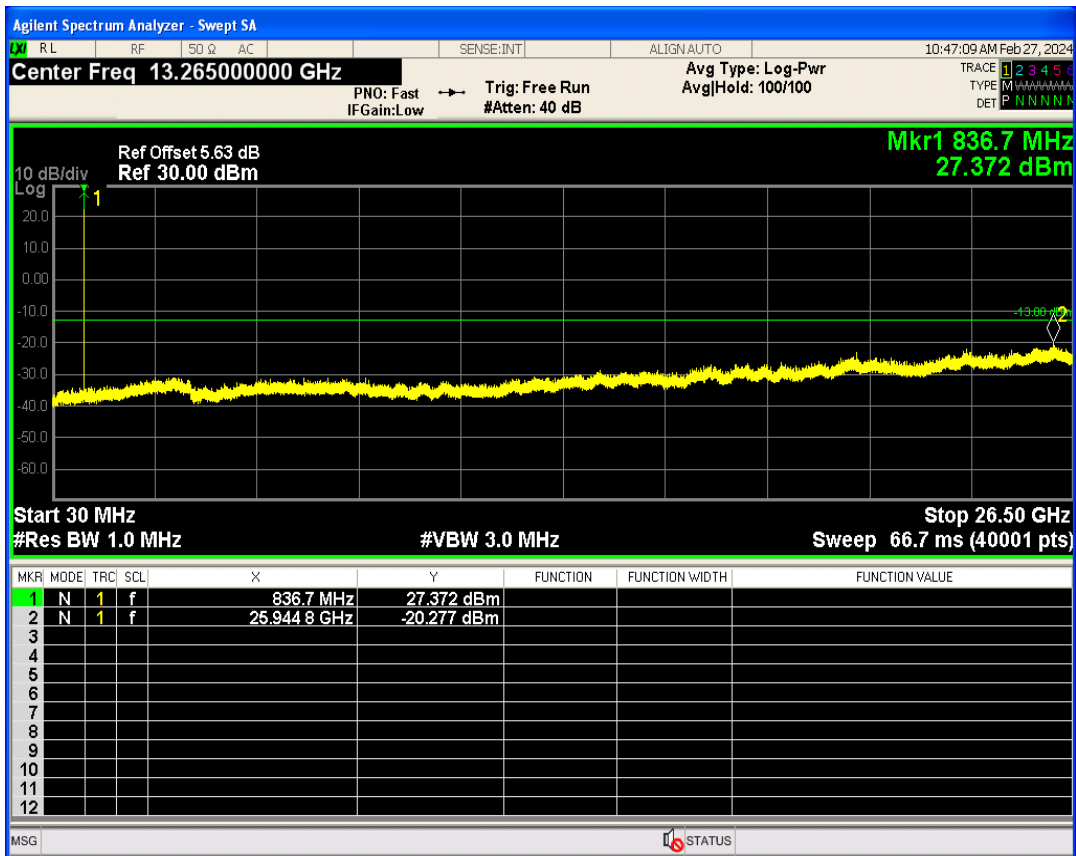

EGPRS850 Channel=251

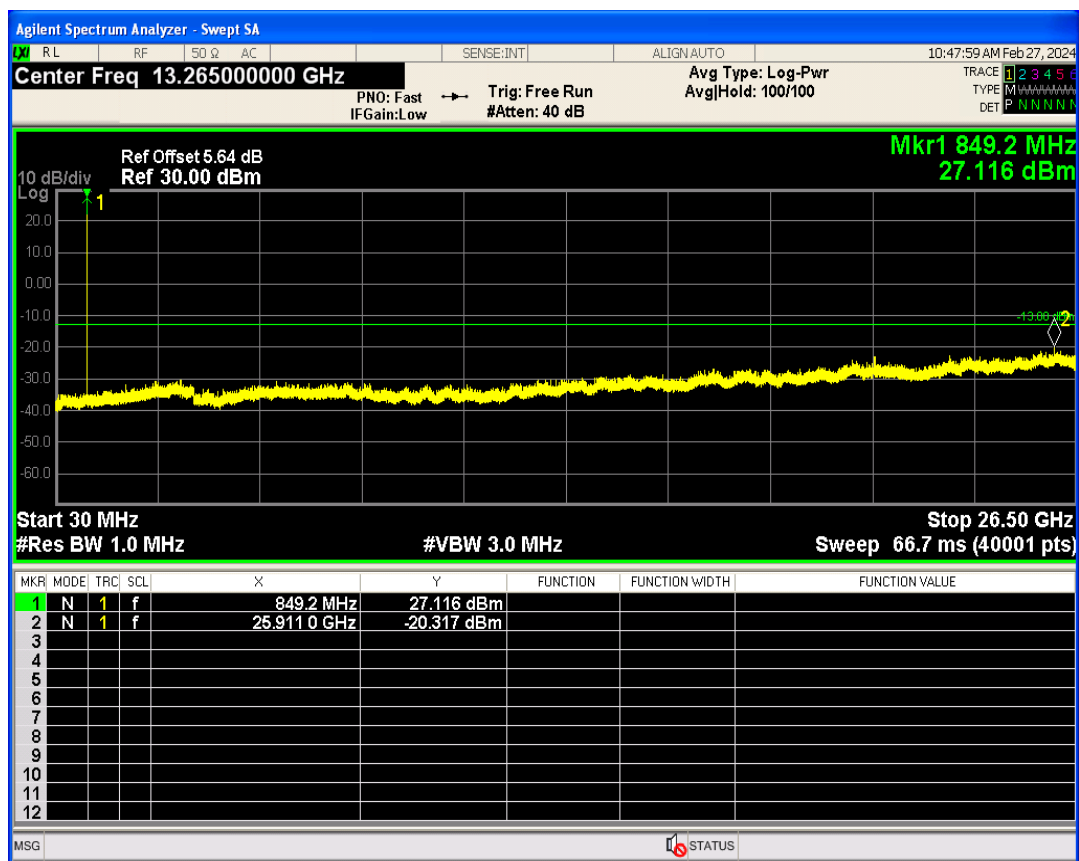


Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
GPRS1900 1 Slot	512	1850.2	30.17	PASS
GPRS1900 1 Slot	661	1880	30.15	PASS
GPRS1900 1 Slot	810	1909.8	30.23	PASS
GPRS1900 2 Slot	512	1850.2	29.19	PASS
GPRS1900 2 Slot	661	1880	29.20	PASS
GPRS1900 2 Slot	810	1909.8	29.33	PASS
GPRS1900 3 Slot	512	1850.2	27.19	PASS
GPRS1900 3 Slot	661	1880	27.23	PASS
GPRS1900 3 Slot	810	1909.8	27.35	PASS
GPRS1900 4 Slot	512	1850.2	26.08	PASS
GPRS1900 4 Slot	661	1880	26.17	PASS
GPRS1900 4 Slot	810	1909.8	26.33	PASS
GPRS850 1 Slot	128	824.2	33.30	PASS
GPRS850 1 Slot	189	836.4	33.06	PASS
GPRS850 1 Slot	251	848.8	33.15	PASS
GPRS850 2 Slot	128	824.2	32.30	PASS
GPRS850 2 Slot	189	836.4	32.09	PASS
GPRS850 2 Slot	251	848.8	32.18	PASS
GPRS850 3 Slot	128	824.2	30.23	PASS
GPRS850 3 Slot	189	836.4	30.01	PASS
GPRS850 3 Slot	251	848.8	30.15	PASS
GPRS850 4 Slot	128	824.2	29.10	PASS
GPRS850 4 Slot	189	836.4	28.89	PASS
GPRS850 4 Slot	251	848.8	29.02	PASS


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.68	13	PASS
GPRS1900	661	1880	2.67	13	PASS
GPRS1900	810	1909.8	2.68	13	PASS
GPRS850	128	824.2	2.64	13	PASS
GPRS850	189	836.4	2.66	13	PASS
GPRS850	251	848.8	2.66	13	PASS


GPRS1900 Channel=512

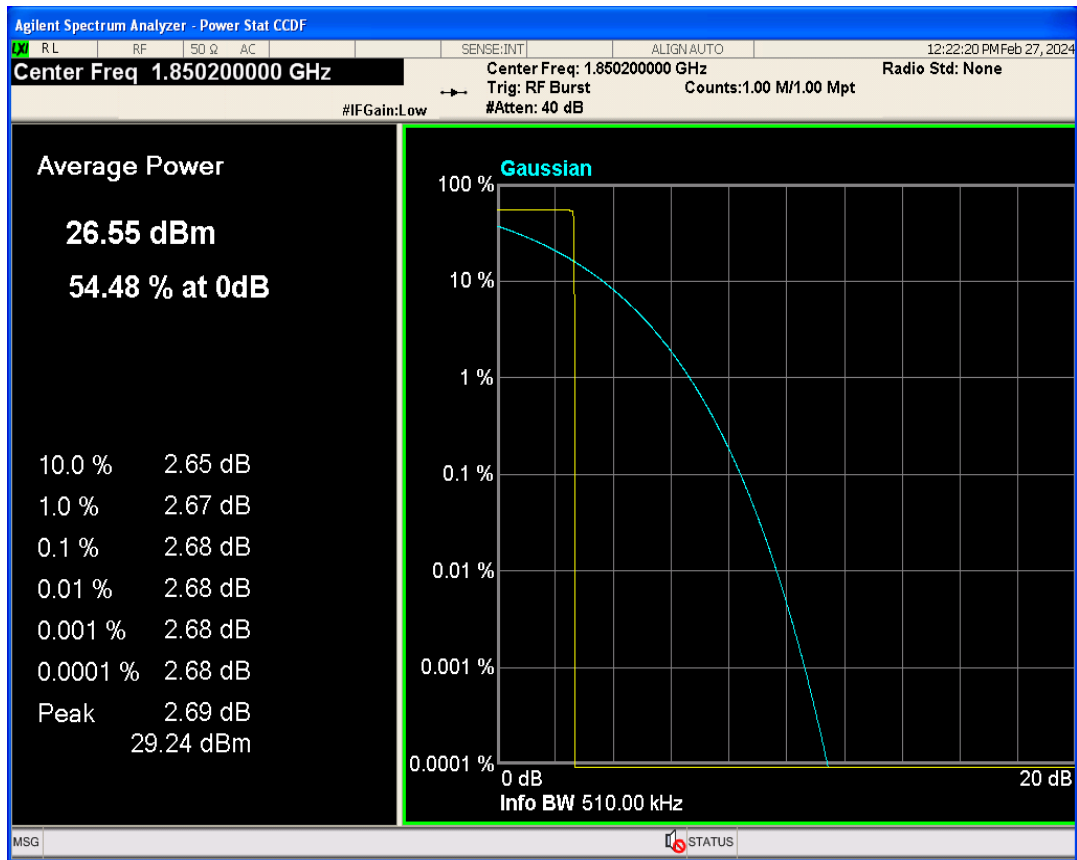


GPRS1900 Channel=661

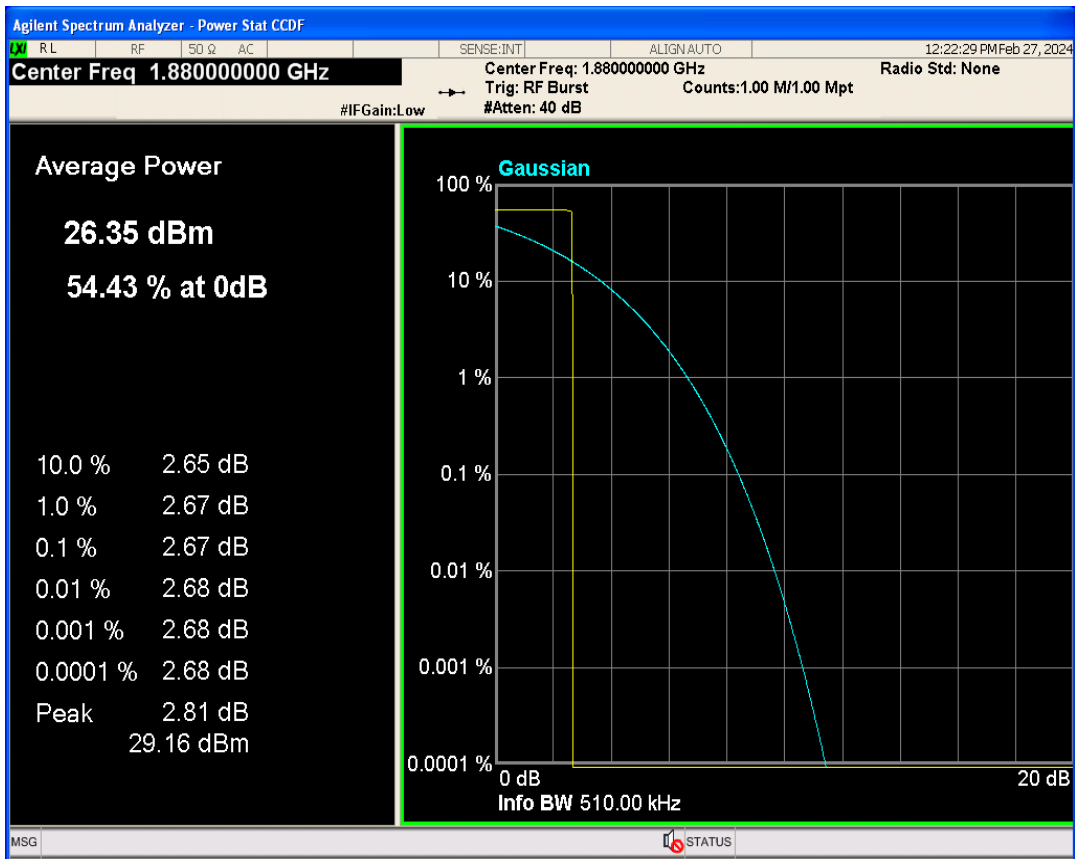


GPRS1900 Channel=810

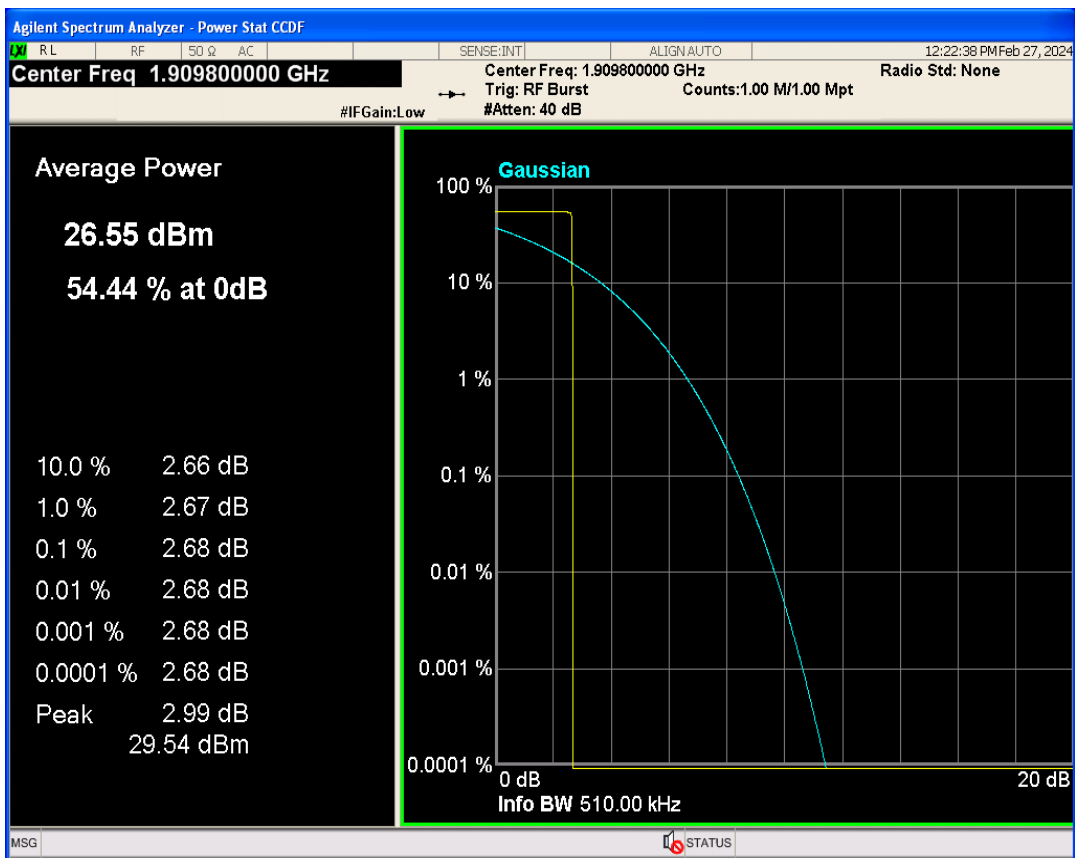


GPRS850 Channel=189

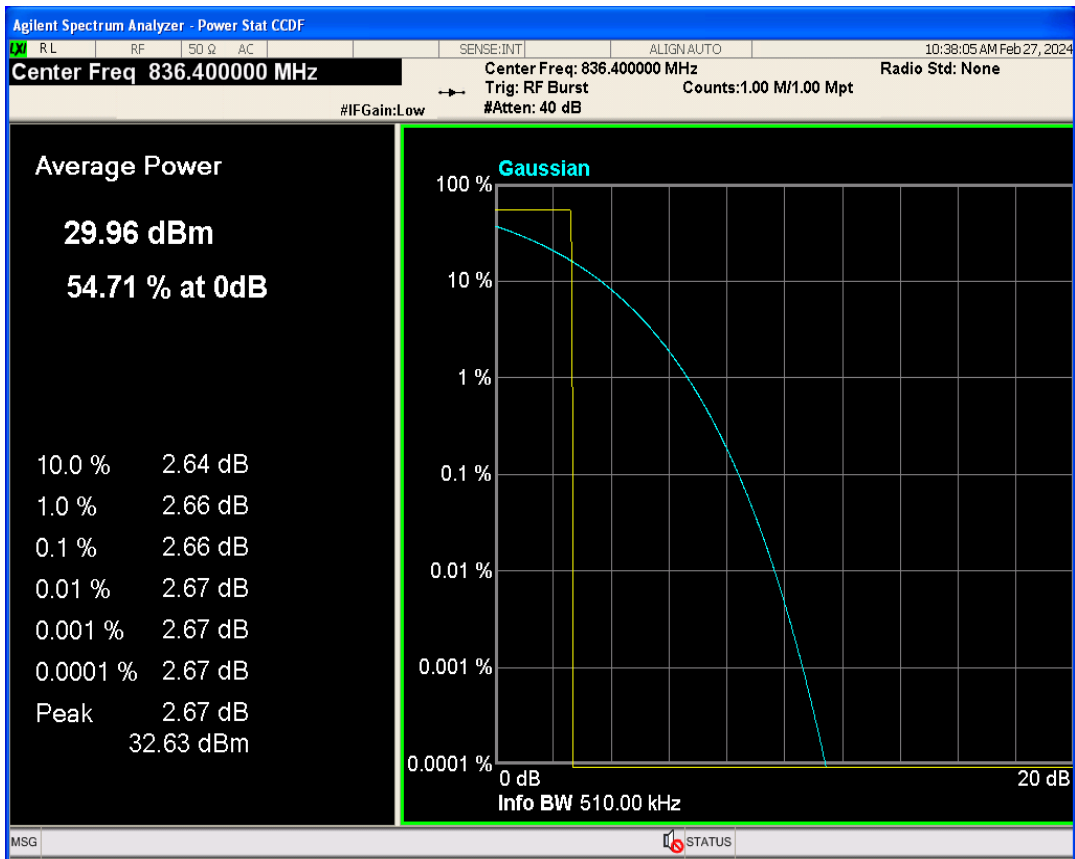

GPRS850 Channel=128

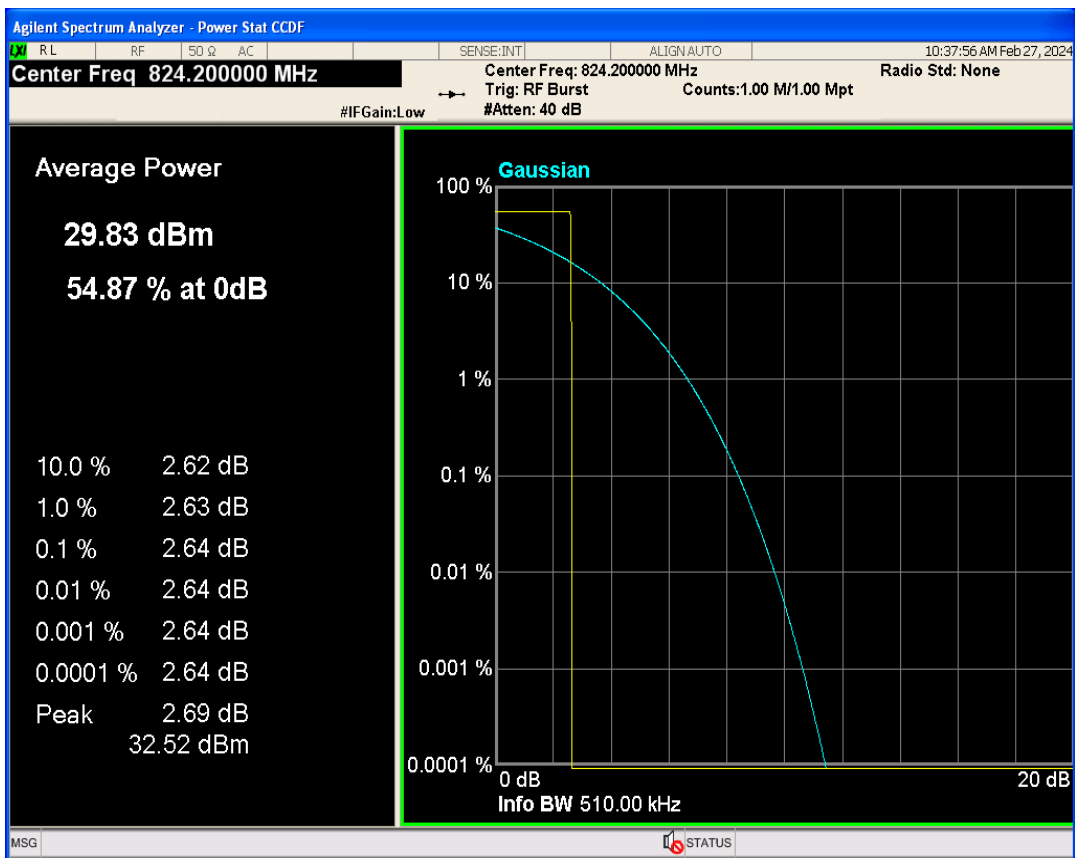


GPRS850 Channel=251

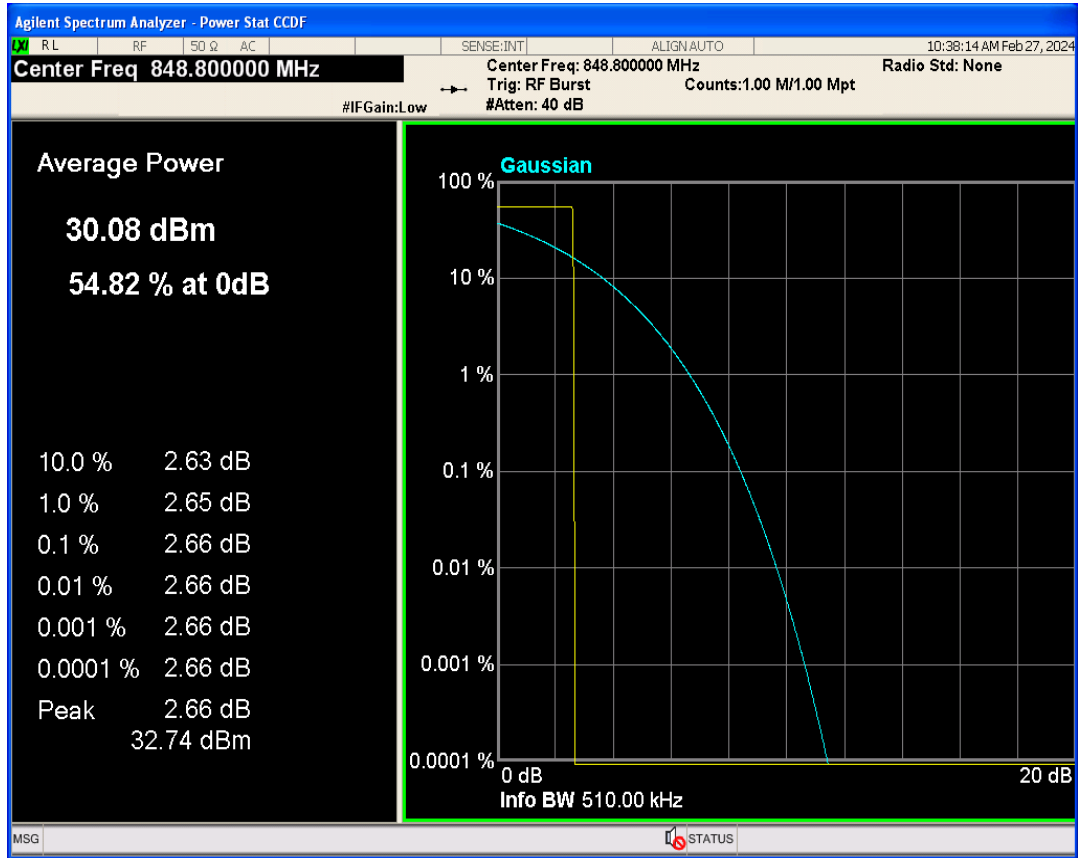


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	244.399	317.130	PASS
GPRS1900	661	1880	251.356	316.089	PASS
GPRS1900	810	1909.8	241.498	318.286	PASS
GPRS850	128	824.2	241.816	314.044	PASS
GPRS850	189	836.4	246.604	319.722	PASS
GPRS850	251	848.8	245.838	314.260	PASS


GPRS1900 Channel=512

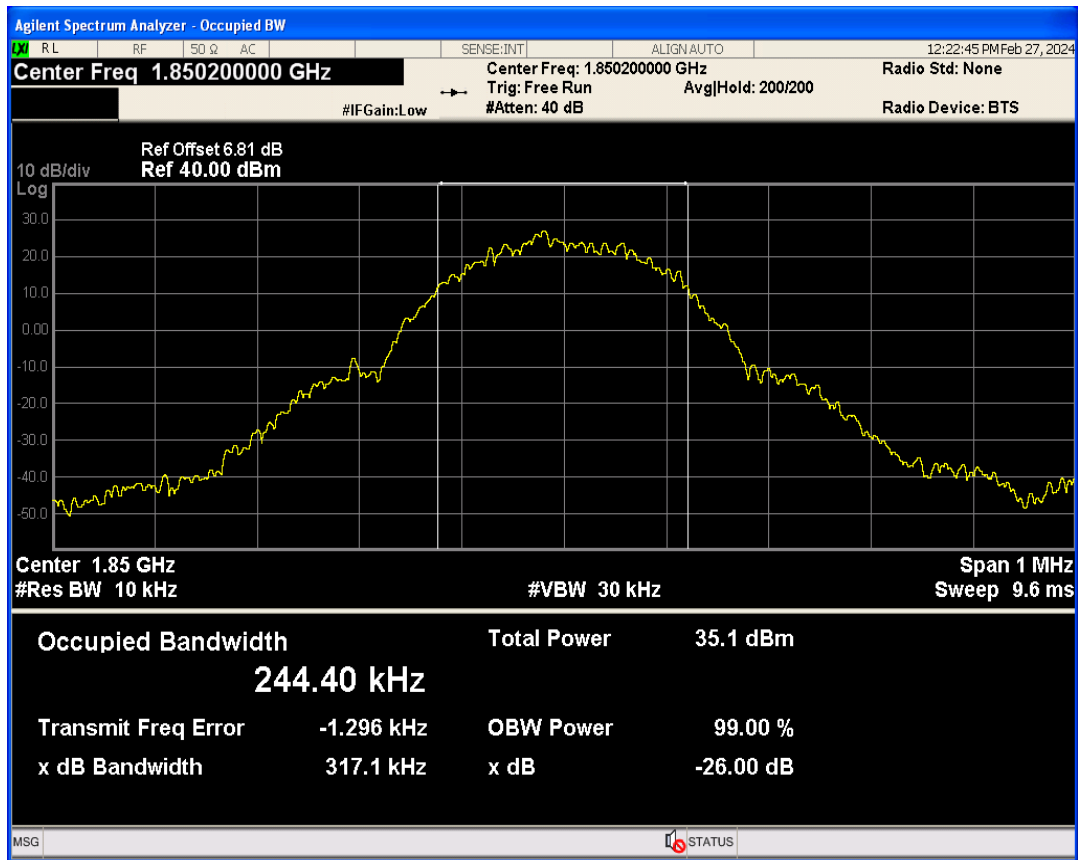


GPRS1900 Channel=661

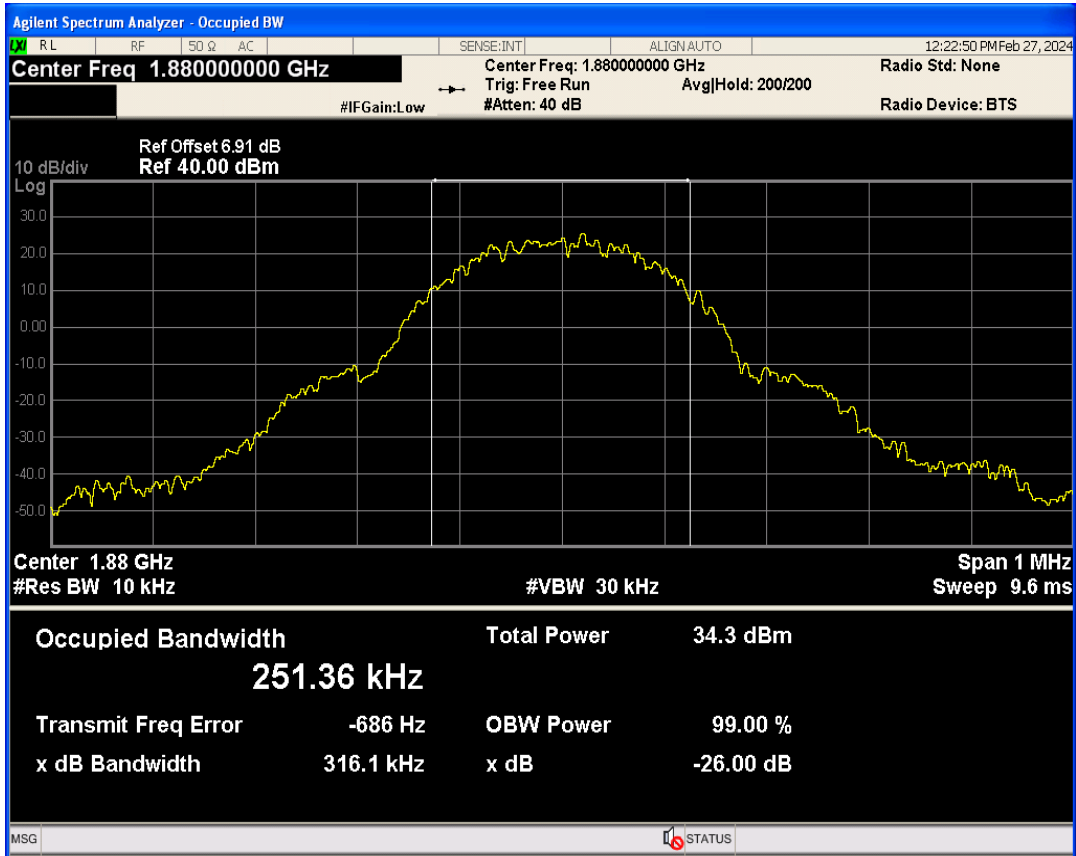


GPRS1900 Channel=810

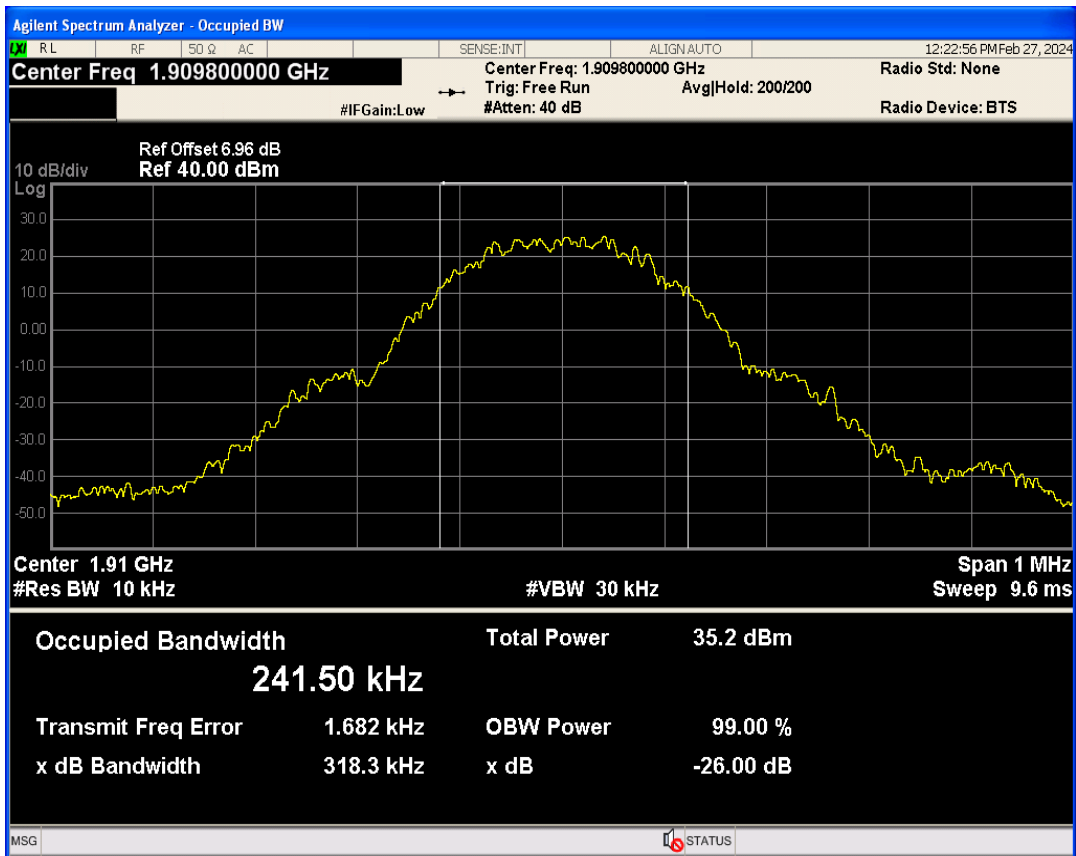


GPRS850 Channel=128

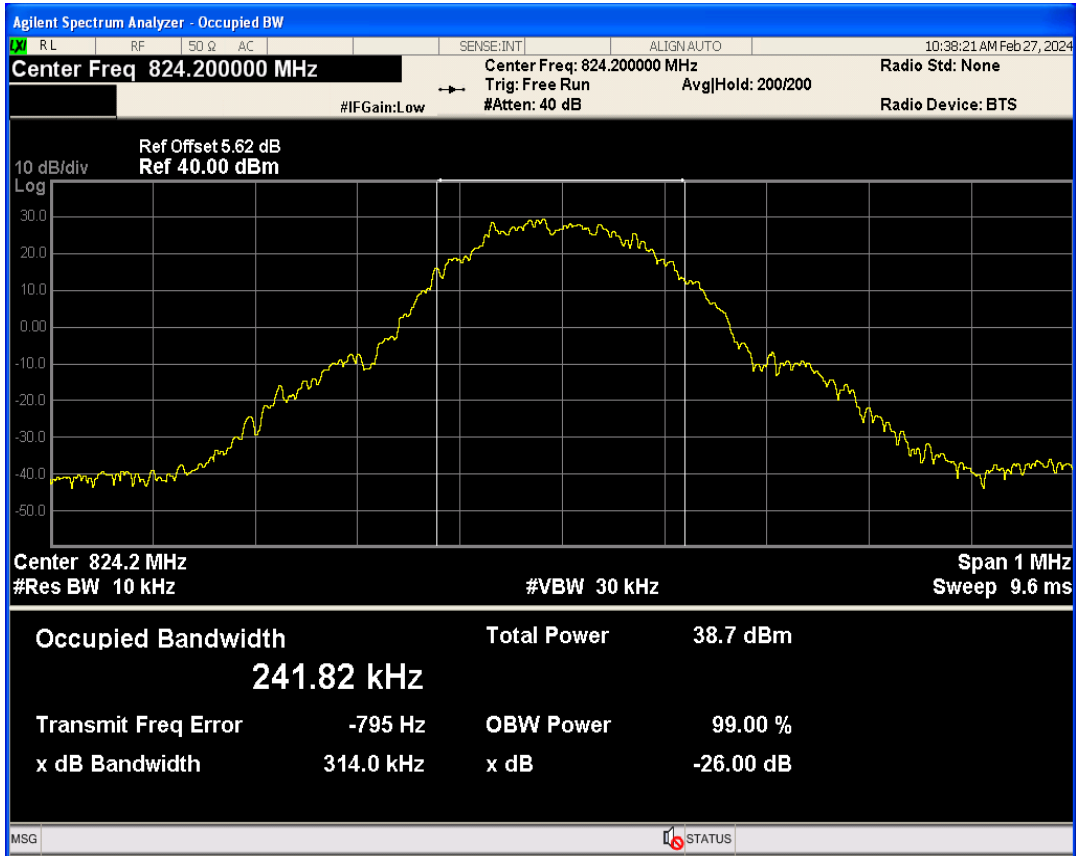

GPRS850 Channel=189

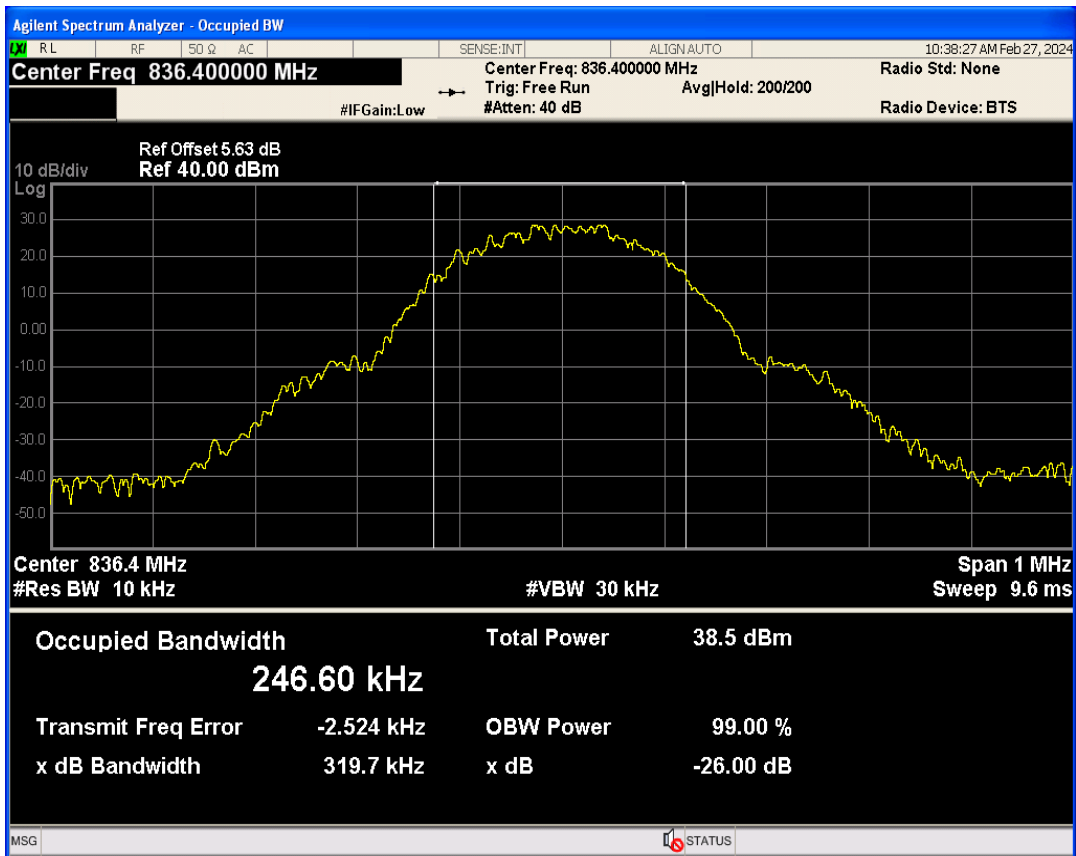


GPRS850 Channel=251

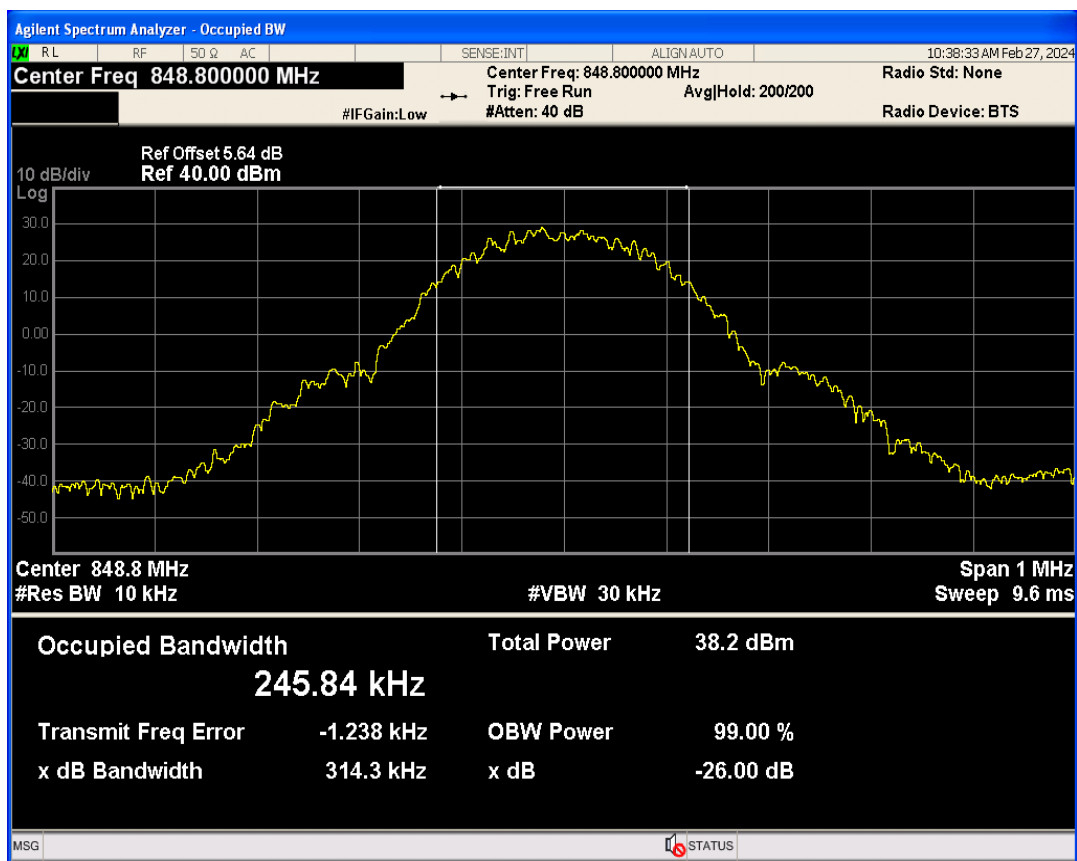


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1849.98	-31.78	-13	PASS
GPRS1900	810	1909.8	1910.02	-30.36	-13	PASS
GPRS850	128	824.2	823.98	-27.10	-13	PASS
GPRS850	251	848.8	849.03	-27.32	-13	PASS


GPRS1900 Channel=810

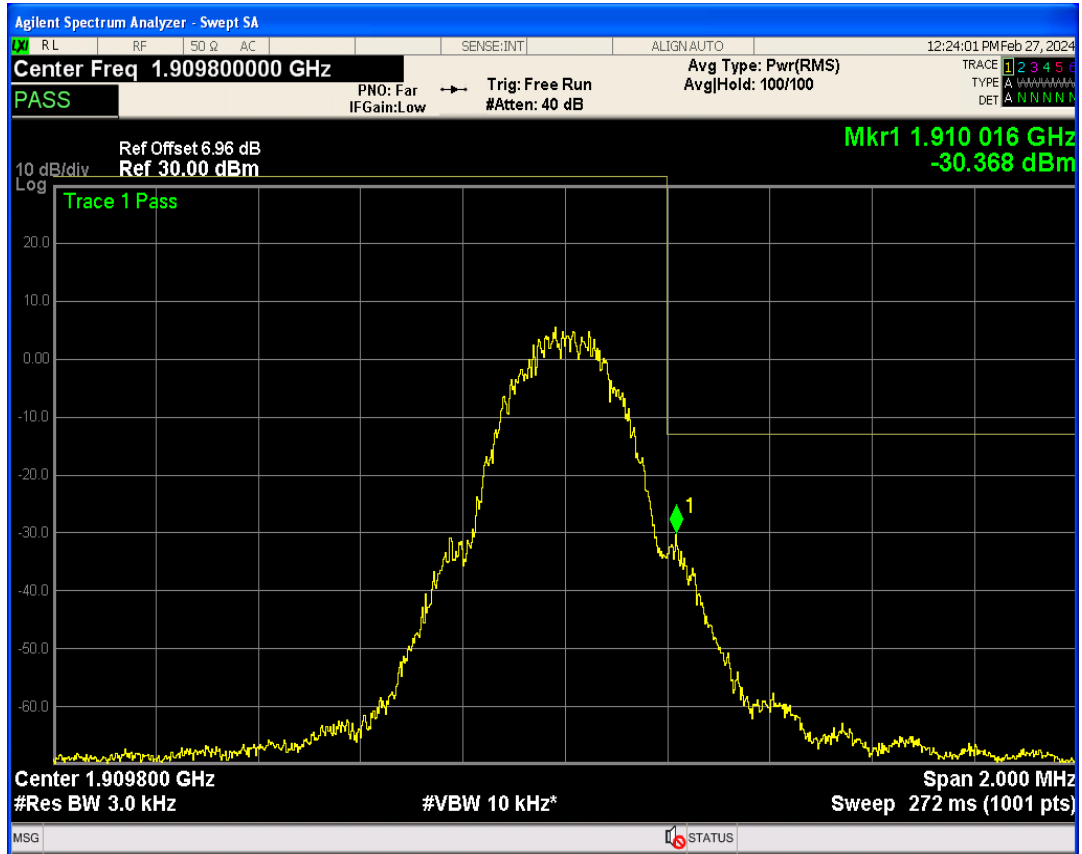


GPRS1900 Channel=512

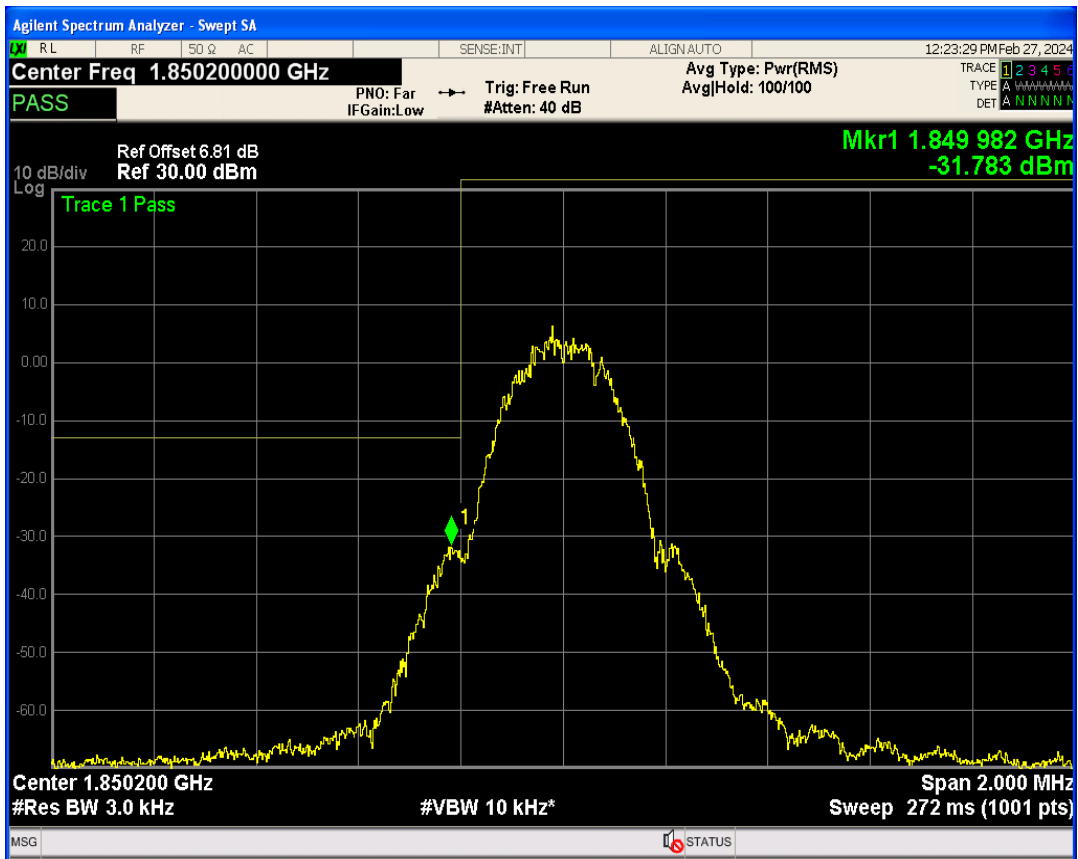

GPRS850 Channel=128

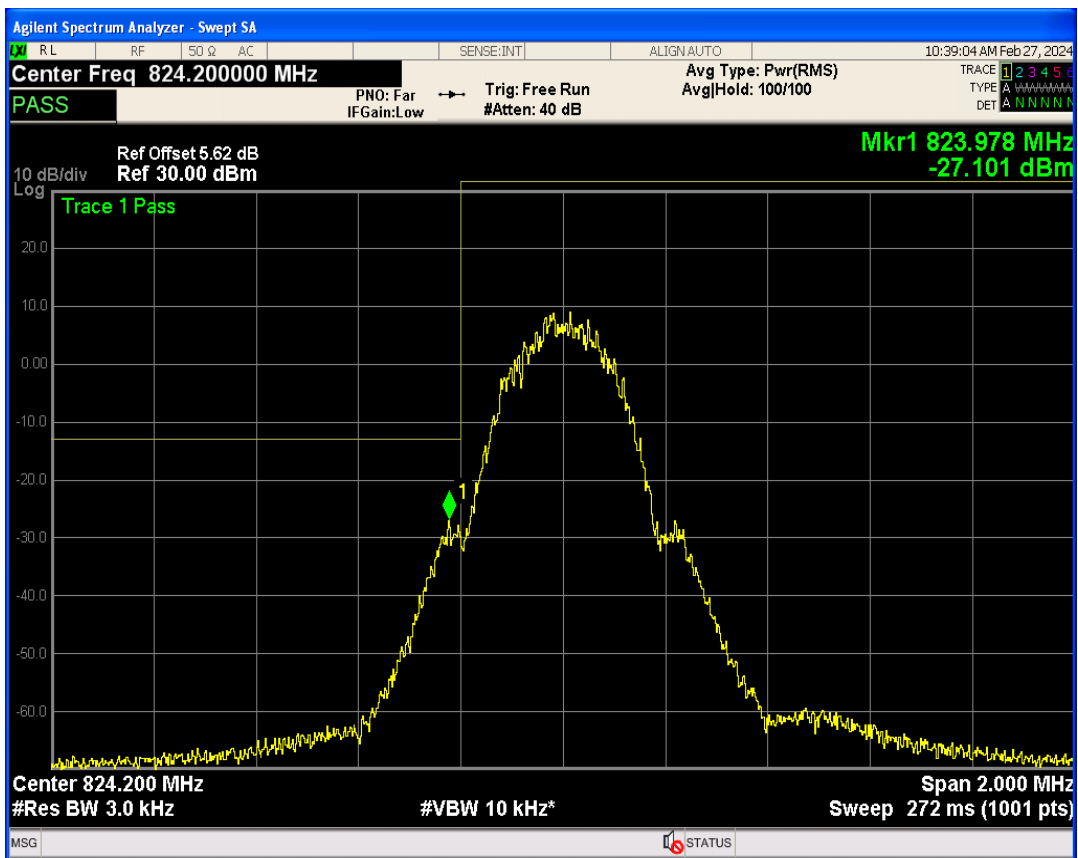


GPRS850 Channel=251

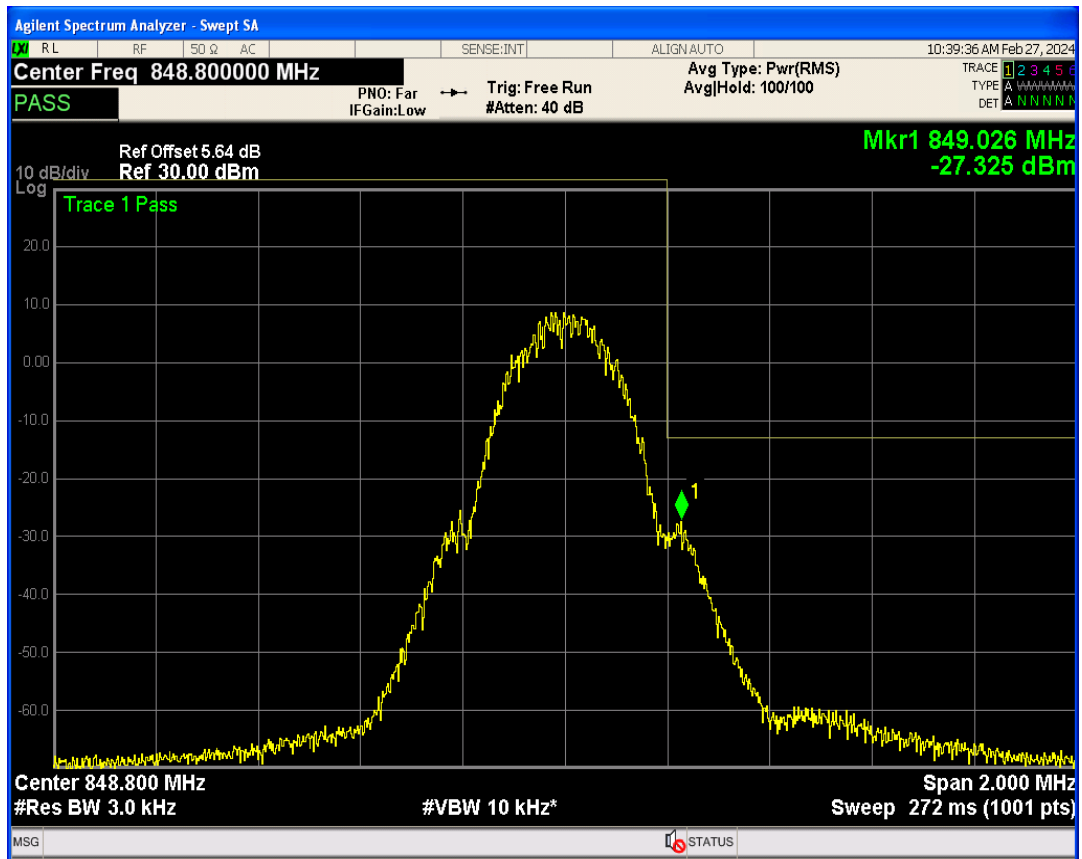


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	25996.41	-19.36	-13	PASS
GPRS1900	661	1880	25974.57	-19.81	-13	PASS
GPRS1900	810	1909.8	25922.29	-19.58	-13	PASS
GPRS850	128	824.2	25938.84	-20.35	-13	PASS
GPRS850	189	836.4	26018.91	-21.13	-13	PASS
GPRS850	251	848.8	25977.88	-21.21	-13	PASS


GPRS1900 Channel=512

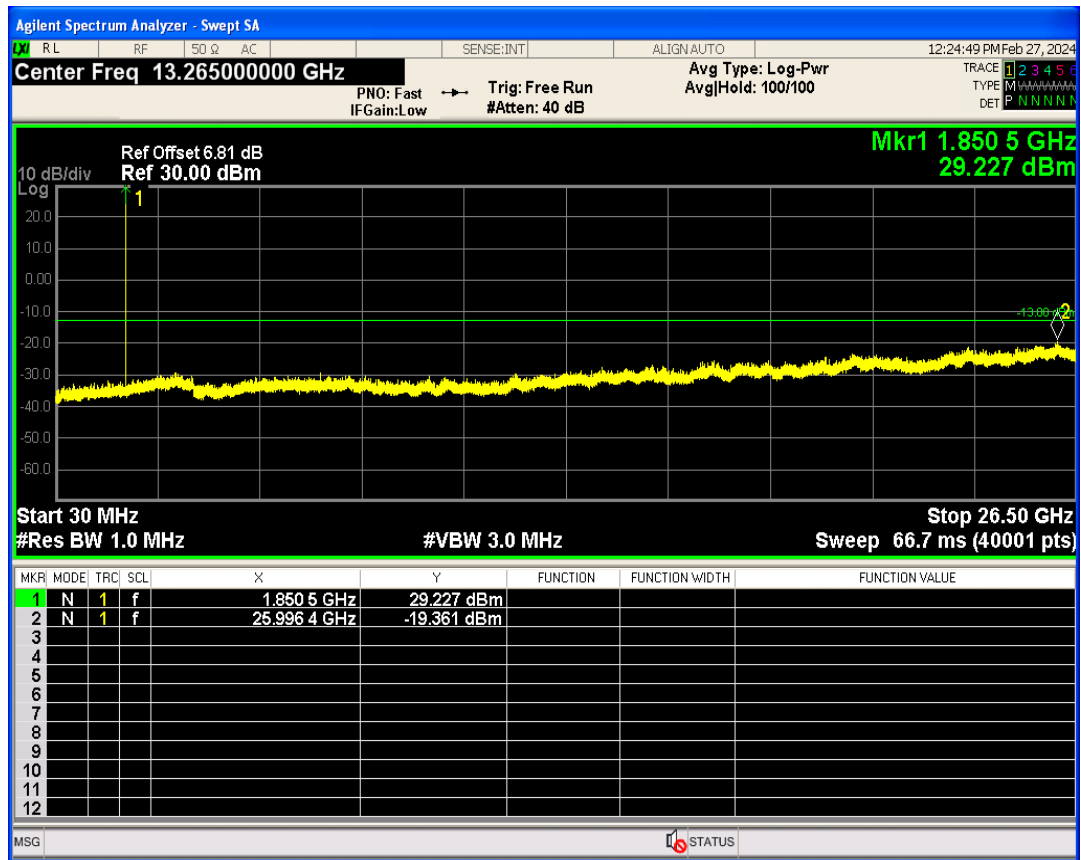


GPRS1900 Channel=810

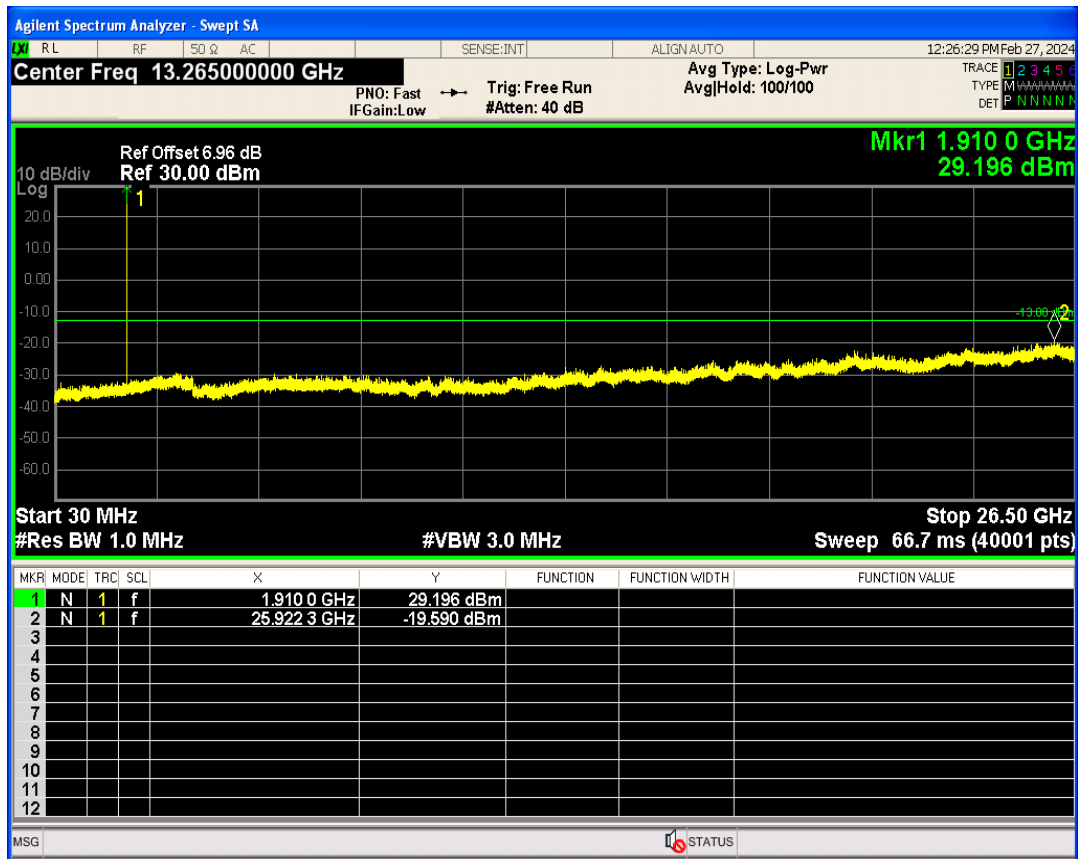


GPRS1900 Channel=661

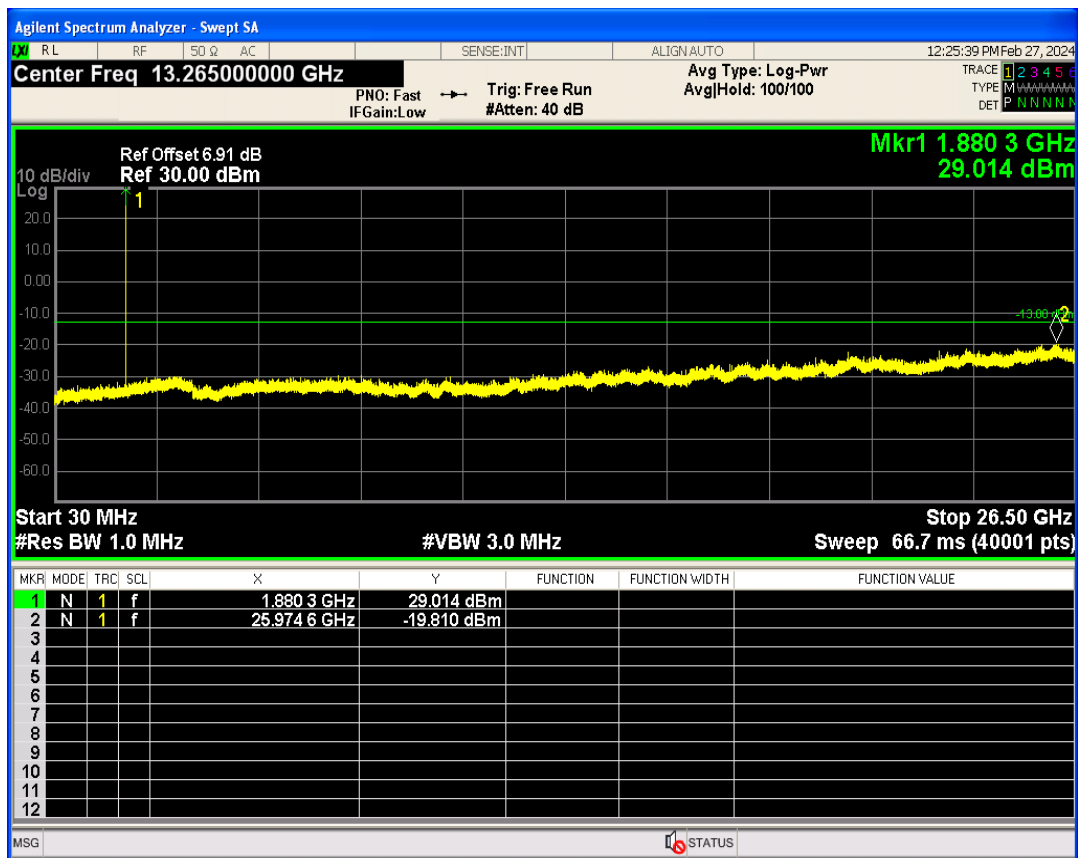


GPRS850 Channel=128

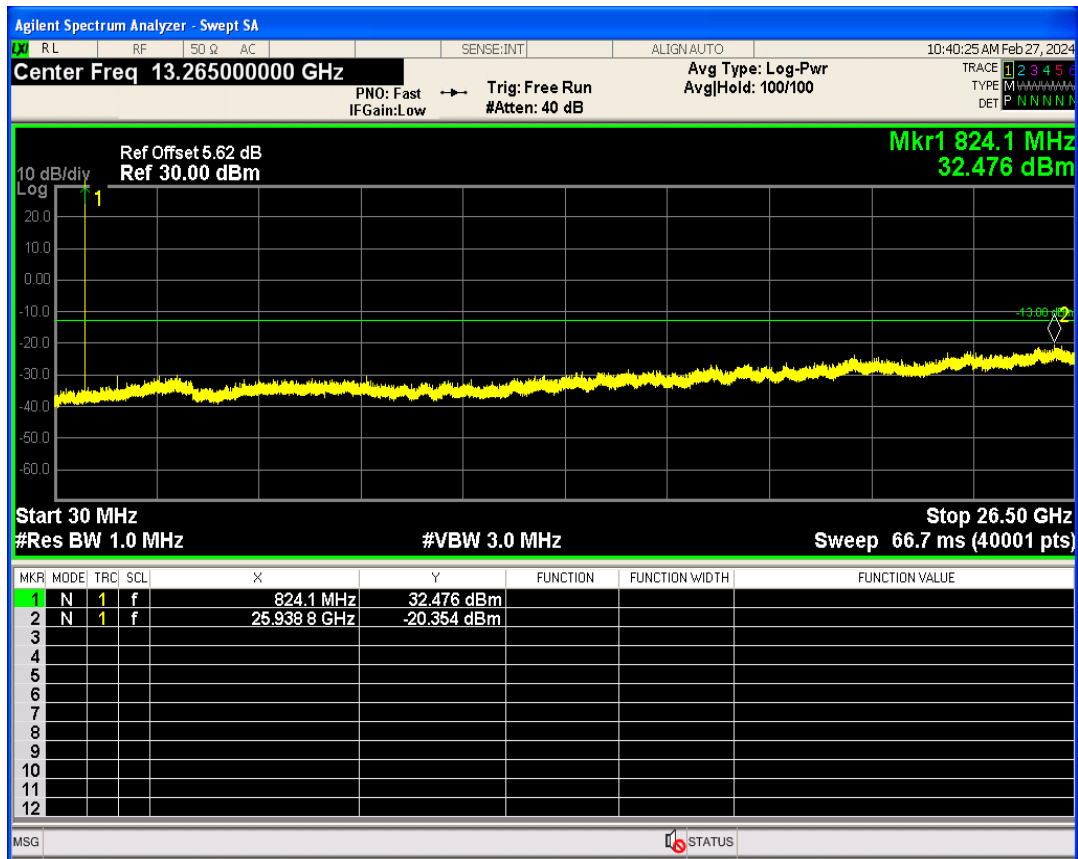

GPRS850 Channel=189

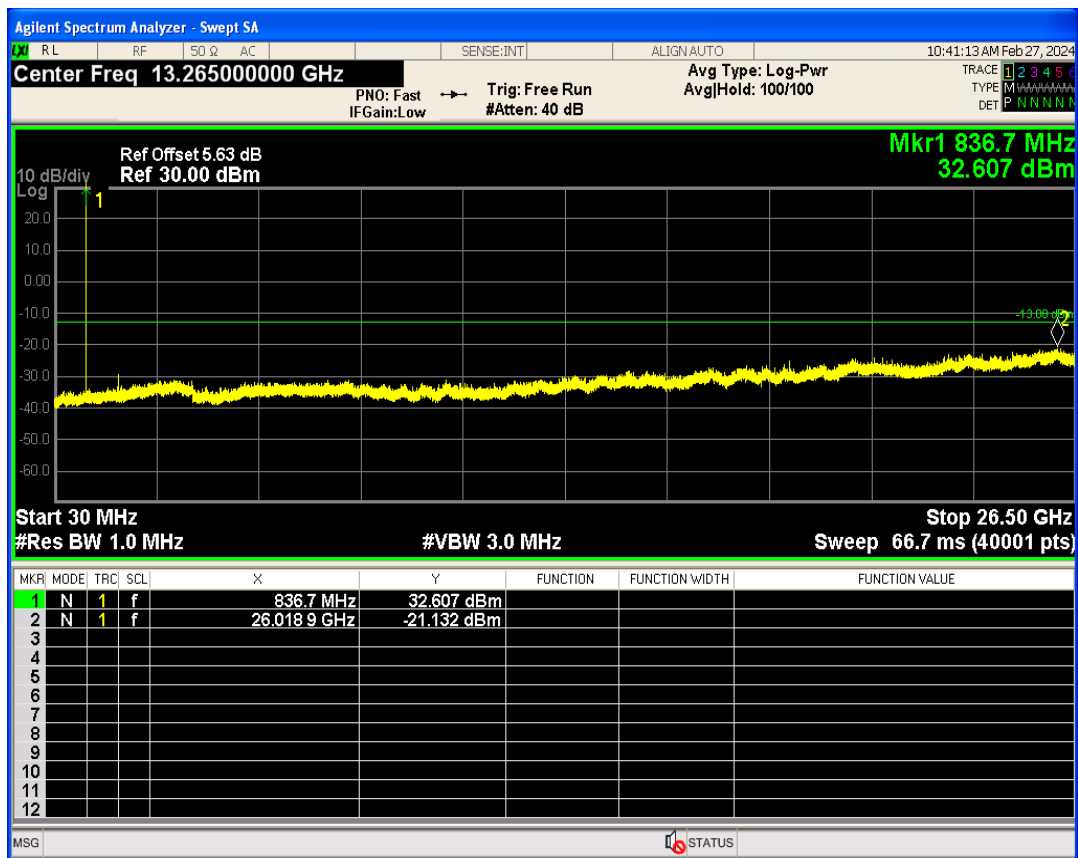

GPRS850 Channel=251

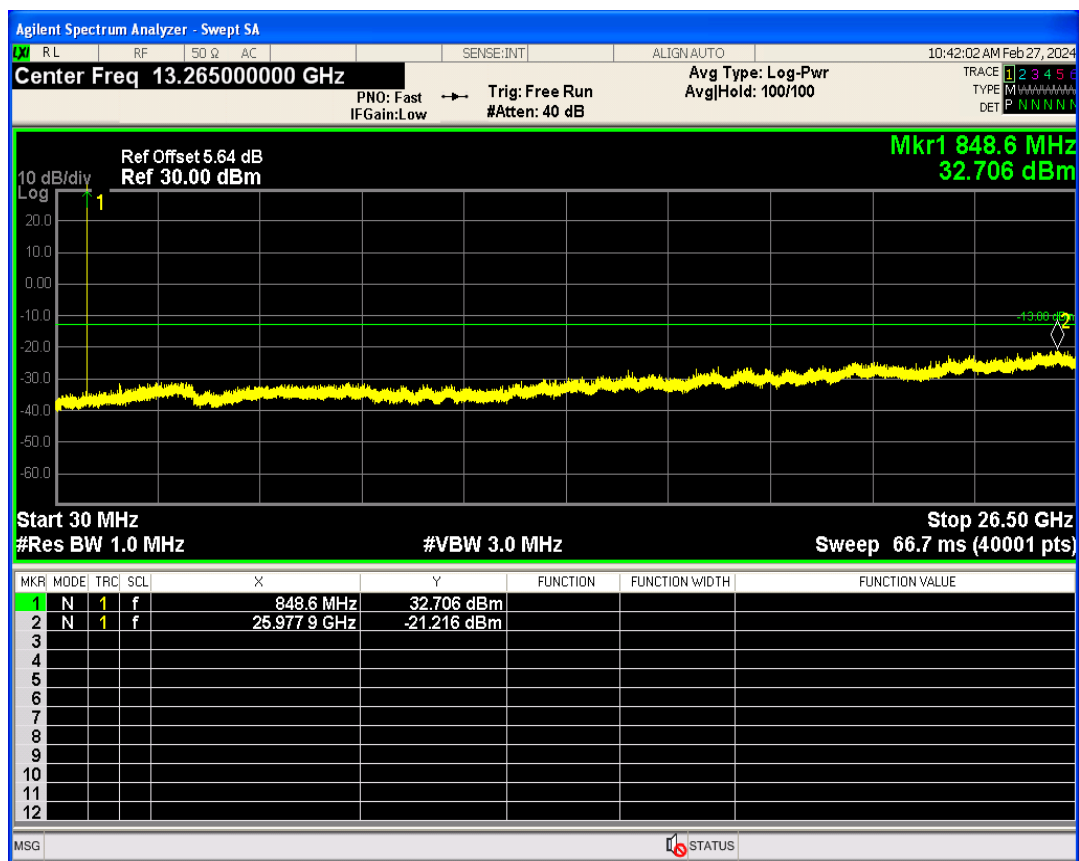


Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
GSM1900	512	1850.2	30.22	PASS
GSM1900	661	1880	30.20	PASS
GSM1900	810	1909.8	30.26	PASS
GSM850	128	824.2	33.32	PASS
GSM850	189	836.4	33.10	PASS
GSM850	251	848.8	33.20	PASS


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GSM1900	512	1850.2	2.63	13	PASS
GSM1900	661	1880	2.63	13	PASS
GSM1900	810	1909.8	2.63	13	PASS
GSM850	128	824.2	2.60	13	PASS
GSM850	189	836.4	2.61	13	PASS
GSM850	251	848.8	2.61	13	PASS


GSM1900 Channel=512

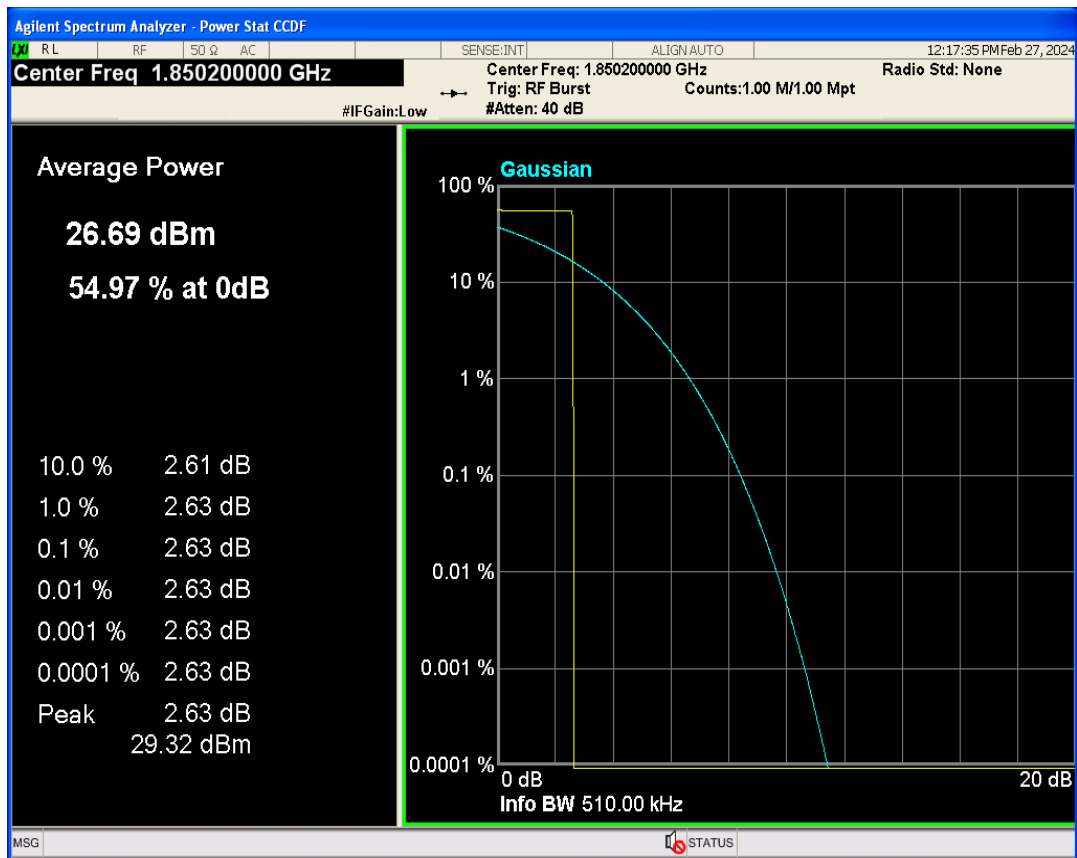


GSM1900 Channel=661

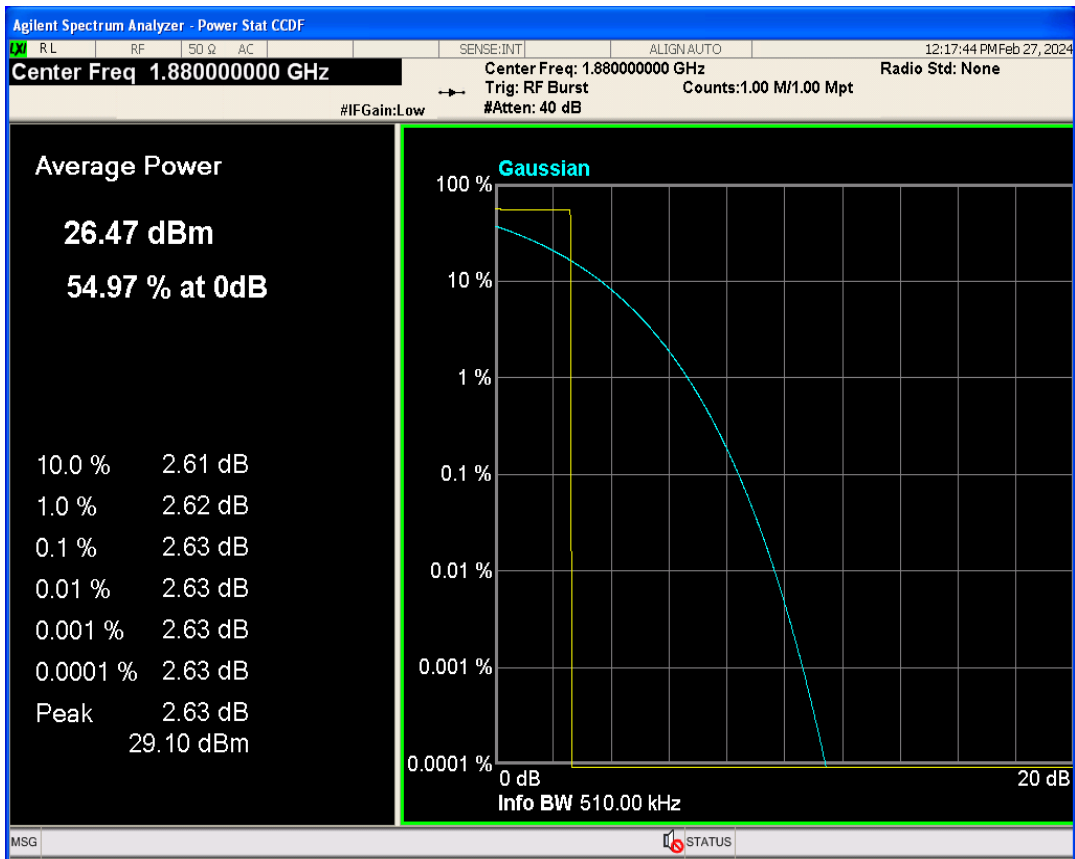


GSM1900 Channel=810

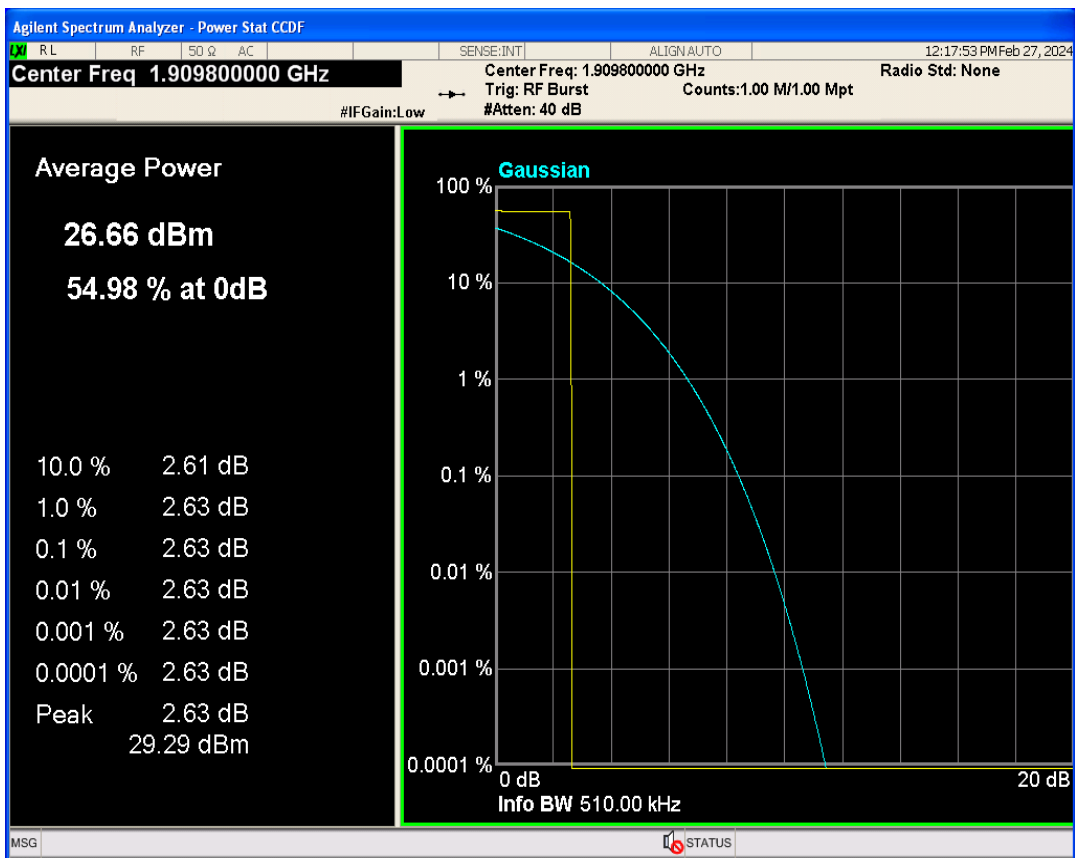


GSM850 Channel=128

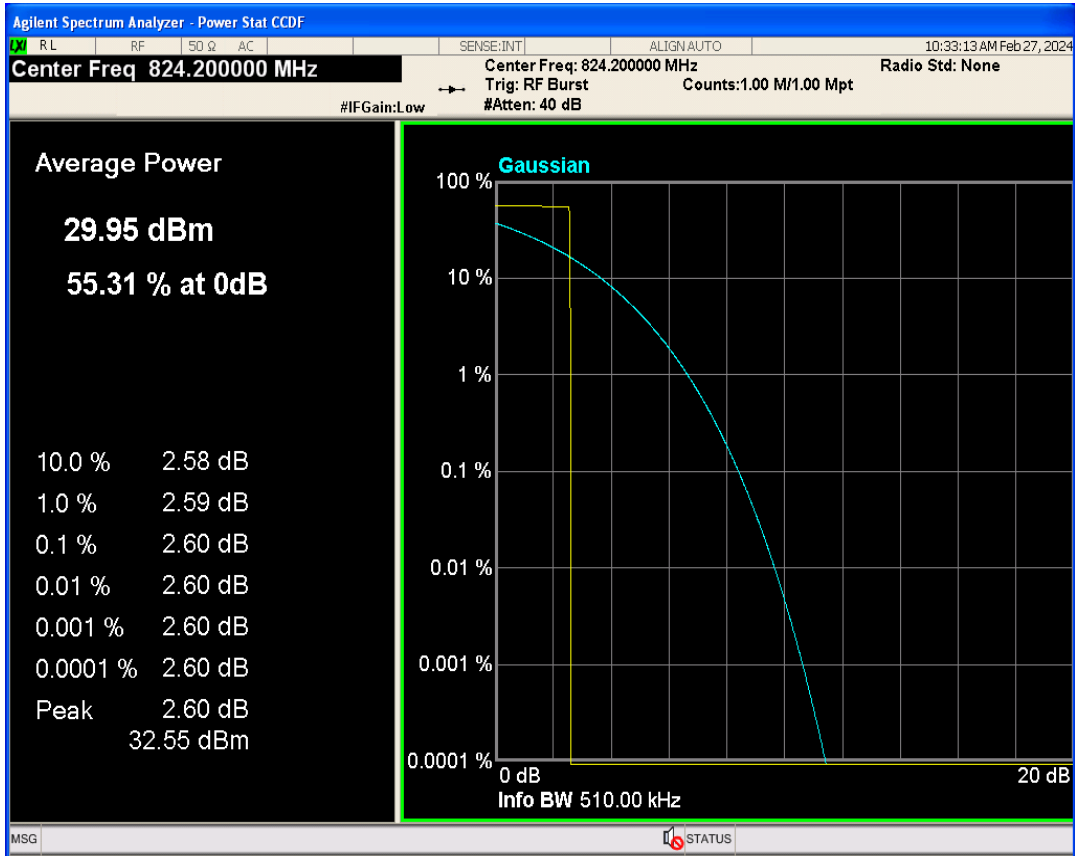

GSM850 Channel=189

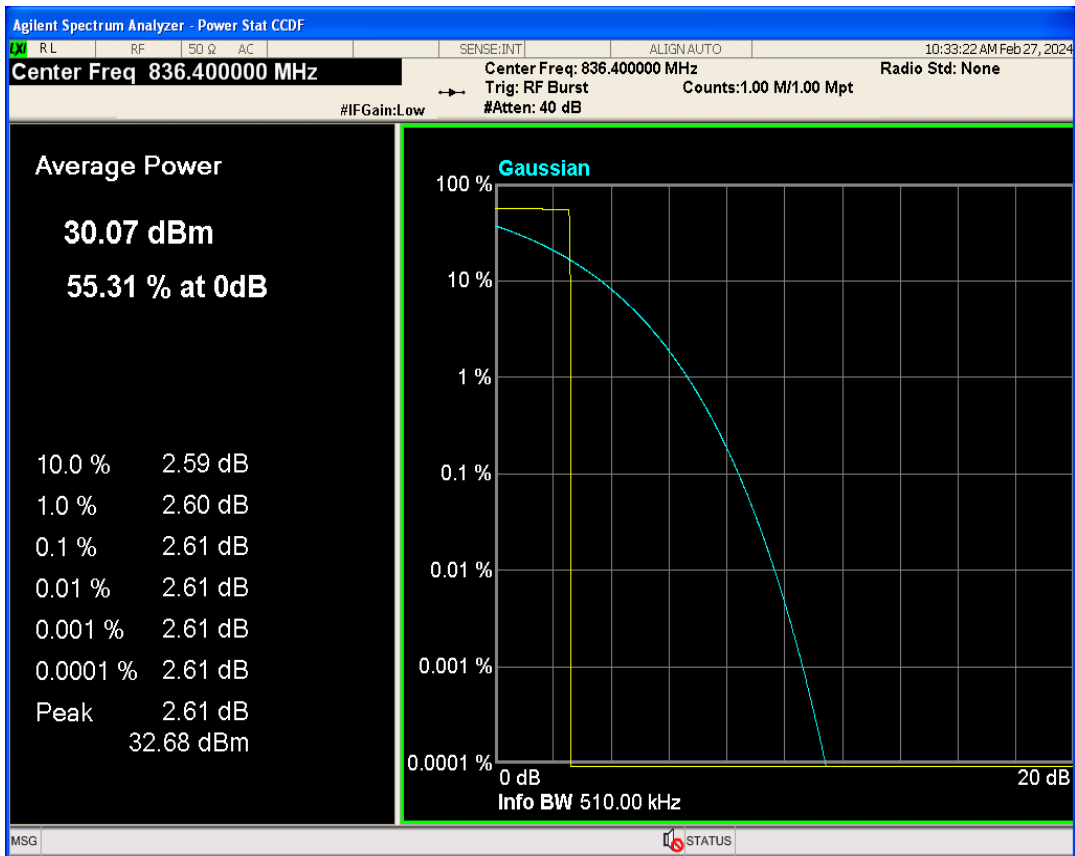


GSM850 Channel=251

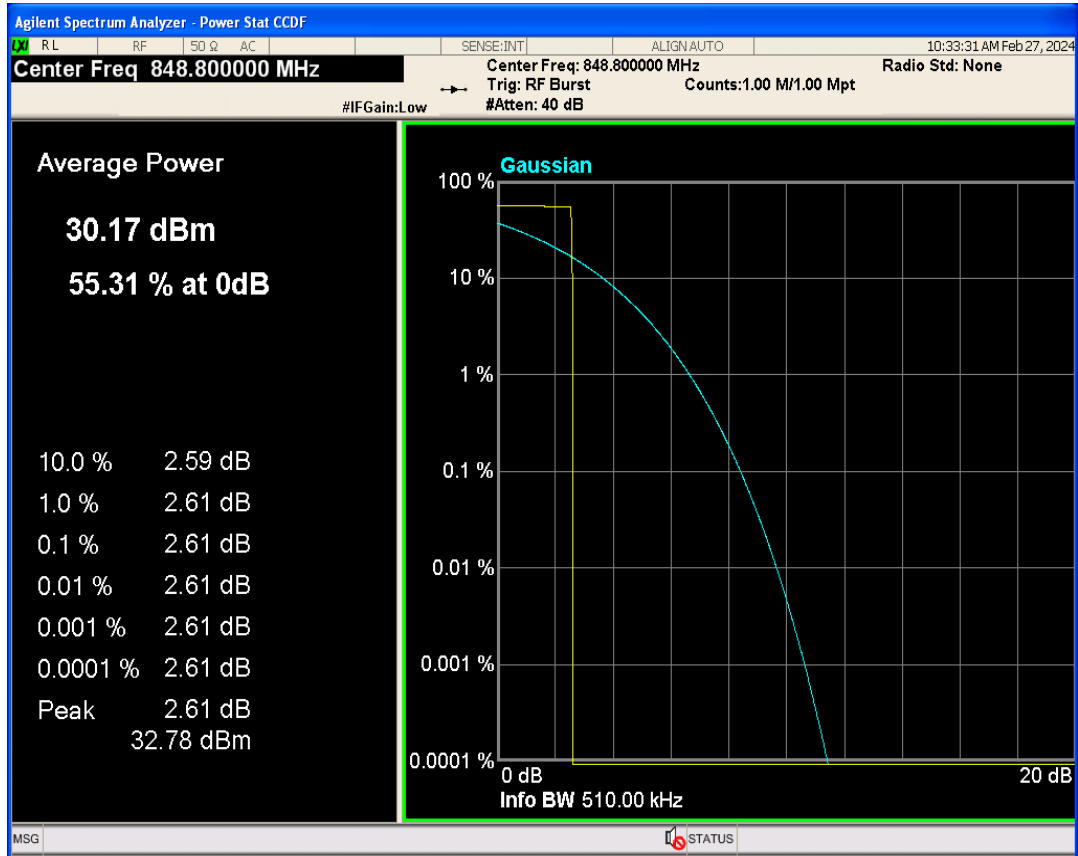


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GSM1900	512	1850.2	241.538	302.180	PASS
GSM1900	661	1880	243.421	311.673	PASS
GSM1900	810	1909.8	241.659	304.729	PASS
GSM850	128	824.2	243.627	299.200	PASS
GSM850	189	836.4	244.552	310.411	PASS
GSM850	251	848.8	244.498	327.168	PASS


GSM1900 Channel=512

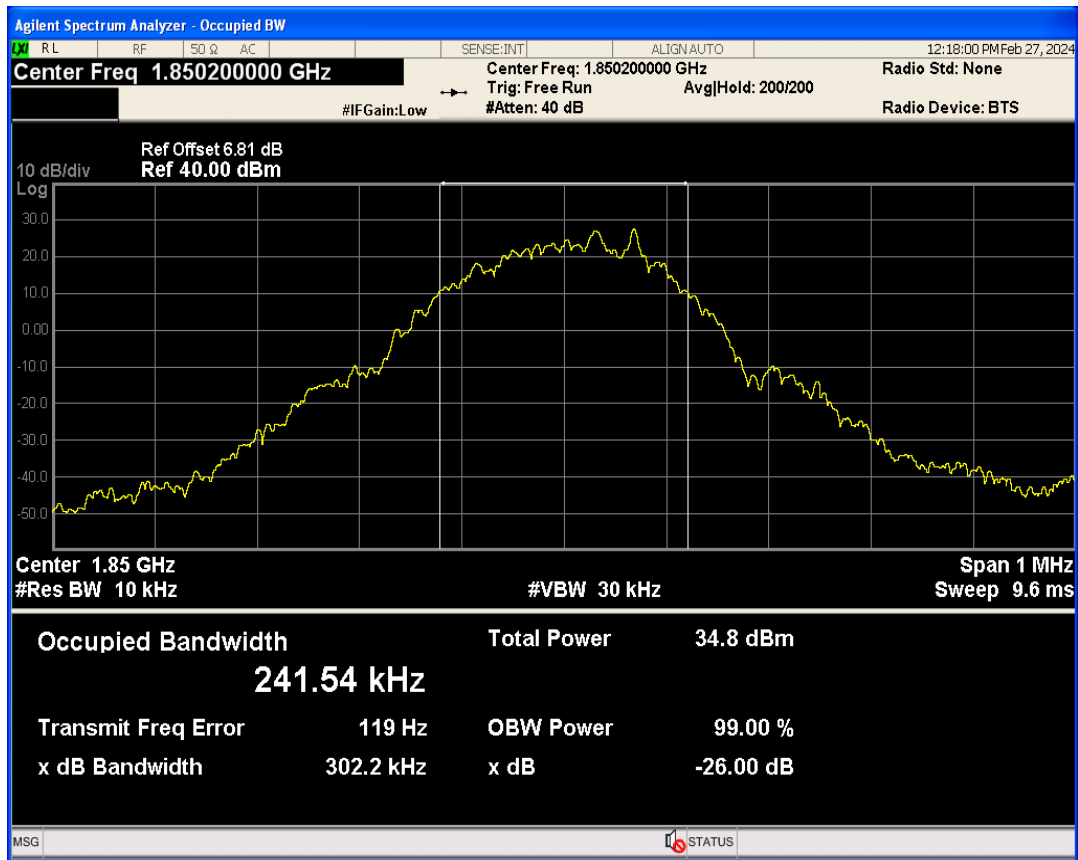


GSM1900 Channel=661

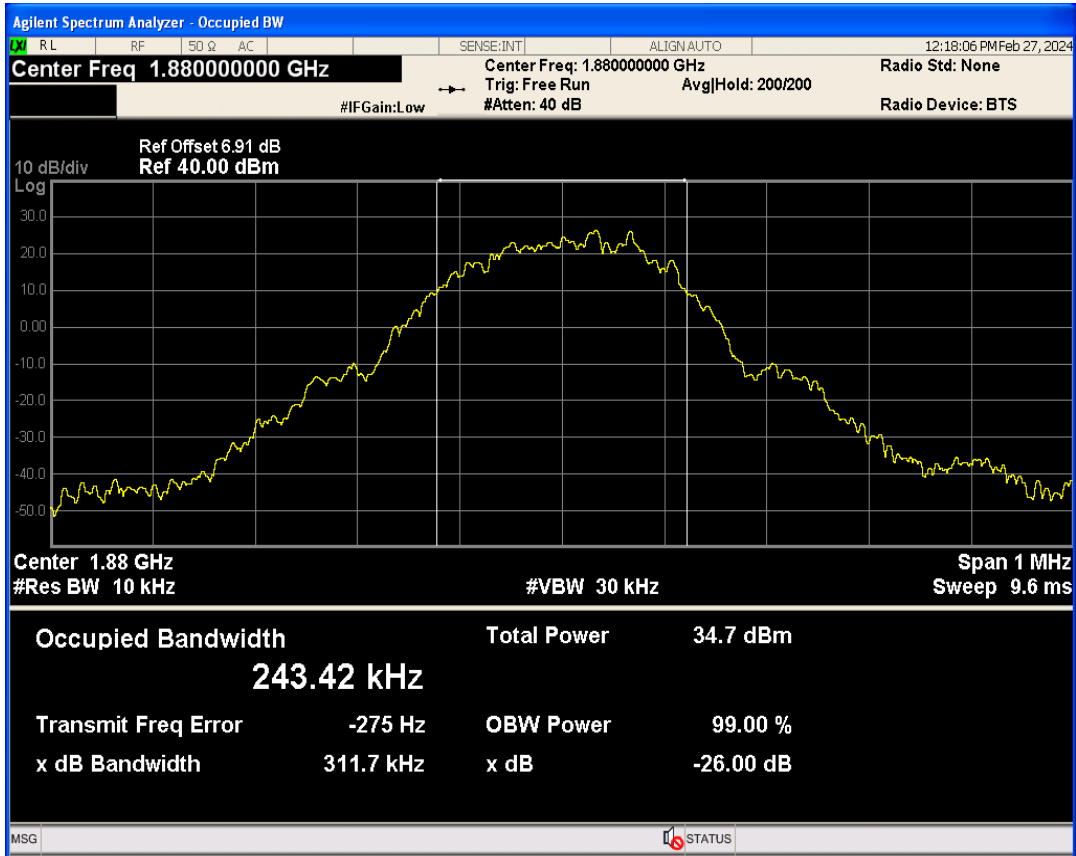


GSM1900 Channel=810

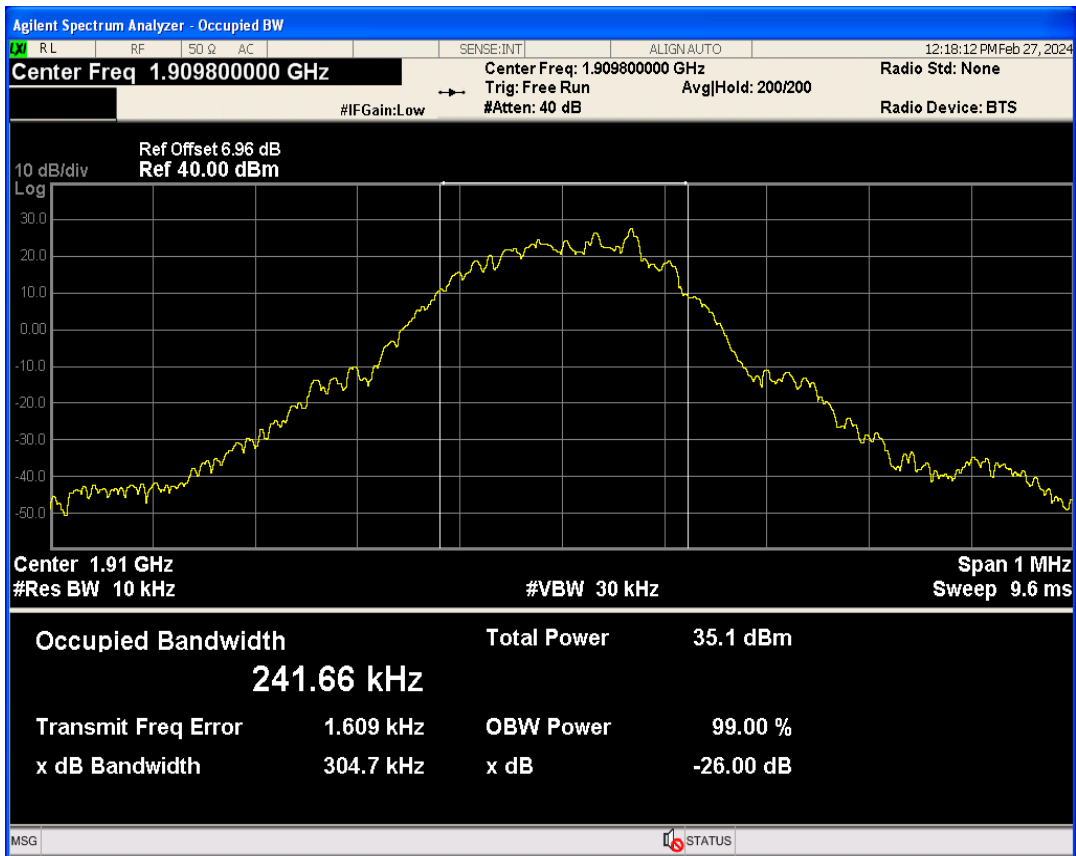


GSM850 Channel=189

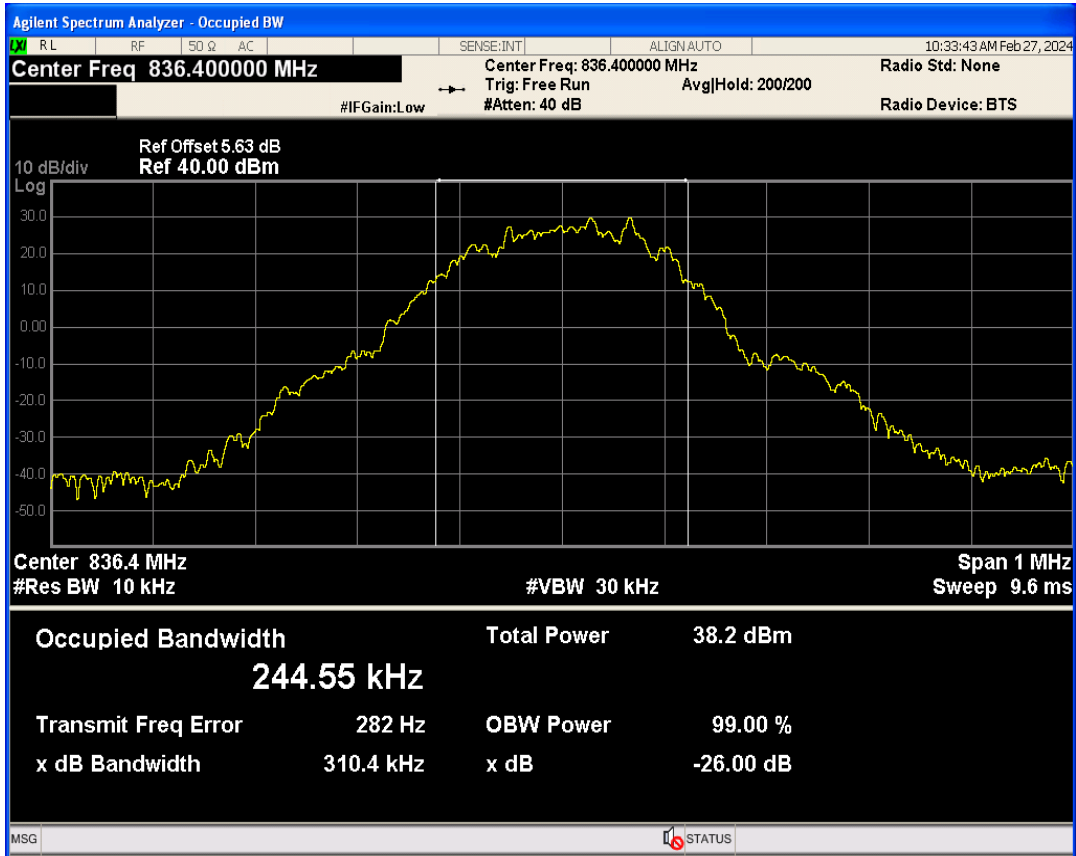

GSM850 Channel=128

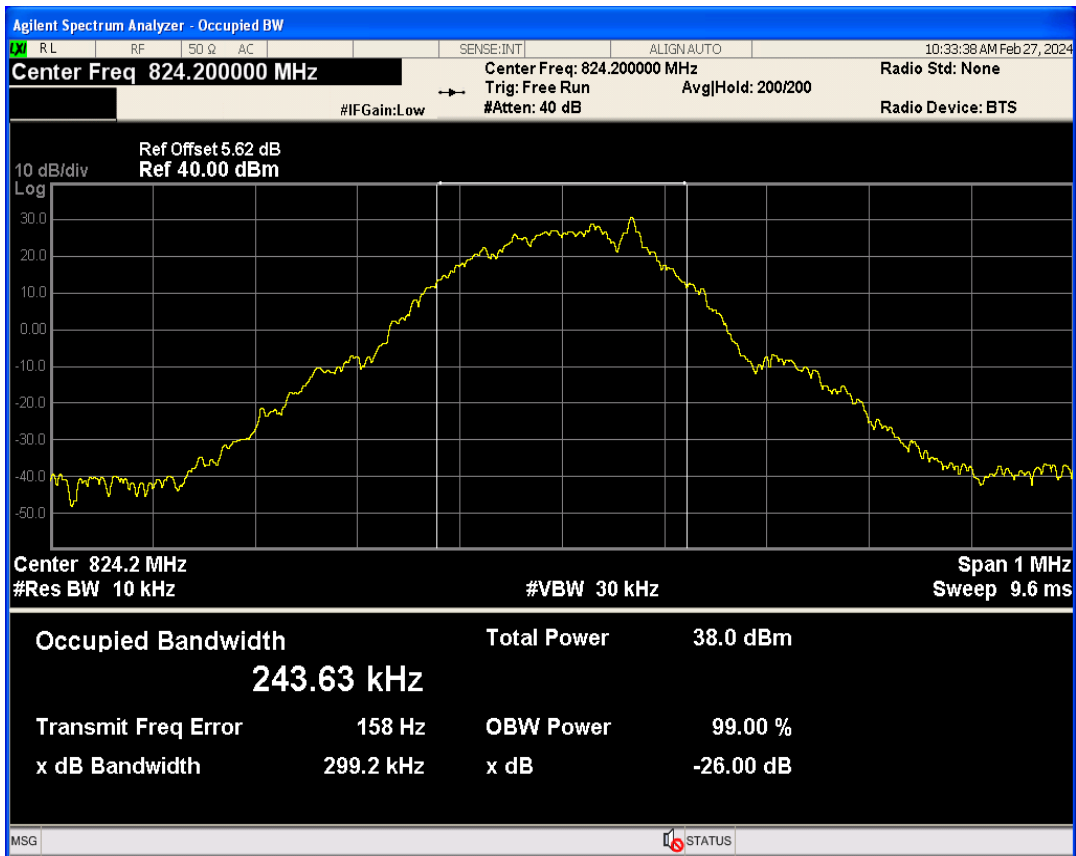


GSM850 Channel=251

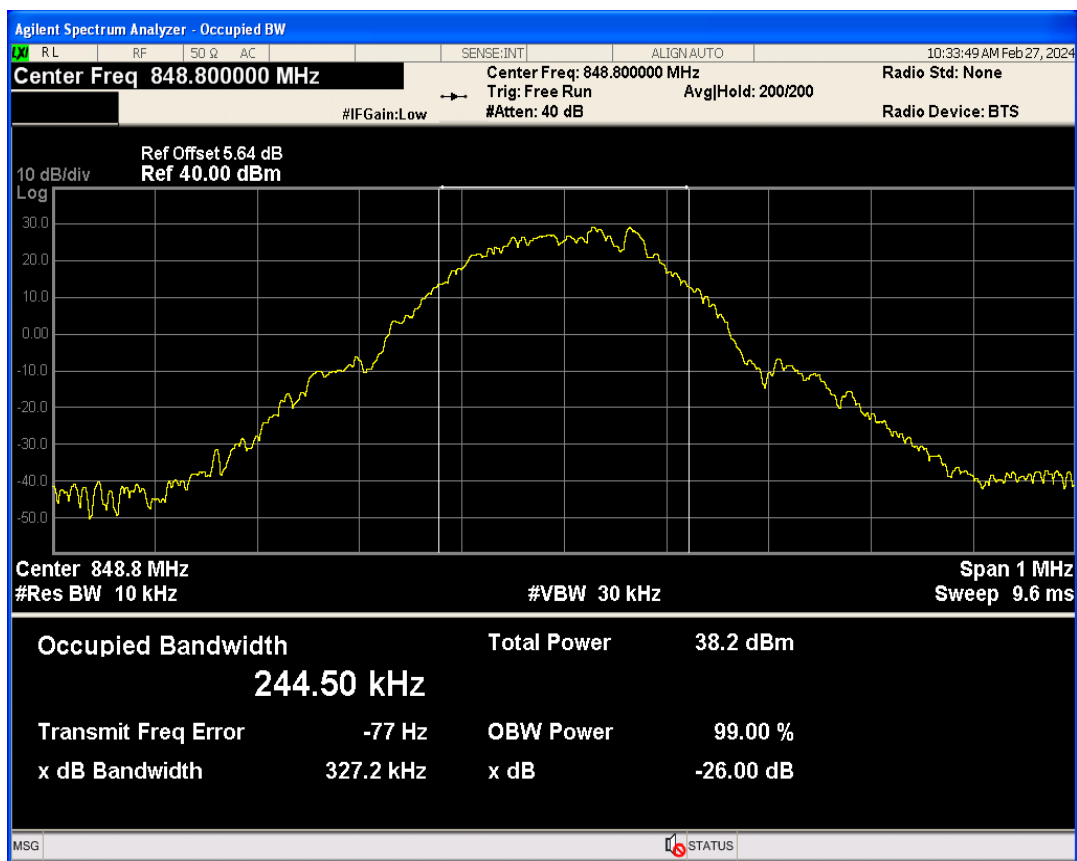


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	1850.00	-28.16	-13	PASS
GSM1900	810	1909.8	1910.02	-27.96	-13	PASS
GSM850	128	824.2	824.00	-24.43	-13	PASS
GSM850	251	848.8	849.02	-26.86	-13	PASS


GSM1900 Channel=512

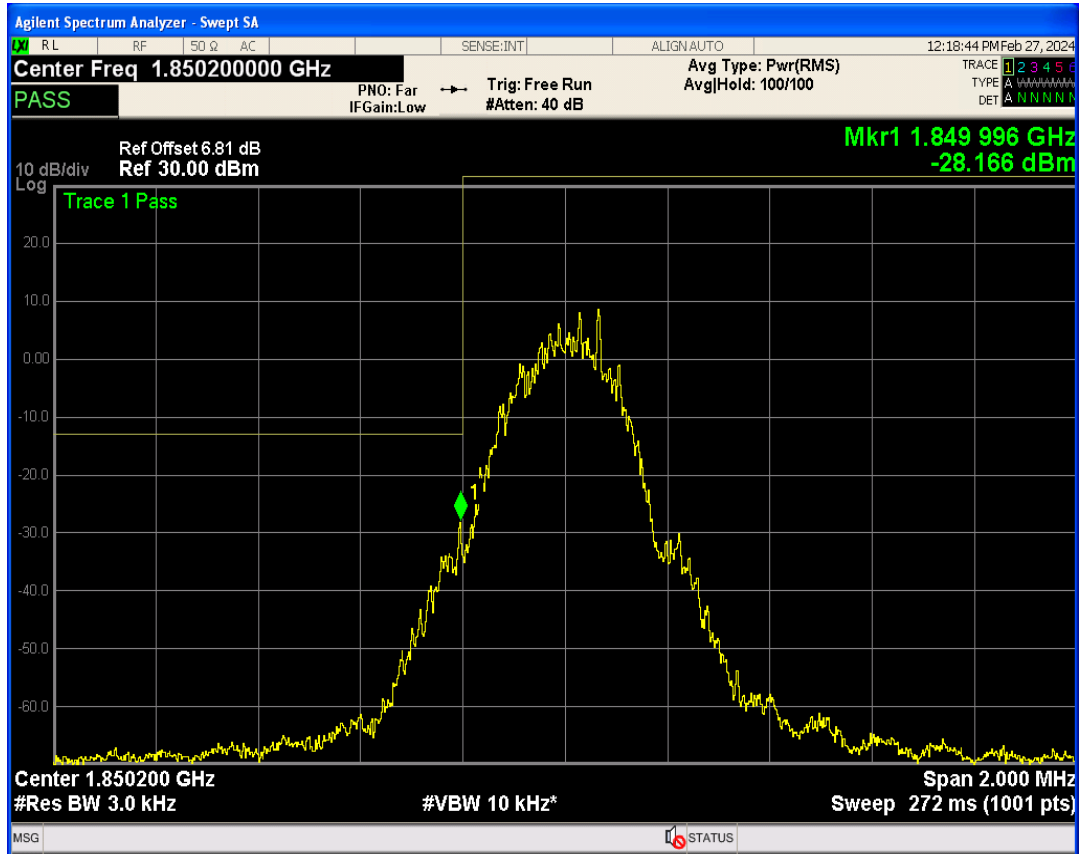


GSM1900 Channel=810

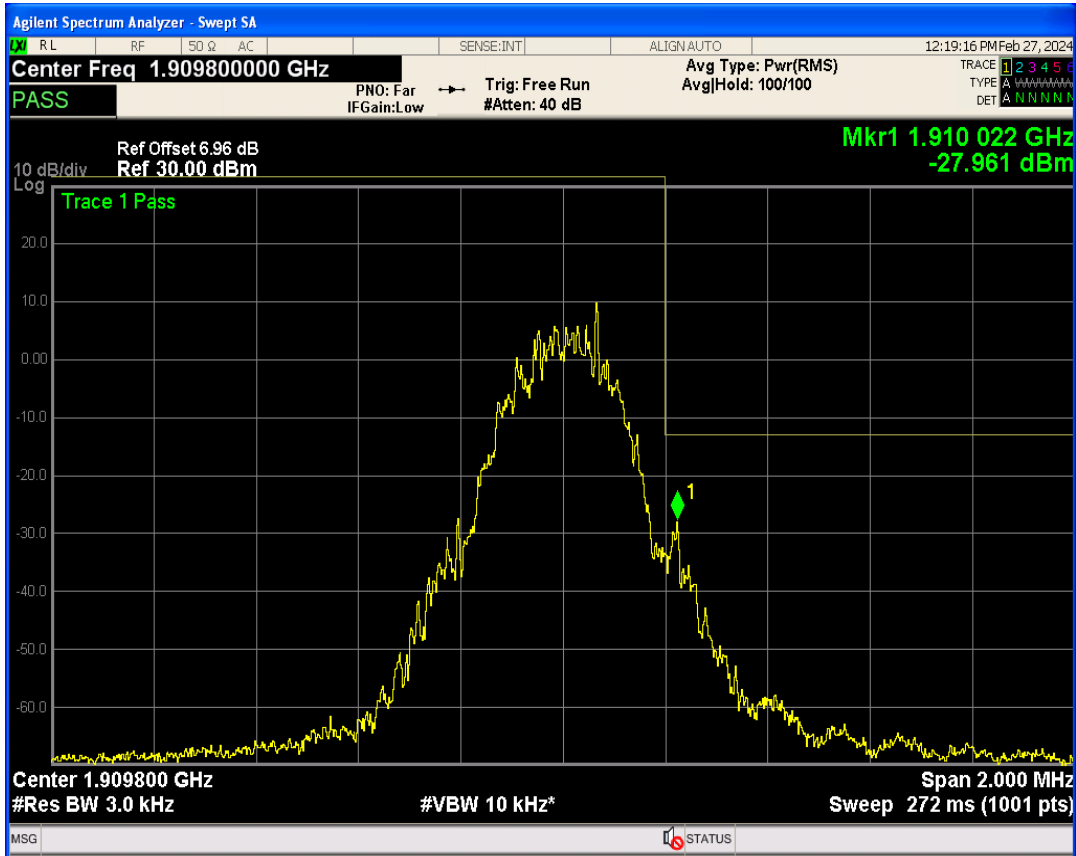

GSM850 Channel=128

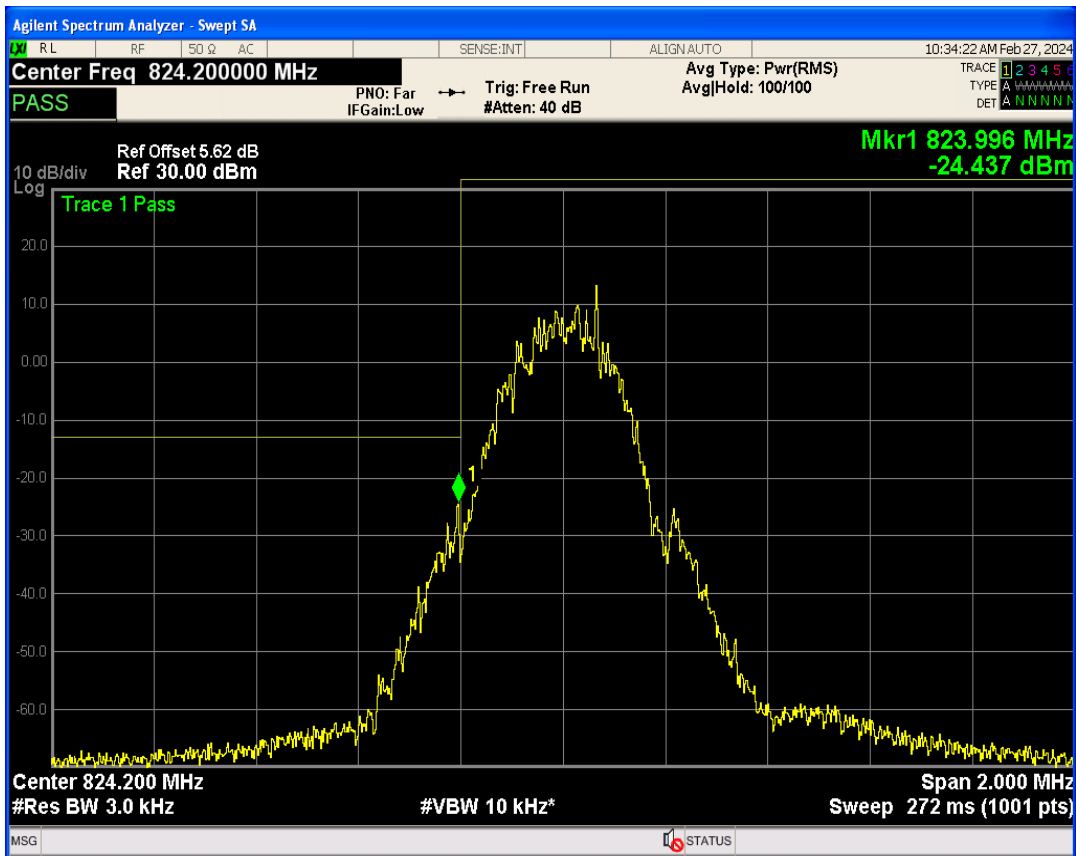


GSM850 Channel=251

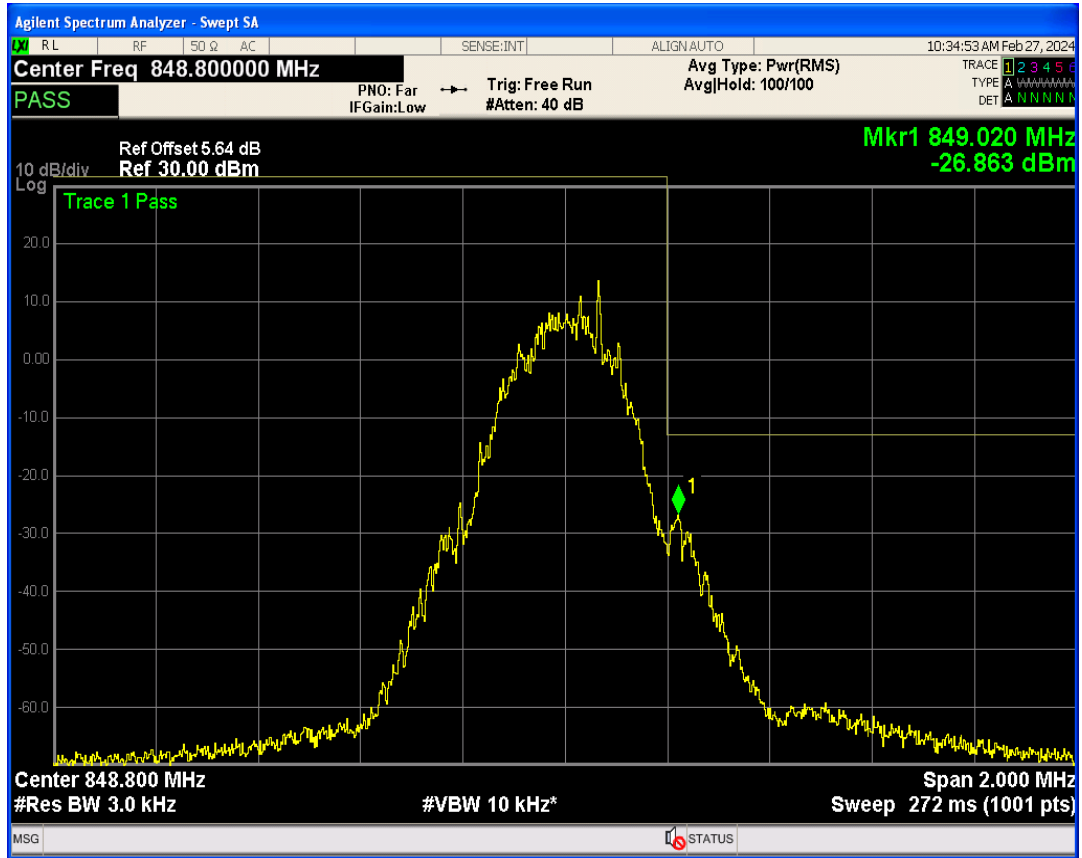


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	26016.26	-19.04	-13	PASS
GSM1900	661	1880	26008.98	-19.53	-13	PASS
GSM1900	810	1909.8	25988.47	-18.65	-13	PASS
GSM850	128	824.2	25973.25	-20.63	-13	PASS
GSM850	189	836.4	25555.68	-21.00	-13	PASS
GSM850	251	848.8	25977.22	-20.57	-13	PASS


GSM1900 Channel=512

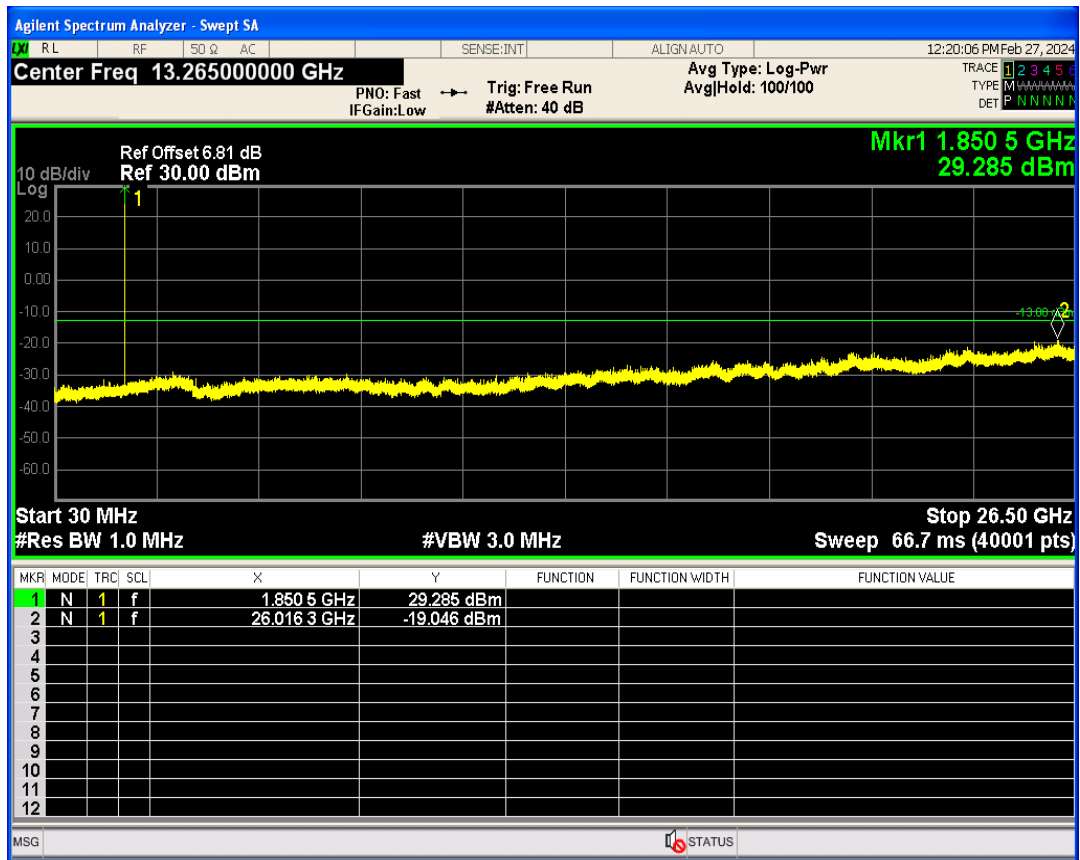


GSM1900 Channel=661

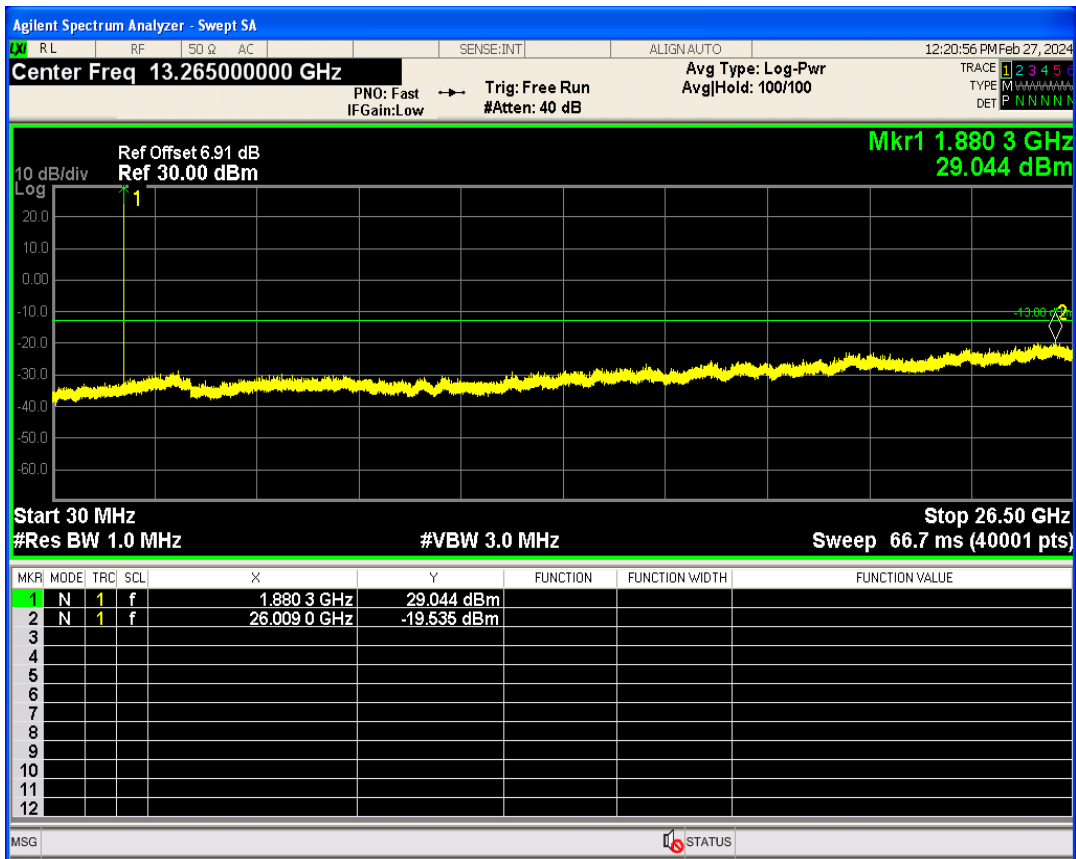


GSM1900 Channel=810

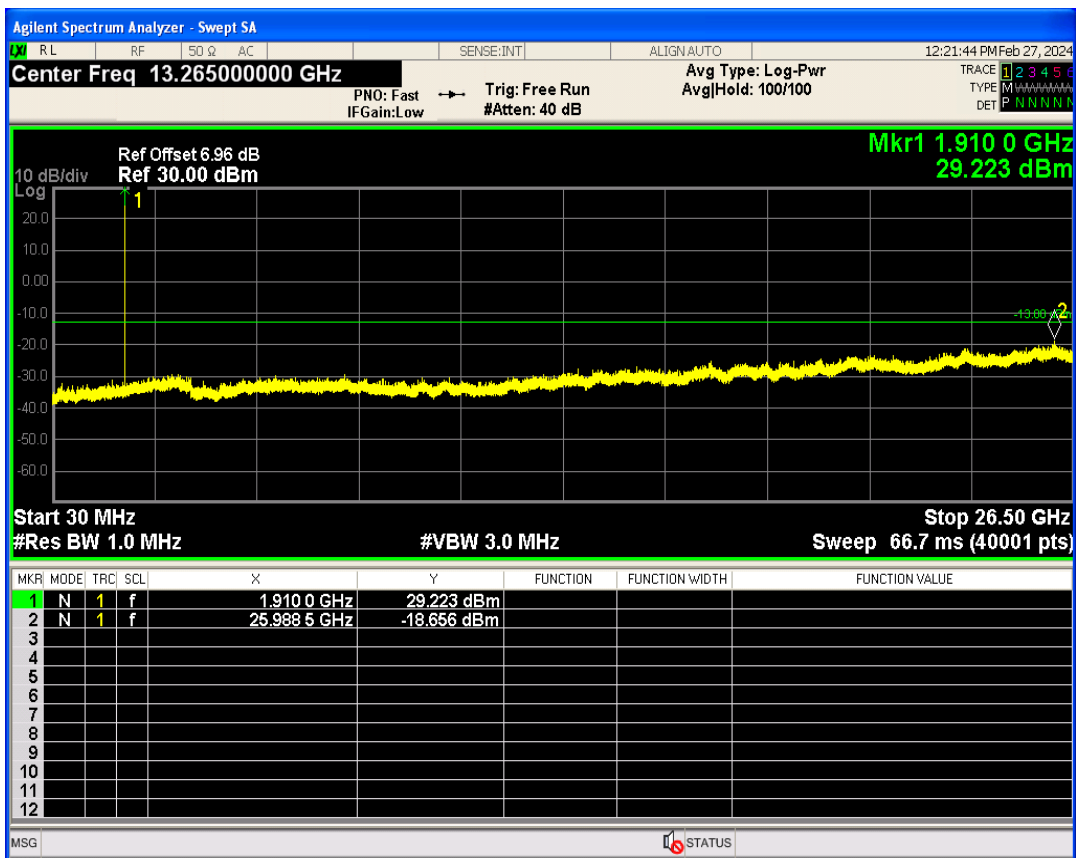

GSM850 Channel=128

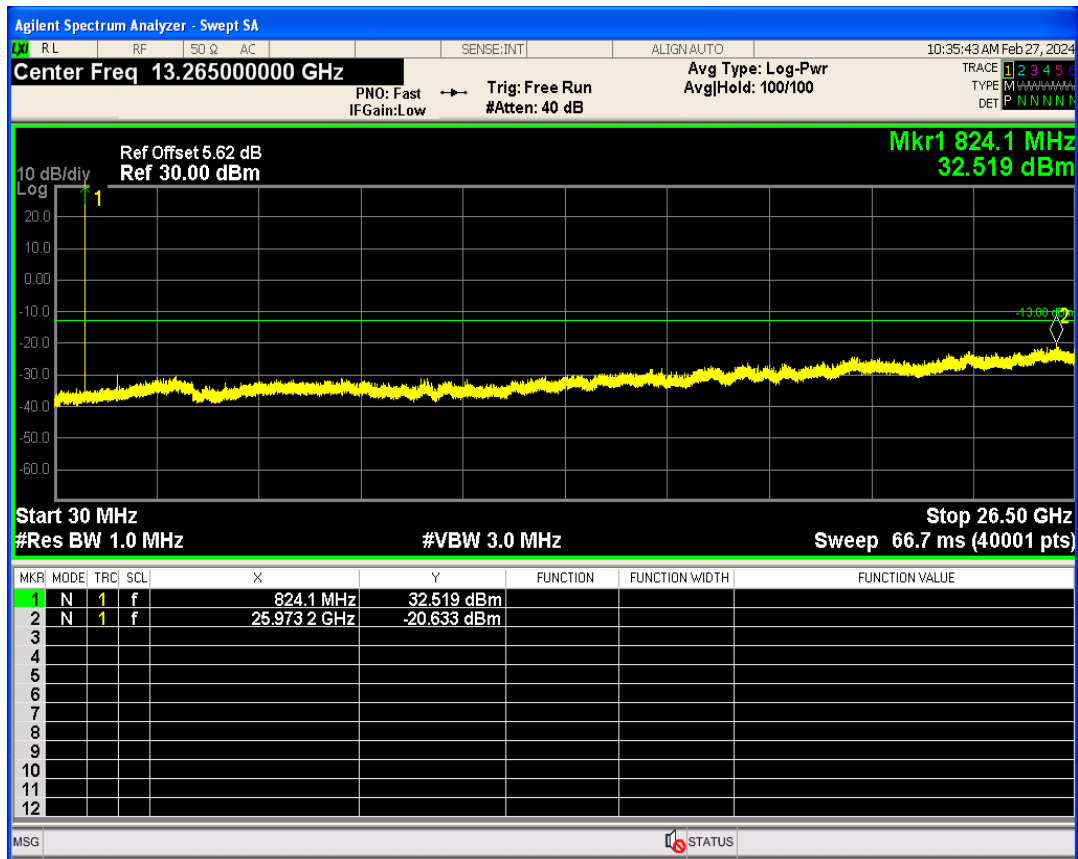

GSM850 Channel=189

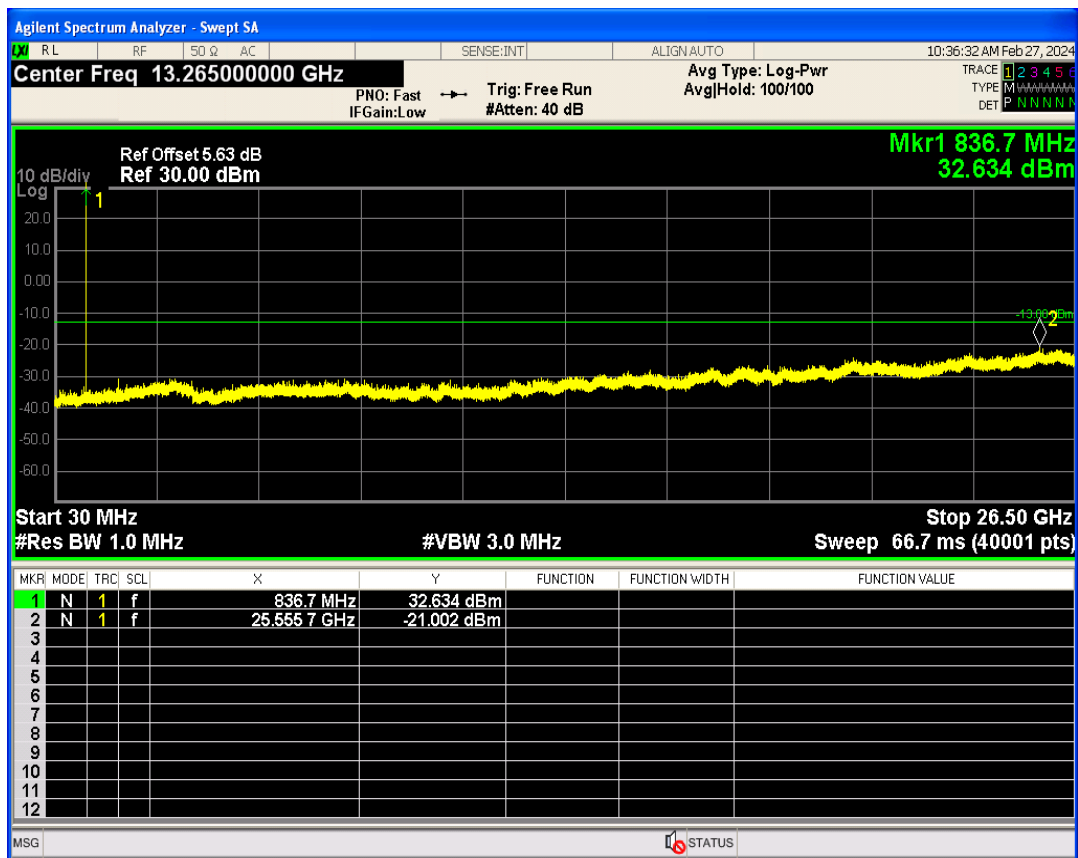

GSM850 Channel=251

