

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 1 of 93

**Applicant** : Shanghai BroadMobi Communication Technology Co., Ltd.  
**Address of Applicant** : 15F, Building 9, No.99 Tianzhou Rd.,Xuhui District, Shanghai, P.R.China

**Product Name** : LTE MIFI  
**Model No.** : R800A  
**Sample No.** : E20100021-03#01

**Standards** : FCC 47 CFR § 2.1093  
IEEE Std1528-2013  
ANSI C95.1-2005

**Date of Receipt** : 2020-11-07  
**Date of Test** : 2020-11-27 ~ 2020-12-03  
**Date of Issue** : 2020-12-18

**Remark:**

*This report details the results of the testing carried out on one sample, the results contained in this report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.*

Prepared by: Jennifer Zhou      Reviewed by: Oliver Xiang      Approved by: Guoyou Chi  
(Jennifer Zhou)                      (Oliver Xiang)                      (Authorized signatory: Guoyou Chi)

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 2 of 93

## Revision Record

Version	Date	Revisions	Revised By
1.0	2020-01-03	Original	--

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 3 of 93

## Contents

<b>1</b>	<b>GENERAL INFORMATION</b>	<b>5</b>
1.1	TESTING LABORATORY	5
1.2	DETAILS OF APPLICATION	5
1.3	DETAILS OF EUT	5
1.4	IDENTIFICATION OF AUXILIARY EQUIPMENT	6
1.5	THE HIGHEST REPORTED SAR VALUES	6
1.6	TEST METHODOLOGY	6
1.7	SAR LIMITS	7
<b>2</b>	<b>TEST ENVIRONMENT</b>	<b>9</b>
2.1	ENVIRONMENTAL CONDITIONS	9
2.2	EQUIPMENT LIST	9
2.3	MEASUREMENT UNCERTAINTY	10
<b>3</b>	<b>SAR MEASUREMENT SYSTEM</b>	<b>12</b>
3.1	DASY6 MEASUREMENT SERVER	13
3.2	DATA ACQUISITION ELECTRONICS	13
3.3	EX3DV4 E-FIELD PROBE	13
3.4	SAM PHANTOM	14
3.5	DEVICE HOLDER FOR SAM TWIN PHANTOM	14
<b>4</b>	<b>SAR MEASUREMENT PROCEDURES</b>	<b>16</b>
4.1	POWER REFERENCE MEASUREMENT	16
4.2	AREA SCAN PROCEDURES	16
4.3	ZOOM SCAN PROCEDURES	16
4.4	POWER DRIFT MEASUREMENT	17
4.5	POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM	17
4.6	DEFINITION FOR TOUCH AND TILT	18
4.7	DEFINITION FOR BODY-WORN ACCESSORY CONFIGURATIONS	20
4.8	DEFINITION FOR WIRELESS ROUTER CONFIGURATIONS	20
4.9	DIELECTRIC PROPERTY MEASUREMENTS	20
4.10	SAR SYSTEM VERIFICATION	22
<b>5</b>	<b>SAR MEASUREMENT PROCEDURE</b>	<b>24</b>
5.1	CONDUCTED POWER MEASUREMENT	24
5.2	GSM TEST CONFIGURATION	24
5.3	UMTS TEST CONFIGURATION	24
5.4	CDMA TEST CONFIGURATION	27
5.5	LTE TEST CONFIGURATION	28
5.6	WLAN TEST CONFIGURATION	28

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 4 of 93

5.7	MEASUREMENT VARIABILITY .....	32
5.8	MEASURED AND REPORTED SAR.....	33
<b>6</b>	<b>TEST RESULTS .....</b>	<b>34</b>
6.1	CONDUCTED POWER RESULTS.....	34
6.2	TRANSMIT ANTENNAS AND SAR MEASUREMENT POSITION.....	47
6.3	SAR TEST EXCLUSION CONSIDERATION TABLE .....	48
6.4	SAR MEASUREMENT RESULTS .....	51
6.5	SAR MEASUREMENT VARIABILITY.....	60
6.6	STANDALONE SAR TEST EXCLUSION CONSIDERATIONS AND ESTIMATED SAR .....	61
6.7	SIMULTANEOUS TRANSMISSION SAR CONSIDERATIONS.....	61
<b>7</b>	<b>APPENDIXES .....</b>	<b>63</b>
7.1	LIQUID DEPTH .....	63
7.2	SAMPLE AND SET-UP PHOTOS.....	63
7.3	SYSTEM VERIFICATION PLOTS.....	68
7.4	HIGHEST SAR TEST PLOTS.....	76

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 5 of 93

## 1 General Information

### 1.1 Testing Laboratory

Company Name	ICAS Testing Technology Services (Shanghai) Co., Ltd.
Address	No.1298 Pingan Rd, Minhang District, Shanghai, China
Telephone	0086 21-51682999
Fax	0086 21-54711112
Homepage	www.icasiso.com

### 1.2 Details of Application

Company Name	Shanghai BroadMobi Communication Technology Co., Ltd
Address	15F, Building 9, No.99 Tianzhou Rd.,Xuhui District, Shanghai, P.R.China
Contact Person	Yu rong
Telephone	60913308-857
Email	yurong@broadmobi.com

### 1.3 Details of EUT

Product Name	LTE MIFI
Brand Name	Broadmobi
Model No.	R800A
FCC ID	2AON8R800A
Serial Number	/
HW Version	V2.0
SW Version	1.0
Mode of Operation	GPRS/EDGE 850/1900; WCDMA/HSDPA/HSUPA Band II/IV/V; LTE FDD Band 2/4//5/7/12; LTE TDD Band 41/66 WLAN 802.11b/g/n(HT20/HT40) for 2.4GHz; WLAN 802.11a/n(HT20/HT40)/ac(VHT20/VHT40/VHT80) for 5.2GHz and 5.8GHz;
Duty Cycle	8.3 for GPRS/EDGE 1Tx Slot, 4.15 for GPRS/EDGE 2Tx Slot, 2.77 for GPRS/EDGE 3Tx Slot, 2.075 for GPRS/EDGE4Tx Slot;1 for WCDMA/CDMA/LTE FDD/WLAN; 0.633 for LTE TDD
Modulation Type	GMSK for GSM/GPRS and 8PSK for EGPRS; QPSK for WCDMA/CDMA;QPSK/16QAM for LTE; DSSS/OFDM for WLAN 2.4GHz and OFDM for WLAN 5.2GHz/5.8GHz;
Antenna Type	Internal antenna

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 6 of 93

<b>Antenna Gain</b>	GSM/WCDMA/CDMA/LTE:1.12dBi WLAN Antenna 0:1.29dBi WLAN Antenna0:1.41dBi
<b>Power Supply</b>	DC 3.8V by Lithium ion polymer battery
<b>Device Category</b>	Portable Device
<b>Exposure Category</b>	General Population/Uncontrolled Exposure
<b>EUT Type</b>	Production Unit
<b>Hotspot</b>	Supported

**Note(s):**

1. WCDMA, LTE, WLAN 2.4GHz support Hotspot.
2. The WLAN chipset have two antennas, and the two antennas can simultaneous transmit. Details please see clause 6.2.

## 1.4 Identification of Auxiliary Equipment

AEID	Description	Model	Manufacturer	Type
AE1	Battery	BM800	Shenzhen JETECH Energy Technology Co., Ltd	3000mAh(7.4Wh)

## 1.5 The Highest Reported SAR Values

Equipment Class	Reported 1g SAR (W/Kg)		
	Head	Body-Worn	Hotspot
PCE	--	--	1.226
DTS (Antenna 0)	--	--	0.024
DTS (Antenna 1)	--	--	0.052
NII (Antenna 0)	--	--	0.077
NII (Antenna 1)	--	--	0.180
<b>Simultaneous SAR</b>	1.483		

### Sum of the SAR for LTE + WLAN

Condition	Simultaneous Transmission Scenario (W/Kg)					Max $\Sigma$ 1-g SAR (W/Kg)	SPLSR (Yes/No)
	LTE	WLAN Antenna 0 DTS Band	WLAN Antenna 1 DTS Band	WLAN Antenna 0 UNII Band	WLAN Antenna 1 UNII Band		
Hotspot	1.226	0.024	0.052	0.077	0.180	1.483	No

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 7 of 93

## 1.6 Test Methodology

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE Std 1528-2013, the following FCC Published RF exposure KDB procedures, and TCB workshop updates:

<input checked="" type="checkbox"/>	KDB 248227 D01 802.11 WLAN SAR v02r02
<input checked="" type="checkbox"/>	KDB 447498 D01 General RF Exposure Guidance v06
<input type="checkbox"/>	KDB 447498 D02 SAR Procedures for Dongle Xmtr v02r01
<input type="checkbox"/>	KDB 615223 D01 802.16e WiMax SAR Guidance v01r01
<input type="checkbox"/>	KDB 616217 D04 SAR for laptop and tablets v01r02
<input type="checkbox"/>	KDB 643646 D01 SAR Test for PTT Radios v01r03
<input type="checkbox"/>	KDB 648474 D03 Wireless Chargers Battery Cover v01r04
<input type="checkbox"/>	KDB 648474 D04, Handset SAR v01r03
<input type="checkbox"/>	KDB 680106 D01 RF Exposure Wireless Charging Apps v02
<input checked="" type="checkbox"/>	KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
<input checked="" type="checkbox"/>	KDB 941225 D01 3G SAR Procedures v03r01
<input checked="" type="checkbox"/>	KDB 941225 D05 SAR for LTE Devices v02r05
<input checked="" type="checkbox"/>	KDB 941225 D06 Hot Spot SAR v02r01
<input checked="" type="checkbox"/>	KDB 941225 D07 UMPC Mini Tablet v01r02

### Note(s):

All test items were verified and recorded according to the standards and without any addition/deviation/exclusion during the test.

## 1.7 SAR Limits

The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1-1992, Copyright 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in §1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

- 1) The SAR limits for occupational/controlled exposure are 0.4 W/kg, as averaged over the whole body, and a peak spatial-average SAR of 8 W/kg, averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 8 of 93

cube). Exceptions are the parts of the human body treated as extremities, such as hands, wrists, feet, ankles, and pinnae, where the peak spatial-average SAR limit for occupational/controlled exposure is 20 W/kg, averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). Exposure may be averaged over a time period not to exceed 6 minutes to determine compliance with occupational/controlled SAR limits.

- 2) The SAR limits for general population/uncontrolled exposure are 0.08 W/kg, as averaged over the whole body, and a peak spatial-average SAR of 1.6 W/kg, averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the parts of the human body treated as extremities, such as hands, wrists, feet, ankles, and pinnae, where the peak spatial-average SAR limit is 4 W/kg, averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). Exposure may be averaged over a time period not to exceed 30 minutes to determine compliance with general population/uncontrolled SAR limits.

Exposure Limits	FCC 1g SAR Limit (W/Kg)	
	General Population/Uncontrolled Exposure	Occupational/Controlled Exposure
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1g of tissue)	1.6	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0



# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 9 of 93

## 2 Test Environment

### 2.1 Environmental conditions

Temperature (°C)	18-25
Humidity (%RH)	40-65
Barometric Pressure (mbar)	960-1060
Ambient noise & Reflection (W/kg)	< 0.012

### 2.2 Equipment List

#### Dielectric Property Measurements

Name of Equipment	Manufacturer	Model	Serial No.	Cal. Due Date
Network Analyzer	Anritsu	MS46121A	1618412	2020-09-20
Material Measurement Probe System	Poseidon	MMP	/	N/A

#### System Check

Name of Equipment	Manufacturer	Model	Serial No.	Cal. Due Date
Signal Generator	Agilent	SMB 100	114400	2021-06-08
Power Meter	Agilent	NRP2	106036	2021-06-08
Power Sensor	Agilent	NRP8S	103592	2021-06-08
Amplifier	Mini-Circuits	ZVE-8G+	S0N560400742	2021-07-16
Amplifier	Mini-Circuits	ZHL-42+	SN784901545	2021-07-16
DC Power Supply	ACPOWER	ADC-0800025-15	D215010003	2021-03-19
E-Field Probe	SPEAG	EX3DV4	7475	2021-10-28
Data Acquisition Electronics	SPEAG	DAE4	787	2021-09-29
Dipole	SPEAG	D2450V2	723	2023-02-16
Dipole	SPEAG	D2600V2	1142	2023-02-16
Dipole	SPEAG	D5GHzV2	1061	2023-02-16
Dipole	SPEAG	D1900V2	5d092	2023-02-17
Dipole	SPEAG	D2100V2	1053	2023-02-17
Dipole	SPEAG	D2300V2	1040	2023-02-17
Dipole	SPEAG	D900V2	1d055	2023-02-18
Dipole	SPEAG	D1800V2	2d148	2023-02-18
Dipole	SPEAG	D750V3	1055	2023-02-19

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 10 of 93

Dipole	SPEAG	D835V2	4d061	2023-02-19
--------	-------	--------	-------	------------

**Other**

Name of Equipment	Manufacturer	Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMW500	150835	2021-08-18
Robot	SPEAG	TX90 XL	F07/564YA1/A/01	N/A
Phantom	SPEAG	SAM	TP-1641	N/A
Phantom	SPEAG	SAM	TP-1642	N/A

## 2.3 Measurement Uncertainty

Source of Uncertainty	Tol. (±%)	Prob. Dist.	Div.	c <sub>i</sub> (1 g)	c <sub>i</sub> (10 g)	1 g u <sub>i</sub> (±%)	10 g u <sub>i</sub> (±%)	v <sub>i</sub>
<b>Measurement System</b>								
Probe Calibration (k=1)	4.7	N	1	1	1	4.7	4.7	∞
Axial isotropy	1.2	R	√3	1	1	0.69	0.69	∞
Hemispherical isotropy	3.2	R	√3	1	1	1.85	1.85	∞
Boundary Effect	7.4	R	√3	1	1	4.27	4.27	∞
Linearity	0.9	R	√3	1	1	0.52	0.52	∞
System Detection Limit	1	R	√3	1	1	0.6	0.6	∞
Readout Electronics	0.3	N	1	1	1	0.3	0.3	∞
Response Time	0	R	√3	1	1	0	0	∞
Integration Time	0	R	√3	1	1	0	0	∞
RF Ambient Condition - Noise	1	R	√3	1	1	0.6	0.6	∞
RF Ambient Condition - Reflections	1	R	√3	1	1	0.6	0.6	∞
Probe Positioner Mechanical Tolerance	0.8	R	√3	1	1	0.5	0.5	∞
Probe Positioning with respect to Phantom Shell	9.9	R	√3	1	1	5.7	5.7	∞
Extrapolation, Interpolation, and Integration Algorithms for Max. SAR Evaluation	4	R	√3	1	1	2.3	2.3	∞
<b>Test Sample Related</b>								
Test Sample Positioning	2.9	N	1	1	1	2.9	2.9	8
Device Holder Uncertainty	3.5	N	1	1	1	3.5	3.5	∞
Drift of Output Power	5	R	√3	1	1	2.9	2.9	∞
SAR scaling	2.18	R	√3	1	1	1.26	1.26	∞

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 11 of 93

<b>Phantom and Setup</b>								
Phantom Uncertainty (shape & thickness tolerance)	4	R	$\sqrt{3}$	1	1	2.3	2.3	$\infty$
Uncertainty in SAR correction for deviations in permittivity and conductivity	1.2	N	1	1	0.84	1.2	1.01	$\infty$
Liquid Conductivity (target)	5	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	$\infty$
Liquid Conductivity (meas.)	2.93	N	1	0.64	0.43	1.88	1.26	9
Liquid Permittivity (target)	5	R	$\sqrt{3}$	0.6	0.49	1.73	1.41	$\infty$
Liquid Permittivity (meas.)	5.9	N	1	0.6	0.49	3.54	2.89	9
Combined Uncertainty		RSS	$u_c = \sqrt{\sum_{i=1}^n u_i^2 \cdot s_i^2}$			11.37	11.12	
Combined Uncertainty (coverage factor=2)		k=2	$u_e = 2u_c$			22.73	22.24	

# TEST REPORT


Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 12 of 93

## 3 SAR Measurement System

The DASY5 system for performing compliance tests consists of the following items:

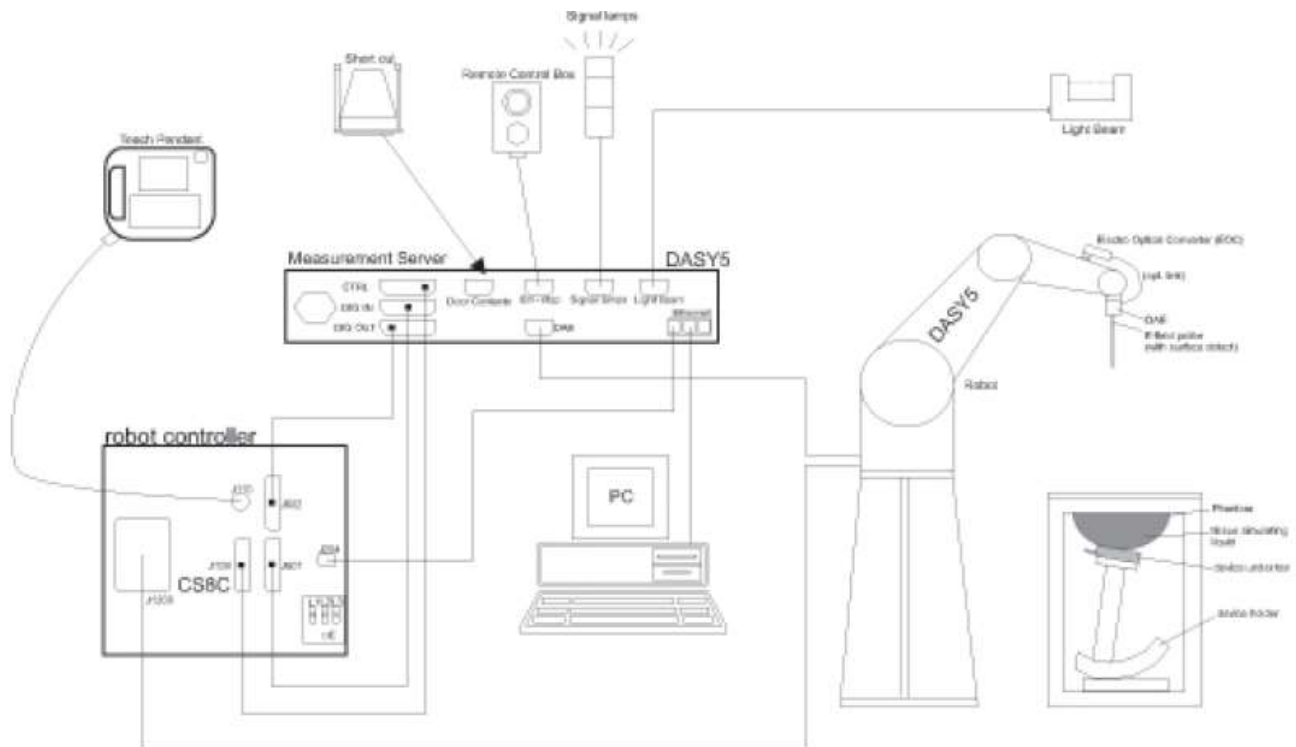

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 13 of 93

## 3.1 DASY6 Measurement Server

The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz intel ULV Celeron, 128MB chip-disk and 128MB RAM. The necessary circuits for communication with the DAE4 electronics box, as well as the 16 bit AD converter system for optical detection and digital I/O inter face are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.



## 3.2 Data Acquisition Electronics

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock. The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.



The input impedance of both the DAE4 as well as of the DAE3 box is 200M $\Omega$ ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

## 3.3 EX3DV4 E-Field Probe

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	10 MHz to > 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)



# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 14 of 93

Directivity	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

## 3.4 SAM Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6 mm). The phantom has three measurement areas:

- Left hand
- Right hand
- Flat phantom

The phantom table for the DASY systems based on the TX90XL and RX160L robots have the size of 100 x 50 x 85 cm (L x W x H). These tables are reinforced for mounting of the robot onto the table. For easy dislocation these tables have fork lift cut outs at the bottom. The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different liquids)

A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

## 3.5 Device Holder for SAM Twin Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of  $\pm 0.5$ mm would produce a SAR uncertainty of  $\pm 20\%$ . Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for



# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 15 of 93

device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity =3 and loss tangent =0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 16 of 93

## 4 SAR Measurement Procedures

### 4.1 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2 mm / 4 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties.

### 4.2 Area Scan Procedures

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged. After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° $\pm$ 1°	20° $\pm$ 1°
Maximum area scan spatial resolution: $\Delta X_{Area}$ , $\Delta Y_{Area}$	$\leq 2$ GHz: $\leq 15$ mm 2 – 3 GHz: $\leq 12$ mm	3 – 4 GHz: $\leq 12$ mm 4 – 6 GHz: $\leq 10$ mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

### 4.3 Zoom Scan Procedures

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.



# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 17 of 93

Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm
$\Delta z_{Zoom}(n>1)$ : between subsequent points		$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm
<p>Note: <math>\delta</math> is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.</p> <p>* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is <math>\leq 1.4</math> W/kg, <math>\leq 8</math> mm, <math>\leq 7</math> mm and <math>\leq 5</math> mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p>			

## 4.4 Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Power Reference Measurement.

## 4.5 Position of the wireless device in relation to the phantom

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (see Figure 1). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

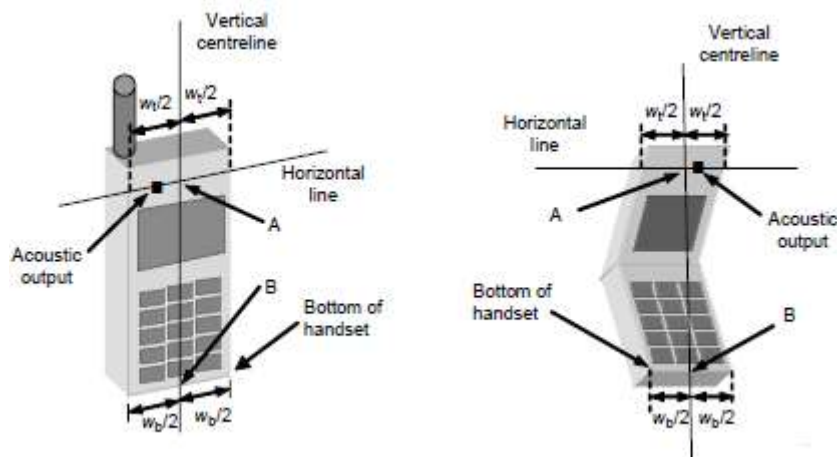


Figure 1 Handset Vertical Center & Horizontal Line Reference Points

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 18 of 93

## 4.6 Definition for Touch and Tilt

The cheek position is established in points a) to i) as follows.

- a) Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the device can also be used with the cover closed, both configurations shall be tested.
- b) Define two imaginary lines on the handset, the vertical centreline and the horizontal line, for the handset in vertical orientation as shown in Figures 1. The vertical centreline passes through two points on the front side of the handset: the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figures 1), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centreline and passes through the centre of the acoustic output (see Figures 1). The two lines intersect at point A. Note that for many handsets, point A coincides with the centre of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the handset (see Figure 1), especially for clam-shell handsets, handsets with flip cover pieces, and other irregularly shaped handsets.
- c) Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 2). The plane defined by the vertical centreline and the horizontal line of the device must be parallel to the sagittal plane of the phantom.
- d) Translate the handset towards the phantom along the line passing through RE and LE until the handset touches the ear.
- e) Rotate the handset around the (virtual) LE-RE Line until the DUT vertical centreline is in the reference plane.
- f) Rotate the device around its vertical centreline until the plane defined by the DUT vertical centreline and horizontal line is parallel to the N-F Line, then translate the handset towards the phantom along the LE-RE line until DUT point A touches the ear at the ERP.
- g) While keeping point A on the line passing through RE and LE and maintaining the handset in contact with the pinna, rotate the handset about the line N-F until any point on the handset is in contact with a phantom point below the pinna (cheek) (see Figure 2). The physical angles of rotation shall be documented. While keeping DUT point A in contact with the ERP, rotate the handset around a line perpendicular to the plane defined by the DUT vertical centreline and horizontal line and passing through DUT point A, until the DUT vertical centreline is in the reference plane.
- h) Verify that the cheek position is correct as follows:
  - the N-F line is in the plane defined by the DUT vertical centreline and horizontal line,
  - DUT point A touches the pinna at the ERP, and
- the DUT vertical centreline is in the reference plane.

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 19 of 93

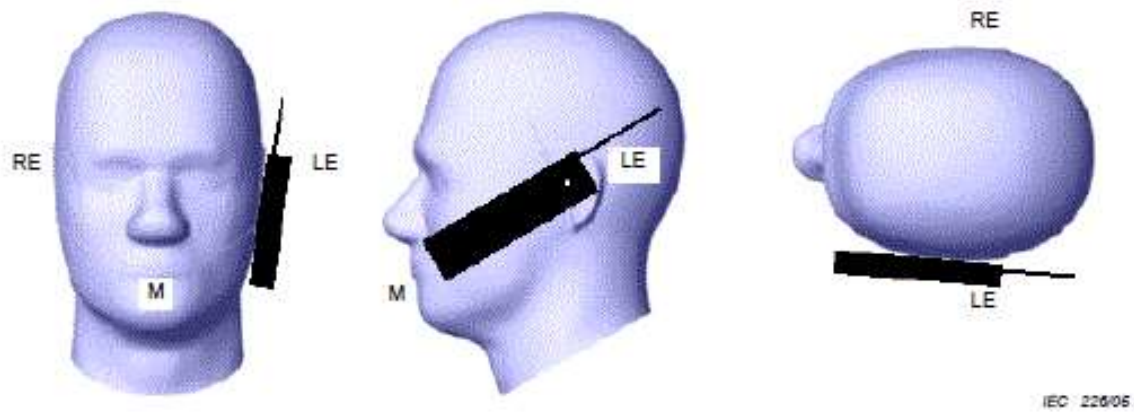


Figure 2 Cheek position of the wireless device on the left side of SAM

The tilt position is established in points a) to d) as follows.

- Repeat steps a) to i) of above section to place the device in the cheek position (see Figure 2).
- While maintaining the orientation of the device, retract the device parallel to the reference plane far enough away from the phantom to enable a rotation of the device by  $15^\circ$ .
- Rotate the device around the horizontal line by  $15^\circ$  (see Figure 3).
- While maintaining the orientation of the handset, move the handset towards the phantom on a line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, e.g., the antenna with the back of the phantom head, the angle of the handset shall be reduced. In this case, the tilt position is obtained if any part of the handset is in contact with the pinna as well as a second part of the handset is in contact with the phantom, e.g., the antenna with the back of the head.



Figure 3 Tilt position of the wireless device on the left side of SAM

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 20 of 93

## 4.7 Definition for Body-Worn Accessory Configurations

Body-Worn operation configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. A device with a headset output is tested with a headset connected to the device.

Accessories for Body-Worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are supplied with the device, the device is tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-Worn accessories may not always be supplied of available as options for some devices intended to be authorized for Body-Worn use. In this case, a test configuration where a separation distances between the back of the device and the flat phantom is used. Test position spacing was documented.

## 4.8 Definition for Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WLAN simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the Body-Worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some Body-Worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WLAN transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WLAN transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

## 4.9 Dielectric Property Measurements

The dielectric properties for this simulant fluid were measured by using the Dielectric Probe in conjunction with Network Analyzer(300 kHz - 6 GHz) by using a procedure detailed in KDB 865664 D01v01r04.

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 21 of 93

## Dielectric properties of the tissue-equivalent liquid

Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

( $\epsilon_r$  = relative permittivity,  $\sigma$  = conductivity and  $\rho = 1000 \text{ kg/m}^3$ )

## Dielectric Property Measurements Results

Frequency	Target Tissue		Measured Tissue		Limit ( $\pm 5\%$ Dev.)		Temp ( $^{\circ}\text{C}$ )	Test Date
	$\epsilon_r$	$\sigma$ (s/m)	$\epsilon_r$	$\sigma$ (s/m)	$\epsilon_r$	$\sigma$ (s/m)		
<b>750 Head</b>	41.90	0.89	41.522	0.923	-0.90%	3.71%	21.5	2020-11-27
<b>835 Head</b>	41.50	0.90	41.461	0.931	-0.09%	3.44%	21.5	2020-11-27
<b>1800 Head</b>	40.00	1.40	38.926	1.364	-2.69%	-2.57%	21.5	2020-11-28
<b>1900 Head</b>	40.00	1.40	39.291	1.423	-1.77%	1.64%	21.5	2020-11-29
<b>2450 Head</b>	39.20	1.80	40.325	1.872	2.87%	4.00%	21.5	2020-11-30
<b>2600 Head</b>	39.00	1.96	39.325	1.931	0.83%	-1.48%	21.5	2020-12-01
<b>5200 Head</b>	36.00	4.66	34.532	4.835	-4.08%	3.76%	21.5	2020-12-03
<b>5800 Head</b>	35.30	5.27	34.169	5.226	-3.20%	-0.83%	21.5	2020-12-03

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 22 of 93

## 4.10 SAR System Verification

The purpose of the system check is to verify that the system operates within its specifications at the device test frequency. The system check is simple check of repeatability to make sure that the system works correctly at the time of the compliance test.

A system check measurement was made following the determination of the dielectric parameters of the simulates, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ( $\pm 10\%$ ).

System check is performed regularly on all frequency bands where tests are performed with the DASY6 system.

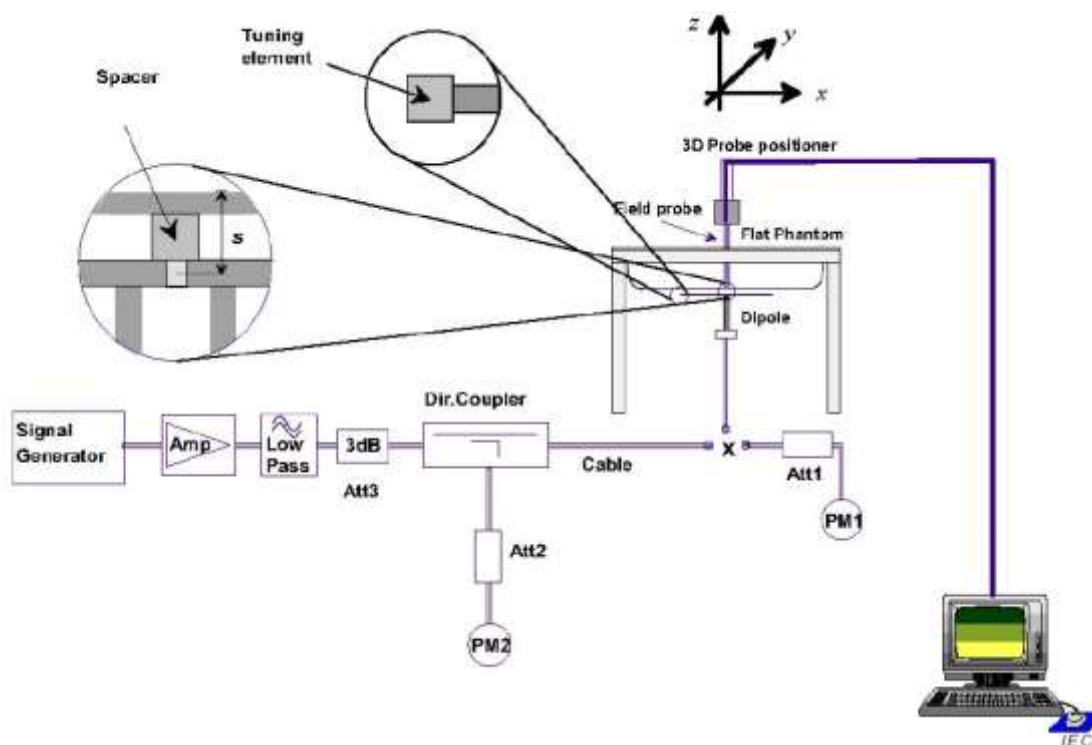


Figure 4 System Check Set-up

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 23 of 93

## System Verification Results

Frequency & Tissue Type	1W Target (W/Kg)		250mW Measured (W/Kg)		1W Normalized (W/Kg)		Temp (°C)	1g Limit (±10% Dev.)	Test Date
	1g SAR	10g SAR	1g SAR	10g SAR	1g SAR	10g SAR			
750 Head	8.55	5.64	2.09	1.35	8.36	5.40	21.5	-2.22%	2020-11-27
835 Head	9.47	6.19	2.33	1.48	9.32	5.92	21.5	-1.58%	2020-11-27
1800 Head	39.30	20.40	9.32	4.77	37.28	19.08	21.5	-5.14%	2020-11-28
1900 Head	39.90	20.40	10.40	5.27	41.60	21.08	21.5	4.26%	2020-11-29
2450 Head	51.90	23.80	13.40	6.10	53.60	24.40	21.5	3.28%	2020-11-30
2600 Head	55.60	24.50	13.80	6.12	55.20	24.48	21.5	-0.72%	2020-12-01

Frequency & Tissue Type	1W Target (W/Kg)		100mW Measured (W/Kg)		1W Normalized (W/Kg)		Temp (°C)	1g Limit (±10% Dev.)	Test Date
	1g SAR	10g SAR	1g SAR	10g SAR	1g SAR	10g SAR			
5200 Head	73.90	20.70	7.56	2.15	75.60	21.50	21.5	2.30%	2020-12-03
5800 Head	76.90	21.40	8.26	2.29	82.60	22.90	21.5	7.41%	2020-12-03

**Note(s):**

1. Target Values used from the calibration certificate by SPEAG and CTTL in collaboration with SPEAG.

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 24 of 93

## 5 SAR Measurement Procedure

### 5.1 Conducted Power Measurement

Conducted power measurements were performed using a base station simulator under digital average power. The handset was placed into a simulated call using a base station simulator in shielded chamber. SAR measurements were taken with a fully charged battery. In order to verify that the device was tested and maintained at full power, this was configured with the base station simulator. The SAR measurement Software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5 % occurred, the tests were repeated.

### 5.2 GSM Test Configuration

SAR test for GSM band, a communication link is set up with a System Simulator (SS) by air link. The power level is set to "5" for GSM 850, set to "0" for GSM 1900. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 5. The EDGE class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 5.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. GSM voice and GPRS data use GMSK, which is a constant amplitude modulation with minimal peak to average power difference within the time-slot burst. For EDGE, GMSK is used for MCS 1 – MCS 4 and 8-PSK is used for MCS 5 – MCS 9; where 8-PSK has an inherently higher peak-to-average power ratio. The GMSK and 8-PSK EDGE configurations are considered separately for SAR compliance. The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance. The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode.

### 5.3 UMTS Test Configuration

#### Output power Verification

Maximum output power is verified on the High, Middle and Low channel according to the procedures described in section 5.2 of 3GPP TS 34. 121, using the appropriate RMC or AMR with TPC(transmit power control) set to all up bits for WCDMA/HSDPA or applying the required inner loop power control procedures to the maximum output power while HSUPA is active. Results for all applicable physical channel configuration (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) should be tabulated in the SAR report. All configuration that are not supported by the DUT or can not be measured due to technical or equipment limitations should be clearly identified

#### Head SAR

SAR for head exposure configurations in voice mode is measured using a 12.2kbps RMC with TPC bits configured to all up bits. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2kbps AMR is less than 1/4 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2kbps AMR with a 3.4 kbps SRB( Signaling radio bearer) using the exposure



# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 25 of 93

configuration that results in the highest SAR in 12.2kbps RMC for that RF channel.

## Body-Worn Accessory SAR

SAR for body exposure configurations in voice and data modes is measured using 12.2kbps RMC with TPC bits configured to all up bits. SAR for other spreading codes and multiple DPDCHn, when supported by the DUT, are not required when the maximum average output of each RF channel, for each spreading code and DPDCHn configuration, are less than 1/4 dB higher than those measured in 12.2kbps RMC. Otherwise, SAR is measured on the maximum output channel with an applicable RMC configuration for the corresponding spreading code or DPDCHn using the exposure configuration that results in the highest SAR with 12.2 kbps RMC. When more than 2 DPDCHn are supported by the DUT, it may be necessary to configure additional DPDCHn for a DUT using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

## HSDPA Test Configuration

SAR for body exposure configurations is measured according to the 'Body SAR Measurements' procedures of that section. In addition, body SAR is also measured for HSDPA when the maximum average output of each RF channel with HSDPA active is at least ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/ HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors ( $\beta_c$ ,  $\beta_d$ ), and HS-DPCCH power offset parameters ( $\Delta_{ACK}$ ,  $\Delta_{NACK}$ ,  $\Delta_{CQI}$ ) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}^{(1)}$	CM (dB) <sup>(2)</sup>
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	12/15 <sup>(3)</sup>	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$   
 Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ .  
 Note 3: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

## HSUPA Test Configuration

Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least ¼ dB higher than that measured without HSPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA.

Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E- DCH configurations for HSPA should be

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 26 of 93

configured according to the  $\beta$  values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of 3 G device.

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}^{(1)}$	$\beta_{ec}$	$\beta_{ed}$	$\beta_{ed}$ (SF)	$\beta_{ed}$ (codes)	CM <sup>(2)</sup> (dB)	MPR (dB)	AG <sup>(4)</sup> Index	E-TFCI
1	11/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	11/15 <sup>(3)</sup>	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed}^{(3)}$ : 47/15 $\beta_{ed}^{(4)}$ : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64	15/15 <sup>(4)</sup>	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{in} = \beta_{in}/\beta_c = 30/15 \Leftrightarrow \beta_{in} = 30/15 * \beta_c$   
 Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{in}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.  
 Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .  
 Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .  
 Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.  
 Note 6:  $\beta_{ed}$  cannot be set directly; it is set by Absolute Grant Value.

## HSPA, HSPA+ and DC-HSDPA Test Configuration

SAR test exclusion for HSPA, HSPA+ and DC-HSDPA is determined according to the following:

- a) The HSPA procedures are applied to configure 3GPP Rel. 6 HSPA devices in the required sub-test mode(s) to determine SAR test exclusion.
- b) SAR is required for Rel. 7 HSPA+ when SAR is required for Rel. 6 HSPA; otherwise, the 3G SAR test reduction procedure is applied to (uplink) HSPA+ with 12.2 kbps RMC as the primary mode. Power is measured for HSPA+ that supports uplink 16 QAM according to configurations in Table C.11.1.4 of 3GPP TS 34.121-1 to determine SAR test reduction.
- c) SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.
- d) Regardless of whether a PAG is required, the following information must be verified and included in the SAR report for devices supporting HSPA, HSPA+ or DC-HSDPA:
  - 1) The output power measurement results and applicable release version(s) of 3GPP TS 34.121.
    - i) Power measurement difficulties due to test equipment setup or availability must be resolved between the grantee and its test lab.
  - 2) The power measurement results are in agreement with the individual device implementation and specifications. When Enhanced MPR (E-MPR) applies, the normal MPR targets may be modified according to the Cubic Metric (CM) measured by the device, which must be taken into consideration.
  - 3) The UE category, operating parameters, such as the  $\beta$  and  $\Delta$  values used to configure the device for testing, power setback procedures described in 3GPP TS 34.121 for the power measurements, and HSPA/HSPA+

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 27 of 93

channel conditions (active and stable) for the entire duration of the measurement according to the required E-TFCI and AG index values.

- e) When SAR measurement is required, the test configurations, procedures and power measurement results must be clearly described to confirm that the required test parameters are used, including E-TFCI and AG index stability and output power conditions.

## 5.4 CDMA Test Configuration

### Output power Verification

Maximum output power is verified on the high, middle and low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. Results for at least steps 3, 4 and 10 of the power measurement procedures are required in the SAR report. Steps 3 and 4 are measured using Loopback Service Option SO55 with power control bits in "All Up" condition. TDSO/SO32 may be used instead of SO55 for step 4. Step 10 is measured using TDSO/SO32 with power control bits in the "Bits Hold" condition (i.e. alternative Up/Down Bits). All power measurements defined in C.S0011/TIA-98-E that are inapplicable to the handset or cannot be measured due to technical or equipment limitations must be clearly identified in the test report.

### Head SAR

SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55. The 3G SAR test reduction procedure is applied to RC1 with RC3 as the primary mode; otherwise, SAR is required for the channel with maximum measured output in RC1 using the head exposure configuration that results in the highest reported SAR in RC3.

### Body-Worn Accessory SAR

Body-Worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The Body-Worn accessory procedures in KDB Publication 447498 D01 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCHn), with FCH only as the primary mode. Otherwise, SAR is required for multiple code channel configuration (FCH + SCHn), with FCH at full rate and SCH0 enabled at 9600 bps, using the highest reported SAR configuration for FCH only. When multiple code channels are enabled, the transmitter output can shift by more than 0.5 dB and may lead to higher SAR drifts and SCH dropouts.

The 3G SAR test reduction procedure is applied to Body-Worn accessory SAR in RC1 with RC3 as the primary mode. Otherwise, SAR is required for RC1, with SO55 and full rate, using the highest reported SAR configuration for Body-Worn accessory exposure in RC3.

### 1x Ev-Do Test Configuration

For handsets with Ev-Do capabilities, the 3G SAR test reduction procedure is applied to Ev-Do Rev. 0 with 1x RTT RC3 as the primary mode to determine Body-Worn accessory test requirements. Otherwise, Body-Worn accessory SAR is required for Rev. 0, at 153.6 kbps, using the highest reported SAR configuration for Body-Worn accessory exposure in RC3.

The 3G SAR test reduction procedure is applied separately to Rev. A and Rev. B, with Rev. 0 as the primary mode to determine Body-Worn accessory SAR test requirements. When SAR is not required for Rev. 0, the 3G SAR test reduction is applied with 1x RTT RC3 as the primary mode. Otherwise, SAR is required for Rev. A or Rev. B, with a

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 28 of 93

Reverse Data Channel payload size of 4096 bits and a Termination Target of 16 slots defined for Subtype 2 and 3 Physical Layer configurations, using the highest reported SAR configuration for Body-Worn accessory exposure in Rev. 0 or RC3, as appropriate.

A Forward Traffic Channel data rate corresponding to the 2-slot version of 307.2 kbps with ACK Channel transmitting in all slots is configured in the downlink for Rev. 0, Rev. A and Rev. B.

## 5.5 LTE Test Configuration

### QPSK with 1 RB allocation

Start with the largest channel bandwidth then measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle, and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.

### QPSK with 50% RB allocation

The procedures required for 1 RB allocation in above section are applied to measure the SAR for QPSK with 50% RB allocation.

### QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations, and the highest reported SAR for 1 RB and 50% RB allocation in above two sections are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

### Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in above sections to determine the channels and RB configurations that need SAR testing, then only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is  $> \frac{1}{2}$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration, or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation, etc., is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth. For example, 50 RB in 10 MHz channel bandwidth does not apply to 5 MHz channel bandwidth; therefore, this cannot be tested in the smaller channel bandwidth. However, 50% RB allocation in 10 MHz channel bandwidth is equivalent to 100% RB allocation in 5 MHz channel bandwidth; therefore, these are the equivalent configurations to be compared to determine the specific channel and configuration in the smaller channel bandwidth that need SAR testing.

## 5.6 WLAN Test Configuration

The SAR measurement and test reduction procedures are structured according to either the DSSS or OFDM transmission mode configurations used in each standalone frequency band and aggregated band. For devices that

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 29 of 93

operate in exposure configurations that require multiple test positions, additional SAR test reduction may be applied. The maximum output power specified for production units, including tune-up tolerance, are used to determine initial SAR test requirements for the 802.11 transmission modes in a frequency band. SAR is measured using the highest measured maximum output power channel for the initial test configuration. SAR measurement and test reduction for the remaining 802.11 modes and test channels are determined according to measured or specified maximum output power and reported SAR of the initial measurements. The general test reduction and SAR measurement approaches are summarized in the following:

- 1) The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. Channels with measured maximum output power within  $\frac{1}{4}$  dB are considered to have the same maximum output.
- 2) For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, an “initial test configuration” is first determined for each standalone and aggregated frequency band according to the maximum output power and tune-up tolerance specified for production units.
  - a. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.
  - b. SAR is measured for OFDM configurations using the initial test configuration procedures. Additional frequency band specific SAR test reduction may be considered for individual frequency bands
  - c. Depending on the reported SAR of the highest maximum output power channel tested in the initial test configuration, SAR test reduction may apply to subsequent highest output channels in the initial test configuration to reduce the number of SAR measurements.
- 3) The Initial test configuration does not apply to DSSS. The 2.4 GHz band SAR test requirements and 802.11b DSSS procedures are used to establish the transmission configurations required for SAR measurement.
- 4) An “initial test position” is applied to further reduce the number of SAR tests for devices operating in next to the ear, UMPC mini-tablet or hotspot mode exposure configurations that require multiple test positions .
  - a. SAR is measured for 802.11b according to the 2.4 GHz DSSS procedure using the exposure condition established by the initial test position.
  - b. SAR is measured for 2.4 GHz and 5 GHz OFDM configurations using the initial test configuration. 802.11b/g/n operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g/n modes are tested on the maximum average output channel.
- 5) The Initial test position does not apply to devices that require a fixed exposure test position. SAR is measured in a fixed exposure test position for these devices in 802.11b according to the 2.4 GHz DSSS procedure or in 2.4 GHz and 5 GHz OFDM configurations using the initial test configuration procedures .
- 6) The “subsequent test configuration” procedures are applied to determine if additional SAR measurements are required for the remaining OFDM transmission modes that have not been tested in the initial test configuration. SAR test exclusion is determined according to reported SAR in the initial test configuration and maximum output power

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 30 of 93

specified or measured for these other OFDM configurations.

## 2.4 GHz and 5GHz SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in section 5.2.2.

### 1. 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- a. When the reported SAR of the highest measured maximum output power channel (section 3.1) for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- b. When the reported SAR is  $> 0.8$  W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

### 2. 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3). SAR is not required for the following 2.4 GHz OFDM conditions.

- a. When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration
- b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

### 3. SAR Test Requirements for OFDM Configurations

When SAR measurement is required for 802.11 a/g/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements.<sup>20</sup> In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

### 4. OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures (section 4)

When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- a. The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 31 of 93

b. If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.

c. If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.

d. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.

a. Channels with measured maximum output power within  $\frac{1}{4}$  dB of each other are considered to have the same maximum output.

b. When there are multiple test channels with the same measured maximum output power, the channel closest to mid-band frequency is selected for SAR measurement.

c. When there are multiple test channels with the same measured maximum output power and equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement. Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2). SAR test reduction of subsequent highest output test channels is based on the reported SAR of the initial test configuration. For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode.<sup>23</sup> For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration. When the reported SAR of the initial test configuration is  $> 0.8$  W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.

## 5. Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations.

When the same maximum output power is specified for multiple transmission modes, the procedures in section 5.3.2 are applied to determine the test configuration. Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

a. When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 32 of 93

transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.

b. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for that subsequent test configuration.

c. The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.

1). SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.

2). SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is  $> 1.2$  W/kg or until all required channels are tested.

a) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.

d. SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:

1) replace "subsequent test configuration" with "next subsequent test configuration" (i.e., subsequent next highest specified maximum output power configuration)

2) replace "initial test configuration" with "all tested higher output power configurations."

## 5.7 Measurement Variability

Per FCC KDB Publication 865664 D01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg (~ 10% from the



# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 33 of 93

1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

## 5.8 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. Test highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 34 of 93

## 6 Test Results

### 6.1 Conducted Power Results

#### Conducted Power Measurement Results for GSM/GPRS/EDGE

GSM 850		Burst Conducted Power (dBm)			/	Average Power (dBm)		
		Channel				Channel		
		Low	Mid	High		Low	Mid	High
GPRS	1 TX slot	28.36	28.58	28.25	<b>-9.03 dB</b>	19.33	19.55	19.22
	2 TX slot	27.76	28.01	27.69	<b>-6.02 dB</b>	21.74	21.99	21.67
	3 TX slot	27.55	27.80	27.48	<b>-4.26 dB</b>	23.29	23.54	23.22
	4 TX slot	27.45	27.69	27.38	<b>-3.01 dB</b>	24.44	<b>24.68</b>	24.37
EDGE	1 TX slot	22.05	22.11	22.21	<b>-9.03 dB</b>	13.02	13.08	13.18
	2 TX slot	21.80	21.82	21.88	<b>-6.02 dB</b>	15.78	15.80	15.86
	3 TX slot	21.69	21.59	21.60	<b>-4.26 dB</b>	17.43	17.33	17.34
	4 TX slot	21.50	21.57	21.52	<b>-3.01 dB</b>	18.49	<b>18.56</b>	18.51

GSM 1900		Burst Conducted Power (dBm)			/	Average Power (dBm)		
		Channel				Channel		
		Low	Mid	High		Low	Mid	High
GPRS	1 TX slot	24.29	24.33	24.59	<b>-9.03 dB</b>	15.26	15.30	15.56
	2 TX slot	23.78	23.82	24.10	<b>-6.02 dB</b>	17.76	17.80	18.08
	3 TX slot	23.62	23.65	23.94	<b>-4.26 dB</b>	19.36	19.39	19.68
	4 TX slot	23.54	23.57	23.86	<b>-3.01 dB</b>	20.53	20.56	<b>20.85</b>
EDGE	1 TX slot	18.87	18.82	18.79	<b>-9.03 dB</b>	9.84	9.79	9.76
	2 TX slot	18.29	18.31	18.26	<b>-6.02 dB</b>	12.27	12.29	12.24
	3 TX slot	18.19	18.24	18.11	<b>-4.26 dB</b>	13.93	13.98	13.85
	4 TX slot	18.07	18.22	17.99	<b>-3.01 dB</b>	15.06	<b>15.21</b>	14.98

#### Note(s):

1. Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

2. According to the conducted power as above, the GPRS/EDGE measurements are performed with 4Tx slot for GPRS 850 and GPRS1900.

3. SAR is not required for EDGE mode because its output power is less than that of GPRS Mode

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 35 of 93

## Conducted Power Measurement Results for WCDMA/HSDPA/HSPUA

WCDMA Band II	Mode	Conducted Power (dBm)		
		Channel		
		Low	Mid	High
RMC	12.2 kbps	22.69	<b>22.77</b>	22.43
HSDPA	Sub - Test 1	22.69	22.59	22.95
	Sub - Test 2	22.71	22.59	22.95
	Sub - Test 3	22.21	22.12	22.48
	Sub - Test 4	22.15	22.10	22.22
HSUPA	Sub - Test 1	22.67	22.63	22.94
	Sub - Test 2	20.62	20.57	20.80
	Sub - Test 3	21.65	21.54	21.91
	Sub - Test 4	20.73	20.60	20.95
	Sub - Test 5	22.66	22.60	22.95

WCDMA Band IV	Mode	Conducted Power (dBm)		
		Channel		
		Low	Mid	High
RMC	12.2 kbps	<b>23.02</b>	22.95	22.88
HSDPA	Sub - Test 1	22.86	22.79	22.68
	Sub - Test 2	22.91	22.79	22.69
	Sub - Test 3	22.40	22.35	22.22
	Sub - Test 4	22.42	22.36	22.21
HSUPA	Sub - Test 1	22.87	22.78	22.71
	Sub - Test 2	20.89	20.81	20.68
	Sub - Test 3	21.77	21.77	21.67
	Sub - Test 4	20.84	20.77	20.69
	Sub - Test 5	22.87	22.79	22.69

WCDMA Band V	Mode	Conducted Power (dBm)		
		Channel		
		Low	Mid	High
RMC	12.2 kbps	<b>23.02</b>	22.86	22.92
HSDPA	Sub - Test 1	22.54	22.60	22.65
	Sub - Test 2	22.53	22.61	22.67
	Sub - Test 3	22.03	22.11	22.17
	Sub - Test 4	22.02	22.11	22.18
HSUPA	Sub - Test 1	22.50	22.66	22.64
	Sub - Test 2	20.53	20.49	20.66
	Sub - Test 3	21.55	21.59	21.58

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 36 of 93

	<b>Sub - Test 4</b>	20.49	20.54	20.62
	<b>Sub - Test 5</b>	22.53	22.53	22.66

## Conducted power measurement results for LTE

FDD LTE Band 2							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18700	18900	19100	18700	18900	19100
20MHz	1 (RB_Pos:0)	23.25	<b>23.39</b>	23.38	22.69	22.66	22.79
	1 (RB_Pos:49)	22.31	22.42	22.45	21.72	21.65	21.81
	1 (RB_Pos:99)	22.71	22.87	22.65	22.15	22.11	22.20
	50 (RB_Pos:0)	21.83	21.83	<b>21.88</b>	20.83	20.77	20.90
	50 (RB_Pos:24)	21.43	21.53	21.66	20.48	20.60	20.63
	50 (RB_Pos:49)	21.51	21.59	21.88	20.51	20.60	20.68
	100 (RB_Pos:0)	21.58	21.71	<b>21.89</b>	20.63	20.69	20.88
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18675	18900	19125	18675	18900	19125
15MHz	1 (RB_Pos:0)	22.92	23.09	23.10	21.78	21.73	22.48
	1 (RB_Pos:37)	22.30	22.43	22.61	21.20	21.67	21.94
	1 (RB_Pos:74)	22.47	22.65	22.72	21.34	21.04	21.92
	36 (RB_Pos:0)	21.60	21.72	21.87	20.54	20.66	20.81
	36 (RB_Pos:18)	21.44	21.46	21.71	20.45	20.75	20.60
	36 (RB_Pos:37)	21.48	21.56	21.67	20.48	20.68	20.53
	75 (RB_Pos:0)	21.49	21.57	21.82	20.52	20.70	20.78
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18650	18900	19150	18650	18900	19150
10MHz	1 (RB_Pos:0)	22.47	22.68	22.72	21.43	22.05	21.75
	1 (RB_Pos:24)	22.22	22.42	22.48	21.16	21.73	21.52
	1 (RB_Pos:49)	22.17	22.44	22.45	21.12	21.83	21.47
	25 (RB_Pos:0)	21.39	21.62	21.71	20.41	20.65	20.68
	25 (RB_Pos:12)	21.36	21.53	21.62	20.40	20.47	20.64
	25 (RB_Pos:24)	21.31	21.46	21.60	20.31	20.50	20.57
	50 (RB_Pos:0)	21.41	21.53	21.66	20.38	20.52	20.58
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18625	18900	19175	18625	18900	19175
5MHz	1 (RB_Pos:0)	22.26	22.56	22.53	21.43	22.00	21.71
	1 (RB_Pos:12)	22.26	22.52	22.70	21.42	21.93	21.64

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 37 of 93

	1 (RB_Pos:24)	22.08	22.41	22.42	21.26	21.87	21.54
	12 (RB_Pos:0)	21.26	21.48	21.49	20.42	20.69	20.53
	12 (RB_Pos:6)	21.29	21.41	21.53	20.38	20.58	20.52
	12 (RB_Pos:11)	21.21	21.45	21.46	20.31	20.58	20.52
	25 (RB_Pos:0)	21.22	21.46	21.50	20.26	20.48	20.50
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18615	18900	19185	18615	18900	19185
3MHz	1 (RB_Pos:0)	22.19	22.38	22.45	21.12	21.76	21.49
	1 (RB_Pos:7)	22.16	22.34	22.42	21.15	21.76	21.49
	1 (RB_Pos:14)	22.12	22.35	22.05	21.01	21.75	21.40
	8 (RB_Pos:0)	21.31	21.43	21.50	20.43	20.56	20.57
	8 (RB_Pos:4)	21.32	21.45	21.50	20.43	20.56	20.56
	8 (RB_Pos:7)	21.29	21.41	21.49	20.38	20.47	20.62
	15 (RB_Pos:0)	21.23	21.39	21.50	20.32	20.51	20.42
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18607	18900	19193	18607	18900	19193
1.4MHz	1 (RB_Pos:0)	22.15	22.29	22.38	21.23	21.71	21.39
	1 (RB_Pos: 2)	22.13	22.36	22.42	21.28	21.69	21.43
	1 (RB_Pos:5)	22.08	22.27	22.18	21.25	21.69	21.46
	3 (RB_Pos:0)	21.22	21.48	21.43	20.28	20.62	20.55
	3 (RB_Pos:1)	21.22	21.48	21.51	20.33	20.59	20.60
	3 (RB_Pos:2)	21.20	21.41	21.49	20.28	20.57	20.66
	6 (RB_Pos:0)	21.16	21.36	21.44	20.37	20.29	20.59

FDD LTE Band 4							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20050	20175	20300	20050	20175	20300
20MHz	1 (RB_Pos:0)	<b>23.52</b>	23.40	23.28	22.99	22.75	22.70
	1 (RB_Pos:49)	22.50	22.63	22.33	22.04	21.83	21.74
	1 (RB_Pos:99)	22.85	22.81	22.72	22.35	22.14	22.15
	50 (RB_Pos:0)	<b>22.00</b>	21.85	21.91	20.97	20.85	20.92
	50 (RB_Pos:24)	21.70	21.65	21.53	20.67	20.68	20.49
	50 (RB_Pos:49)	21.69	21.67	21.59	20.67	20.60	20.45
	100 (RB_Pos:0)	<b>21.76</b>	21.75	21.70	20.72	20.79	20.63
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20025	20175	20325	20025	20175	20325

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 38 of 93

15MHz	1 (RB_Pos:0)	23.21	23.13	23.08	22.07	22.48	22.46
	1 (RB_Pos:37)	22.38	22.64	22.39	21.35	21.93	21.77
	1 (RB_Pos:74)	22.72	22.61	22.62	21.54	22.01	21.95
	36 (RB_Pos:0)	21.86	21.83	21.73	20.74	20.81	20.62
	36 (RB_Pos:18)	21.63	21.68	21.53	20.60	20.68	20.45
	36 (RB_Pos:37)	21.57	21.56	21.55	20.52	20.53	20.46
	75 (RB_Pos:0)	21.67	21.76	21.55	20.64	20.69	20.53
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20000	20175	20350	20000	20175	20350
10MHz	1 (RB_Pos:0)	22.89	22.80	22.64	21.87	22.17	21.61
	1 (RB_Pos:24)	22.58	22.44	22.40	21.53	21.80	21.41
	1 (RB_Pos:49)	22.57	22.41	22.44	21.47	21.85	21.40
	25 (RB_Pos:0)	21.76	21.63	21.54	20.77	20.66	20.60
	25 (RB_Pos:12)	21.76	21.58	21.51	20.70	20.58	20.55
	25 (RB_Pos:24)	21.63	21.51	21.44	20.60	20.53	20.48
	50 (RB_Pos:0)	21.75	21.59	21.51	20.64	20.59	20.51
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	19975	20175	20375	19975	20175	20375
5MHz	1 (RB_Pos:0)	22.73	22.58	22.49	22.02	22.07	21.61
	1 (RB_Pos:12)	22.68	22.55	22.43	21.86	22.05	21.57
	1 (RB_Pos:24)	22.55	22.45	22.36	21.69	21.94	21.50
	12 (RB_Pos:0)	21.77	21.58	21.45	20.80	20.67	20.53
	12 (RB_Pos:6)	21.70	21.55	21.43	20.76	20.64	20.5
	12 (RB_Pos:11)	21.65	21.50	21.47	20.74	20.61	20.51
	25 (RB_Pos:0)	21.64	21.52	21.43	20.67	20.57	20.37
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	19965	20175	20385	19965	20175	20385
3MHz	1 (RB_Pos:0)	22.66	22.48	22.41	21.58	21.84	21.40
	1 (RB_Pos:7)	22.55	22.45	22.44	21.49	21.79	21.44
	1 (RB_Pos:14)	22.51	22.36	22.33	21.46	21.74	21.37
	8 (RB_Pos:0)	21.73	21.56	21.43	20.84	20.61	20.48
	8 (RB_Pos:4)	21.67	21.51	21.50	20.75	20.61	20.57
	8 (RB_Pos:7)	21.65	21.50	21.49	20.74	20.53	20.49
	15 (RB_Pos:0)	21.61	21.51	21.46	20.66	20.54	20.42
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	19957	20175	20393	19957	20175	20393

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 39 of 93

1.4MHz	1 (RB_Pos:0)	22.52	22.39	22.38	21.68	21.78	21.47
	1 (RB_Pos: 2)	22.56	22.41	22.45	21.73	21.8	21.43
	1 (RB_Pos:5)	22.54	22.34	22.32	21.69	21.77	21.39
	3 (RB_Pos:0)	21.60	21.46	21.47	20.76	20.67	20.63
	3 (RB_Pos:1)	21.64	21.51	21.47	20.78	20.69	20.63
	3 (RB_Pos:2)	21.62	21.44	21.44	20.72	20.63	20.59
	6 (RB_Pos:0)	21.64	21.46	21.48	20.76	20.39	20.55

FDD LTE Band 5							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20450	20525	20600	20450	20525	20600
10MHz	1 (RB_Pos:0)	22.45	22.49	22.55	21.49	21.87	21.42
	1 (RB_Pos:24)	22.33	22.50	<b>22.57</b>	21.34	21.97	21.44
	1 (RB_Pos:49)	22.34	22.37	22.40	21.30	21.85	21.16
	25 (RB_Pos:0)	21.49	21.60	21.66	20.49	20.58	20.69
	25 (RB_Pos:12)	21.51	<b>21.66</b>	21.64	20.44	20.66	20.64
	25 (RB_Pos:24)	21.40	21.58	21.56	20.36	20.61	20.51
	50 (RB_Pos:0)	21.48	21.63	<b>21.64</b>	20.42	20.60	20.58
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20425	20525	20625	20425	20525	20625
5MHz	1 (RB_Pos:0)	22.50	22.57	22.54	21.66	21.95	21.76
	1 (RB_Pos:12)	22.52	22.66	22.57	21.60	22.05	21.75
	1 (RB_Pos:24)	22.28	22.63	22.45	21.48	22.06	21.61
	12 (RB_Pos:0)	21.51	21.57	21.58	20.61	20.66	20.66
	12 (RB_Pos:6)	21.49	21.65	21.53	20.58	20.73	20.55
	12 (RB_Pos:11)	21.47	21.55	21.53	20.55	20.66	20.54
	25 (RB_Pos:0)	21.43	21.61	21.49	20.46	20.62	20.48
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20415	20525	20635	20415	20525	20635
3MHz	1 (RB_Pos:0)	22.39	22.40	22.56	21.44	21.89	21.38
	1 (RB_Pos:7)	22.31	22.58	22.58	21.32	21.90	21.47
	1 (RB_Pos:14)	22.36	22.43	22.37	21.28	21.86	21.19
	8 (RB_Pos:0)	21.56	21.54	21.57	20.61	20.59	20.60
	8 (RB_Pos:4)	21.48	21.61	21.58	20.56	20.73	20.71
	8 (RB_Pos:7)	21.46	21.56	21.51	20.54	20.62	20.59
	15 (RB_Pos:0)	21.42	21.55	21.52	20.43	20.57	20.44
Bandwidth	RB Set	Power (dBm)					

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 40 of 93

(MHz)	Channel	QPSK			16QAM		
		20407	20525	20643	20407	20525	20643
1.4MHz	1 (RB_Pos:0)	22.29	22.38	22.36	21.50	21.81	21.32
	1 (RB_Pos: 2)	22.29	22.42	22.42	21.59	21.90	21.43
	1 (RB_Pos:5)	22.28	22.44	22.34	21.54	21.86	21.50
	3 (RB_Pos:0)	21.37	21.58	21.42	20.48	20.74	20.69
	3 (RB_Pos:1)	21.40	21.61	21.50	20.51	20.70	20.82
	3 (RB_Pos:2)	21.38	21.52	21.47	20.51	20.71	20.69
	6 (RB_Pos:0)	21.40	21.53	21.50	20.56	20.46	20.59

FDD LTE Band 7							
Bandwidth (MHz)	RB Set Channel	Power (dBm)					
		QPSK			16QAM		
		20850	21100	21350	20850	21100	21350
20MHz	1 (RB_Pos:0)	<b>22.03</b>	21.54	21.63	21.48	21.29	21.04
	1 (RB_Pos:49)	21.10	21.00	21.02	20.65	20.38	20.42
	1 (RB_Pos:99)	21.37	21.01	20.96	20.89	20.57	20.60
	50 (RB_Pos:0)	20.50	<b>20.58</b>	20.43	19.48	19.37	19.26
	50 (RB_Pos:24)	20.23	20.18	20.19	19.32	19.18	19.16
	50 (RB_Pos:49)	20.19	20.01	20.21	19.29	19.14	19.13
	100 (RB_Pos:0)	<b>20.36</b>	20.19	20.30	19.40	19.18	19.25
Bandwidth (MHz)	RB Set Channel	Power (dBm)					
		QPSK			16QAM		
		20825	21100	21375	20825	21100	21375
15MHz	1 (RB_Pos:0)	21.78	21.75	21.65	20.66	20.98	20.86
	1 (RB_Pos:37)	21.12	20.99	21.00	19.98	20.33	20.30
	1 (RB_Pos:74)	21.13	21.14	21.34	20.13	20.40	20.71
	36 (RB_Pos:0)	20.46	20.29	20.24	19.41	19.32	19.15
	36 (RB_Pos:18)	20.23	19.99	20.11	19.20	18.91	19.10
	36 (RB_Pos:37)	20.16	20.13	20.13	19.15	19.06	19.07
	75 (RB_Pos:0)	20.27	20.18	20.26	19.29	19.23	19.13
Bandwidth (MHz)	RB Set Channel	Power (dBm)					
		QPSK			16QAM		
		20800	21100	21400	20800	21100	21400
10MHz	1 (RB_Pos:0)	21.55	21.29	21.37	20.50	20.57	20.22
	1 (RB_Pos:24)	21.15	20.91	21.03	20.08	20.27	20.08
	1 (RB_Pos:49)	21.18	20.96	21.08	20.10	20.35	20.09
	25 (RB_Pos:0)	20.36	20.12	20.18	19.40	19.38	19.25
	25 (RB_Pos:12)	20.39	20.15	20.30	19.42	18.97	19.30
	25 (RB_Pos:24)	20.30	20.03	20.14	19.33	19.07	19.19



# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 41 of 93

Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20775	21100	21425	20775	21100	21425
5MHz	50 (RB_Pos:0)	20.36	20.15	20.15	19.40	19.10	19.29
	1 (RB_Pos:0)	21.41	21.05	21.14	20.90	20.17	20.35
	1 (RB_Pos:12)	21.37	21.16	21.17	20.84	20.20	20.31
	1 (RB_Pos:24)	21.25	20.98	21.15	20.66	20.12	20.28
	12 (RB_Pos:0)	20.44	20.09	20.20	19.51	19.21	19.27
	12 (RB_Pos:6)	20.40	20.09	20.16	19.43	19.17	19.27
	12 (RB_Pos:11)	20.33	20.00	20.13	19.37	19.12	19.20
25 (RB_Pos:0)	20.34	20.05	20.18	19.32	19.06	19.06	

FDD LTE Band 12							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	23060	23095	23130	23060	23095	23130
10MHz	1 (RB_Pos:0)	22.37	22.36	22.44	21.31	21.72	21.44
	1 (RB_Pos:24)	22.40	22.45	<b>22.57</b>	21.40	21.86	21.55
	1 (RB_Pos:49)	22.32	22.31	22.33	21.26	21.70	21.21
	25 (RB_Pos:0)	21.53	21.54	21.61	20.48	20.64	20.63
	25 (RB_Pos:12)	21.50	21.63	<b>21.69</b>	20.49	20.60	20.70
	25 (RB_Pos:24)	21.53	21.53	21.57	20.57	20.52	20.56
	50 (RB_Pos:0)	21.56	21.50	<b>21.58</b>	20.48	20.49	20.53
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	23035	23095	23155	23035	23095	23155
5MHz	1 (RB_Pos:0)	22.43	22.50	22.50	21.63	21.98	21.69
	1 (RB_Pos:12)	22.44	22.44	22.49	21.56	22.01	21.64
	1 (RB_Pos:24)	22.31	22.45	22.38	21.54	21.97	21.51
	12 (RB_Pos:0)	21.47	21.49	21.53	20.52	20.63	20.62
	12 (RB_Pos:6)	21.45	21.58	21.53	20.51	20.75	20.59
	12 (RB_Pos:11)	21.48	21.53	21.54	20.55	20.73	20.58
	25 (RB_Pos:0)	21.50	21.51	21.58	20.55	20.62	20.58
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	23025	23095	23165	23025	23095	23165
3MHz	1 (RB_Pos:0)	22.43	22.46	22.46	21.22	21.83	21.52
	1 (RB_Pos:7)	22.40	22.39	22.53	21.36	21.79	21.53
	1 (RB_Pos:14)	22.32	22.39	22.47	21.25	21.82	21.40
	8 (RB_Pos:0)	21.50	21.55	21.55	20.64	20.66	20.59

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 42 of 93

	8 (RB_Pos:4)	21.54	21.59	21.57	20.69	20.66	20.62
	8 (RB_Pos:7)	21.49	21.51	21.49	20.63	20.56	20.49
	15 (RB_Pos:0)	21.48	21.54	21.49	20.54	20.64	20.43
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	23017	23095	23173	23017	23095	23173
1.4MHz	1 (RB_Pos:0)	22.32	22.27	22.39	21.33	21.71	21.42
	1 (RB_Pos: 2)	22.33	22.45	22.42	21.46	21.84	21.39
	1 (RB_Pos:5)	22.24	22.33	22.39	21.44	21.73	21.43
	3 (RB_Pos:0)	21.26	21.39	21.35	21.34	21.59	21.55
	3 (RB_Pos:1)	21.33	21.46	21.44	21.50	21.70	21.57
	3 (RB_Pos:2)	21.35	21.37	21.46	21.47	21.56	21.68
	6 (RB_Pos:0)	21.35	21.48	21.39	20.54	20.43	20.52

FDD LTE Band 41							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	39750	40620	41490	39750	40620	41490
20MHz	1 (RB_Pos:0)	<b>20.82</b>	20.64	19.93	20.13	19.91	19.30
	1 (RB_Pos:49)	20.08	19.98	19.65	19.43	19.06	19.05
	1 (RB_Pos:99)	19.83	20.03	20.42	19.18	19.14	19.84
	50 (RB_Pos:0)	<b>19.82</b>	19.48	18.89	18.85	18.42	18.06
	50 (RB_Pos:24)	19.49	19.18	18.87	18.54	18.15	18.02
	50 (RB_Pos:49)	19.32	19.06	19.12	18.40	18.11	18.28
	100 (RB_Pos:0)	<b>19.69</b>	19.22	18.95	18.77	18.28	18.09
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	39725	40620	41515	39725	40620	41515
15MHz	1 (RB_Pos:0)	20.79	20.75	20.04	20.12	20.22	19.38
	1 (RB_Pos:37)	20.28	20.06	19.84	19.62	19.50	19.19
	1 (RB_Pos:74)	20.06	20.29	20.49	19.42	19.73	19.85
	36 (RB_Pos:0)	19.77	19.54	18.95	18.80	18.60	18.09
	36 (RB_Pos:18)	19.65	19.27	19.09	18.69	18.33	18.25
	36 (RB_Pos:37)	19.29	19.17	19.26	18.35	18.22	18.41
	75 (RB_Pos:0)	19.64	19.26	19.07	18.71	18.35	18.21
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	39700	40620	41540	39700	40620	41540
10MHz	1 (RB_Pos:0)	20.27	20.07	19.59	19.56	19.46	18.98
	1 (RB_Pos:24)	20.38	20.02	20.00	19.72	19.44	19.42

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 43 of 93

	1 (RB_Pos:49)	19.76	19.69	20.00	19.12	19.13	19.45
	25 (RB_Pos:0)	19.59	19.31	19.01	18.63	18.37	18.14
	25 (RB_Pos:12)	19.60	19.20	19.20	18.67	18.26	18.34
	25 (RB_Pos:24)	19.48	19.07	19.23	18.56	18.13	18.38
	50 (RB_Pos:0)	19.55	19.13	19.11	18.61	18.22	18.28
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	39675	40620	41565	39675	40620	41565
5MHz	1 (RB_Pos:0)	20.25	20.15	19.99	19.54	19.42	19.37
	1 (RB_Pos:12)	20.29	20.04	20.19	19.60	19.34	19.63
	1 (RB_Pos:24)	20.25	19.87	20.20	19.57	19.18	19.65
	12 (RB_Pos:0)	19.53	19.23	19.24	18.63	18.29	18.44
	12 (RB_Pos:6)	19.49	19.14	19.32	18.59	18.22	18.54
	12 (RB_Pos:11)	19.39	19.02	19.35	18.49	18.10	18.57
	25 (RB_Pos:0)	19.53	19.13	19.29	18.60	18.24	18.44

FDD LTE Band 66							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	132072	132322	132572	132072	132322	132572
20MHz	1 (RB_Pos:0)	22.35	22.12	22.06	21.84	21.47	21.58
	1 (RB_Pos:49)	<b>22.69</b>	22.41	22.39	22.21	21.76	21.88
	1 (RB_Pos:99)	22.37	22.02	22.04	21.81	21.43	21.46
	50 (RB_Pos:0)	21.53	21.20	21.25	20.53	20.19	20.17
	50 (RB_Pos:24)	<b>21.66</b>	21.31	21.33	20.67	20.31	20.31
	50 (RB_Pos:49)	21.46	21.19	21.12	20.49	20.15	20.08
	100 (RB_Pos:0)	<b>21.51</b>	21.17	21.24	20.48	20.13	20.16
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	132047	132322	132597	132047	132322	132597
15MHz	1 (RB_Pos:0)	22.31	22.00	21.98	21.23	21.34	21.52
	1 (RB_Pos:37)	22.71	22.34	22.32	21.68	21.71	21.84
	1 (RB_Pos:74)	22.22	21.95	22.02	21.15	21.27	21.53
	36 (RB_Pos:0)	21.57	21.27	21.35	20.53	20.25	20.24
	36 (RB_Pos:18)	21.71	21.35	21.39	20.71	20.34	20.31
	36 (RB_Pos:37)	21.60	21.22	21.30	20.52	20.26	20.22
	75 (RB_Pos:0)	21.55	21.17	21.25	20.57	20.20	20.21
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	132022	132322	132622	132022	132322	132622

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 44 of 93

10MHz	1 (RB_Pos:0)	22.74	22.43	22.51	21.69	21.79	21.49
	1 (RB_Pos:24)	22.50	22.28	22.50	21.52	21.66	21.42
	1 (RB_Pos:49)	22.70	22.50	22.59	21.68	21.87	21.49
	25 (RB_Pos:0)	21.64	21.40	21.40	20.69	20.39	20.46
	25 (RB_Pos:12)	21.64	21.35	21.49	20.63	20.32	20.57
	25 (RB_Pos:24)	21.58	21.34	21.51	20.56	20.32	20.56
	50 (RB_Pos:0)	21.65	21.37	21.43	20.61	20.33	20.41
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	131997	132322	132647	131997	132322	132647
5MHz	1 (RB_Pos:0)	22.73	22.52	22.58	21.88	21.93	21.74
	1 (RB_Pos:12)	22.74	22.36	22.49	21.90	21.83	21.64
	1 (RB_Pos:24)	22.55	22.29	22.39	21.72	21.72	21.55
	12 (RB_Pos:0)	21.71	21.32	21.44	20.73	20.41	20.55
	12 (RB_Pos:6)	21.67	21.34	21.44	20.76	20.43	20.52
	12 (RB_Pos:11)	21.54	21.28	21.43	20.63	20.36	20.46
	25 (RB_Pos:0)	21.66	21.31	21.44	20.67	20.34	20.44

### Conducted power measurement results for WLAN Antenna 0 (2.4 GHz)

Mode	Worst case Data rate	Conducted Power (dBm)		
		Channel		
		1	6	11
802.11b	11 Mbps	14.35	16.15	15.16
802.11g	18 Mbps	11.48	13.12	12.14
802.11n(HT20)	MCS2	10.46	12.04	11.01

Mode	Worst case Data rate	Conducted Power (dBm)		
		Channel		
		3	6	9
802.11n(HT40)	MCS2	10.79	11.47	11.51

### Conducted power measurement results for WLAN Antenna 1 (2.4 GHz)

Mode	Worst case Data rate	Conducted Power (dBm)		
		Channel		
		1	6	11
802.11b	11 Mbps	14.43	15.15	14.83
802.11g	18 Mbps	11.57	12.56	12.36
802.11n(HT20)	MCS2	10.92	11.63	11.42

Mode	Worst case Data rate	Conducted Power (dBm)		
------	----------------------	-----------------------	--	--

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 45 of 93

		Channel		
		3	6	9
802.11n(HT40)	MCS2	10.98	11.36	11.31

## Conducted power measurement results for WLAN Antenna 0 (5.2 GHz)

Mode	Worst case Data rate	Conducted Power (dBm)		
		Channel		
		36	44	48
802.11a	24 Mbps	12.90	12.69	12.80
802.11n(HT20)	MCS6	13.22	12.90	12.97
802.11ac(VHT20)	MCS6	13.23	12.85	12.93

Mode	Worst case Data rate	Conducted Power (dBm)	
		Channel	
		38	46
802.11n(HT40)	MCS6	12.66	12.42
802.11ac(VHT40)	MCS6	12.79	12.48

Mode	Worst case Data rate	Conducted Power (dBm)
		Channel
		42
802.11ac(VHT80)	MCS0	12.22

## Conducted power measurement results for WLAN Antenna 1 (5.2 GHz)

Mode	Worst case Data rate	Conducted Power (dBm)		
		Channel		
		36	44	48
802.11a	36 Mbps	13.73	13.23	13.27
802.11n(HT20)	MCS6	13.79	13.15	13.31
802.11ac(VHT20)	MCS6	14.05	13.58	13.57

Mode	Worst case Data rate	Conducted Power (dBm)	
		Channel	
		38	46
802.11n(HT40)	MCS6	13.35	13.01
802.11ac(VHT40)	MCS6	13.39	13.02

Mode	Worst case Data rate	Conducted Power (dBm)
		Channel

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 46 of 93

		<b>42</b>
<b>802.11ac(VHT80)</b>	<b>MCS0</b>	13.06

### Conducted power measurement results for WLAN Antenna 0 (5.8 GHz)

Mode	Worst case Data rate	Conducted Power (dBm)		
		Channel		
		149	157	165
802.11a	24 Mbps	12.08	12.37	13.45
802.11n(HT20)	MCS6	12.19	12.48	12.95
802.11ac(VHT20)	MCS6	12.33	12.61	13.71

Mode	Worst case Data rate	Conducted Power (dBm)	
		Channel	
		151	159
802.11n(HT40)	MCS6	11.89	12.92
802.11ac(VHT40)	MCS6	11.92	12.95

Mode	Data Rate (Mbps)	Conducted Power (dBm)
		Channel
		155
802.11ac(VHT80)	MCS0	11.64

### Conducted power measurement results for WLAN Antenna 1 (5.8 GHz)

Mode	Worst case Data rate	Conducted Power (dBm)		
		Channel		
		149	157	165
802.11a	36 Mbps	12.29	12.53	13.28
802.11n(HT20)	MCS6	12.44	12.68	13.41
802.11ac(VHT20)	MCS6	12.45	12.69	13.46

Mode	Worst case Data rate	Conducted Power (dBm)	
		Channel	
		151	159
802.11n(HT40)	MCS6	11.87	12.42
802.11ac(VHT40)	MCS6	11.85	12.54

Mode	Data Rate (Mbps)	Conducted Power (dBm)
		Channel
		155
802.11ac(VHT80)	MCS0	12.12


# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 47 of 93

## 6.2 Transmit Antennas and SAR Measurement Position

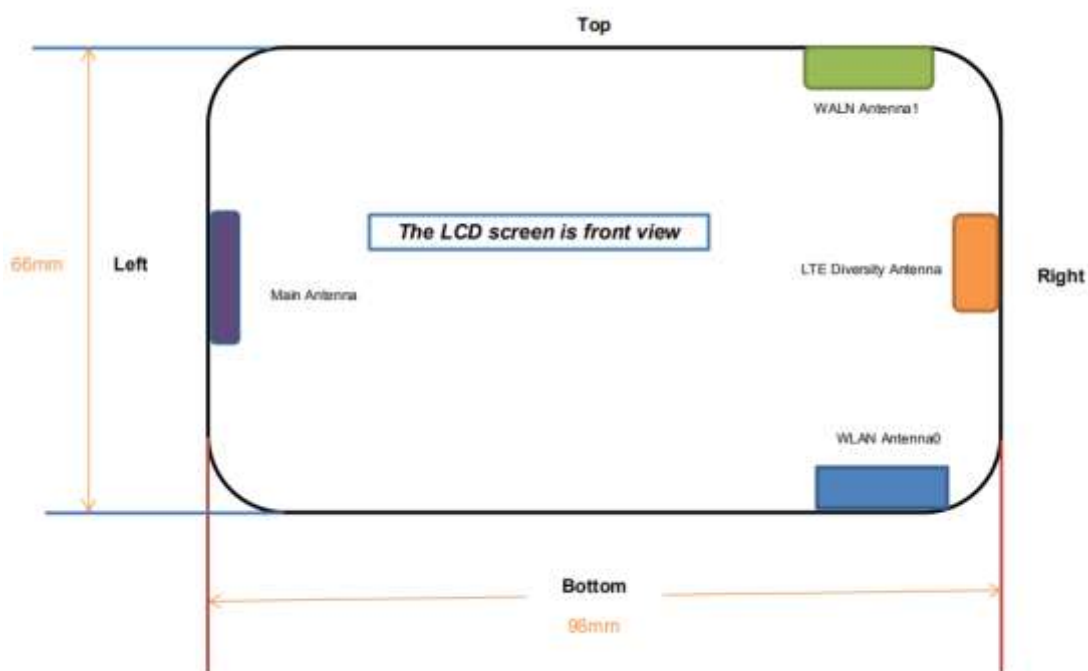

### Antenna information:

Main Antenna	WCDMA/LTE TX/RX
LTE Diversity antenna	Only RX
WLAN Antenna 0	WLAN TX/RX
WLAN Antenna 1	WLAN TX/RX

Distance of The Antenna to the EUT surface and edge (mm)						
Antenna	Front	Rear	Top	Bottom	Left	Right
Main Antenna	2.91	2.95	9.49	9.49	1.09	82.09
WLAN Antenna 0	3.57	4.29	58.59	1.09	57.74	17.74
WLAN Antenna 1	3.57	4.29	1.09	58.59	57.74	18.74

### Note(s):

1. Per KDB648474 D04, because the overall diagonal distance of this devices is 100mm<160mm, it is considered as "Mini Table" device.
2. Per KDB648474 D04, 10-g extremity SAR is not required when Body-Worn mode 1-g reported SAR < 1.2 W/Kg.
3. According to the KDB941225 D06 Hot Spot SAR v02, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 48 of 93

4. Referring to KDB 941225 D06 v02, When the overall device length and width are  $\geq 9\text{cm} \times 5\text{cm}$ , the test distance is 10mm, SAR must be measured for all sides and surfaces with a transmitting antenna located with 25mm from that surface or edge.

## 6.3 SAR Test Exclusion Consideration Table

According with FCC KDB 447498 D01, Appendix A, <SAR Test Exclusion Thresholds for 100 MHz - 6 GHz and  $\leq 50$  mm> Table, this Device SAR test configurations consider as below.

**SAR Test Exclusion Consideration Table:**

Band	Mode	Max. Tune-up Power		Test Position Configurations					
		dBm	mW	Head	Front/Back	Left Edge	Right Edge	Top Edge	Bottom Edge
GSM 850	Distance to User		N/A	<5mm	1.09mm	82.09mm	9.49mm	9.49mm	
	Data	28.00	630.96	N/A	Yes	Yes	No	Yes	Yes
GSM 1900	Distance to User		N/A	<5mm	1.09mm	82.09mm	9.49mm	9.49mm	
	Data	24.00	251.19	N/A	Yes	Yes	No	Yes	Yes
WCDMA Band 2	Distance to User		N/A	<5mm	1.09mm	82.09mm	9.49mm	9.49mm	
	RMC	23.00	199.53	N/A	Yes	Yes	No	Yes	Yes
WCDMA Band 4	Distance to User		N/A	<5mm	1.09mm	82.09mm	9.49mm	9.49mm	
	RMC	23.40	218.78	N/A	Yes	Yes	No	Yes	Yes
WCDMA Band 5	Distance to User		N/A	<5mm	1.09mm	82.09mm	9.49mm	9.49mm	
	RMC	23.50	223.87	N/A	Yes	Yes	No	Yes	Yes
LTE Band 2	Distance to User		N/A	<5mm	1.09mm	82.09mm	9.49mm	9.49mm	
	QPSK	23.50	223.87	N/A	Yes	Yes	No	Yes	Yes
LTE Band 4	Distance to User		N/A	<5mm	1.09mm	82.09mm	9.49mm	9.49mm	
	QPSK	24.00	251.19	N/A	Yes	Yes	No	Yes	Yes
LTE Band 5	Distance to User		N/A	<5mm	1.09mm	82.09mm	9.49mm	9.49mm	
	QPSK	23.00	199.53	N/A	Yes	Yes	No	Yes	Yes
LTE Band 7	Distance to User		N/A	<5mm	1.09mm	82.09mm	9.49mm	9.49mm	
	QPSK	22.50	177.83	N/A	Yes	Yes	No	Yes	Yes
LTE Band 12	Distance to User		N/A	<5mm	1.09mm	82.09mm	9.49mm	9.49mm	
	QPSK	22.50	177.83	N/A	Yes	Yes	No	Yes	Yes
LTE Band 41	Distance to User		N/A	<5mm	1.09mm	82.09mm	9.49mm	9.49mm	
	QPSK	21.50	141.25	N/A	Yes	Yes	No	Yes	Yes
LTE Band 66	Distance to User		N/A	<5mm	1.09mm	82.09mm	9.49mm	9.49mm	
	QPSK	23.00	199.53	N/A	Yes	Yes	No	Yes	Yes
WLAN Antenna 0 2.4 G	Distance to User		N/A	<5mm	57.74mm	17.74mm	58.59mm	1.09mm	
	802.11b	16.50	44.67	N/A	Yes	No	Yes	No	Yes
	802.11g	13.50	22.39	N/A	Yes	No	Yes	No	Yes



# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 49 of 93

	802.11n(HT20)	12.50	17.78	N/A	Yes	No	Yes	No	Yes
	802.11n(HT40)	12.00	15.85	N/A	Yes	No	Yes	No	Yes
WLAN Antenna 0 5.2G	Distance to User			N/A	<5mm	<5mm	57.74mm	17.74mm	58.59mm
	802.11a	13.00	19.95	N/A	Yes	No	Yes	No	Yes
	802.11n(HT20)	13.50	22.39	N/A	Yes	No	Yes	No	Yes
	802.11ac(HT20)	13.50	22.39	N/A	Yes	No	Yes	No	Yes
	802.11n(HT40)	13.00	19.95	N/A	Yes	No	Yes	No	Yes
	802.11ac(HT40)	13.00	19.95	N/A	Yes	No	Yes	No	Yes
	802.11ac(HT80)	12.50	17.78	N/A	Yes	No	Yes	No	Yes
WLAN Antenna 0 5.8G	Distance to User			N/A	<5mm	<5mm	57.74mm	17.74mm	58.59mm
	802.11a	13.80	23.99	N/A	Yes	No	Yes	No	Yes
	802.11n(HT20)	13.50	22.39	N/A	Yes	No	Yes	No	Yes
	802.11ac(HT20)	14.00	25.12	N/A	Yes	No	Yes	No	Yes
	802.11n(HT40)	13.50	22.39	N/A	Yes	No	Yes	No	Yes
	802.11ac(HT40)	13.50	22.39	N/A	Yes	No	Yes	No	Yes
	802.11ac(HT80)	12.00	15.85	N/A	Yes	No	Yes	No	Yes
WLAN Antenna 1 2.4 G	Distance to User			N/A	<5mm	57.74mm	18.74mm	1.09mm	58.59mm
	802.11b	15.50	35.48	N/A	Yes	No	Yes	Yes	No
	802.11g	13.00	19.95	N/A	Yes	No	Yes	Yes	No
	802.11n(HT20)	12.00	15.85	N/A	Yes	No	Yes	Yes	No
	802.11n(HT40)	11.50	14.13	N/A	Yes	No	Yes	Yes	No
WLAN Antenna 1 5.2 G	Distance to User			N/A	<5mm	57.74mm	18.74mm	1.09mm	58.59mm
	802.11a	14.00	25.12	N/A	Yes	No	Yes	Yes	No
	802.11n(HT20)	14.00	25.12	N/A	Yes	No	Yes	Yes	No
	802.11ac(HT20)	14.50	28.18	N/A	Yes	No	Yes	Yes	No
	802.11n(HT40)	13.80	23.99	N/A	Yes	No	Yes	Yes	No
	802.11ac(HT40)	13.80	23.99	N/A	Yes	No	Yes	Yes	No
	802.11ac(HT80)	13.50	22.39	N/A	Yes	No	Yes	Yes	No
WLAN Antenna 1 5.8 G	Distance to User			N/A	<5mm	57.74mm	18.74mm	1.09mm	58.59mm
	802.11a	13.80	23.99	N/A	Yes	No	Yes	Yes	No
	802.11n(HT20)	13.80	23.99	N/A	Yes	No	Yes	Yes	No
	802.11ac(HT20)	14.00	25.12	N/A	Yes	No	Yes	Yes	No
	802.11n(HT40)	13.00	19.95	N/A	Yes	No	Yes	Yes	No
	802.11ac(HT40)	13.00	19.95	N/A	Yes	No	Yes	Yes	No
	802.11ac(HT80)	12.50	17.78	N/A	Yes	No	Yes	Yes	No

**Note(s):**

- Maximum power is the source-based time-average power and represents the maximum RF output power including tune-up tolerance among production units

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 50 of 93

2. Per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. Per KDB 447498 D01, standalone SAR test exclusion threshold is applied; If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold
4. Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:  
$$\left[ \frac{\text{max. power of channel, including tune-up tolerance, mW}}{\text{min. test separation distance, mm}} \right] \cdot \sqrt{f(\text{GHz})} \leq 3.0$$
for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR
  - a.  $f(\text{GHz})$  is the RF channel transmit frequency in GHz
  - b. Power and distance are rounded to the nearest mW and mm before calculation
  - c. The result is rounded to one decimal place for comparison
  - d. For < 50 mm distance, we just calculate mW of the exclusion threshold value (3.0) to do compare. This formula is  $[3.0] / \sqrt{f(\text{GHz})} \cdot [\text{min. test separation distance, mm}] = \text{exclusion threshold of mW}$ .
5. Per KDB 447498 D01, at 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following
  - a. [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
  - b. [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and  $\leq 6$  GHz
6. Per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA /HSUPA /DC-HSDPA output power is < 0.25dB higher than RMC12.2Kbps, or reported SAR with RMC 12.2kbps setting is  $\leq 1.2\text{W/kg}$ , HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded.
7. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion.8. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
8. Per KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions.
  - a. When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
  - b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2\text{ W/kg}$ .
9. Per KDB 248227 D01 SAR is not required for the following U-NII-1 and U-NII-2A bands conditions.
  - a. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2\text{ W/kg}$ , SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
  - b. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq 1.2\text{ W/kg}$ , SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 51 of 93

## 6.4 SAR Measurement Results

### GSM 850

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas SAR (W/kg)	Meas. Power	Tune-up limit	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
<b>Body-worn Accessory &amp; Hotspot</b>											
GPRS 4 slots	Front Side	10	128	824.20	-0.090	0.650	27.46	28.00	1.13	0.736	
		10	190	836.60	-0.050	0.897	27.69	28.00	1.07	0.963	
		10	251	848.80	-0.180	0.916	27.38	28.00	1.15	1.057	1#
	Back Side	10	190	836.60	0.124	0.569	27.69	28.00	1.07	0.611	
	Left Edge	10	190	836.60	0.063	0.162	27.69	28.00	1.07	0.174	
	Top Edge	10	190	836.60	0.127	0.056	27.69	28.00	1.07	0.060	
	Bottom Edge	10	190	836.60	0.121	0.049	27.69	28.00	1.07	0.053	

### GSM 1900

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas SAR (W/kg)	Meas. Power	Tune-up limit	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
<b>Body-worn Accessory &amp; Hotspot</b>											
GPRS 4 slots	Front Side	10	661	1880.00	-0.090	0.687	23.57	24.00	1.10	0.759	2#
	Back Side	10	661	1880.00	0.065	0.526	23.57	24.00	1.10	0.581	
	Left Edge	10	661	1880.00	0.065	0.188	23.57	24.00	1.10	0.208	
	Top Edge	10	661	1880.00	0.165	0.122	23.57	24.00	1.10	0.135	
	BottomEdge	10	661	1880.00	0.126	0.265	23.57	24.00	1.10	0.293	

#### Note(s):

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for Body-Worn SAR.
2. Justification for reduced test configurations per KDB Publication 941225 D01v03r01: The source-based timeaveraged output power was evaluated for all multi-slot operations. The multi-slot configuration with the highest frame averaged output power was evaluated for SAR.

### WCDMA Band II

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
<b>Body-Worn &amp; Hotspot</b>											
RMC	Front Side	10	9400	1880.00	0.165	0.656	22.77	23.00	1.054	0.692	
	Back Side	10	9400	1880.00	0.136	0.465	22.77	23.00	1.054	0.490	

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 52 of 93

	Left Edge	10	9262	1852.40	0.152	0.836	22.69	23.00	1.074	0.898	
		10	9400	1880.00	-0.140	0.892	22.77	23.00	1.054	0.941	3#
		10	9538	1907.60	0.060	0.824	22.43	23.00	1.140	0.940	
	Top Edge	10	9400	1880.00	0.136	0.162	22.77	23.00	1.054	0.171	
	Bottom Edge	10	9400	1880.00	0.124	0.206	22.77	23.00	1.054	0.217	

## WCDMA Band IV

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
<b>Body-Worn &amp; Hotspot</b>											
RMC	Front Side	10	1413	1732.60	-0.201	0.689	22.95	23.40	1.109	0.764	
	Back Side	10	1413	1732.60	-0.109	0.521	22.95	23.40	1.109	0.578	
	Left Edge	10	1312	1712.40	-0.100	0.928	23.02	23.40	1.091	1.013	4#
		10	1413	1732.60	-0.097	0.874	22.95	23.40	1.109	0.969	
		10	1513	1752.60	0.162	0.876	22.88	23.40	1.127	0.987	
	Top Edge	10	1413	1732.60	0.118	0.164	22.95	23.40	1.109	0.182	
	Bottom Edge	10	1413	1732.60	0.162	0.284	22.95	23.40	1.109	0.315	

## WCDMA Band V

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
<b>Body-Worn &amp; Hotspot</b>											
RMC	Front Side	10	4182	836.40	-0.200	0.580	22.86	23.50	1.159	0.672	5#
	Back Side	10	4182	836.40	0.137	0.426	22.86	23.50	1.159	0.494	
	Left Edge	10	4182	836.40	0.134	0.167	22.86	23.50	1.159	0.194	
	Top Edge	10	4182	836.40	0.168	0.226	22.86	23.50	1.159	0.262	
	Bottom Edge	10	4182	836.40	0.135	0.258	22.86	23.50	1.159	0.299	

### Note(s):

1. WCDMA mode in Body SAR was tested under RMC 12.2 kbps without HSPA inactive per KDB Publication 941225 D01v03. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 53 of 93

## LTE Band 2 (20MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Numb.	RB Start	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
<b>Body-worn Accessory&amp; Hotspot</b>													
QPSK	Front Side	10	18900	1880.00	1	Low	0.126	0.689	23.39	23.50	1.026	0.707	
			19100	1900.00	50	Low	0.065	0.565	21.88	22.50	1.153	0.652	
	Back Side	10	18900	1880.00	1	Low	-0.126	0.675	23.39	23.50	1.026	0.692	
			19100	1900.00	50	Low	0.068	0.609	21.88	22.50	1.153	0.702	
	Left Edge	10	18700	1860.00	1	Low	-0.100	0.986	23.25	23.50	1.059	1.044	
			18900	1880.00	1	Low	-0.110	1.040	23.39	23.50	1.026	1.067	
			19100	1900.00	1	Low	-0.200	1.060	23.38	23.50	1.028	1.090	6#
			19100	1900.00	50	Low	-0.170	0.681	21.88	22.50	1.153	0.786	
			19100	1900.00	100	Low	-0.150	0.651	21.89	22.50	1.151	0.749	
	Top Edge	10	18900	1880.00	1	Low	0.127	0.253	23.39	23.50	1.026	0.259	
			19100	1900.00	50	Low	0.068	0.234	21.88	22.50	1.153	0.270	
	Bottom Edge	10	18900	1880.00	1	Low	0.135	0.426	23.39	23.50	1.026	0.437	
			19100	1900.00	50	Low	0.029	0.365	21.88	22.50	1.153	0.421	

## LTE Band 4 (20MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Numb.	RB Start	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.	
<b>Body-worn Accessory&amp; Hotspot</b>														
QPSK	Front Side	10	20050	1720.00	1	Low	0.069	0.678	23.52	24.00	1.117	0.757		
			20050	1720.00	50	Low	-0.137	0.562	22.00	22.50	1.122	0.631		
	Back Side	10	20050	1720.00	1	Low	0.052	0.707	23.52	24.00	1.117	0.790		
			20050	1720.00	50	Low	0.068	0.651	22.00	22.50	1.122	0.730		
	Left Edge	10	20050	1720.00	1	Low	-0.150	1.020	23.52	24.00	1.117	1.139	7#	
			20175	1732.50	1	Low	-0.100	0.960	23.40	24.00	1.148	1.102		
			20300	1745.00	1	Low	-0.100	0.954	23.28	24.00	1.180	1.126		
			20050	1720.00	50	Low	-0.100	0.751	22.00	22.50	1.122	0.843		
			20175	1732.50	50	Low	0.190	0.760	21.85	22.50	1.161	0.883		
			20300	1745.00	50	Low	-0.080	0.812	21.91	22.50	1.146	0.930		
	Top Edge	10	20050	1720.00	100	Low	0.080	0.705	21.76	22.00	1.057	0.745		
			20050	1720.00	1	Low	-0.135	0.136	23.52	24.00	1.117	0.152		
				20050	1720.00	50	Low	0.127	0.127	22.00	22.50	1.122	0.142	

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 54 of 93

	Bottom Edge	10	20050	1720.00	1	Low	0.094	0.256	23.52	24.00	1.117	0.286	
			20050	1720.00	50	Low	0.078	0.234	22.00	22.50	1.122	0.263	

## LTE Band 5 (10MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Numb.	RB Start	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
<b>Body-worn Accessory&amp; Hotspot</b>													
QPSK	Front Side	10	20600	844.00	1	Middle	0.092	0.056	22.570	23.000	1.104	0.062	
			20525	836.50	25	Middle	0.087	0.062	21.660	22.000	1.081	0.067	
	Back Side	10	20600	844.00	1	Middle	0.130	0.072	22.570	23.000	1.104	0.079	8#
			20525	836.50	25	Middle	0.043	0.058	21.660	22.000	1.081	0.063	
	Left Edge	10	20600	844.00	1	Middle	0.121	0.032	22.570	23.000	1.104	0.035	
			20525	836.50	25	Middle	0.063	0.029	21.660	22.000	1.081	0.031	
	Top Edge	10	20600	844.00	1	Middle	0.094	0.035	22.570	23.000	1.104	0.039	
			20525	836.50	25	Middle	0.071	0.032	21.660	22.000	1.081	0.035	
	Bottom Edge	10	20600	844.00	1	Middle	0.062	0.041	22.570	23.000	1.104	0.045	
			20525	836.50	25	Middle	0.176	0.038	21.660	22.000	1.081	0.041	

## LTE Band 7 (20MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Numb.	RB Start	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
<b>Body-worn Accessory&amp; Hotspot</b>													
QPSK	Front Side	10	20850	2510.00	1	Low	0.096	0.259	22.03	22.50	1.114	0.289	
			21100	2535.00	50	Low	0.202	0.246	20.58	21.00	1.102	0.271	
	Back Side	10	20850	2510.00	1	Low	0.064	0.412	22.03	22.50	1.114	0.459	
			21100	2535.00	50	Low	0.162	0.359	20.58	21.00	1.102	0.395	
	Left Edge	10	20850	2510.00	1	Low	-0.150	0.445	22.03	22.20	1.040	0.463	9#
			21100	2535.00	50	Low	0.165	0.385	20.58	21.00	1.102	0.424	
	Top Edge	10	20850	2510.00	1	Low	-0.020	0.334	20.36	20.50	1.033	0.345	
			21100	2535.00	50	Low	0.098	0.265	22.03	22.50	1.114	0.295	
	Bottom Edge	10	20850	2510.00	50	Low	0.095	0.257	20.58	21.00	1.102	0.283	
			20850	2510.00	1	Low	0.134	0.026	22.03	22.50	1.114	0.029	

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 55 of 93

## LTE Band 12(10MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Numb.	RB Start	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
<b>Body-worn Accessory&amp; Hotspot</b>													
QPSK	Front Side	10	23130	711.00	1	Middle	-0.130	0.396	22.57	23.00	1.104	0.437	10#
			23130	711.00	25	Middle	-0.040	0.375	21.69	22.00	1.074	0.403	
	Back Side	10	23130	711.00	1	Middle	0.121	0.372	22.57	23.00	1.104	0.411	
			23130	711.00	25	Middle	0.089	0.334	21.69	22.00	1.074	0.359	
	Left Edge	10	23130	711.00	1	Middle	0.135	0.172	22.57	23.00	1.104	0.139	
			23130	711.00	25	Middle	0.084	0.161	21.69	22.00	1.074	0.119	
	Top Edge	10	23130	711.00	1	Middle	0.091	0.126	22.57	23.00	1.104	0.383	
			23130	711.00	25	Middle	-0.084	0.111	21.69	22.00	1.074	0.361	
	Bottom Edge	10	23130	711.00	1	Middle	0.089	0.347	22.57	23.00	1.104	0.383	
			23130	711.00	25	Middle	0.077	0.336	21.69	22.00	1.074	0.361	

## LTE Band 41(20MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Numb.	RB Start	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
<b>Body-worn Accessory&amp; Hotspot</b>													
QPSK	Front Side	10	39750	2506.00	1	Low	0.174	0.185	20.82	21.50	1.169	0.216	
			39750	2506.00	50	Low	0.135	0.167	19.82	20.50	1.169	0.195	
	Back Side	10	39750	2506.00	1	Low	0.149	0.223	20.82	21.50	1.169	0.261	
			39750	2506.00	50	Low	0.058	0.188	19.82	20.50	1.169	0.220	
	Left Edge	10	39750	2506.00	1	Low	0.040	0.251	20.82	21.50	1.169	0.294	11#
			39750	2506.00	50	Low	-0.090	0.192	19.82	20.50	1.169	0.225	
	Top Edge	10	39750	2506.00	1	Low	0.091	0.134	20.82	21.50	1.169	0.157	
			39750	2506.00	50	Low	0.057	0.126	19.82	20.50	1.169	0.147	
	Bottom Edge	10	39750	2506.00	1	Low	0.059	0.078	20.82	21.50	1.169	0.091	
			39750	2506.00	50	Low	0.065	0.068	19.82	20.50	1.169	0.080	

## LTE Band 66(20MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Numb.	RB Start	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
<b>Body-worn Accessory&amp; Hotspot</b>													

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 56 of 93

QPSK	Front Side	10	132072	1720.00	1	Middle	0.132	0.725	22.69	23.00	1.074	0.779	
			132072	1720.00	50	Middle	0.185	0.657	21.66	22.00	1.081	0.711	
	Back Side	10	132072	1720.00	1	Middle	0.126	0.643	22.69	23.00	1.074	0.691	
			132072	1720.00	50	Middle	0.136	0.628	21.66	22.00	1.081	0.679	
	Left Edge	10	132072	1720.00	1	Middle	-0.190	1.080	22.69	23.00	1.074	1.160	
			132322	1745.00	1	Middle	-0.170	1.070	22.41	23.00	1.146	1.226	12#
			132572	1770.00	1	Middle	-0.190	1.030	22.37	23.00	1.156	1.191	
			132072	1720.00	50	Middle	-0.170	0.914	21.66	22.00	1.081	0.988	
			132322	1745.00	50	Middle	0.110	0.869	21.53	22.00	1.114	0.968	
			132572	1770.00	50	Middle	-0.130	0.926	21.46	22.00	1.132	1.049	
	Top Edge	10	132072	1720.00	1	Middle	0.126	0.276	22.69	23.00	1.074	0.296	
			132072	1720.00	50	Middle	0.135	0.265	21.66	22.00	1.081	0.287	
	Bottom Edge	10	132072	1720.00	1	Middle	0.185	0.461	22.69	23.00	1.074	0.495	
			132072	1720.00	50	Middle	0.162	0.452	21.66	22.00	1.081	0.489	

**Note(s):**

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r05.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results.

**WLAN Antenna 0 2.4GHz**

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	Duty cycle (%)	Duty Factor	1 g Scaled SAR (W/Kg)	Meas. No.
<b>Body-Worn &amp; Hotspot</b>													
802.11b	Front Side	10	6	2437	0.185	0.012	16.15	16.50	1.084	93.65	1.068	0.014	
	Back Side	10	6	2437	0.137	0.013	16.15	16.50	1.084	93.65	1.068	0.015	
	Right Edge	10	6	2437	0.162	0.015	16.15	16.50	1.084	93.65	1.068	0.017	
	BottomEdge	10	6	2437	-0.180	0.021	16.15	16.50	1.084	93.65	1.068	0.024	13#



# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 57 of 93

## WLAN Antenna 1 2.4GHz

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	Duty cycle (%)	Duty Factor	1 g Scaled SAR (W/Kg)	Meas. No.
<b>Body-Worn &amp; Hotspot</b>													
802.11b	Front Side	10	6	2437	-0.145	0.036	15.15	15.50	1.084	93.02	1.075	0.042	
	Back Side	10	6	2437	0.178	0.032	15.15	15.50	1.084	93.02	1.075	0.037	
	Right Edge	10	6	2437	0.123	0.021	15.15	15.50	1.084	93.02	1.075	0.024	
	Top Edge	10	6	2437	0.180	0.045	15.15	15.50	1.084	93.02	1.075	0.052	14#

## WLAN Antenna 0 5.2GHz

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	Duty cycle (%)	Duty Factor	1 g Scaled SAR (W/Kg)	Meas. No.
<b>Body-Worn &amp; Hotspot</b>													
802.11AC (VHT20)	Front Side	10	36	5180	0.036	0.037	13.23	13.50	1.06	96.43	1.037	0.041	
	Back Side	10	36	5180	0.126	0.035	13.23	13.50	1.06	96.43	1.037	0.039	
	Right Edge	10	36	5180	0.134	0.042	13.23	13.50	1.06	96.43	1.037	0.046	
	BottomEdge	10	36	5180	0.120	0.049	13.23	13.50	1.06	96.43	1.037	0.054	15#

## WLAN Antenna 1 5.2GHz

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	Duty cycle (%)	Duty Factor	1 g Scaled SAR (W/Kg)	Meas. No.
<b>Body-Worn &amp; Hotspot</b>													
802.11AC (VHT20)	Front Side	10	36	5180	0.145	0.026	14.05	14.50	1.11	95.59	1.046	0.030	
	Back Side	10	36	5180	0.121	0.024	14.05	14.50	1.11	95.59	1.046	0.028	
	Right Edge	10	36	5180	0.136	0.012	14.05	14.50	1.11	95.59	1.046	0.014	
	Top Edge	10	36	5180	0.201	0.032	14.05	14.50	1.11	95.59	1.046	0.037	16#

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 58 of 93

## WLAN Antenna 0 5.8GHz

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	Duty cycle (%)	Duty Factor	1 g Scaled SAR (W/Kg)	Meas. No.
<b>Body-Worn &amp; Hotspot</b>													
802.11AC (VHT20)	Front Side	10	165	5825	0.147	0.035	13.71	14.00	1.07	96.19	1.040	0.039	
	Back Side	10	165	5825	0.132	0.026	13.71	14.00	1.07	96.19	1.040	0.029	
	Right Edge	10	165	5825	0.126	0.043	13.71	14.00	1.07	96.19	1.040	0.048	
	BottomEdge	10	165	5825	0.120	0.069	13.71	14.00	1.07	96.19	1.040	0.077	17#

## WLAN Antenna 1 5.8GHz

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	Duty cycle (%)	Duty Factor	1 g Scaled SAR (W/Kg)	Meas. No.
<b>Body-Worn &amp; Hotspot</b>													
802.11AC (VHT20)	Front Side	10	165	5825	0.182	0.079	13.46	14.00	1.13	95.60	1.046	0.094	
	Back Side	10	165	5825	0.026	0.112	13.46	14.00	1.13	95.60	1.046	0.133	
	Right Edge	10	165	5825	0.136	0.141	13.46	14.00	1.13	95.60	1.046	0.167	
	Top Edge	10	165	5825	0.160	0.152	13.46	14.00	1.13	95.60	1.046	0.180	18#

### Note(s):

1. Per KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions.
  - a. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
  - b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
3. Per KDB 248227 D01 5G WLAN Subsequent Test Configuration Procedures SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units.
  - a. When SAR test exclusion provisions of KDB Publication 447498 D01 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 59 of 93

- b. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for that subsequent test configuration.

## General Note(s):

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, FCC KDB Publication 865664 D01v01r04 and FCC KDB Publication 447498 D01v06.
2. All modes of operation were investigated, and worst-case results are reported.
3. The EUT is tested 2nd hot-spot peak, if it is less than 2 dB below the highest peak.
4. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
5. Per FCC KDB Publication 648474 D04v01r03, body worn SAR was evaluated without a headset connected to the device. Since the standalone reported SAR was  $\leq 1.2$  W/kg, no additional body worn SAR evaluations using a headset cable were required.
6. Per FCC KDB Publication 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than 0.8 W/kg.
7. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $>1/2$  dB, instead of the middle channel, the highest output power channel must be used.

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 60 of 93

## 6.5 SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

Frequency band	Test Position	Mode	Ch.	Original 1g SAR (W/kg)	1st Repeated 1g SAR (W/kg)	Largest to Smallest SAR Ratio
GSM 850	Front	GPRS 4tx	251	1.025	0.916	0.939
WB2	Left	RMC	9400	1.044	0.892	0.854
WB4	Left	RMC	1312	1.001	0.928	0.929
LTE B2	Left	QPSK	19100	1.019	1.060	1.040
LTE B4	Left	QPSK	20050	1.034	1.020	0.986
LTE B66	Left	QPSK	132572	1.009	1.080	1.090

### Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not  $> 1.20$ .

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 61 of 93

## 6.6 Standalone SAR Test Exclusion Considerations and Estimated SAR

KDB 447498 D01v06 General RF Exposure Guidance v06, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / R_i$$

Where:

**SAR<sub>1</sub>** is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

**SAR<sub>2</sub>** is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

**R<sub>i</sub>** is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of  $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

A new threshold of 0.04 is also introduced in the draft KDB. Thus, in order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(\text{SAR}_1 + \text{SAR}_2)^{1.5} / R_i < 0.04$$

## 6.7 Simultaneous Transmission SAR Considerations

### Sum of the SAR for GSM + WLAN

Condition	Simultaneous Transmission Scenario (W/Kg)					Max Σ 1-g SAR (W/Kg)	SPLSR (Yes/ No)
	GSM	WLAN Antenna 0 DTS Band	WLAN Antenna 1 DTS Band	WLAN Antenna 0 UNII Band	WLAN Antenna 1 UNII Band		
Hotspot	1.057	0.024	0.052	0.077	0.180	1.289	No

#### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

### Sum of the SAR for WCDMA + WLAN

Condition	Simultaneous Transmission Scenario (W/Kg)					Max Σ 1-g SAR (W/Kg)	SPLSR (Yes/ No)
	WCDMA	WLAN Antenna 0 DTS Band	WLAN Antenna 1 DTS Band	WLAN Antenna 0 UNII Band	WLAN Antenna 1 UNII Band		
Hotspot	1.013	0.024	0.052	0.077	0.180	1.245	No

#### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 62 of 93

## Sum of the SAR for LTE + WLAN

Condition	Simultaneous Transmission Scenario (W/Kg)					Max $\Sigma$ 1-g SAR (W/Kg)	SPLSR (Yes/ No)
	LTE	WLAN Antenna 0 DTS Band	WLAN Antenna 1 DTS Band	WLAN Antenna 0 UNII Band	WLAN Antenna 1 UNII Band		
Hotspot	1.226	0.024	0.052	0.077	0.180	1.483	No

### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 63 of 93

## 7 Appendixes

### 7.1 Liquid depth



### 7.2 Sample and Set-up Photos



Front of the sample

# TEST REPORT


Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 64 of 93



Rear of the sample

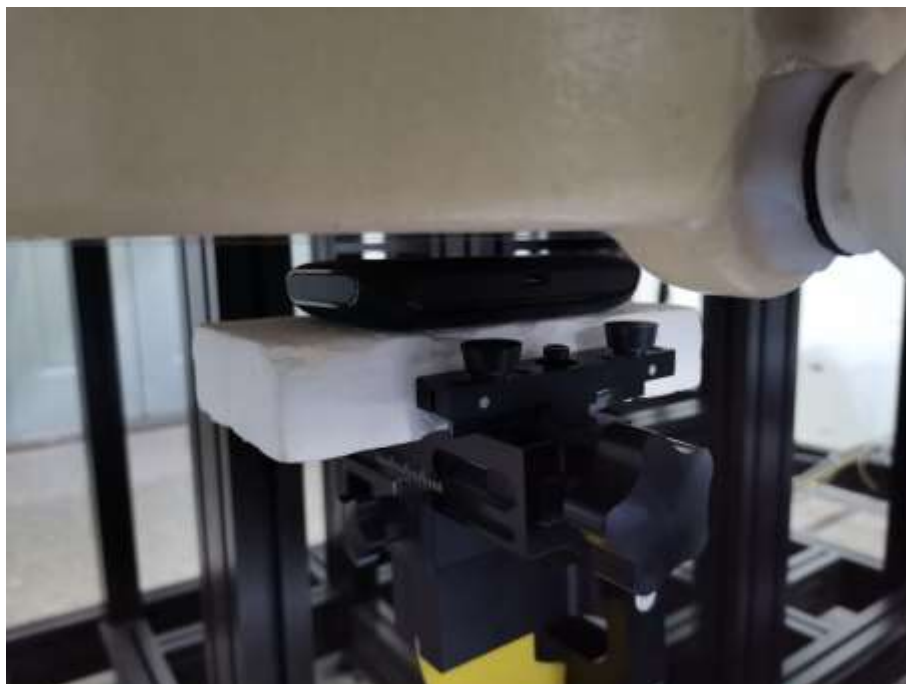

Front - 10mm




# TEST REPORT


Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 65 of 93

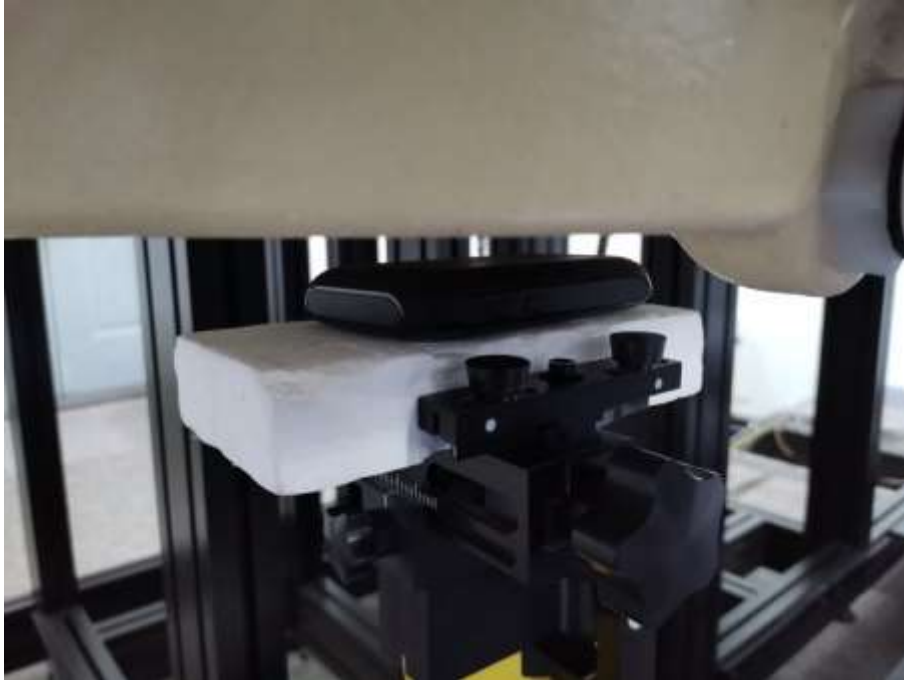

Back - 10mm

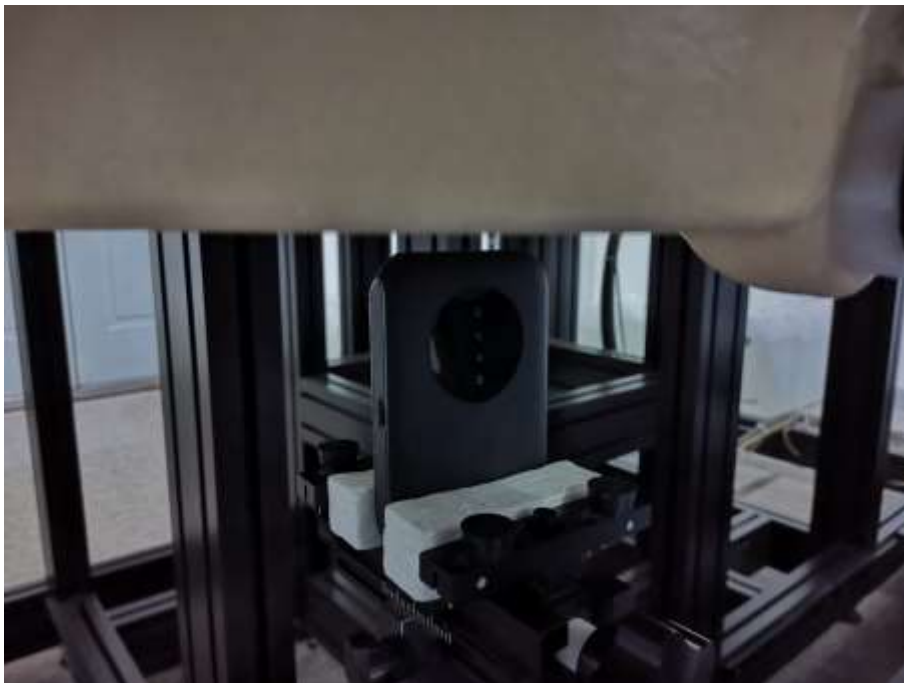

Left - 10mm

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 66 of 93



Right - 10mm



Top - 10mm

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 67 of 93



Bottom - 10mm

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 68 of 93

## 7.3 System Verification Plots

System Validation for 750MHz Head \_2020-11-27

DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN:1055

Procedure Name: D750 Dipole

Communication System: UID 0, CW (0); Frequency: 750 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 41.522$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(10.16, 10.16, 10.16) @ 750 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**D750/D750 Dipole/Area Scan (81x181x1): Interpolated grid:** dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.83 W/kg

**D750/D750 Dipole/Zoom Scan (5x5x7)/Cube 0: Measurement grid:** dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.28 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 3.28 W/kg

**SAR(1 g) = 2.09 W/kg; SAR(10 g) = 1.35 W/kg**

Smallest distance from peaks to all points 3 dB below = 16.7 mm

Ratio of SAR at M2 to SAR at M1 = 63%

Maximum value of SAR (measured) = 2.83 W/kg

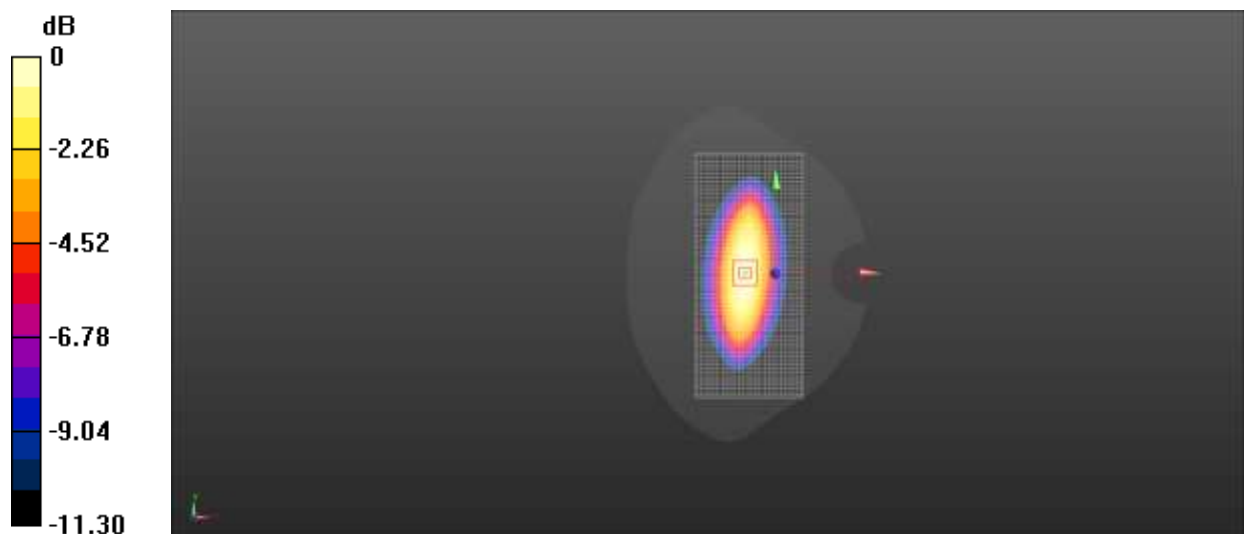

0 dB = 2.83 W/kg = 4.52 dBW/kg

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 69 of 93

## System Validation for 850MHz Head \_2020-11-27

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN: 4d061

Procedure Name: D835 Dipole

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 835$  MHz;  $\sigma = 0.931$  S/m;  $\epsilon_r = 41.461$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(9.79, 9.79, 9.79) @ 835 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**D835/D835 Dipole/Area Scan (81x181x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 3.19 W/kg

**D835/D835 Dipole/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 51.50 V/m; Power Drift = -0.00 dB



Peak SAR (extrapolated) = 3.70 W/kg

**SAR(1 g) = 2.33 W/kg; SAR(10 g) = 1.48 W/kg**

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 62.3%

Maximum value of SAR (measured) = 3.19 W/kg

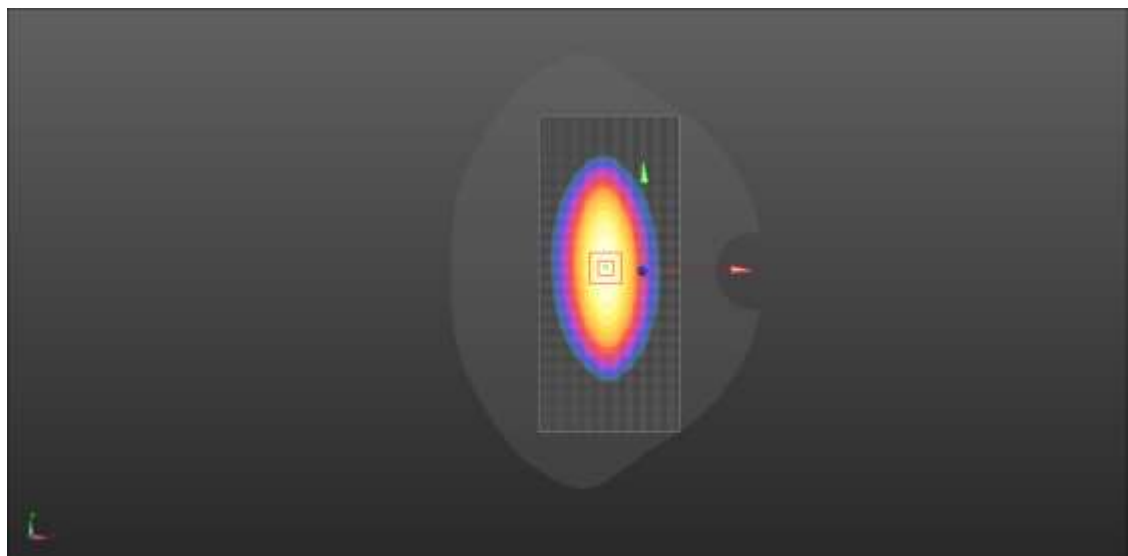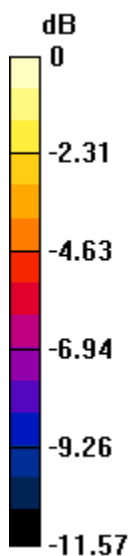

0 dB = 3.19 W/kg = 5.04 dBW/kg

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 70 of 93

## System Validation for 1800MHz Head \_2020-11-28

DUT: Dipole 1800 MHz D1800V2; Type: D1800V2; Serial: D1800V2 - SN: 2d148

Procedure Name: D1800 Dipole

Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.364$  S/m;  $\epsilon_r = 38.926$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(8.45, 8.45, 8.45) @ 1800 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**D1800/D1800 Dipole/Area Scan (61x121x1): Interpolated grid:** dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 14.3 W/kg

**D1800/D1800 Dipole/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 85.33 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 17.6 W/kg

**SAR(1 g) = 9.32 W/kg; SAR(10 g) = 4.77 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 14.0 W/kg

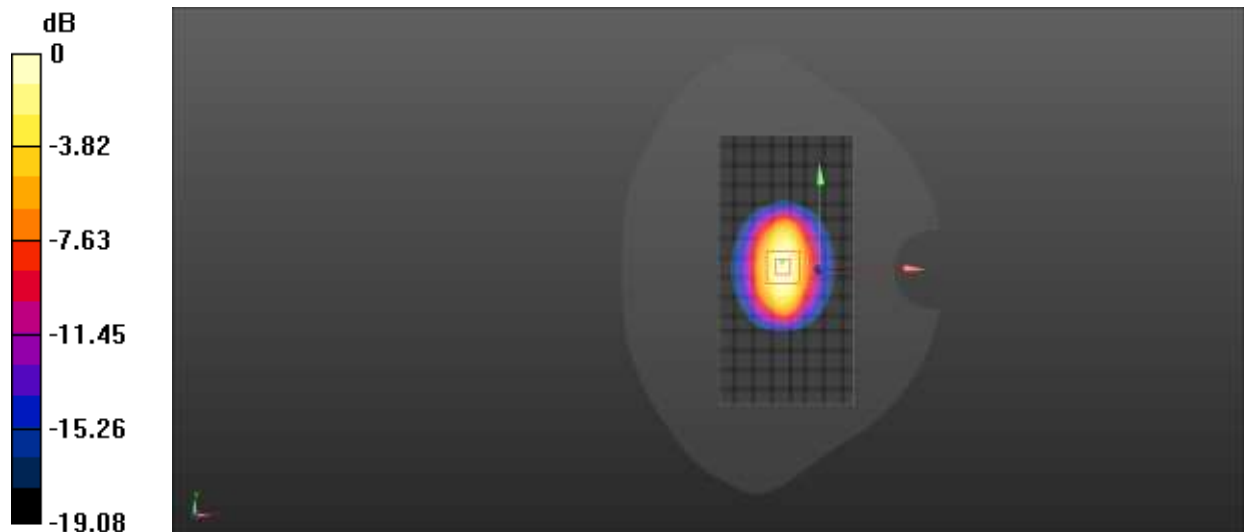

0 dB = 14.0 W/kg = 11.46 dBW/kg

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 71 of 93

## System Validation for 1900MHz Head \_2020-11-29

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN: 5d092

Procedure Name: D1900 Dipole

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.423$  S/m;  $\epsilon_r = 39.291$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(8.07, 8.07, 8.07) @ 1900 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**D1900/D1900 Dipole/Area Scan (61x121x1): Interpolated grid:** dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 16.4 W/kg

**D1900/D1900 Dipole/Zoom Scan (5x5x7)/Cube 0: Measurement grid:** dx=8mm, dy=8mm, dz=5mm

Reference Value = 88.48 V/m; Power Drift = 0.05 dB



Peak SAR (extrapolated) = 20.0 W/kg

**SAR(1 g) = 10.4 W/kg; SAR(10 g) = 5.27 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.4%

Maximum value of SAR (measured) = 16.2 W/kg

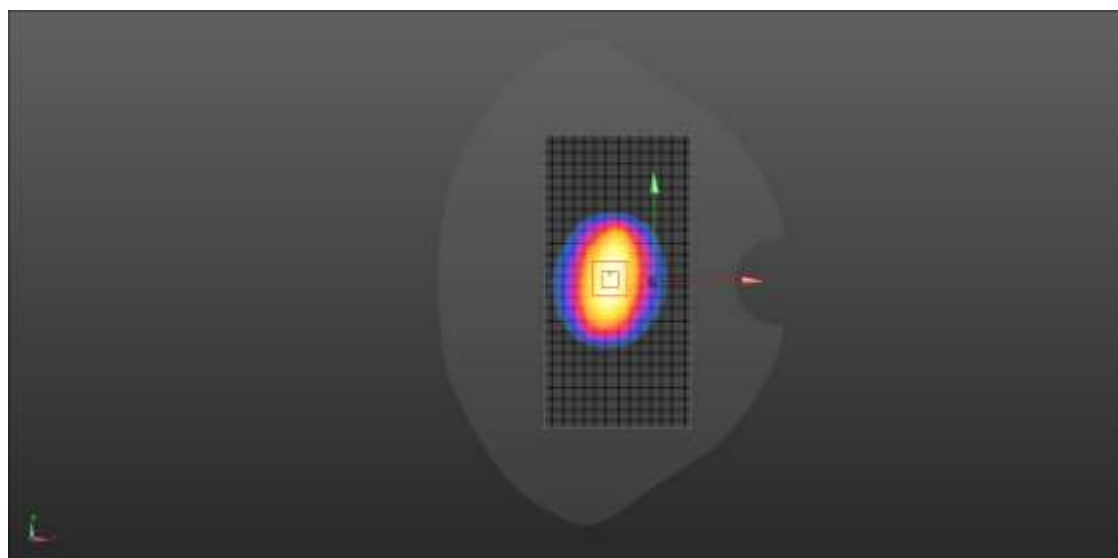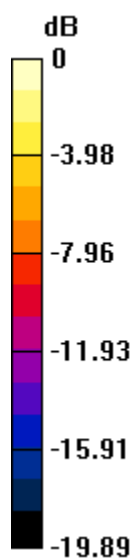

0 dB = 16.2 W/kg = 12.10 dBW/kg

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 72 of 93

## System Validation for 2450MHz Head \_2020-11-30

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:723

Procedure Name: D2450 Dipole

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.872$  S/m;  $\epsilon_r = 40.325$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(7.65, 7.65, 7.65) @ 2450 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**D2450/D2450 Dipole/Area Scan (61x121x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 22.3 W/kg

**D2450/D2450 Dipole/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.13 V/m; Power Drift = 0.02 dB



Peak SAR (extrapolated) = 27.9 W/kg

**SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.1 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 48.1%

Maximum value of SAR (measured) = 21.8 W/kg

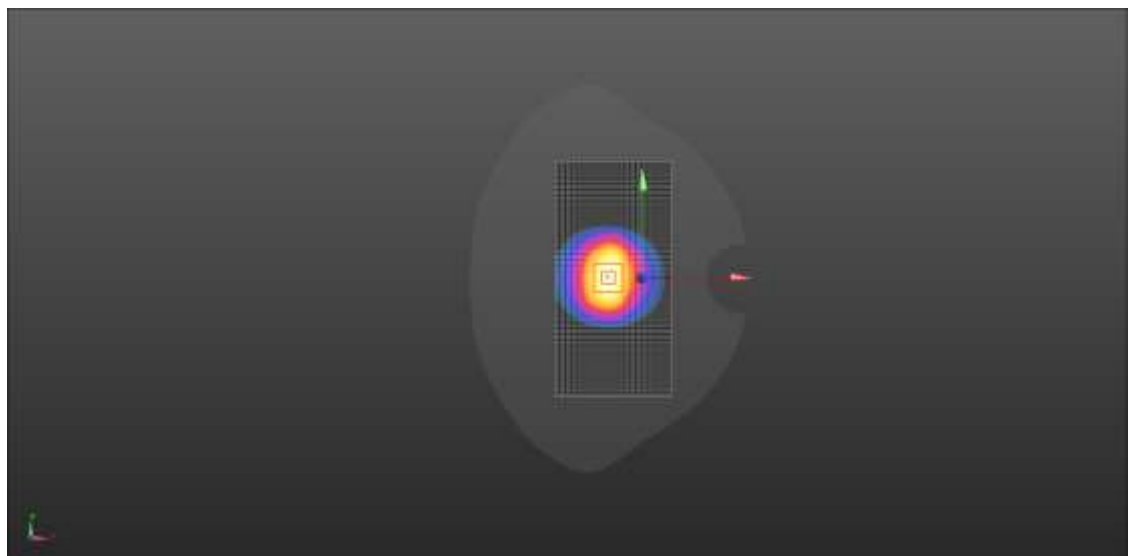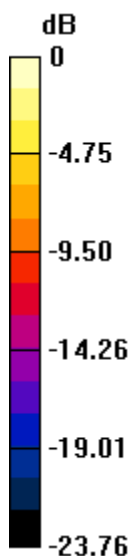

0 dB = 21.8 W/kg = 13.38 dBW/kg



# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 73 of 93

## System Validation for 2600MHz Head \_2020-12-01

DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN:1142

Procedure Name: D2600 Dipole

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.931$  S/m;  $\epsilon_r = 39.325$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(7.45, 7.45, 7.45) @ 2600 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**D2600/D2600 Dipole/Area Scan (61x121x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 23.0 W/kg

**D2600/D2600 Dipole/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.44 V/m; Power Drift = 0.02 dB



Peak SAR (extrapolated) = 29.0 W/kg

**SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.12 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 46.7%

Maximum value of SAR (measured) = 23.1 W/kg

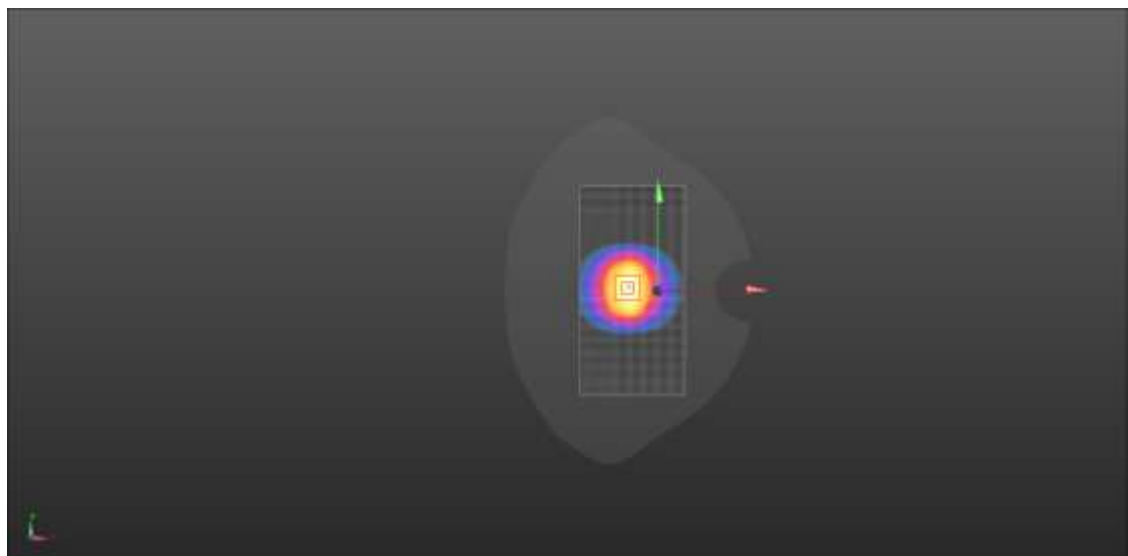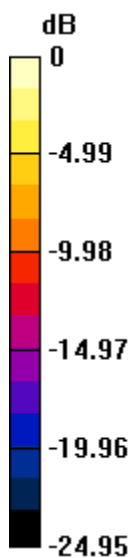

0 dB = 23.1 W/kg = 13.64 dBW/kg

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 74 of 93

## System Validation for 5200MHz Head \_2020-12-03

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1061

Procedure Name: D5200 Dipole

Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.835$  S/m;  $\epsilon_r = 34.532$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(5.53, 5.53, 5.53) @ 5200 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**D5200/D5200 Dipole/Area Scan (91x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 16.2 W/kg

**D5200/D5200 Dipole /Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 43.96 V/m; Power Drift = 0.16 dB



Peak SAR (extrapolated) = 30.8 W/kg

**SAR(1 g) = 7.56 W/kg; SAR(10 g) = 2.15 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 14.5 W/kg

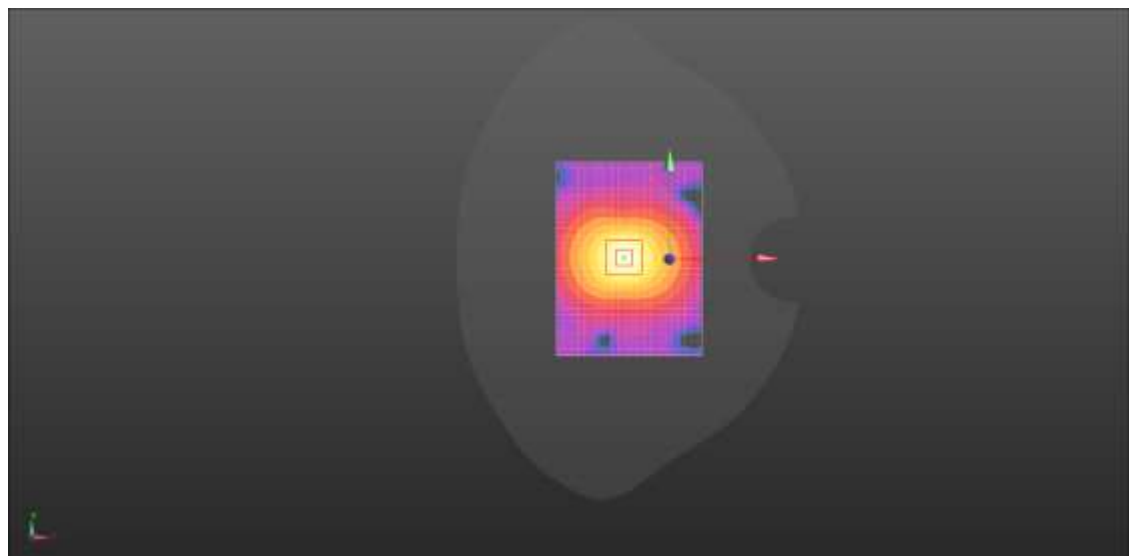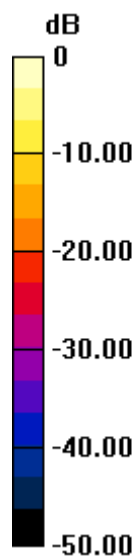

0 dB = 14.5 W/kg = 11.61 dBW/kg

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 75 of 93

## System Validation for 5800MHz Head \_2020-12-03

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1061

Procedure Name: D5800 Dipole

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.226$  S/m;  $\epsilon_r = 34.169$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(4.75, 4.75, 4.75) @ 5800 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**D5800/D5800 Dipole/Area Scan (91x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 17.6 W/kg

**D5800/D5800 Dipole/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 42.26 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 37.5 W/kg

**SAR(1 g) = 8.26 W/kg; SAR(10 g) = 2.29 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 51.2%

Maximum value of SAR (measured) = 20.9 W/kg

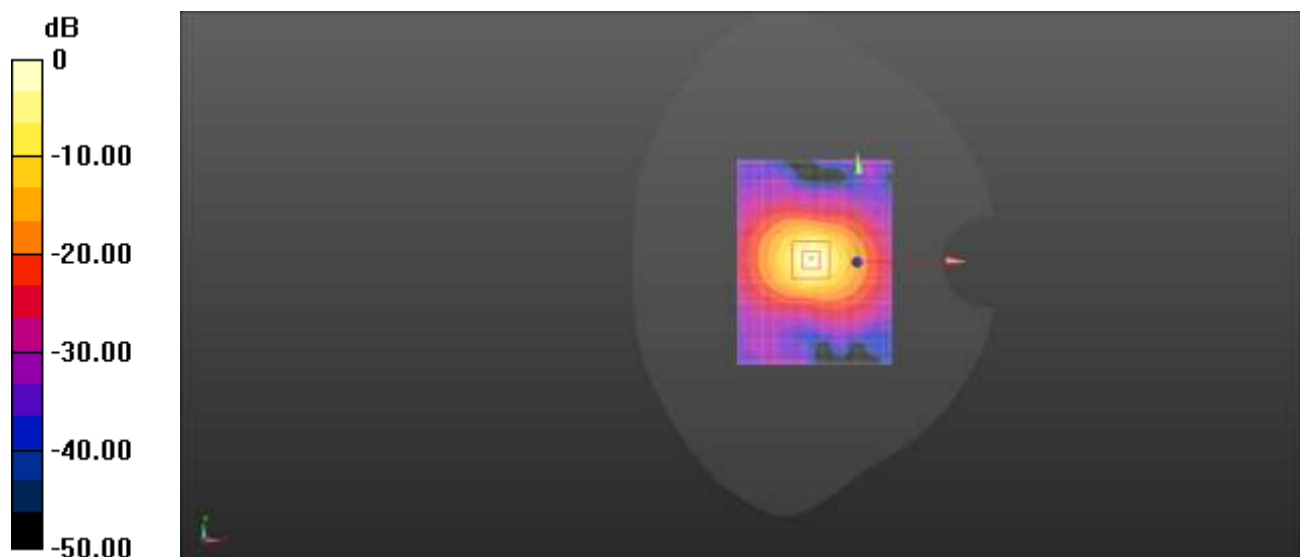

0 dB = 20.9 W/kg = 13.20 dBW/kg

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 76 of 93

## 7.4 Highest SAR Test Plots

Meas. 1 DUT: R800A; Type: Tablet; Serial: /

Procedure Name: Body Front

Communication System: UID 0, GPRS 4TX (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.909$  S/m;  $\epsilon_r = 41.608$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(9.79, 9.79, 9.79) @ 848.8 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**GSM850 Body Front/Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.23 W/kg

**GSM850 Body Front/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.04 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.916 W/kg; SAR(10 g) = 0.609 W/kg

Smallest distance from peaks to all points 3 dB below = 21.5 mm

Ratio of SAR at M2 to SAR at M1 = 63.5%

Maximum value of SAR (measured) = 1.22 W/kg

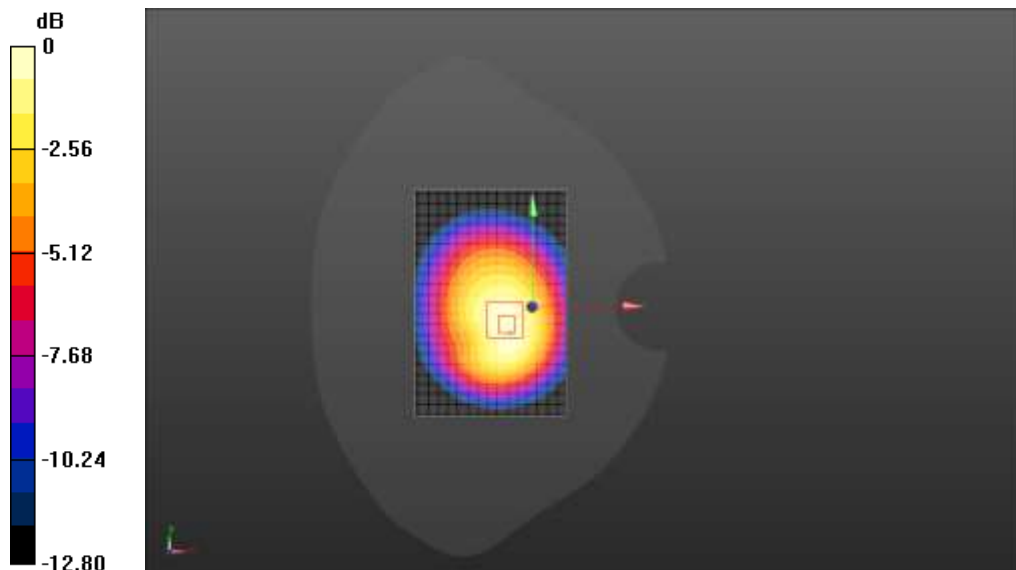

$$0 \text{ dB} = 1.22 \text{ W/kg} = 0.86 \text{ dBW/kg}$$

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 77 of 93

**Meas. 2 DUT: R800A; Type: Tablet; Serial: /**

**Procedure Name: Body Front**

Communication System: UID 0, GPRS 4TX (0); Frequency: 1880 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.421$  S/m;  $\epsilon_r = 39.267$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(8.07, 8.07, 8.07) @ 1880 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**GSM1900 Body Front/Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.08 W/kg

**GSM1900 Body Front /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.588 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.23 W/kg

**SAR(1 g) = 0.687 W/kg; SAR(10 g) = 0.368 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 1.03 W/kg

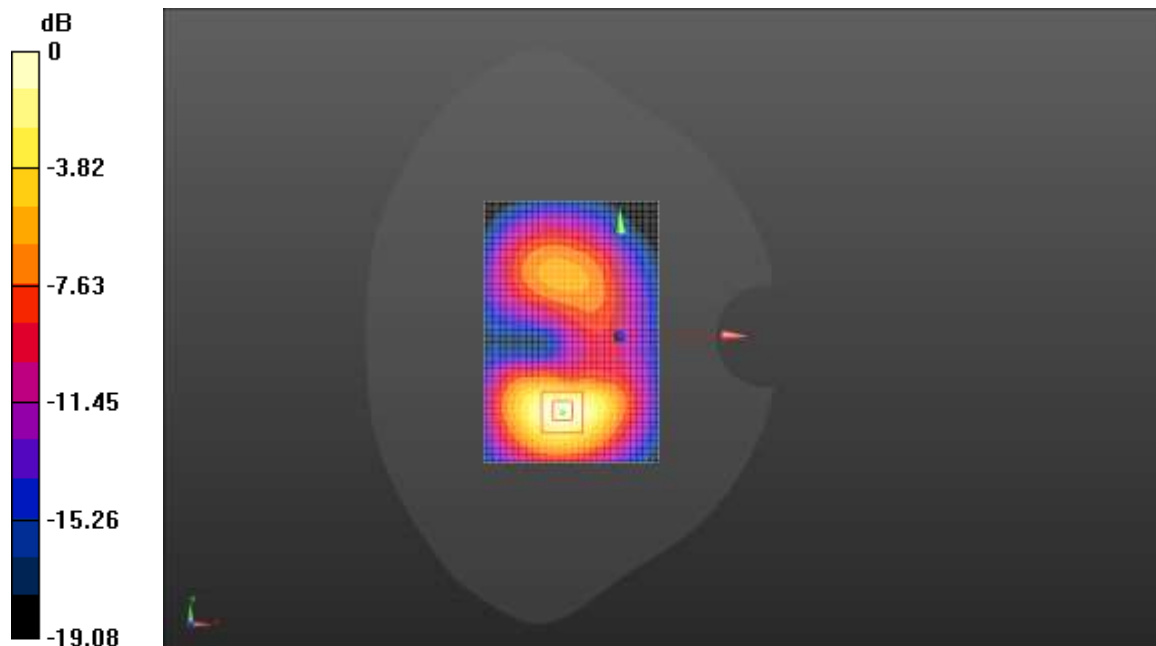

0 dB = 1.03 W/kg = 0.13 dBW/kg

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 78 of 93

**Meas. 3 DUT: R800A; Type: Tablet; Serial: /**

**Procedure Name: Body Left**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.421$  S/m;  $\epsilon_r = 39.267$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(8.36, 8.36, 8.36) @ 1880 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WCDMA B2 Body Left /Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.52 W/kg

**WCDMA B2 Body Left/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.10 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 1.63 W/kg

**SAR(1 g) = 0.892 W/kg; SAR(10 g) = 0.473 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 1.34 W/kg

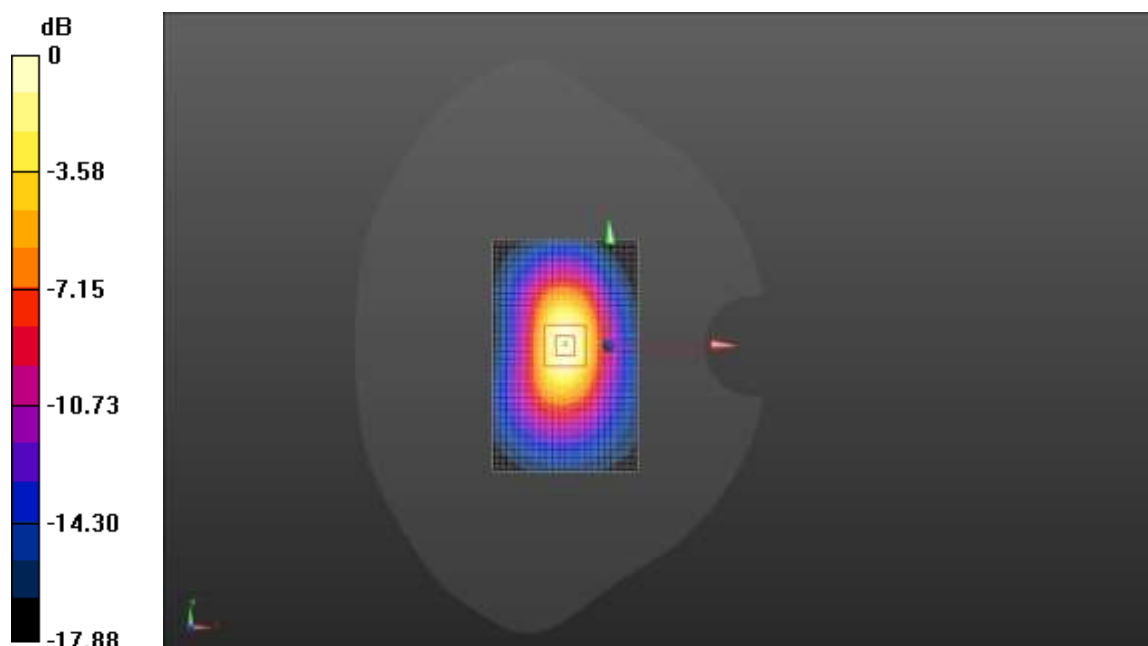

0 dB = 1.34 W/kg = 1.27 dBW/kg

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 79 of 93

**Meas. 4 DUT: R800A; Type: Tablet; Serial: /**

**Procedure Name: Body Left**

Communication System: UID 0, WCDMA (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1712.4$  MHz;  $\sigma = 1.346$  S/m;  $\epsilon_r = 38.873$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(8.75, 8.75, 8.75) @ 1712.4 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WCDMA B4 Body Left/Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.50 W/kg

**WCDMA B4 Body Left/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.14 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 1.60 W/kg

**SAR(1 g) = 0.928 W/kg; SAR(10 g) = 0.499 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.3%

Maximum value of SAR (measured) = 1.33 W/kg

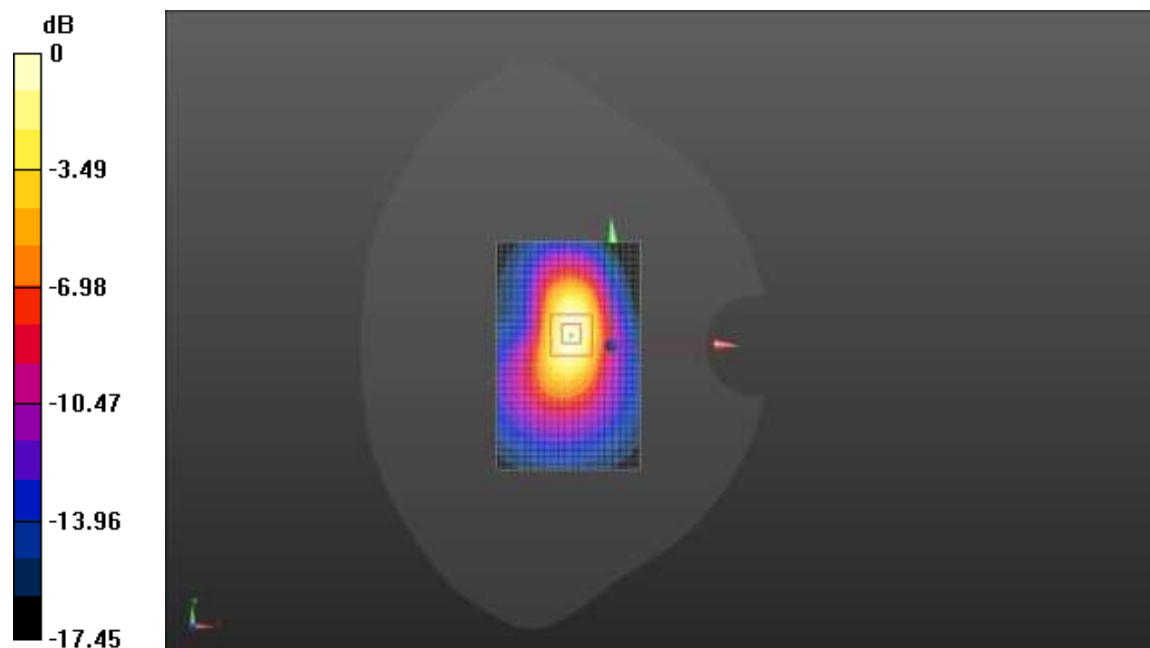

0 dB = 1.33 W/kg = 1.24 dBW/kg

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 80 of 93

**Meas. 5 DUT: R800A; Type: Tablet; Serial: /**

**Procedure Name: Body Front**

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.932$  S/m;  $\epsilon_r = 41.462$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(9.93, 9.93, 9.93) @ 836.4 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WCDMA B5 Body Front/Area Scan (51x81x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.791 W/kg

**WCDMA B5 Body Front/Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 22.81 V/m; Power Drift = -0.20 dB



Peak SAR (extrapolated) = 0.892 W/kg

**SAR(1 g) = 0.580 W/kg; SAR(10 g) = 0.383 W/kg**

Smallest distance from peaks to all points 3 dB below = 20.2 mm

Ratio of SAR at M2 to SAR at M1 = 63.2%

Maximum value of SAR (measured) = 0.772 W/kg

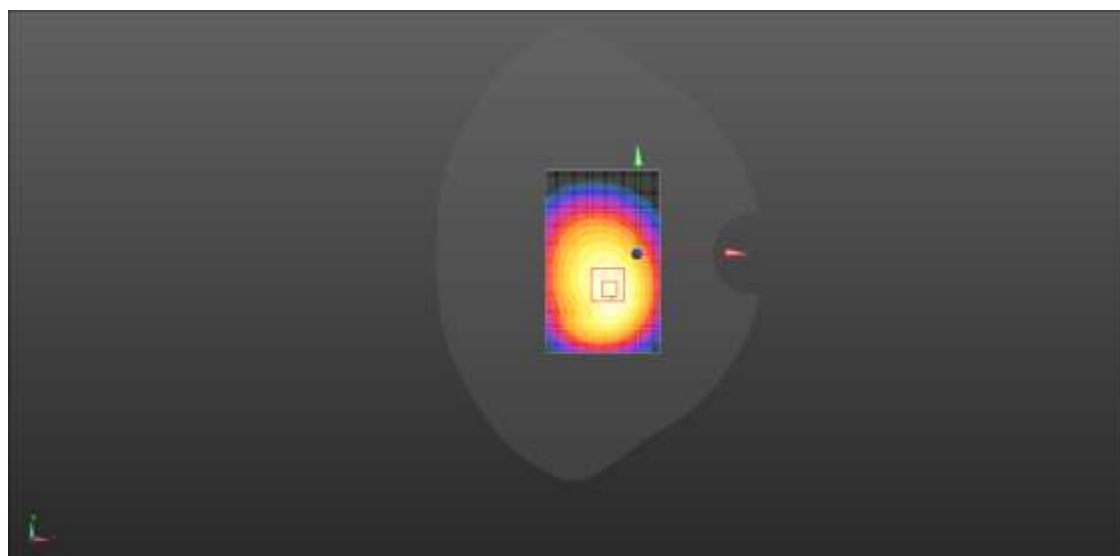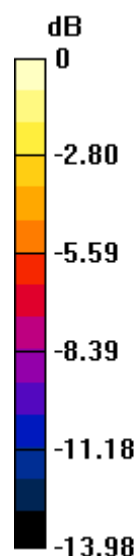

0 dB = 0.772 W/kg = -1.12 dBW/kg



# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 81 of 93

**Meas. 6 DUT: R800A; Type: Tablet; Serial: /**

**Procedure Name: Body Left 1RB**

Communication System: UID 0, LTE-FDD (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.423$  S/m;  $\epsilon_r = 39.291$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(8.36, 8.36, 8.36) @ 1900 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B2 Body Left 1RB/Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.83 W/kg

**LTE B2 Body Left 1RB /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.89 V/m; Power Drift = -0.20 dB


Peak SAR (extrapolated) = 1.94 W/kg

**SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.556 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.1%

Maximum value of SAR (measured) = 1.57 W/kg

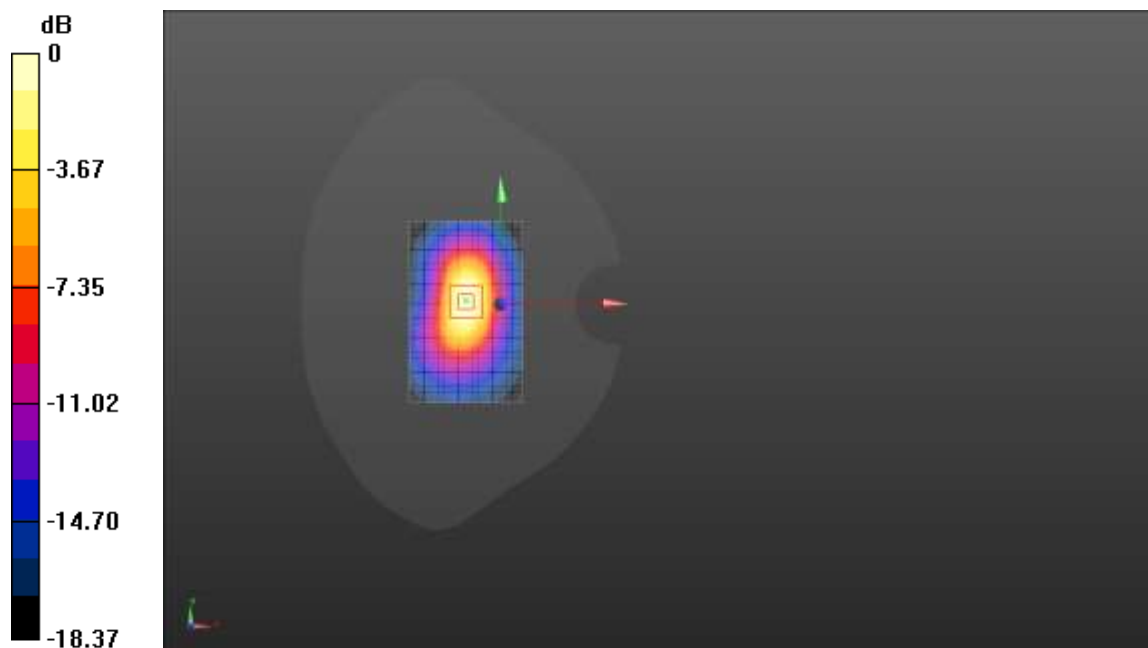

0 dB = 1.57 W/kg = 1.96 dBW/kg

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 82 of 93

**Meas. 7 DUT: R800A; Type: Tablet; Serial: /**

**Procedure Name: Body Left 1RB**

Communication System: UID 0, LTE-FDD (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1720$  MHz;  $\sigma = 1.347$  S/m;  $\epsilon_r = 38.879$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(8.75, 8.75, 8.75) @ 1720 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B4/Body Left 1RB /Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm.

Maximum value of SAR (interpolated) = 1.68 W/kg

**LTE B4/Body Left 1RB/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.825 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 1.79 W/kg

**SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.544 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 57.8%

Maximum value of SAR (measured) = 1.47 W/kg

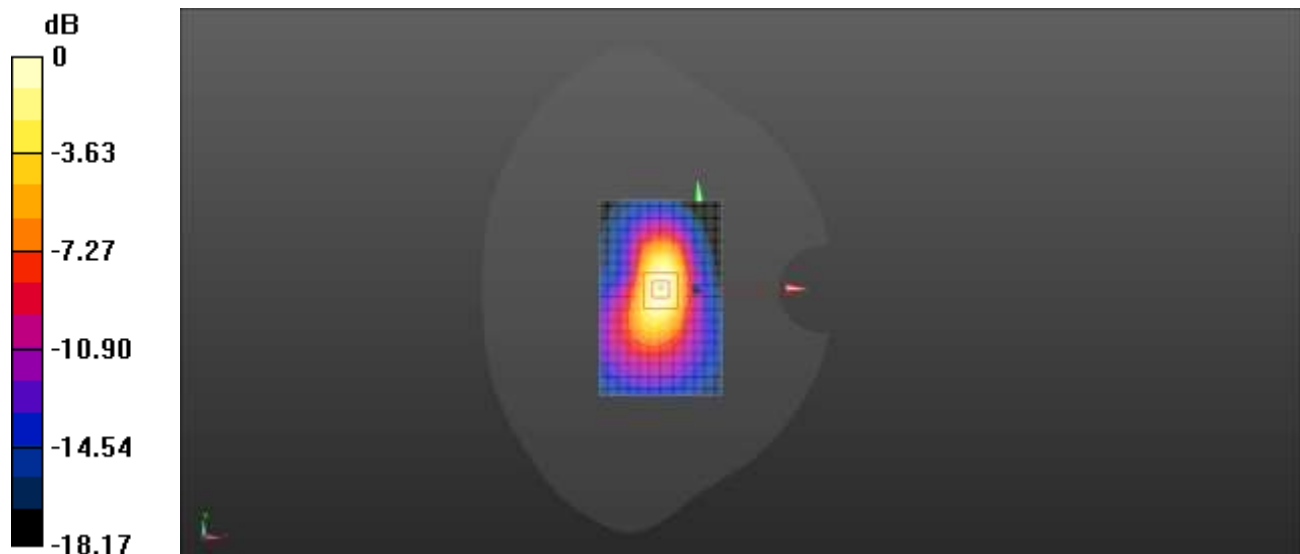

0 dB = 1.47 W/kg = 1.67 dBW/kg

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 83 of 93

**Meas. 8 DUT: R800A; Type: Tablet; Serial: /**

**Procedure Name: Body Back 1RB**

Communication System: UID 0, LTE-FDD (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 844$  MHz;  $\sigma = 0.931$  S/m;  $\epsilon_r = 41.461$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(9.93, 9.93, 9.93) @ 844 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B5 Body Back 1RB/Area Scan (51x81x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.116 W/kg

**LTE B5 Body Back 1RB/Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 7.109 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.155 W/kg

**SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.042 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 48.2%

Maximum value of SAR (measured) = 0.108 W/kg

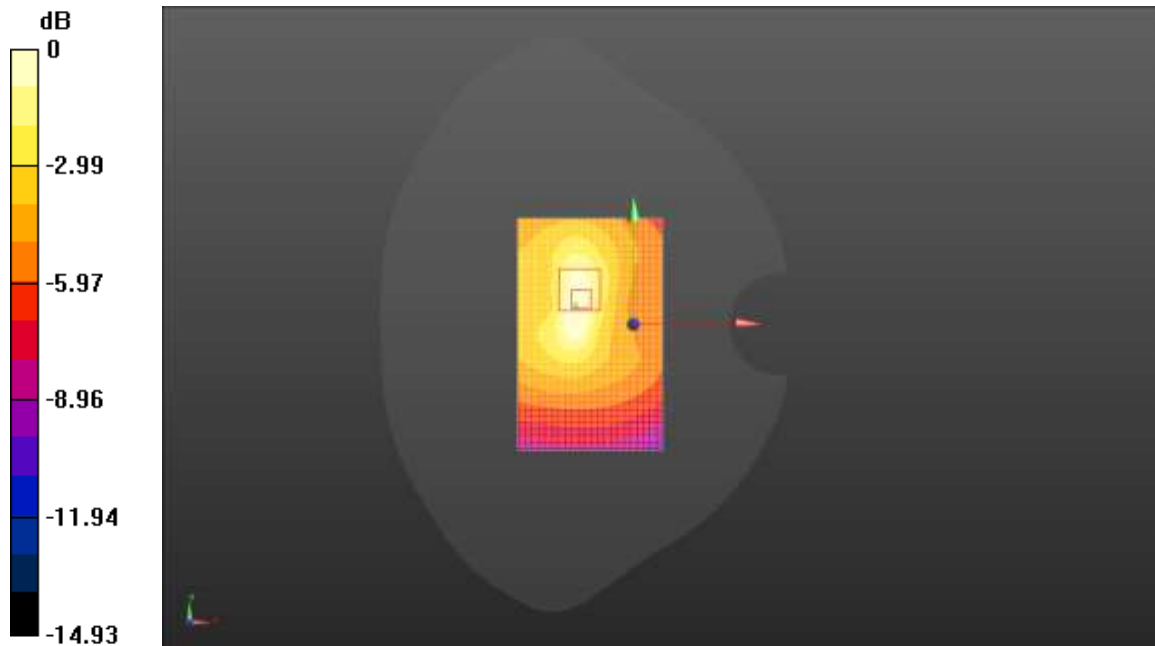

0 dB = 0.108 W/kg = -9.67 dBW/kg

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 84 of 93

**Meas. 9 DUT: R800A; Type: Tablet; Serial: /**

**Procedure Name: Body Left 1RB**

Communication System: UID 0, LTE-FDD (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2510$  MHz;  $\sigma = 1.881$  S/m;  $\epsilon_r = 39.386$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(7.47, 7.47, 7.47) @ 2510 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B7 Body Left 1RB/Area Scan (61x101x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 0.769 W/kg

**LTE B7 Body Left 1RB /Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 8.809 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 1.18 W/kg

**SAR(1 g) = 0.445 W/kg; SAR(10 g) = 0.191 W/kg**

Smallest distance from peaks to all points 3 dB below = 3 mm

Ratio of SAR at M2 to SAR at M1 = 47.8%

Maximum value of SAR (measured) = 0.738 W/kg

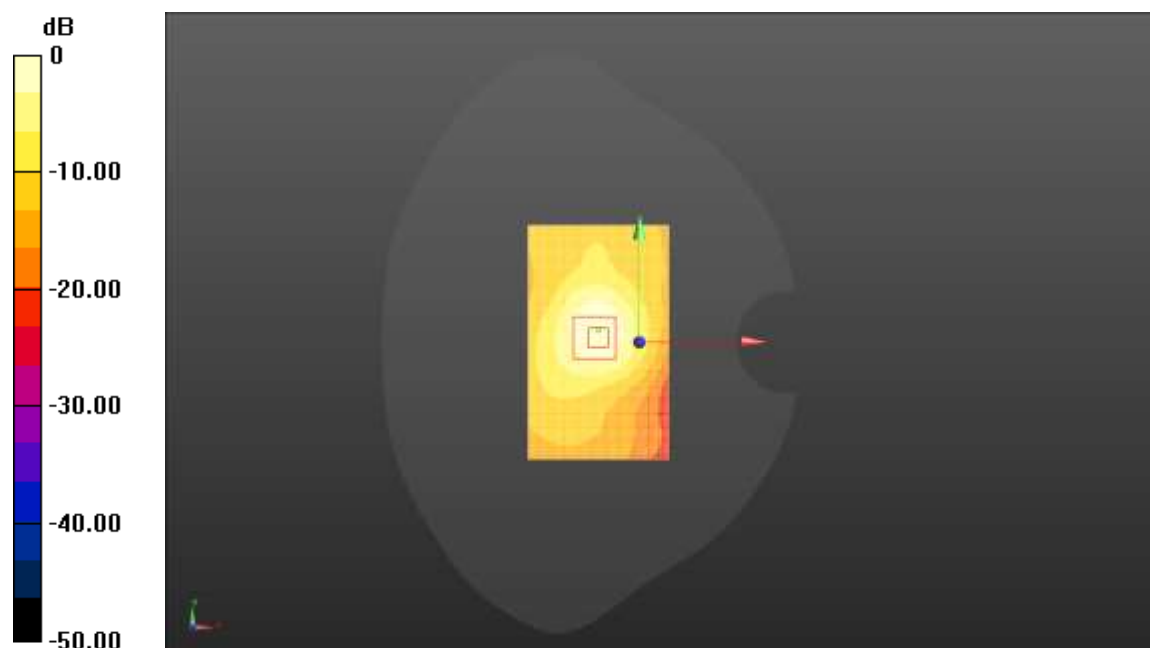

0 dB = 0.738 W/kg = -1.32 dBW/kg

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 85 of 93

**Meas. 10 DUT: R800A; Type: Tablet; Serial: /**

**Procedure Name: Body Front 1RB**

Communication System: UID 0, LTE-FDD (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 711$  MHz;  $\sigma = 0.911$  S/m;  $\epsilon_r = 41.378$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(10.16, 10.16, 10.16) @ 711 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE Band 12 Body Front 1RB/Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.530 W/kg

**LTE Band 12 Body Front 1RB/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.85 V/m; Power Drift = -0.13 dB



Peak SAR (extrapolated) = 0.606 W/kg

**SAR(1 g) = 0.396 W/kg; SAR(10 g) = 0.261 W/kg**

Smallest distance from peaks to all points 3 dB below = 20 mm

Ratio of SAR at M2 to SAR at M1 = 63.9%

Maximum value of SAR (measured) = 0.523 W/kg

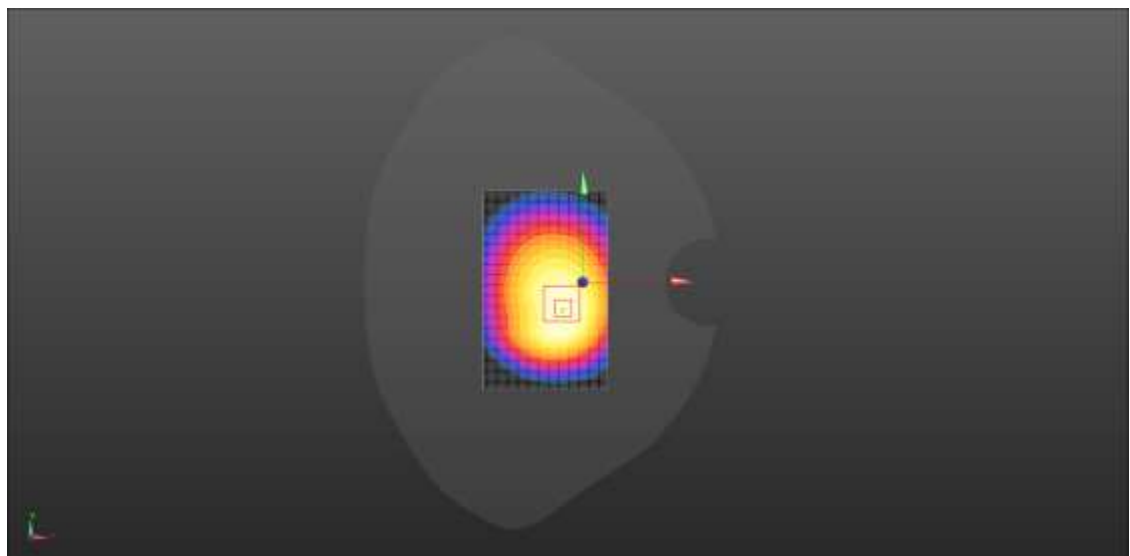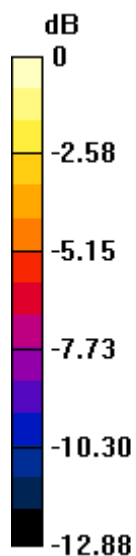

0 dB = 0.523 W/kg = -2.81 dBW/kg

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 86 of 93

**Meas. 11 DUT: R800A; Type: Tablet; Serial: /**

**Procedure Name: Body LEFT 10mm 1RB**

Communication System: UID 0, TDD LTE (0); Frequency: 2506 MHz; Duty Cycle: 1:1.57979

Medium parameters used (interpolated):  $f = 2506$  MHz;  $\sigma = 1.871$  S/m;  $\epsilon_r = 39.376$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(7.47, 7.47, 7.47) @ 2506 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B41 Body Left 1RB/Area Scan (61x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.433 W/kg

**LTE B41 Body Left 1RB//Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.023 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.541 W/kg

**SAR(1 g) = 0.251 W/kg; SAR(10 g) = 0.116 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 46.3%

Maximum value of SAR (measured) = 0.423 W/kg

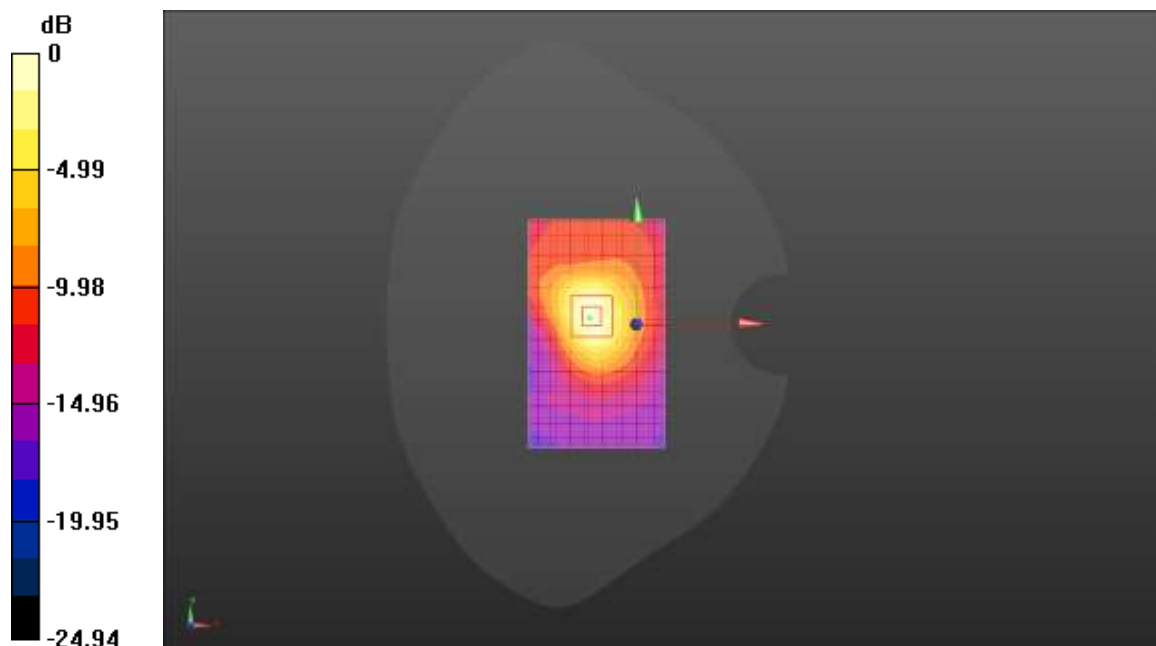

0 dB = 0.423 W/kg = -3.74 dBW/kg

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 87 of 93

**Meas. 12 DUT: R800A; Type: Tablet; Serial: /**

**Procedure Name: Body Left 1RB**

Communication System: UID 0, LTE-FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.357$  S/m;  $\epsilon_r = 38.851$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(8.75, 8.75, 8.75) @ 1745 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B66/Body Left 1RB//Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.70 W/kg

**LTE B66/Body Left 1RB//Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.14 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 1.87 W/kg

**SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.567 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 57%

Maximum value of SAR (measured) = 1.56 W/kg

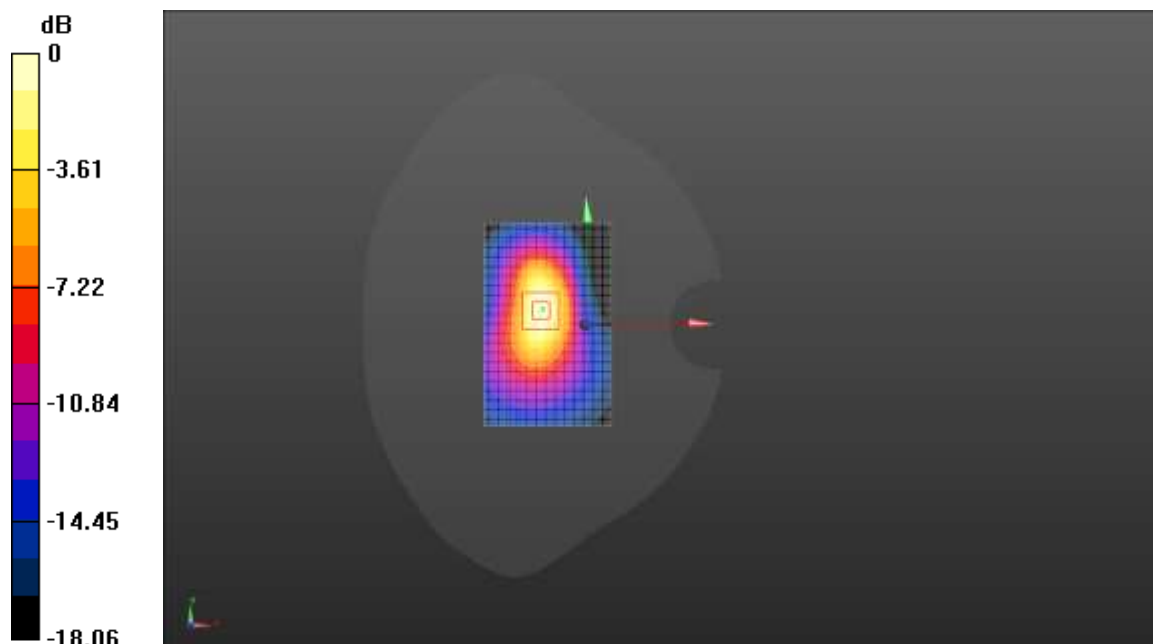

$$0 \text{ dB} = 1.56 \text{ W/kg} = 1.93 \text{ dBW/kg}$$

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 88 of 93

**Meas. 13 DUT: R800A; Type: Tablet; Serial: /**

**Procedure Name: Bottom Antenna0**

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.869$  S/m;  $\epsilon_r = 40.316$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(7.65, 7.65, 7.65) @ 2437 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WLAN 2.4G 11b Body Bottom Antenna0/Area Scan (61x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0354 W/kg

**WLAN 2.4G 11b Body Bottom Antenna0/Zoom Scan (7x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.225 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.0440 W/kg

**SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.00965 W/kg**

Smallest distance from peaks to all points 3 dB below=12.2

Ratio of SAR at M2 to SAR at M1 = 39.6%

Maximum value of SAR (measured) = 0.0351 W/kg

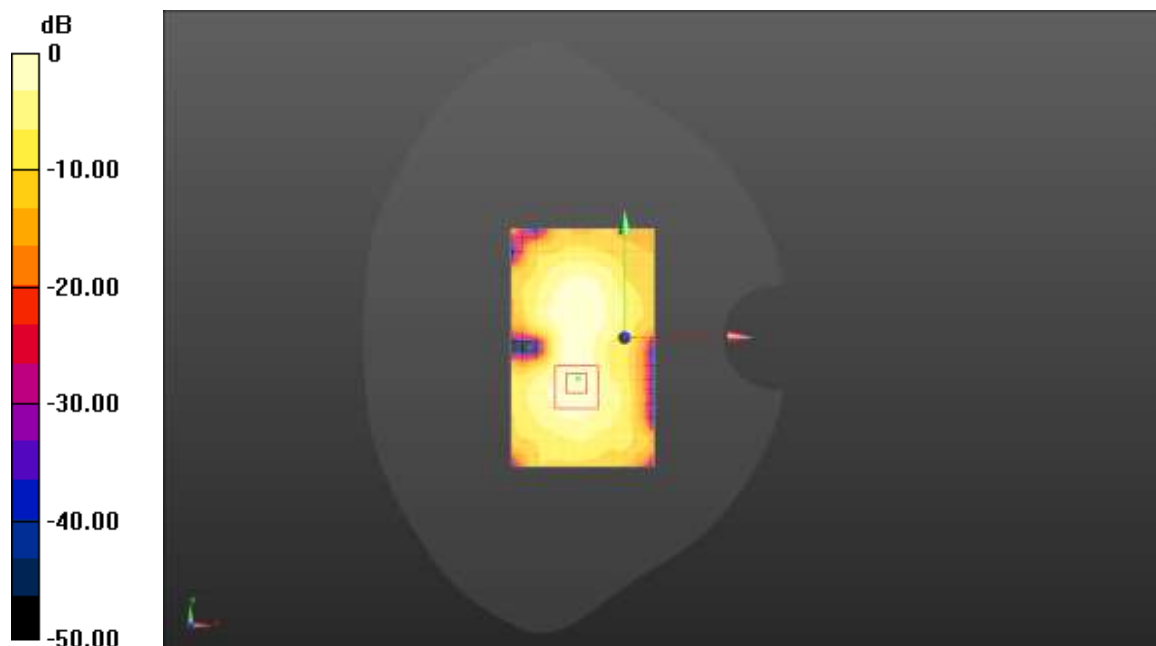

0 dB = 0.0351 W/kg = -14.55 dBW/kg



# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 89 of 93

**Meas. 14 DUT: R800A; Type: Tablet; Serial: /**

**Procedure Name: Body Top Antenna1**

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.869$  S/m;  $\epsilon_r = 40.316$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(7.65, 7.65, 7.65) @ 2437 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WLAN 2.4G 11b /Body Top Antenna1/Area Scan (61x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm**

Maximum value of SAR (interpolated) = 0.0729 W/kg

**WLAN 2.4G 11b /Body Top Antenna1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.176 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.0880 W/kg

**SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.023 W/kg**

Smallest distance from peaks to all points 3 dB below=13.3

Ratio of SAR at M2 to SAR at M1 = 52.2%

Maximum value of SAR (measured) = 0.0711 W/kg

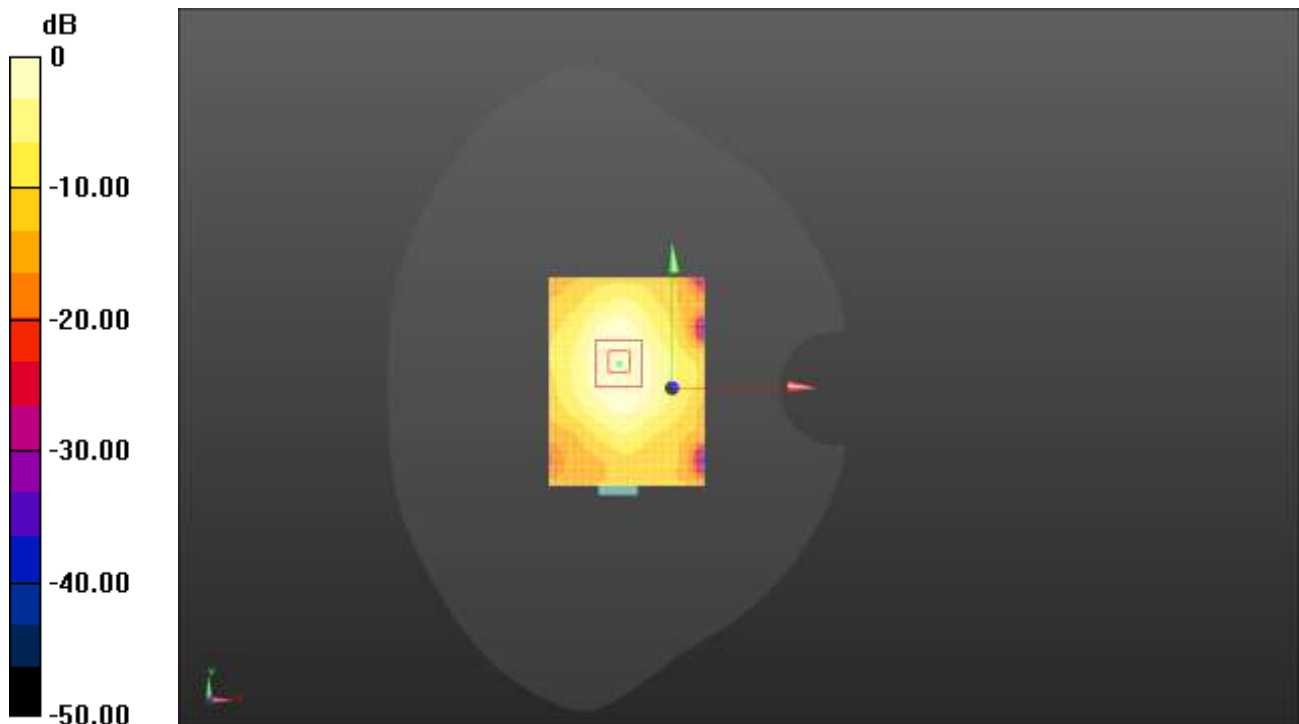

0 dB = 0.0711 W/kg = -11.48 dBW/kg

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 90 of 93

**Meas. 15 DUT: R800A; Type: Tablet; Serial: /**

**Procedure Name:Body Bottom Antenna0**

Communication System: UID 0, WIFI (0); Frequency: 5180 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5180$  MHz;  $\sigma = 4.826$  S/m;  $\epsilon_r = 34.547$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(5.53, 5.53, 5.53) @ 5180 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WLAN 5.2G 11ac /Body Bottom Antenna0/Area Scan (91x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0275 W/kg

**WLAN 5.2G 11ac /Body Bottom Antenna0/Zoom Scan (10x10x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.7560 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.0940 W/kg

**SAR(1 g) = 0.00492 W/kg; SAR(10 g) = 0.00172 W/kg**

Smallest distance from peaks to all points 3 dB below=12.3

Ratio of SAR at M2 to SAR at M1 = 95.8%

Maximum value of SAR (measured) = 0.0142 W/kg

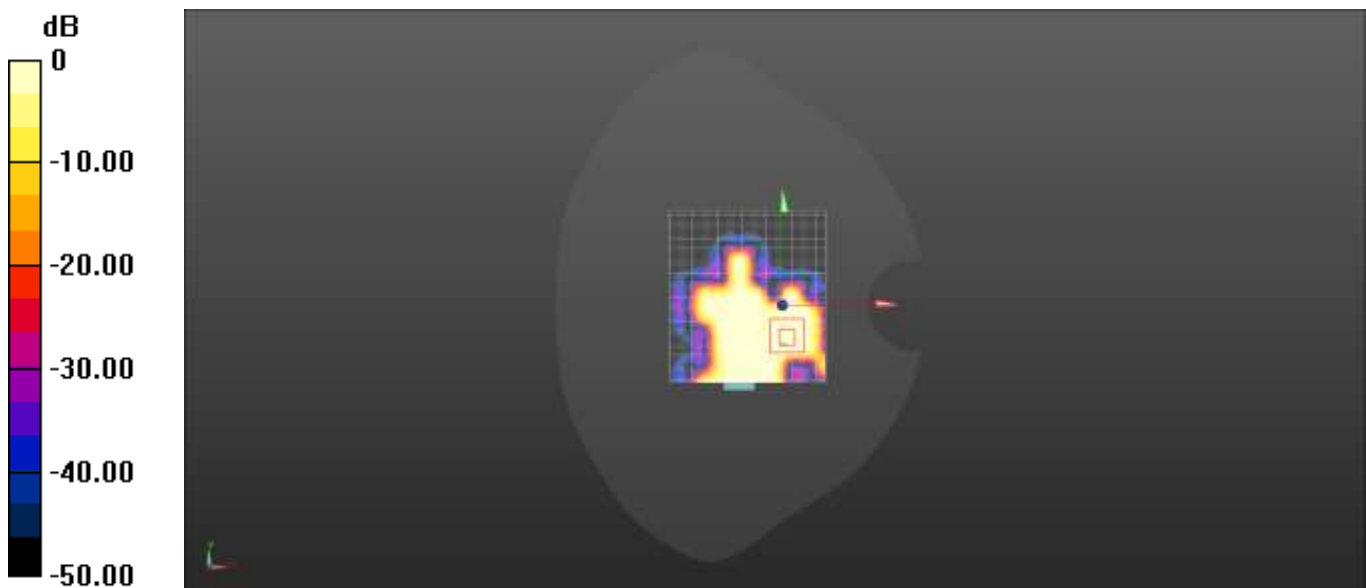

0 dB = 0.0142 W/kg = -18.48 dBW/kg

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 91 of 93

**Meas. 16 DUT: R800A; Type: Tablet; Serial: /**

**Procedure Name: Body Top Antenna1**

Communication System: UID 0, WIFI (0); Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5180$  MHz;  $\sigma = 4.826$  S/m;  $\epsilon_r = 34.547$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(5.53, 5.53, 5.53) @ 5180 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WLAN 5.2G 11ac /Body Top Antenna1/Area Scan (91x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0893 W/kg

**WLAN 5.2G 11ac /Body Top Antenna1/Zoom Scan (11x10x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.263 V/m; Power Drift = 0.201 dB


Peak SAR (extrapolated) = 0.141 W/kg

**SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.011 W/kg**

Smallest distance from peaks to all points 3 dB below:=11.8

Ratio of SAR at M2 to SAR at M1 = 63.1%

Maximum value of SAR (measured) = 0.0891 W/kg

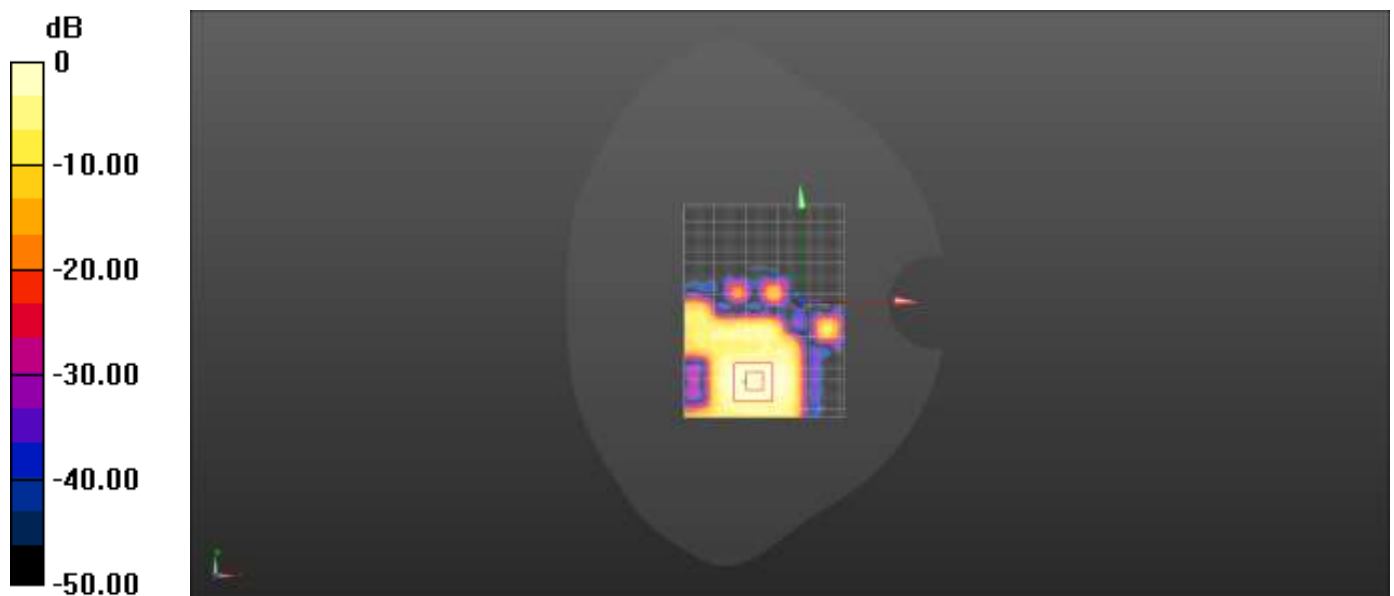

0 dB = 0.0891 W/kg = -10.50 dBW/kg

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 92 of 93

**Meas. 17 DUT: R800A; Type: Tablet; Serial: /**

**Procedure Name: Body Bottom Antenna0**

Communication System: UID 0, WIFI (0); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5825$  MHz;  $\sigma = 5.229$  S/m;  $\epsilon_r = 34.296$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(4.95, 4.95, 4.95) @ 5825 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WLAN 5.8G 11ac Body Bottom Antenna0/Area Scan (81x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.245 W/kg

**WLAN 5.8G 11ac Body Bottom Antenna0/Zoom Scan (9x11x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.405 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.345 W/kg

**SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.021 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.5%

Maximum value of SAR (measured) = 0.189 W/kg

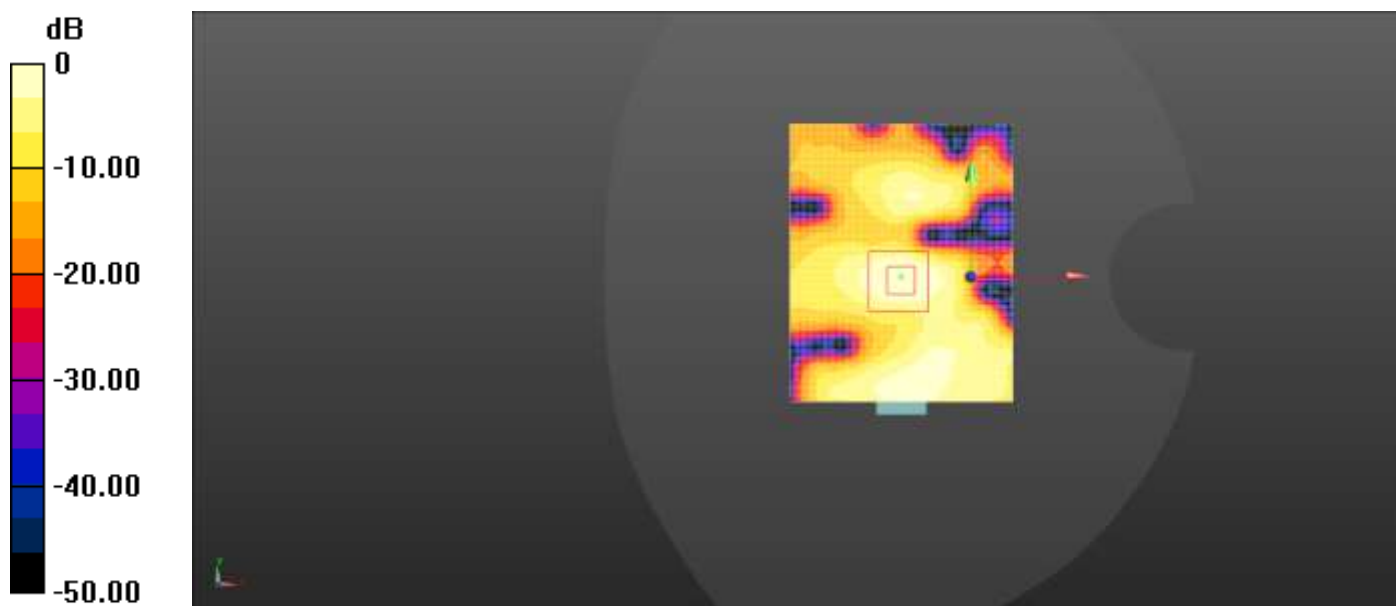

0 dB = 0.189 W/kg = -7.24 dBW/kg

# TEST REPORT

Report No.: SHE20100021-03SE

Date: 2020-12-18

Page 93 of 93

**Meas. 18 DUT: R800A; Type: Tablet; Serial: /**

**Procedure Name:Body Top Antenna1**

Communication System: UID 0, WIFI (0); Frequency: 5825 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5825$  MHz;  $\sigma = 5.229$  S/m;  $\epsilon_r = 34.296$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(4.95, 4.95, 4.95) @ 5825 MHz; Calibrated: 20/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn787; Calibrated: 20/09/30
- Phantom: SAM1; Type: QD 000 P40 CC; Serial: 1461
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WLAN 5.8G 11ac / Body Top Antenna1//Area Scan (81x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.478 W/kg

**WLAN 5.8G 11ac / Body Top Antenna1//Zoom Scan (9x11x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.074 V/m; Power Drift = 0.16 dB



Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.062 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 56.9%

Maximum value of SAR (measured) = 0.482 W/kg

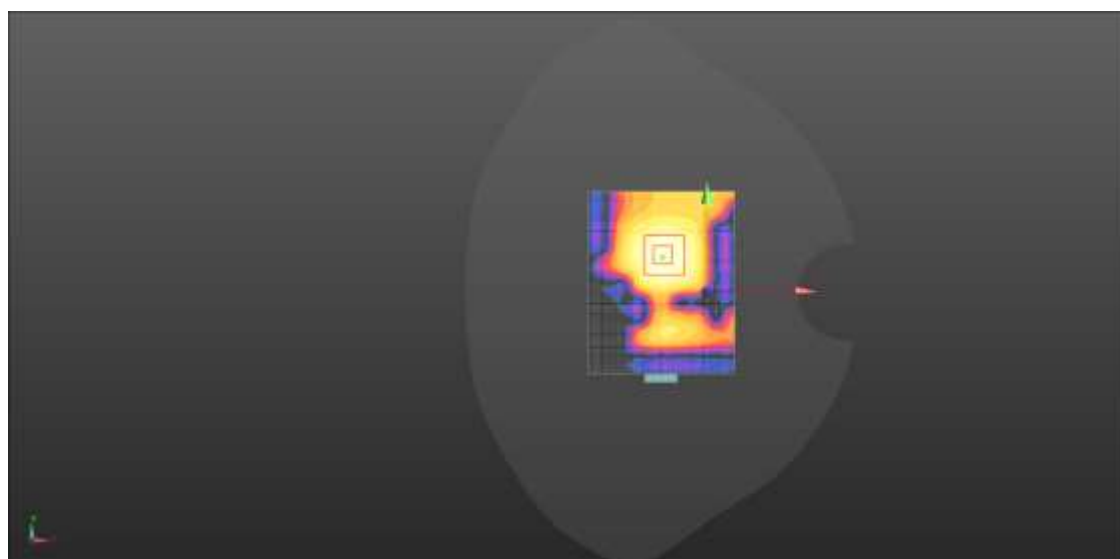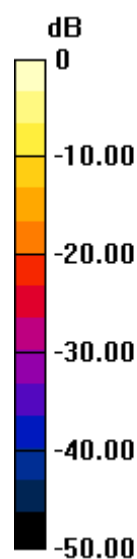

0 dB = 0.482 W/kg = -3.17 dBW/kg

\*\*\*End of the report\*\*\*