

# TEST REPORT

Product Name: Digital Signage Player  
FCC ID: 2AOQN-YM08  
Trademark: Lunzn  
Model Number: YM08  
Prepared For: Shenzhen Lunzn Technology CO., Ltd.  
Address: Room606, Gangtou Development Building, No. 133 Xuegang North Road, Bantian Street, Longgang District, Shenzhen, China  
Manufacturer: Shenzhen Lunzn Technology CO., Ltd.  
Address: Room606, Gangtou Development Building, No. 133 Xuegang North Road, Bantian Street, Longgang District, Shenzhen, China  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: 1&2/F., Building A, No.26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: Apr. 19, 2024  
Sample tested Date: Apr. 19, 2024 to May. 07, 2024  
Issue Date: May. 07, 2024  
Report No.: CTB240430024RFX  
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

**TABLE OF CONTENT**

Test Report Declaration	Page
<b>1. VERSION</b> .....	<b>4</b>
<b>2. TEST SUMMARY</b> .....	<b>5</b>
<b>3. MEASUREMENT UNCERTAINTY</b> .....	<b>6</b>
<b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....	<b>7</b>
4.1 Product Information .....	7
4.2 Test Setup Configuration .....	7
4.3 Support Equipment .....	7
4.4 Channel List .....	8
4.5 Test Mode .....	8
4.6 Test Environment .....	8
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....	<b>9</b>
5.1 Test Facility .....	9
5.2 Test Instrument Used .....	9
<b>6. AC POWER LINE CONDUCTED EMISSION</b> .....	<b>11</b>
6.1 Block Diagram Of Test Setup .....	11
6.2 Limit .....	11
6.3 Test procedure .....	11
6.4 Test Result .....	13
<b>7. RADIATED SPURIOUS EMISSION</b> .....	<b>15</b>
7.1 Block Diagram Of Test Setup .....	15
7.2 Limit .....	15
7.3 Test procedure .....	16
7.4 Test Result .....	17
<b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS</b> .....	<b>39</b>
8.1 Block Diagram Of Test Setup .....	39
8.2 Limit .....	39
8.3 Test procedure .....	39
8.4 Test Result .....	40
<b>9. CONDUCTED OUTPUT POWER</b> .....	<b>54</b>
9.1 Block Diagram Of Test Setup .....	54
9.2 Limit .....	54
9.3 Test procedure .....	54
9.4 Test Result .....	55
<b>10. 6DB OCCUPIED BANDWIDTH</b> .....	<b>56</b>
10.1 Block Diagram Of Test Setup .....	56
10.2 Limit .....	56
10.3 Test procedure .....	56
10.4 Test Result .....	57
<b>11. POWER SPECTRAL DENSITY</b> .....	<b>66</b>
11.1 Block Diagram Of Test Setup .....	66
11.2 Limit .....	66



11.3 Test procedure ..... 66  
11.4 Test Result ..... 67  
**12. ANTENNA REQUIREMENT ..... 76**  
**13. EUT TEST SETUP PHOTOGRAPHS ..... 77**

*(Note: N/A means not applicable)*

1. VERSION

Report No.	Issue Date	Description	Approved
CTB240430024RFX	May. 07, 2024	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Band edge and RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
<b>6dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
<b>Power Spectral Density</b>	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D05v02	PASS
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
<b>RF Exposure Evaluation</b>	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(18GHz-40GHz)	U=±3.4dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%

#### 4. PRODUCT INFORMATION AND TEST SETUP

##### 4.1 Product Information

Model(s):	YM08
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 16.264dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: External antenna
Antenna Gain:	WiFi (2.4G): Ant1:3.52dBi, Ant2:3.52dBi
Ratings:	AC 100-240V, 50/60Hz, 0.3A DC 12V

##### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

##### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/TypeNo.	SeriesNo.	Note
1	Monitor	DELL	SE2218HV	N/A	N/A
2	Laptop	DELL	Vostro 5490	N/A	N/A

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 3.52dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,  
 Array Gain=10log(NANT/NSS)dB=10log(2/1)=1.76dB,

So the directional gain for PSD is 5.28dBi

2) For power measurements,  
 The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 3.52dBi

NOTE: DutyCycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

#### 4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	12V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50



## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2024.07.05
4	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2024.08.11
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2024.07.05
18	Amplifier	HP	8447E	2945A02747	/	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2024.07.08

22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	/	2024.07.05
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2024.07.05

### Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	/	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SM AJ-12M	18091905	/	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	/	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
7	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

### Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
4	Amplifier	HP	8447E	2945A02747	/	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-N MS-80 NI	/	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-N MS-20 NI	/	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-S MS-20 NI	/	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100- NMS-300 NI	/	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
11	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

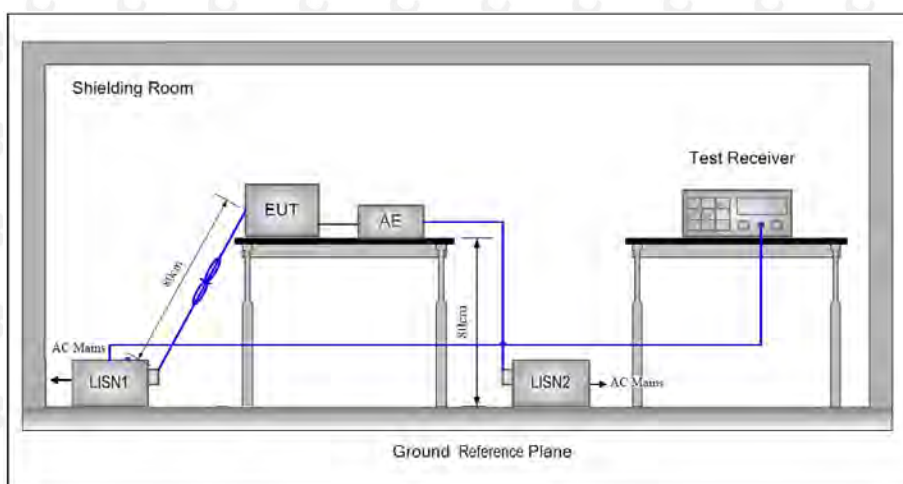

### 6.2 Limit

Table 4 - AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency


### 6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 $\Omega$ /50 $\mu$ H + 5 $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.

### 6.4 Test Result

Test Specification: Line  
 AC 120V 60Hz  
 the worst: 802.11b (low channel)

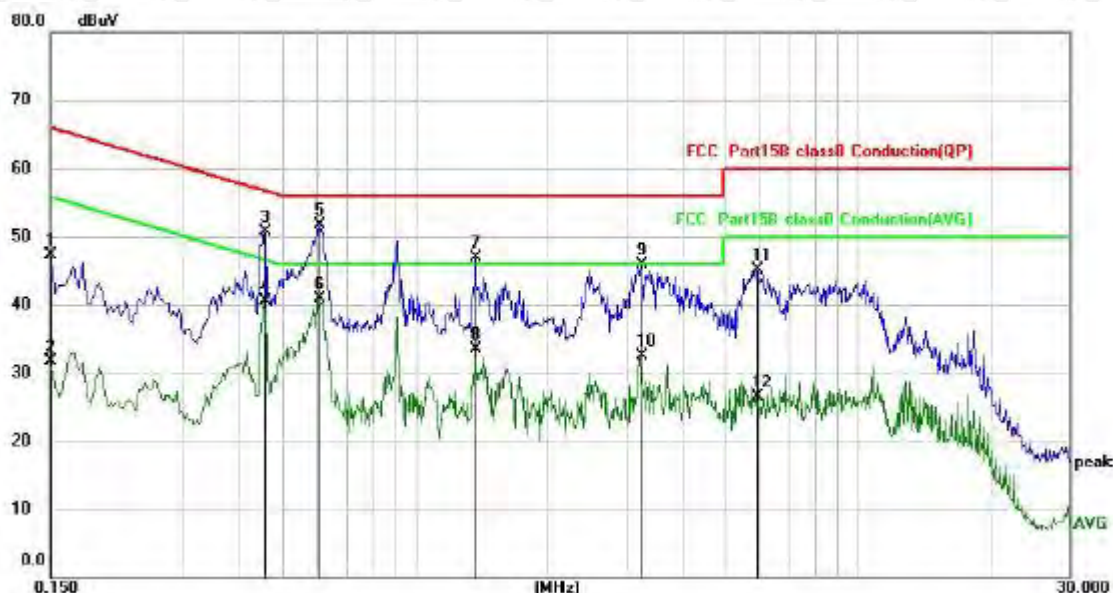


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector
1	0.1500	37.35	9.95	47.30	66.00	-18.70	QP
2	0.1500	21.75	9.95	31.70	56.00	-24.30	AVG
3	0.4580	40.67	9.98	50.65	56.73	-6.08	QP
4	0.4580	30.44	9.98	40.42	46.73	-6.31	AVG
5 *	0.6100	41.67	10.01	51.68	56.00	-4.32	QP
6	0.6100	30.87	10.01	40.88	46.00	-5.12	AVG
7	1.3700	36.80	10.04	46.84	56.00	-9.16	QP
8	1.3700	23.44	10.04	33.48	46.00	-12.52	AVG
9	3.2259	35.61	10.21	45.82	56.00	-10.18	QP
10	3.2259	22.33	10.21	32.54	46.00	-13.46	AVG
11	5.9259	34.70	10.44	45.14	60.00	-14.86	QP
12	5.9259	16.01	10.44	26.45	50.00	-23.55	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral  
 AC 120V 60Hz  
 the worst: 802.11b (low channel)

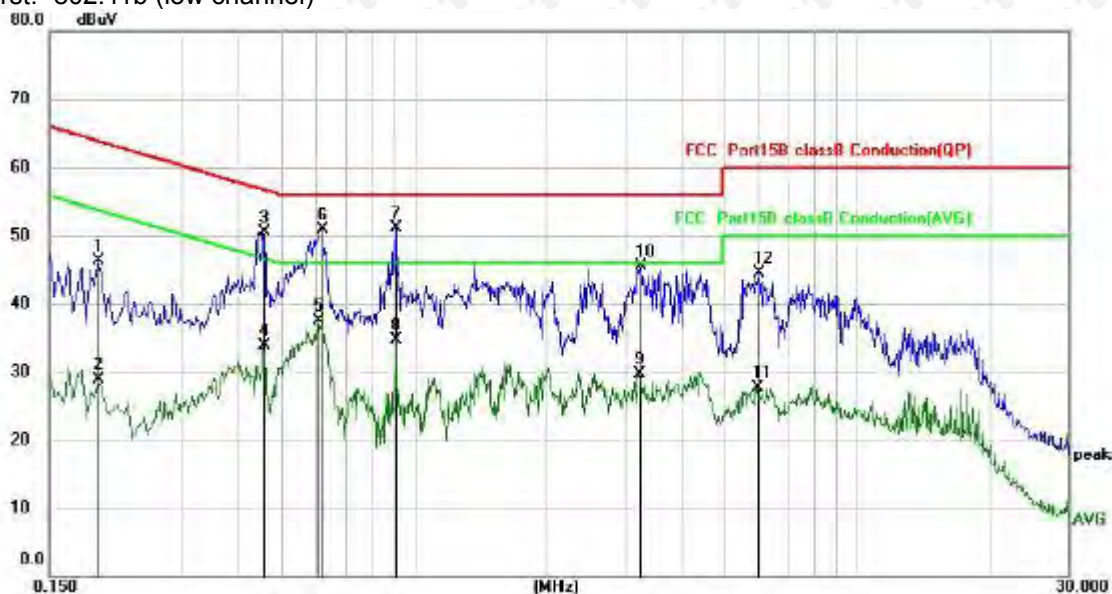

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.1940	36.43	9.95	46.38	63.86	-17.48	QP
2		0.1940	18.89	9.95	28.84	53.86	-25.02	AVG
3		0.4580	40.62	9.98	50.60	56.73	-6.13	QP
4		0.4580	23.92	9.98	33.90	46.73	-12.83	AVG
5		0.6100	27.54	10.01	37.55	46.00	-8.45	AVG
6		0.6179	40.82	10.01	50.83	56.00	-5.17	QP
7	*	0.9100	41.07	10.01	51.08	56.00	-4.92	QP
8		0.9100	24.66	10.01	34.67	46.00	-11.33	AVG
9		3.2219	19.46	10.21	29.67	46.00	-16.33	AVG
10		3.2259	35.31	10.21	45.52	56.00	-10.48	QP
11		5.9300	17.34	10.45	27.79	50.00	-22.21	AVG
12		6.0218	34.02	10.45	44.47	60.00	-15.53	QP

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement - Limit

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

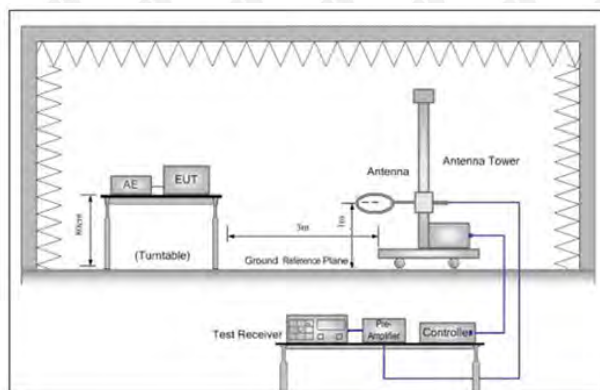


Figure 1. Below 30MHz

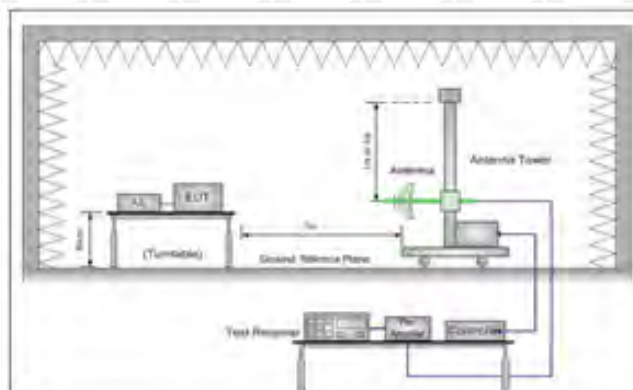


Figure 2. 30MHz to 1GHz

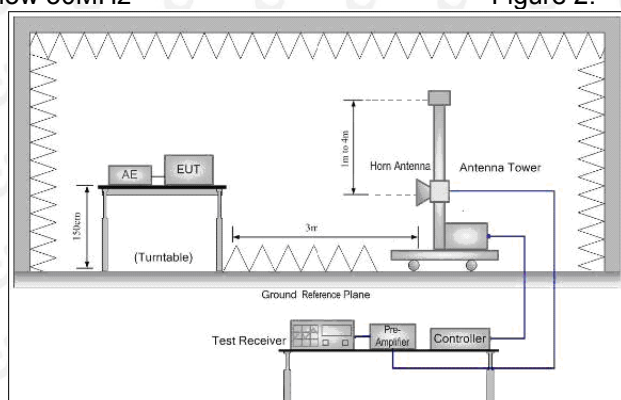


Figure 3. Above 1GHz

### 7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m )	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.


Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average



### 7.4 Test Result

Below 1GHz Test Results:  
Antenna polarity: H

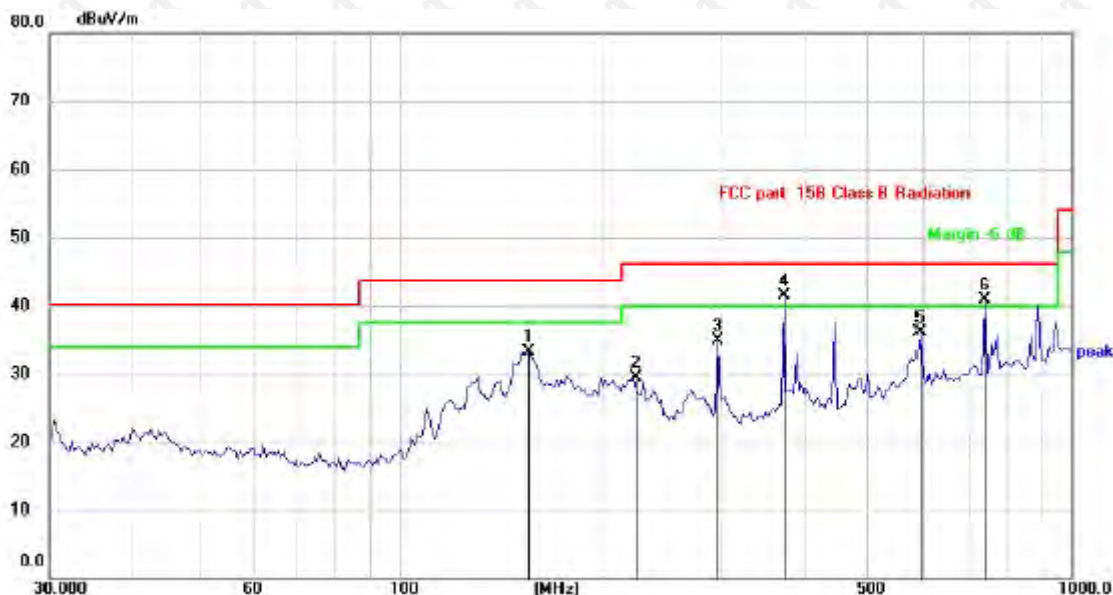

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		155.9101	36.74	-3.38	33.36	43.50	-10.14	QP
2		223.3415	36.75	-7.20	29.55	46.00	-16.45	QP
3		298.2681	39.67	-4.81	34.86	46.00	-11.14	QP
4	*	374.6225	44.34	-2.81	41.53	46.00	-4.47	QP
5		596.1772	33.61	2.53	36.14	46.00	-9.86	QP
6	!	742.2587	35.52	5.34	40.86	46.00	-5.14	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		44.1202	36.52	-5.54	30.98	40.00	-9.02	QP
2	!	133.1511	43.45	-4.68	38.77	43.50	-4.73	QP
3	!	147.9214	42.51	-3.42	39.09	43.50	-4.41	QP
4		298.2681	36.70	-4.81	31.89	46.00	-14.11	QP
5		374.6225	35.21	-2.81	32.40	46.00	-13.60	QP
6	*	596.1772	39.98	2.53	42.51	46.00	-3.49	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)

## Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	64.30	-3.64	60.66	74	-13.34	peak
4824	48.82	-3.64	45.18	54	-8.82	AVG
7236	59.35	-0.95	58.40	74	-15.60	peak
7236	44.41	-0.95	43.46	54	-10.54	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	65.90	-3.64	62.26	74	-11.74	peak
4824	47.94	-3.64	44.30	54	-9.70	AVG
7236	56.47	-0.95	55.52	74	-18.48	peak
7236	43.85	-0.95	42.90	54	-11.10	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	64.77	-3.51	61.26	74	-12.74	peak
4874	48.90	-3.51	45.39	54	-8.61	AVG
7311	58.58	-0.82	57.76	74	-16.24	peak
7311	45.57	-0.82	44.75	54	-9.25	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	65.00	-3.51	61.49	74	-12.51	peak
4874	47.15	-3.51	43.64	54	-10.36	AVG
7311	60.20	-0.82	59.38	74	-14.62	peak
7311	44.09	-0.82	43.27	54	-10.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	62.86	-3.43	59.43	74	-14.57	peak
4924	47.69	-3.43	44.26	54	-9.74	AVG
7386	59.33	-0.75	58.58	74	-15.42	peak
7386	45.04	-0.75	44.29	54	-9.71	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	65.40	-3.43	61.97	74	-12.03	peak
4924	46.73	-3.43	43.30	54	-10.70	AVG
7386	56.48	-0.75	55.73	74	-18.27	peak
7386	41.35	-0.75	40.60	54	-13.40	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.72	-3.64	62.08	74	-11.92	peak
4824	49.14	-3.64	45.50	54	-8.50	AVG
7236	59.31	-0.95	58.36	74	-15.64	peak
7236	45.44	-0.95	44.49	54	-9.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.44	-3.64	61.80	74	-12.20	peak
4824	48.34	-3.64	44.70	54	-9.30	AVG
7236	56.97	-0.95	56.02	74	-17.98	peak
7236	44.98	-0.95	44.03	54	-9.97	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	65.96	-3.51	62.45	74	-11.55	peak
4874	49.37	-3.51	45.86	54	-8.14	AVG
7311	60.08	-0.82	59.26	74	-14.74	peak
7311	43.18	-0.82	42.36	54	-11.64	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	64.53	-3.51	61.02	74	-12.98	peak
4874	49.44	-3.51	45.93	54	-8.07	AVG
7311	59.47	-0.82	58.65	74	-15.35	peak
7311	44.92	-0.82	44.10	54	-9.90	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

## ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	63.79	-3.43	60.36	74	-13.64	peak
4924	46.99	-3.43	43.56	54	-10.44	AVG
7386	60.08	-0.75	59.33	74	-14.67	peak
7386	43.99	-0.75	43.24	54	-10.76	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	63.85	-3.43	60.42	74	-13.58	peak
4924	46.21	-3.43	42.78	54	-11.22	AVG
7386	58.99	-0.75	58.24	74	-15.76	peak
7386	43.83	-0.75	43.08	54	-10.92	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

## Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	65.09	-3.64	61.45	74	-12.55	peak
4824	49.95	-3.64	46.31	54	-7.69	AVG
7236	58.92	-0.95	57.97	74	-16.03	peak
7236	43.83	-0.95	42.88	54	-11.12	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	66.12	-3.64	62.48	74	-11.52	peak
4824	48.95	-3.64	45.31	54	-8.69	AVG
7236	56.79	-0.95	55.84	74	-18.16	peak
7236	45.10	-0.95	44.15	54	-9.85	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	63.65	-3.51	60.14	74	-13.86	peak
4874	48.23	-3.51	44.72	54	-9.28	AVG
7311	58.20	-0.82	57.38	74	-16.62	peak
7311	43.86	-0.82	43.04	54	-10.96	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	64.32	-3.51	60.81	74	-13.19	peak
4874	48.49	-3.51	44.98	54	-9.02	AVG
7311	58.18	-0.82	57.36	74	-16.64	peak
7311	44.98	-0.82	44.16	54	-9.84	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	64.67	-3.43	61.24	74	-12.76	peak
4924	47.32	-3.43	43.89	54	-10.11	AVG
7386	60.06	-0.75	59.31	74	-14.69	peak
7386	45.02	-0.75	44.27	54	-9.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	65.38	-3.43	61.95	74	-12.05	peak
4924	47.65	-3.43	44.22	54	-9.78	AVG
7386	57.64	-0.75	56.89	74	-17.11	peak
7386	43.63	-0.75	42.88	54	-11.12	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	65.37	-3.63	61.74	74	-12.26	peak
4844	49.86	-3.63	46.23	54	-7.77	AVG
7266	60.51	-0.94	59.57	74	-14.43	peak
7266	46.54	-0.94	45.60	54	-8.40	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	65.71	-3.63	62.08	74	-11.92	peak
4844	47.71	-3.63	44.08	54	-9.92	AVG
7266	58.05	-0.94	57.11	74	-16.89	peak
7266	45.11	-0.94	44.17	54	-9.83	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.54	-3.51	60.03	74	-13.97	peak
4874	48.03	-3.51	44.52	54	-9.48	AVG
7311	58.70	-0.82	57.88	74	-16.12	peak
7311	44.73	-0.82	43.91	54	-10.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.27	-3.51	58.76	74	-15.24	peak
4874	46.49	-3.51	42.98	54	-11.02	AVG
7311	56.65	-0.82	55.83	74	-18.17	peak
7311	43.30	-0.82	42.48	54	-11.52	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.57	-3.43	59.14	74	-14.86	peak
4904	46.84	-3.43	43.41	54	-10.59	AVG
7356	55.76	-0.75	55.01	74	-18.99	peak
7356	41.83	-0.75	41.08	54	-12.92	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.53	-3.43	59.10	74	-14.90	peak
4904	46.66	-3.43	43.23	54	-10.77	AVG
7356	58.15	-0.75	57.40	74	-16.60	peak
7356	43.33	-0.75	42.58	54	-11.42	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

**Restricted bands around fundamental frequency (Radiated)**

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.65	-5.81	51.84	74	-22.16	peak
2390	/	-5.81	/	54	/	AVG
2399	64.12	-5.84	58.28	74	-15.72	peak
2399	48.41	-5.84	42.57	54	-11.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.04	-5.81	50.23	74	-23.77	peak
2390	/	-5.81	/	54	/	AVG
2399	61.81	-5.84	55.97	74	-18.03	peak
2399	47.68	-5.84	41.84	54	-12.16	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.29	-5.65	50.64	74	-23.36	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.96	-5.65	50.31	74	-23.69	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.14	-5.81	53.33	74	-20.67	peak
2390	/	-5.81	/	54	/	AVG
2399	61.59	-5.84	55.75	74	-18.25	peak
2399	46.09	-5.84	40.25	54	-13.75	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.25	-5.81	50.44	74	-23.56	peak
2390	/	-5.81	/	54	/	AVG
2399	63.24	-5.84	57.40	74	-16.60	peak
2399	46.81	-5.84	40.97	54	-13.03	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.71	-5.65	52.06	74	-21.94	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.78	-5.65	51.13	74	-22.87	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.23	-5.81	50.42	74	-23.58	peak
2390	/	-5.81	/	54	/	AVG
2399	62.48	-5.84	56.64	74	-17.36	peak
2399	48.83	-5.84	42.99	54	-11.01	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.62	-5.81	50.81	74	-23.19	peak
2390	/	-5.81	/	54	/	AVG
2399	60.53	-5.84	54.69	74	-19.31	peak
2399	48.21	-5.84	42.37	54	-11.63	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.15	-5.65	51.50	74	-22.50	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.38	-5.65	49.73	74	-24.27	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.58	-5.81	52.77	74	-21.23	peak
2390	/	-5.81	/	54	/	AVG
2399	62.37	-5.84	56.53	74	-17.47	peak
2399	46.54	-5.84	40.70	54	-13.30	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.92	-5.81	53.11	74	-20.89	peak
2390	/	-5.81	/	54	/	AVG
2399	61.77	-5.84	55.93	74	-18.07	peak
2399	46.09	-5.84	40.25	54	-13.75	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.30	-5.65	51.65	74	-22.35	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.84	-5.65	52.19	74	-21.81	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

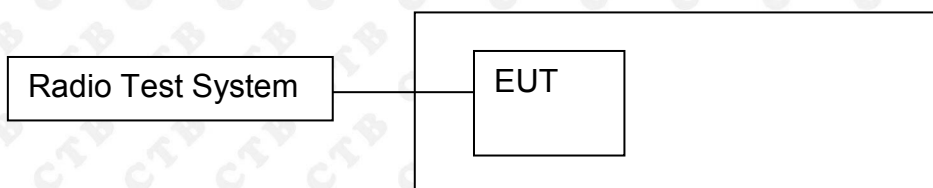

### 8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
  - Below 30MHz:
    - RBW = 100kHz, VBW = 300kHz, Sweep = auto
    - Detector function = peak, Trace = max hold
  - Above 30MHz:
    - RBW = 100KHz, VBW = 300KHz, Sweep = auto
    - Detector function = peak, Trace = max hold

## 8.4 Test Result


ANT1:






## BAND EDGE Graphs


802.11g/LCH

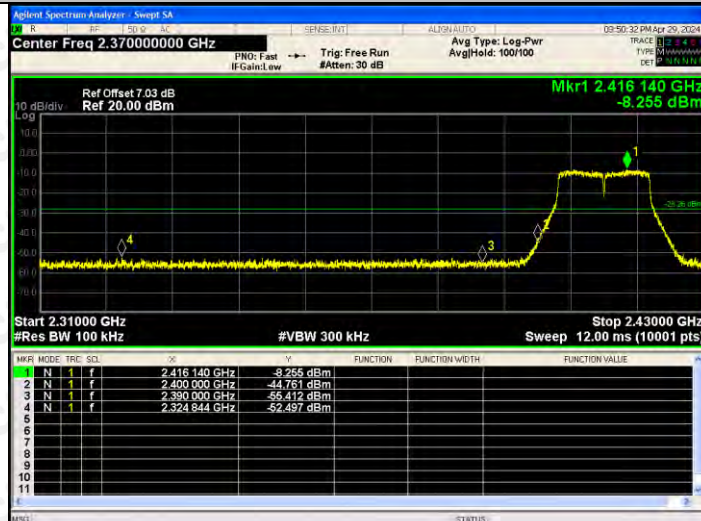


802.11g/HCH

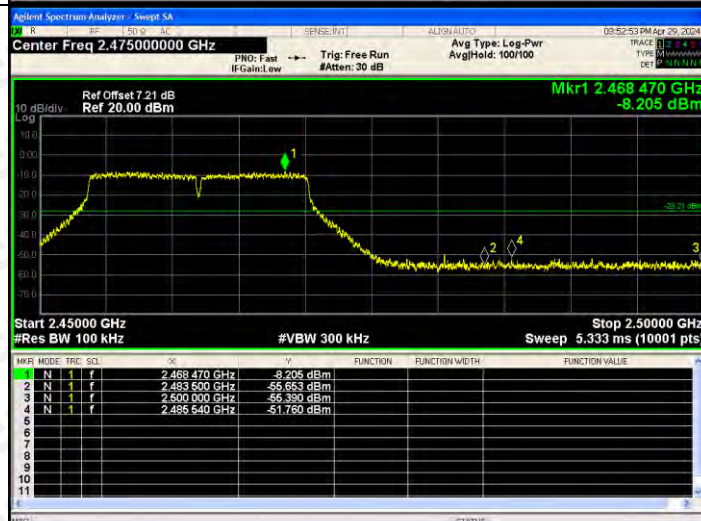


802.11n(HT20)/LCH

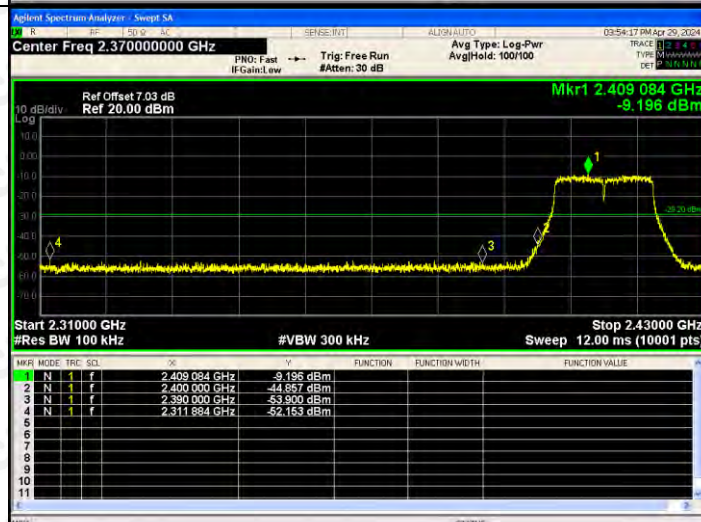

802.11n(HT20)/H  
CH

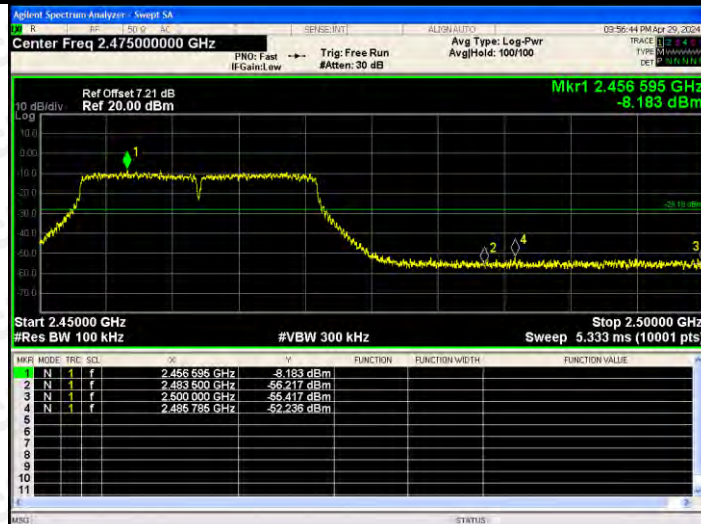


802.11n(HT40)/L  
CH

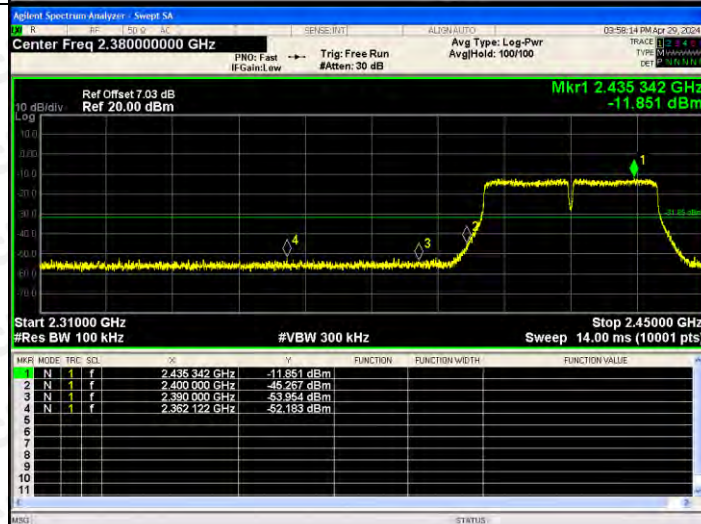

802.11n(HT40)/H  
CH




## RF Conducted Spurious Emissions Graphs

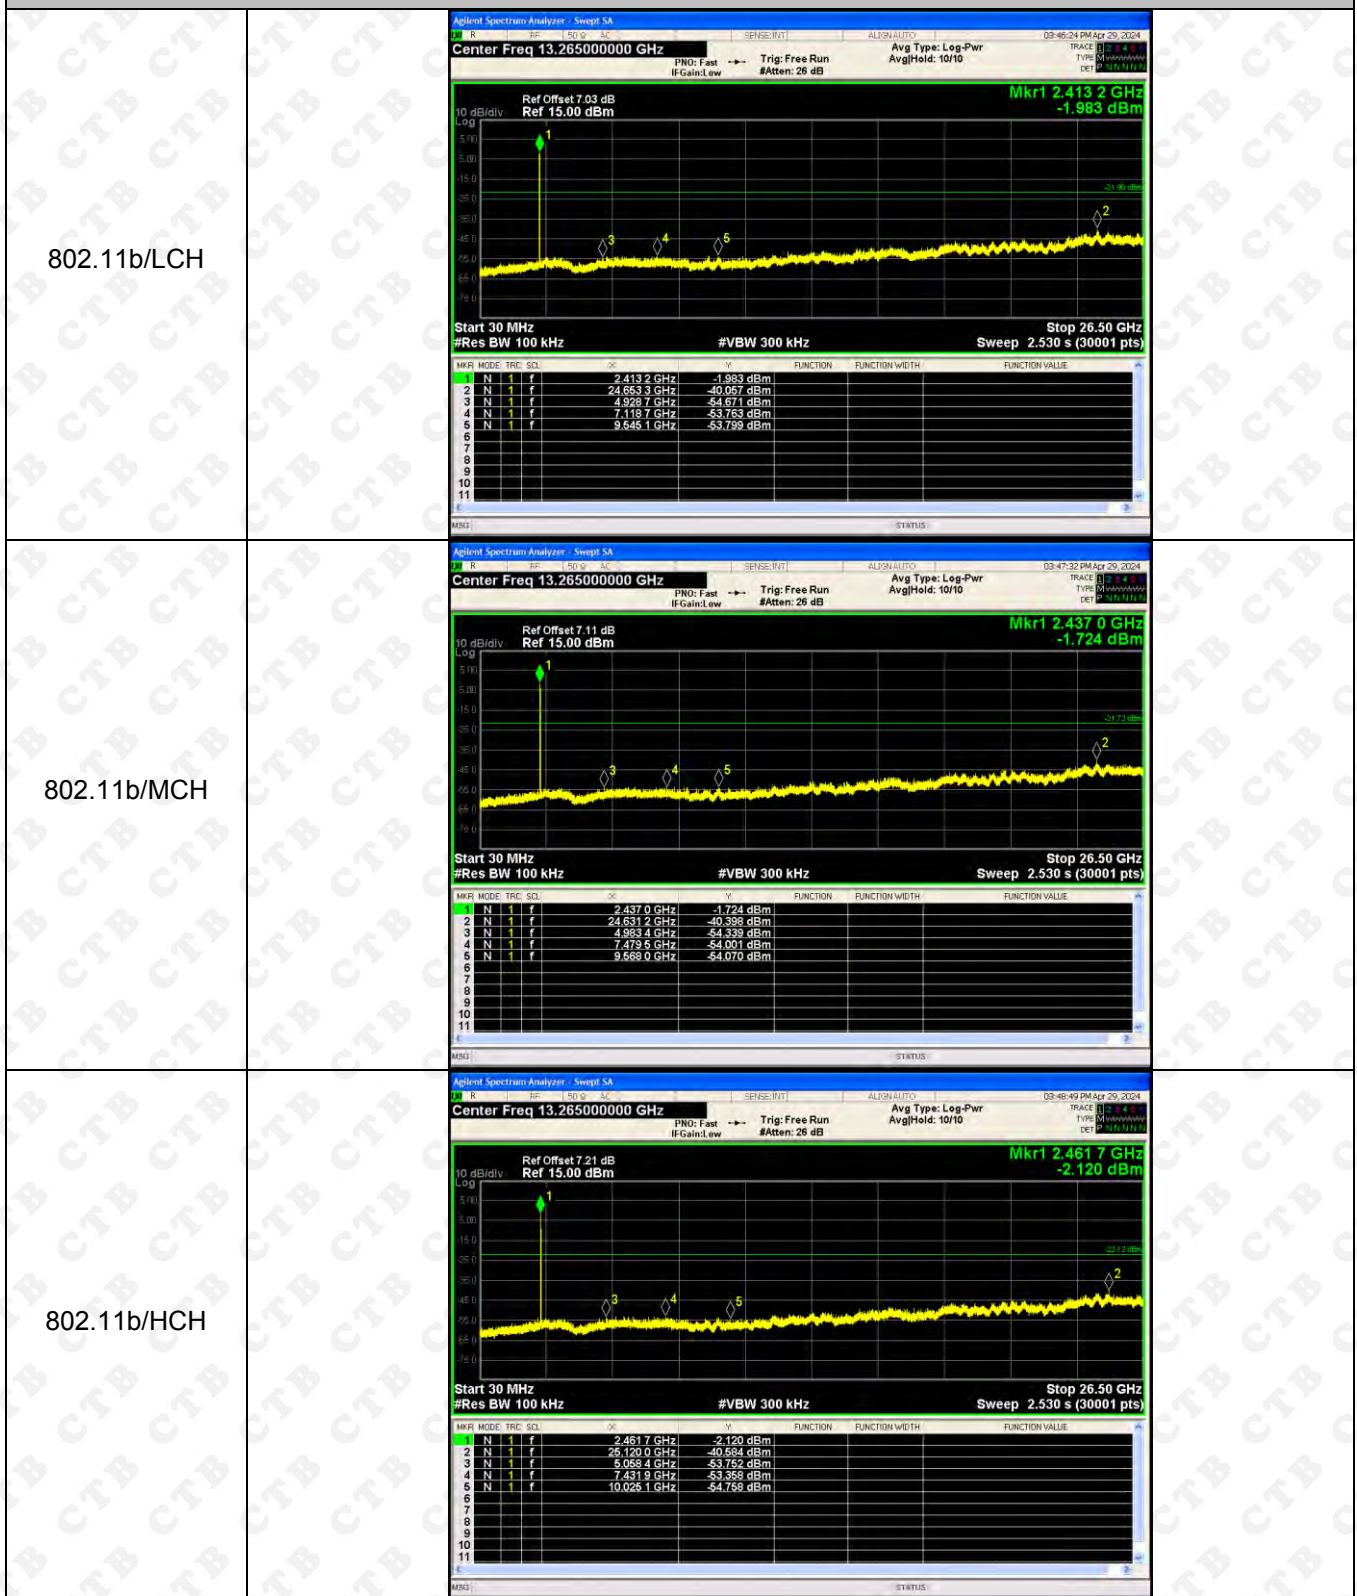


## RF Conducted Spurious Emissions Graphs


802.11g/LCH

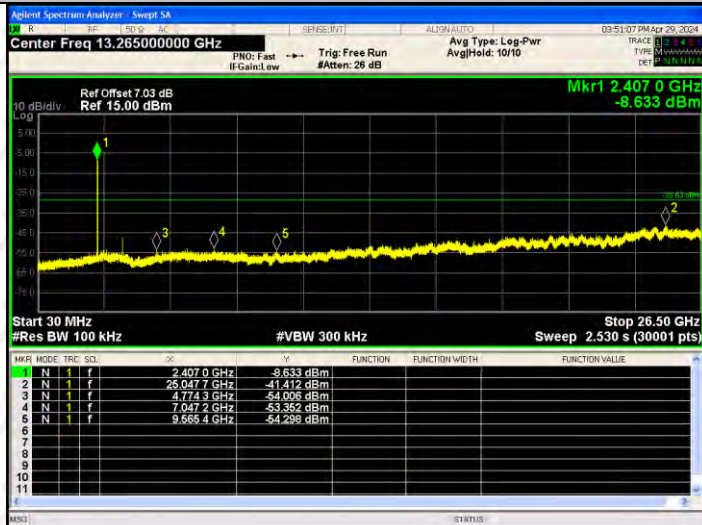

802.11g/MCH

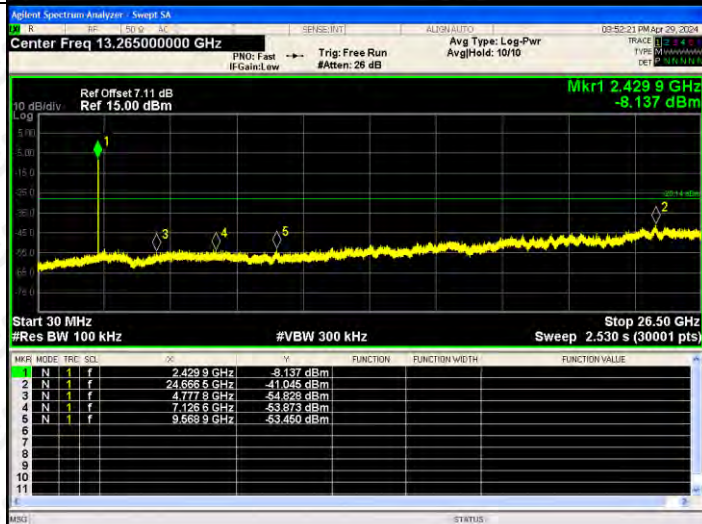


802.11g/HCH

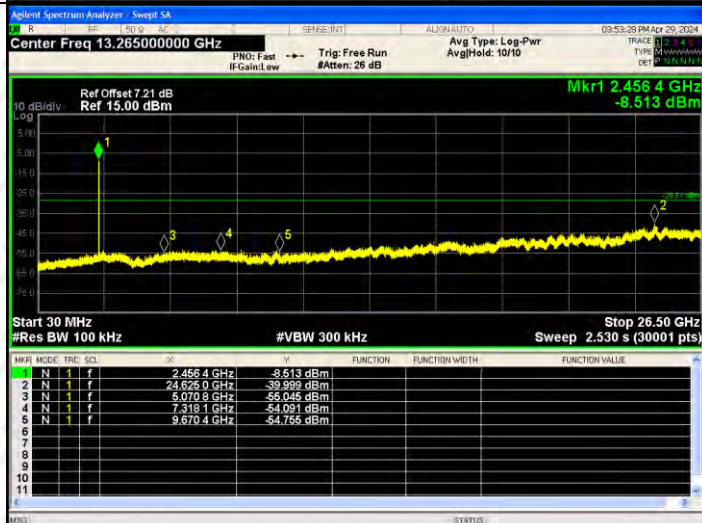


## RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH



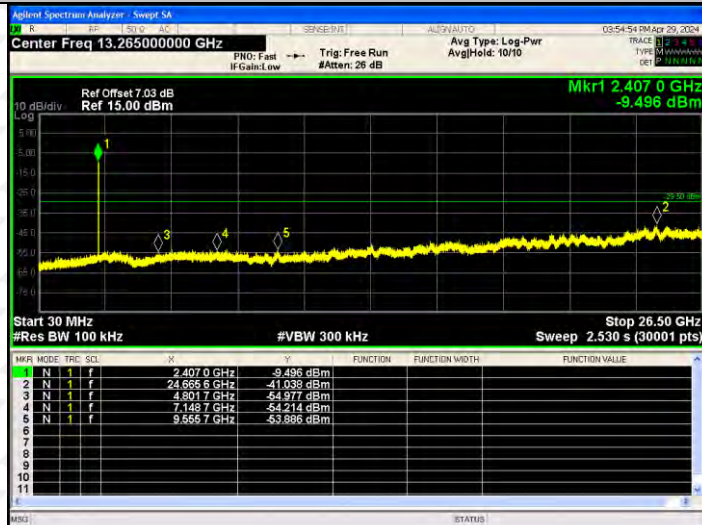


802.11 n(HT20)/MCH

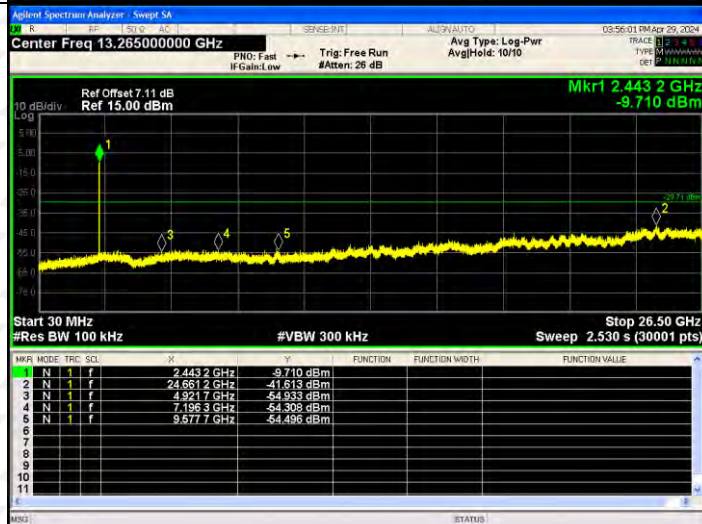

802.11 n(HT20)/HCH

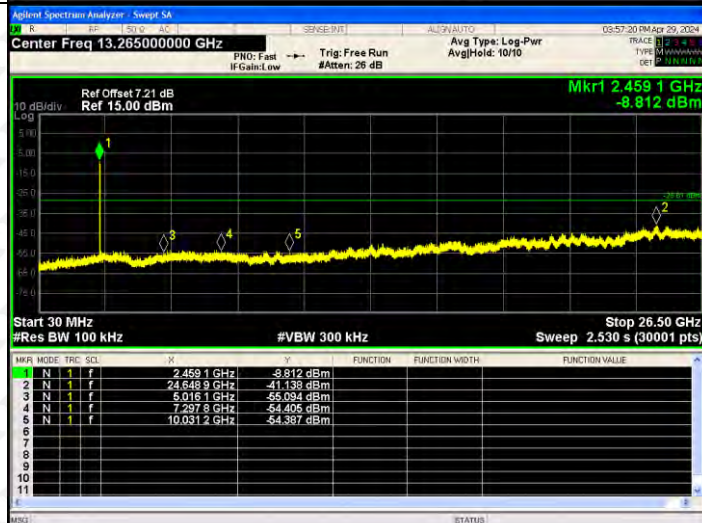


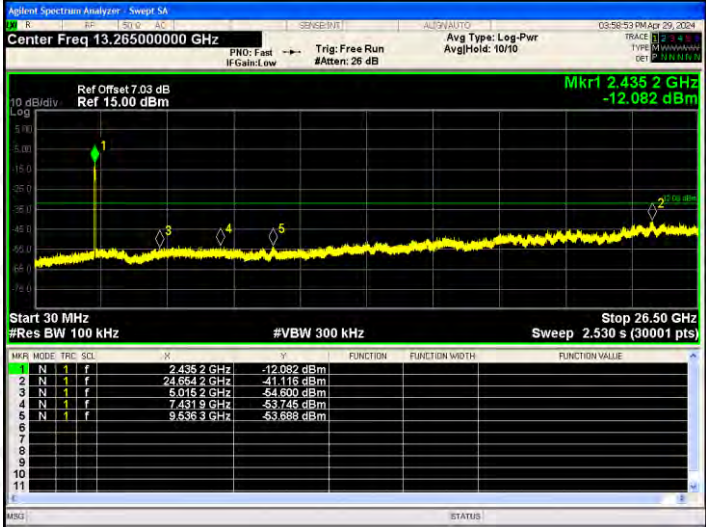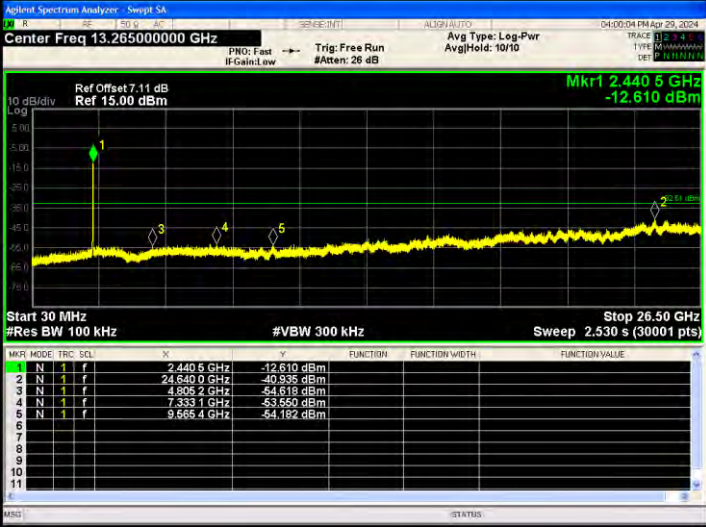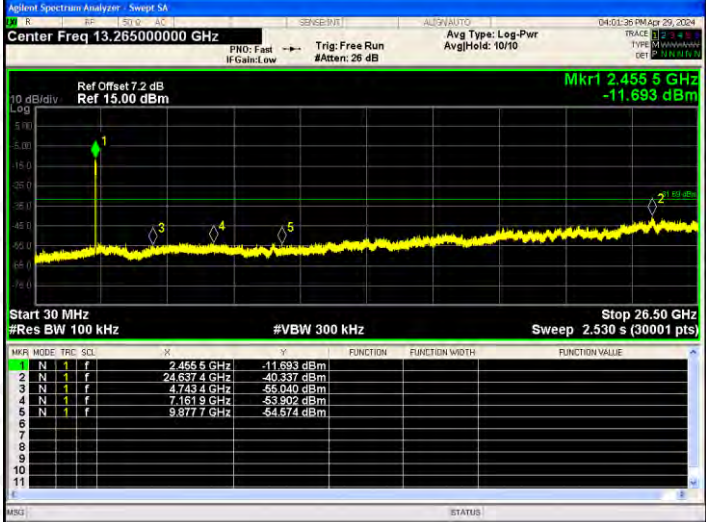802.11n(HT40)/LCH	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.435 2 GHz</td><td>-12.082 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.654 2 GHz</td><td>-41.116 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.016 2 GHz</td><td>-54.630 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.431 3 GHz</td><td>-53.746 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.536 3 GHz</td><td>-53.688 dBm</td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.435 2 GHz	-12.082 dBm				2	N	1	f	24.654 2 GHz	-41.116 dBm				3	N	1	f	5.016 2 GHz	-54.630 dBm				4	N	1	f	7.431 3 GHz	-53.746 dBm				5	N	1	f	9.536 3 GHz	-53.688 dBm				6									7									8									9									10									11								
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.435 2 GHz	-12.082 dBm																																																																																																								
2	N	1	f	24.654 2 GHz	-41.116 dBm																																																																																																								
3	N	1	f	5.016 2 GHz	-54.630 dBm																																																																																																								
4	N	1	f	7.431 3 GHz	-53.746 dBm																																																																																																								
5	N	1	f	9.536 3 GHz	-53.688 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
802.11 n(HT40)/MCH	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.440 5 GHz</td><td>-12.610 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.640 0 GHz</td><td>-40.935 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.805 2 GHz</td><td>-54.618 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.333 1 GHz</td><td>-53.650 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.565 4 GHz</td><td>-54.182 dBm</td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 5 GHz	-12.610 dBm				2	N	1	f	24.640 0 GHz	-40.935 dBm				3	N	1	f	4.805 2 GHz	-54.618 dBm				4	N	1	f	7.333 1 GHz	-53.650 dBm				5	N	1	f	9.565 4 GHz	-54.182 dBm				6									7									8									9									10									11								
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.440 5 GHz	-12.610 dBm																																																																																																								
2	N	1	f	24.640 0 GHz	-40.935 dBm																																																																																																								
3	N	1	f	4.805 2 GHz	-54.618 dBm																																																																																																								
4	N	1	f	7.333 1 GHz	-53.650 dBm																																																																																																								
5	N	1	f	9.565 4 GHz	-54.182 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
802.11 n(HT40)/HCH	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.455 5 GHz</td><td>-11.693 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.637 4 GHz</td><td>-40.337 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.743 4 GHz</td><td>-56.040 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.181 9 GHz</td><td>-53.392 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.877 7 GHz</td><td>-54.574 dBm</td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.455 5 GHz	-11.693 dBm				2	N	1	f	24.637 4 GHz	-40.337 dBm				3	N	1	f	4.743 4 GHz	-56.040 dBm				4	N	1	f	7.181 9 GHz	-53.392 dBm				5	N	1	f	9.877 7 GHz	-54.574 dBm				6									7									8									9									10									11								
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.455 5 GHz	-11.693 dBm																																																																																																								
2	N	1	f	24.637 4 GHz	-40.337 dBm																																																																																																								
3	N	1	f	4.743 4 GHz	-56.040 dBm																																																																																																								
4	N	1	f	7.181 9 GHz	-53.392 dBm																																																																																																								
5	N	1	f	9.877 7 GHz	-54.574 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													


ANT2:

## BAND EDGE Graphs

802.11b/LCH

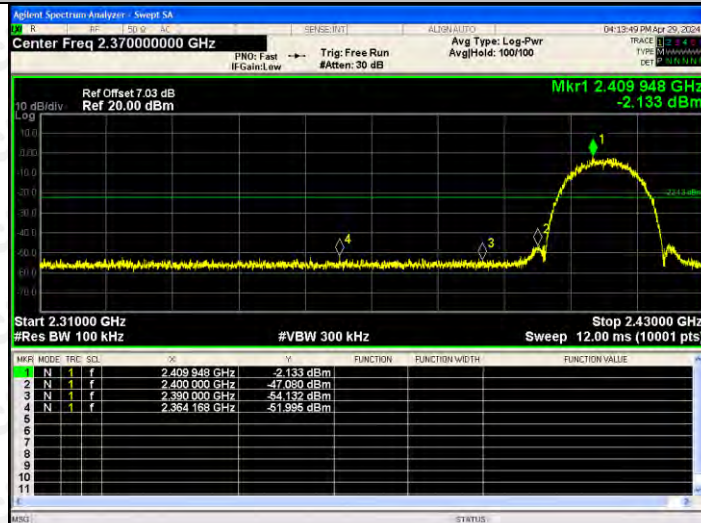


802.11b/HCH

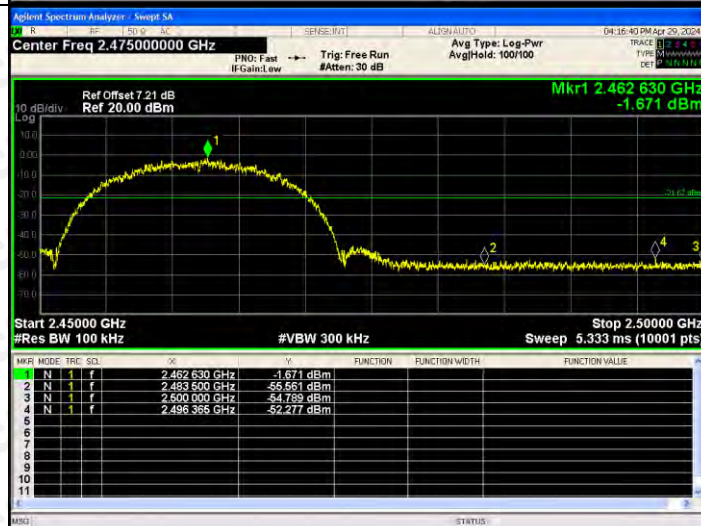


## BAND EDGE Graphs


802.11g/LCH

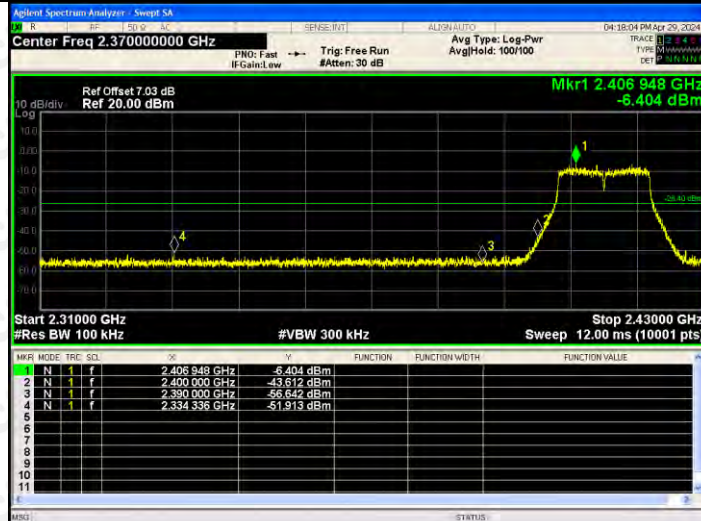

802.11g/HCH

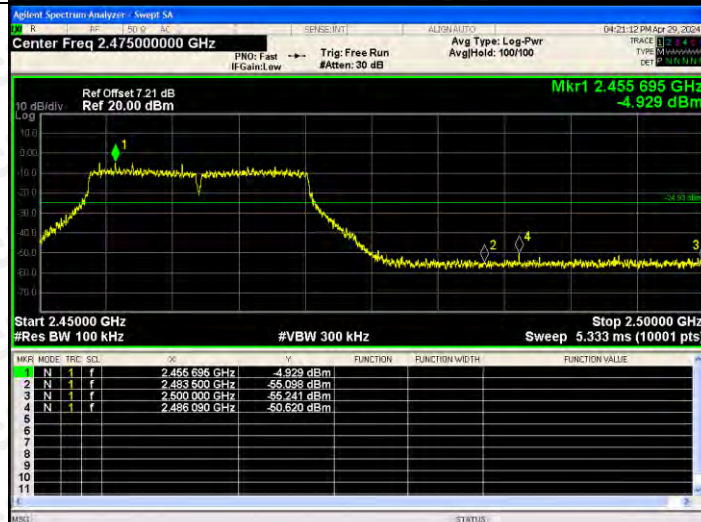


802.11n(HT20)/L  
CH

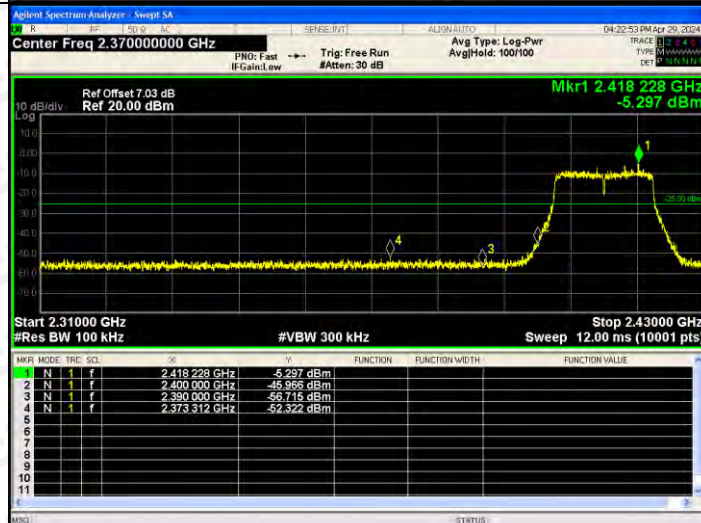





802.11n(HT20)/H  
CH

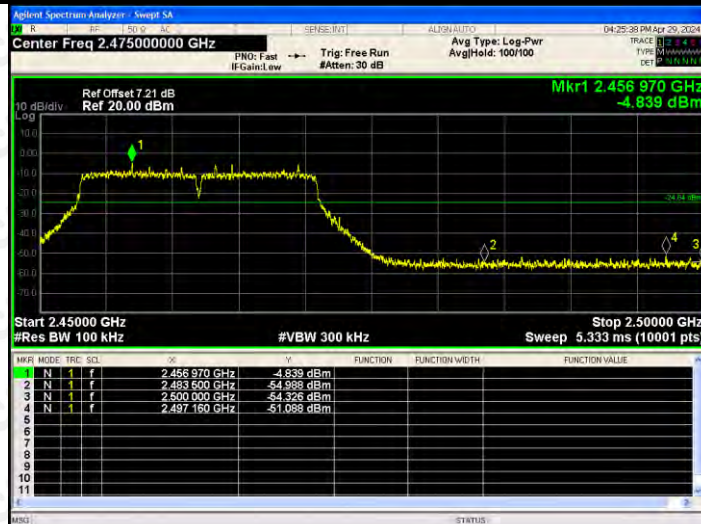


802.11n(HT40)/L  
CH

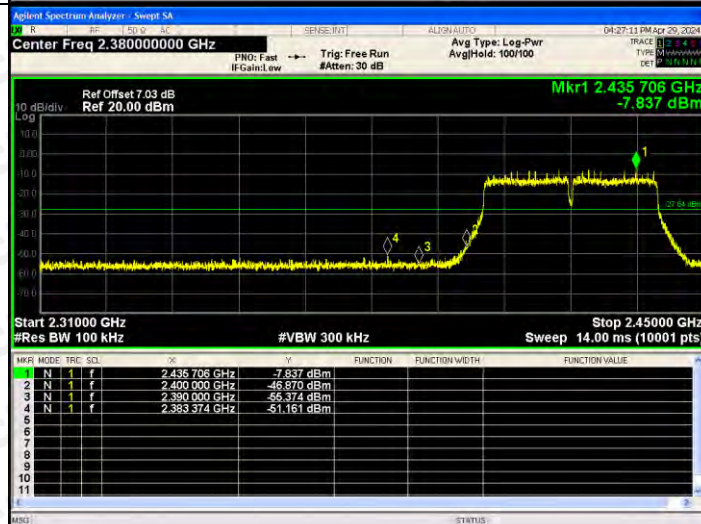


802.11n(HT40)/H  
CH

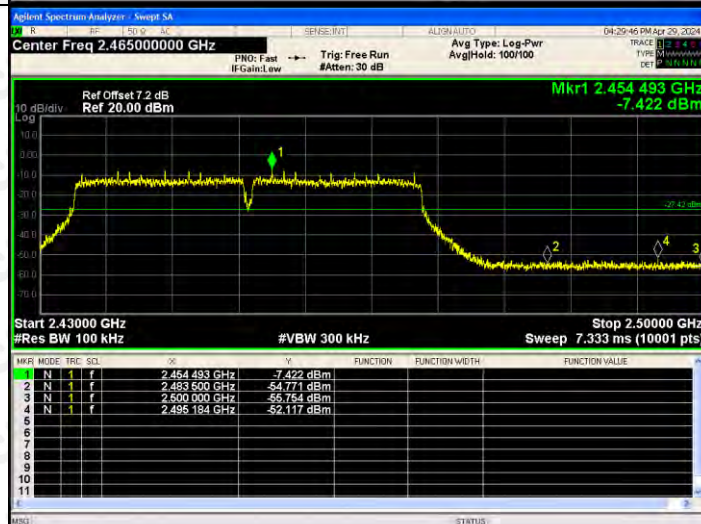

## RF Conducted Spurious Emissions Graphs

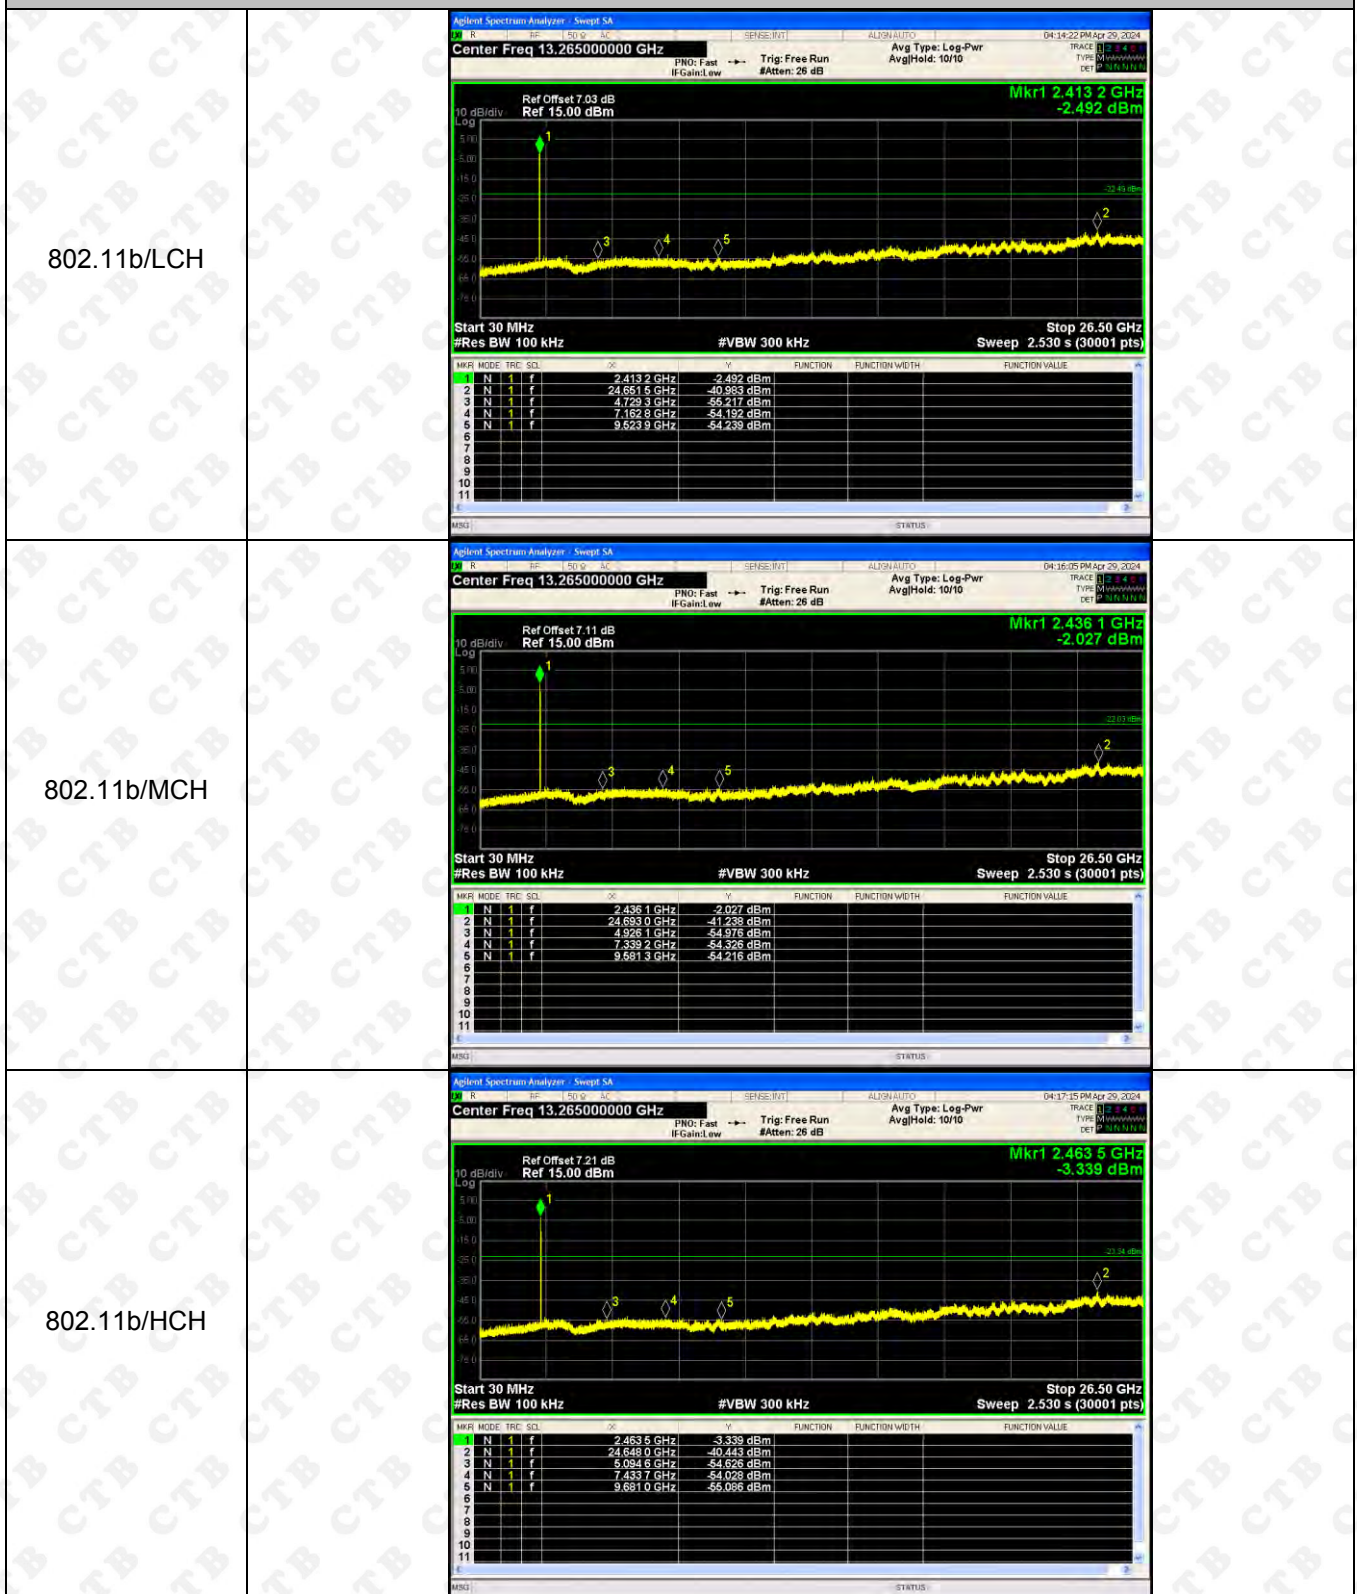


## RF Conducted Spurious Emissions Graphs

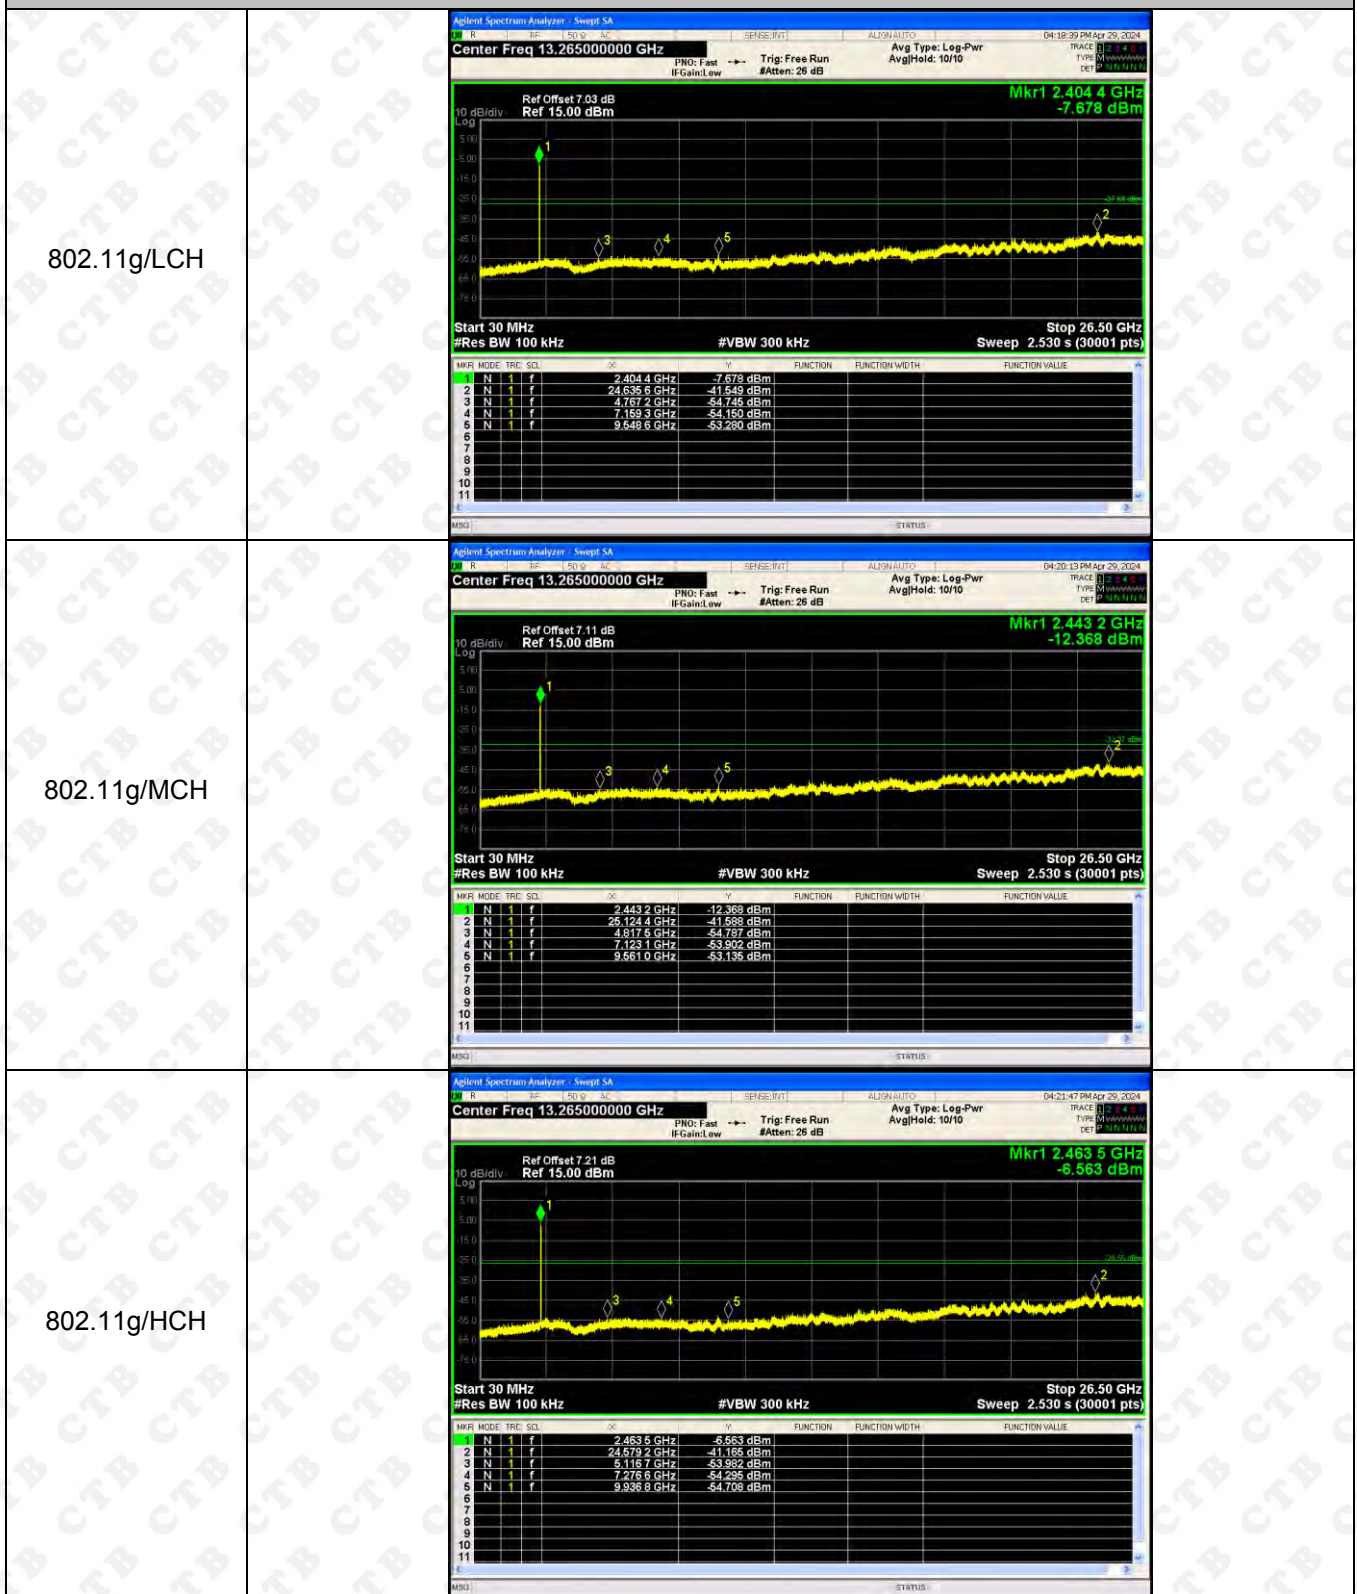


## RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH

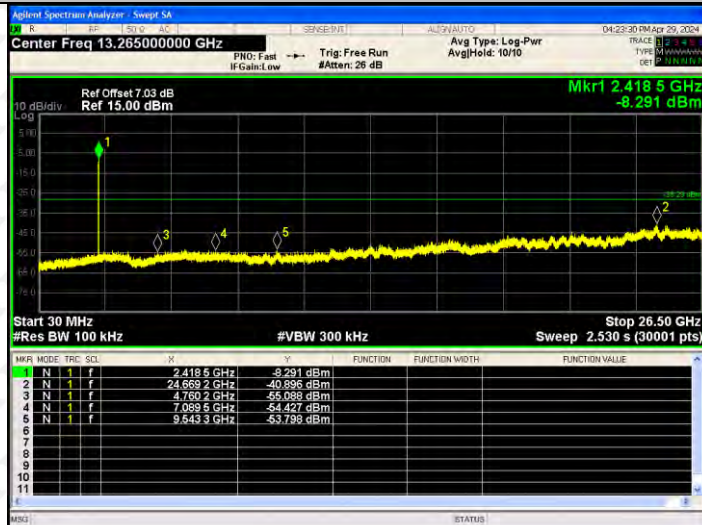

802.11 n(HT20)/MCH

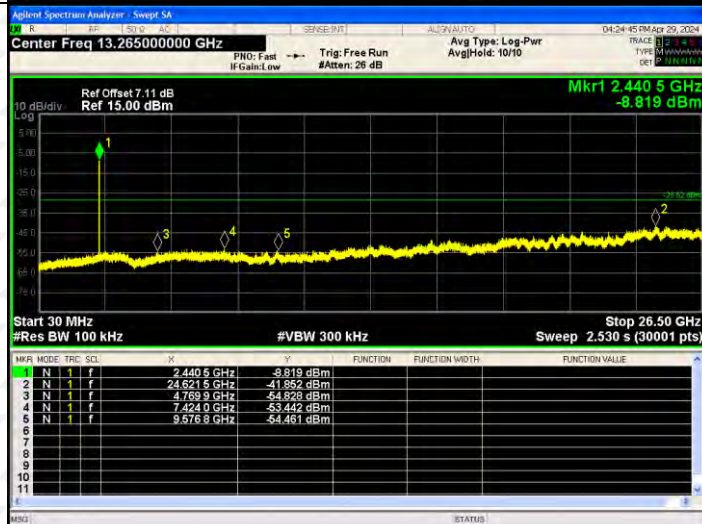

802.11 n(HT20)/HCH

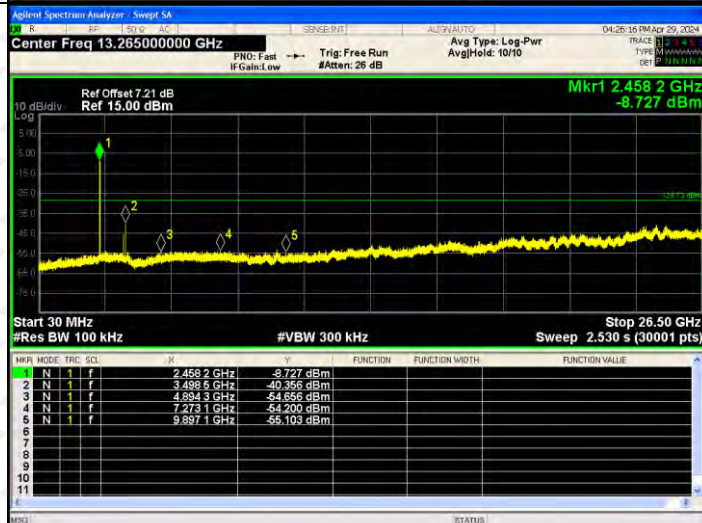

802.11n(HT40)/LCH	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCD</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.437 0 GHz</td><td>-8.215 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.663 9 GHz</td><td>-41.789 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.016 1 GHz</td><td>-54.475 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.235 0 GHz</td><td>-54.957 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.526 7 GHz</td><td>-53.906 dBm</td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCD	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.437 0 GHz	-8.215 dBm				2	N	1	f	24.663 9 GHz	-41.789 dBm				3	N	1	f	5.016 1 GHz	-54.475 dBm				4	N	1	f	7.235 0 GHz	-54.957 dBm				5	N	1	f	9.526 7 GHz	-53.906 dBm				6									7									8									9									10									11								
MKR	MODE	TRC	SCD	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.437 0 GHz	-8.215 dBm																																																																																																								
2	N	1	f	24.663 9 GHz	-41.789 dBm																																																																																																								
3	N	1	f	5.016 1 GHz	-54.475 dBm																																																																																																								
4	N	1	f	7.235 0 GHz	-54.957 dBm																																																																																																								
5	N	1	f	9.526 7 GHz	-53.906 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
802.11 n(HT40)/MCH	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCD</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.440 5 GHz</td><td>-7.893 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.159 2 GHz</td><td>-41.967 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.775 2 GHz</td><td>-54.724 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.150 4 GHz</td><td>-53.291 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.578 8 GHz</td><td>-54.431 dBm</td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCD	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 5 GHz	-7.893 dBm				2	N	1	f	24.159 2 GHz	-41.967 dBm				3	N	1	f	4.775 2 GHz	-54.724 dBm				4	N	1	f	7.150 4 GHz	-53.291 dBm				5	N	1	f	9.578 8 GHz	-54.431 dBm				6									7									8									9									10									11								
MKR	MODE	TRC	SCD	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.440 5 GHz	-7.893 dBm																																																																																																								
2	N	1	f	24.159 2 GHz	-41.967 dBm																																																																																																								
3	N	1	f	4.775 2 GHz	-54.724 dBm																																																																																																								
4	N	1	f	7.150 4 GHz	-53.291 dBm																																																																																																								
5	N	1	f	9.578 8 GHz	-54.431 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
802.11 n(HT40)/HCH	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCD</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.459 1 GHz</td><td>-11.052 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.658 6 GHz</td><td>-39.788 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.779 5 GHz</td><td>-54.401 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.232 5 GHz</td><td>-53.899 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.993 3 GHz</td><td>-54.286 dBm</td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCD	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.459 1 GHz	-11.052 dBm				2	N	1	f	24.658 6 GHz	-39.788 dBm				3	N	1	f	4.779 5 GHz	-54.401 dBm				4	N	1	f	7.232 5 GHz	-53.899 dBm				5	N	1	f	9.993 3 GHz	-54.286 dBm				6									7									8									9									10									11								
MKR	MODE	TRC	SCD	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.459 1 GHz	-11.052 dBm																																																																																																								
2	N	1	f	24.658 6 GHz	-39.788 dBm																																																																																																								
3	N	1	f	4.779 5 GHz	-54.401 dBm																																																																																																								
4	N	1	f	7.232 5 GHz	-53.899 dBm																																																																																																								
5	N	1	f	9.993 3 GHz	-54.286 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													

## 9. COUDUCTED OUTPUT POWER

### 9.1 Block Diagram Of Test Setup



### 9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

### 9.3 Test procedure


1. The EUT was directly connected to the Power meter

## 9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ant 1	Maximum Peak Power [dBm] ant 2	Total Power Peak Output Power(dBm)	Limit[dBm]
802.11b	LCH	14.033	13.457	/	30
	MCH	14.452	13.875	/	30
	HCH	14.286	13.724	/	30
802.11g	LCH	13.161	12.952	/	30
	MCH	13.493	9.131	/	30
	HCH	13.173	13.599	/	30
802.11n(HT20)	LCH	12.644	12.924	15.797	30
	MCH	13.023	13.459	16.257	30
	HCH	12.776	13.032	15.916	30
802.11n(HT40)	LCH	12.511	13.001	15.773	30
	MCH	12.746	13.198	15.988	30
	HCH	13.219	13.289	16.264	30

## 10. 6DB OCCUPIED BANDWIDTH

### 10.1 Block Diagram Of Test Setup

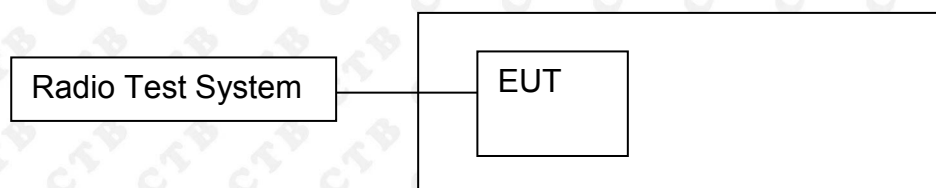

### 10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

### 10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



## 10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.071	500	PASS
	MCH	10.338	500	PASS
	HCH	10.194	500	PASS
802.11g	LCH	16.559	500	PASS
	MCH	16.559	500	PASS
	HCH	16.556	500	PASS
802.11n(HT20)	LCH	17.725	500	PASS
	MCH	17.737	500	PASS
	HCH	17.665	500	PASS
802.11n(HT40)	LCH	36.515	500	PASS
	MCH	36.49	500	PASS
	HCH	36.508	500	PASS

ANT2:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.027	500	PASS
	MCH	9.909	500	PASS
	HCH	9.997	500	PASS
802.11g	LCH	16.311	500	PASS
	MCH	16.356	500	PASS
	HCH	16.359	500	PASS
802.11n(HT20)	LCH	17.603	500	PASS
	MCH	17.285	500	PASS
	HCH	17.363	500	PASS
802.11n(HT40)	LCH	35.312	500	PASS
	MCH	35.575	500	PASS
	HCH	35.856	500	PASS

ANT1:  
Test Graph:

Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.03 dB</p> <p>Ref 27.03 dBm</p> <p>Mkr3 2.41703 GHz</p> <p>-9.2272 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.606 MHz</p> <p>Total Power 15.8 dBm</p> <p>Transmit Freq Error -5.604 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 10.07 MHz</p> <p>x dB -6.00 dB</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.11 dB</p> <p>Ref 27.11 dBm</p> <p>Mkr3 2.44209 GHz</p> <p>-8.3399 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.738 MHz</p> <p>Total Power 16.2 dBm</p> <p>Transmit Freq Error -79.668 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 10.34 MHz</p> <p>x dB -6.00 dB</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.21 dB</p> <p>Ref 27.21 dBm</p> <p>Mkr3 2.467049 GHz</p> <p>-8.0483 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.798 MHz</p> <p>Total Power 15.8 dBm</p> <p>Transmit Freq Error -47.742 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 10.19 MHz</p> <p>x dB -6.00 dB</p>

<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB</p> <p>Ref: 27.03 dBm</p> <p>Mkr3 2.420252 GHz</p> <p>-13.890 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.456 MHz</p> <p>Total Power 11.8 dBm</p> <p>Transmit Freq Error -27.538 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.56 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.11 dB</p> <p>Ref: 27.11 dBm</p> <p>Mkr3 2.445253 GHz</p> <p>-13.312 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.460 MHz</p> <p>Total Power 12.1 dBm</p> <p>Transmit Freq Error -27.035 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.56 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.21 dB</p> <p>Ref: 27.21 dBm</p> <p>Mkr3 2.470235 GHz</p> <p>-13.426 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.458 MHz</p> <p>Total Power 11.8 dBm</p> <p>Transmit Freq Error -43.220 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.56 MHz</p> <p>x dB -6.00 dB</p>

<p>802.11n(HT20)/LC H</p>		
<p>802.11n(HT20)/MC H</p>		
<p>802.11n(HT20)/HC H</p>		


<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.422000000 GHz</p> <p>Ref Offset 7.03 dB Ref 27.03 dBm</p> <p>Mkr3 2.440239 GHz -18.084 dBm</p> <p>Center 2.422 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>11.5 dBm</td> </tr> <tr> <td>36.147 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-18.368 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>36.51 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	11.5 dBm	36.147 MHz			Transmit Freq Error	OBW Power	99.00 %	-18.368 kHz	x dB	-6.00 dB	x dB Bandwidth			36.51 MHz		
Occupied Bandwidth	Total Power	11.5 dBm																	
36.147 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-18.368 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
36.51 MHz																			
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 7.11 dB Ref 27.11 dBm</p> <p>Mkr3 2.455229 GHz -17.764 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>11.7 dBm</td> </tr> <tr> <td>36.122 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-15.828 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>36.49 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	11.7 dBm	36.122 MHz			Transmit Freq Error	OBW Power	99.00 %	-15.828 kHz	x dB	-6.00 dB	x dB Bandwidth			36.49 MHz		
Occupied Bandwidth	Total Power	11.7 dBm																	
36.122 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-15.828 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
36.49 MHz																			
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.452000000 GHz</p> <p>Ref Offset 7.2 dB Ref 27.20 dBm</p> <p>Mkr3 2.470231 GHz -18.179 dBm</p> <p>Center 2.452 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.1 dBm</td> </tr> <tr> <td>36.119 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-22.327 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>36.51 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.1 dBm	36.119 MHz			Transmit Freq Error	OBW Power	99.00 %	-22.327 kHz	x dB	-6.00 dB	x dB Bandwidth			36.51 MHz		
Occupied Bandwidth	Total Power	12.1 dBm																	
36.119 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-22.327 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
36.51 MHz																			

ANT2:  
Test Graph:

Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz Trig: Free Run #Atten: 30 dB</p> <p>Radio Std: None Radio Device: BTS</p> <p>Ref Offset 7.03 dB Ref 27.03 dBm</p> <p>Mkr3 2.416951 GHz -8.4526 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.757 MHz</p> <p>Total Power 15.1 dBm</p> <p>Transmit Freq Error -62.258 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 10.03 MHz</p> <p>x dB -6.00 dB</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 30 dB</p> <p>Radio Std: None Radio Device: BTS</p> <p>Ref Offset 7.11 dB Ref 27.11 dBm</p> <p>Mkr3 2.441959 GHz -8.2581 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.882 MHz</p> <p>Total Power 15.4 dBm</p> <p>Transmit Freq Error 5.072 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 9.909 MHz</p> <p>x dB -6.00 dB</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz Trig: Free Run #Atten: 30 dB</p> <p>Radio Std: None Radio Device: BTS</p> <p>Ref Offset 7.21 dB Ref 27.21 dBm</p> <p>Mkr3 2.466942 GHz -6.8440 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.895 MHz</p> <p>Total Power 15.3 dBm</p> <p>Transmit Freq Error -56.662 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 9.997 MHz</p> <p>x dB -6.00 dB</p>


<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB</p> <p>Ref: 27.03 dBm</p> <p>Mkr3 2.420129 GHz</p> <p>-10.734 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.435 MHz</p> <p>Total Power 11.9 dBm</p> <p>Transmit Freq Error -26.085 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.31 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.11 dB</p> <p>Ref: 27.11 dBm</p> <p>Mkr3 2.445144 GHz</p> <p>-13.955 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.462 MHz</p> <p>Total Power 8.06 dBm</p> <p>Transmit Freq Error -34.074 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.36 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.21 dB</p> <p>Ref: 27.21 dBm</p> <p>Mkr3 2.470137 GHz</p> <p>-10.538 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.463 MHz</p> <p>Total Power 12.5 dBm</p> <p>Transmit Freq Error -42.809 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.36 MHz</p> <p>x dB -6.00 dB</p>

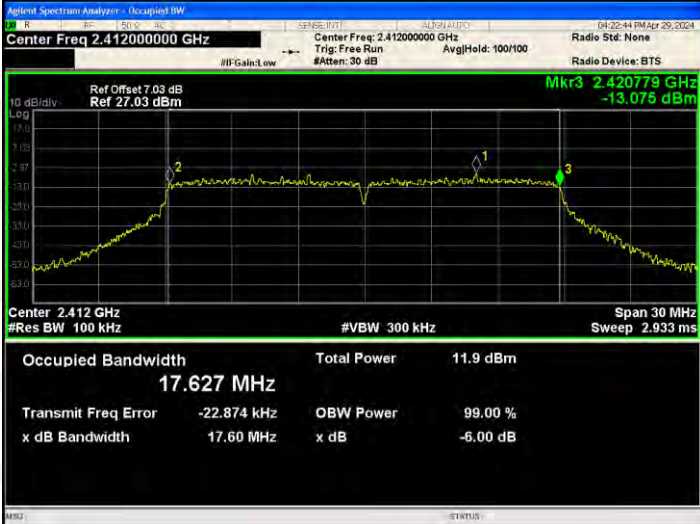

<p>802.11n(HT20)/LC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB</p> <p>Ref: 27.03 dBm</p> <p>Mkr3 2.420779 GHz</p> <p>-13.076 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>11.9 dBm</td> </tr> <tr> <td colspan="3">17.627 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	11.9 dBm	17.627 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	11.9 dBm											
17.627 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT20)/MC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.11 dB</p> <p>Ref: 27.11 dBm</p> <p>Mkr3 2.44562 GHz</p> <p>-11.272 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.1 dBm</td> </tr> <tr> <td colspan="3">17.611 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.1 dBm	17.611 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.1 dBm											
17.611 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT20)/HC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.21 dB</p> <p>Ref: 27.21 dBm</p> <p>Mkr3 2.470651 GHz</p> <p>-13.170 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.0 dBm</td> </tr> <tr> <td colspan="3">17.629 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.0 dBm	17.629 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.0 dBm											
17.629 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											

## 11. POWER SPECTRAL DENSITY

### 11.1 Block Diagram Of Test Setup

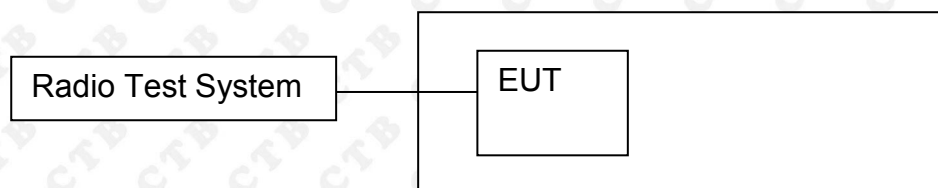

### 11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


### 11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

## 11.4 Test Result




Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz]Total	Limit(dBm)
802.11b	LCH	-16.715	-16.367	/	8
	MCH	-16.634	-17.36	/	8
	HCH	-16.416	-15.563	/	8
802.11g	LCH	-22.048	-22.166	/	8
	MCH	-22.007	-21.928	/	8
	HCH	-22.789	-22.559	/	8
802.11n(H T20)	LCH	-22.729	-23.031	-19.867	8
	MCH	-21.822	-22.8	-19.273	8
	HCH	-21.422	-23.247	-19.229	8
802.11n(H T40)	LCH	-24.02	-24.568	-21.275	8
	MCH	-23.4	-23.612	-20.494	8
	HCH	-24.771	-24.949	-21.849	8

**ANT1:  
Test Graph**

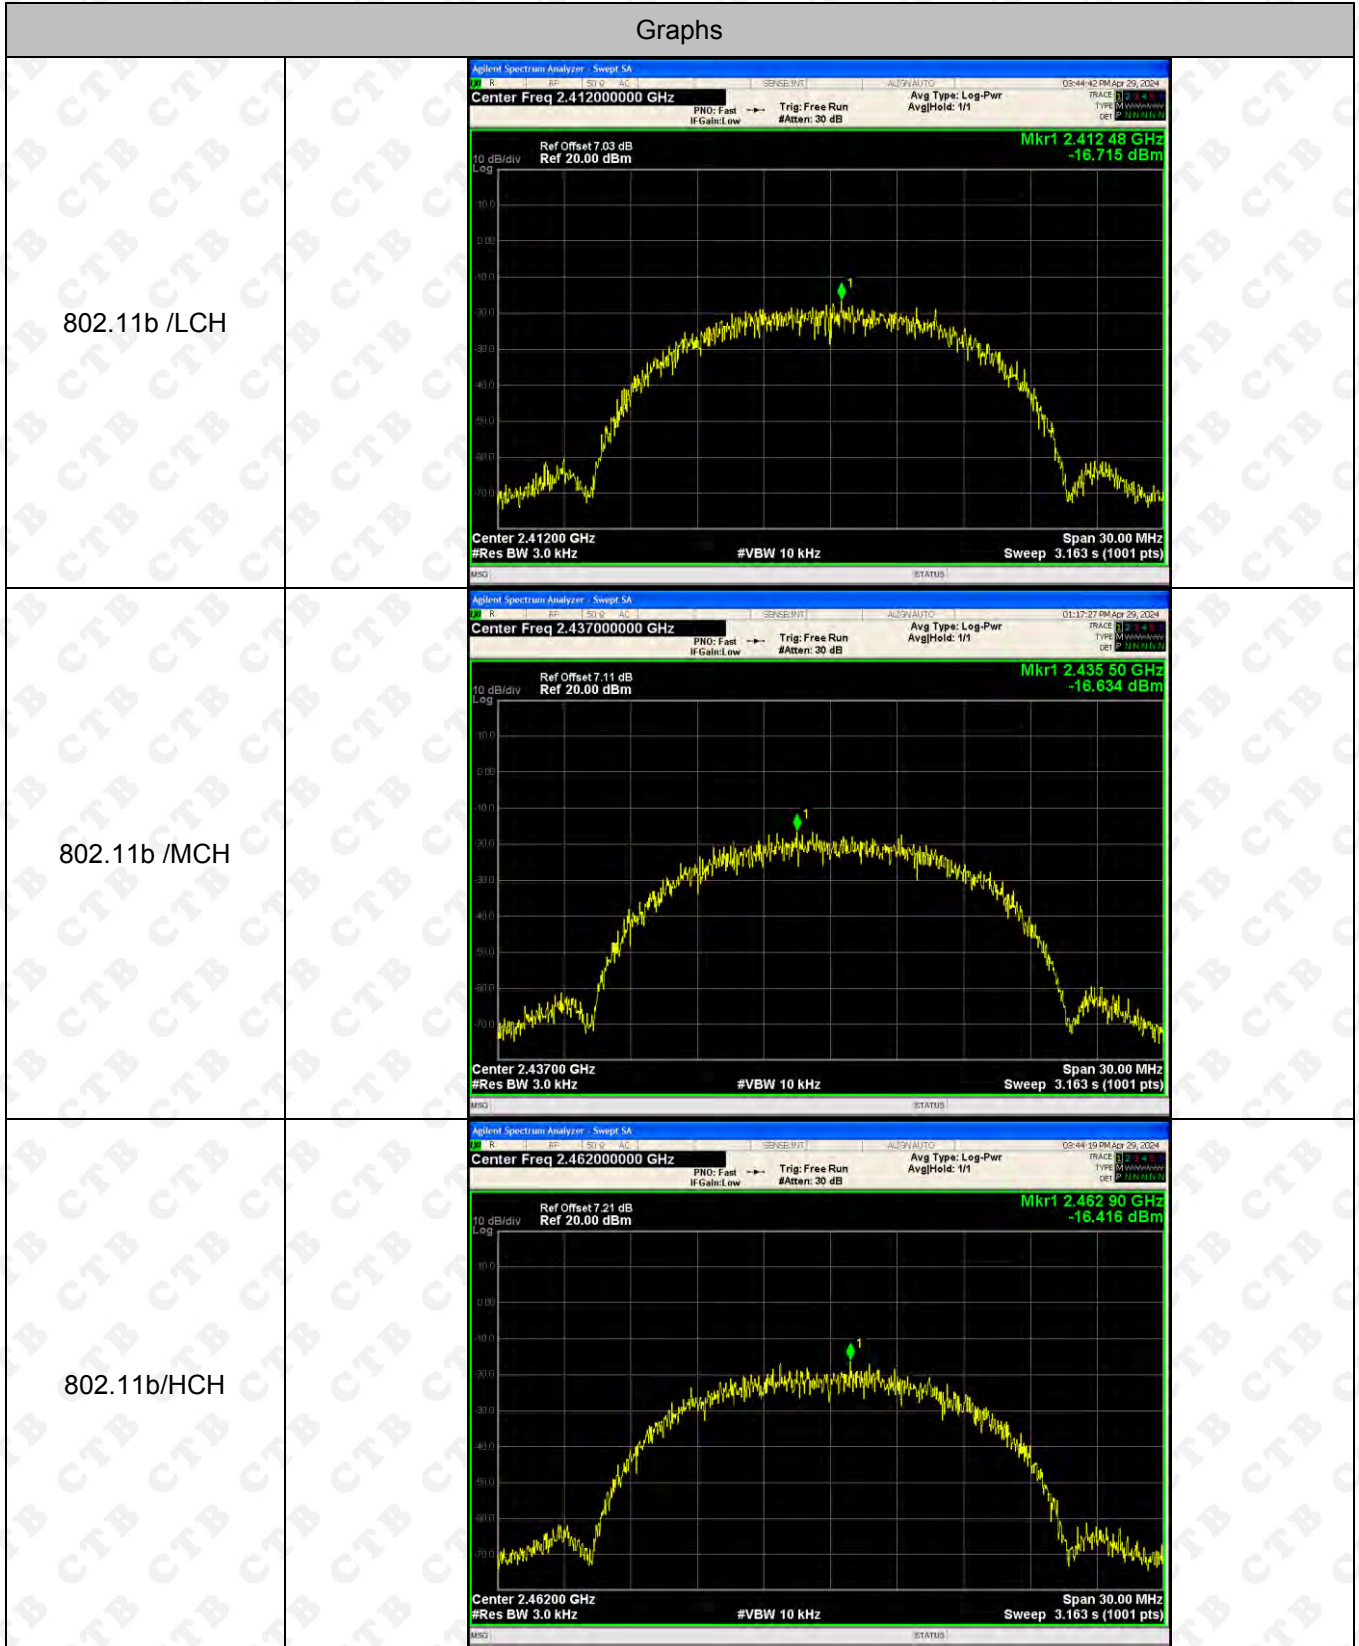

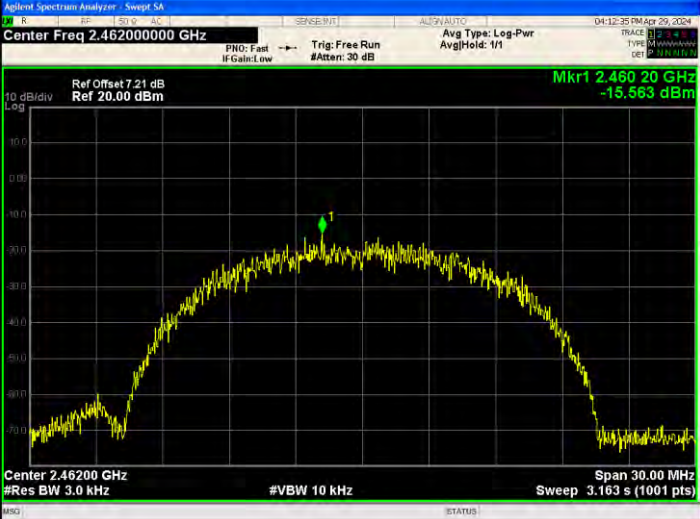


<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.41200000 GHz          Ref Offset: 7.03 dB          Ref 20.00 dBm          Mkr1 2.414 13 GHz          -22.048 dBm          Center 2.41200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.43700000 GHz          Ref Offset: 7.11 dB          Ref 20.00 dBm          Mkr1 2.430 43 GHz          -22.007 dBm          Center 2.43700 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.46200000 GHz          Ref Offset: 7.21 dB          Ref 20.00 dBm          Mkr1 2.466 98 GHz          -22.789 dBm          Center 2.46200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>


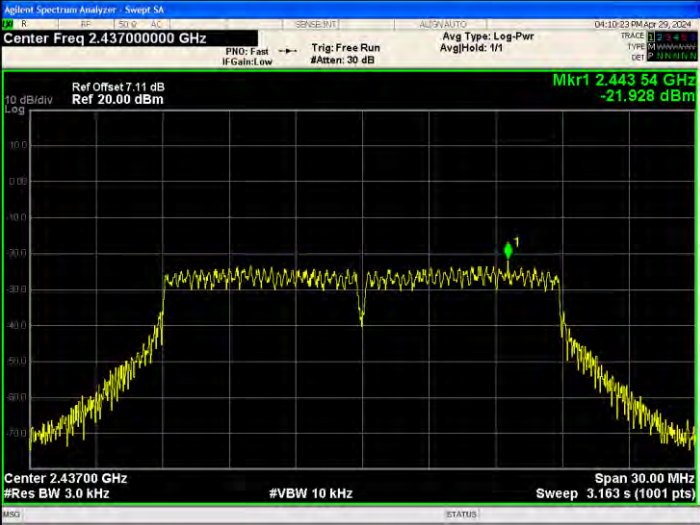

<p>802.11n(HT20)/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.41200000 GHz          Ref Offset: 7.03 dB          Ref 20.00 dBm          Mkr1 2.41413 GHz          -22.729 dBm          Center 2.41200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.43700000 GHz          Ref Offset: 7.11 dB          Ref 20.00 dBm          Mkr1 2.44351 GHz          -21.822 dBm          Center 2.43700 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.46200000 GHz          Ref Offset: 7.21 dB          Ref 20.00 dBm          Mkr1 2.45534 GHz          -21.422 dBm          Center 2.46200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>


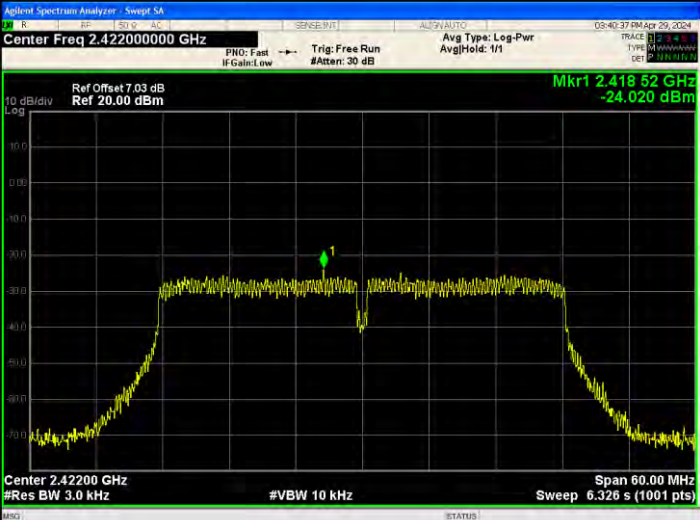
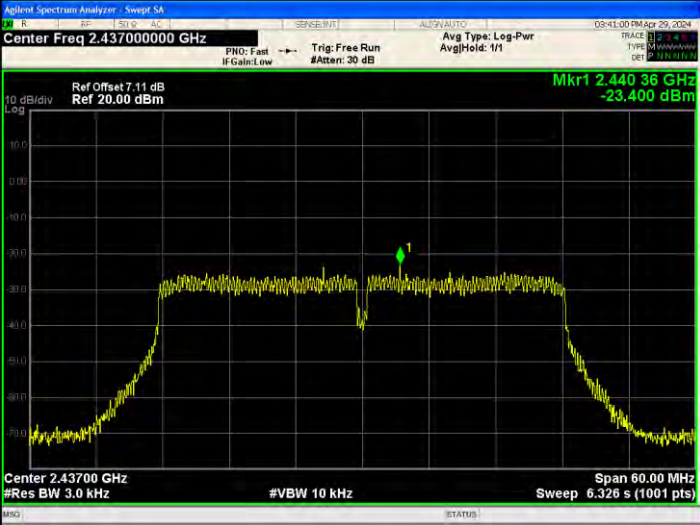
<p>802.11n(HT40)/LCH</p>	 <p>Agilent Spectral Analyzer - Swept SA          Center Freq 2.42200000 GHz          Ref Offset 7.03 dB          Ref 20.00 dBm          Mkr1 2.418 52 GHz          -24.020 dBm          Center 2.42200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 60.00 MHz          Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/MCH</p>	 <p>Agilent Spectral Analyzer - Swept SA          Center Freq 2.43700000 GHz          Ref Offset 7.11 dB          Ref 20.00 dBm          Mkr1 2.440 36 GHz          -23.400 dBm          Center 2.43700 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 60.00 MHz          Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/HCH</p>	 <p>Agilent Spectral Analyzer - Swept SA          Center Freq 2.45200000 GHz          Ref Offset 7.2 dB          Ref 20.00 dBm          Mkr1 2.448 22 GHz          -24.771 dBm          Center 2.45200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 60.00 MHz          Sweep 6.326 s (1001 pts)</p>

ANT2:  
Test Graph

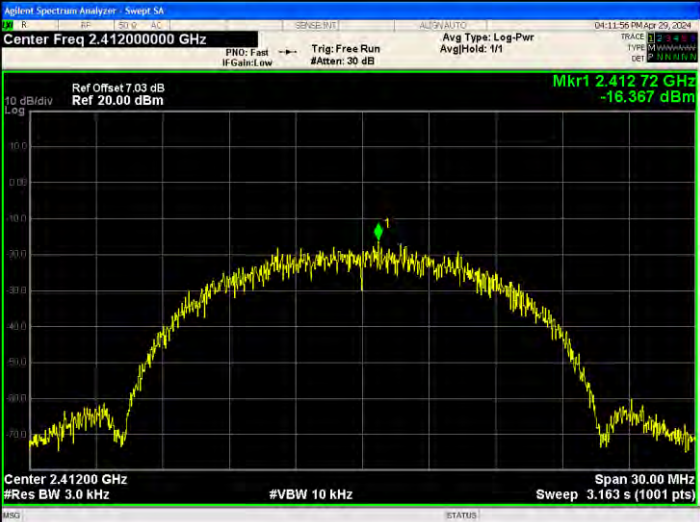Graphs	
802.11b /LCH	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.412 72 GHz -16.367 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b /MCH	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.438 98 GHz -17.360 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b/HCH	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 20.00 dBm Mkr1 2.460 20 GHz -15.563 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>



<p>802.11g/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.412000000 GHz Ref Offset: 7.03 dB Ref 20.00 dBm Mkr1 2.418 51 GHz -22.166 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.437000000 GHz Ref Offset: 7.11 dB Ref 20.00 dBm Mkr1 2.443 54 GHz -21.928 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.462000000 GHz Ref Offset: 7.21 dB Ref 20.00 dBm Mkr1 2.455 37 GHz -22.559 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
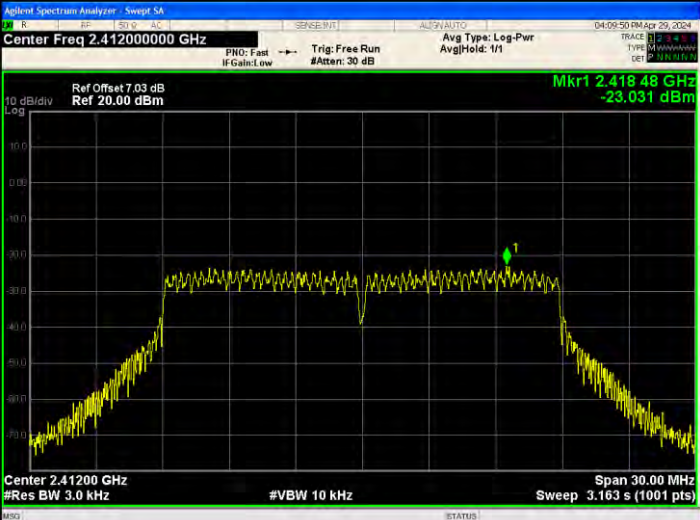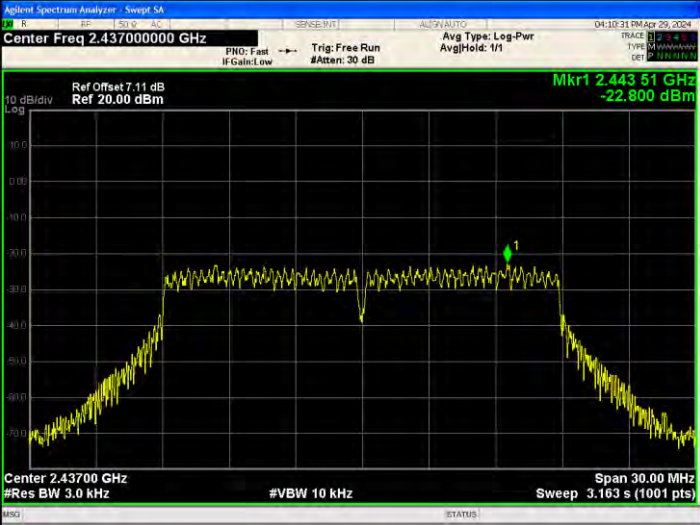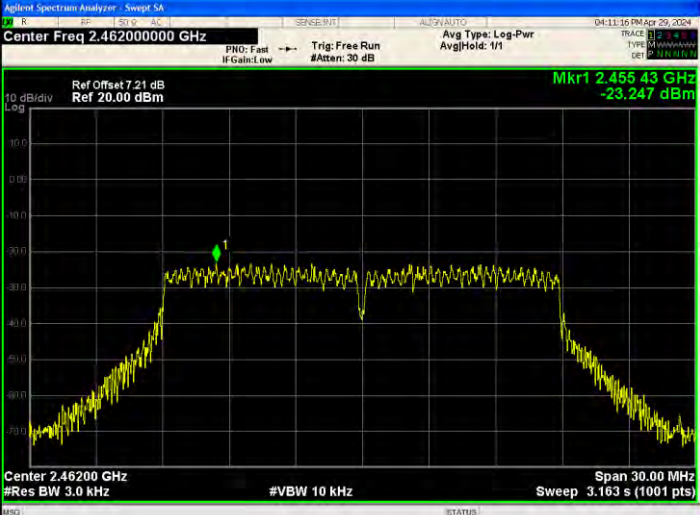
<p>802.11n(HT20)/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.412000000 GHz Ref Offset: 7.03 dB Ref 20.00 dBm Mkr1 2.418 48 GHz -23.031 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.437000000 GHz Ref Offset: 7.11 dB Ref 20.00 dBm Mkr1 2.443 51 GHz -22.800 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.462000000 GHz Ref Offset: 7.21 dB Ref 20.00 dBm Mkr1 2.455 43 GHz -23.247 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>

<p>802.11n(HT40)/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.42200000 GHz          Ref Offset 7.03 dB          Ref 20.00 dBm          Mkr1 2.40538 GHz          -24.568 dBm          Center 2.42200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 60.00 MHz          Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.43700000 GHz          Ref Offset 7.11 dB          Ref 20.00 dBm          Mkr1 2.45350 GHz          -23.612 dBm          Center 2.43700 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 60.00 MHz          Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.45200000 GHz          Ref Offset 7.2 dB          Ref 20.00 dBm          Mkr1 2.44852 GHz          -24.949 dBm          Center 2.45200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 60.00 MHz          Sweep 6.326 s (1001 pts)</p>

## 12. ANTENNA REQUIREMENT

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


### EUT Antenna:

The antenna is external antenna and no consideration of replacement. The best case gain of the antenna is 3.52dBi.

### 13. EUT TEST SETUP PHOTOGRAPHS

#### Radiated Emission

Below 1G

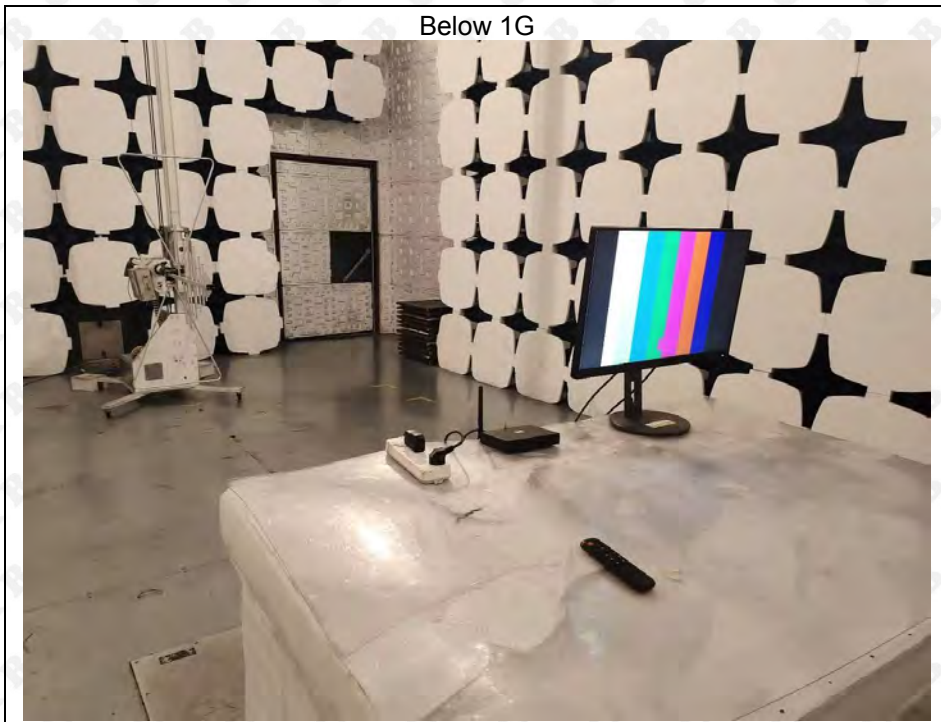

Above 1G



## Conducted Emission



\*\*\*\*\* END OF REPORT \*\*\*\*\*