

Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
EGPRS1900 1 Slot	512	1850.2	29.66	PASS
EGPRS1900 1 Slot	661	1880	29.21	PASS
EGPRS1900 1 Slot	810	1909.8	29.35	PASS
EGPRS1900 2 Slot	512	1850.2	29.36	PASS
EGPRS1900 2 Slot	661	1880	29.16	PASS
EGPRS1900 2 Slot	810	1909.8	28.15	PASS
EGPRS1900 3 Slot	512	1850.2	25.89	PASS
EGPRS1900 3 Slot	661	1880	26.35	PASS
EGPRS1900 3 Slot	810	1909.8	26.26	PASS
EGPRS1900 4 Slot	512	1850.2	24.53	PASS
EGPRS1900 4 Slot	661	1880	24.99	PASS
EGPRS1900 4 Slot	810	1909.8	24.84	PASS
EGPRS850 1 Slot	128	824.2	27.89	PASS
EGPRS850 1 Slot	189	836.4	27.62	PASS
EGPRS850 1 Slot	251	848.8	27.94	PASS
EGPRS850 2 Slot	128	824.2	26.84	PASS
EGPRS850 2 Slot	189	836.4	26.38	PASS
EGPRS850 2 Slot	251	848.8	26.74	PASS
EGPRS850 3 Slot	128	824.2	24.83	PASS
EGPRS850 3 Slot	189	836.4	24.25	PASS
EGPRS850 3 Slot	251	848.8	24.50	PASS
EGPRS850 4 Slot	128	824.2	23.35	PASS
EGPRS850 4 Slot	189	836.4	23.23	PASS
EGPRS850 4 Slot	251	848.8	23.12	PASS


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
EGPRS1900	512	1850.2	5.35	13.00	PASS
EGPRS1900	661	1880	5.27	13.00	PASS
EGPRS1900	810	1909.8	5.32	13.00	PASS
EGPRS850	128	824.2	8.72	13.00	PASS
EGPRS850	189	836.4	8.51	13.00	PASS
EGPRS850	251	848.8	8.31	13.00	PASS


EGPRS1900 Channel=512




EGPRS1900 Channel=661

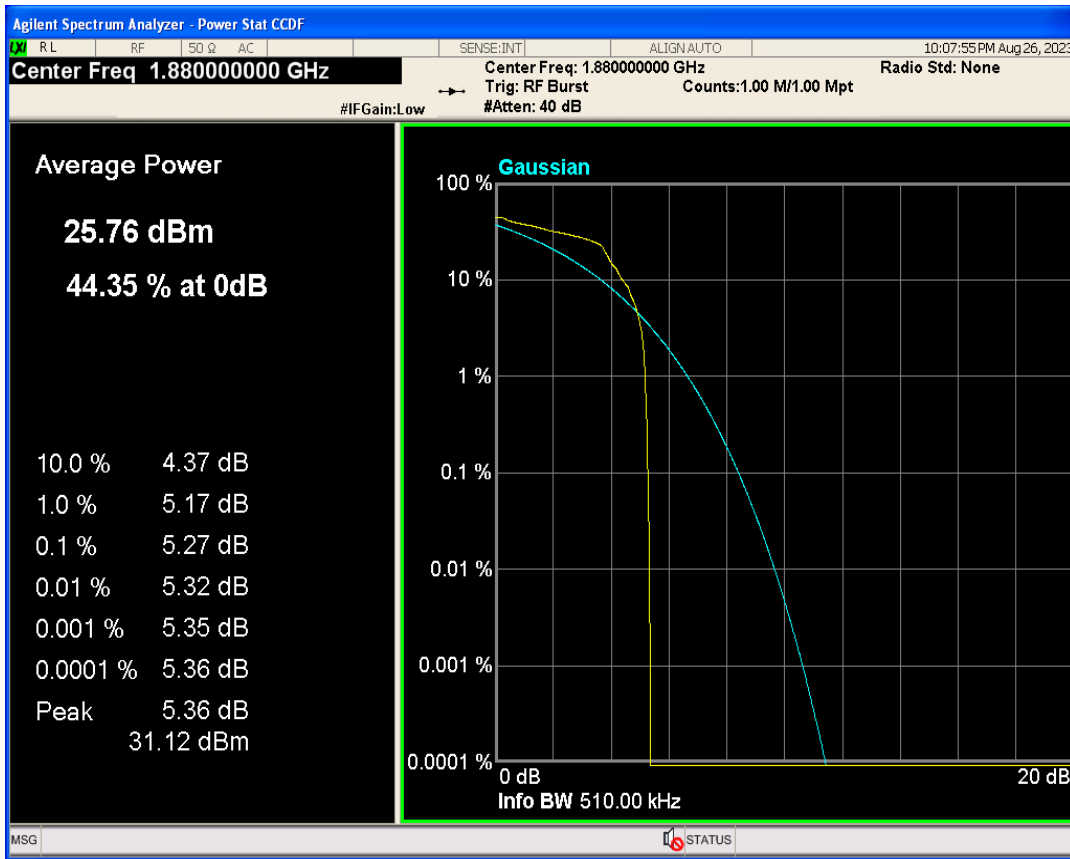


EGPRS1900 Channel=810

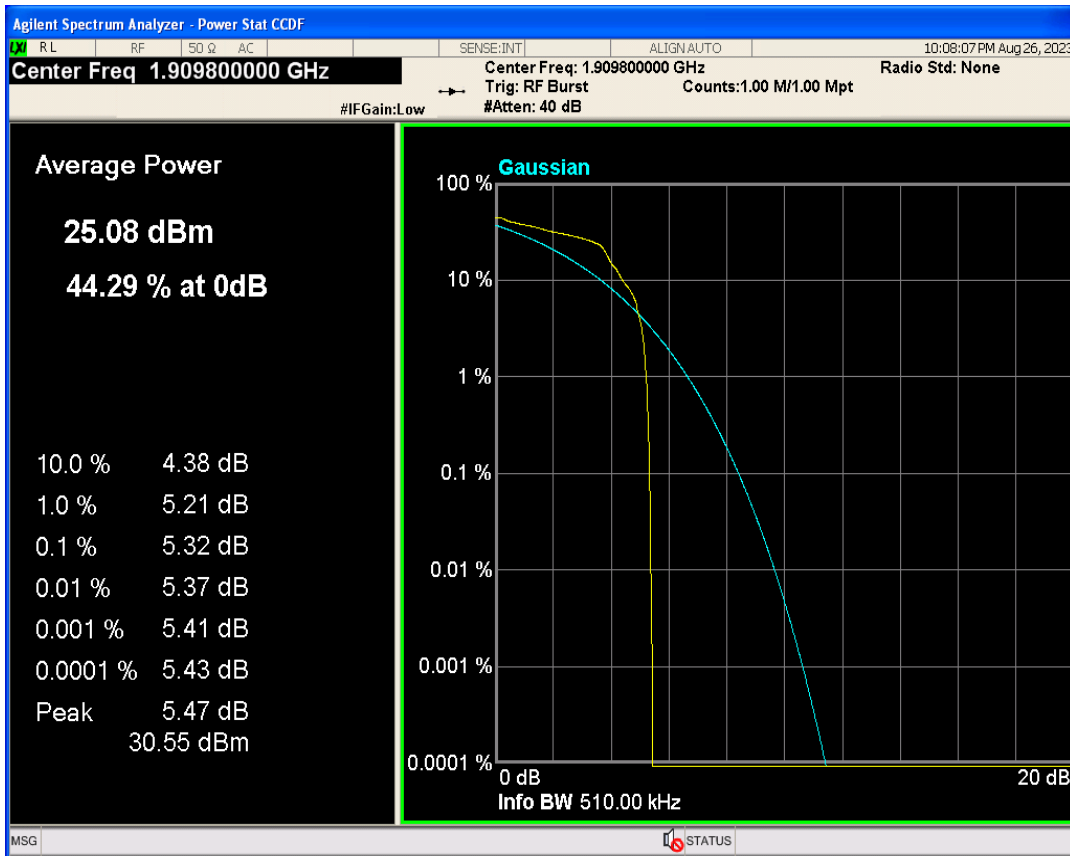


EGPRS850 Channel=128

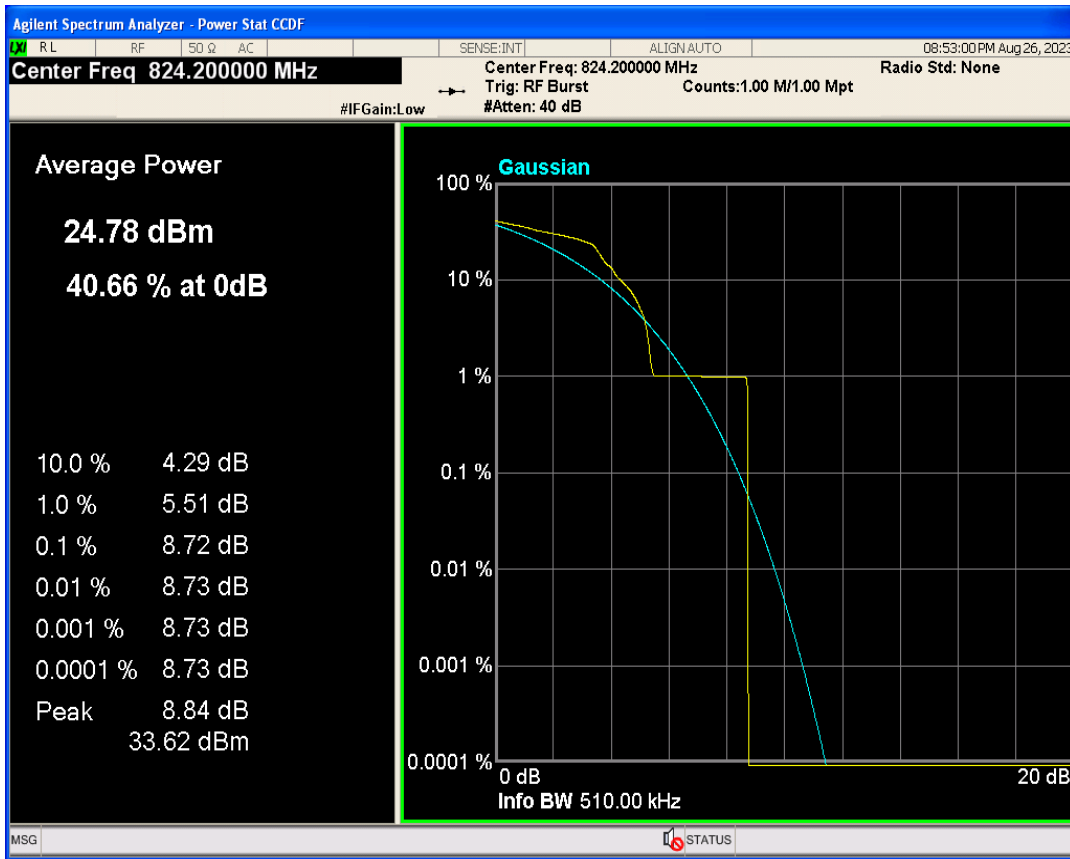

EGPRS850 Channel=251

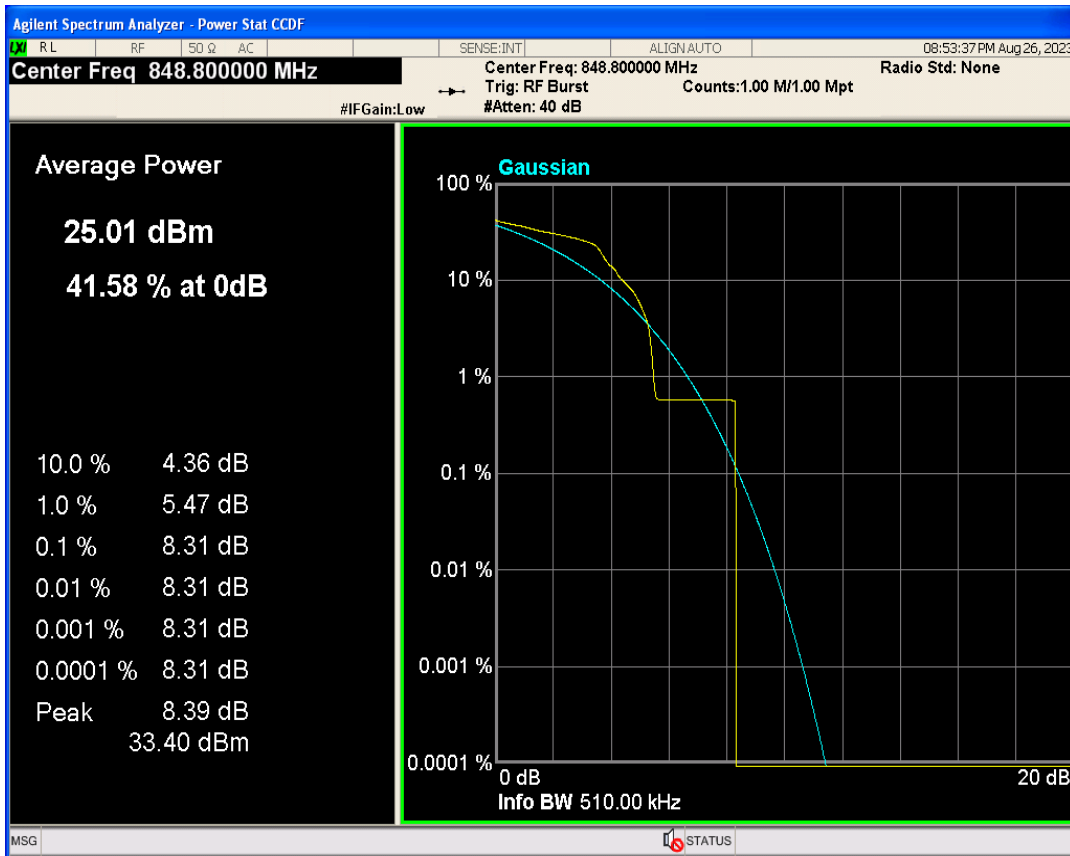


EGPRS850 Channel=189

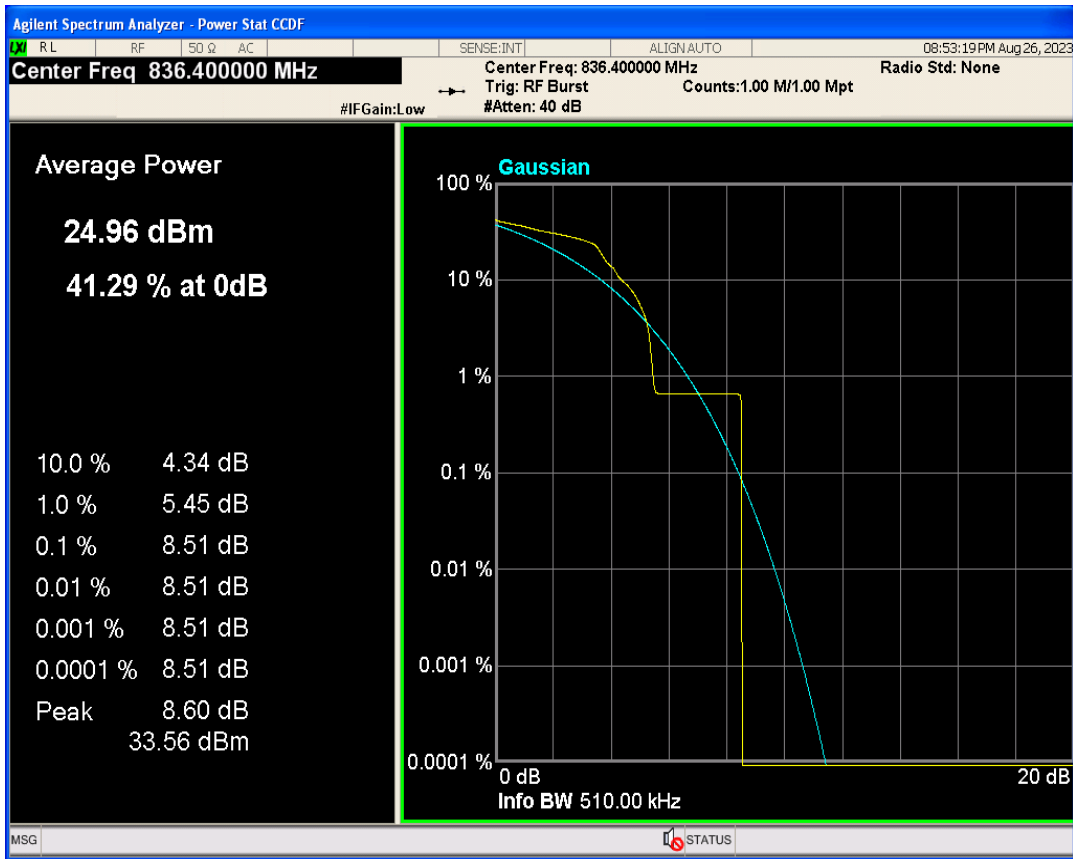


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
EGPRS1900	512	1850.2	257.857	325.444	PASS
EGPRS1900	661	1880	254.484	322.034	PASS
EGPRS1900	810	1909.8	248.574	318.149	PASS
EGPRS850	128	824.2	248.211	301.571	PASS
EGPRS850	189	836.4	241.215	300.359	PASS
EGPRS850	251	848.8	245.091	301.583	PASS


EGPRS1900 Channel=512

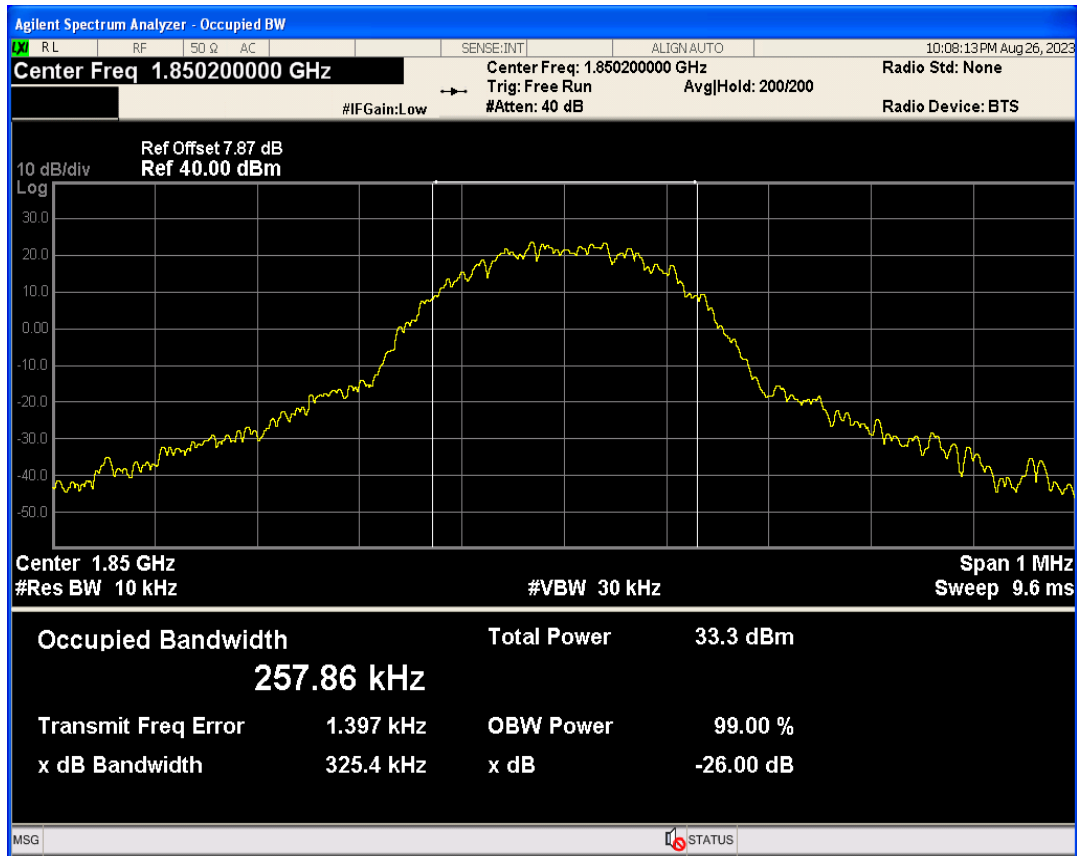


EGPRS1900 Channel=810

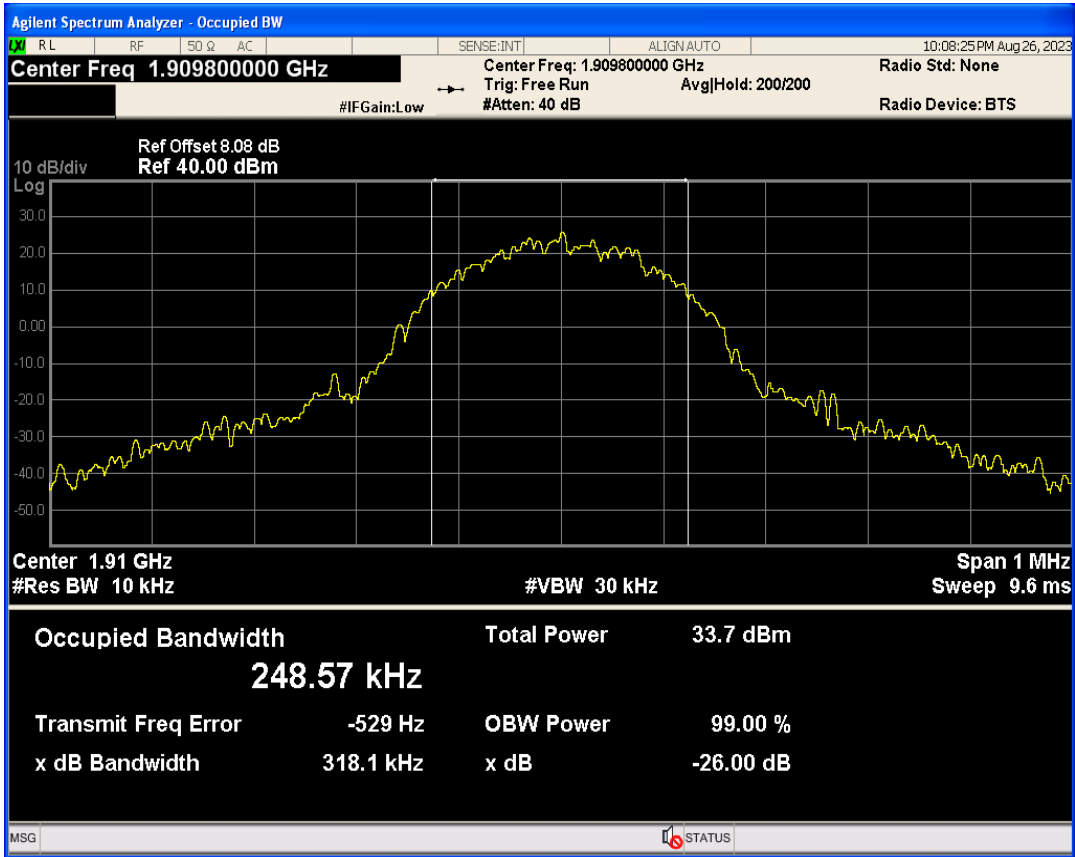


EGPRS1900 Channel=661

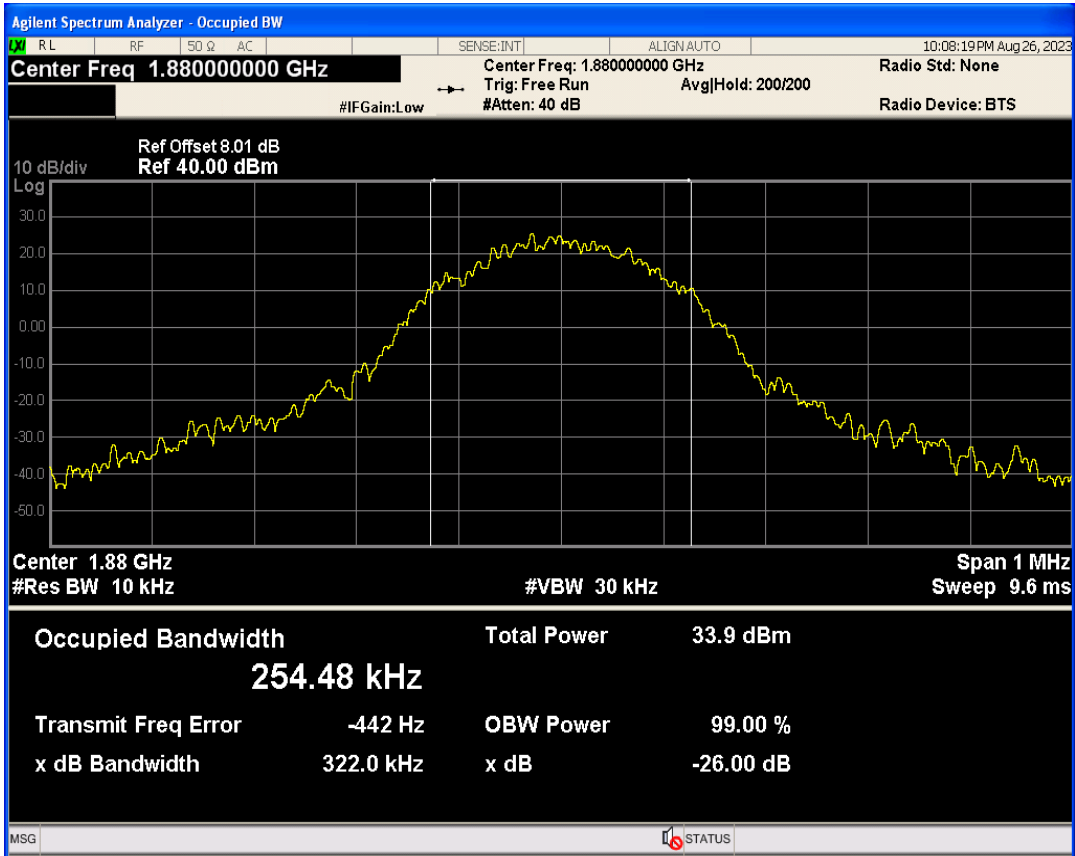


EGPRS850 Channel=128

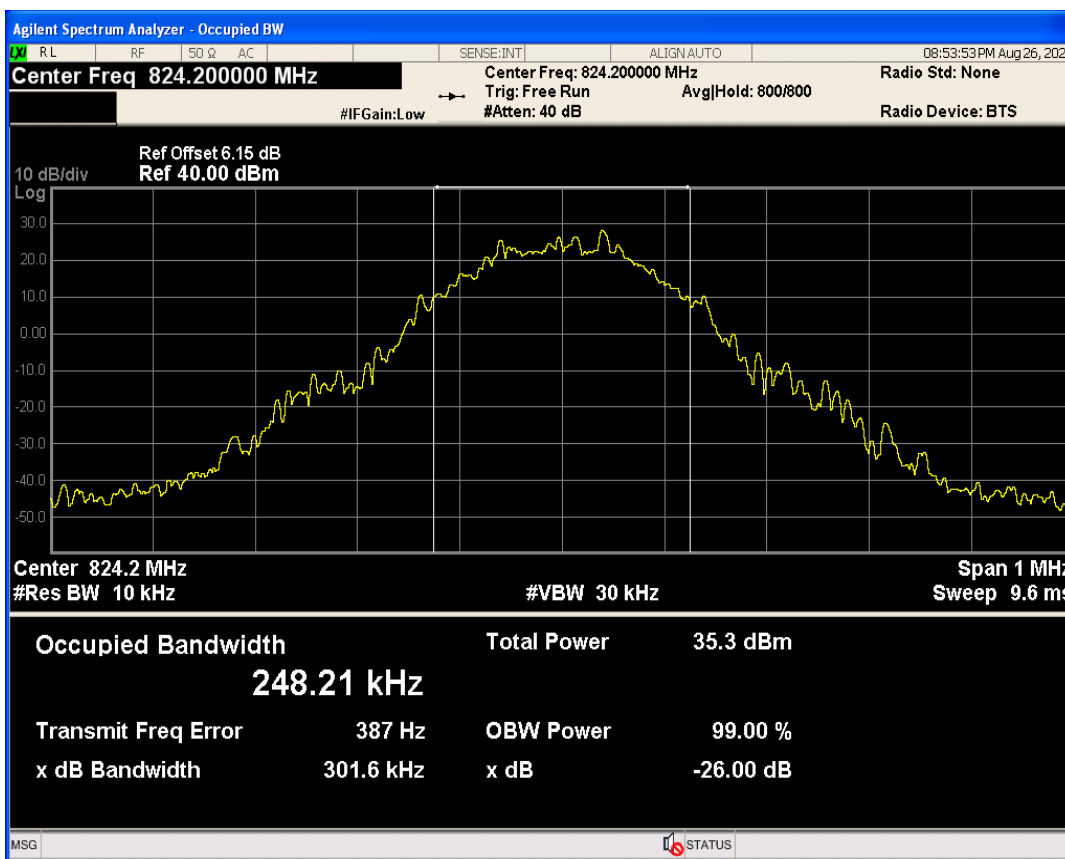

EGPRS850 Channel=251

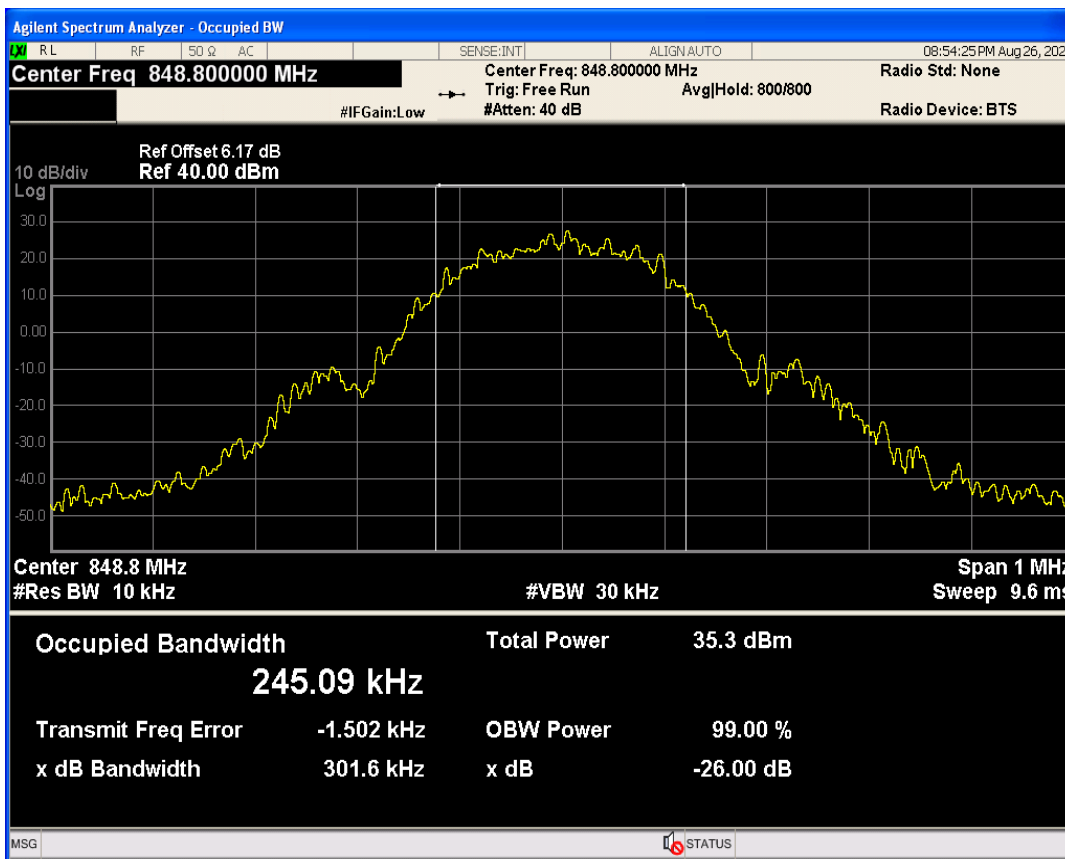


EGPRS850 Channel=189

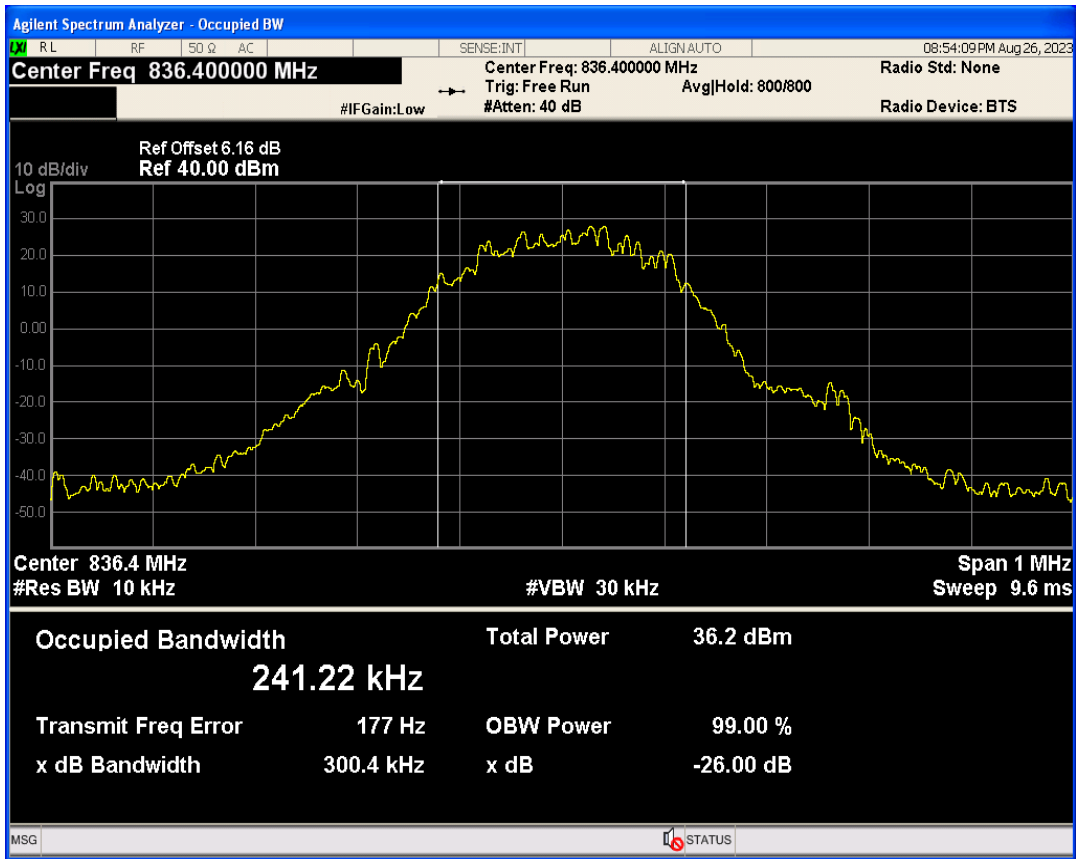


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	1849.97	-35.31	-13	PASS
EGPRS1900	810	1909.8	1910.00	-36.94	-13	PASS
EGPRS850	128	824.2	823.99	-34.78	-13	PASS
EGPRS850	251	848.8	849.01	-35.35	-13	PASS


EGPRS1900 Channel=512

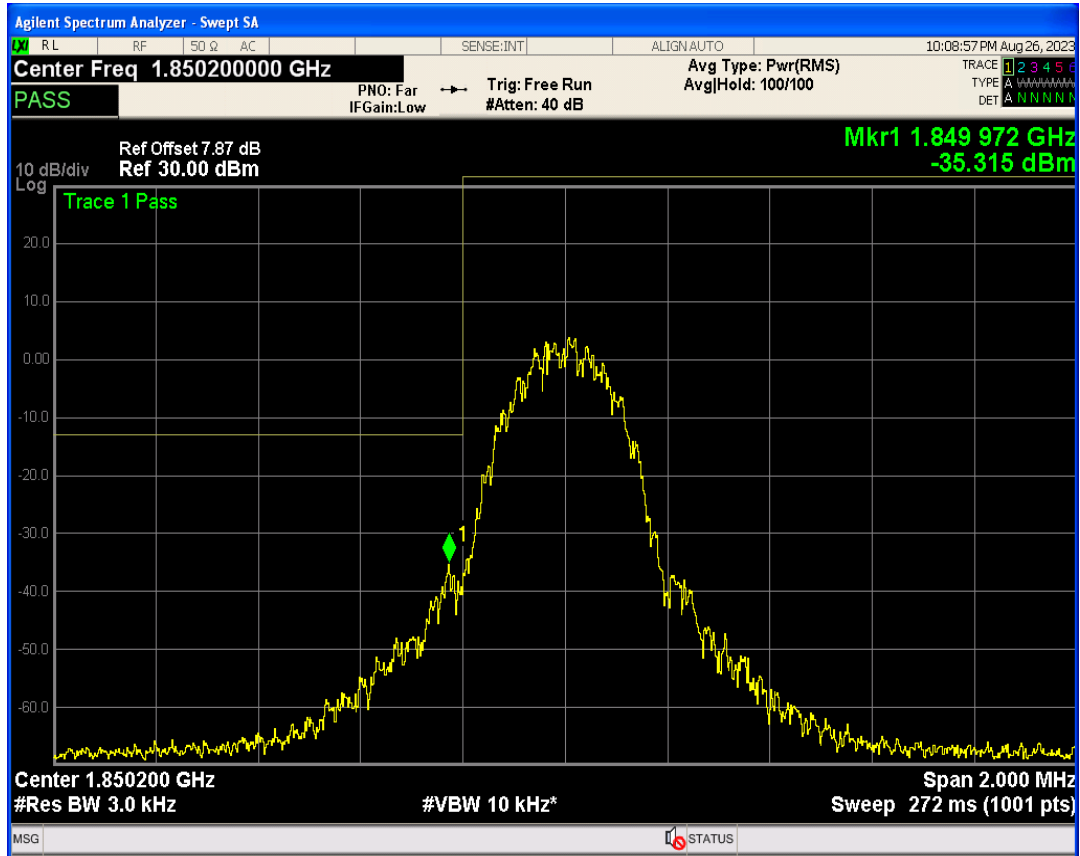


EGPRS1900 Channel=810

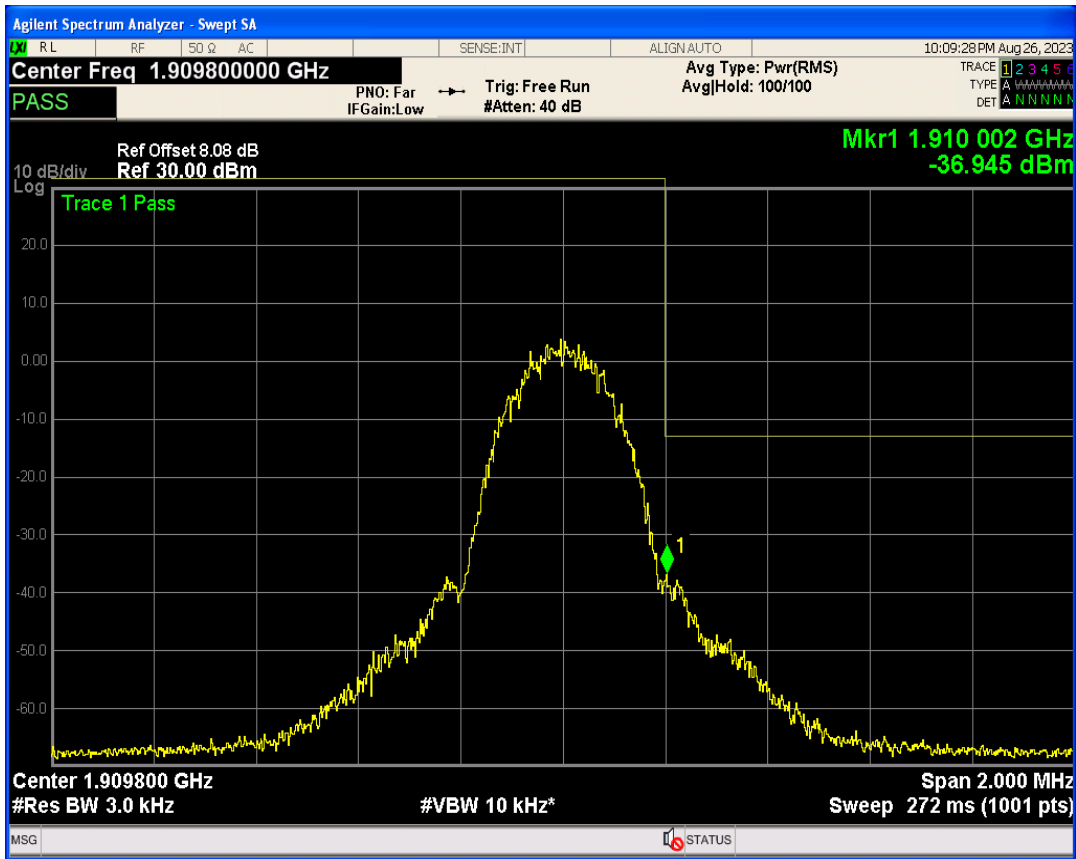

EGPRS850 Channel=128

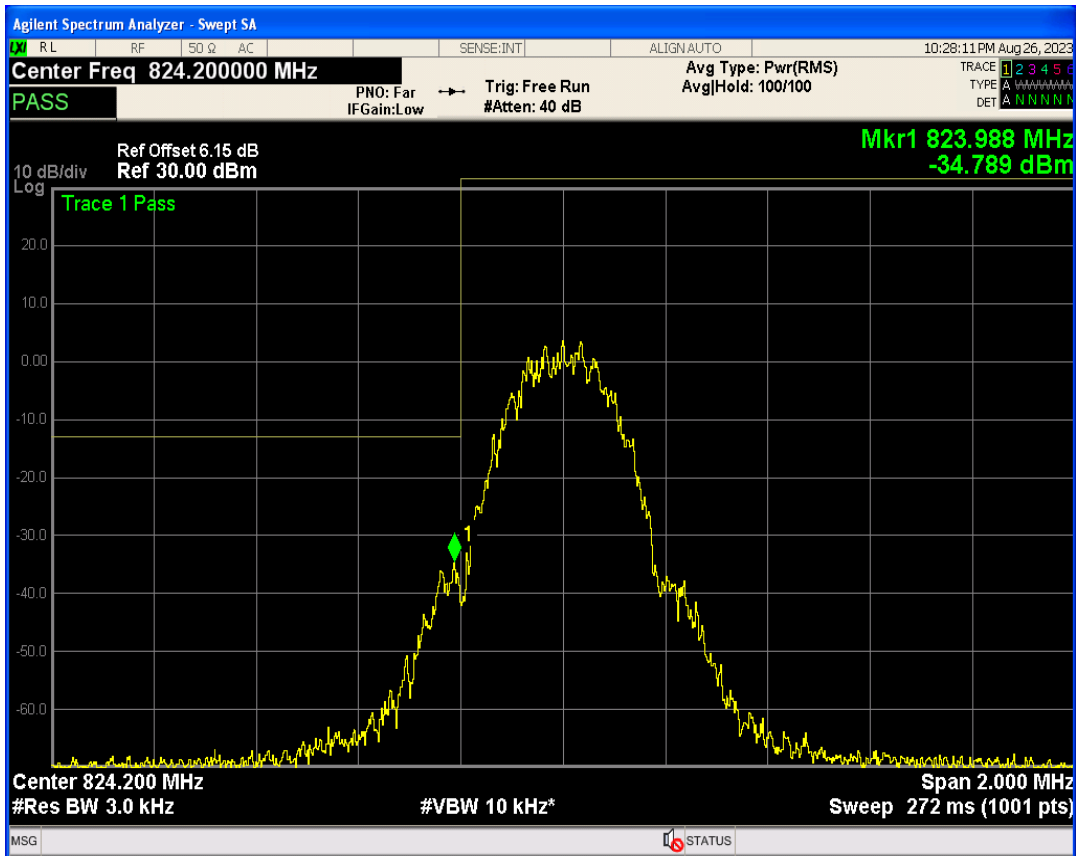


EGPRS850 Channel=251

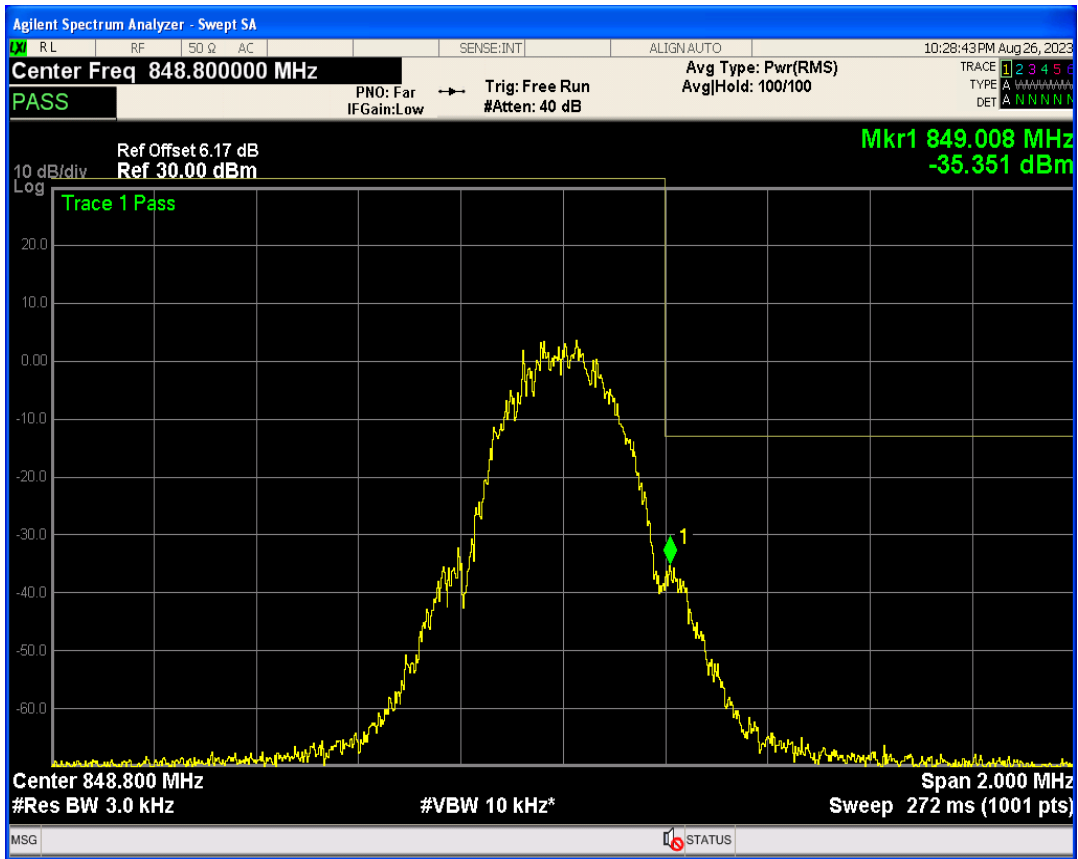


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	25555.02	-18.24	-13	PASS
EGPRS1900	661	1880	25958.69	-18.34	-13	PASS
EGPRS1900	810	1909.8	25461.05	-18.74	-13	PASS
EGPRS850	128	824.2	25498.77	-20.78	-13	PASS
EGPRS850	189	836.4	25976.56	-19.45	-13	PASS
EGPRS850	251	848.8	26298.83	-20.71	-13	PASS


EGPRS1900 Channel=512

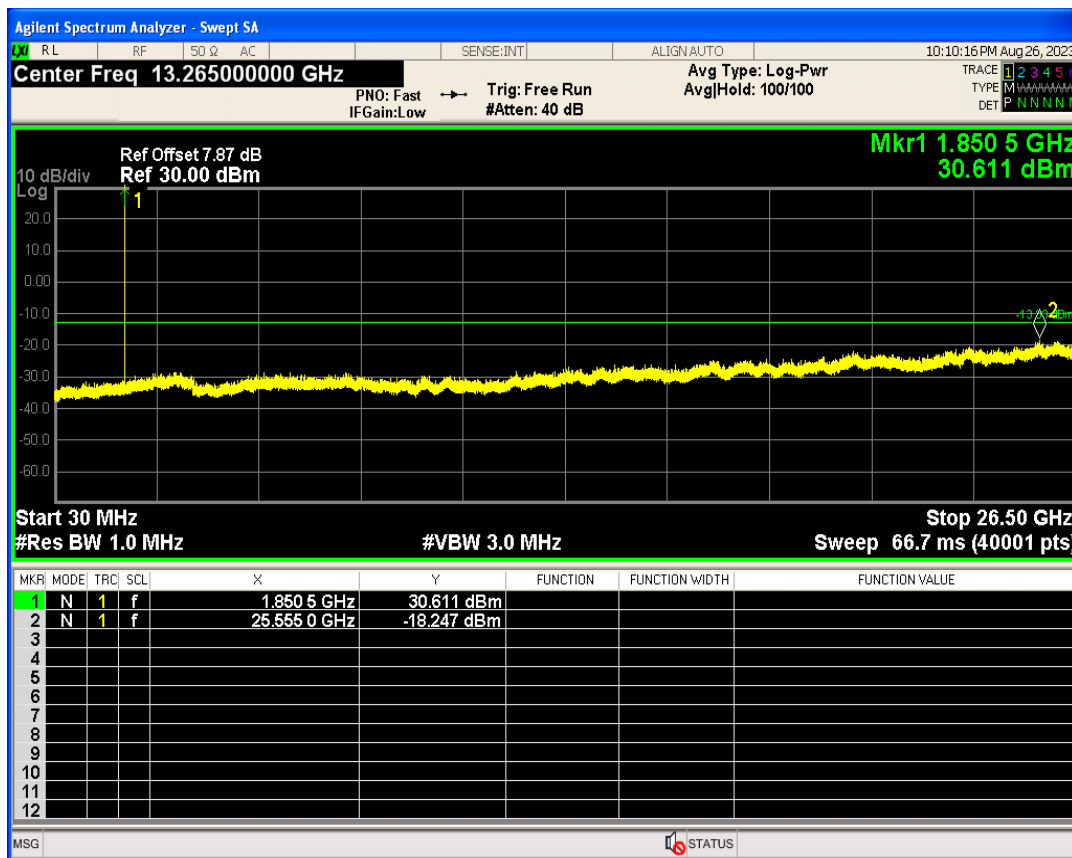


EGPRS1900 Channel=661

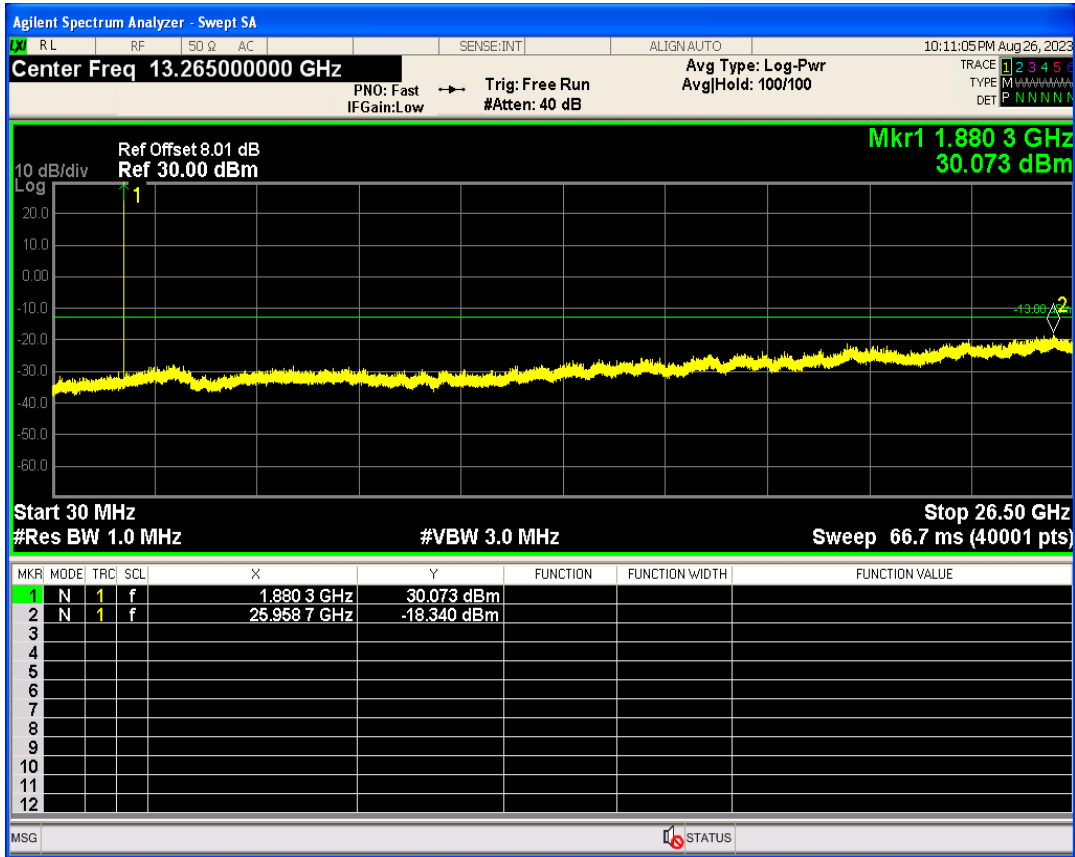


EGPRS1900 Channel=810

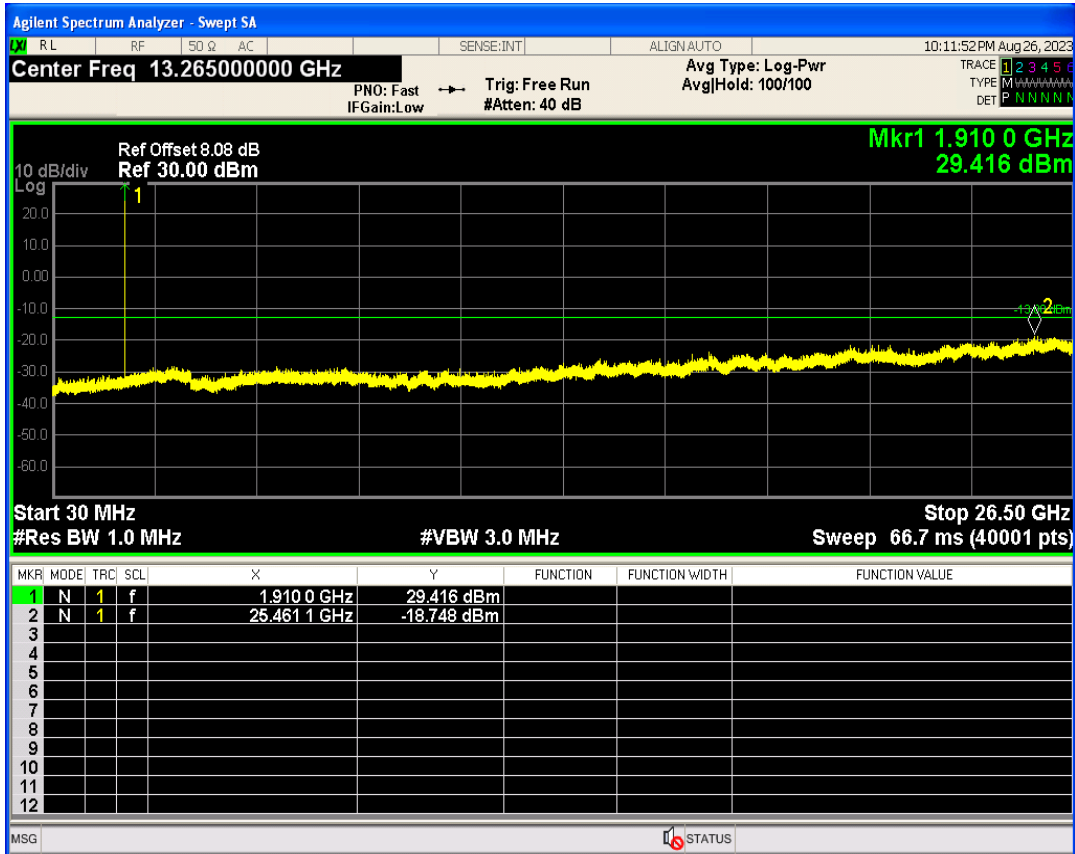


EGPRS850 Channel=128

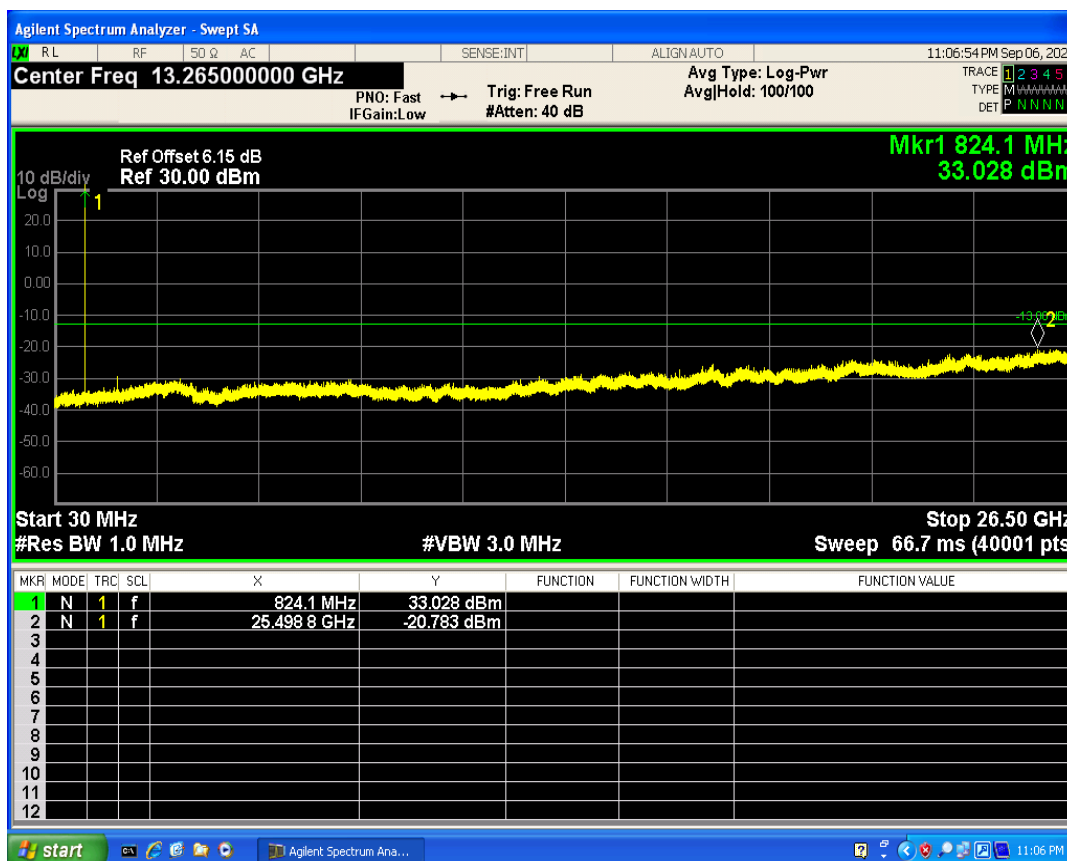

EGPRS850 Channel=251

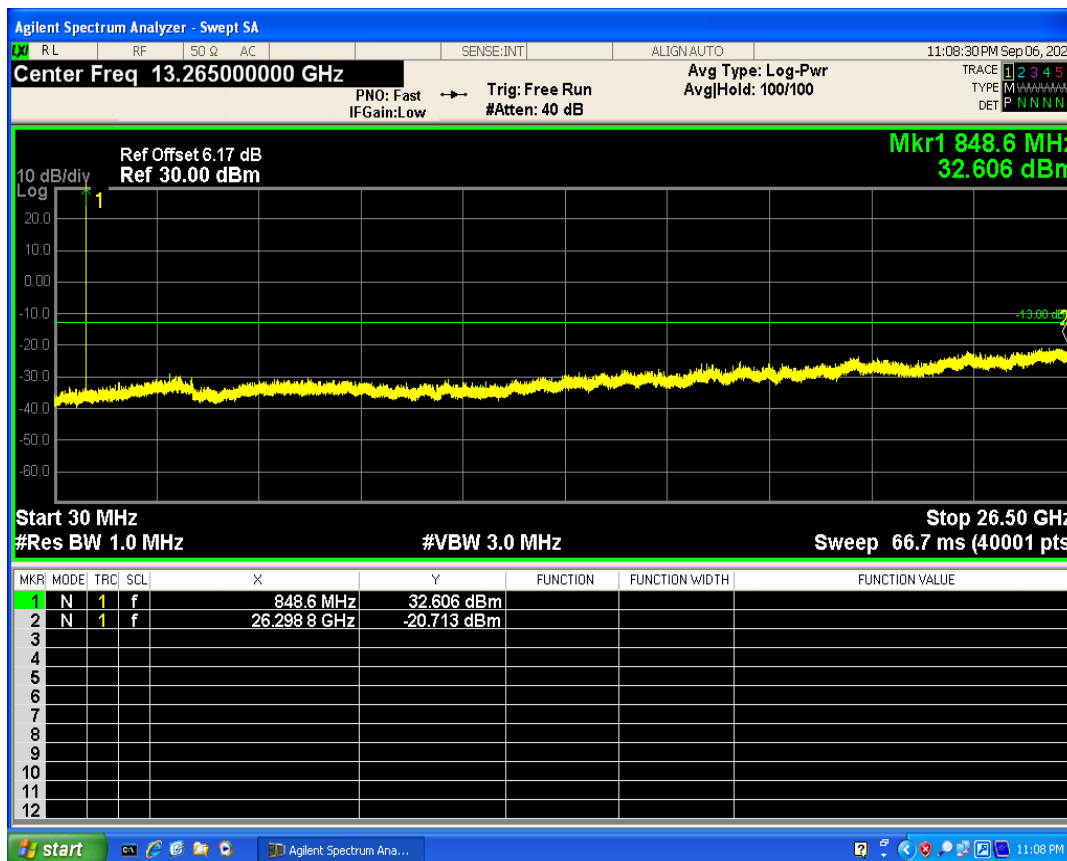

EGPRS850 Channel=189

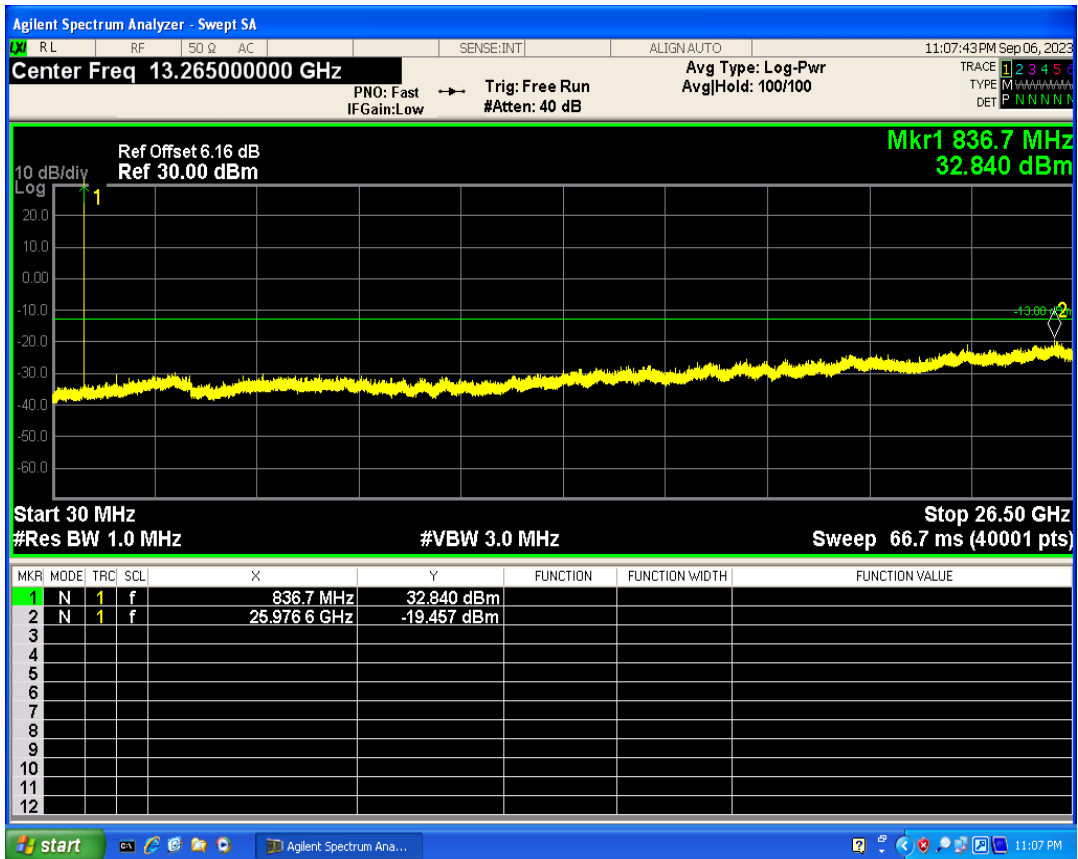


Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
GPRS1900 1 Slot	512	1850.2	31.56	PASS
GPRS1900 1 Slot	661	1880	31.49	PASS
GPRS1900 1 Slot	810	1909.8	31.36	PASS
GPRS1900 2 Slot	512	1850.2	31.30	PASS
GPRS1900 2 Slot	661	1880	31.22	PASS
GPRS1900 2 Slot	810	1909.8	31.10	PASS
GPRS1900 3 Slot	512	1850.2	30.47	PASS
GPRS1900 3 Slot	661	1880	30.41	PASS
GPRS1900 3 Slot	810	1909.8	30.45	PASS
GPRS1900 4 Slot	512	1850.2	28.86	PASS
GPRS1900 4 Slot	661	1880	28.90	PASS
GPRS1900 4 Slot	810	1909.8	28.89	PASS
GPRS850 1 Slot	128	824.2	33.36	PASS
GPRS850 1 Slot	189	836.4	32.22	PASS
GPRS850 1 Slot	251	848.8	33.26	PASS
GPRS850 2 Slot	128	824.2	32.13	PASS
GPRS850 2 Slot	189	836.4	32.16	PASS
GPRS850 2 Slot	251	848.8	32.29	PASS
GPRS850 3 Slot	128	824.2	31.36	PASS
GPRS850 3 Slot	189	836.4	31.58	PASS
GPRS850 3 Slot	251	848.8	31.54	PASS
GPRS850 4 Slot	128	824.2	30.22	PASS
GPRS850 4 Slot	189	836.4	30.46	PASS
GPRS850 4 Slot	251	848.8	30.43	PASS


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.65	13.00	PASS
GPRS1900	661	1880	2.66	13.00	PASS
GPRS1900	810	1909.8	2.67	13.00	PASS
GPRS850	128	824.2	2.67	13.00	PASS
GPRS850	189	836.4	2.66	13.00	PASS
GPRS850	251	848.8	2.66	13.00	PASS


GPRS1900 Channel=512

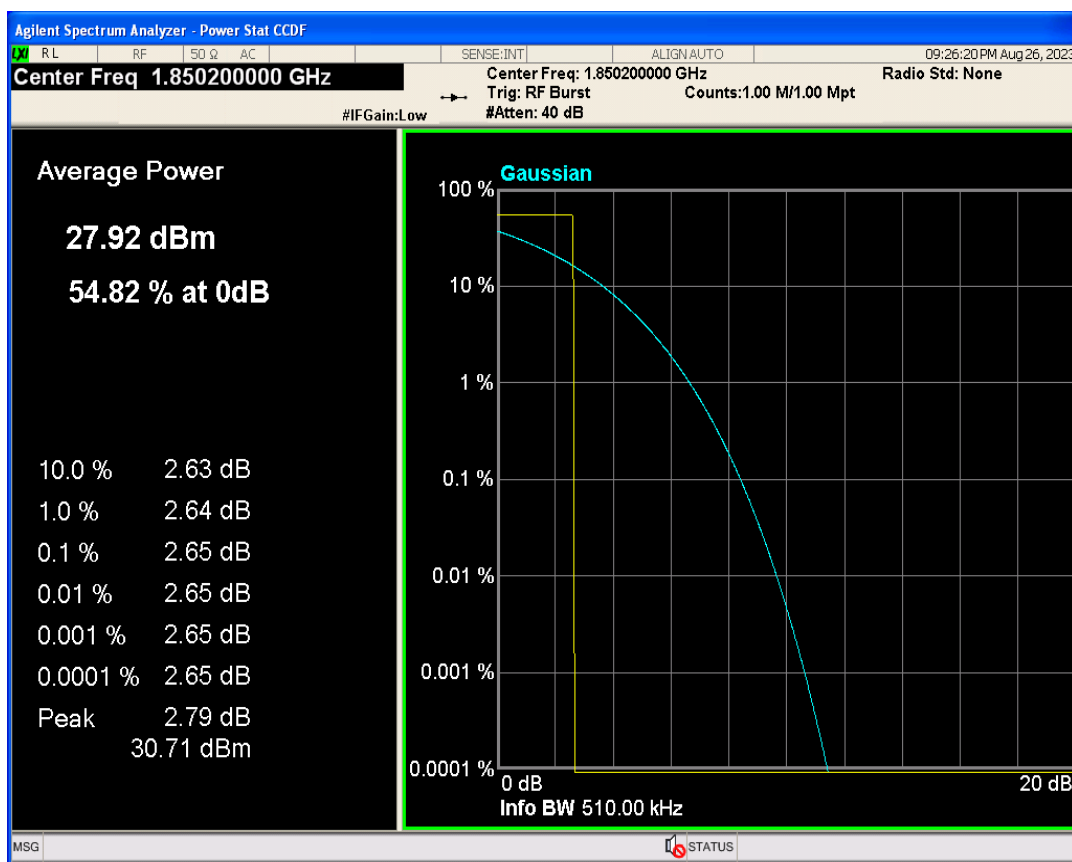


GPRS1900 Channel=661

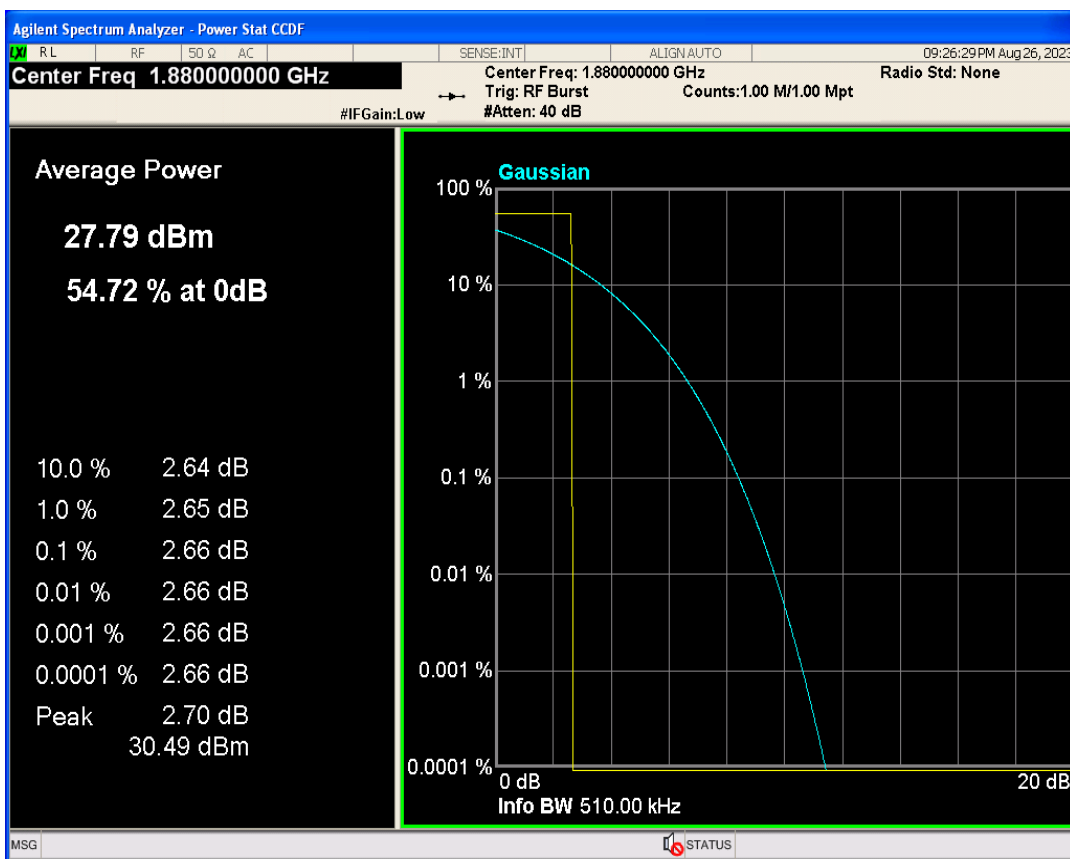


GPRS1900 Channel=810

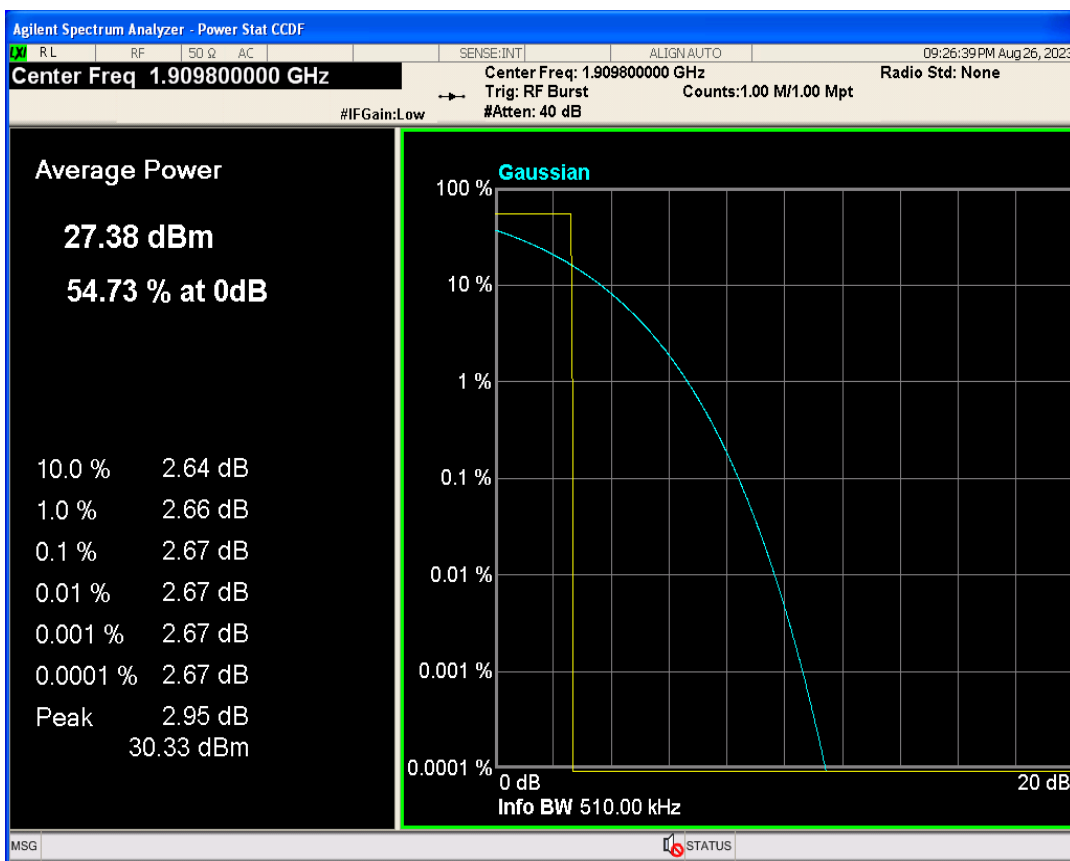


GPRS850 Channel=189

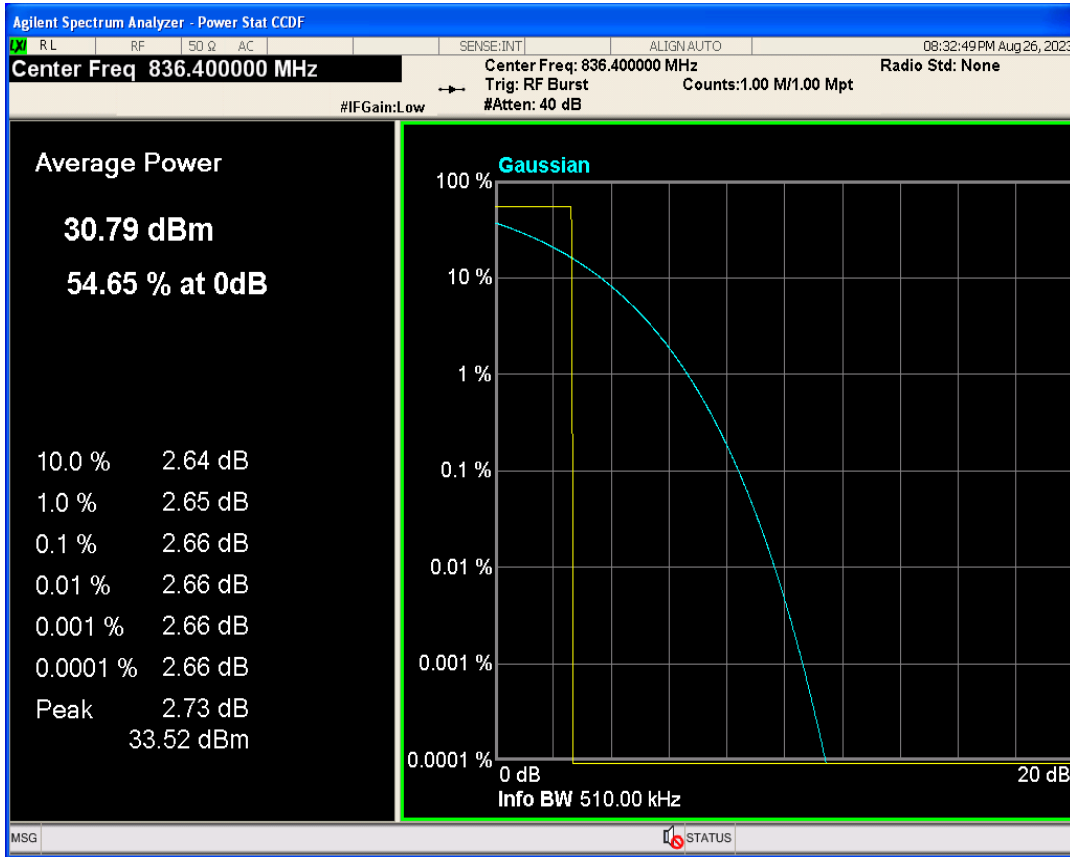

GPRS850 Channel=128

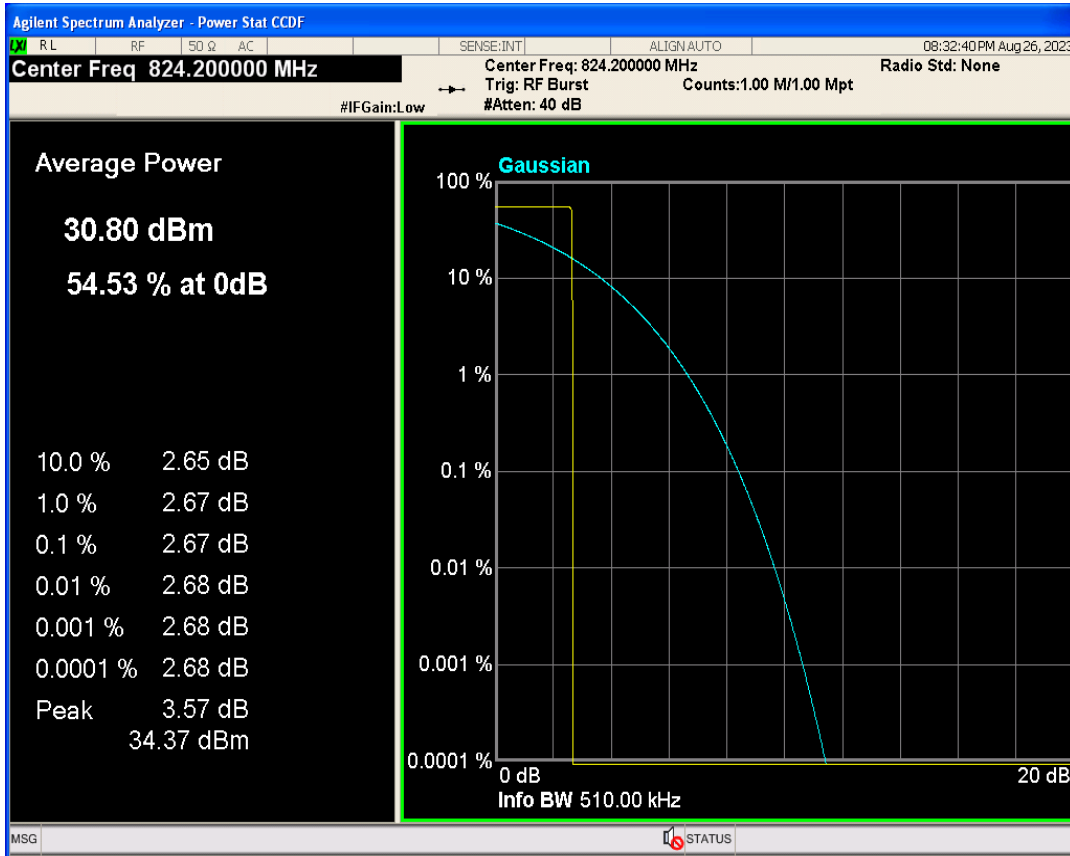


GPRS850 Channel=251

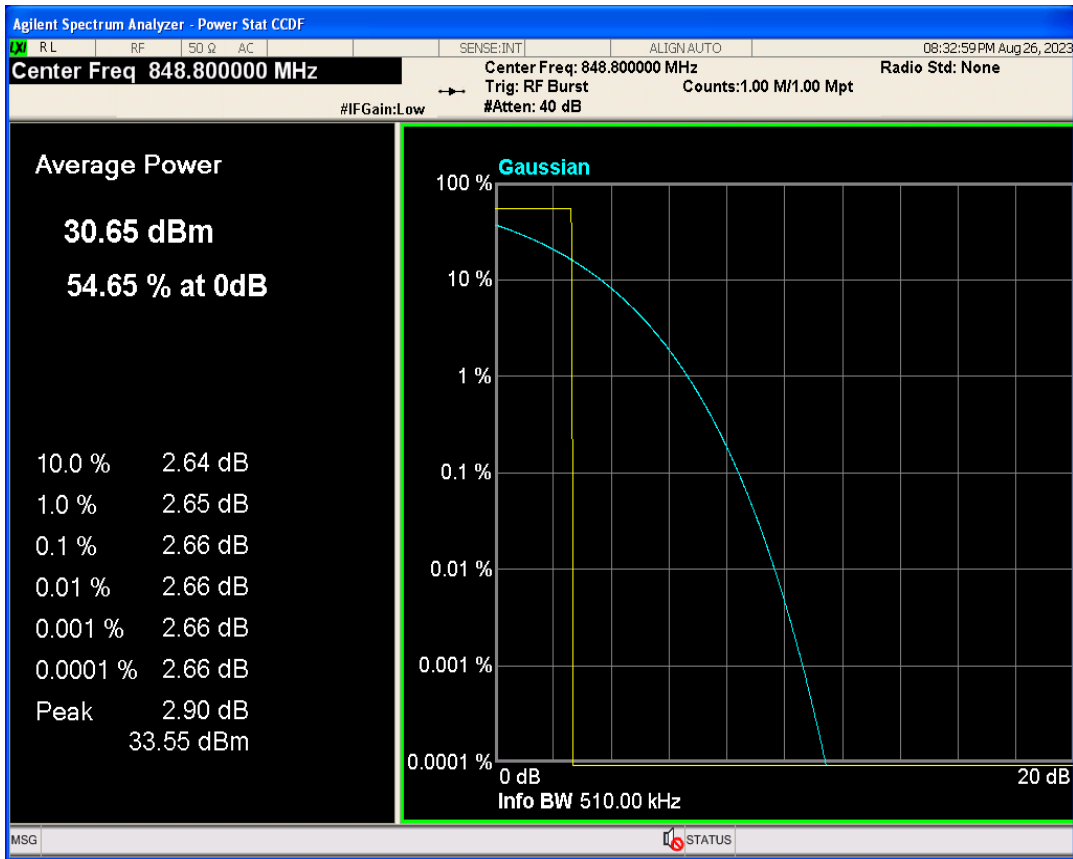


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	246.654	314.590	PASS
GPRS1900	661	1880	243.172	306.100	PASS
GPRS1900	810	1909.8	244.605	310.408	PASS
GPRS850	128	824.2	248.508	320.047	PASS
GPRS850	189	836.4	245.161	331.302	PASS
GPRS850	251	848.8	242.483	314.404	PASS


GPRS1900 Channel=512

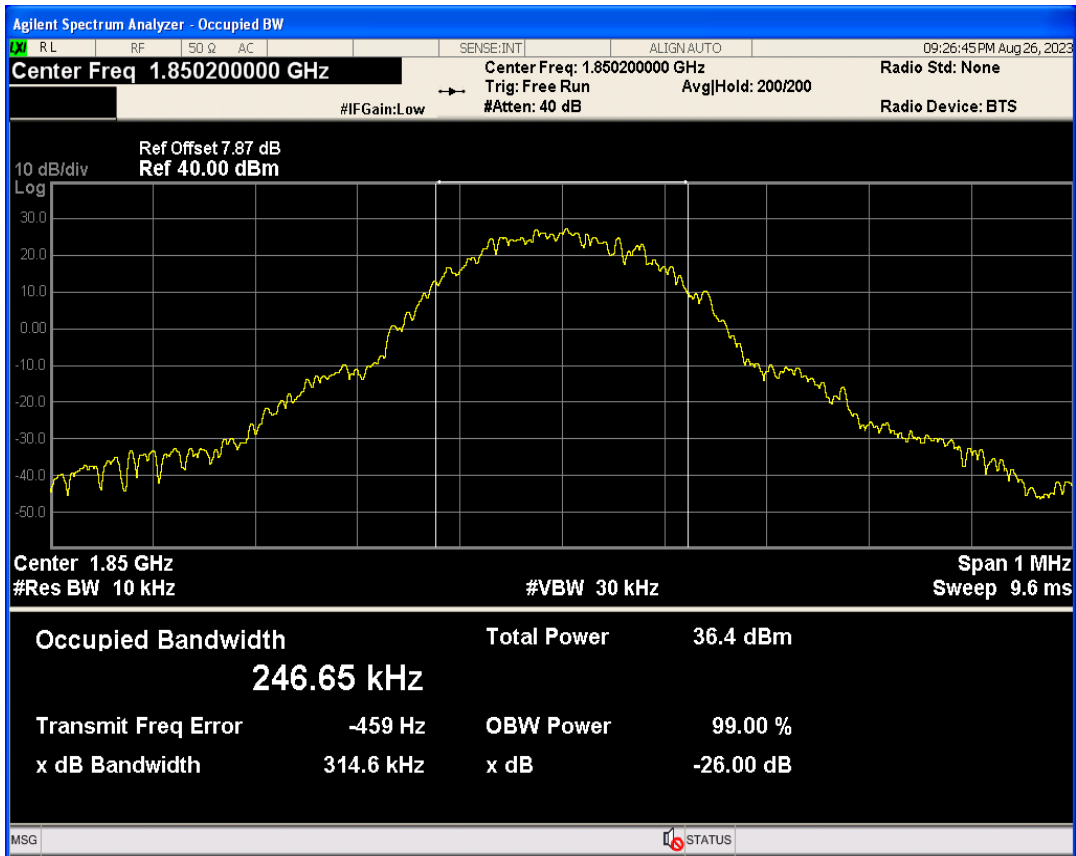


GPRS1900 Channel=810

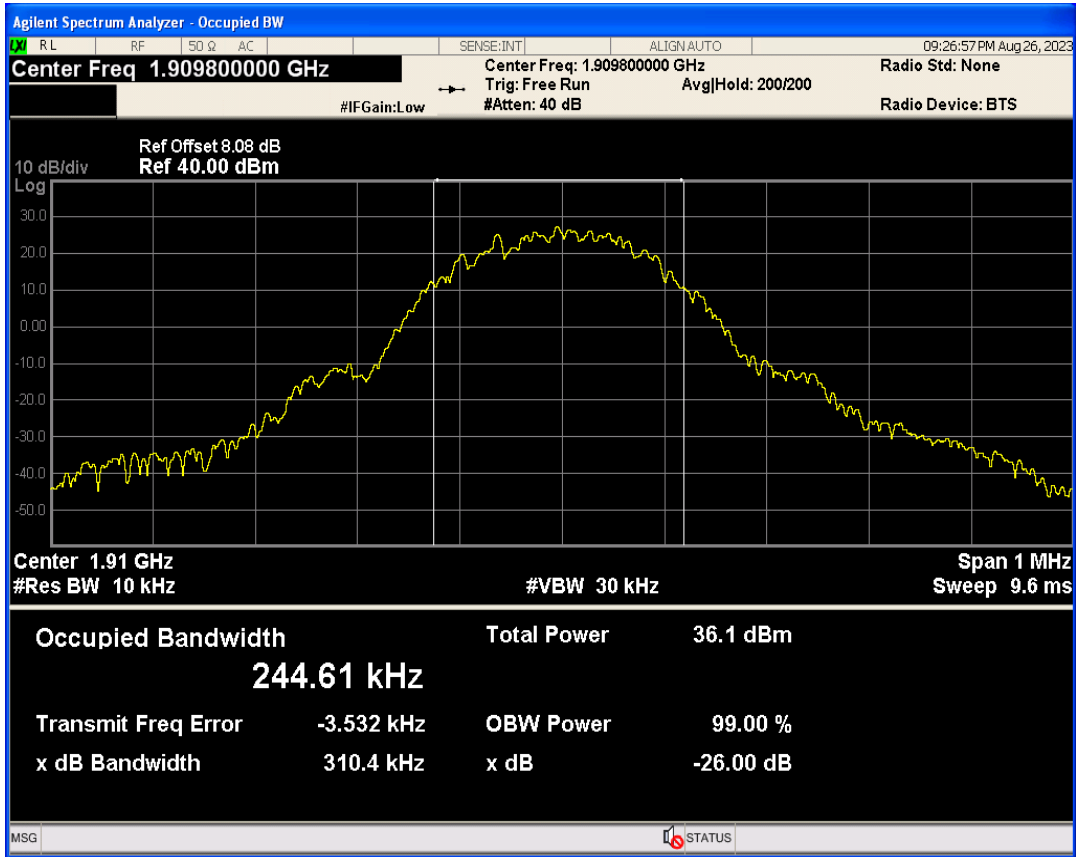


GPRS1900 Channel=661

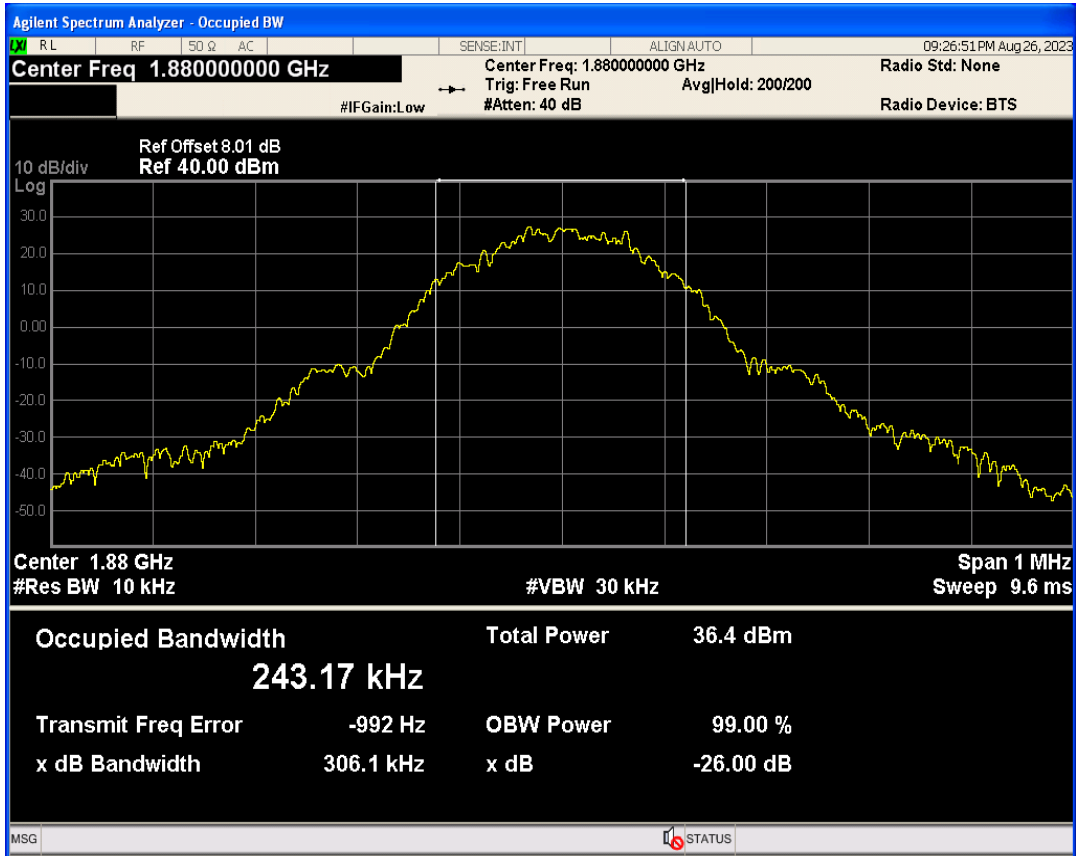


GPRS850 Channel=128

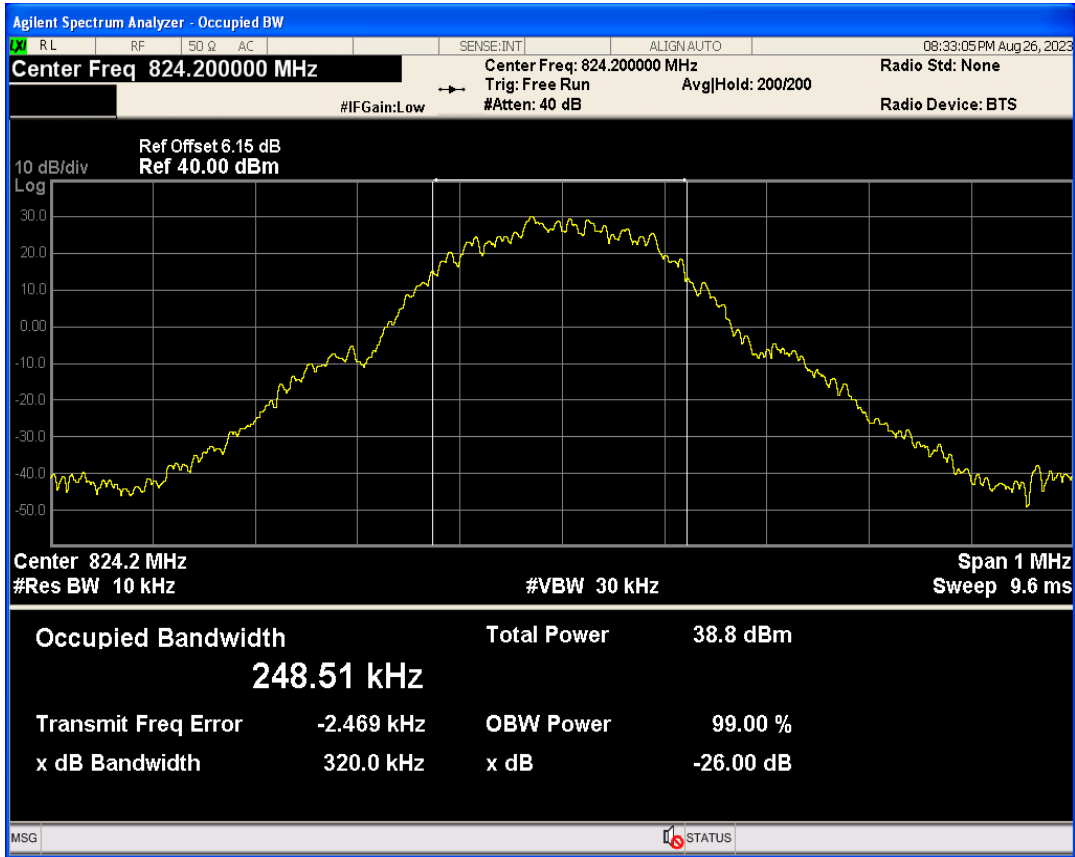

GPRS850 Channel=189

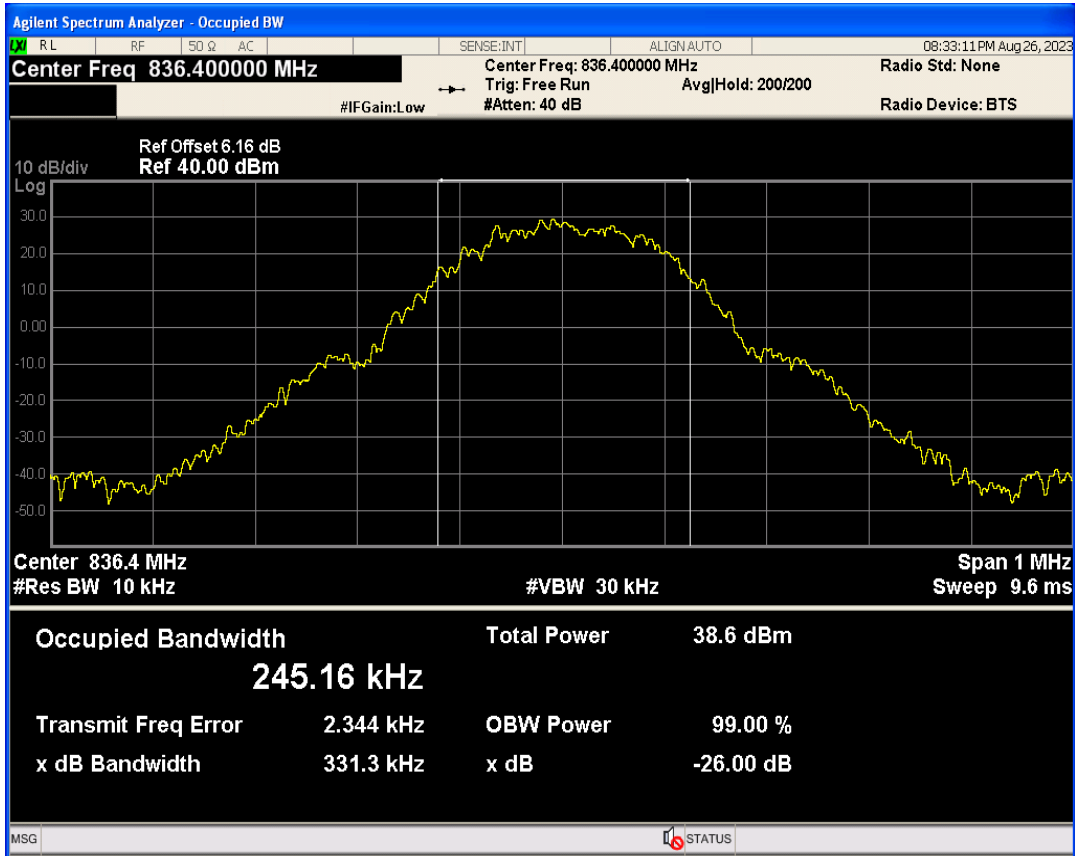


GPRS850 Channel=251

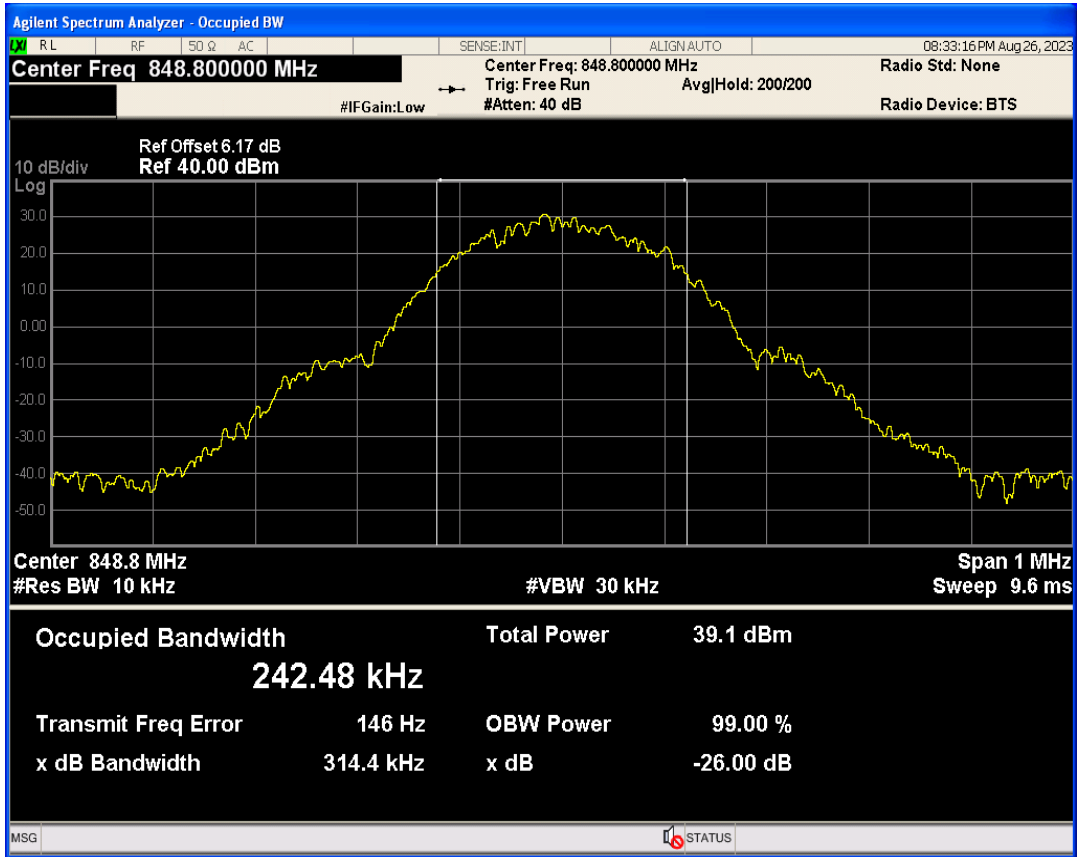


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1849.98	-29.76	-13	PASS
GPRS1900	810	1909.8	1910.02	-30.03	-13	PASS
GPRS850	128	824.2	823.97	-35.53	-13	PASS
GPRS850	251	848.8	849.01	-33.98	-13	PASS


GPRS1900 Channel=512

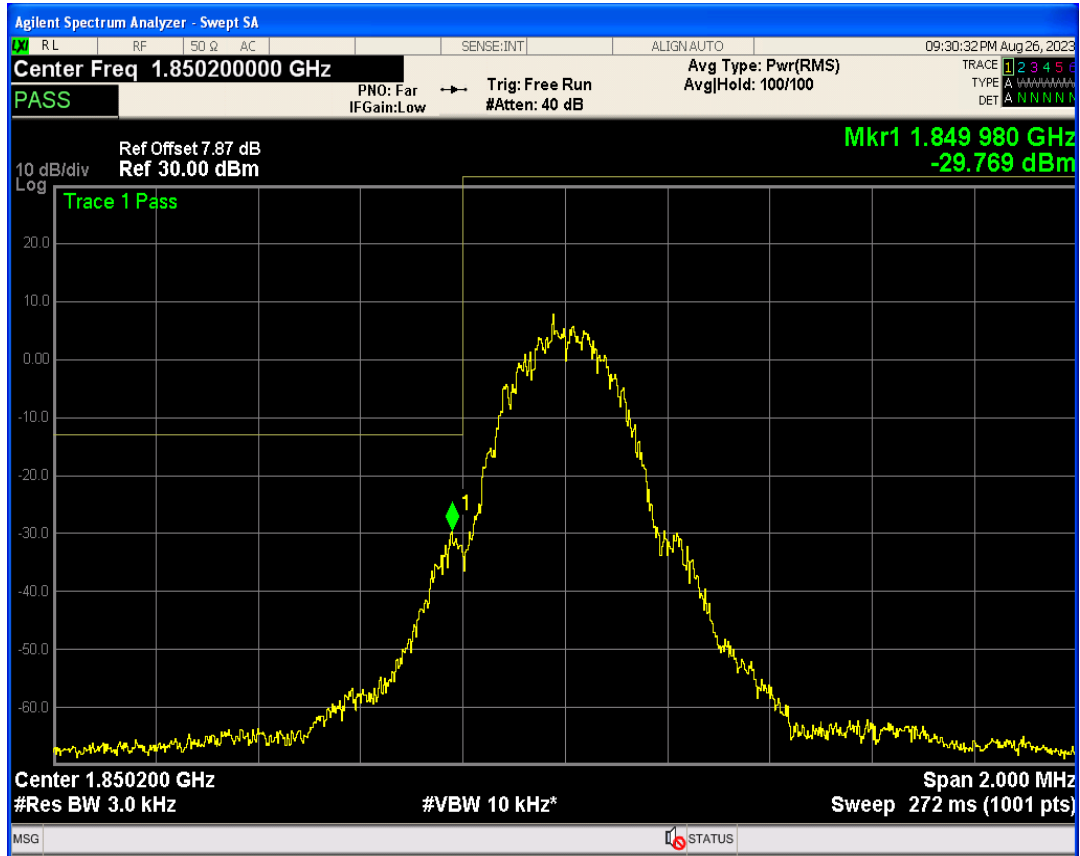


GPRS1900 Channel=810

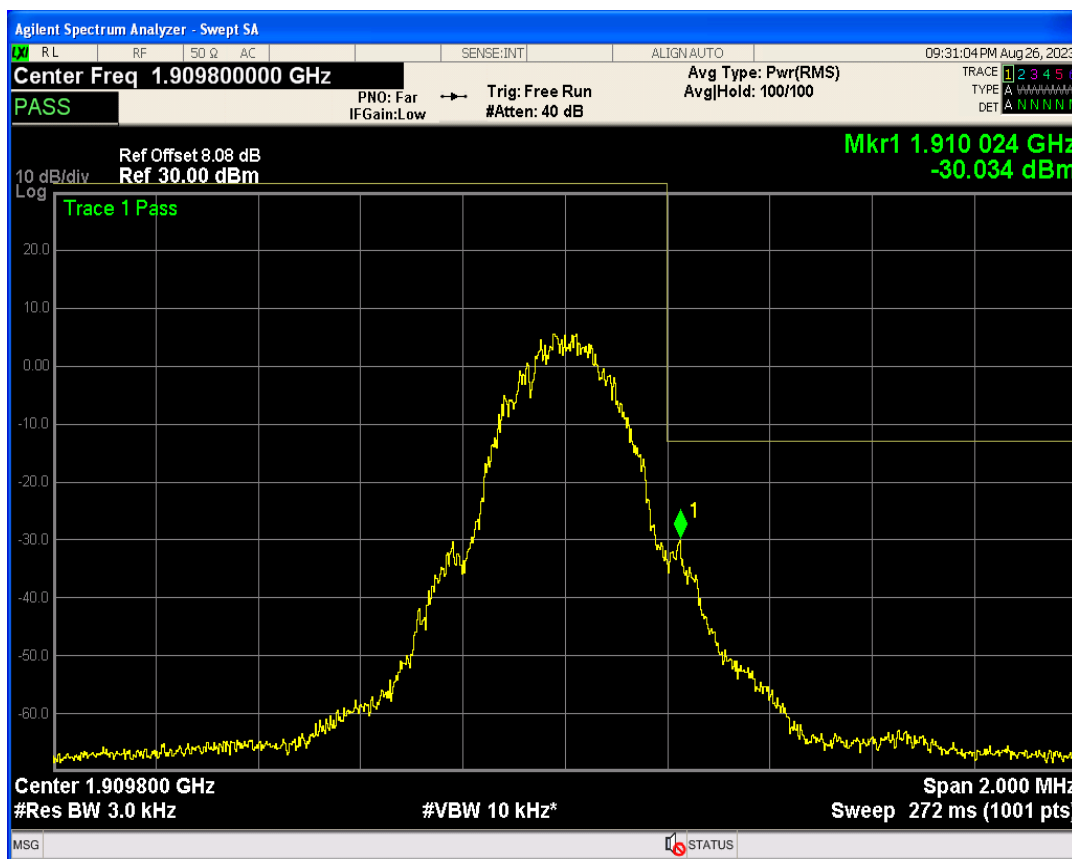

GPRS850 Channel=128

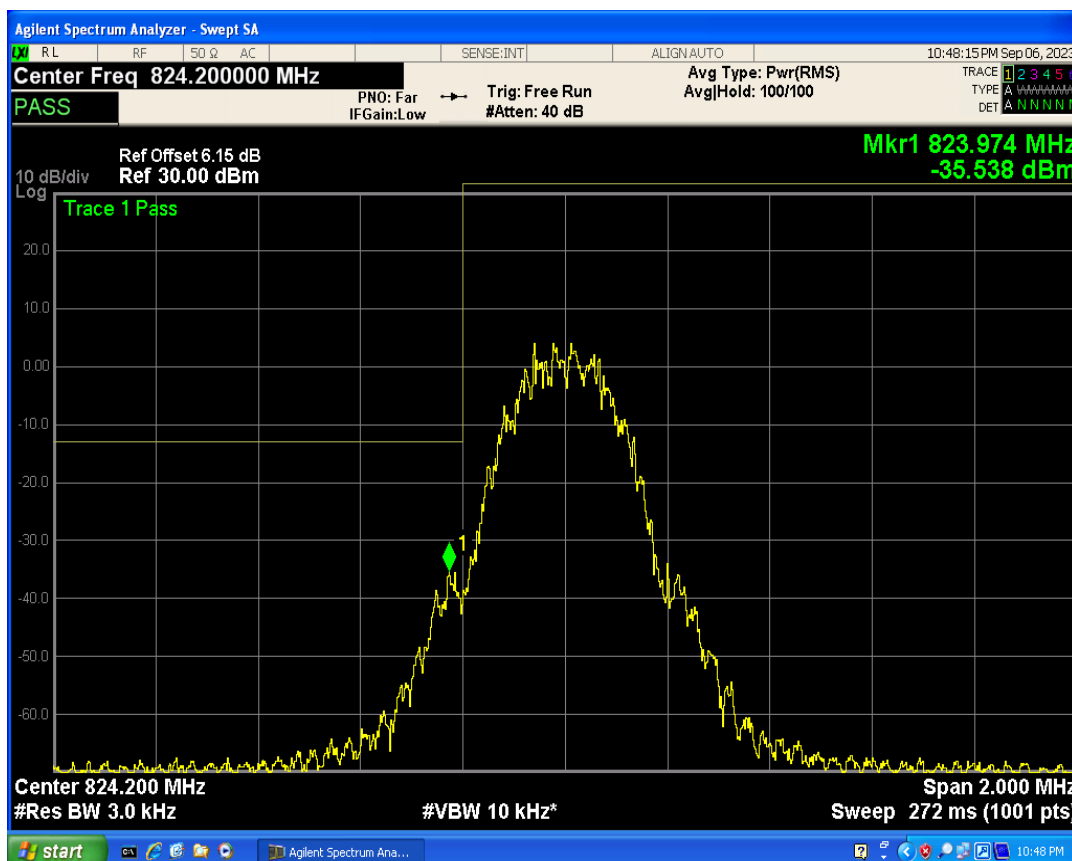


GPRS850 Channel=251

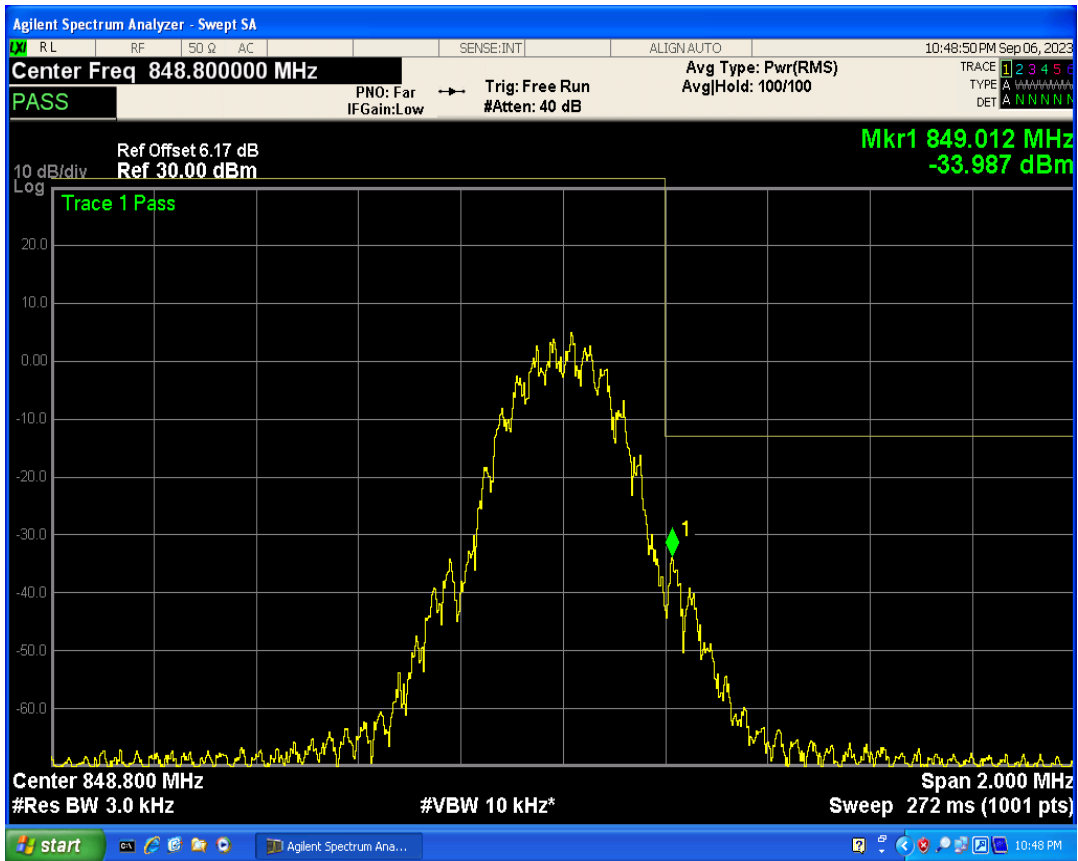


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	25981.85	-18.09	-13	PASS
GPRS1900	661	1880	25920.31	-18.14	-13	PASS
GPRS1900	810	1909.8	26005.01	-18.44	-13	PASS
GPRS850	128	824.2	25536.49	-20.28	-13	PASS
GPRS850	189	836.4	25982.51	-20.30	-13	PASS
GPRS850	251	848.8	25501.42	-19.51	-13	PASS


GPRS1900 Channel=661

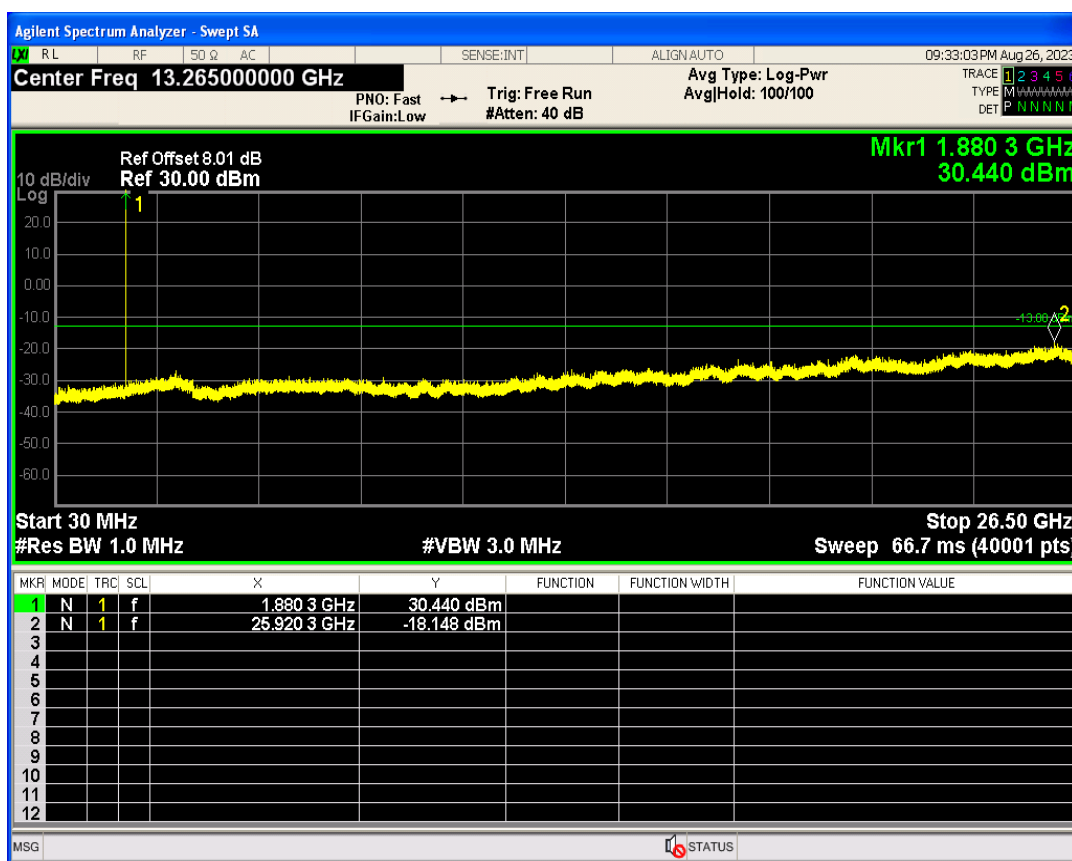


GPRS1900 Channel=512

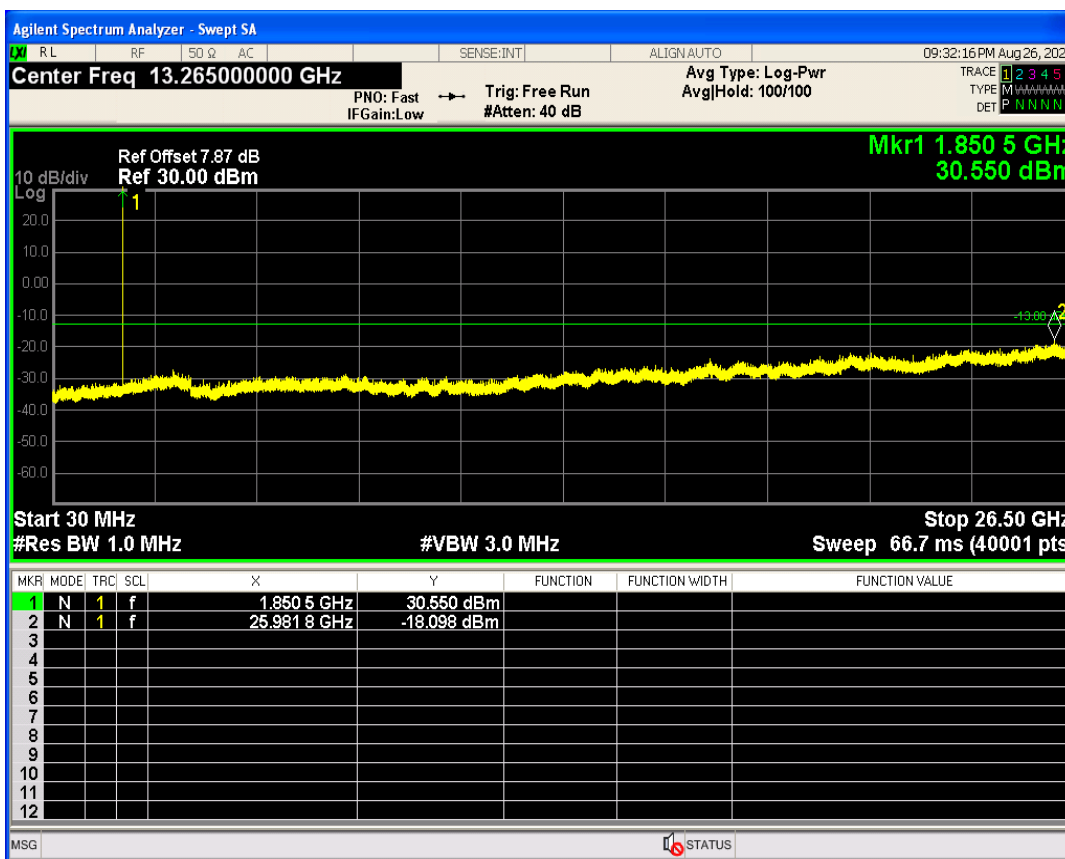


GPRS1900 Channel=810

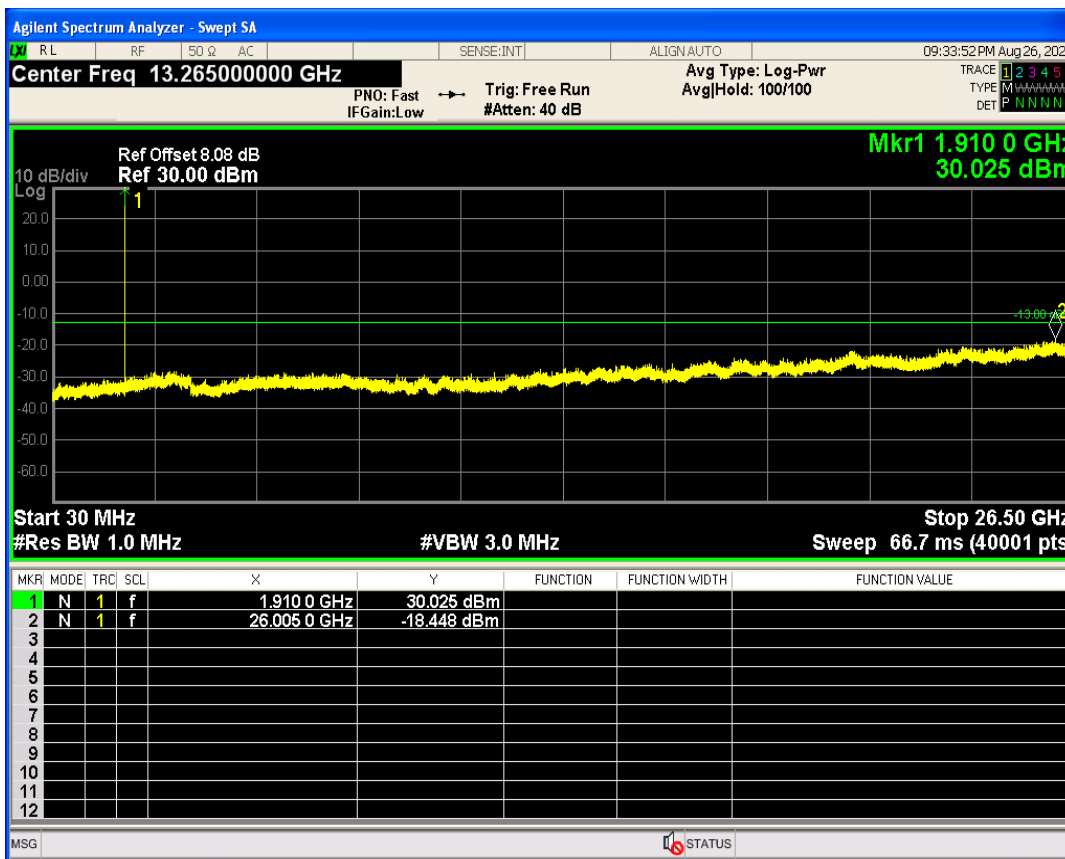


GPRS850 Channel=128

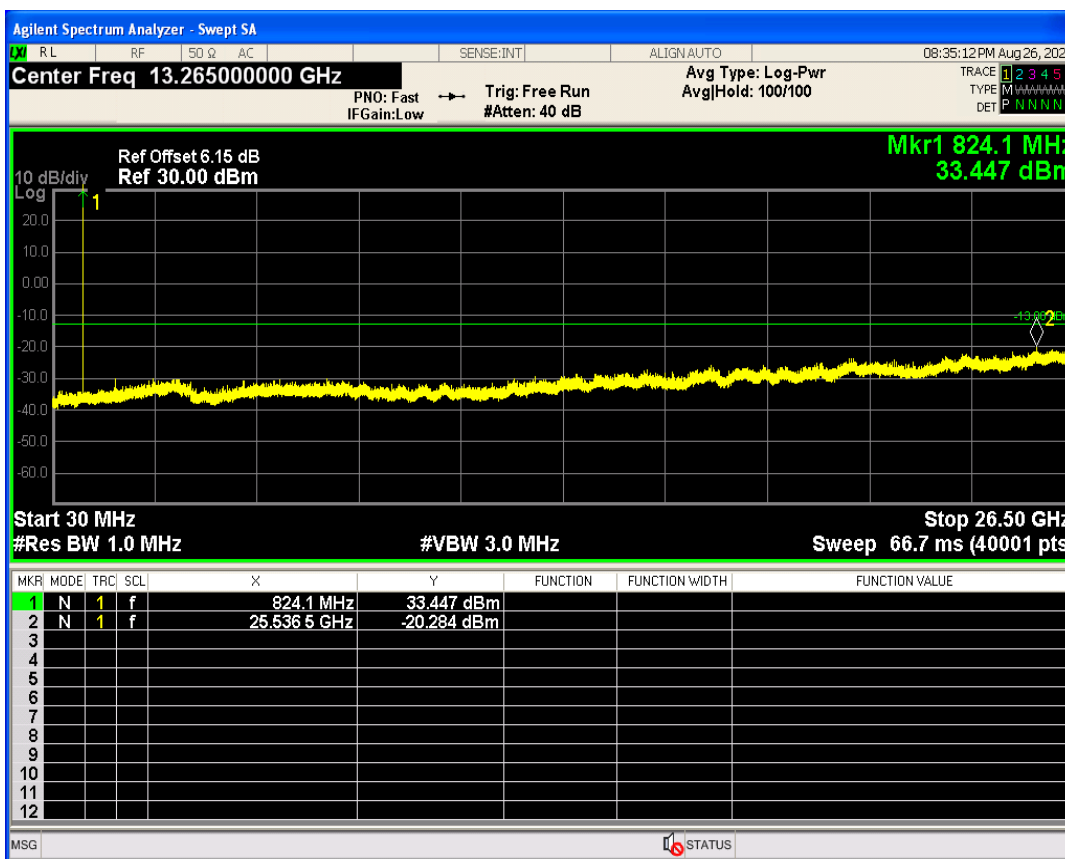

GPRS850 Channel=251

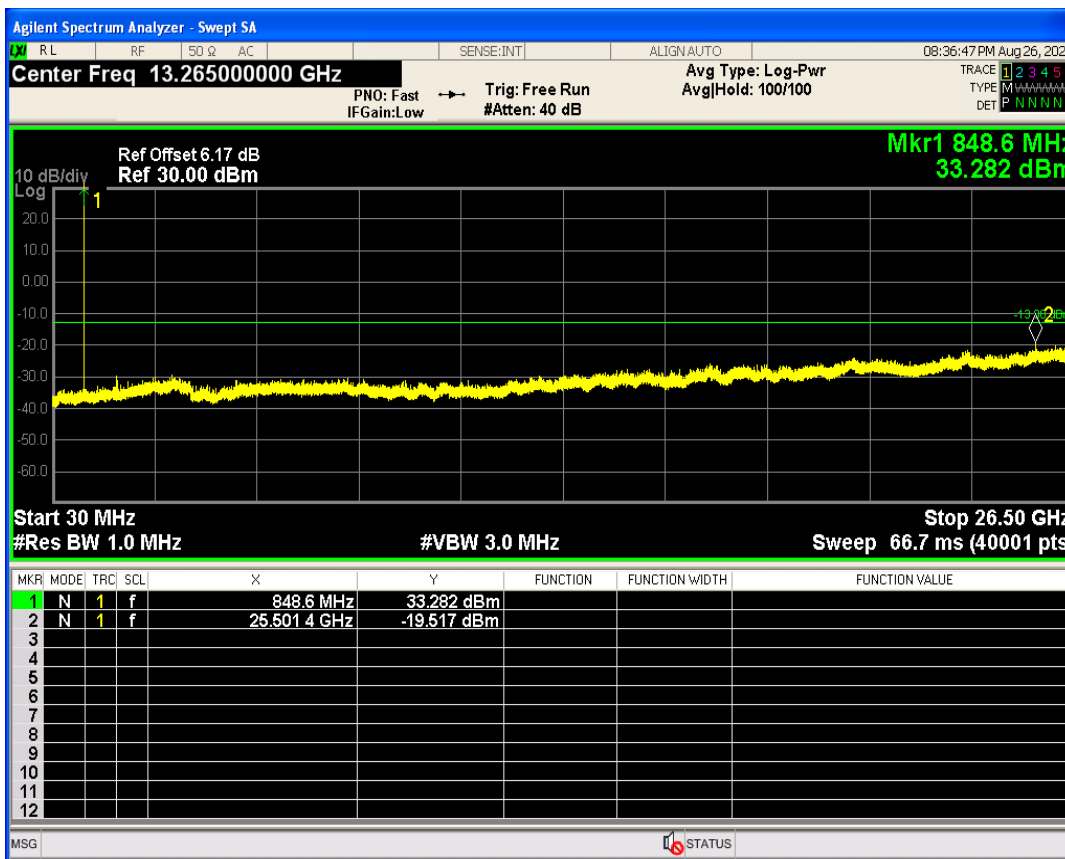

GPRS850 Channel=189

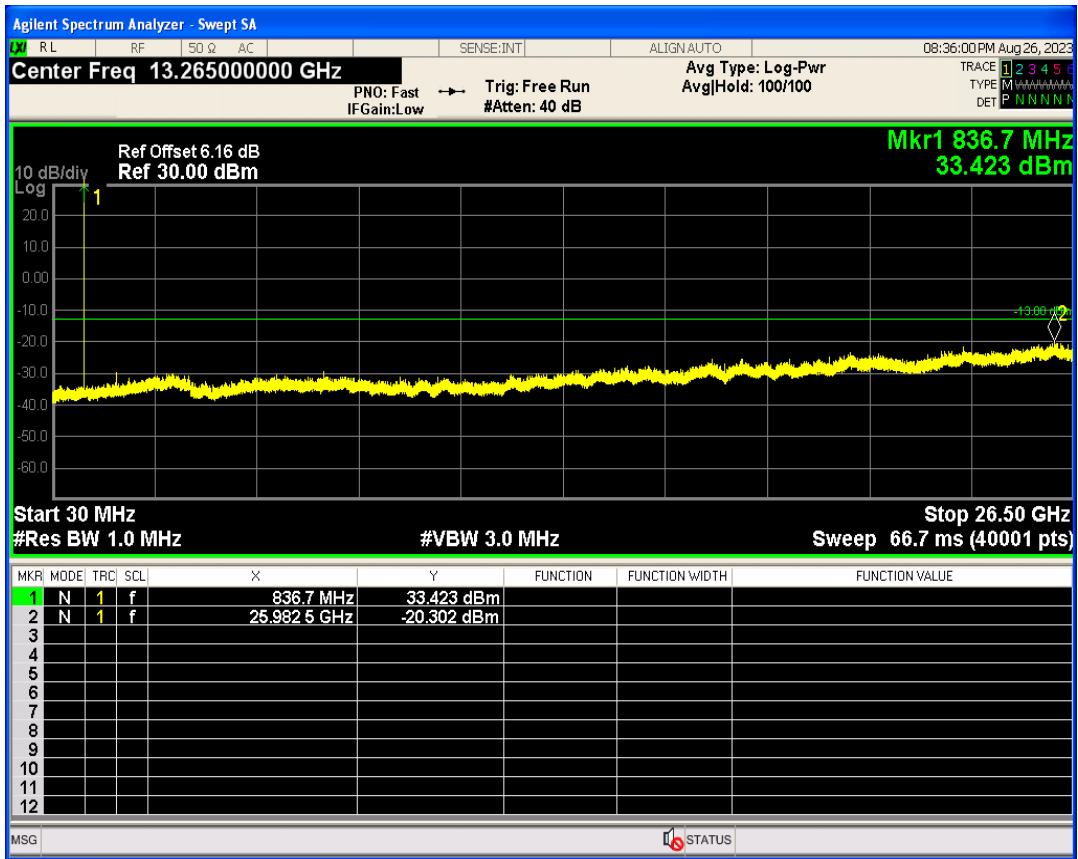


Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
GSM1900	512	1850.2	31.57	PASS
GSM1900	661	1880	31.49	PASS
GSM1900	810	1909.8	31.35	PASS
GSM850	128	824.2	33.80	PASS
GSM850	189	836.4	34.03	PASS
GSM850	251	848.8	33.95	PASS


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GSM1900	512	1850.2	2.62	13	PASS
GSM1900	661	1880	2.62	13	PASS
GSM1900	810	1909.8	2.63	13	PASS
GSM850	128	824.2	2.61	13	PASS
GSM850	189	836.4	2.61	13	PASS
GSM850	251	848.8	2.61	13	PASS


GSM1900 Channel=512

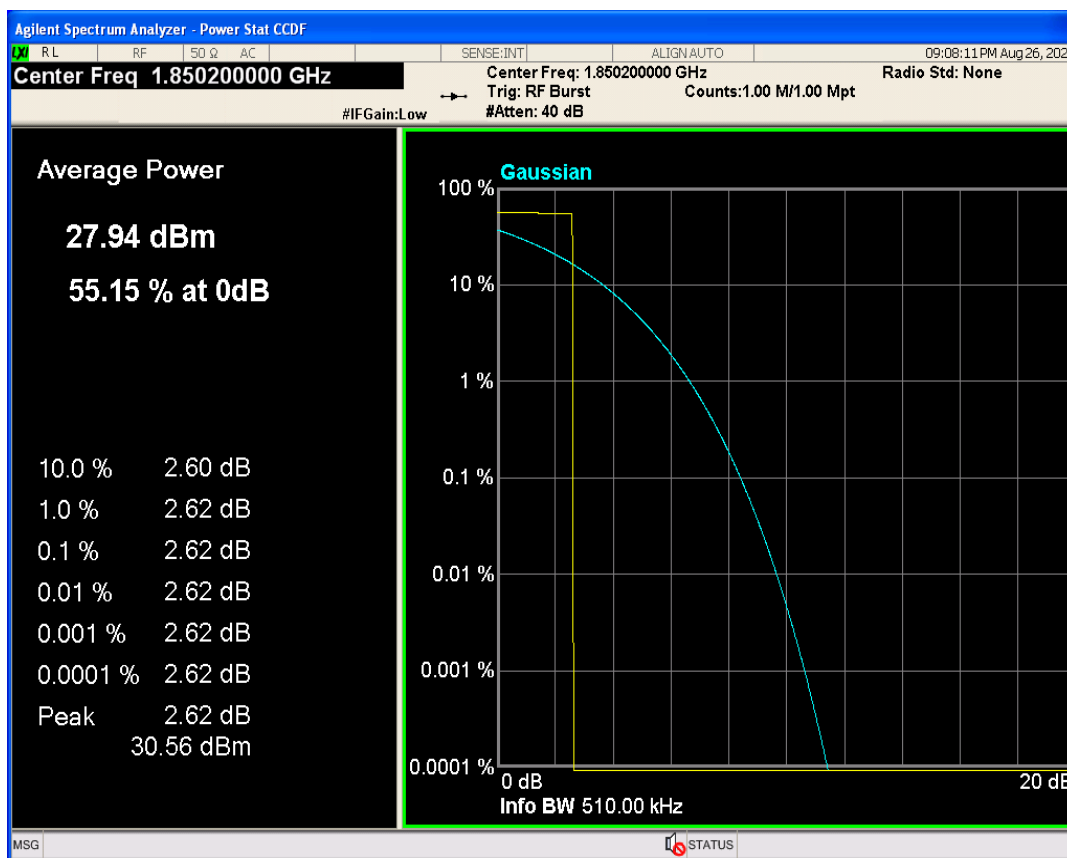


GSM1900 Channel=661

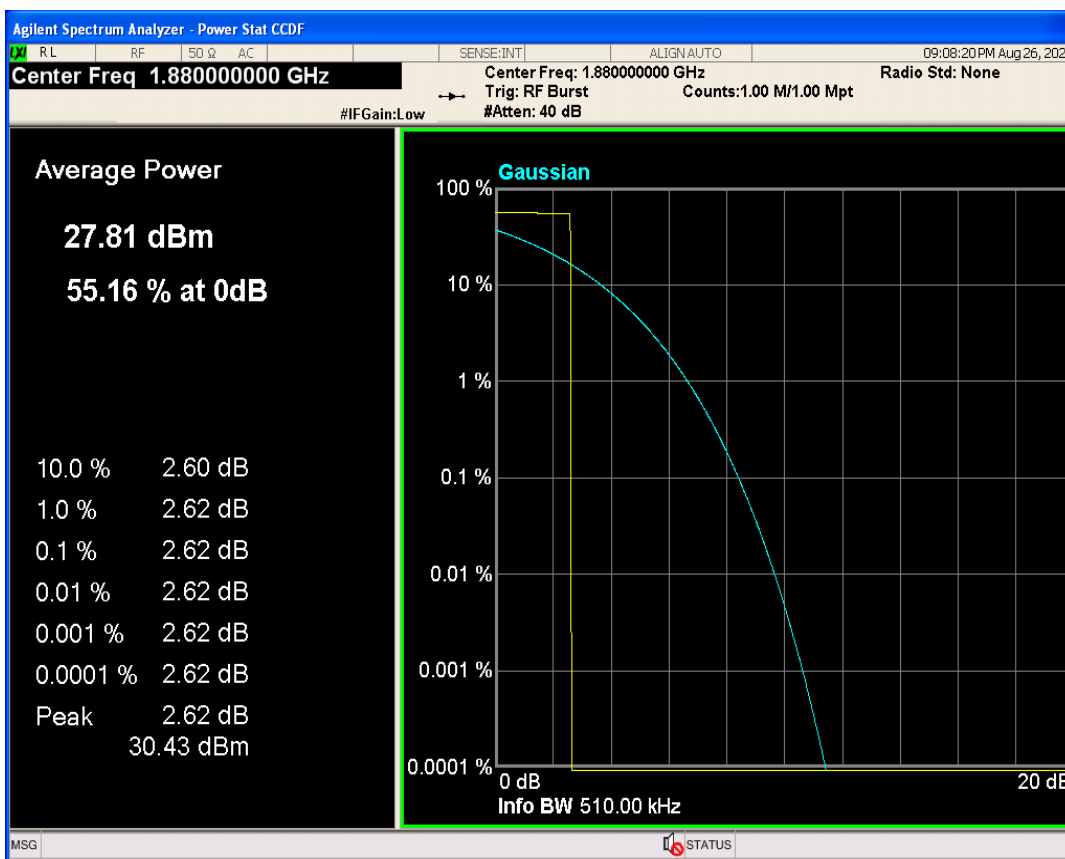


GSM1900 Channel=810

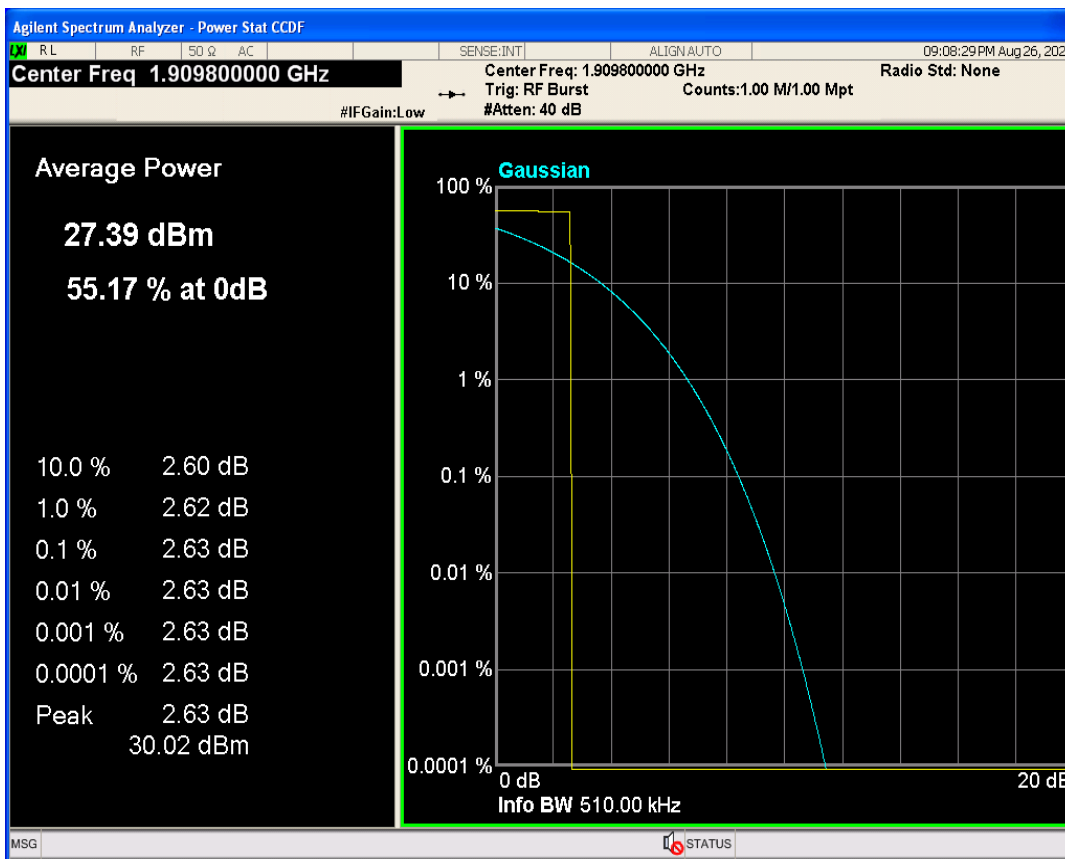


GSM850 Channel=128

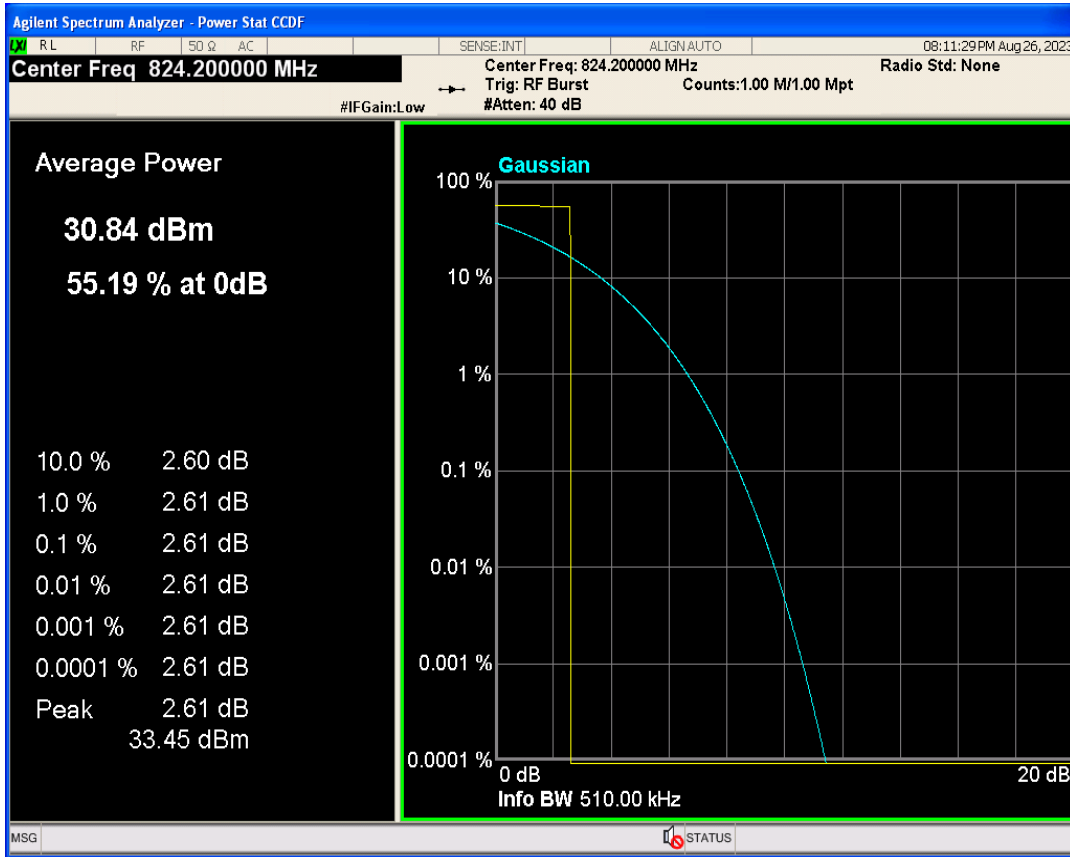

GSM850 Channel=189

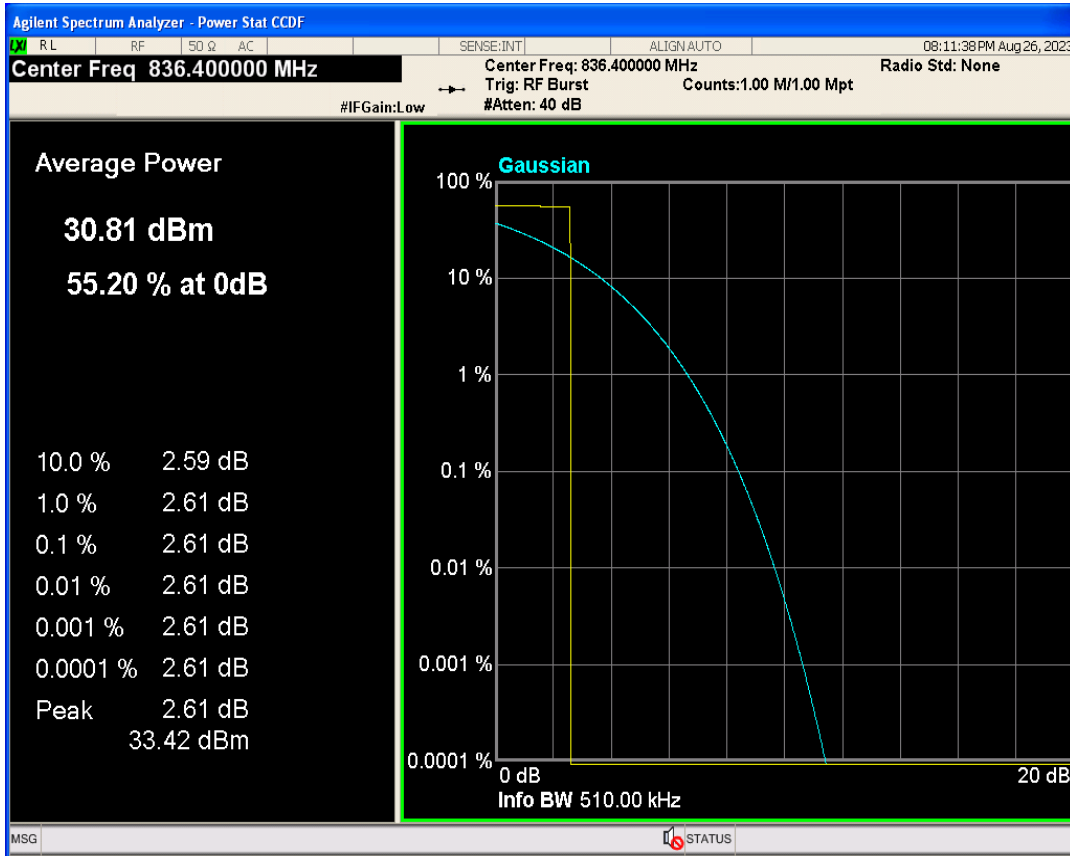


GSM850 Channel=251

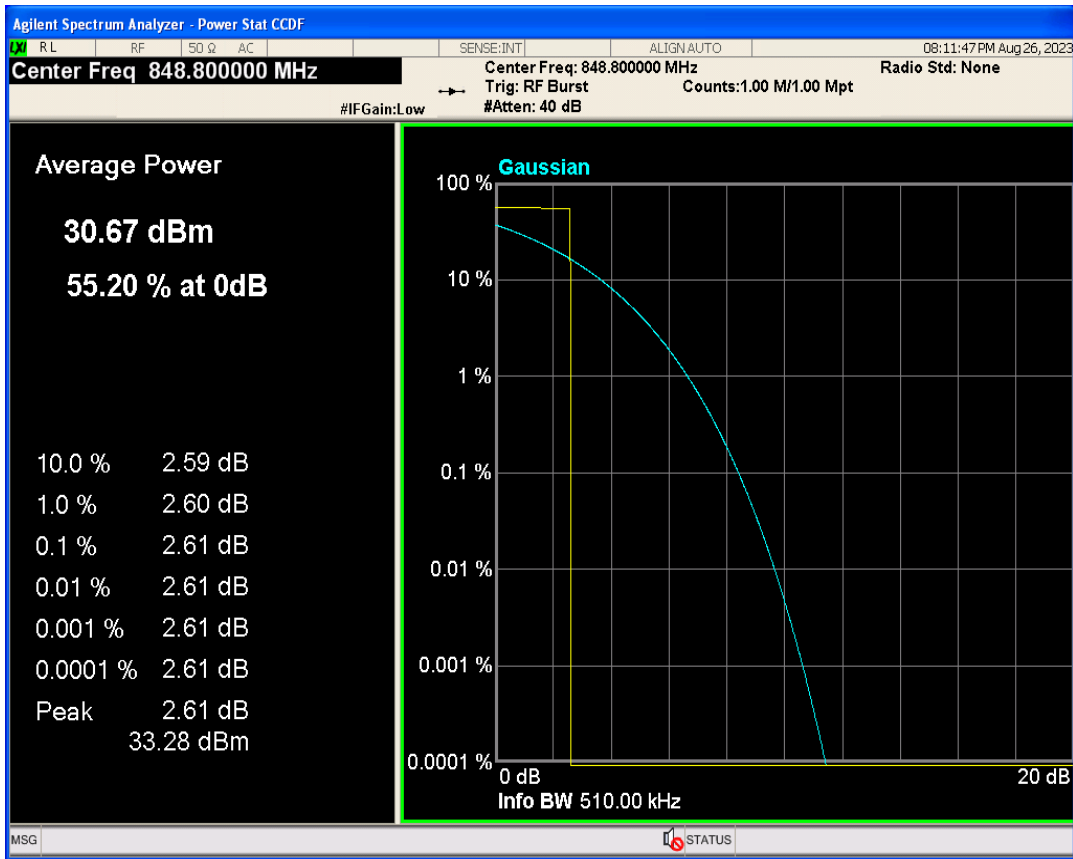


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GSM1900	512	1850.2	249.613	318.180	PASS
GSM1900	661	1880	246.206	316.736	PASS
GSM1900	810	1909.8	245.342	318.271	PASS
GSM850	128	824.2	249.884	311.360	PASS
GSM850	189	836.4	240.473	307.655	PASS
GSM850	251	848.8	244.626	313.288	PASS


GSM1900 Channel=512

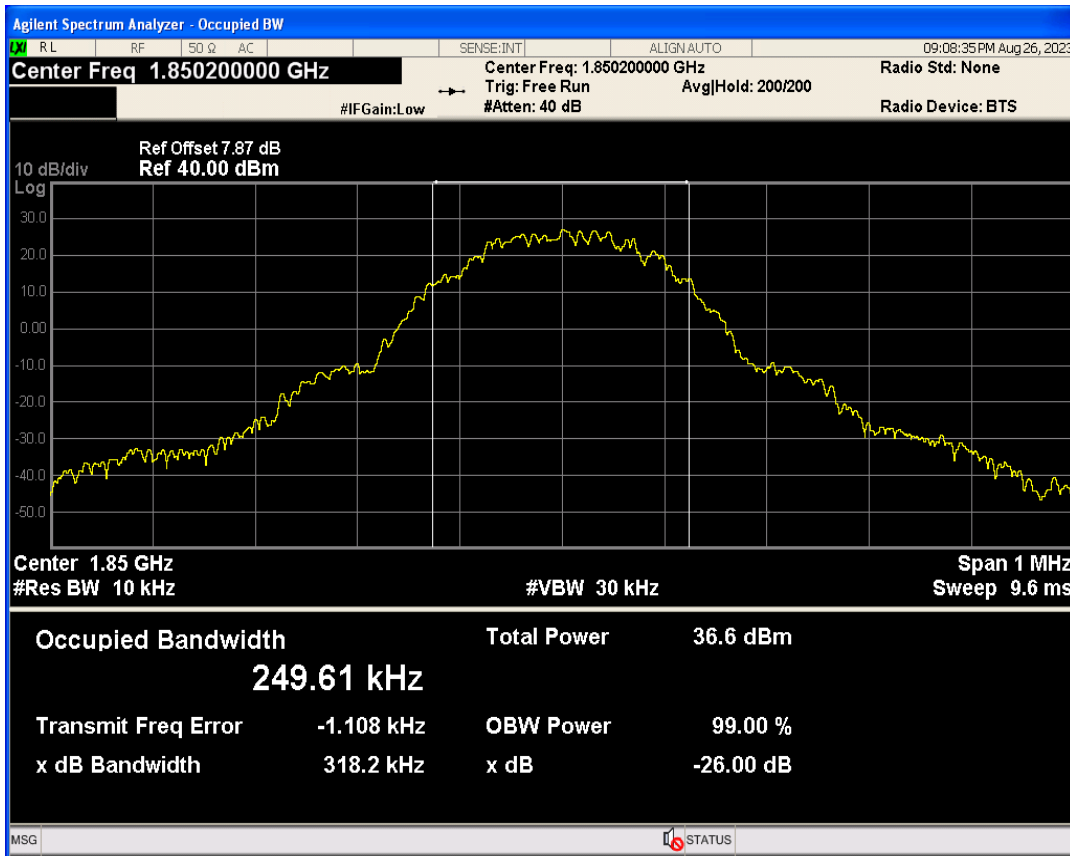


GSM1900 Channel=661

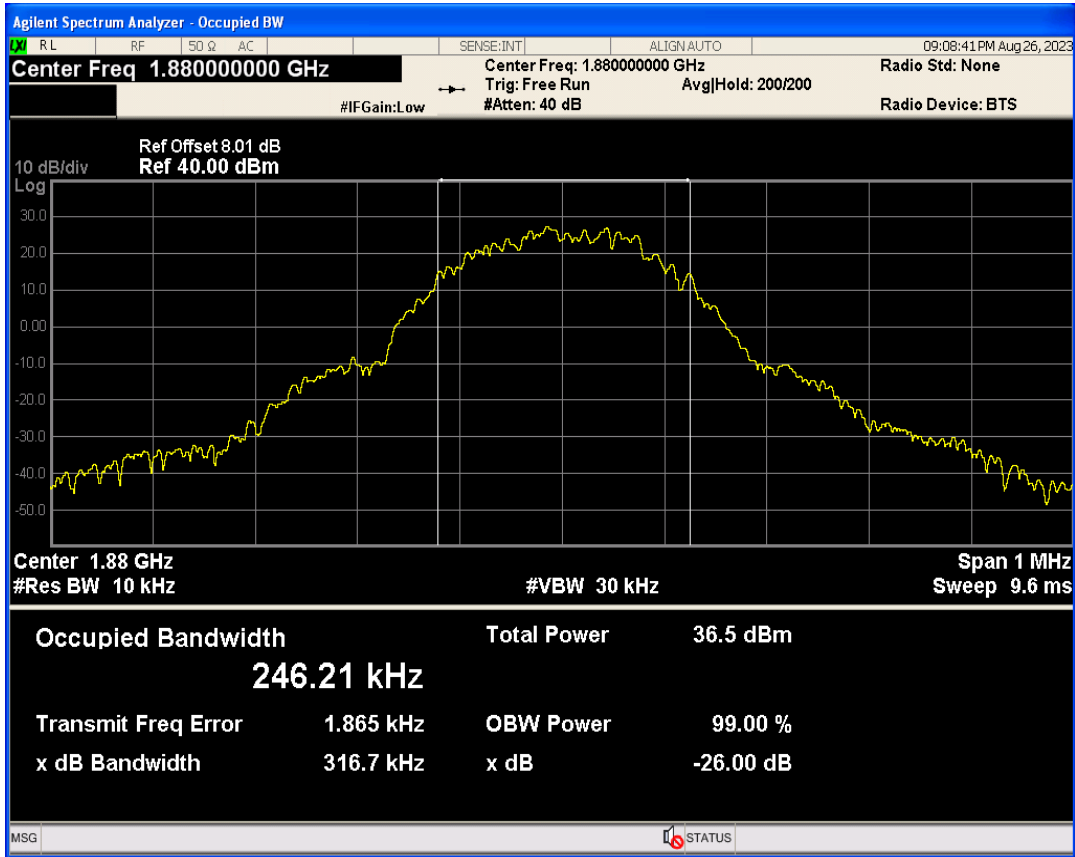


GSM1900 Channel=810

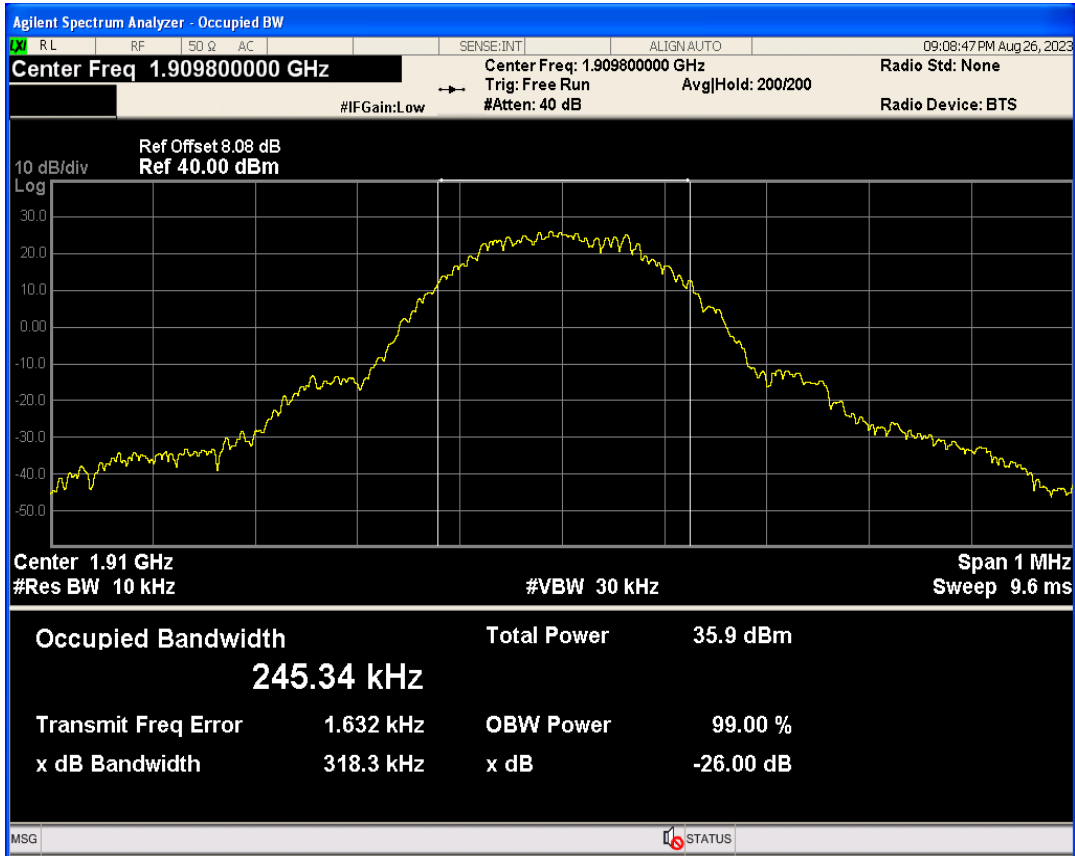


GSM850 Channel=128

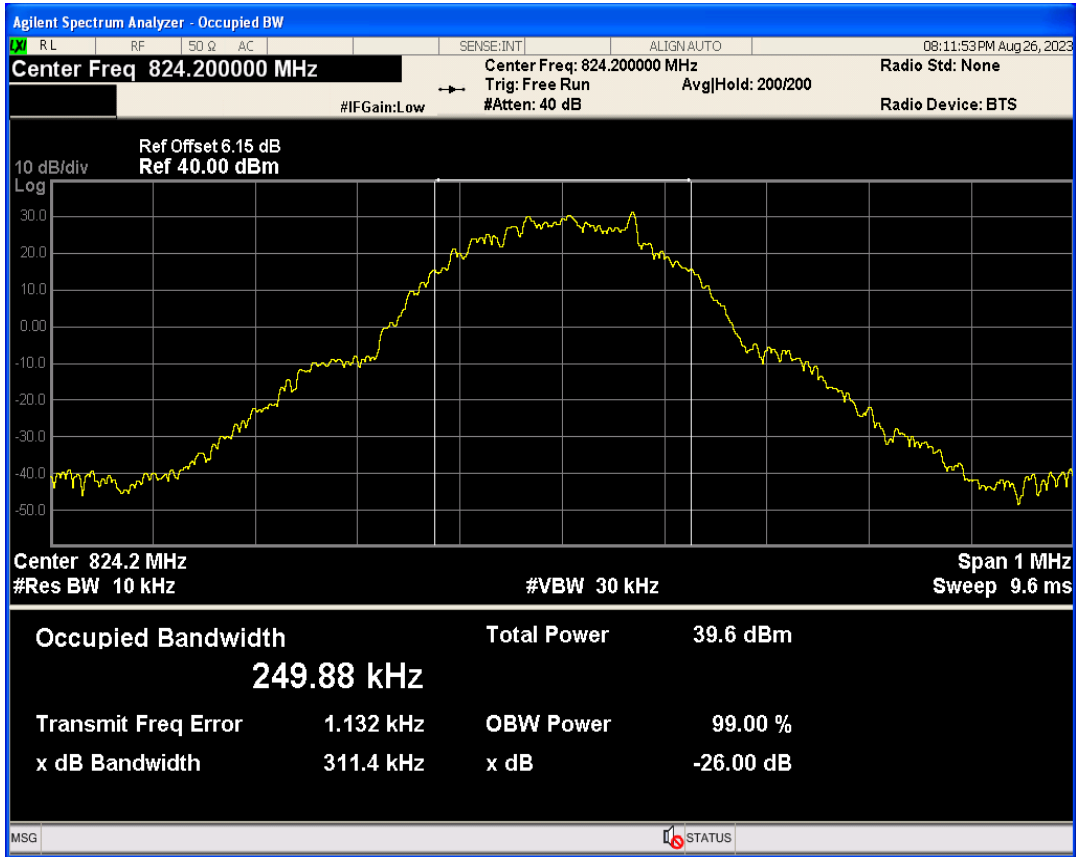

GSM850 Channel=189

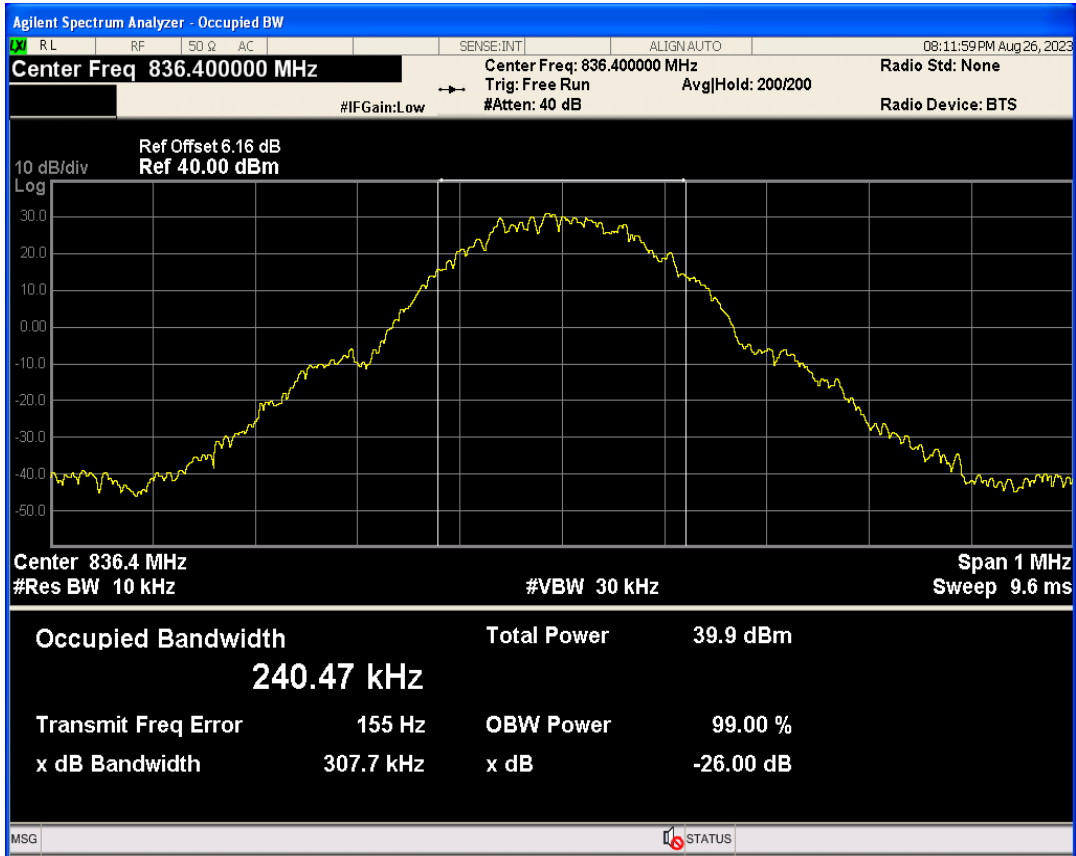


GSM850 Channel=251

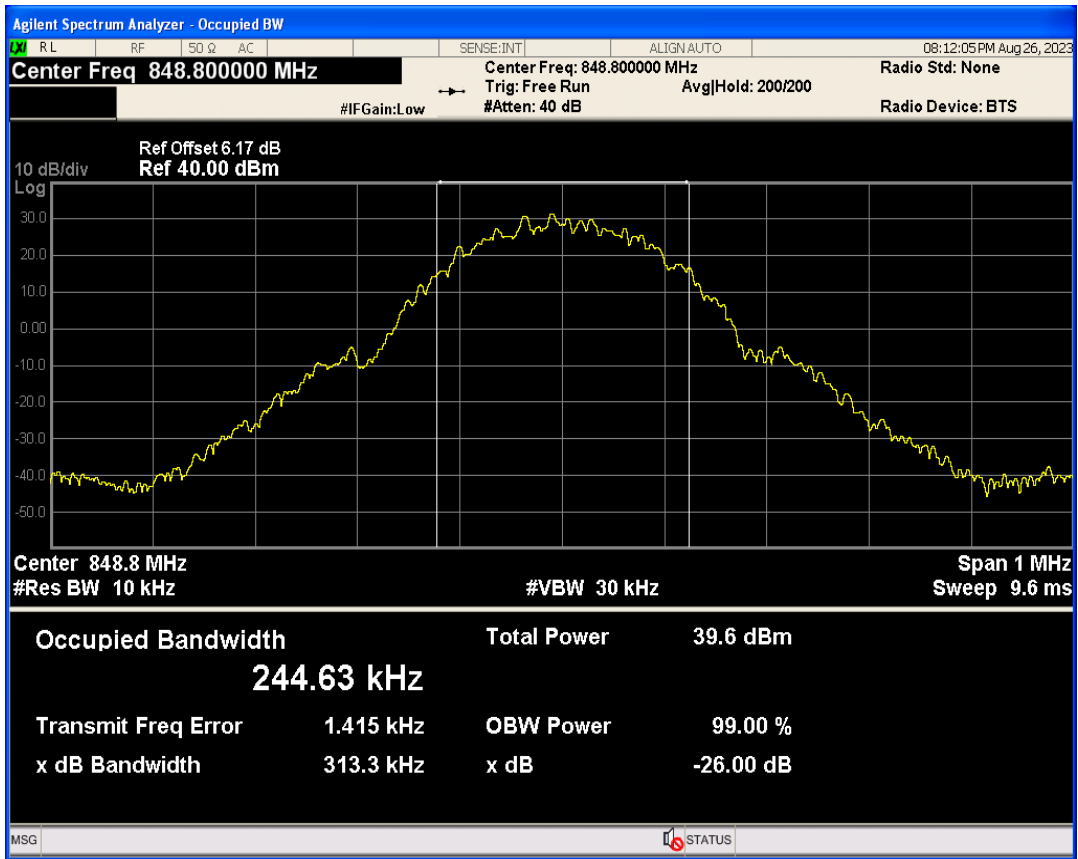


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	1850.00	-28.91	-13	PASS
GSM1900	810	1909.8	1910.02	-28.78	-13	PASS
GSM850	128	824.2	824.00	-26.15	-13	PASS
GSM850	251	848.8	849.02	-24.73	-13	PASS


GSM1900 Channel=810

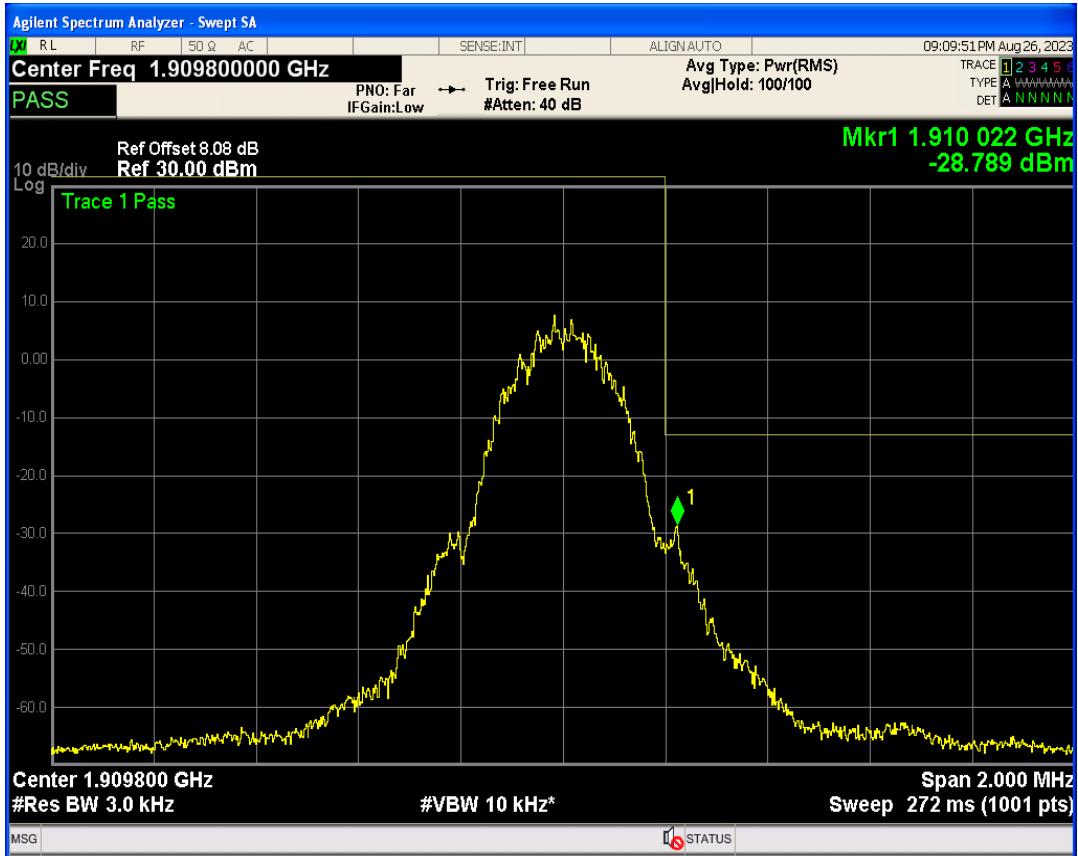


GSM1900 Channel=512

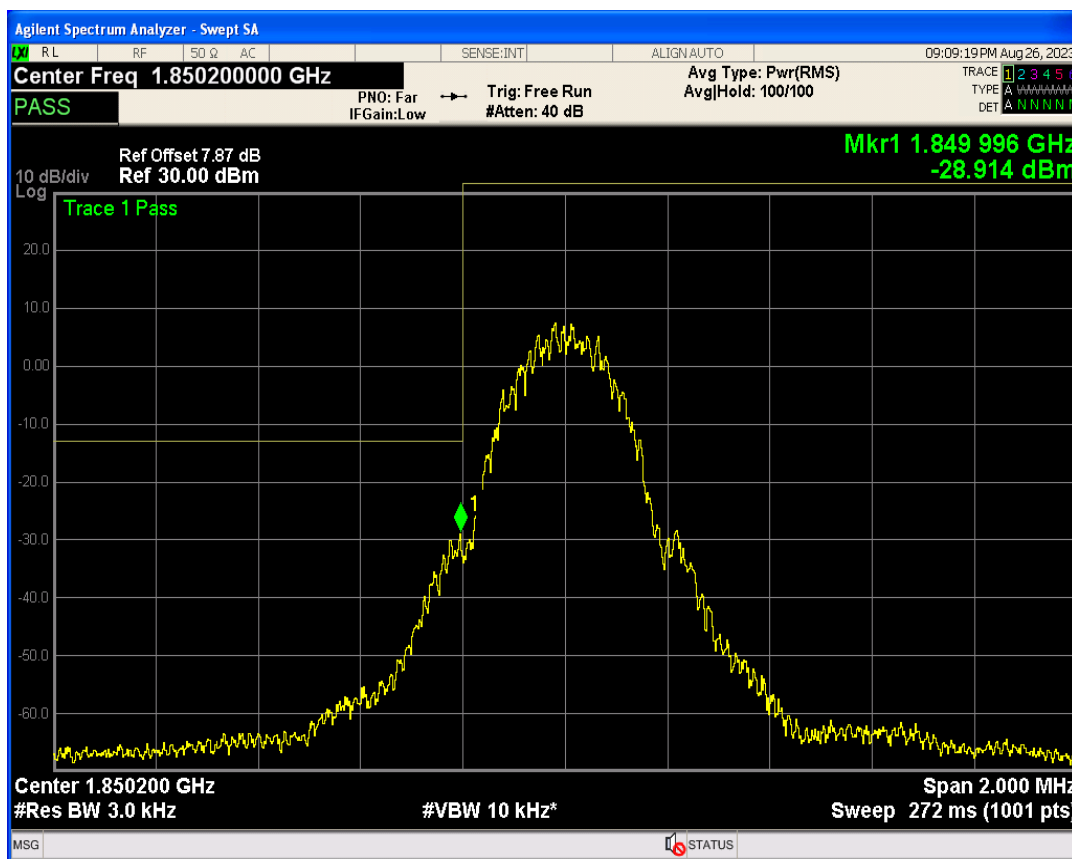

GSM850 Channel=128

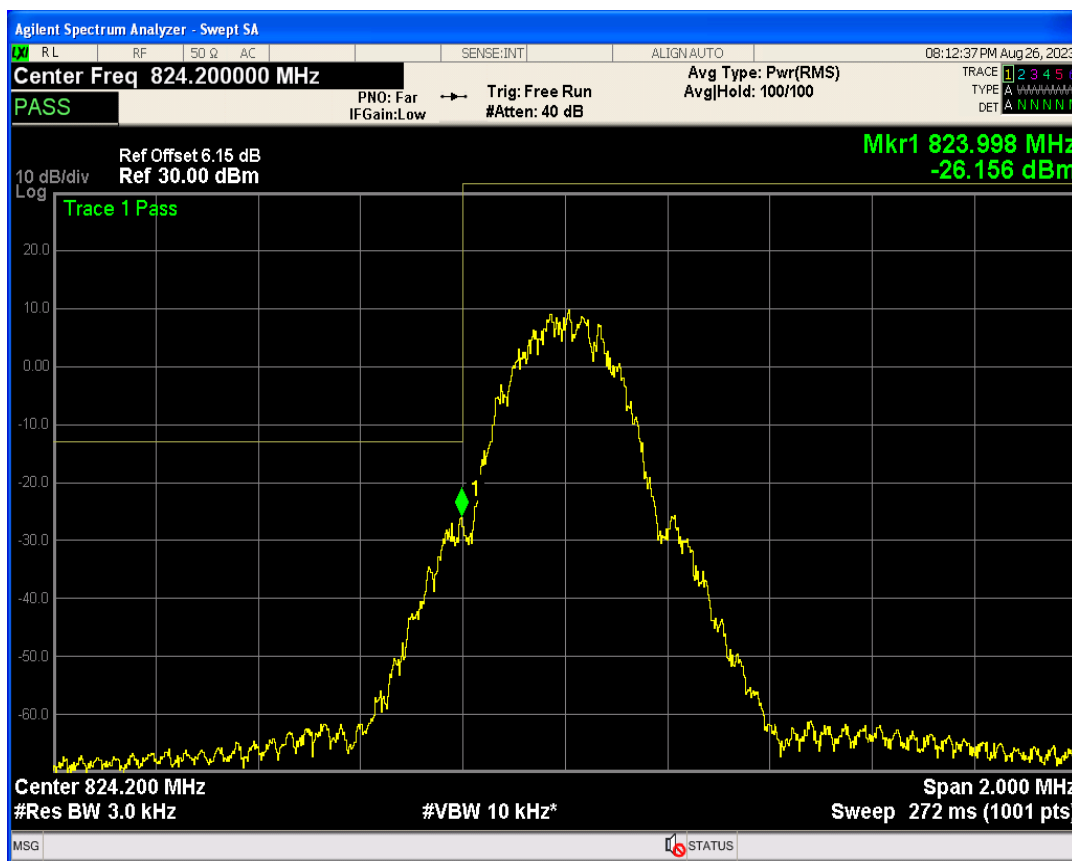


GSM850 Channel=251

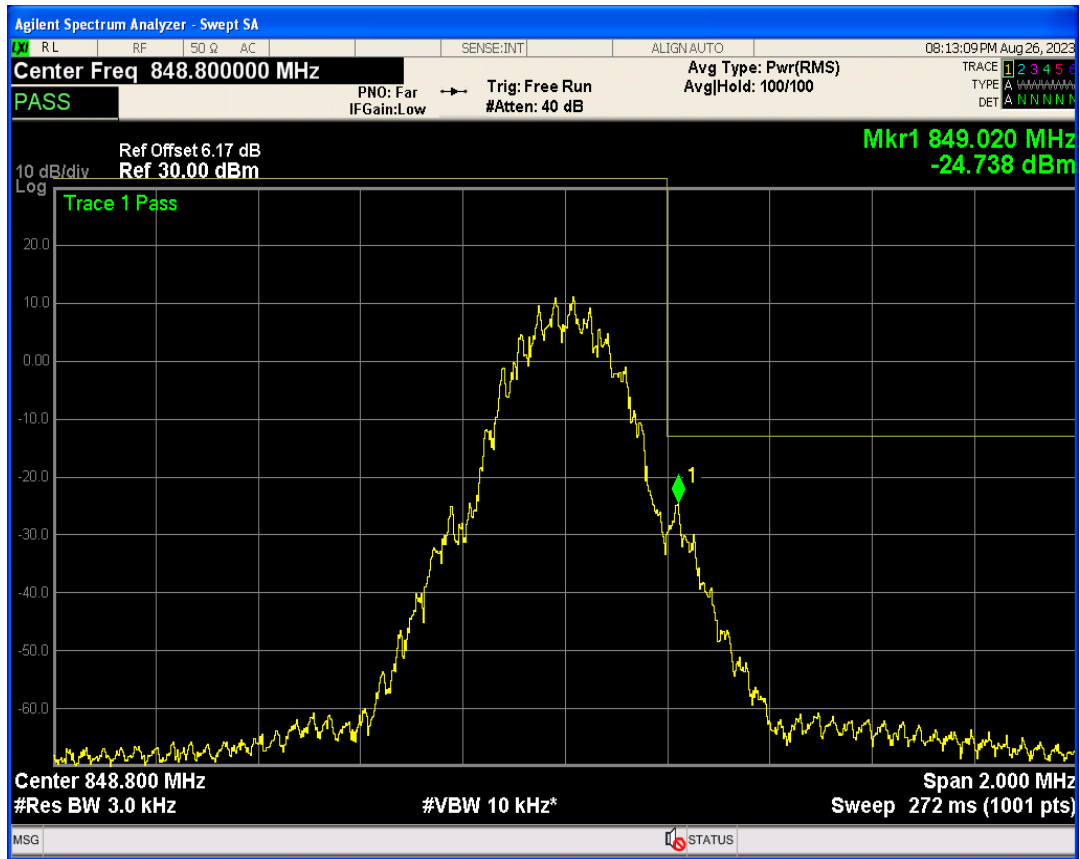


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	26102.95	-18.67	-13	PASS
GSM1900	661	1880	26026.85	-18.99	-13	PASS
GSM1900	810	1909.8	25963.98	-17.76	-13	PASS
GSM850	128	824.2	26002.36	-20.14	-13	PASS
GSM850	189	836.4	26005.67	-20.39	-13	PASS
GSM850	251	848.8	26009.64	-20.07	-13	PASS


GSM1900 Channel=512

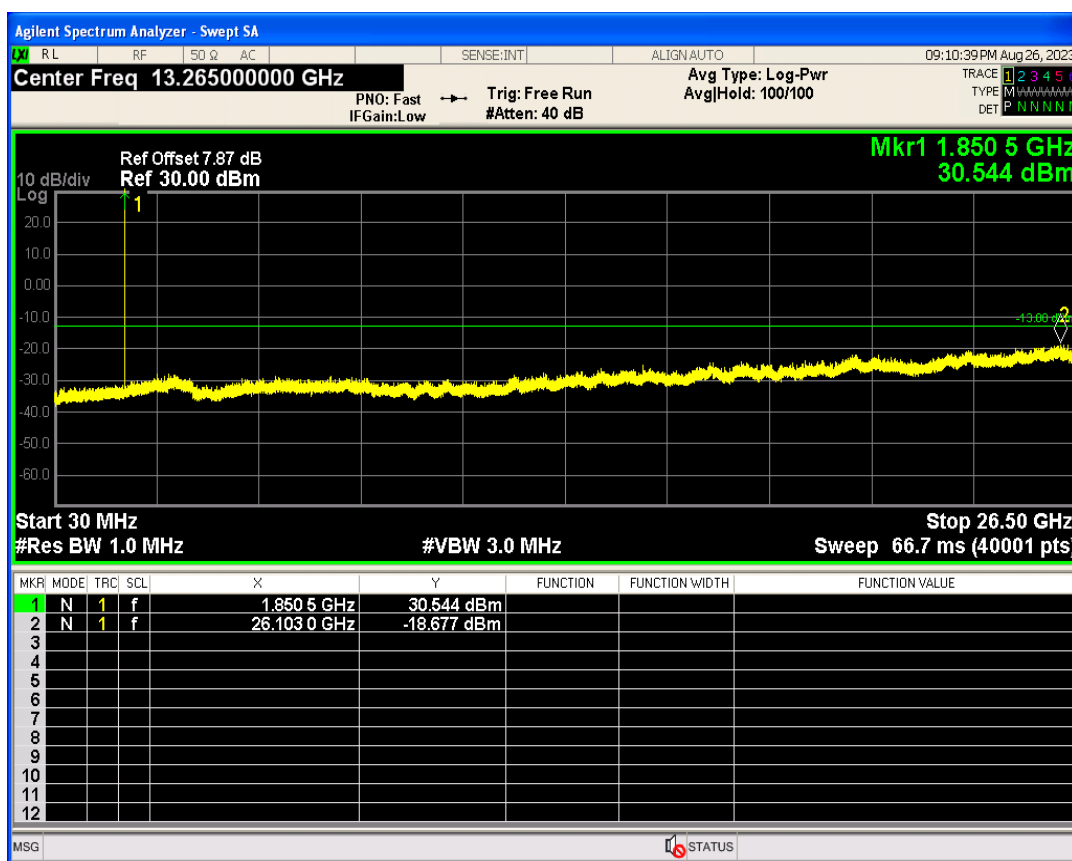


GSM1900 Channel=661

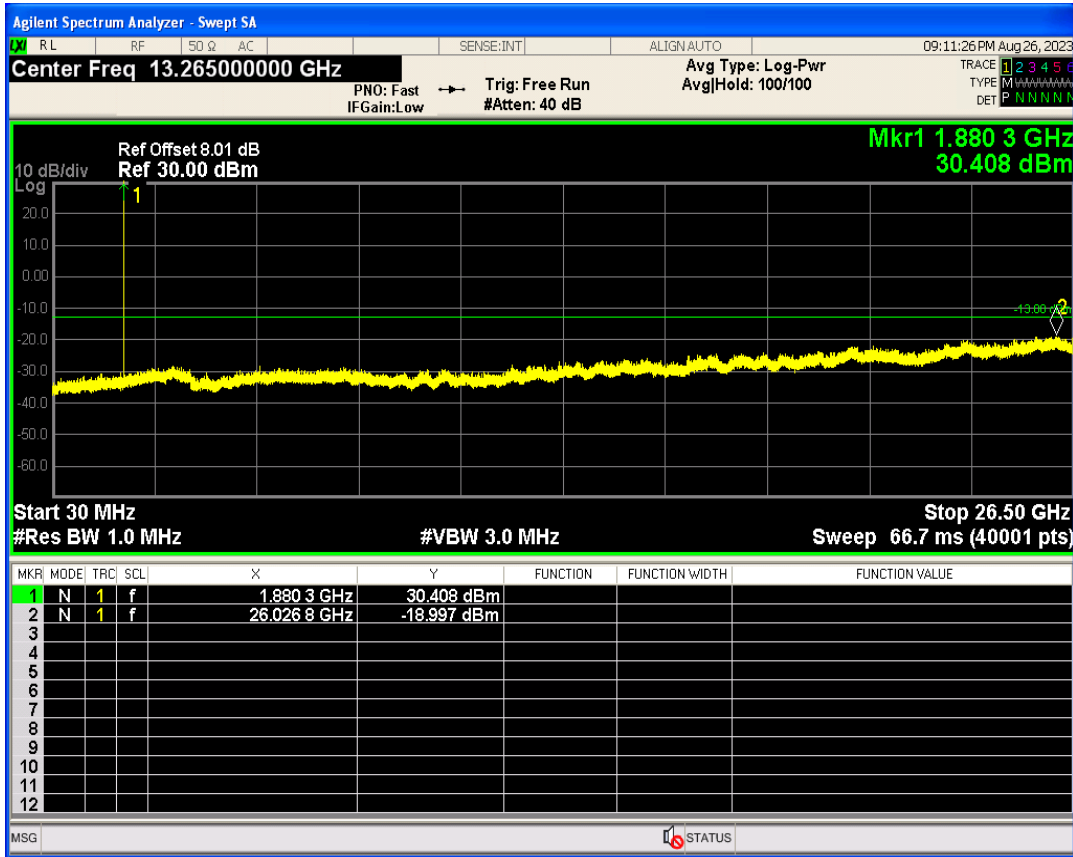


GSM1900 Channel=810

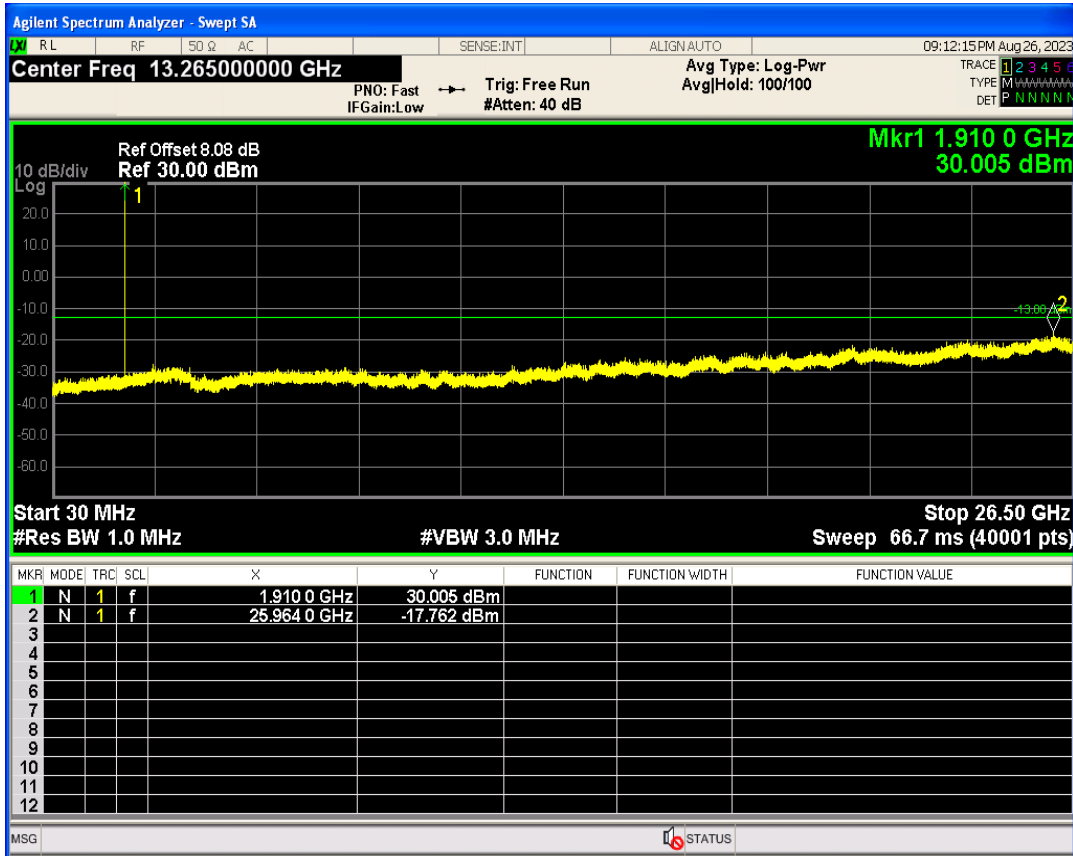

GSM850 Channel=128

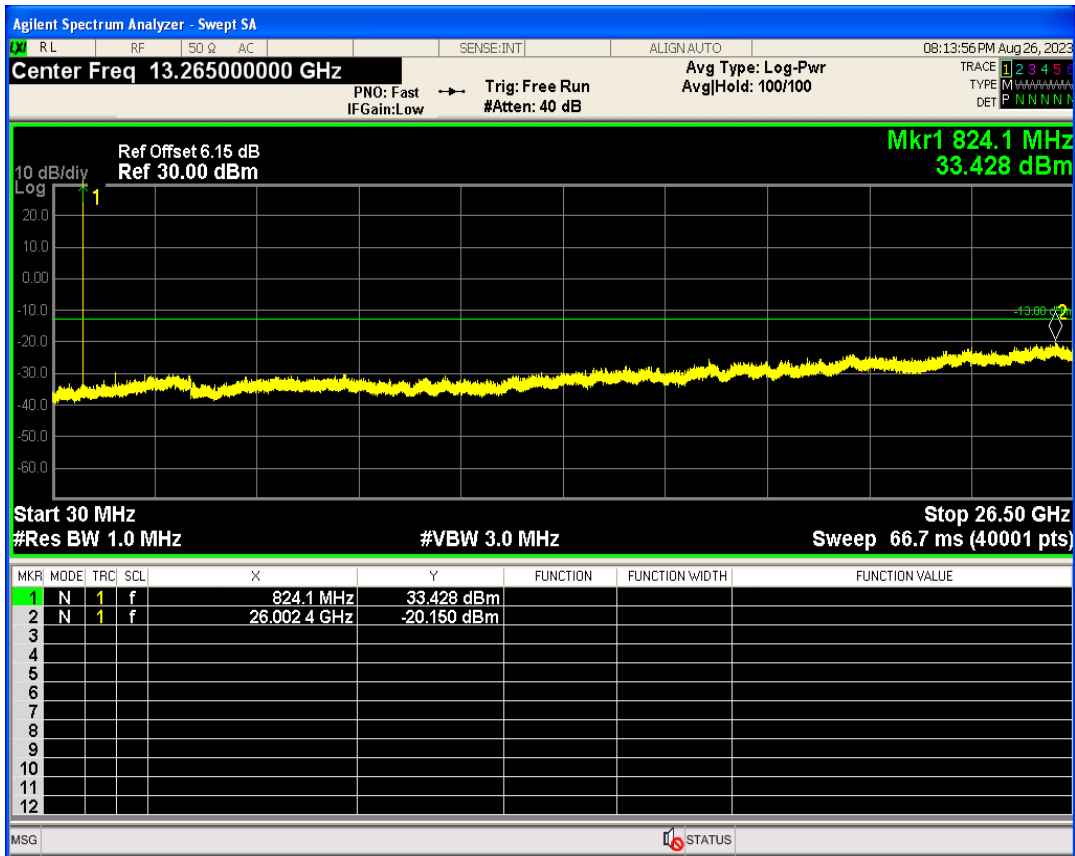

GSM850 Channel=189

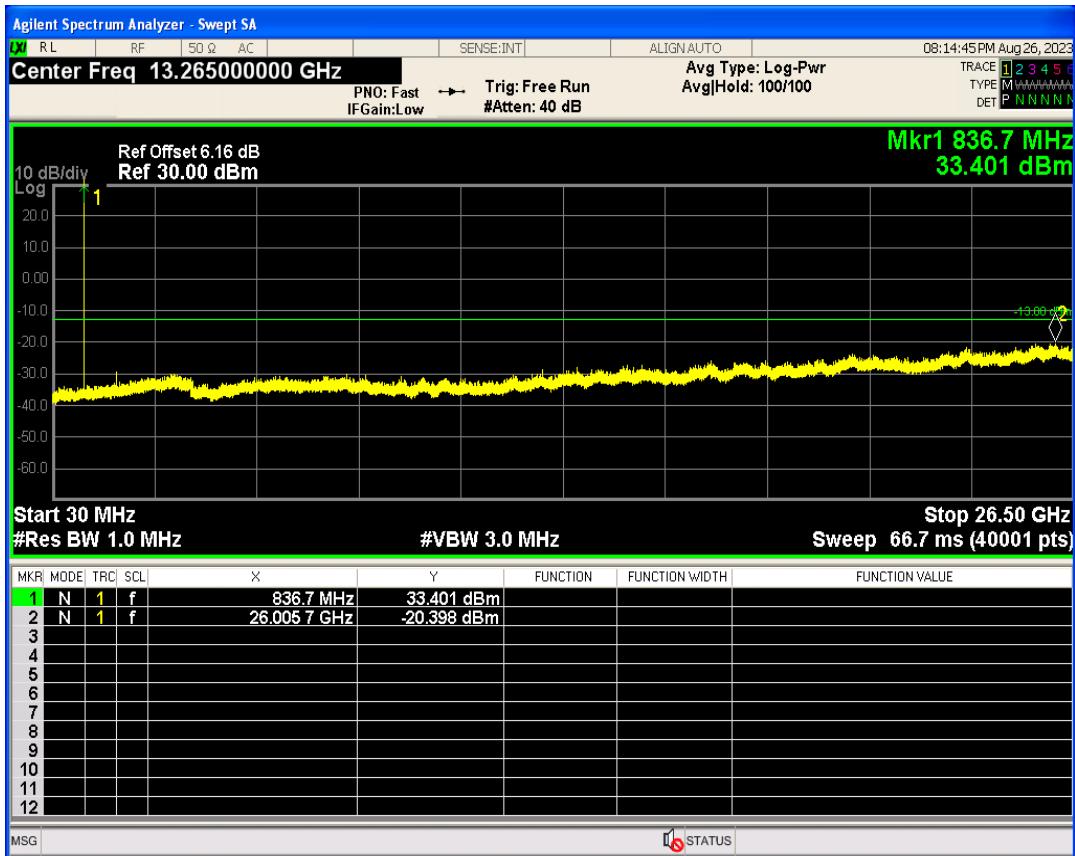

GSM850 Channel=251

