


Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
EGPRS1900 1 Slot	512	1850.2	28.15	PASS
EGPRS1900 1 Slot	661	1880	28.12	PASS
EGPRS1900 1 Slot	810	1909.8	28.27	PASS
EGPRS1900 2 Slot	512	1850.2	27.43	PASS
EGPRS1900 2 Slot	661	1880	26.85	PASS
EGPRS1900 2 Slot	810	1909.8	27.56	PASS
EGPRS1900 3 Slot	512	1850.2	25.23	PASS
EGPRS1900 3 Slot	661	1880	25.39	PASS
EGPRS1900 3 Slot	810	1909.8	25.02	PASS
EGPRS1900 4 Slot	512	1850.2	23.59	PASS
EGPRS1900 4 Slot	661	1880	23.71	PASS
EGPRS1900 4 Slot	810	1909.8	23.25	PASS
EGPRS850 1 Slot	128	824.2	28.13	PASS
EGPRS850 1 Slot	189	836.4	28.24	PASS
EGPRS850 1 Slot	251	848.8	28.10	PASS
EGPRS850 2 Slot	128	824.2	27.28	PASS
EGPRS850 2 Slot	189	836.4	27.05	PASS
EGPRS850 2 Slot	251	848.8	27.26	PASS
EGPRS850 3 Slot	128	824.2	25.05	PASS
EGPRS850 3 Slot	189	836.4	25.26	PASS
EGPRS850 3 Slot	251	848.8	24.86	PASS
EGPRS850 4 Slot	128	824.2	24.44	PASS
EGPRS850 4 Slot	189	836.4	24.13	PASS
EGPRS850 4 Slot	251	848.8	23.83	PASS


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
EGPRS1900	512	1850.2	6.29	13.00	PASS
EGPRS1900	661	1880	5.93	13.00	PASS
EGPRS1900	810	1909.8	6.37	13.00	PASS
EGPRS850	128	824.2	8.19	13.00	PASS
EGPRS850	189	836.4	7.85	13.00	PASS
EGPRS850	251	848.8	7.65	13.00	PASS


EGPRS1900 Channel=512

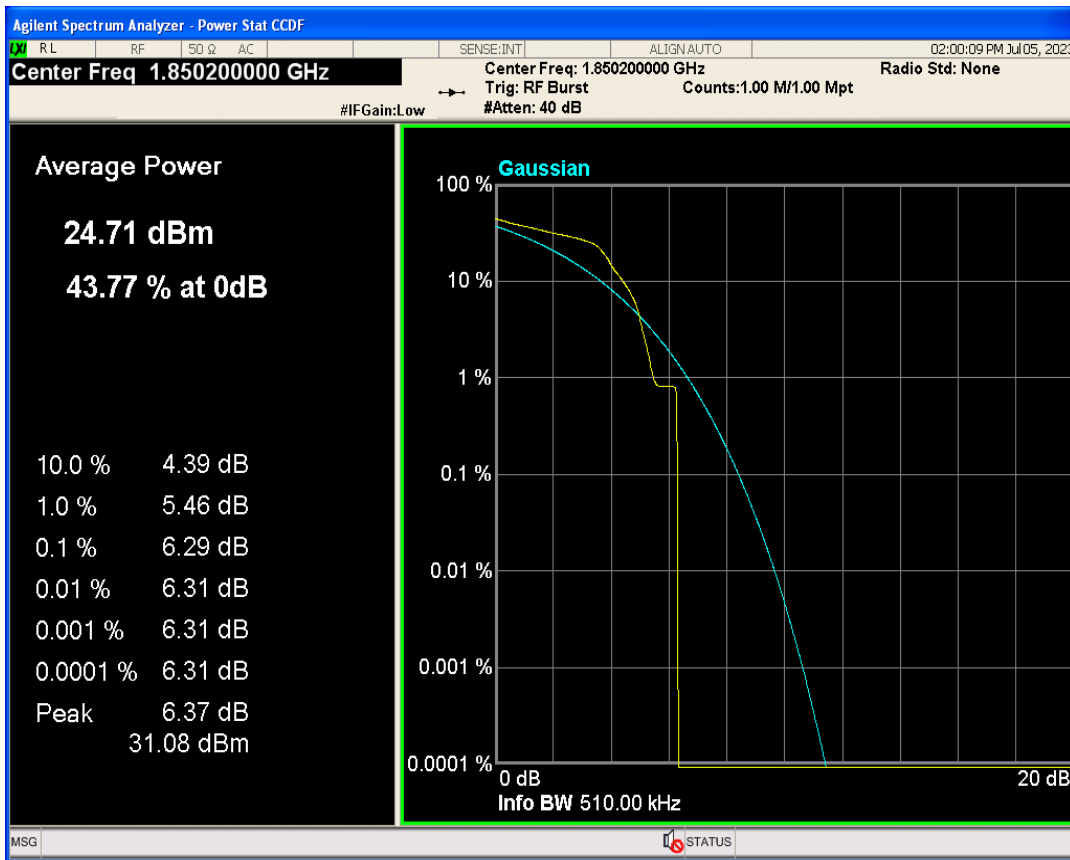


EGPRS1900 Channel=661

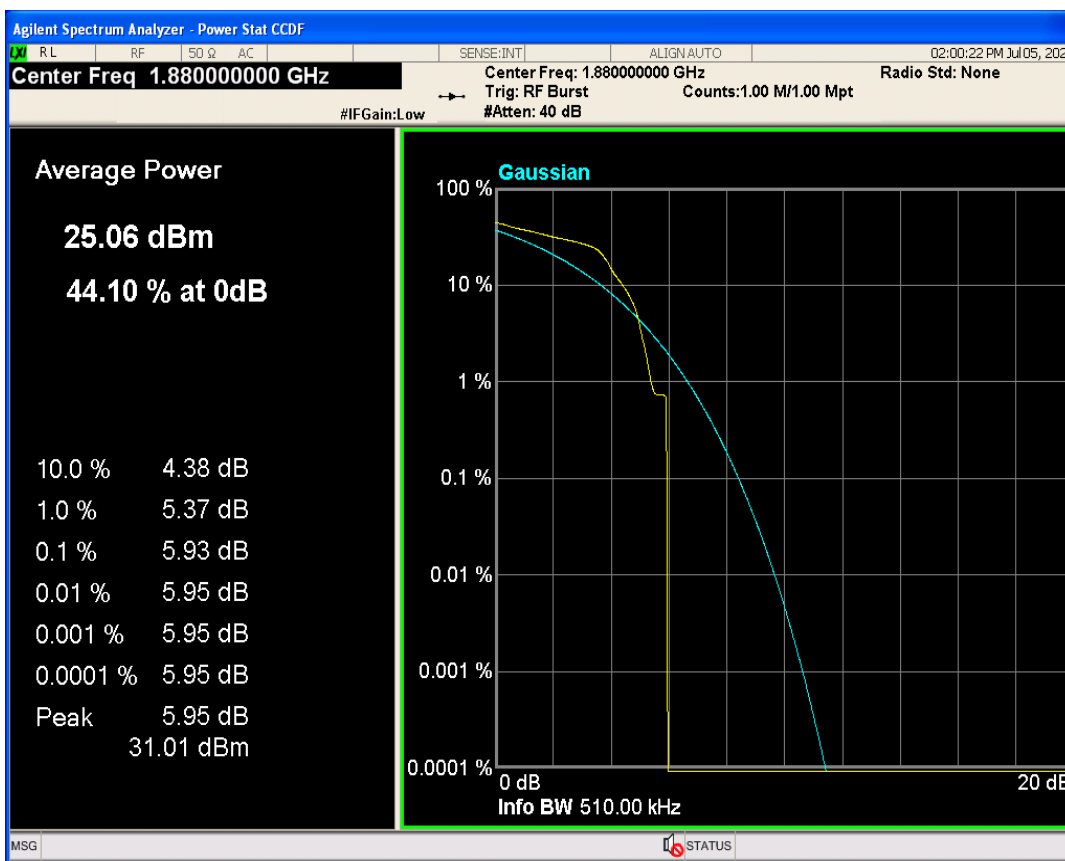


EGPRS1900 Channel=810

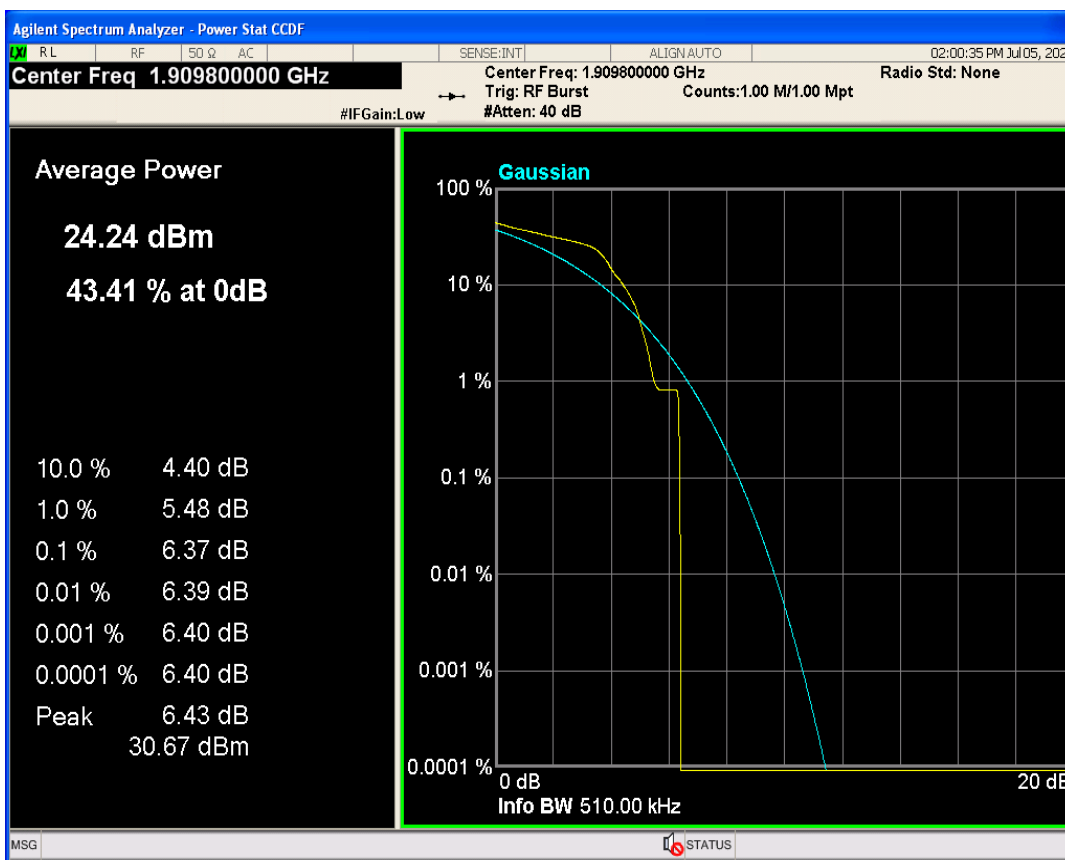


EGPRS850 Channel=189

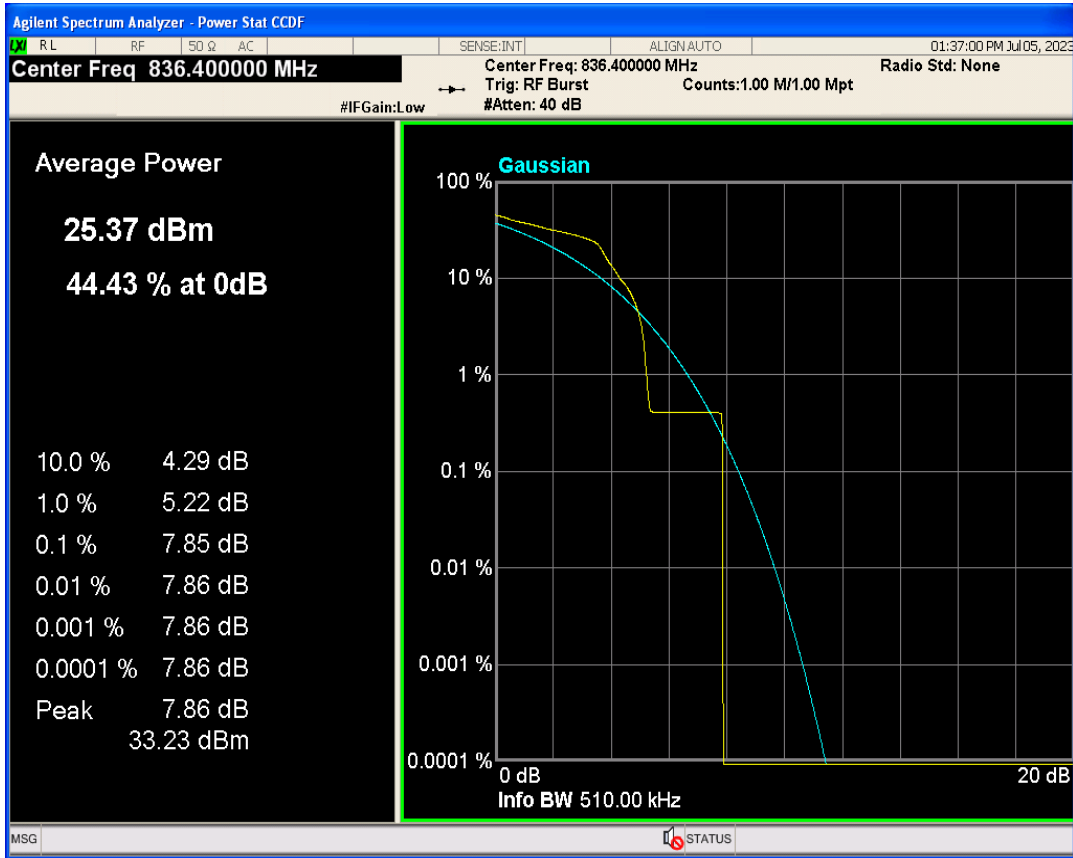

EGPRS850 Channel=128

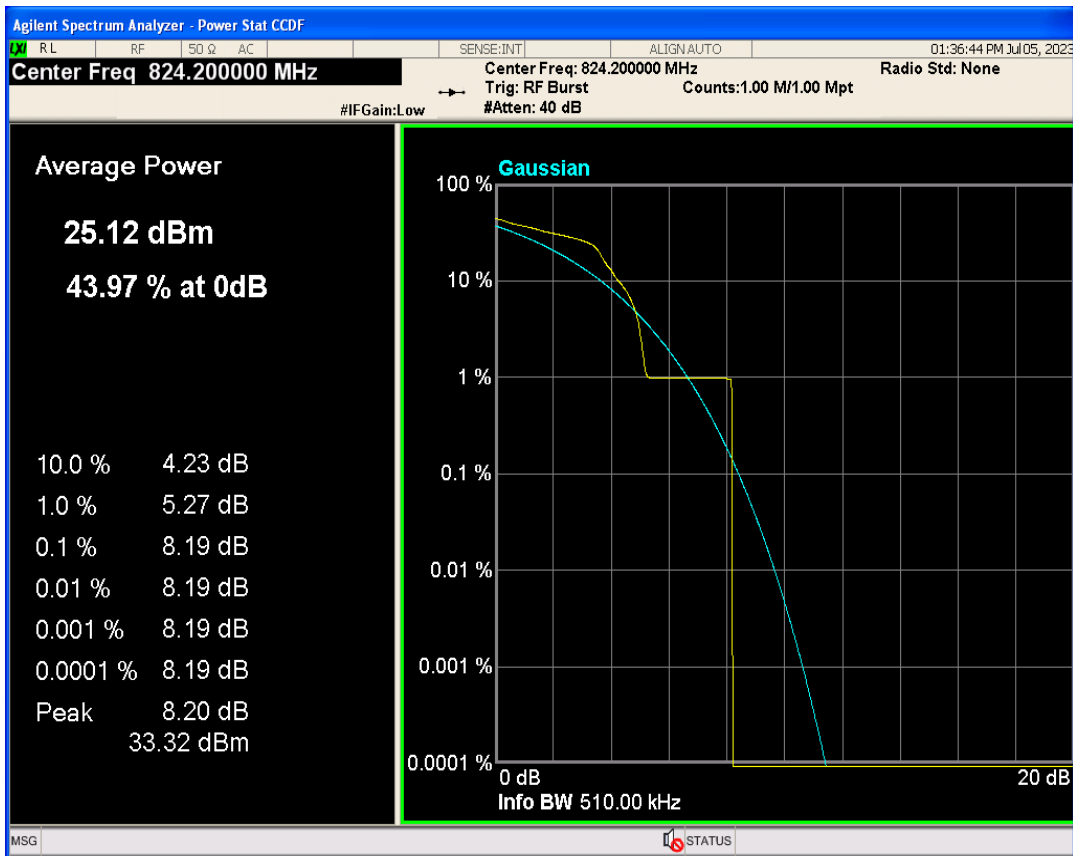


EGPRS850 Channel=251

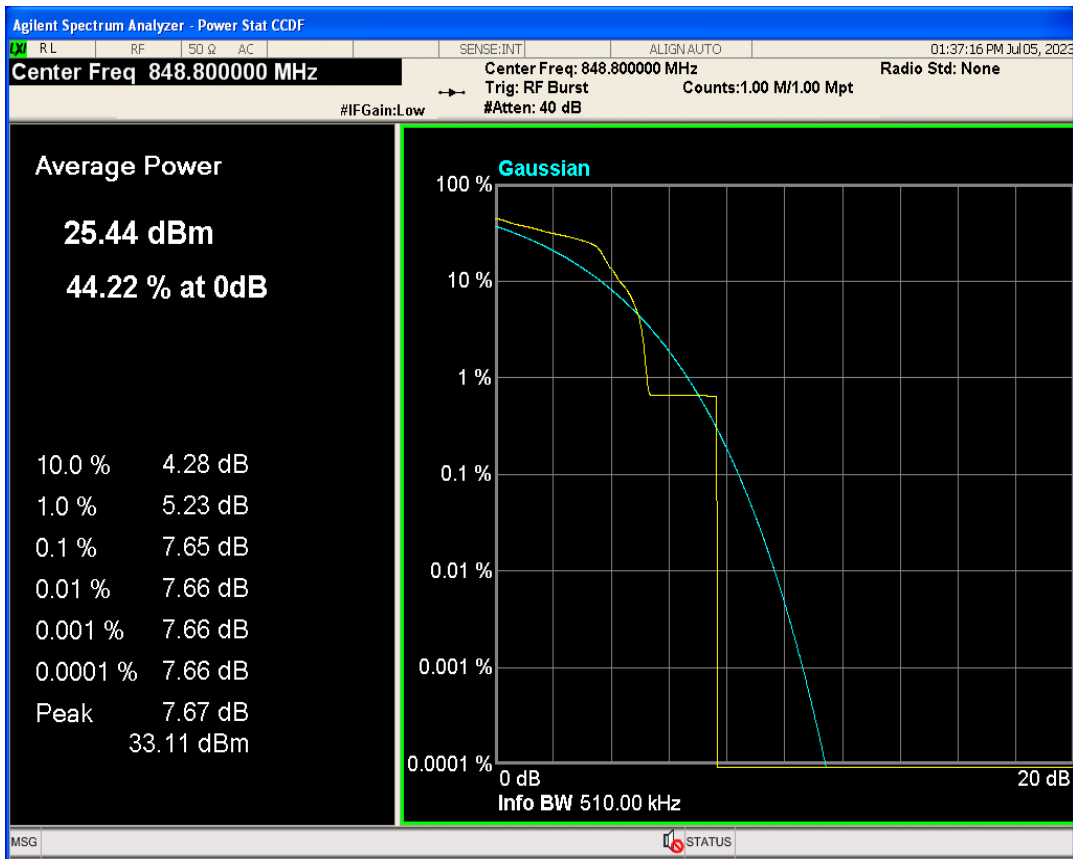


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
EGPRS1900	512	1850.2	246.502	312.181	PASS
EGPRS1900	661	1880	253.387	311.329	PASS
EGPRS1900	810	1909.8	247.430	322.490	PASS
EGPRS850	128	824.2	253.799	308.383	PASS
EGPRS850	189	836.4	245.555	314.975	PASS
EGPRS850	251	848.8	250.703	314.688	PASS


EGPRS1900 Channel=512

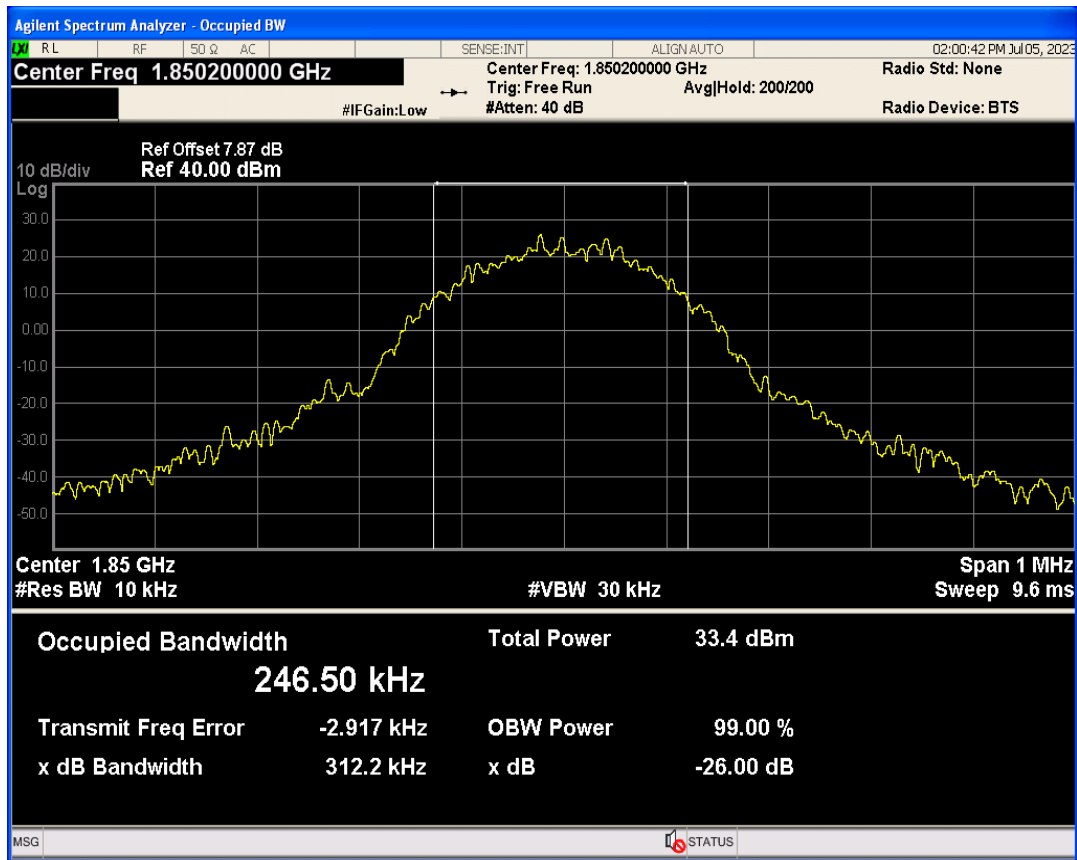


EGPRS1900 Channel=661

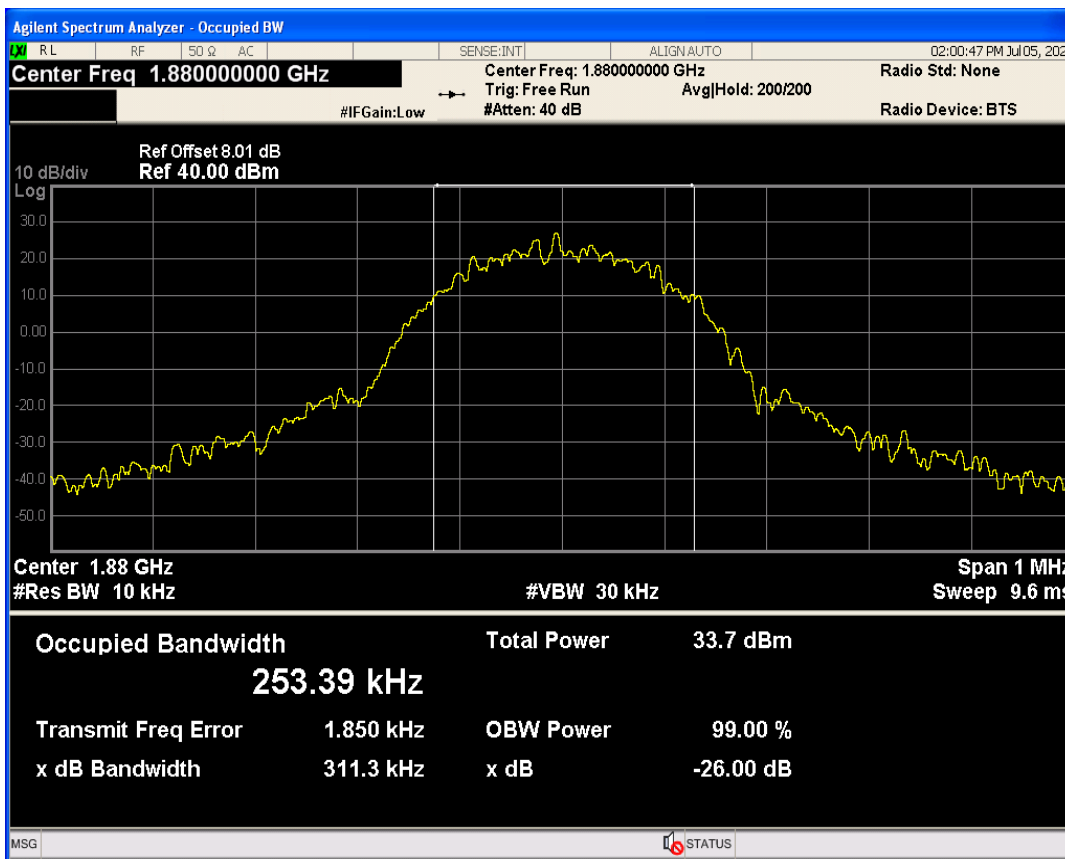


EGPRS1900 Channel=810

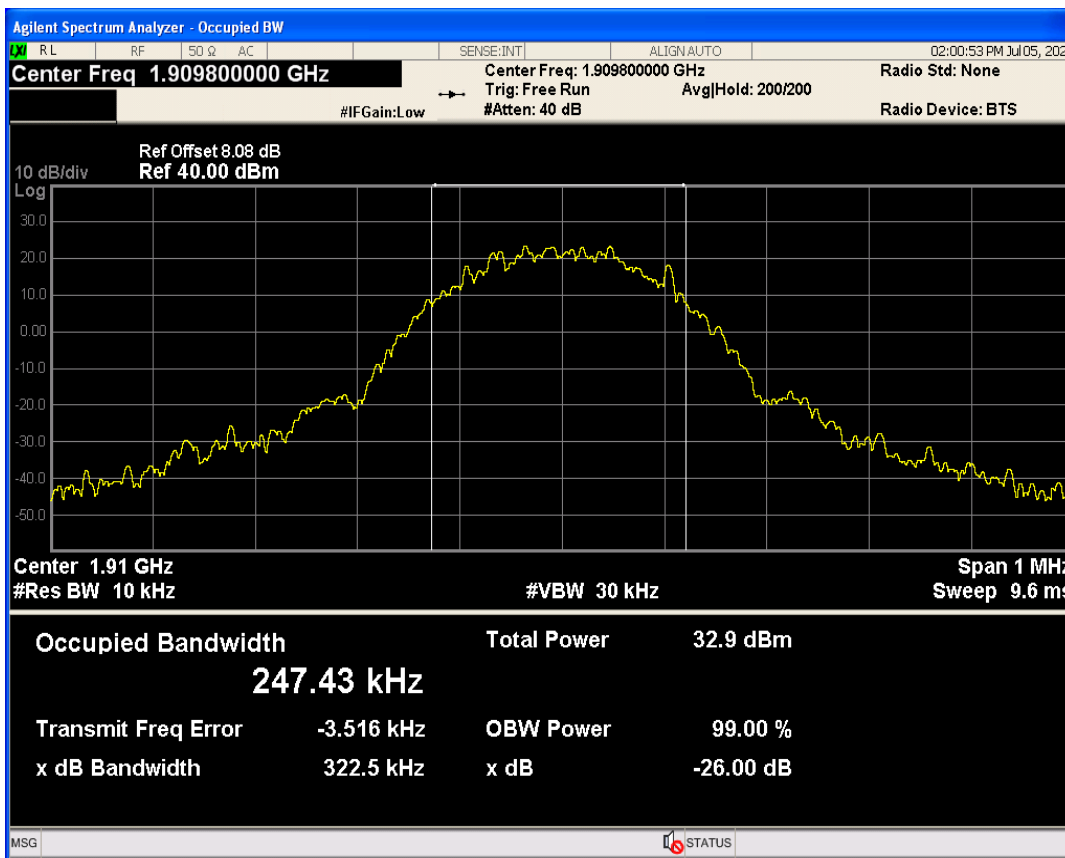


EGPRS850 Channel=189

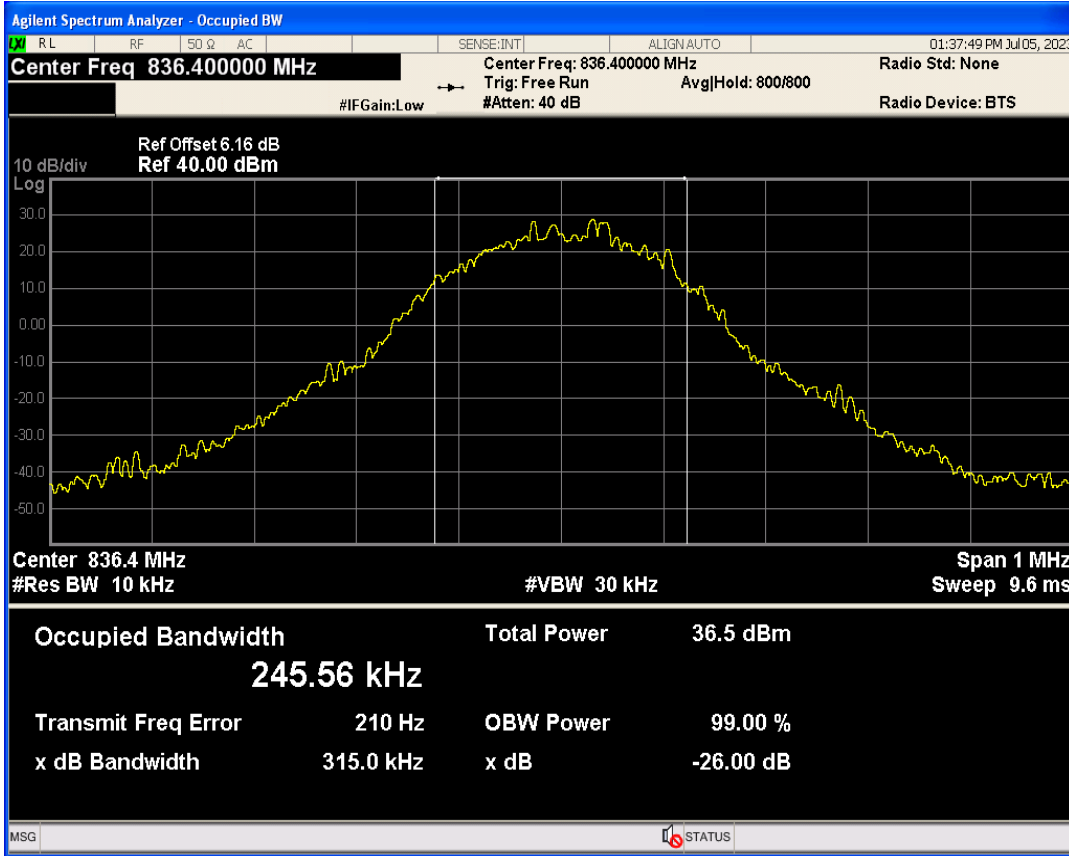

EGPRS850 Channel=128

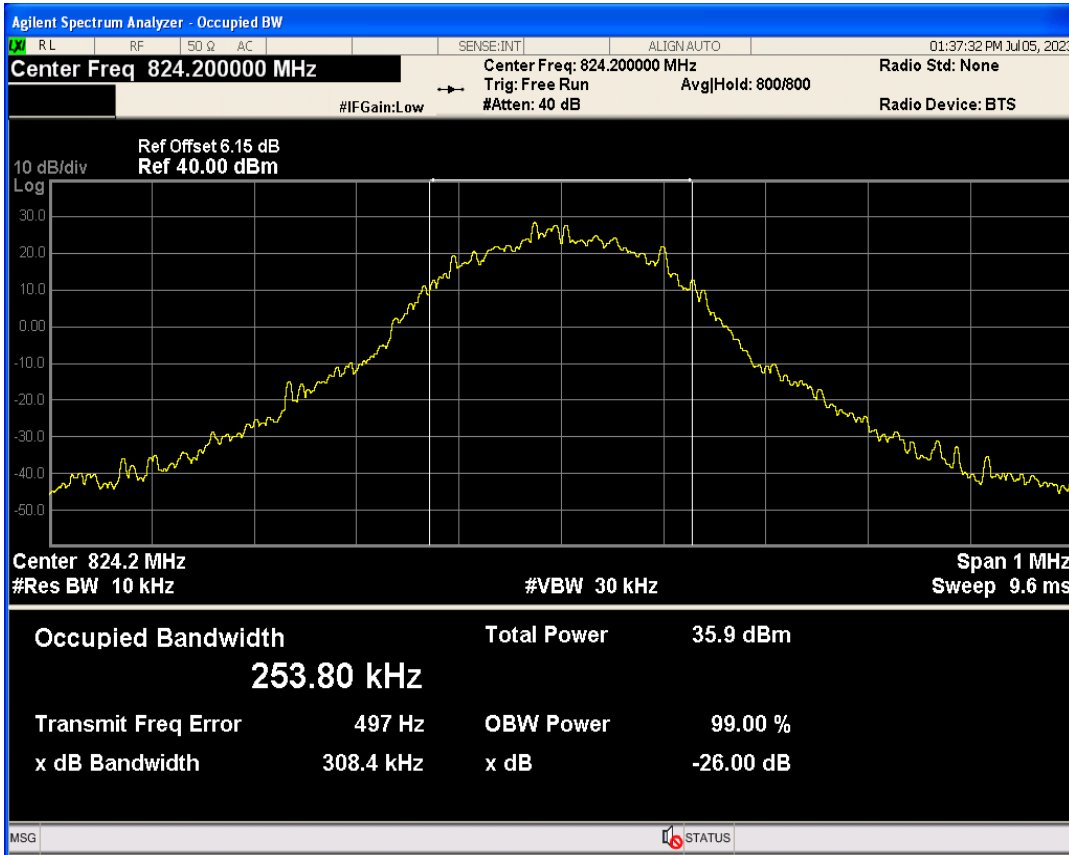


EGPRS850 Channel=251

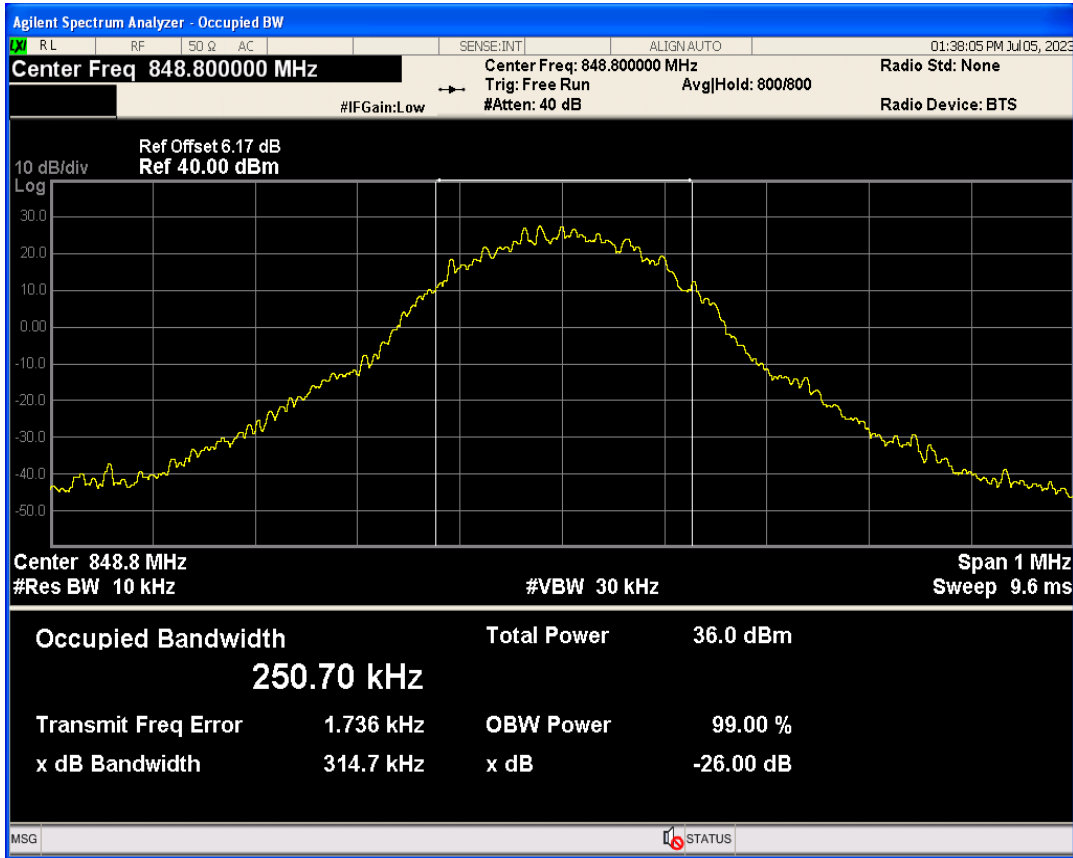


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	1849.98	-36.04	-13	PASS
EGPRS1900	810	1909.8	1910.01	-37.27	-13	PASS
EGPRS850	128	824.2	823.98	-32.65	-13	PASS
EGPRS850	251	848.8	849.02	-34.09	-13	PASS


EGPRS1900 Channel=810

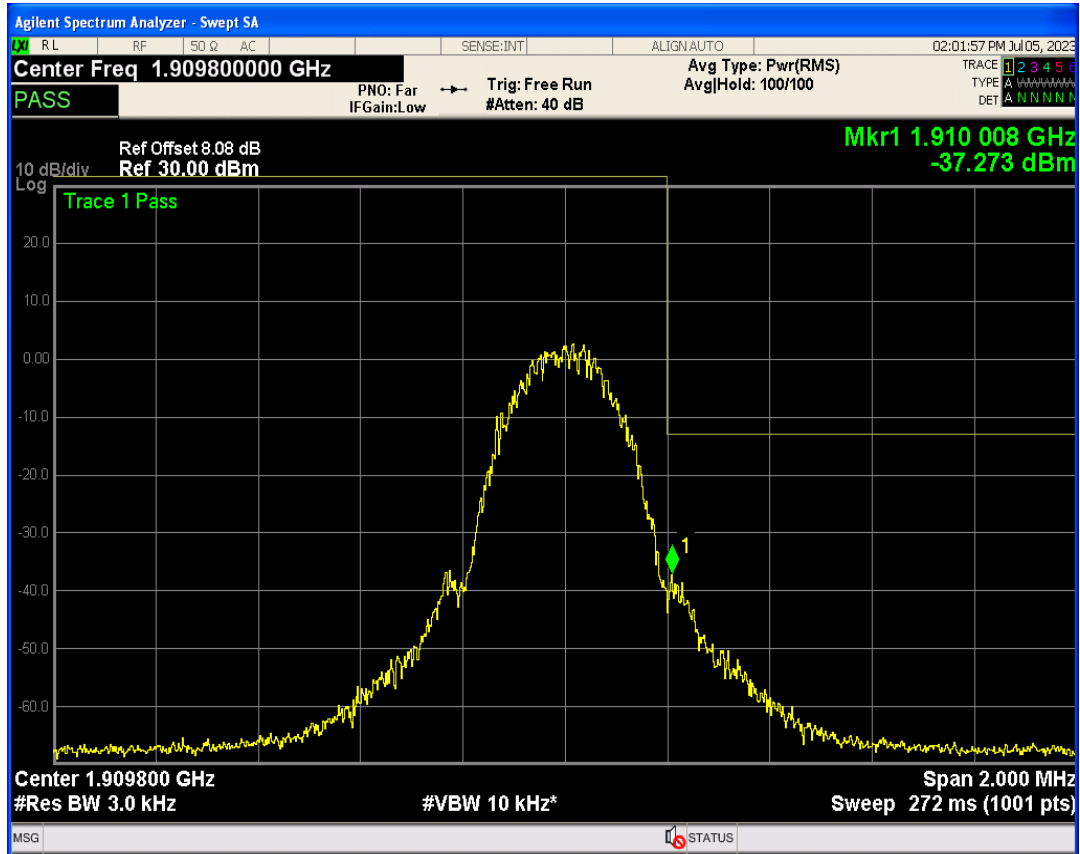


EGPRS1900 Channel=512

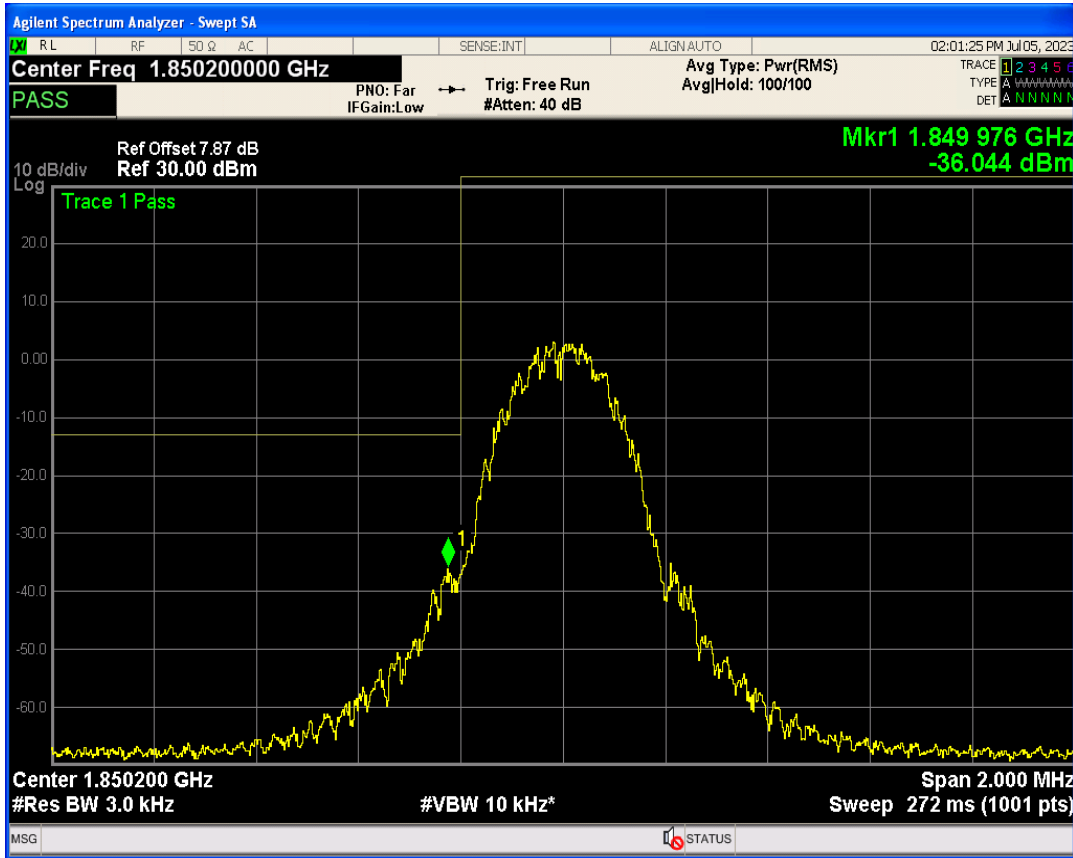

EGPRS850 Channel=128

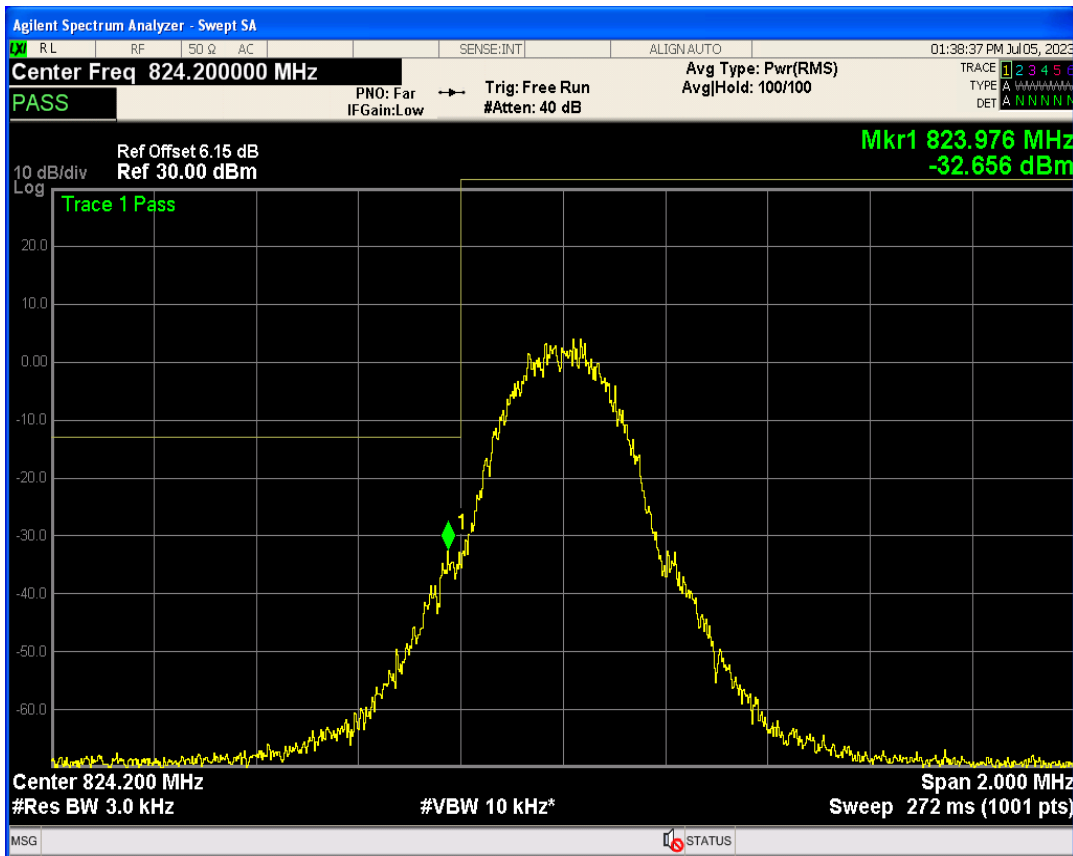


EGPRS850 Channel=251

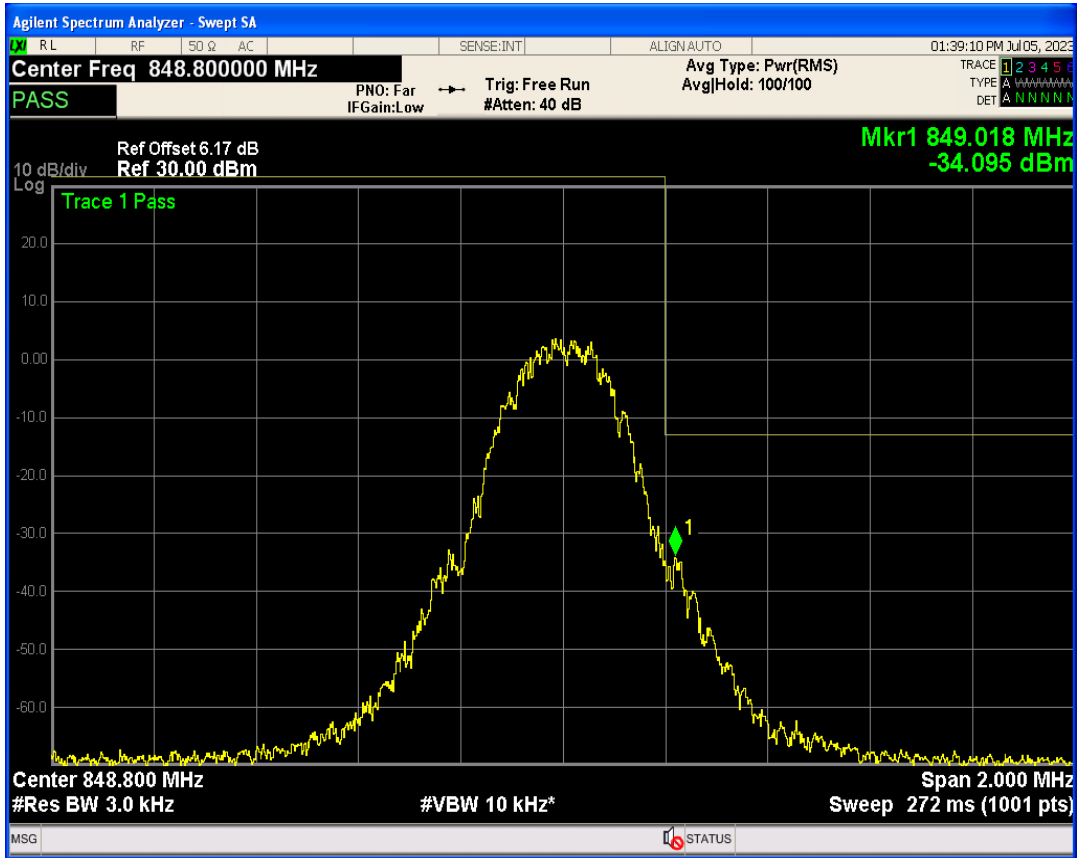


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	26138.68	-18.80	-13	PASS
EGPRS1900	661	1880	25942.14	-18.38	-13	PASS
EGPRS1900	810	1909.8	25515.98	-18.70	-13	PASS
EGPRS850	128	824.2	25967.95	-19.83	-13	PASS
EGPRS850	189	836.4	25956.04	-20.13	-13	PASS
EGPRS850	251	848.8	26031.48	-20.07	-13	PASS


EGPRS1900 Channel=512

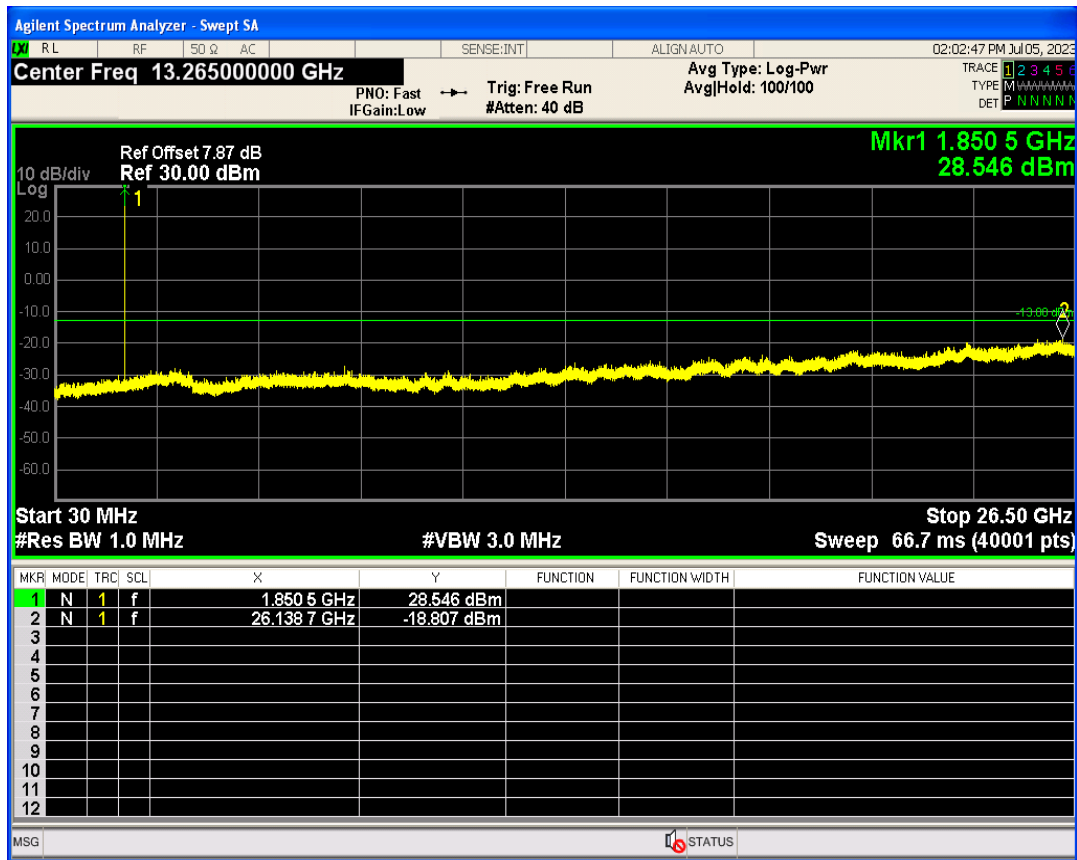


EGPRS1900 Channel=661

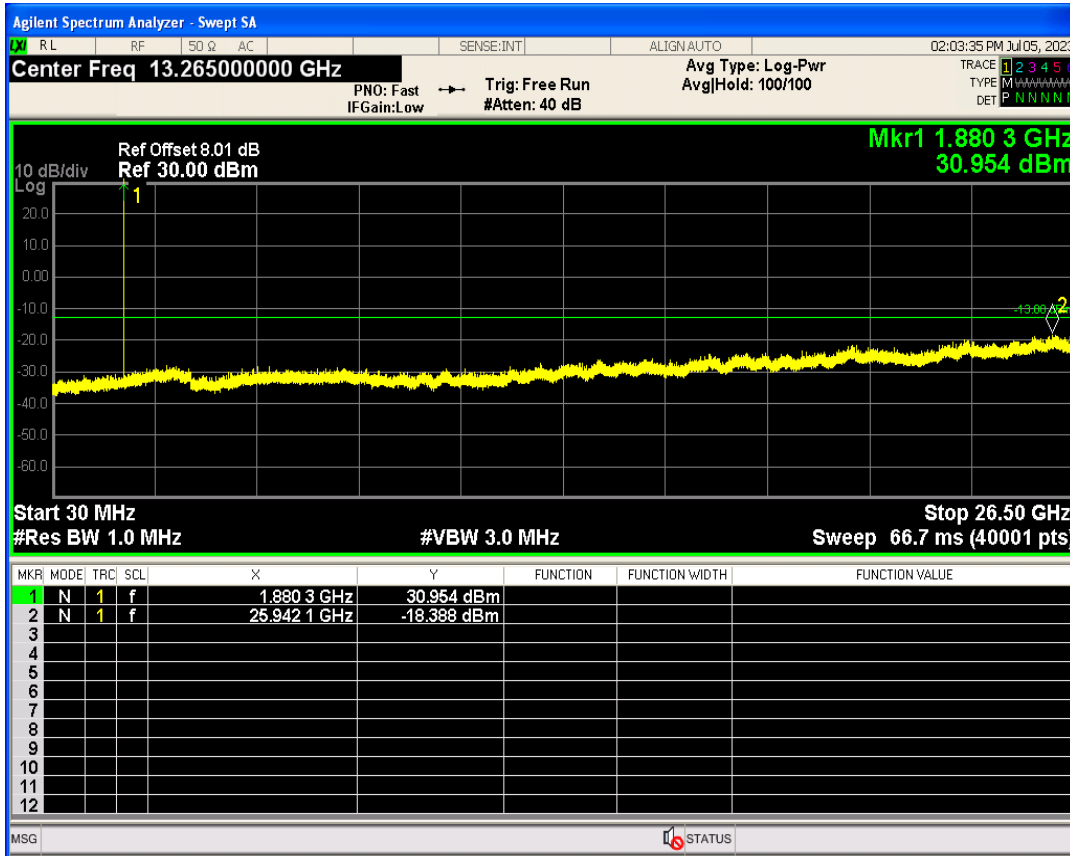


EGPRS1900 Channel=810

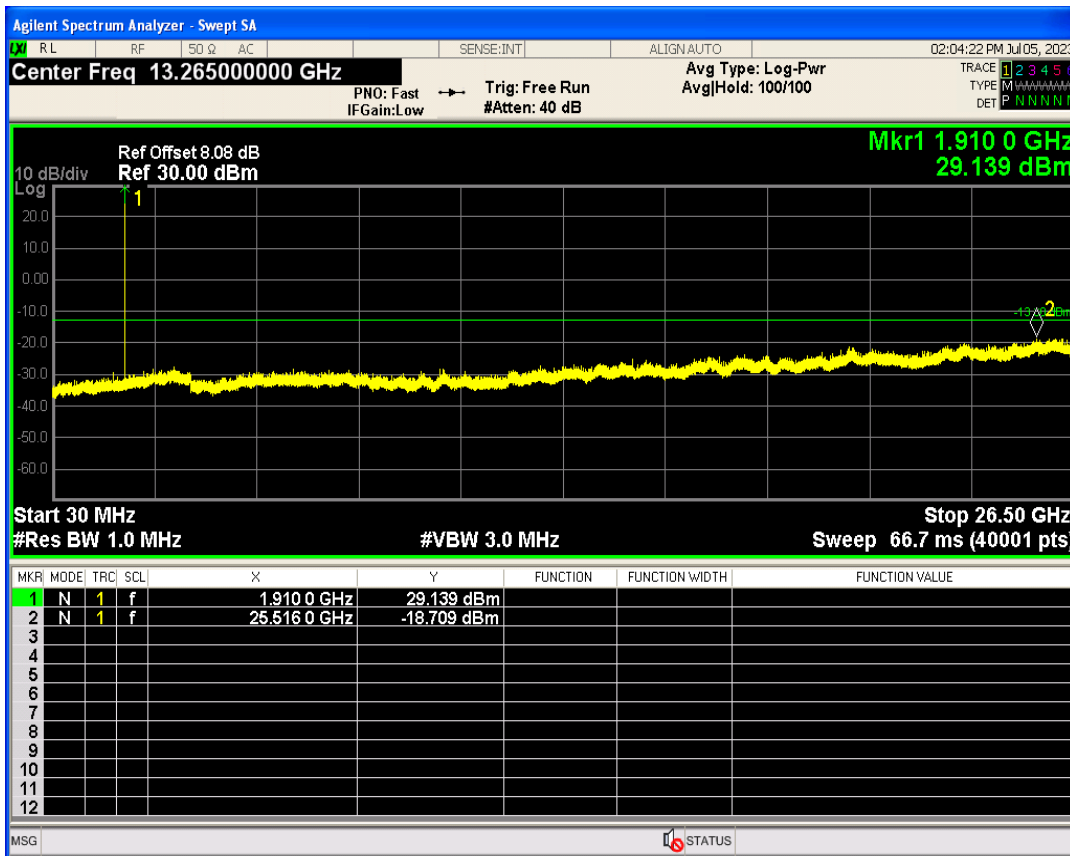


EGPRS850 Channel=128

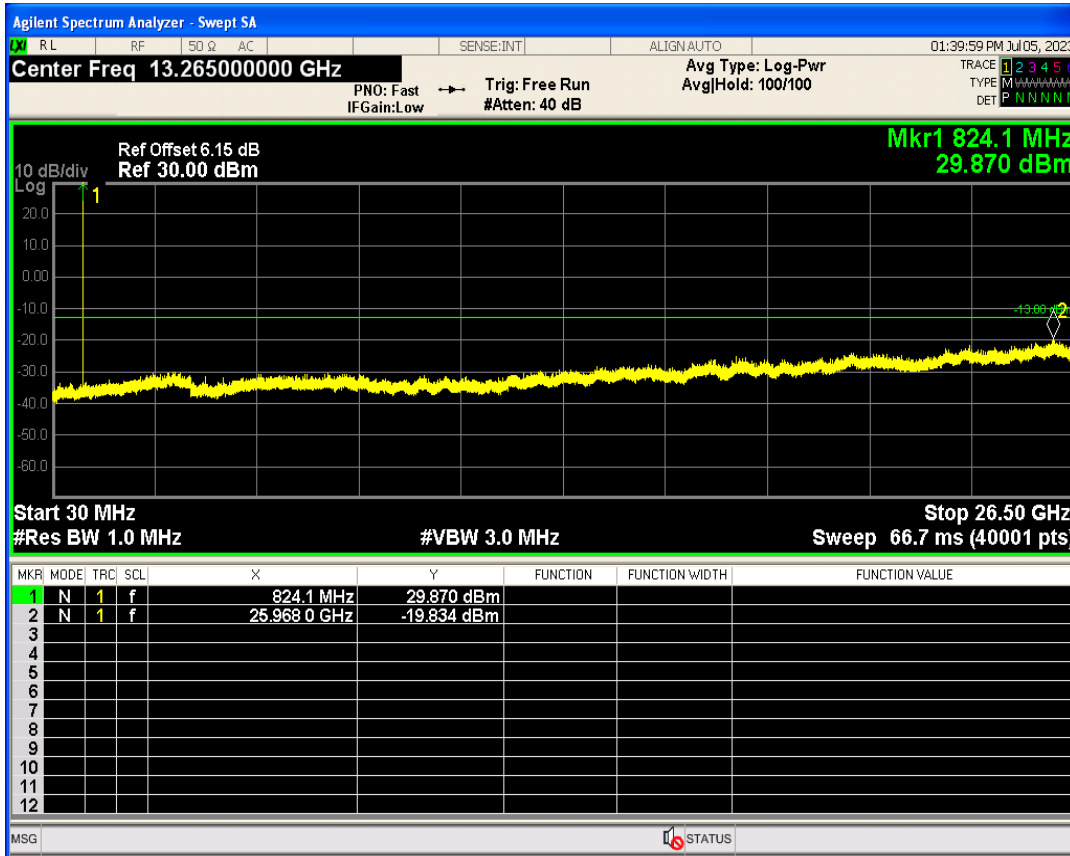

EGPRS850 Channel=189

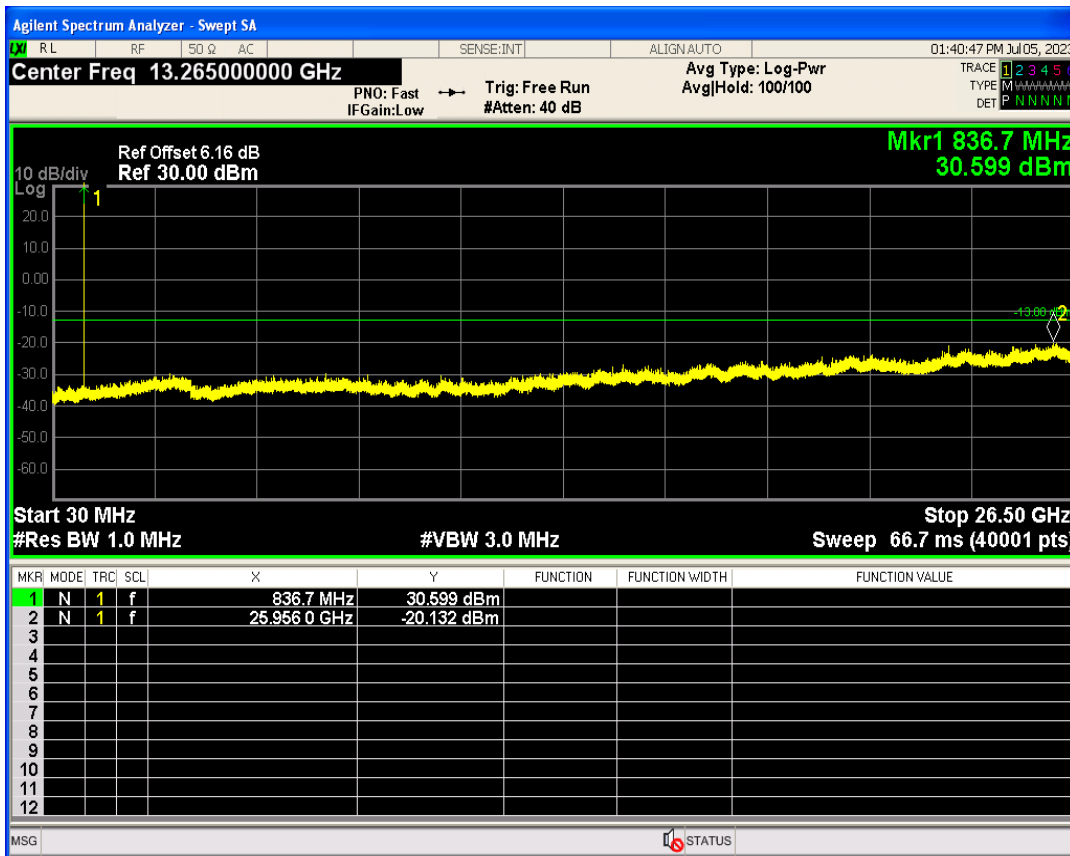

EGPRS850 Channel=251

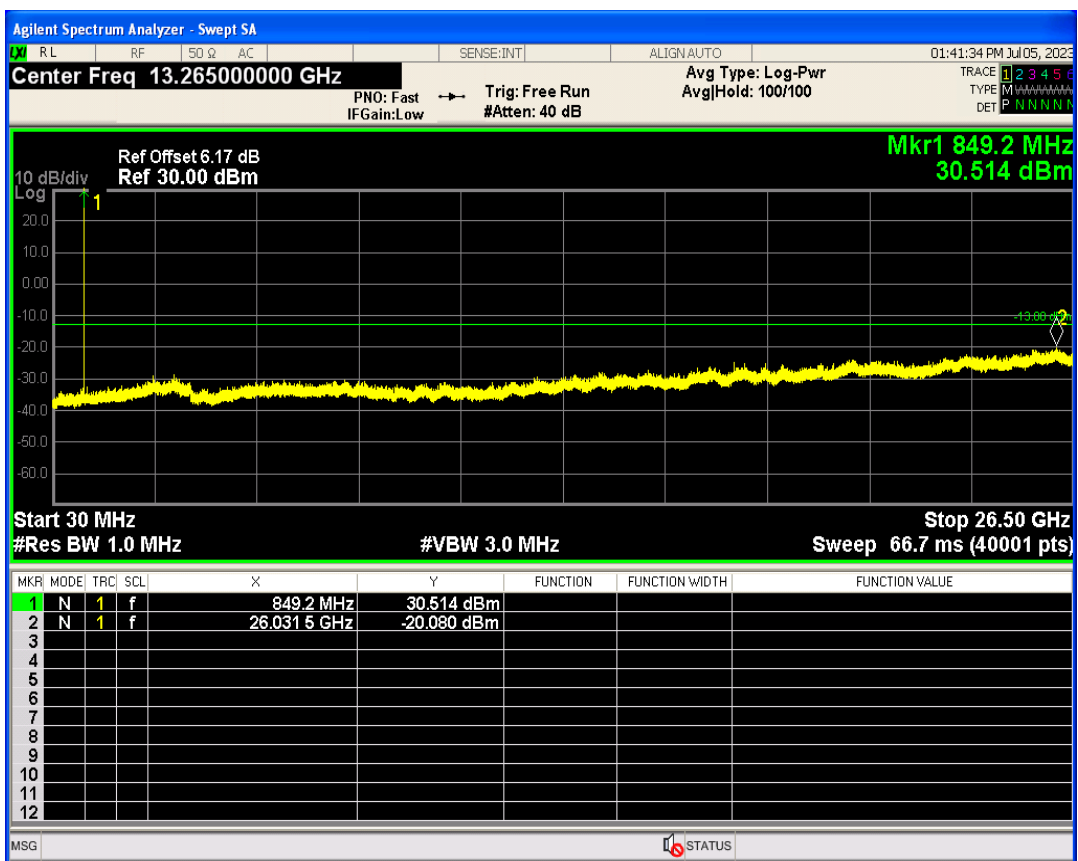


Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
GPRS1900 1 Slot	512	1850.2	32.00	PASS
GPRS1900 1 Slot	661	1880	32.01	PASS
GPRS1900 1 Slot	810	1909.8	31.81	PASS
GPRS1900 2 Slot	512	1850.2	31.20	PASS
GPRS1900 2 Slot	661	1880	31.26	PASS
GPRS1900 2 Slot	810	1909.8	31.08	PASS
GPRS1900 3 Slot	512	1850.2	29.31	PASS
GPRS1900 3 Slot	661	1880	29.47	PASS
GPRS1900 3 Slot	810	1909.8	29.39	PASS
GPRS1900 4 Slot	512	1850.2	28.10	PASS
GPRS1900 4 Slot	661	1880	28.30	PASS
GPRS1900 4 Slot	810	1909.8	28.25	PASS
GPRS850 1 Slot	128	824.2	33.69	PASS
GPRS850 1 Slot	189	836.4	33.85	PASS
GPRS850 1 Slot	251	848.8	33.73	PASS
GPRS850 2 Slot	128	824.2	32.90	PASS
GPRS850 2 Slot	189	836.4	33.08	PASS
GPRS850 2 Slot	251	848.8	32.97	PASS
GPRS850 3 Slot	128	824.2	31.08	PASS
GPRS850 3 Slot	189	836.4	31.26	PASS
GPRS850 3 Slot	251	848.8	31.17	PASS
GPRS850 4 Slot	128	824.2	29.93	PASS
GPRS850 4 Slot	189	836.4	30.12	PASS
GPRS850 4 Slot	251	848.8	30.03	PASS


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.69	13.00	PASS
GPRS1900	661	1880	2.69	13.00	PASS
GPRS1900	810	1909.8	2.70	13.00	PASS
GPRS850	128	824.2	2.69	13.00	PASS
GPRS850	189	836.4	2.68	13.00	PASS
GPRS850	251	848.8	2.68	13.00	PASS


GPRS1900 Channel=512

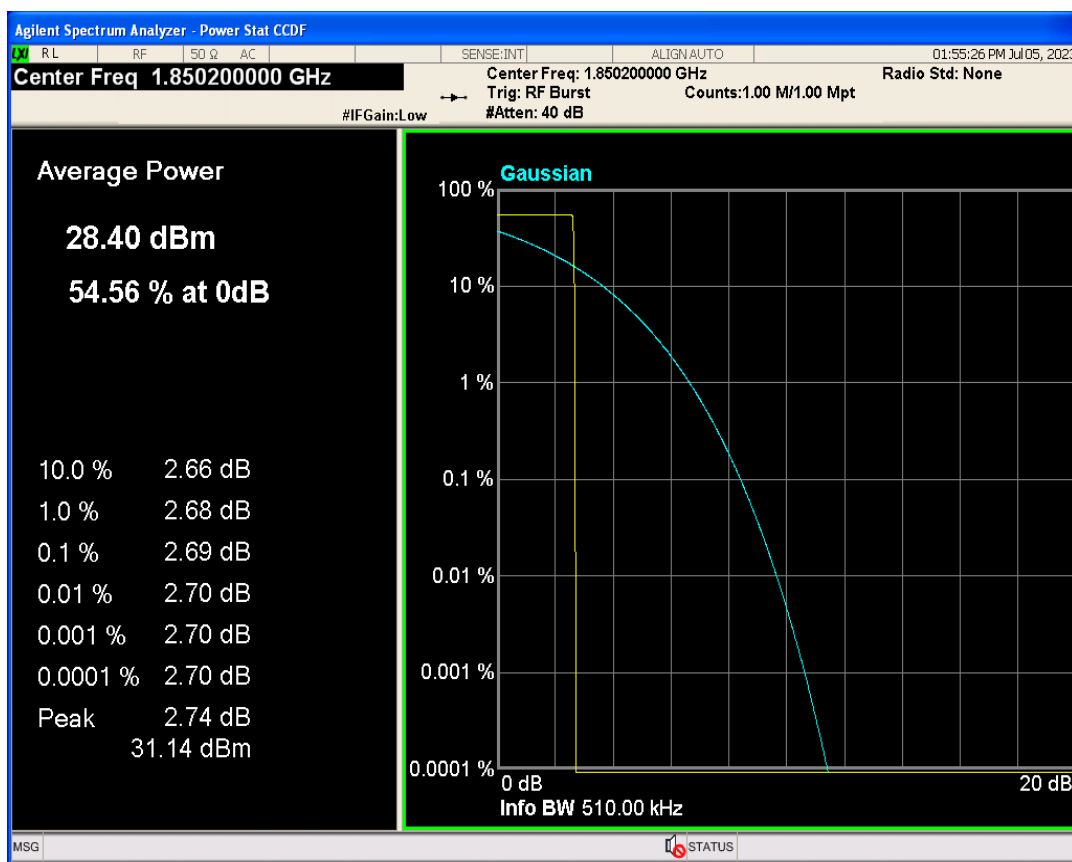


GPRS1900 Channel=810

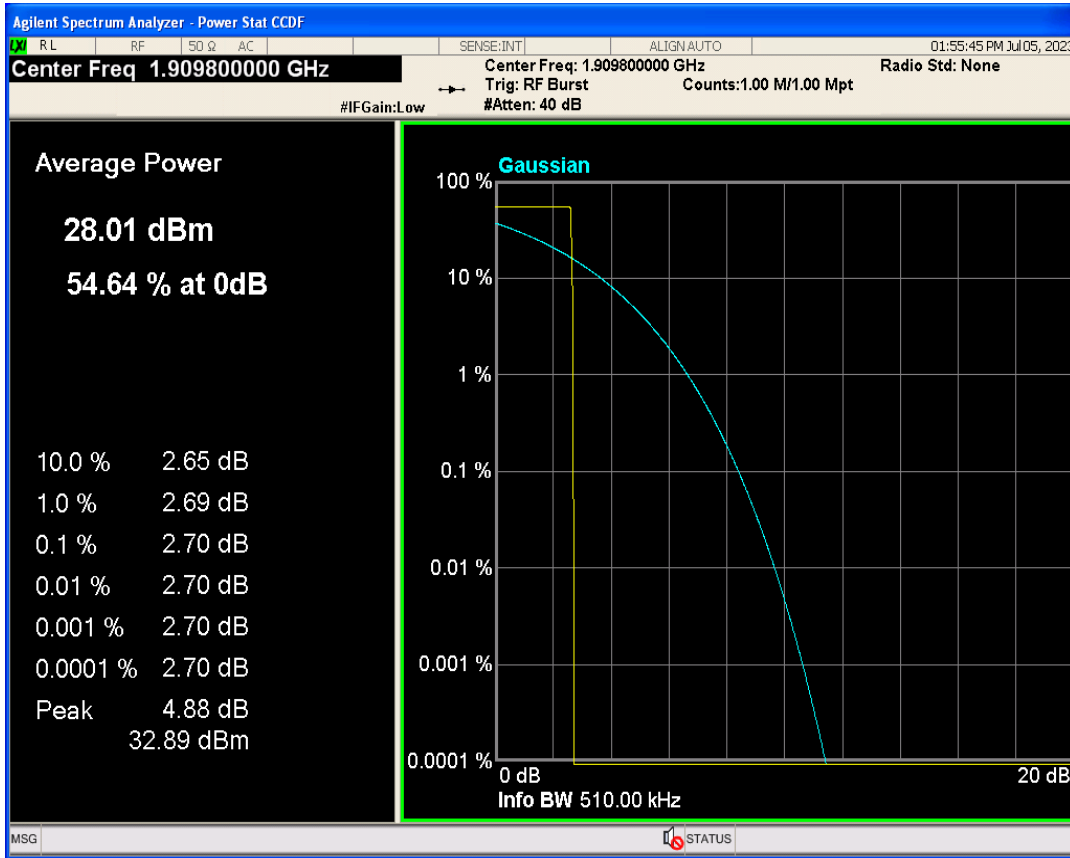


GPRS1900 Channel=661

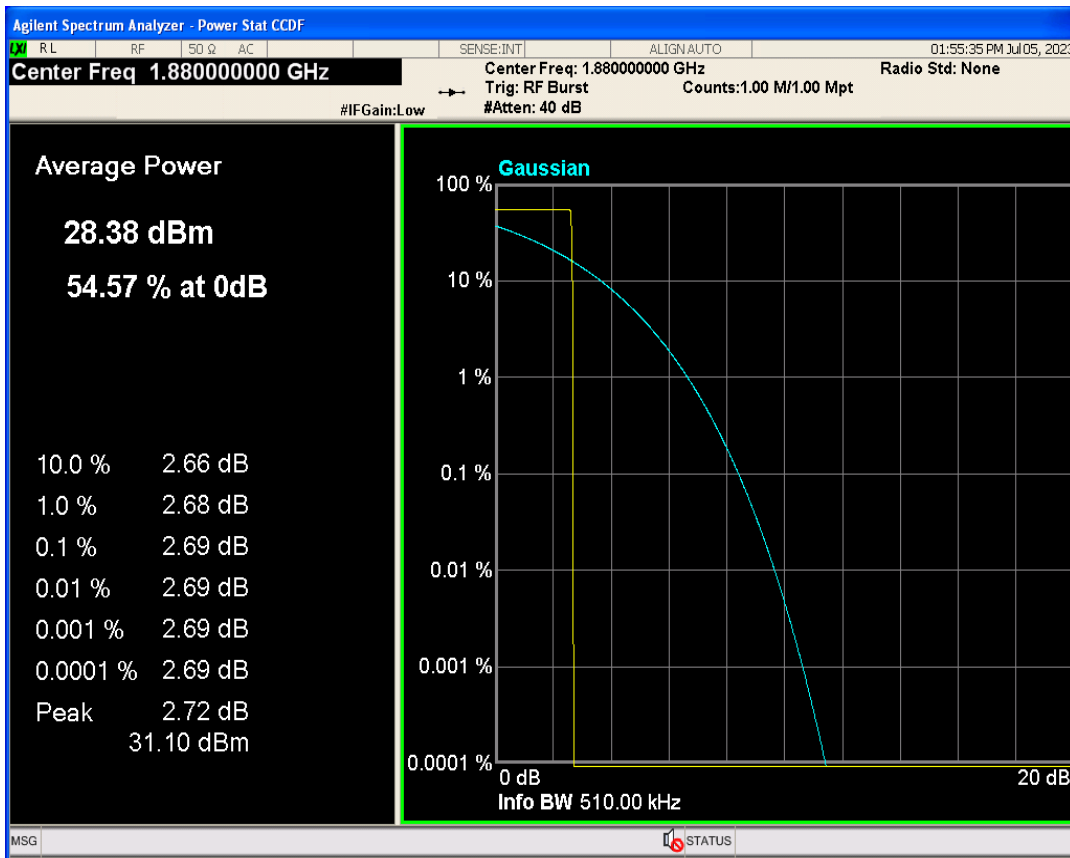


GPRS850 Channel=128

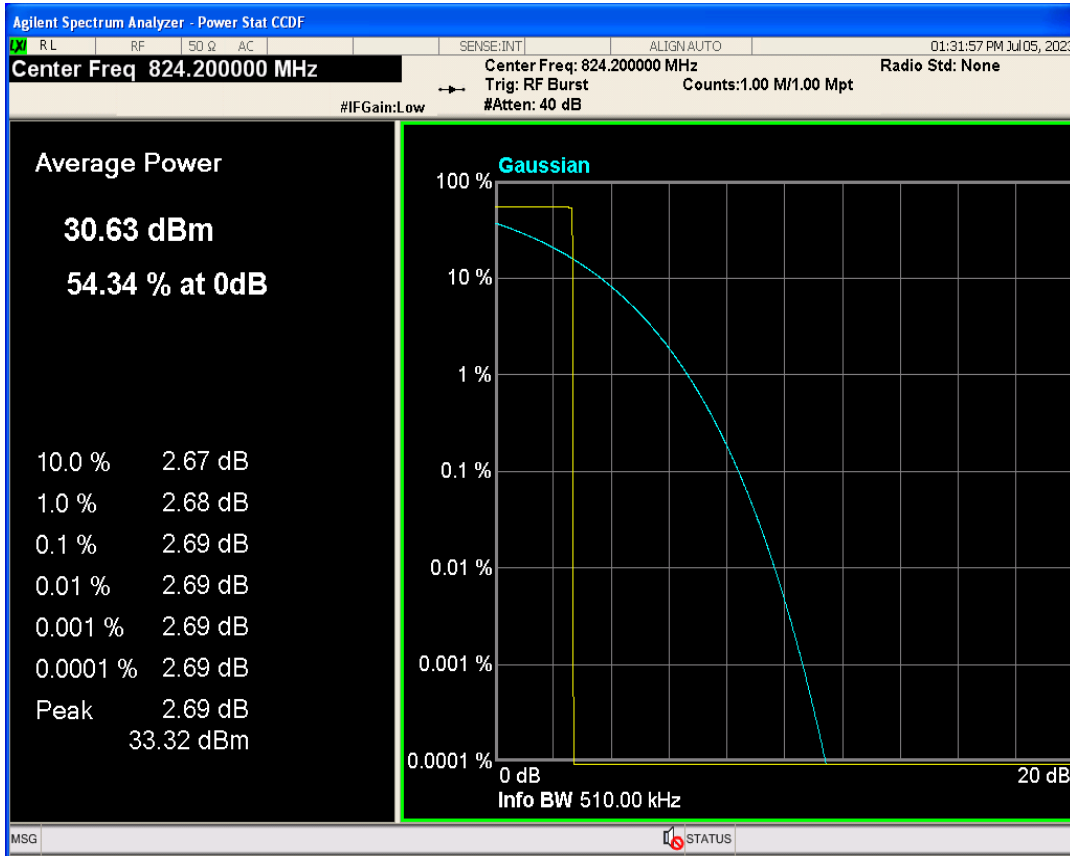

GPRS850 Channel=189

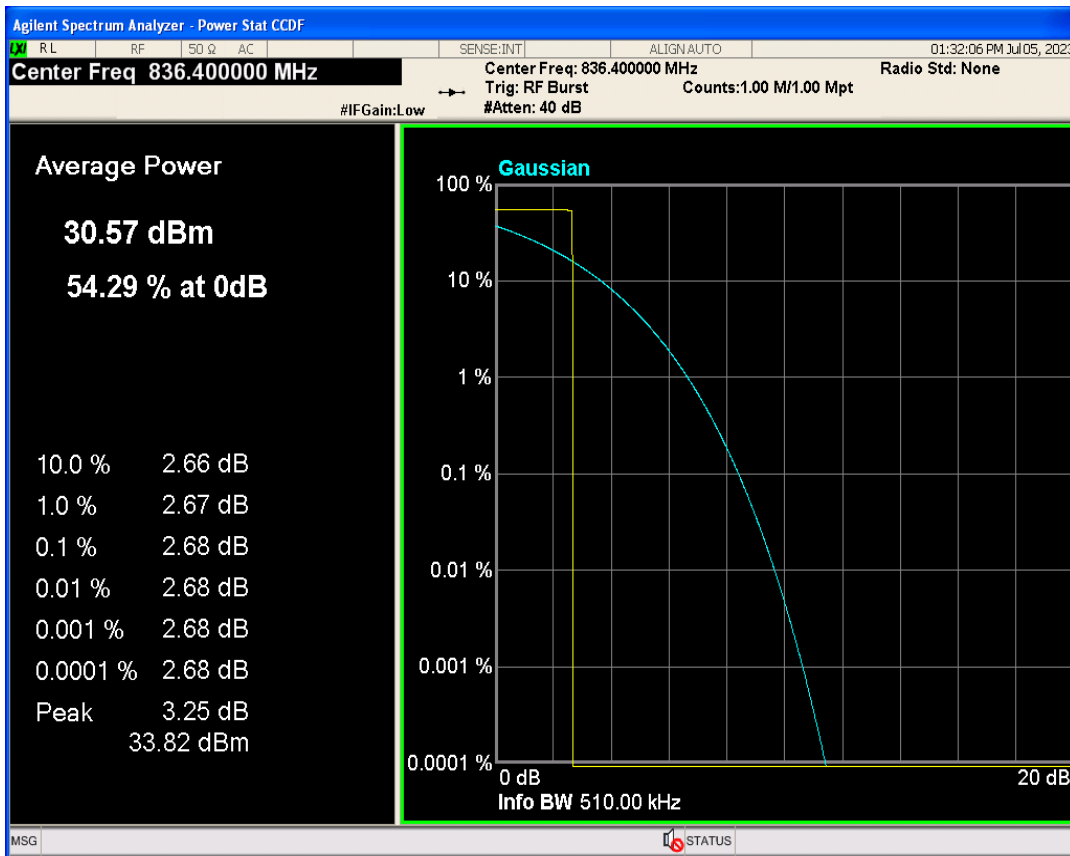


GPRS850 Channel=251

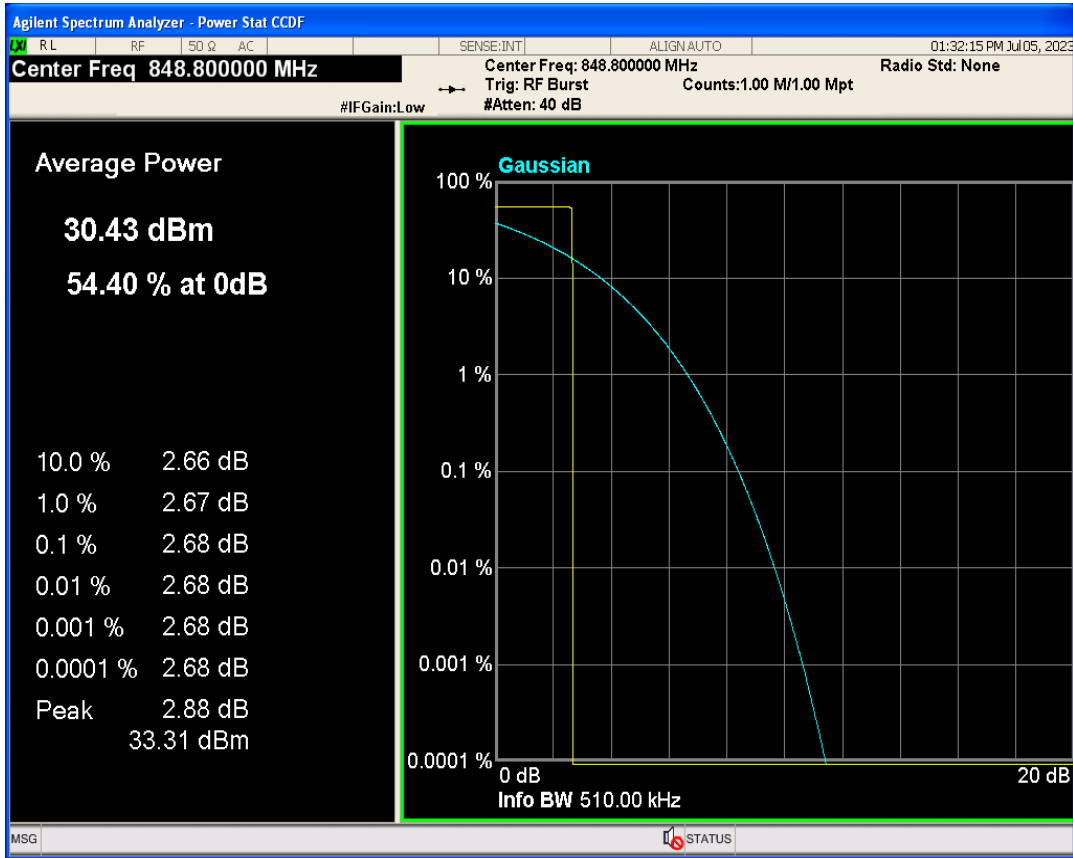


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	243.038	317.514	PASS
GPRS1900	661	1880	244.646	321.283	PASS
GPRS1900	810	1909.8	236.255	313.257	PASS
GPRS850	128	824.2	245.103	321.381	PASS
GPRS850	189	836.4	249.267	317.727	PASS
GPRS850	251	848.8	250.373	312.104	PASS


GPRS1900 Channel=512

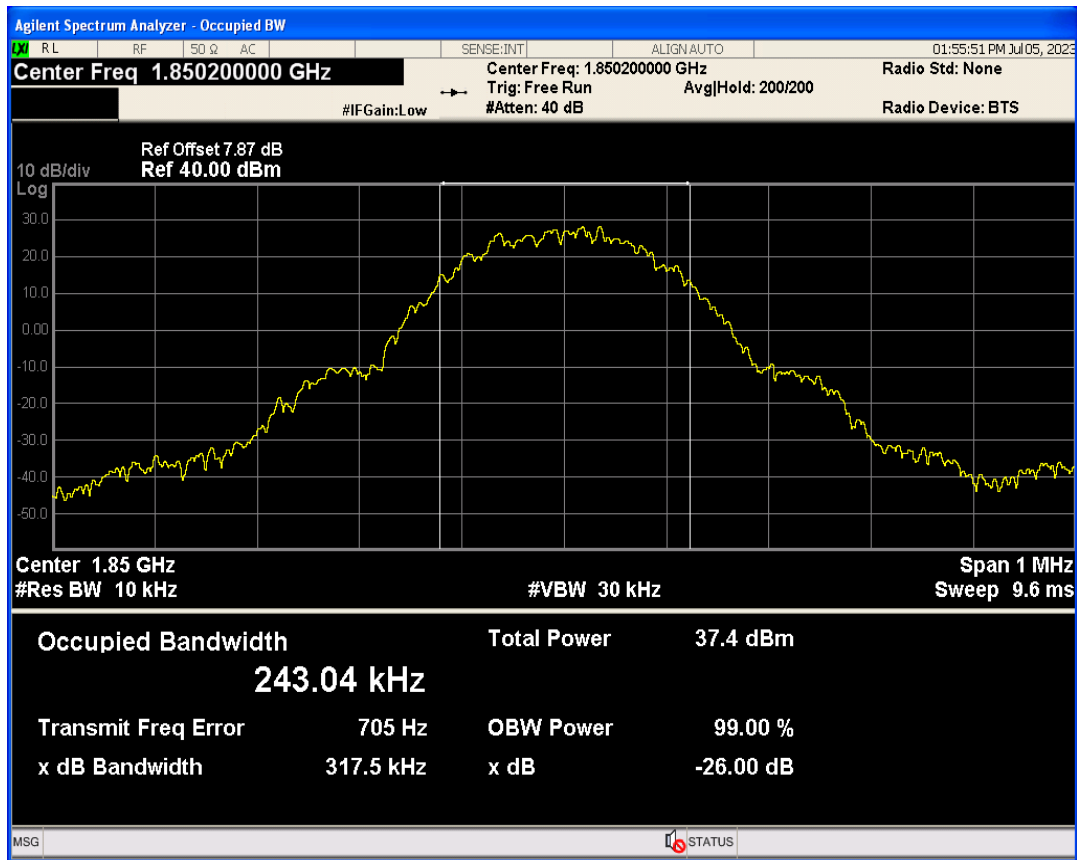


GPRS1900 Channel=661

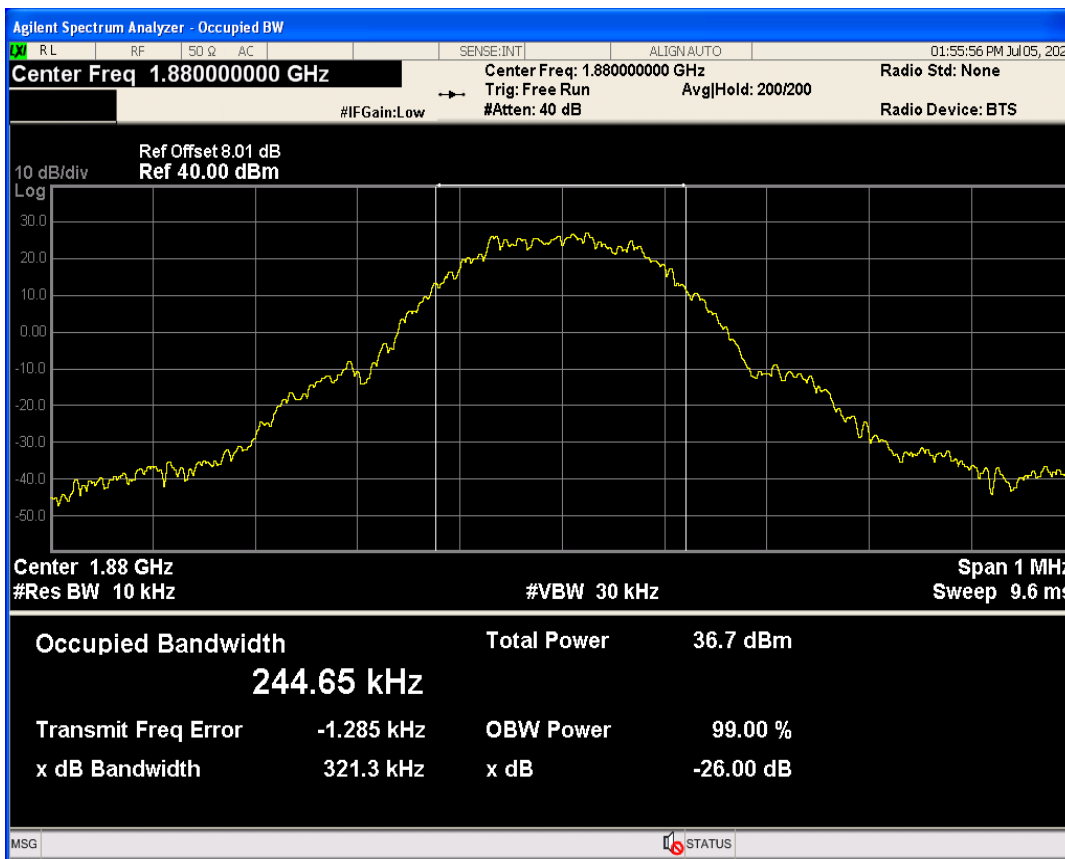


GPRS1900 Channel=810

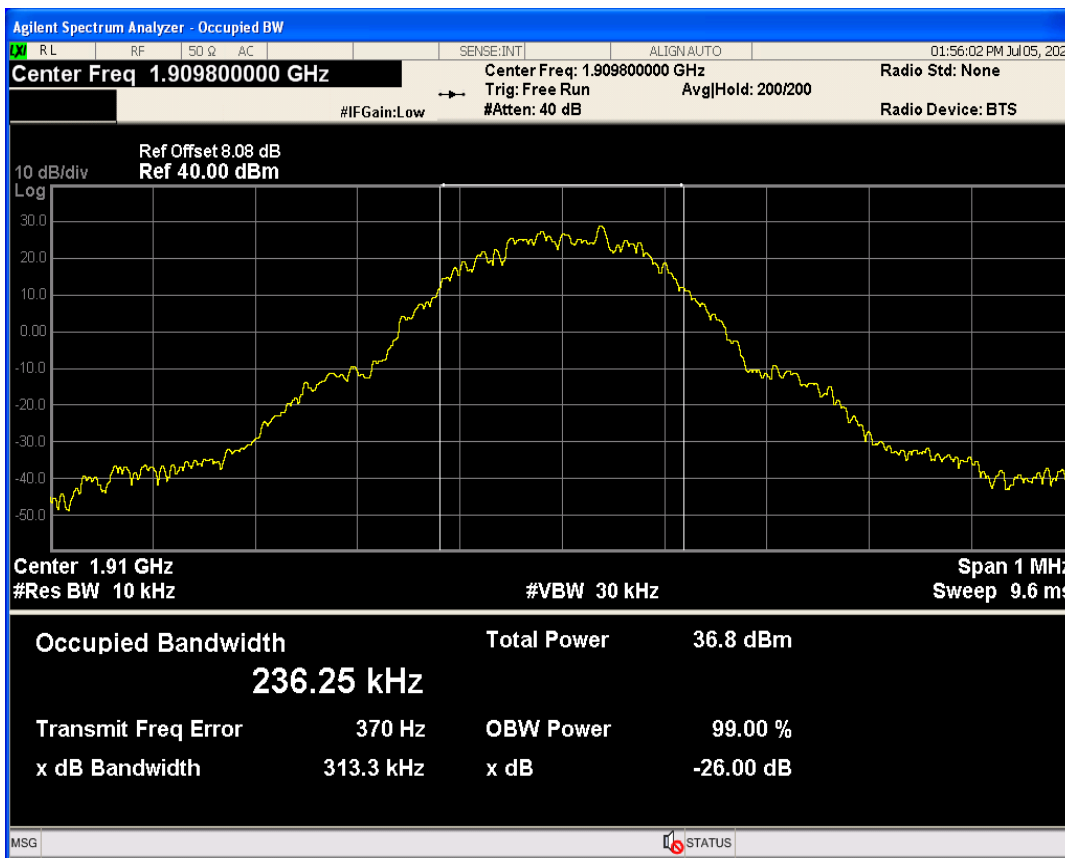


GPRS850 Channel=128

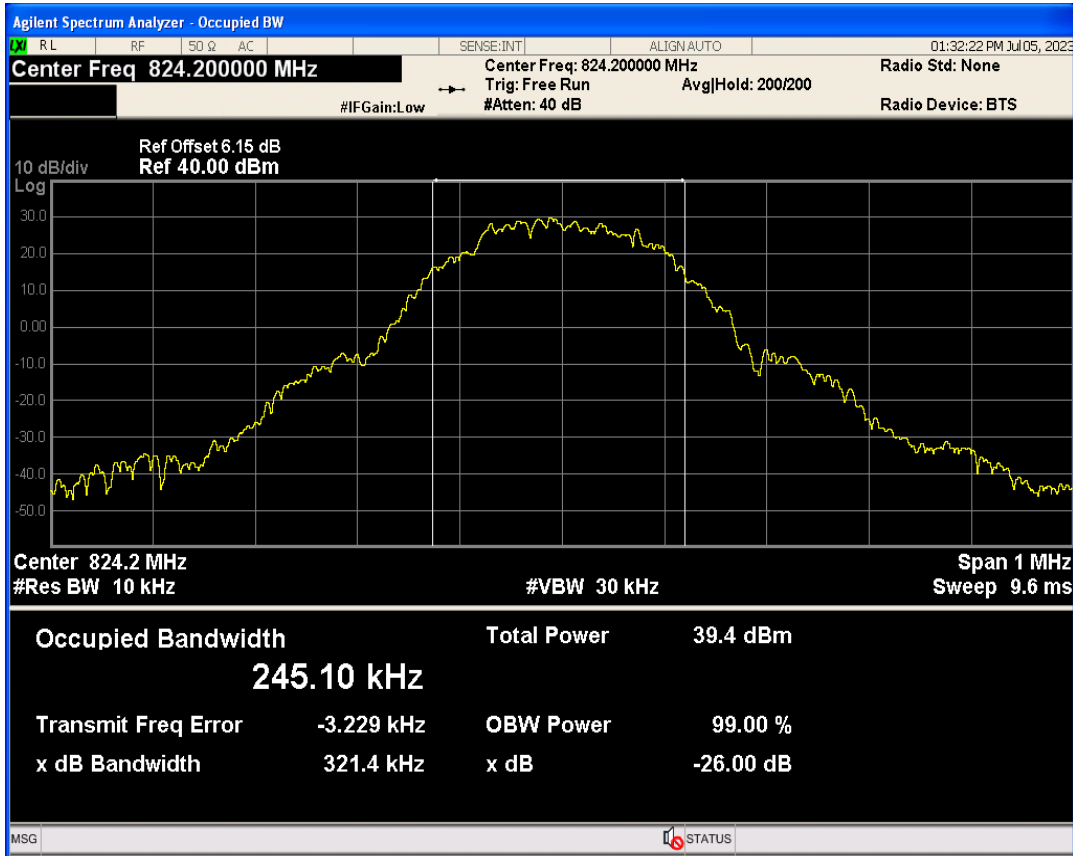

GPRS850 Channel=189

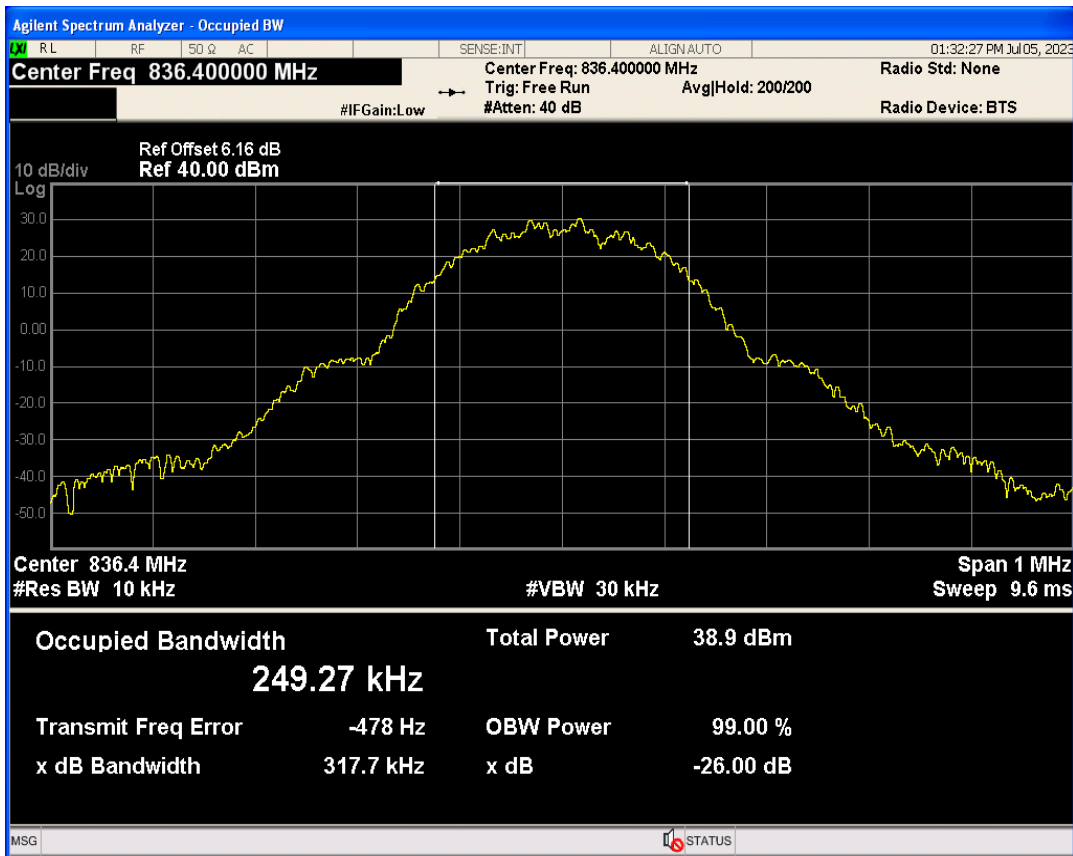


GPRS850 Channel=251

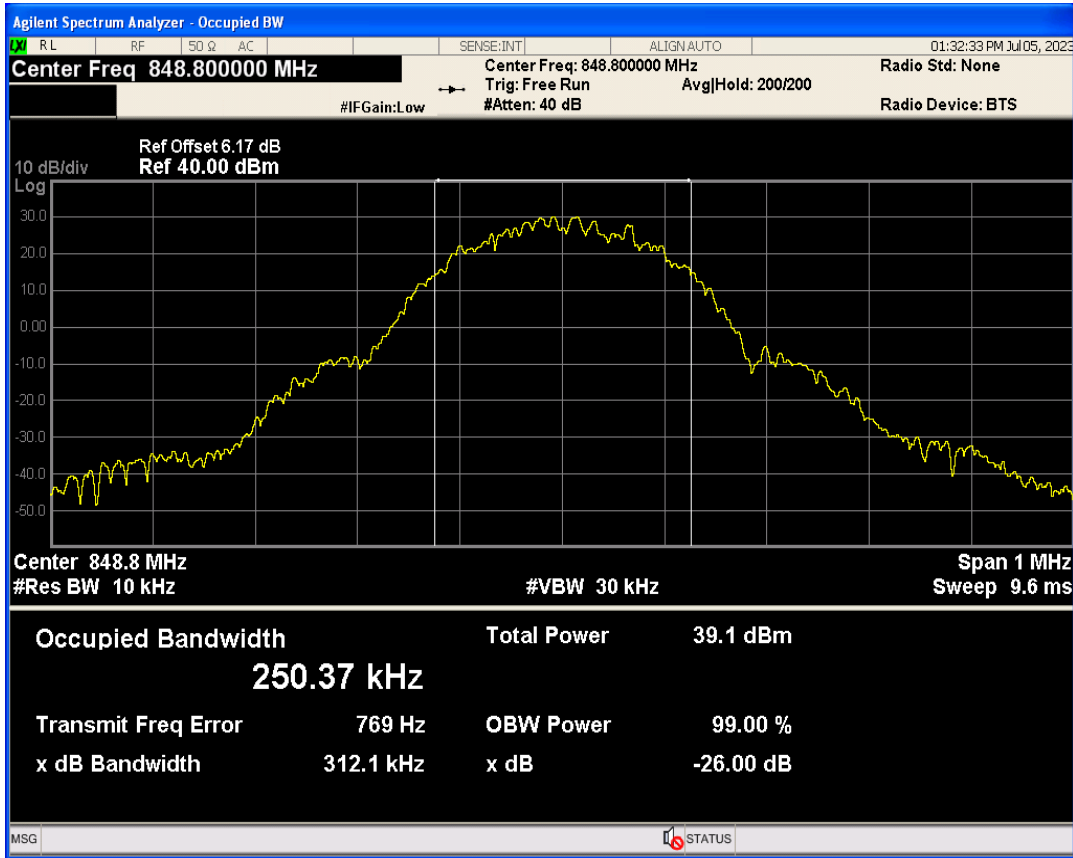


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1849.98	-28.34	-13	PASS
GPRS1900	810	1909.8	1910.02	-29.47	-13	PASS
GPRS850	128	824.2	823.98	-26.13	-13	PASS
GPRS850	251	848.8	849.02	-26.91	-13	PASS


GPRS1900 Channel=512

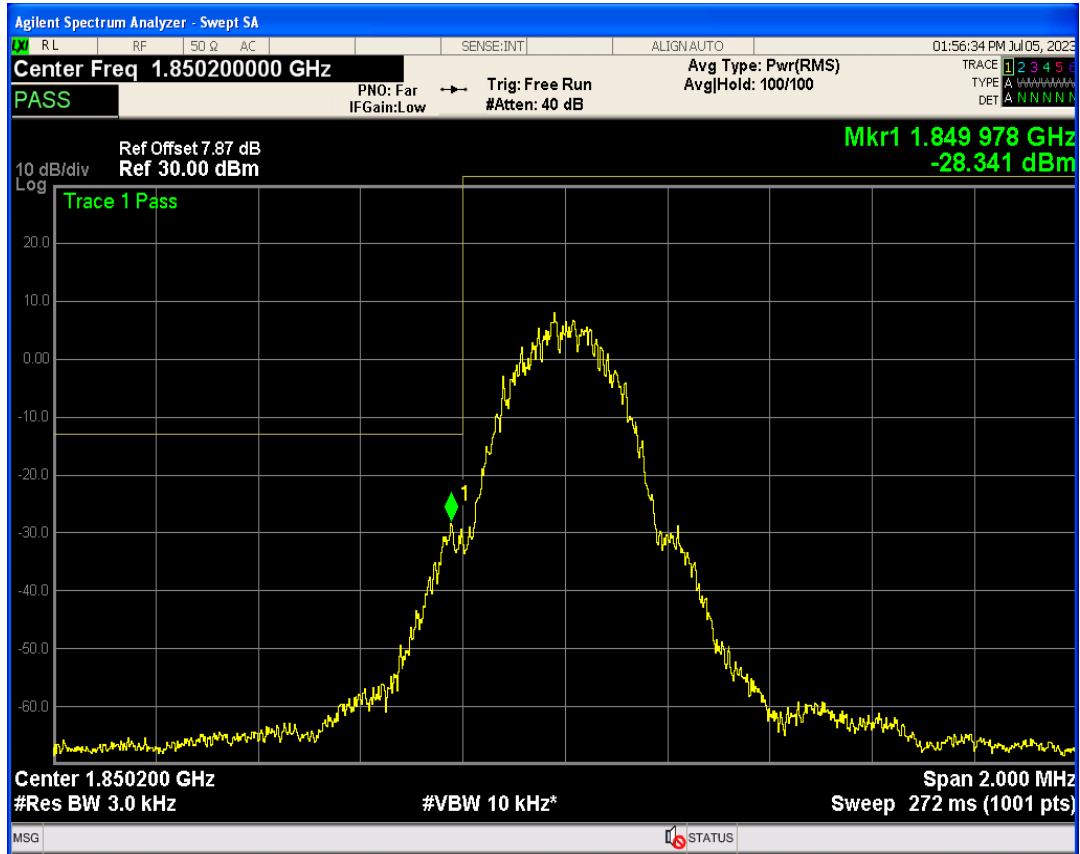


GPRS1900 Channel=810

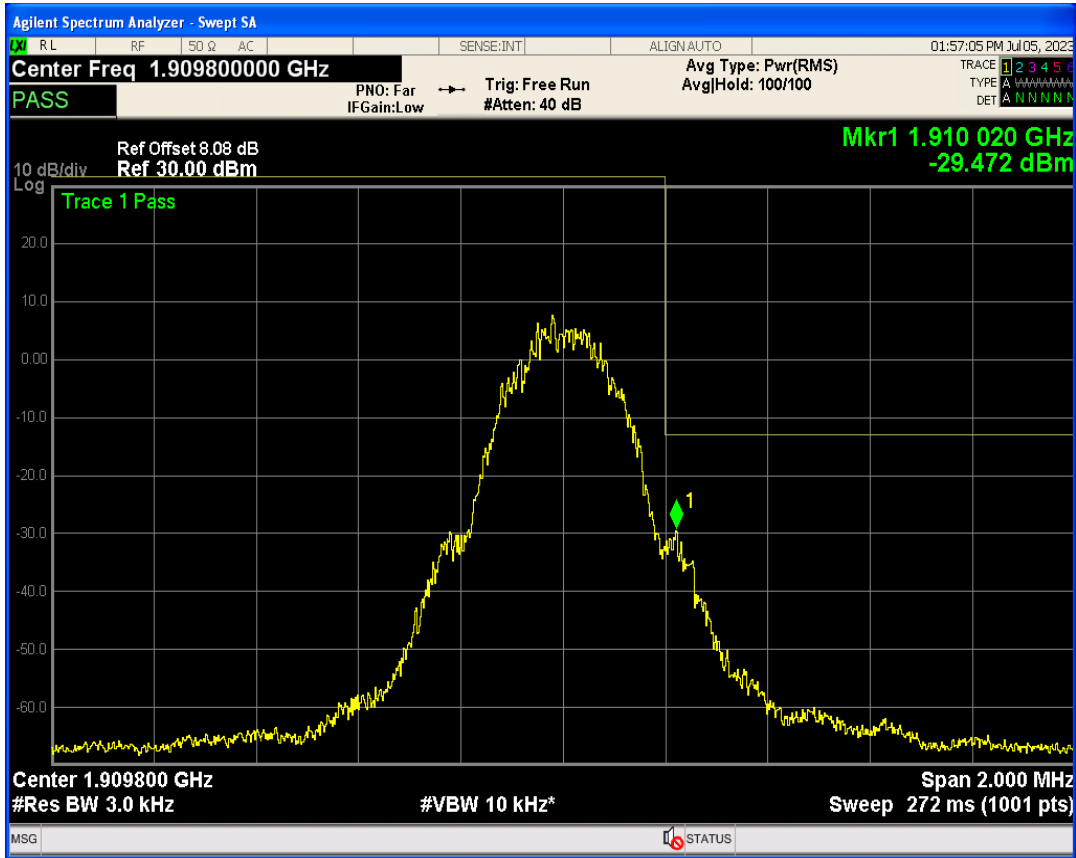

GPRS850 Channel=128

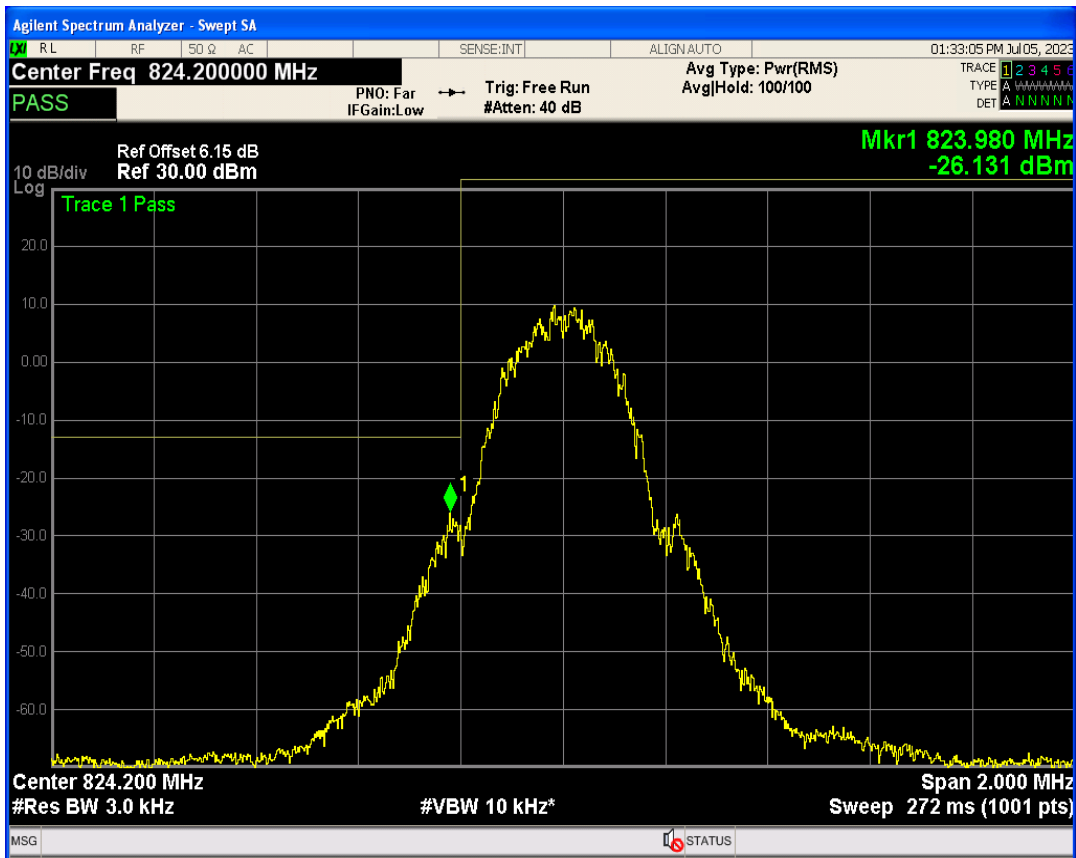


GPRS850 Channel=251

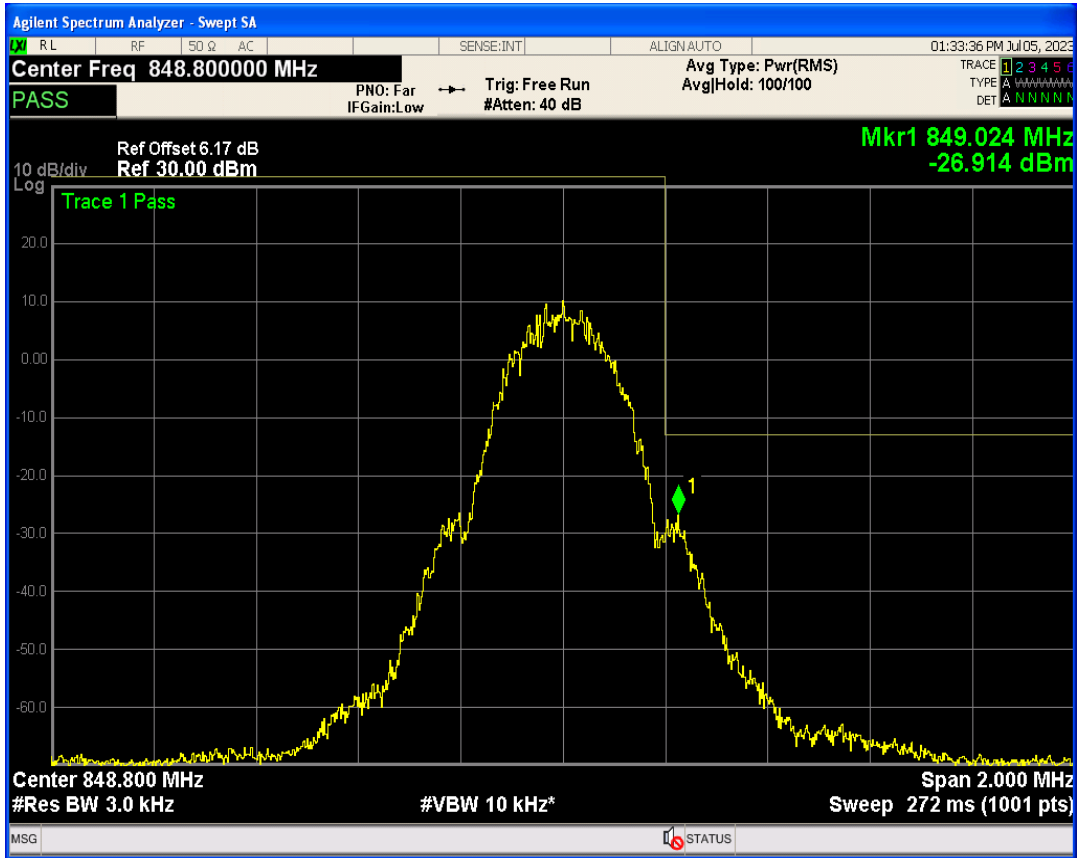


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	25530.54	-17.48	-13	PASS
GPRS1900	661	1880	25970.60	-18.66	-13	PASS
GPRS1900	810	1909.8	25482.23	-18.32	-13	PASS
GPRS850	128	824.2	25486.20	-20.12	-13	PASS
GPRS850	189	836.4	26032.14	-20.56	-13	PASS
GPRS850	251	848.8	25529.87	-20.14	-13	PASS


GPRS1900 Channel=512

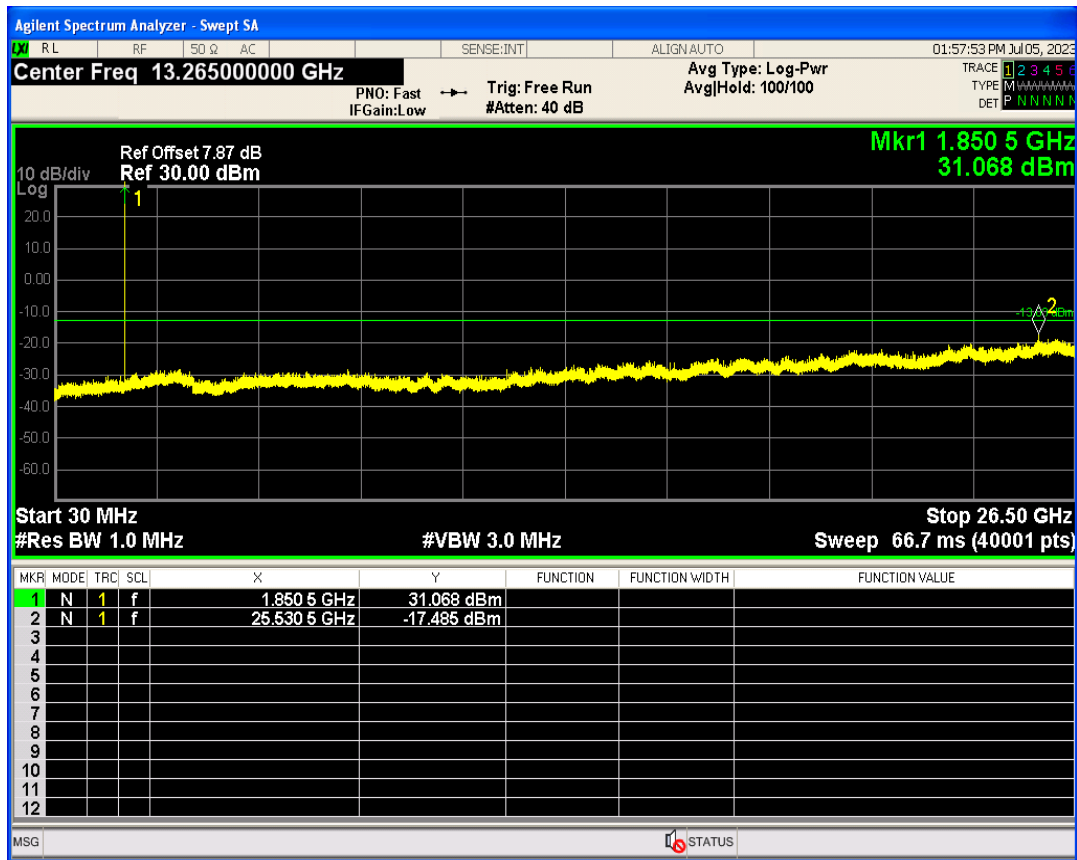


GPRS1900 Channel=661

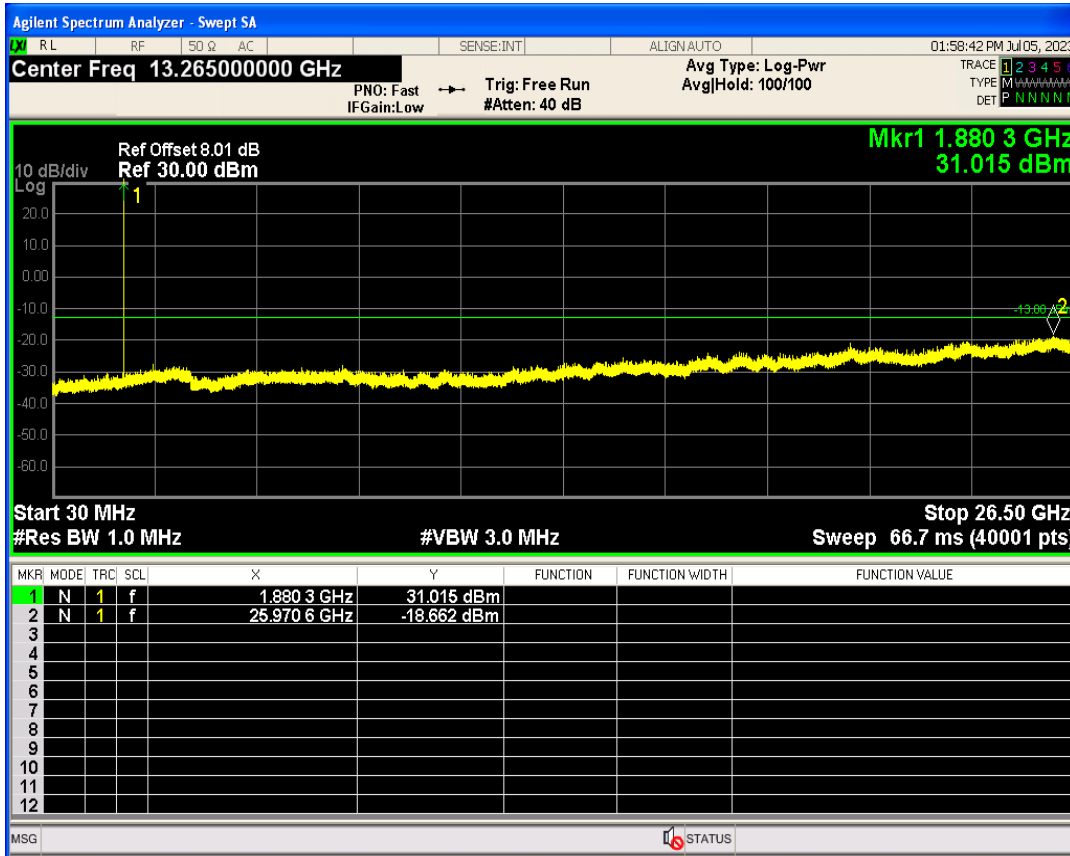


GPRS1900 Channel=810

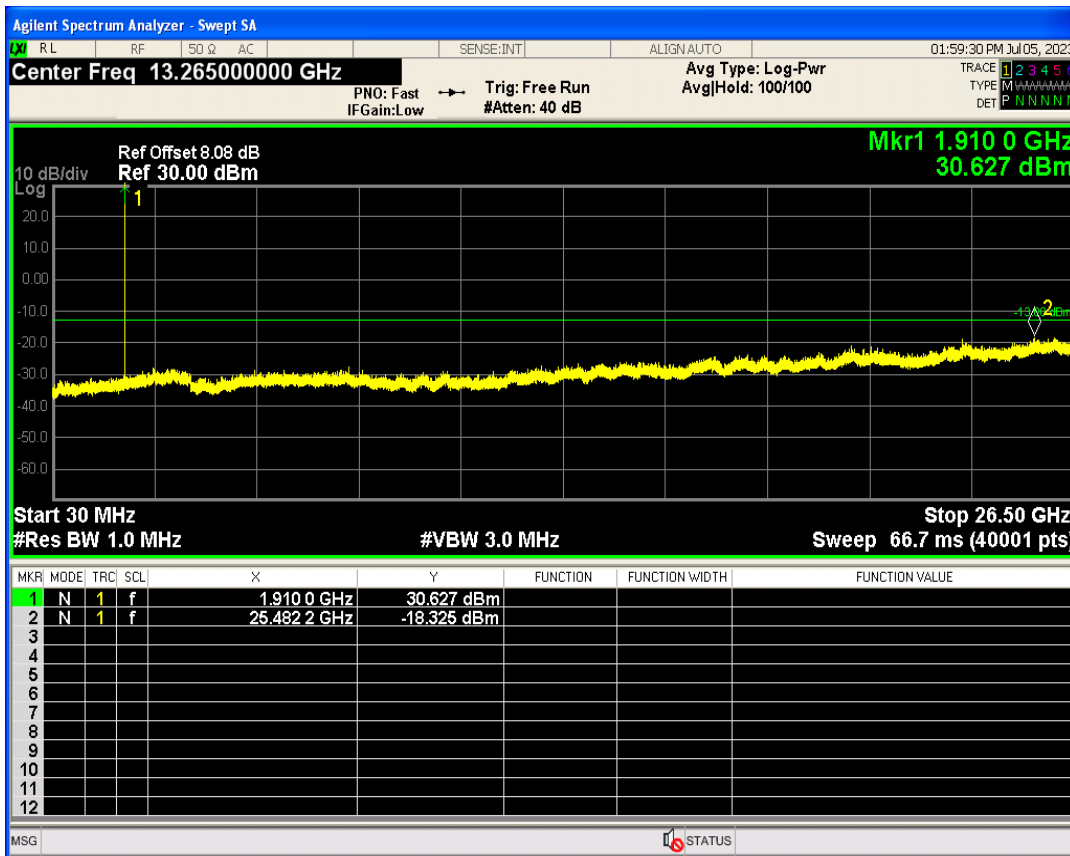


GPRS850 Channel=128

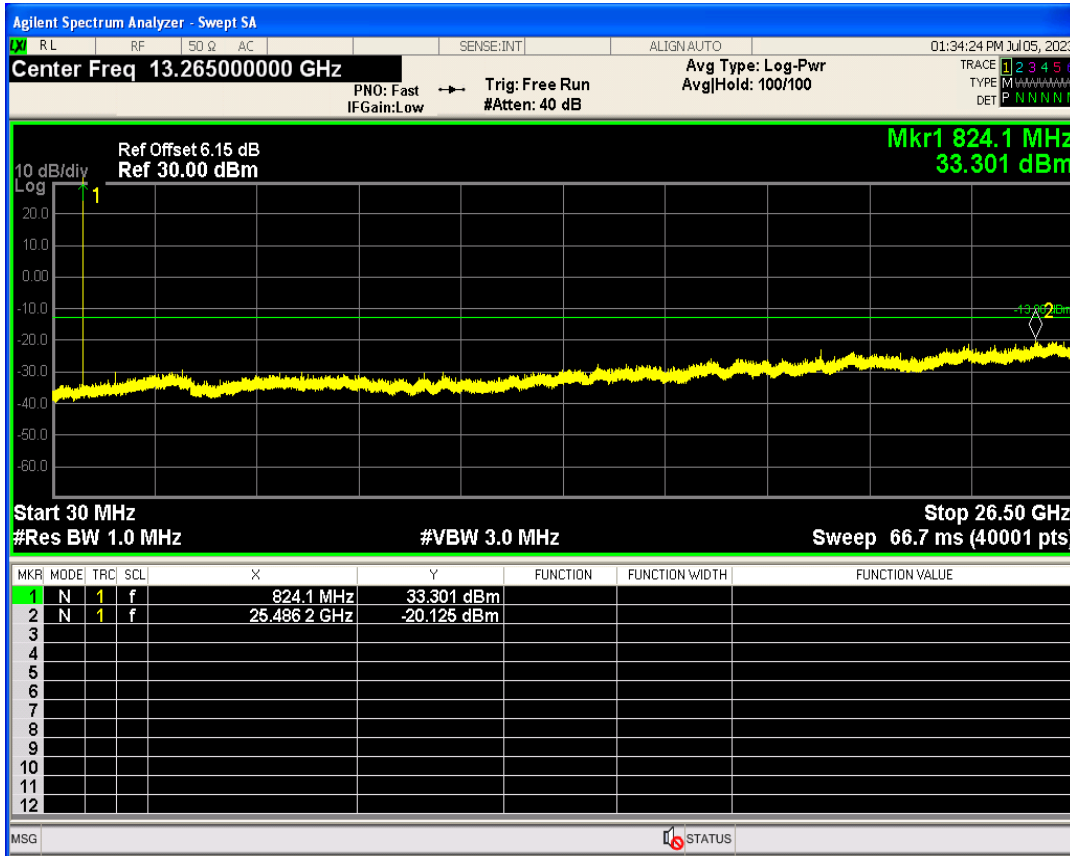

GPRS850 Channel=251

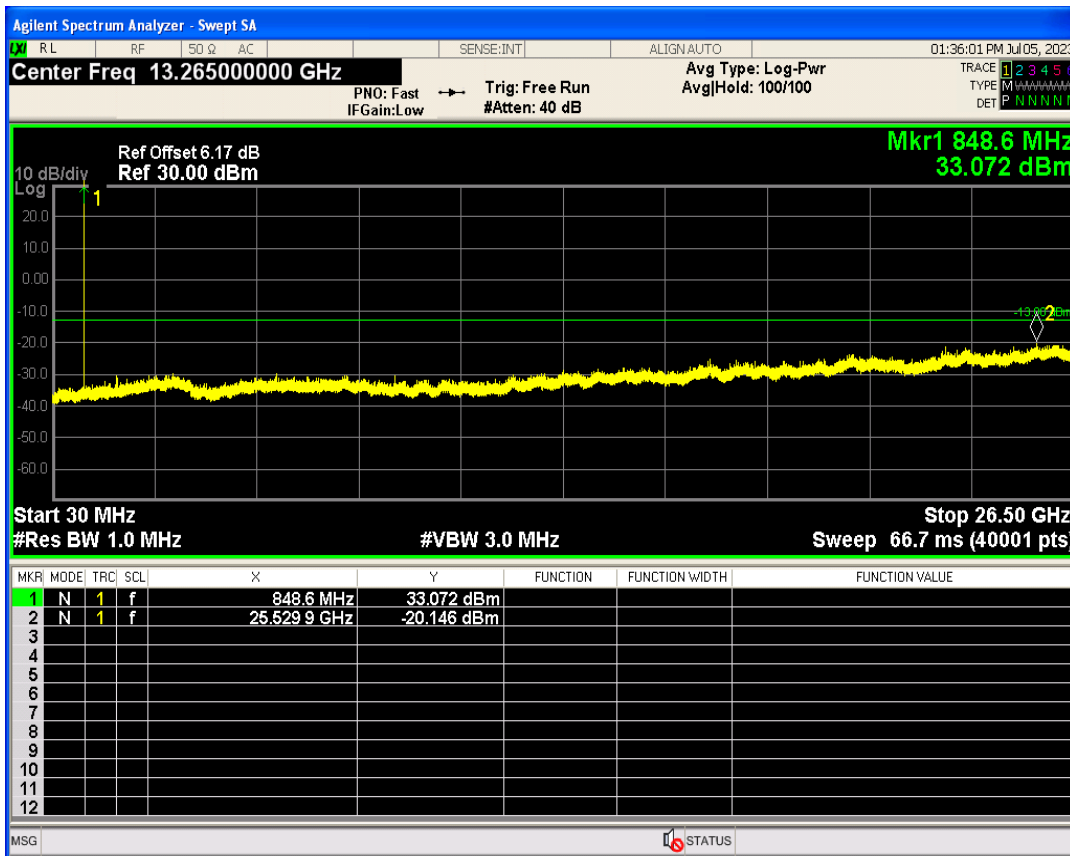

GPRS850 Channel=189

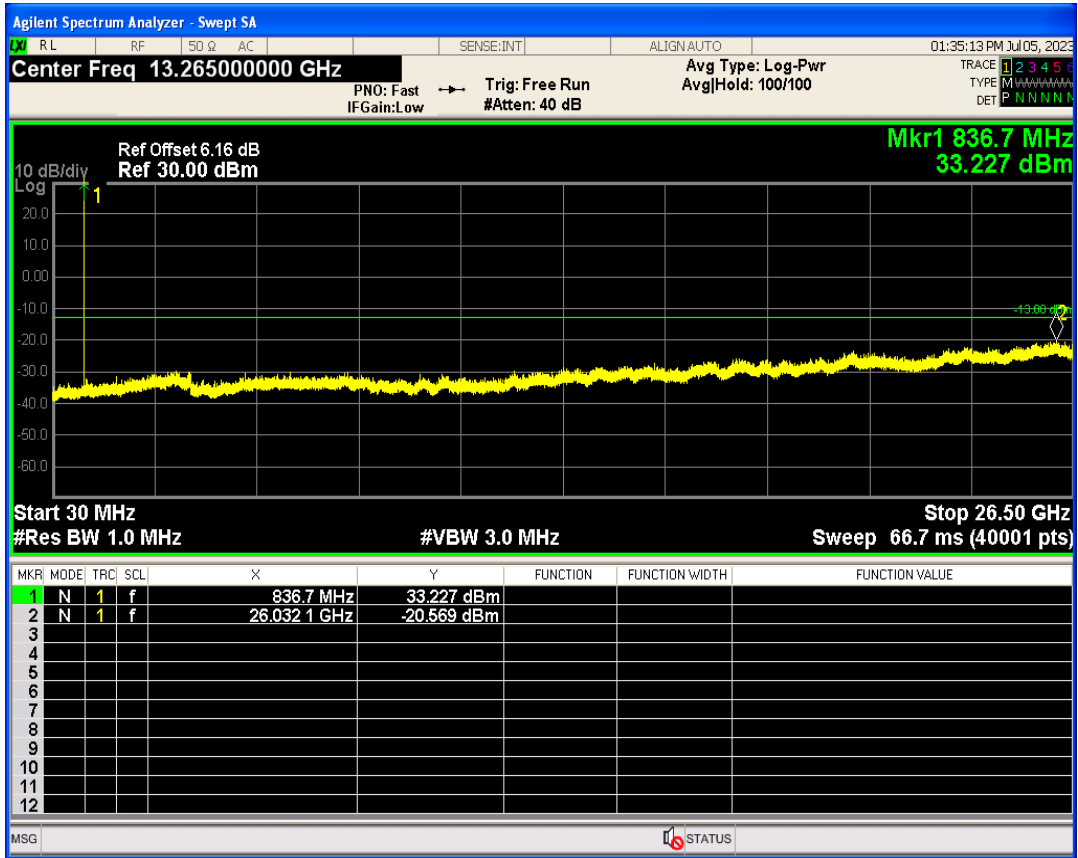


Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
GSM1900	512	1850.2	31.96	PASS
GSM1900	661	1880	31.98	PASS
GSM1900	810	1909.8	31.77	PASS
GSM850	128	824.2	33.67	PASS
GSM850	189	836.4	33.83	PASS
GSM850	251	848.8	33.70	PASS



Peak-to-Average Ratio


Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GSM1900	512	1850.2	2.65	13	PASS
GSM1900	661	1880	2.65	13	PASS
GSM1900	810	1909.8	2.66	13	PASS
GSM850	128	824.2	2.63	13	PASS
GSM850	189	836.4	2.63	13	PASS
GSM850	251	848.8	2.63	13	PASS

GSM1900 Channel=512

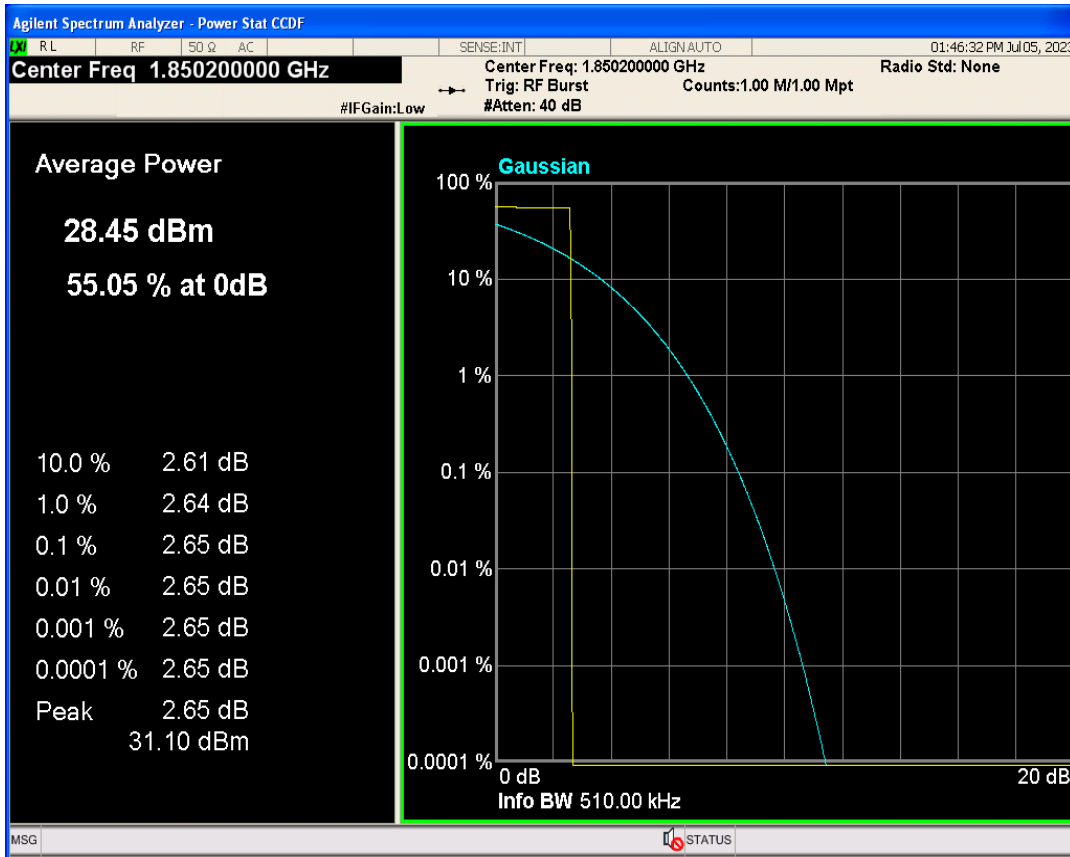


GSM1900 Channel=661

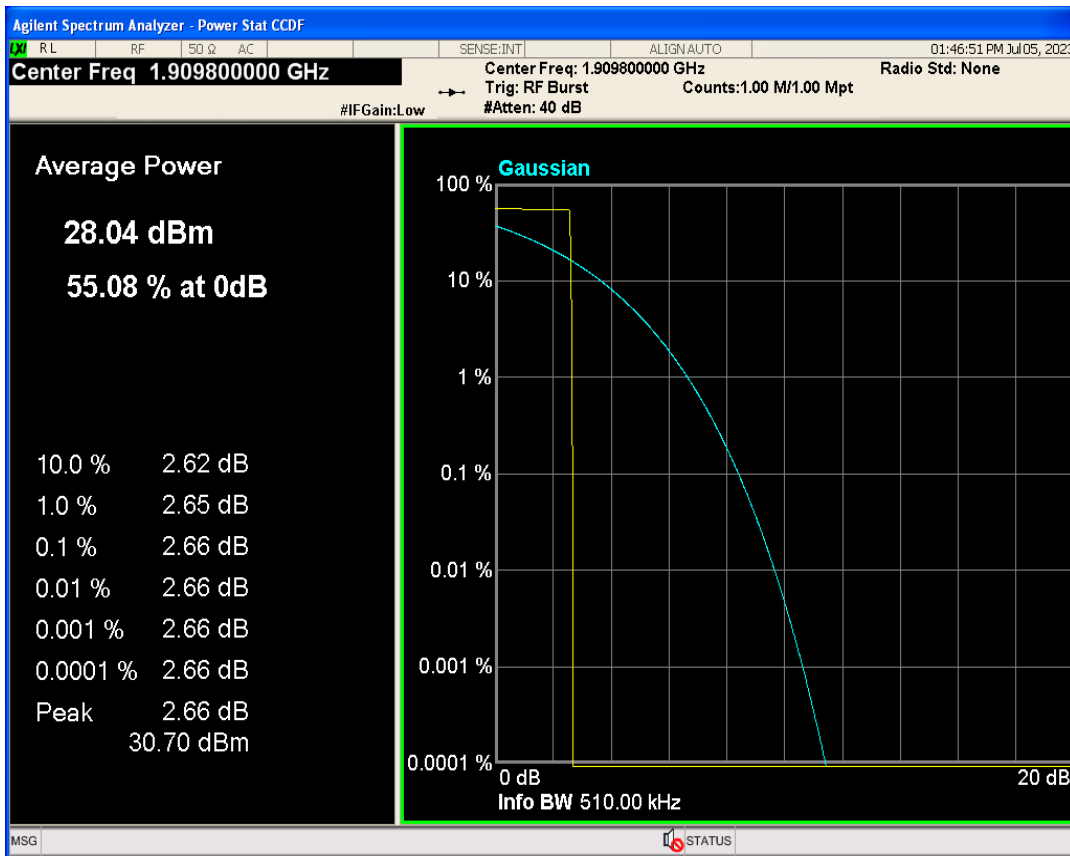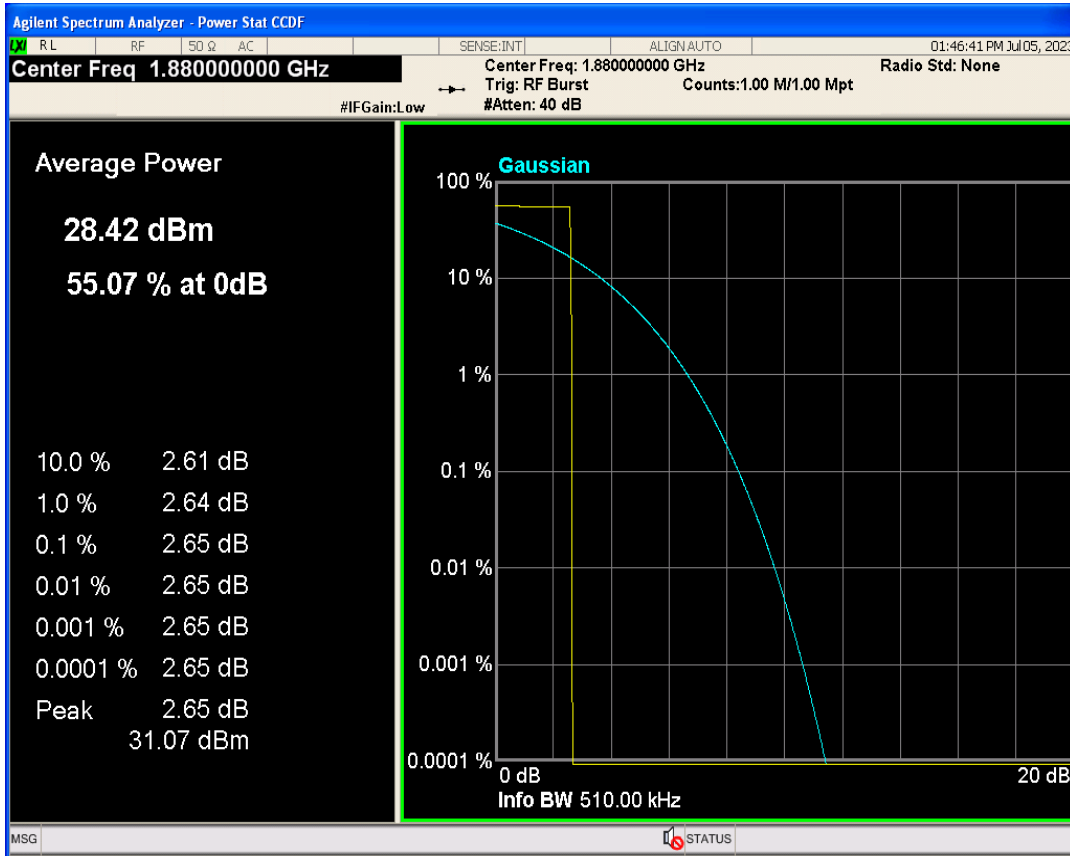


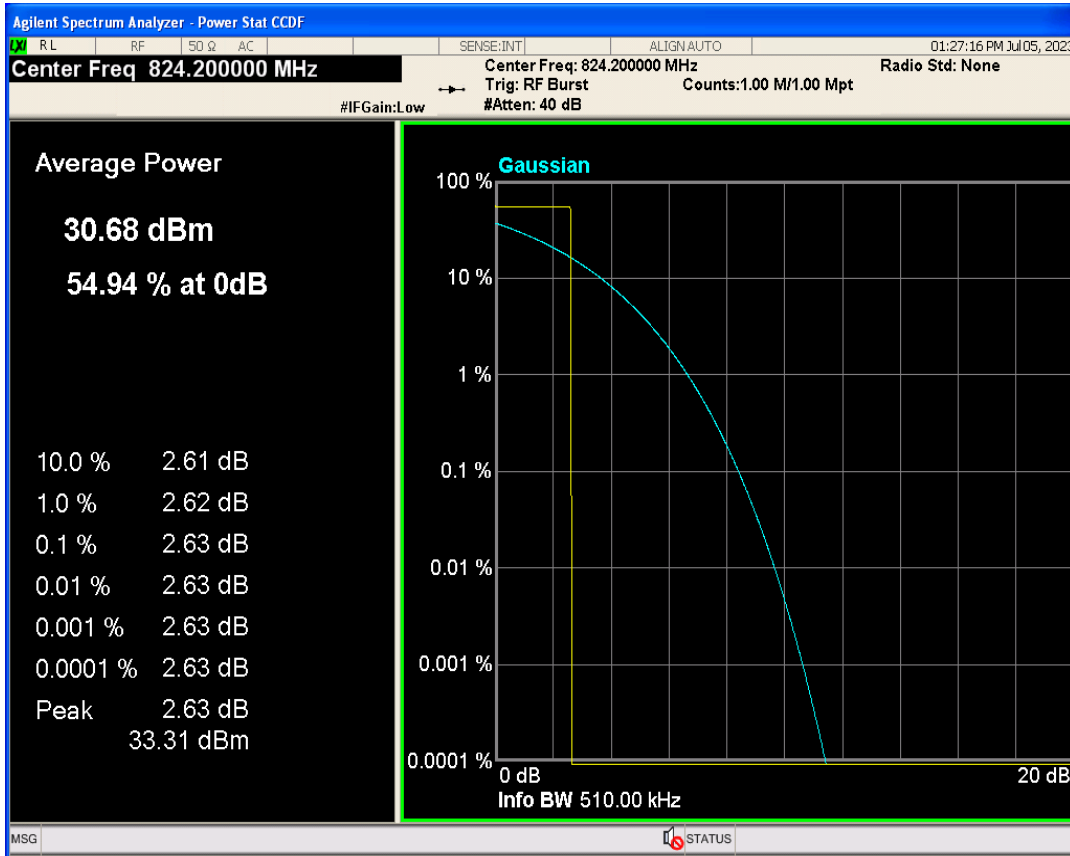

GSM850 Channel=189

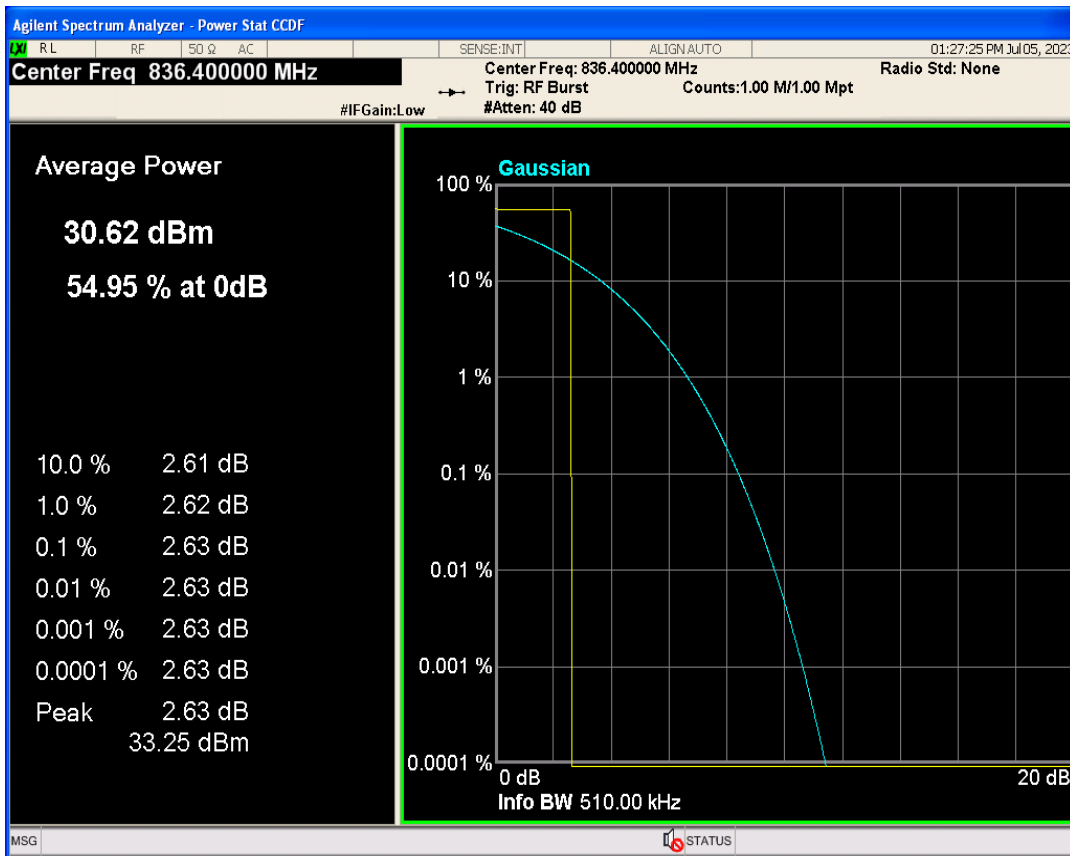


GSM850 Channel=251

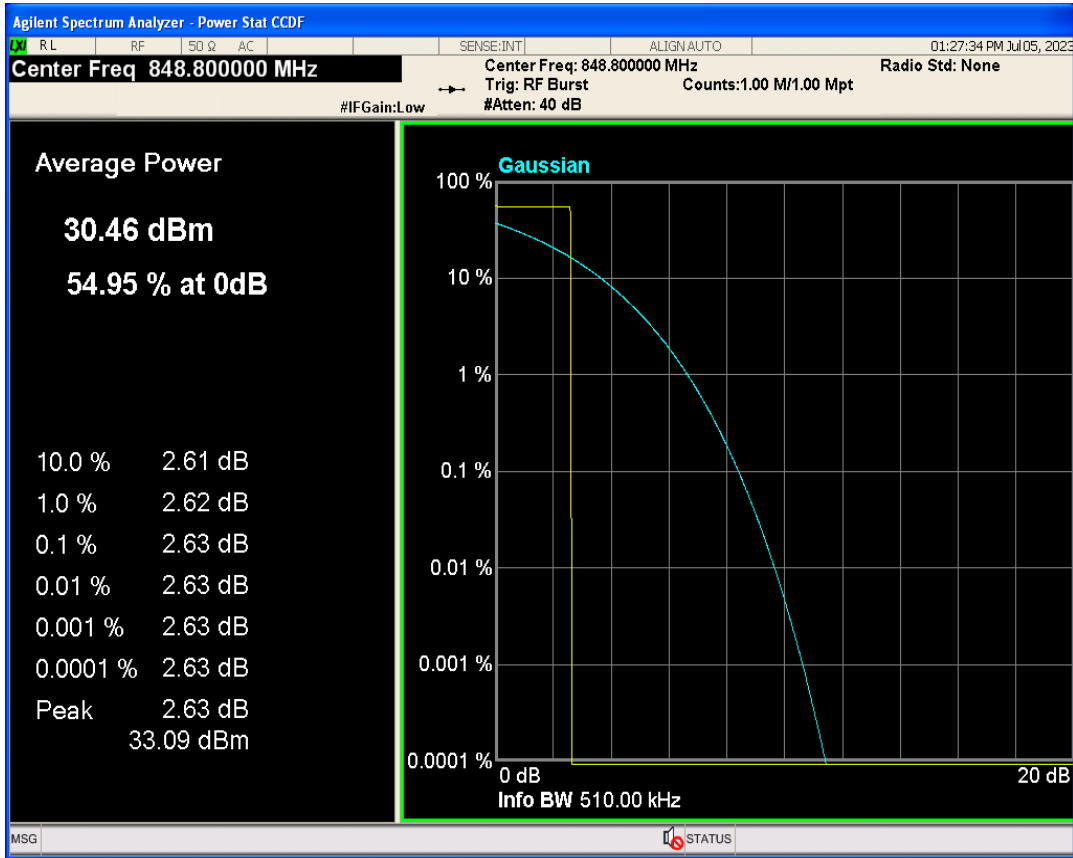


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GSM1900	512	1850.2	246.807	321.294	PASS
GSM1900	661	1880	244.754	314.401	PASS
GSM1900	810	1909.8	249.531	319.182	PASS
GSM850	128	824.2	246.215	321.163	PASS
GSM850	189	836.4	245.049	317.662	PASS
GSM850	251	848.8	244.077	315.019	PASS


GSM1900 Channel=512

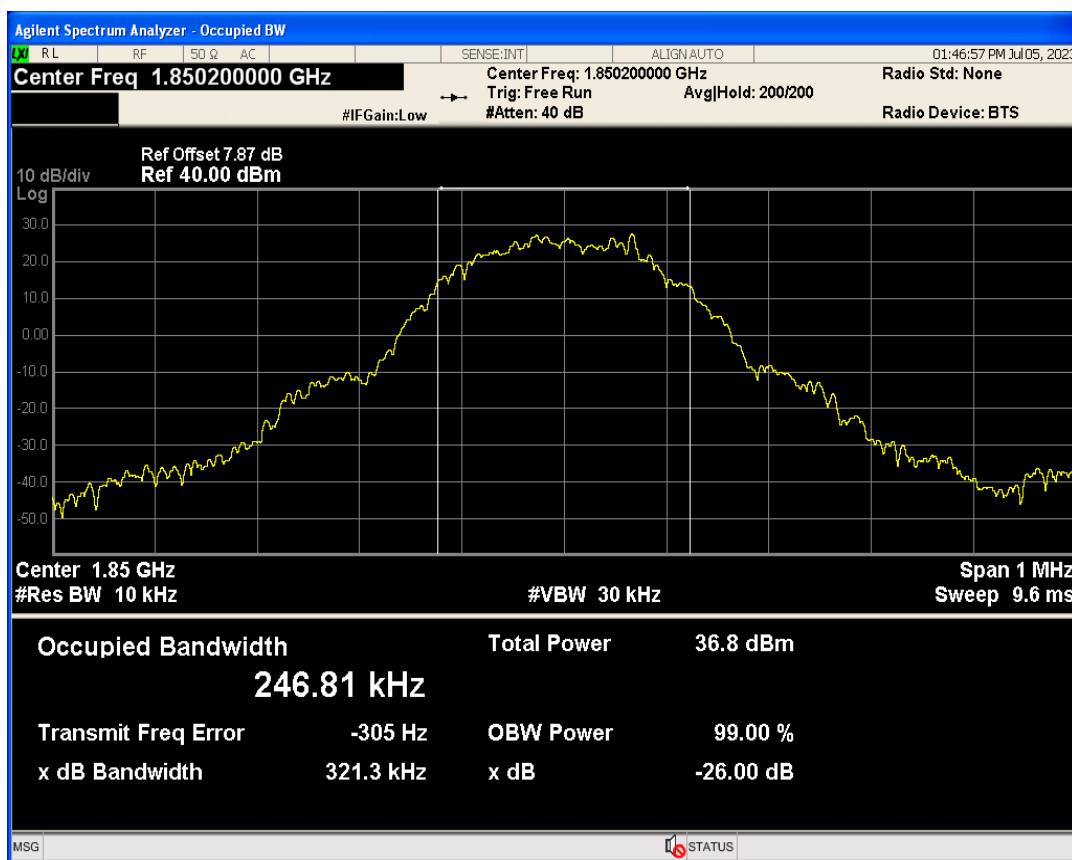


GSM1900 Channel=661

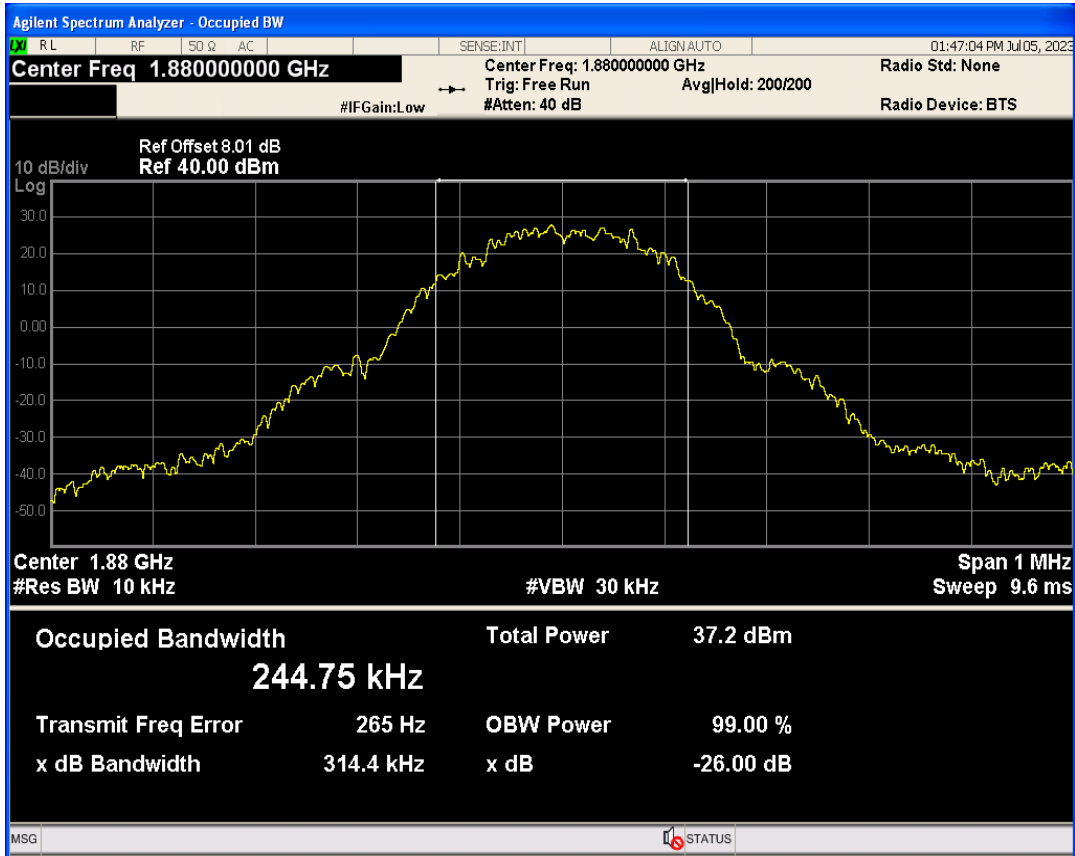


GSM1900 Channel=810

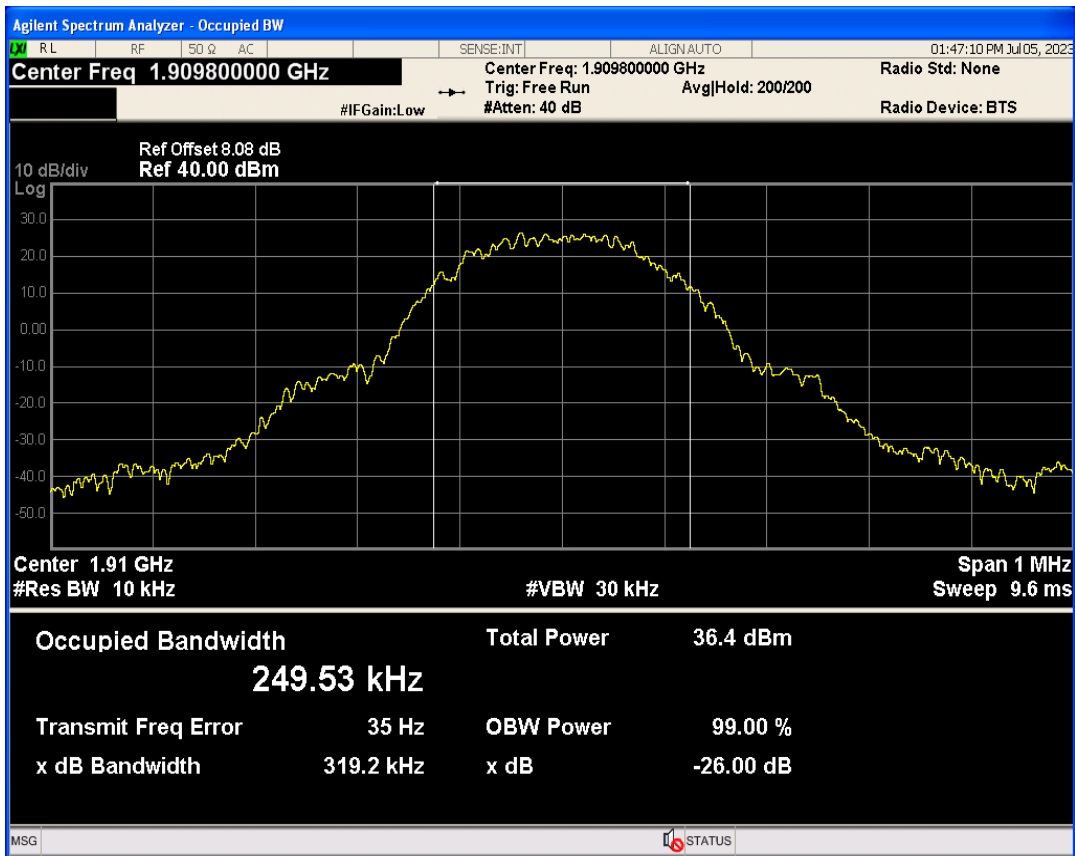


GSM850 Channel=128

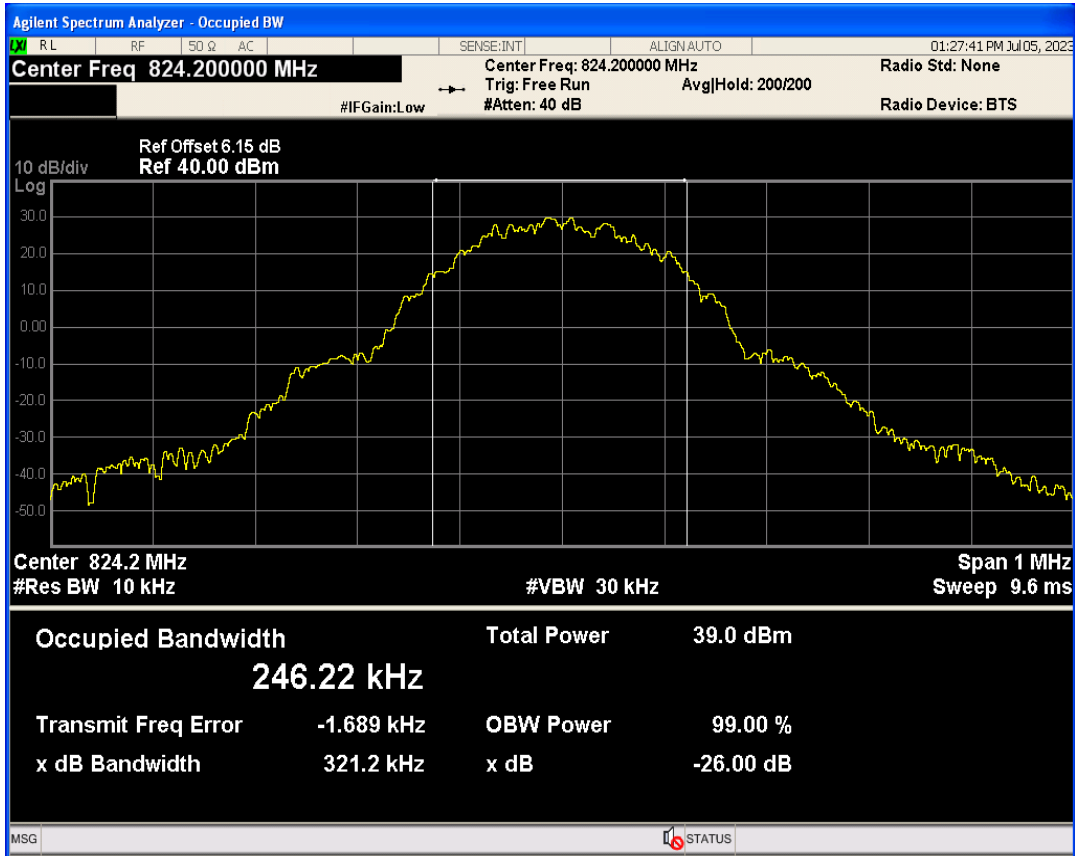

GSM850 Channel=189

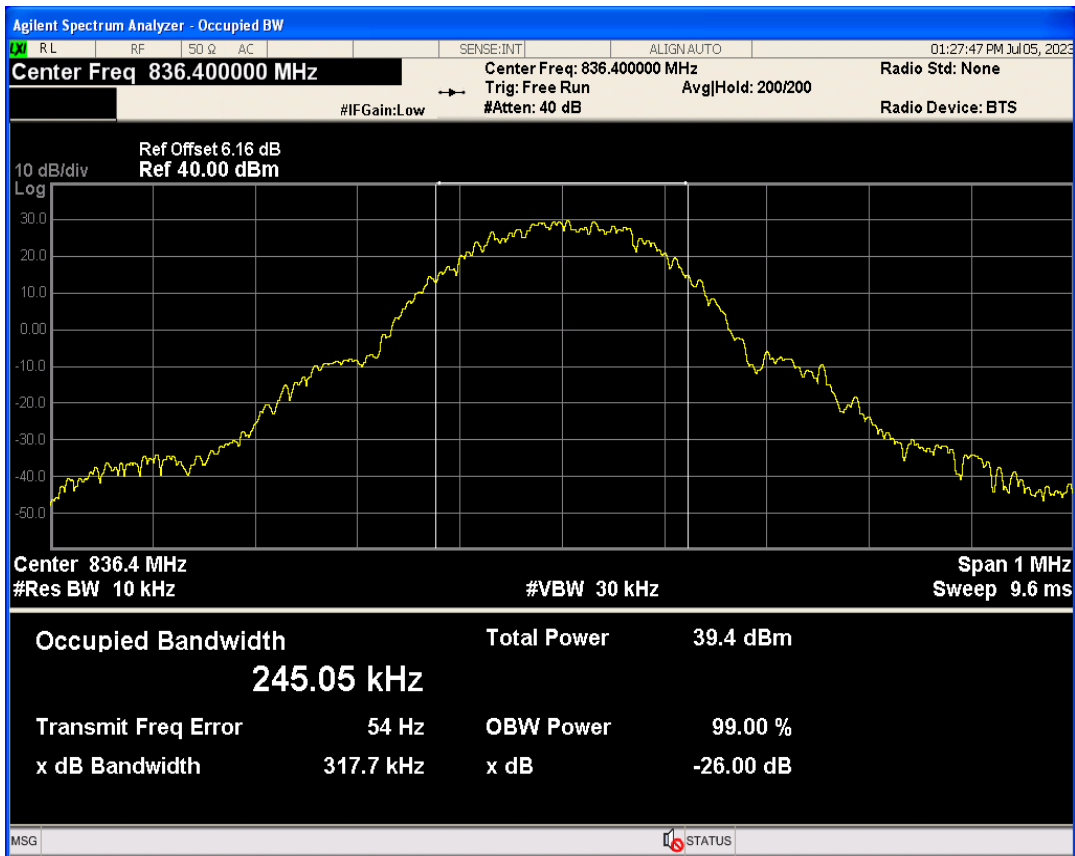


GSM850 Channel=251

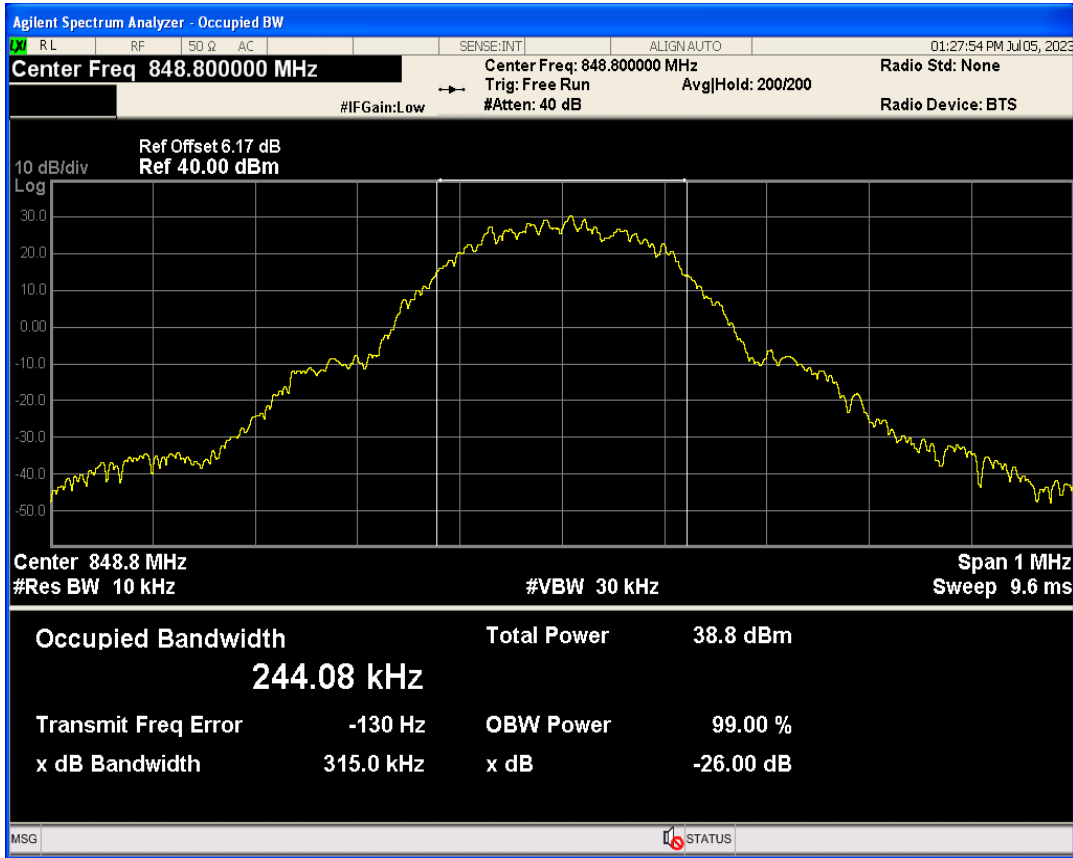


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	1849.99	-29.55	-13	PASS
GSM1900	810	1909.8	1910.02	-28.77	-13	PASS
GSM850	128	824.2	823.99	-25.29	-13	PASS
GSM850	251	848.8	849.02	-25.84	-13	PASS


GSM1900 Channel=512

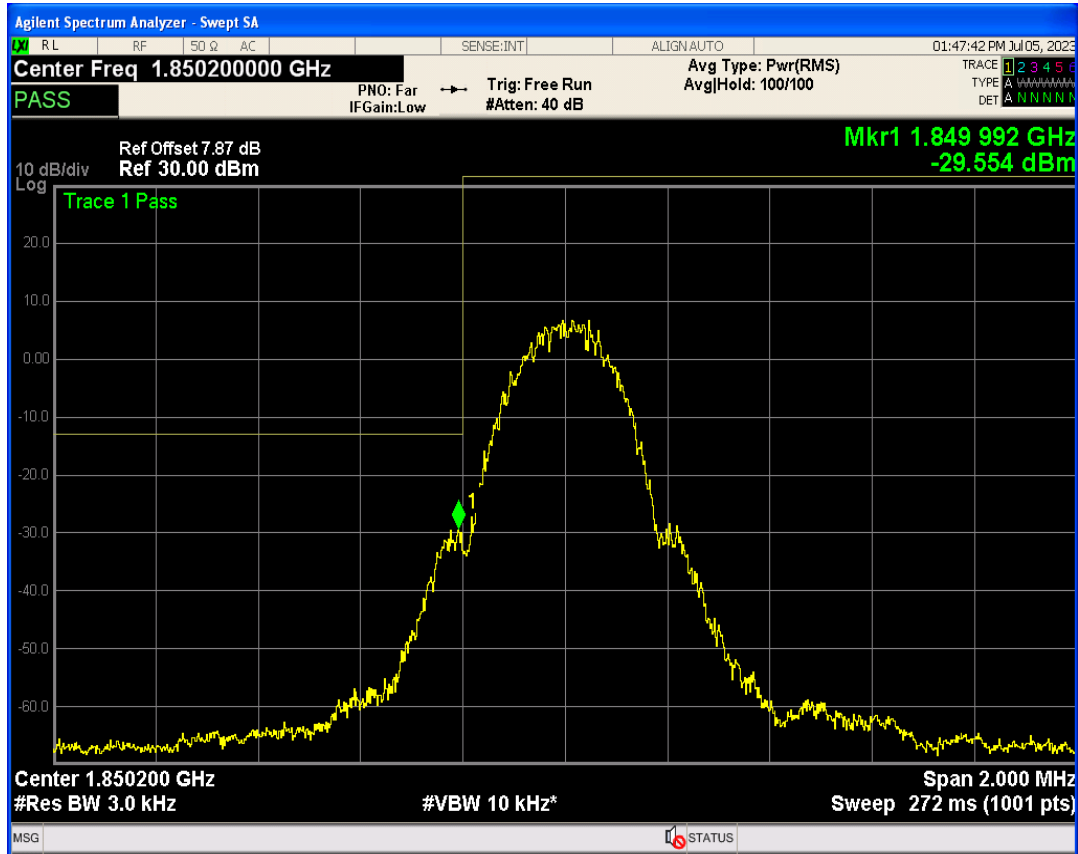


GSM1900 Channel=810

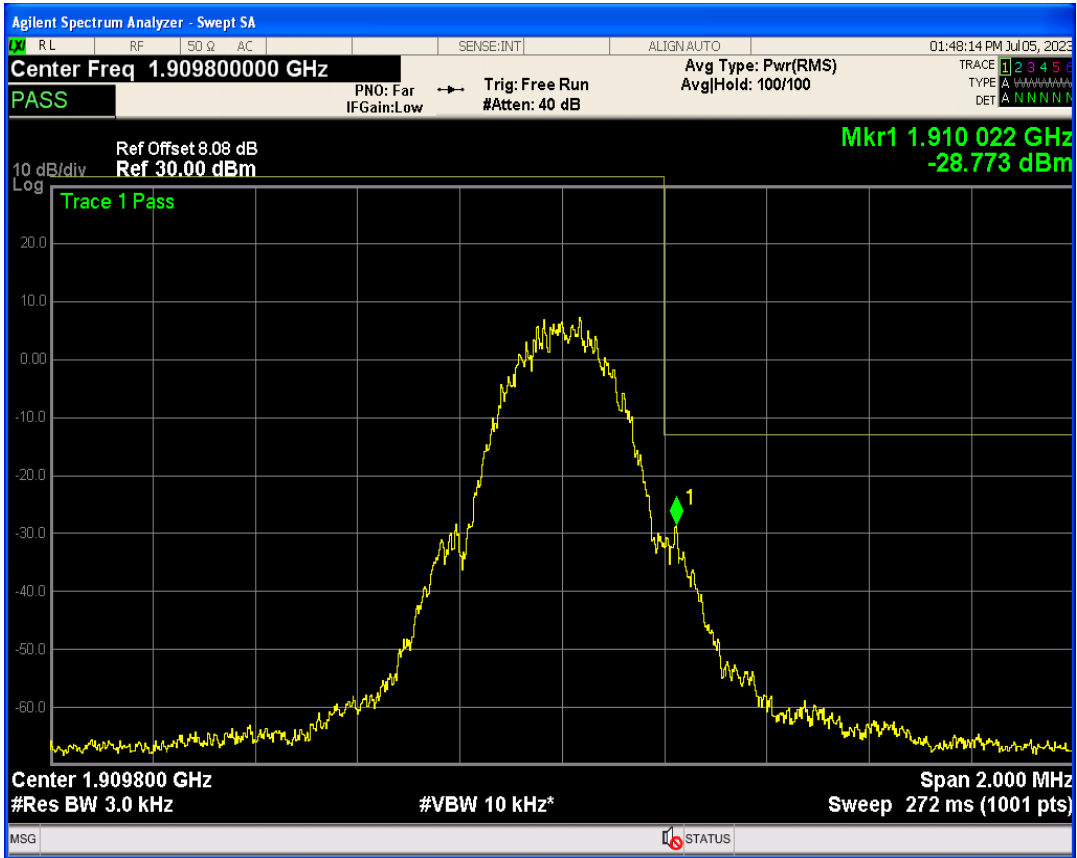

GSM850 Channel=128

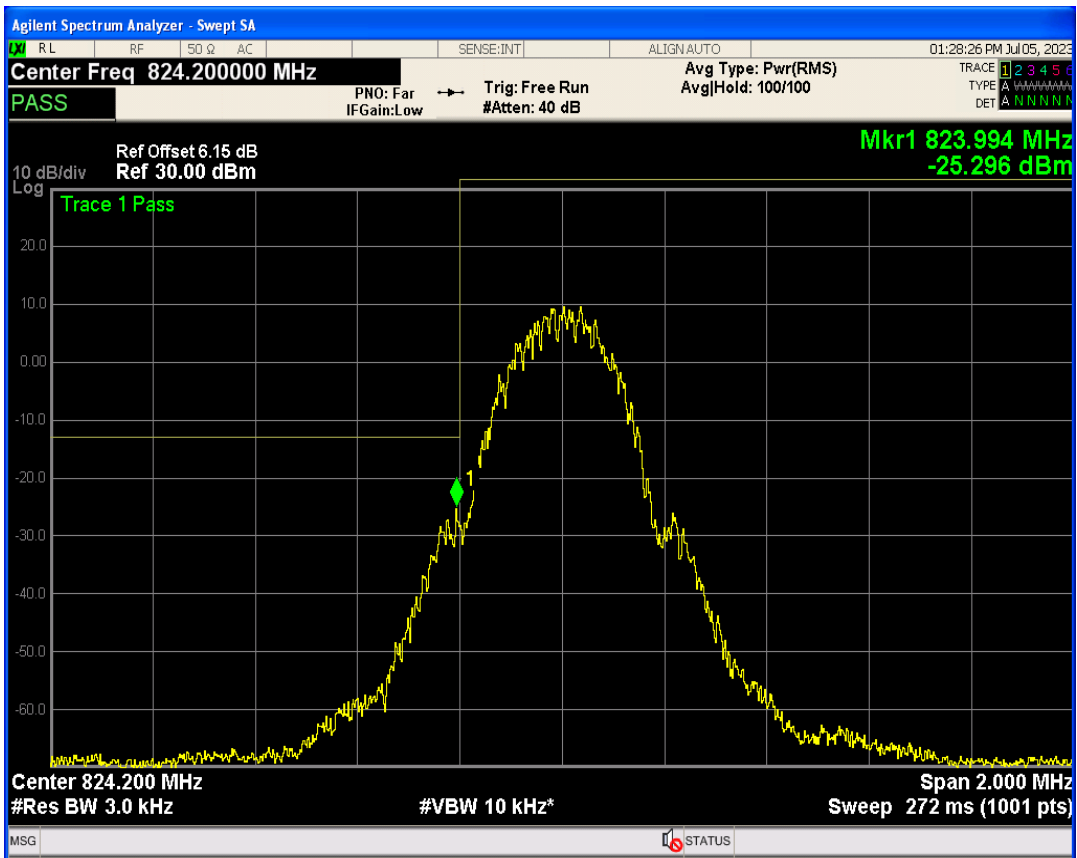


GSM850 Channel=251

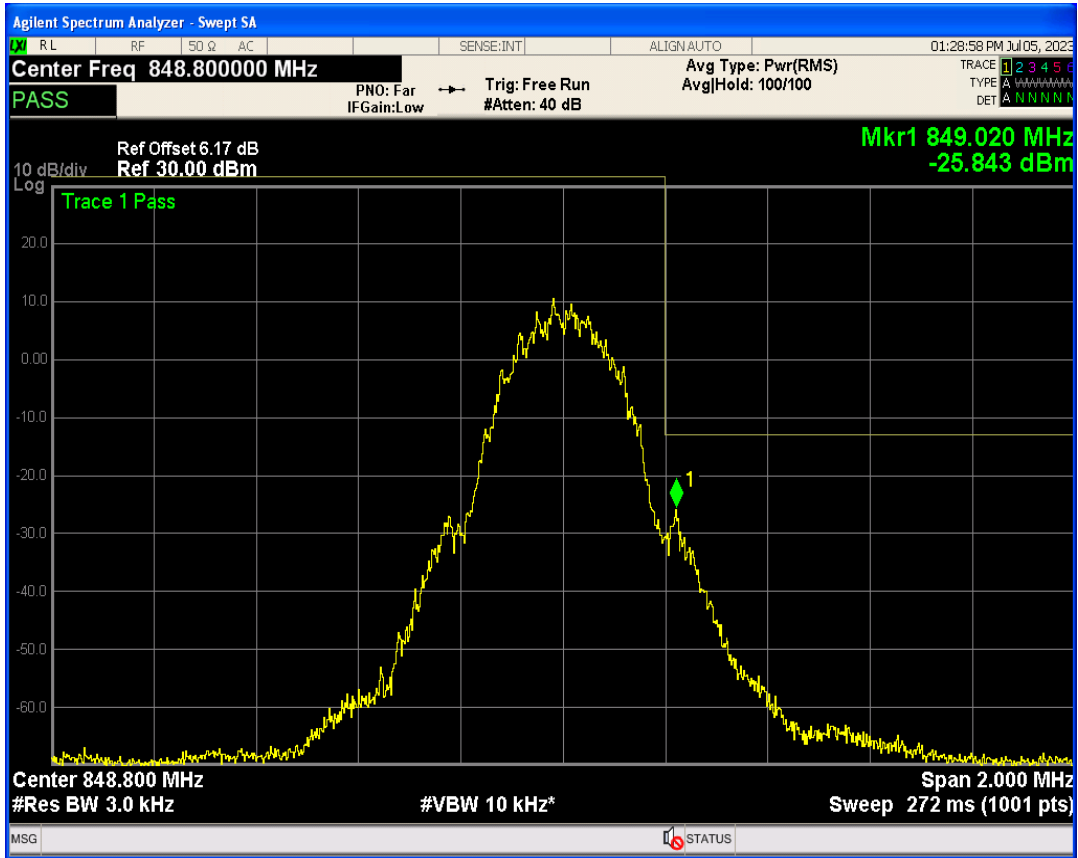


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	26007.00	-18.22	-13	PASS
GSM1900	661	1880	25896.48	-17.92	-13	PASS
GSM1900	810	1909.8	25969.28	-17.59	-13	PASS
GSM850	128	824.2	26012.95	-20.06	-13	PASS
GSM850	189	836.4	25971.92	-19.60	-13	PASS
GSM850	251	848.8	25954.72	-19.94	-13	PASS


GSM1900 Channel=512

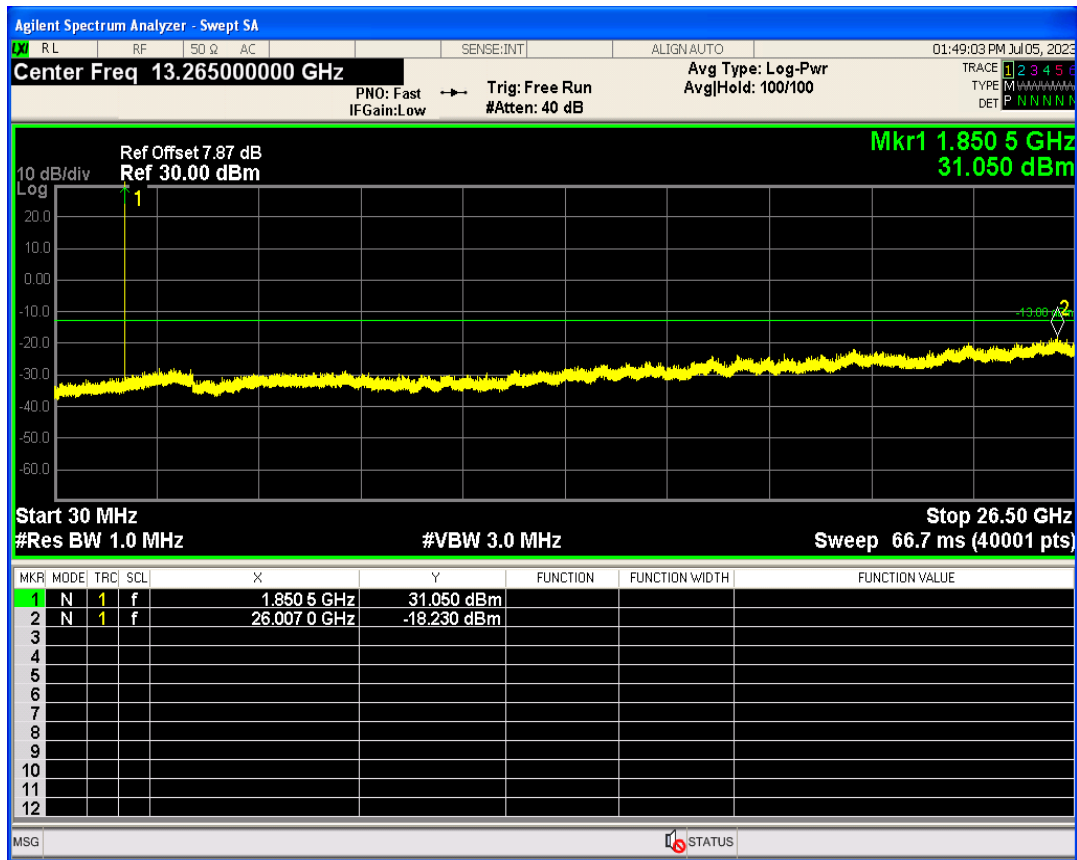


GSM1900 Channel=810

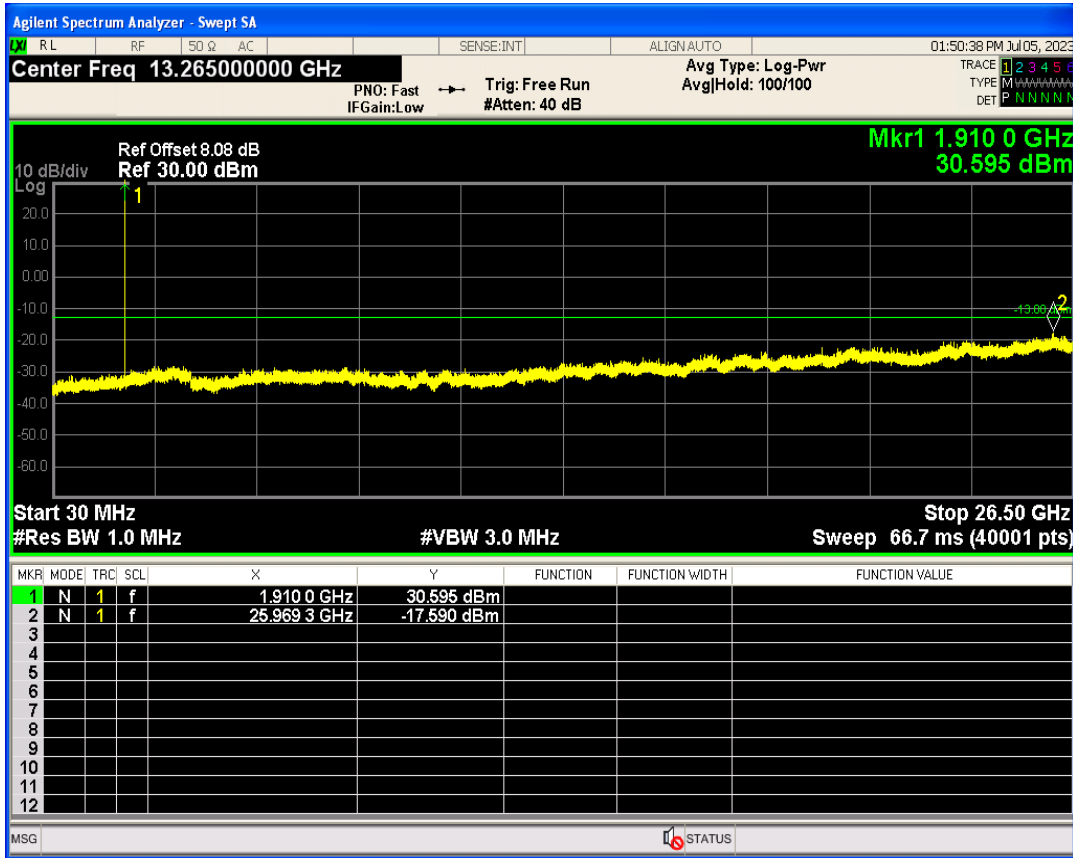


GSM1900 Channel=661

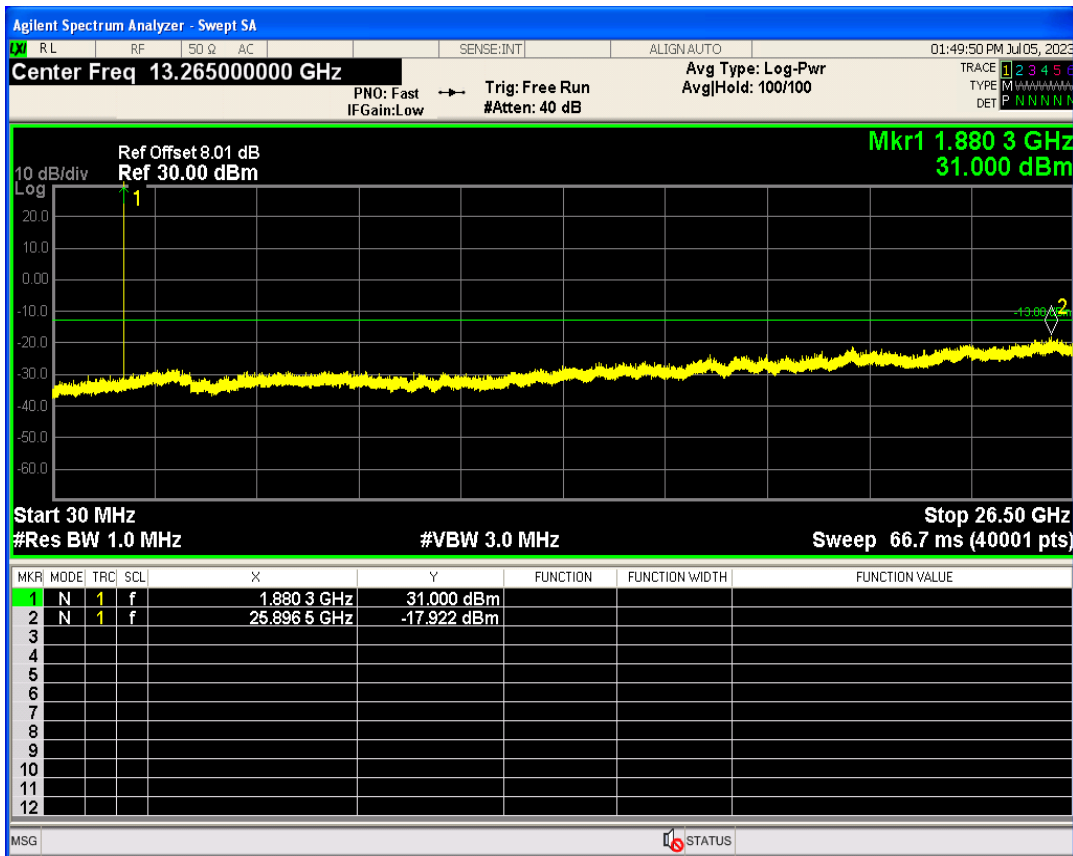

GSM850 Channel=128

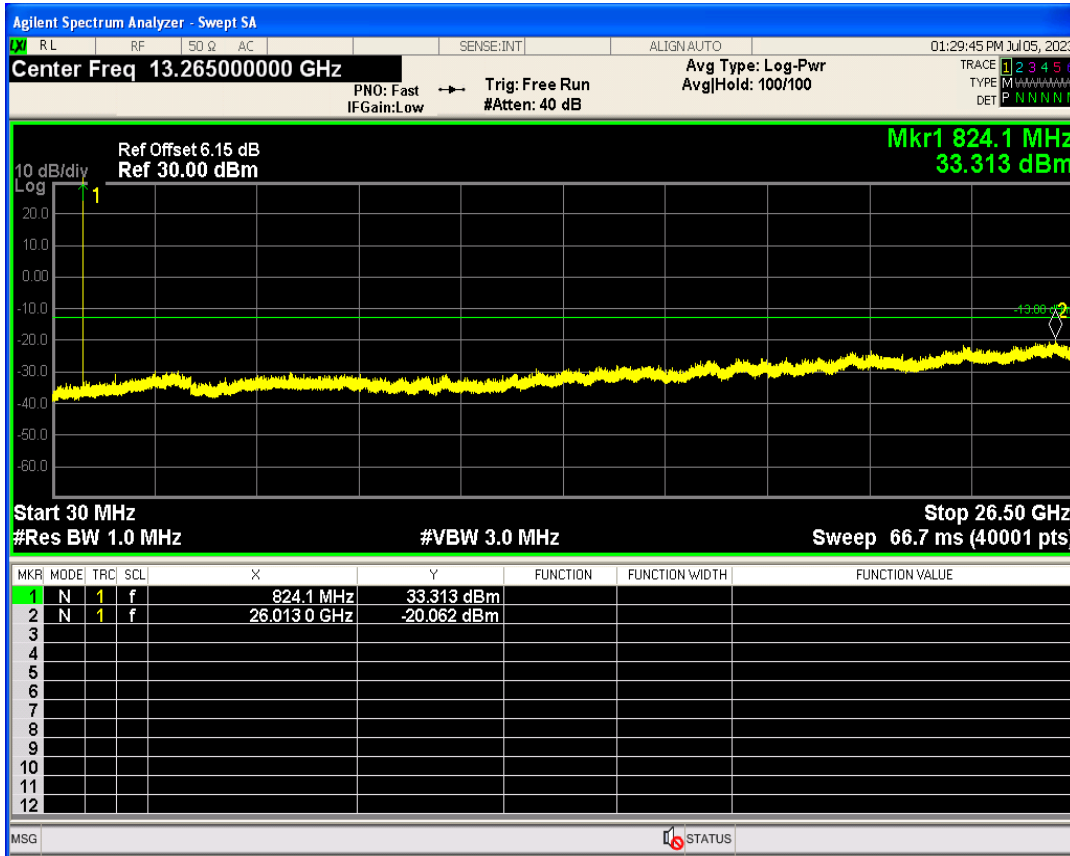

GSM850 Channel=189

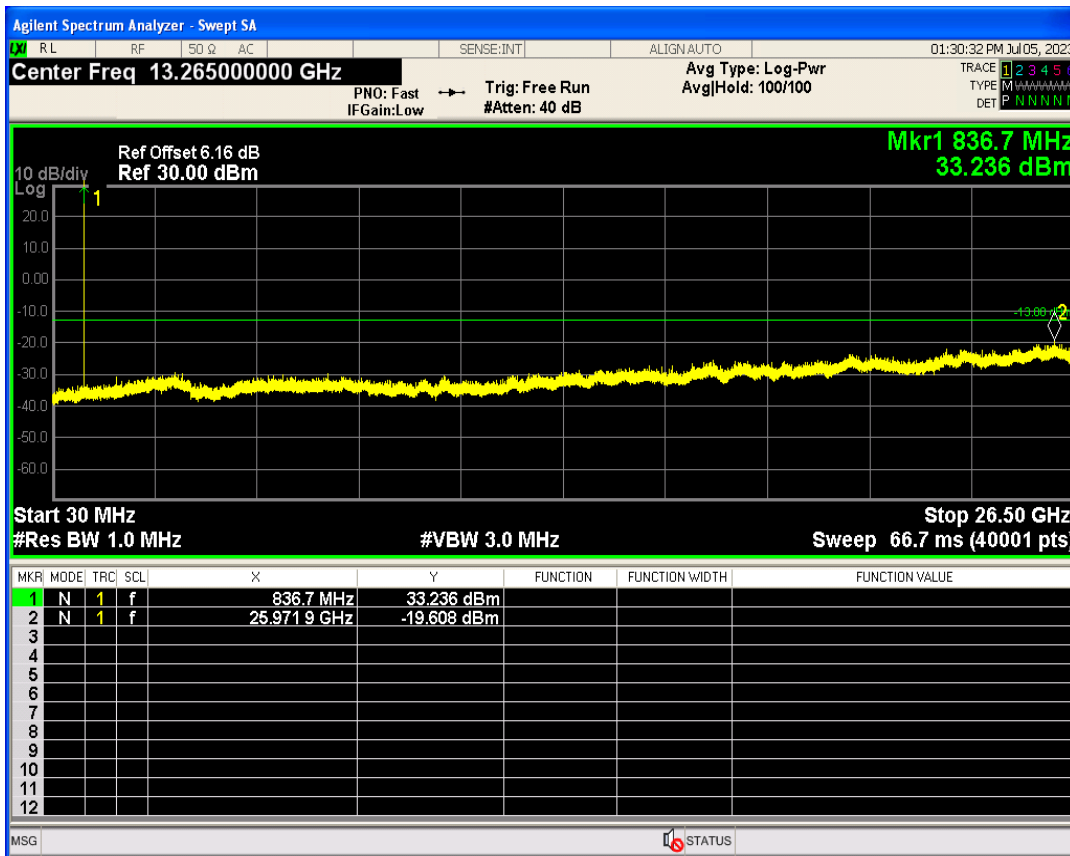

GSM850 Channel=251

