

01 Conducted output power



Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
EGPRS1900 1 Slot	512	1850.2	26.46	PASS
EGPRS1900 1 Slot	661	1880	26.69	PASS
EGPRS1900 1 Slot	810	1909.8	27.12	PASS
EGPRS1900 2 Slot	512	1850.2	25.56	PASS
EGPRS1900 2 Slot	661	1880	25.43	PASS
EGPRS1900 2 Slot	810	1909.8	25.91	PASS
EGPRS1900 3 Slot	512	1850.2	22.90	PASS
EGPRS1900 3 Slot	661	1880	23.38	PASS
EGPRS1900 3 Slot	810	1909.8	23.76	PASS
EGPRS1900 4 Slot	512	1850.2	21.85	PASS
EGPRS1900 4 Slot	661	1880	22.03	PASS
EGPRS1900 4 Slot	810	1909.8	21.57	PASS
EGPRS850 1 Slot	128	824.2	27.06	PASS
EGPRS850 1 Slot	189	836.4	27.04	PASS
EGPRS850 1 Slot	251	848.8	27.08	PASS
EGPRS850 2 Slot	128	824.2	25.89	PASS
EGPRS850 2 Slot	189	836.4	26.22	PASS
EGPRS850 2 Slot	251	848.8	25.62	PASS
EGPRS850 3 Slot	128	824.2	23.49	PASS
EGPRS850 3 Slot	189	836.4	23.88	PASS
EGPRS850 3 Slot	251	848.8	24.19	PASS
EGPRS850 4 Slot	128	824.2	22.11	PASS
EGPRS850 4 Slot	189	836.4	22.22	PASS
EGPRS850 4 Slot	251	848.8	21.80	PASS
GPRS1900 1 Slot	512	1850.2	30.39	PASS
GPRS1900 1 Slot	661	1880	30.13	PASS
GPRS1900 1 Slot	810	1909.8	29.77	PASS
GPRS1900 2 Slot	512	1850.2	29.65	PASS
GPRS1900 2 Slot	661	1880	29.43	PASS
GPRS1900 2 Slot	810	1909.8	29.05	PASS
GPRS1900 3 Slot	512	1850.2	27.86	PASS
GPRS1900 3 Slot	661	1880	27.68	PASS
GPRS1900 3 Slot	810	1909.8	27.39	PASS
GPRS1900 4 Slot	512	1850.2	26.68	PASS
GPRS1900 4 Slot	661	1880	26.56	PASS
GPRS1900 4 Slot	810	1909.8	26.33	PASS
GPRS850 1 Slot	128	824.2	33.16	PASS
GPRS850 1 Slot	189	836.4	33.05	PASS
GPRS850 1 Slot	251	848.8	32.91	PASS
GPRS850 2 Slot	128	824.2	32.40	PASS
GPRS850 2 Slot	189	836.4	32.29	PASS


GPRS850 2 Slot	251	848.8	32.15	PASS
GPRS850 3 Slot	128	824.2	30.61	PASS
GPRS850 3 Slot	189	836.4	30.50	PASS
GPRS850 3 Slot	251	848.8	30.36	PASS
GPRS850 4 Slot	128	824.2	29.43	PASS
GPRS850 4 Slot	189	836.4	29.37	PASS
GPRS850 4 Slot	251	848.8	29.22	PASS
GSM1900	512	1850.2	30.44	PASS
GSM1900	661	1880	30.16	PASS
GSM1900	810	1909.8	29.79	PASS
GSM850	128	824.2	33.22	PASS
GSM850	189	836.4	33.12	PASS
GSM850	251	848.8	32.97	PASS

15 Peak-to-Average Ratio


Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
EGPRS1900	512	1850.2	6.20	13	PASS
EGPRS1900	661	1880	6.06	13	PASS
EGPRS1900	810	1909.8	5.43	13	PASS
EGPRS850	128	824.2	8.35	13	PASS
EGPRS850	189	836.4	8.02	13	PASS
EGPRS850	251	848.8	8.13	13	PASS

EGPRS1900 Channel=512

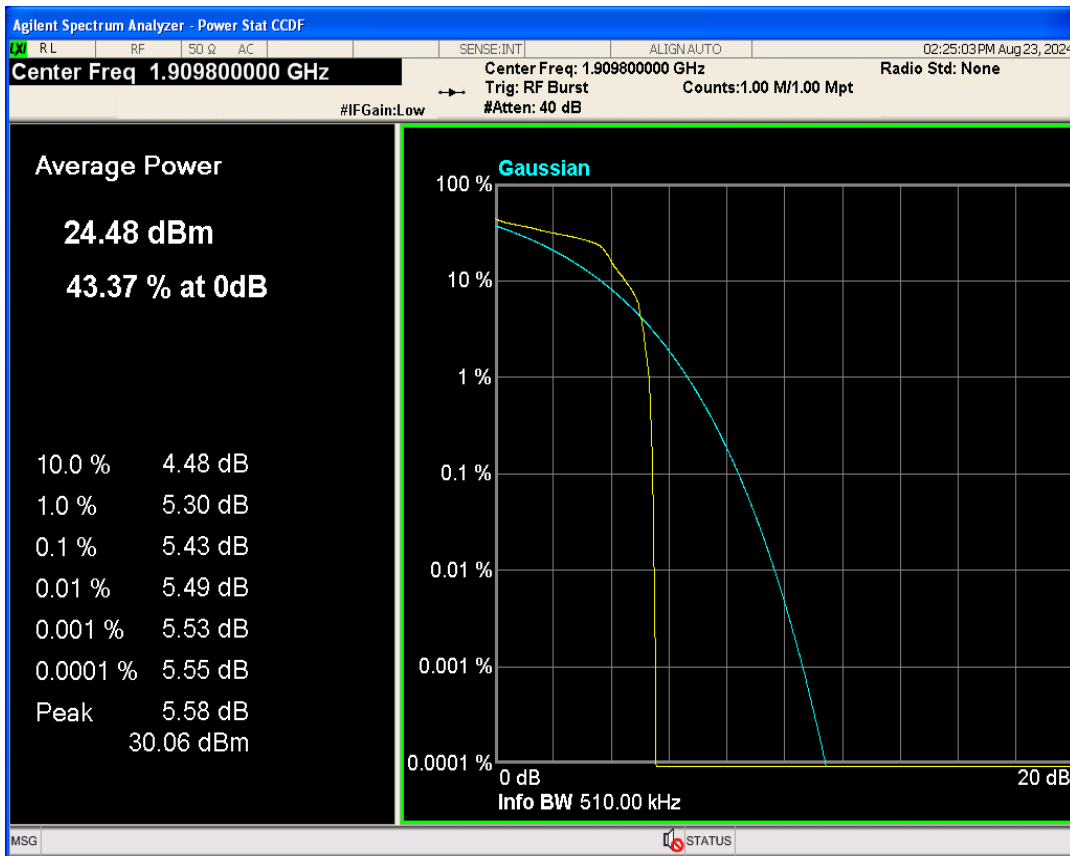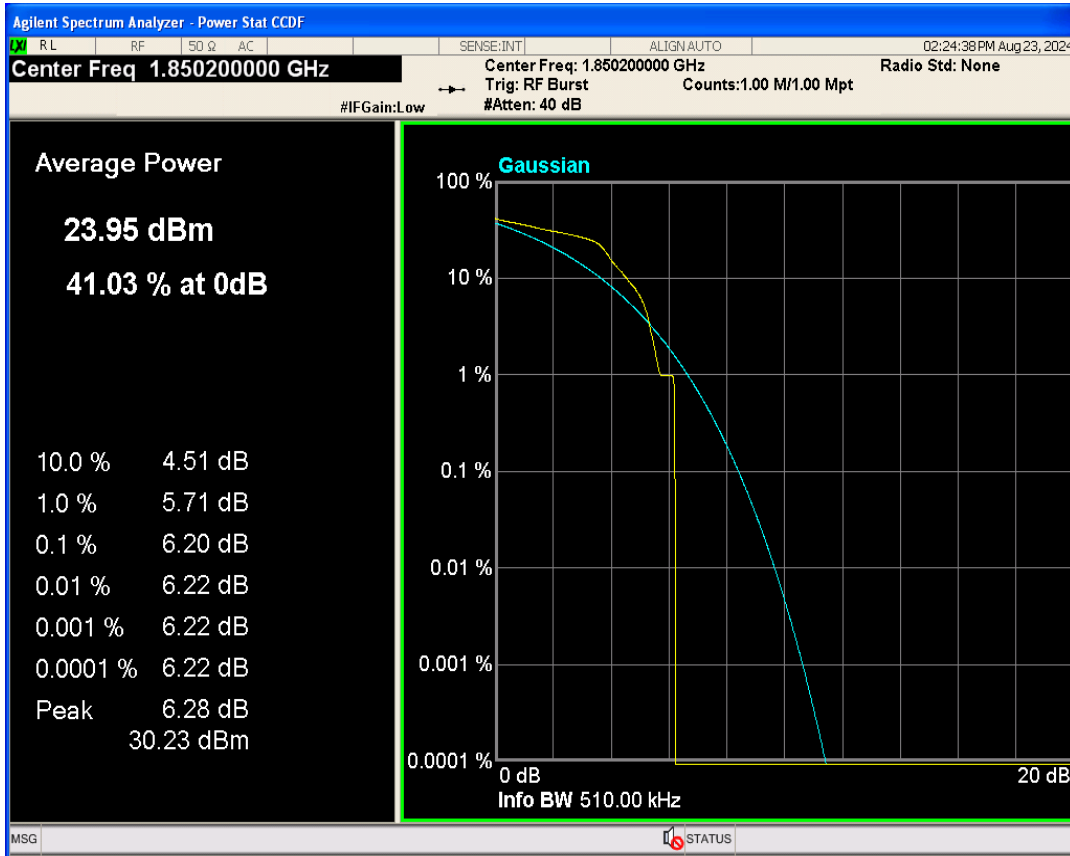


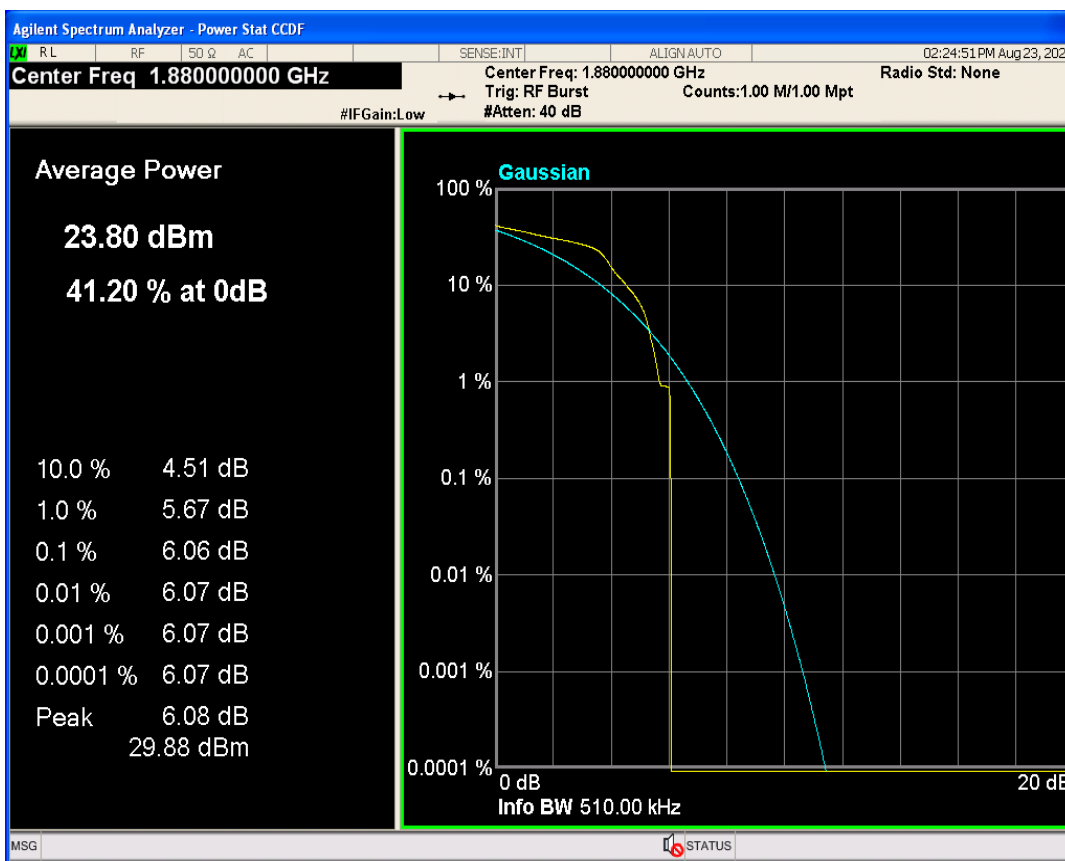


EGPRS850 Channel=128

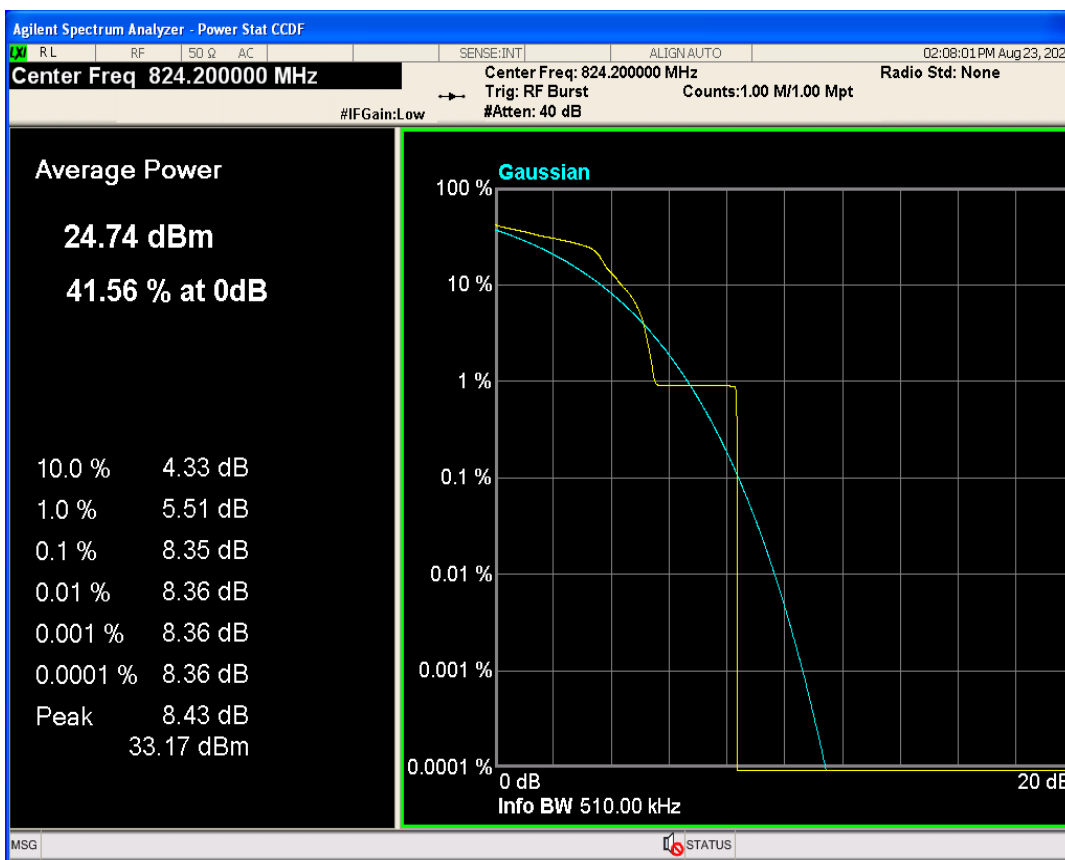

EGPRS850 Channel=189

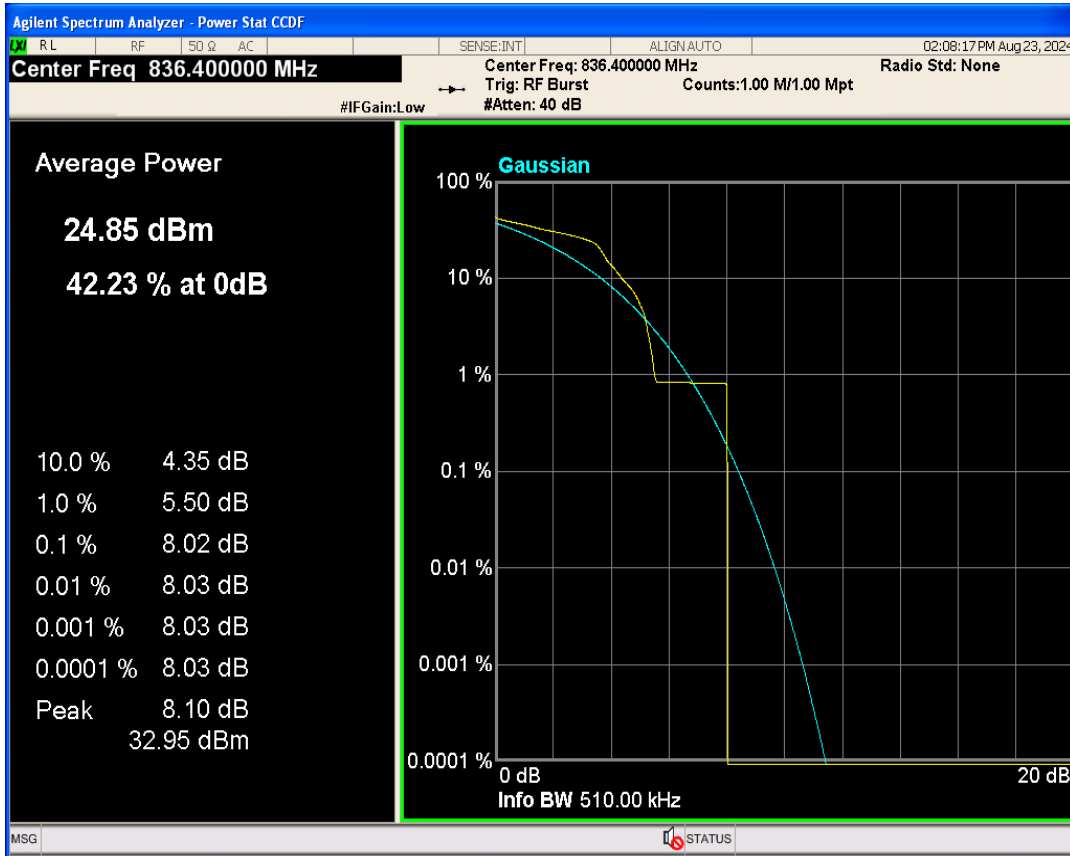


EGPRS850 Channel=251

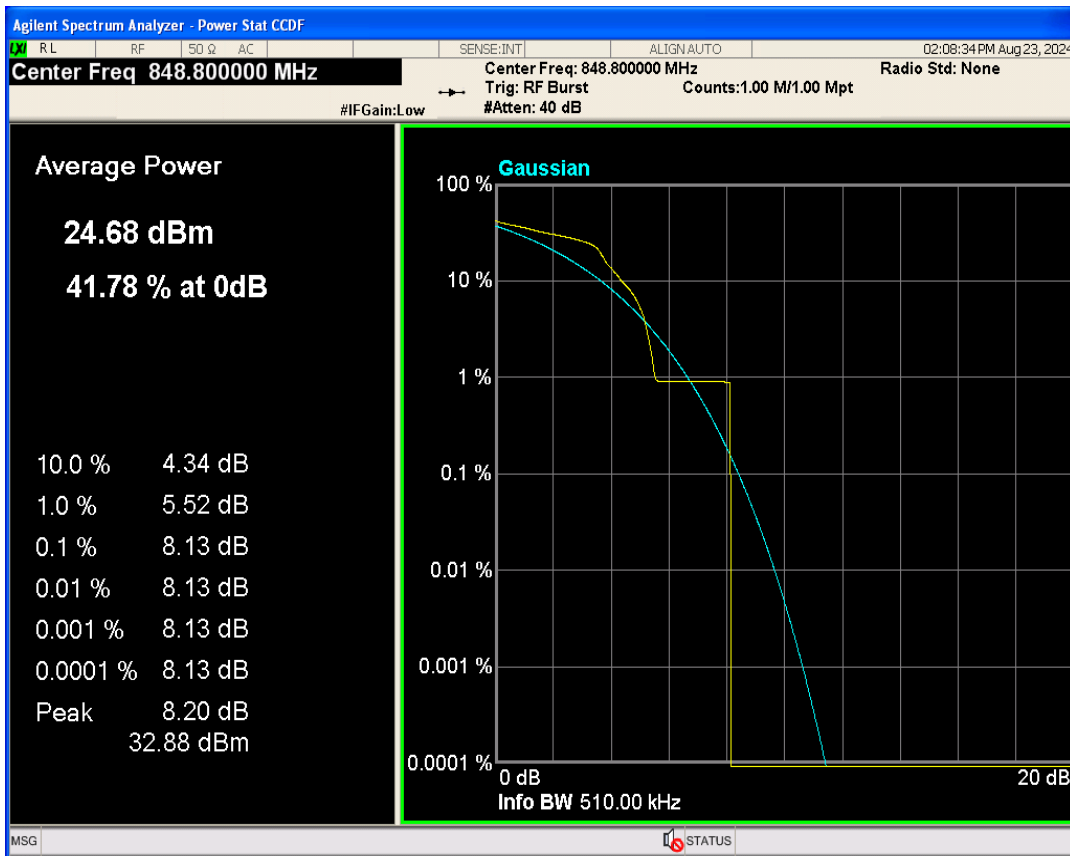


16 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
EGPRS1900	512	1850.2	238.630	308.900	PASS
EGPRS1900	661	1880	248.433	308.961	PASS
EGPRS1900	810	1909.8	250.407	319.114	PASS
EGPRS850	128	824.2	249.041	312.964	PASS
EGPRS850	189	836.4	246.257	308.207	PASS
EGPRS850	251	848.8	250.136	321.938	PASS


EGPRS1900 Channel=512

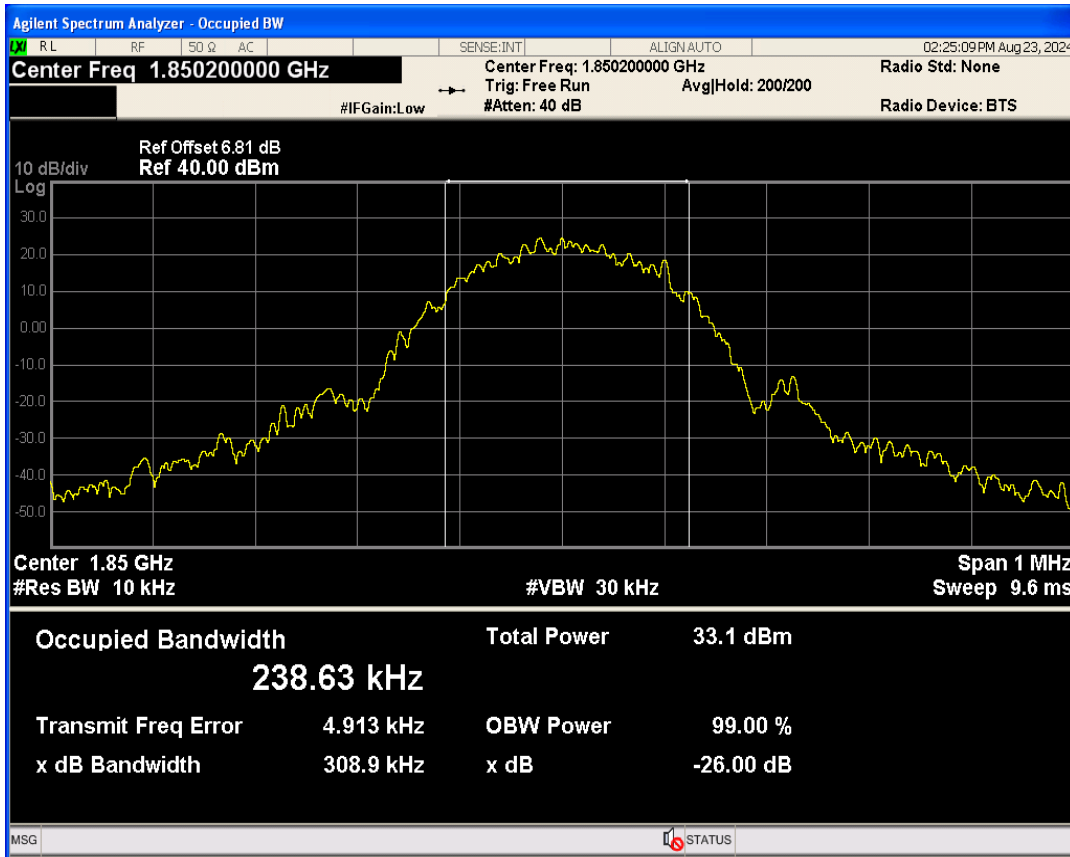


EGPRS1900 Channel=661

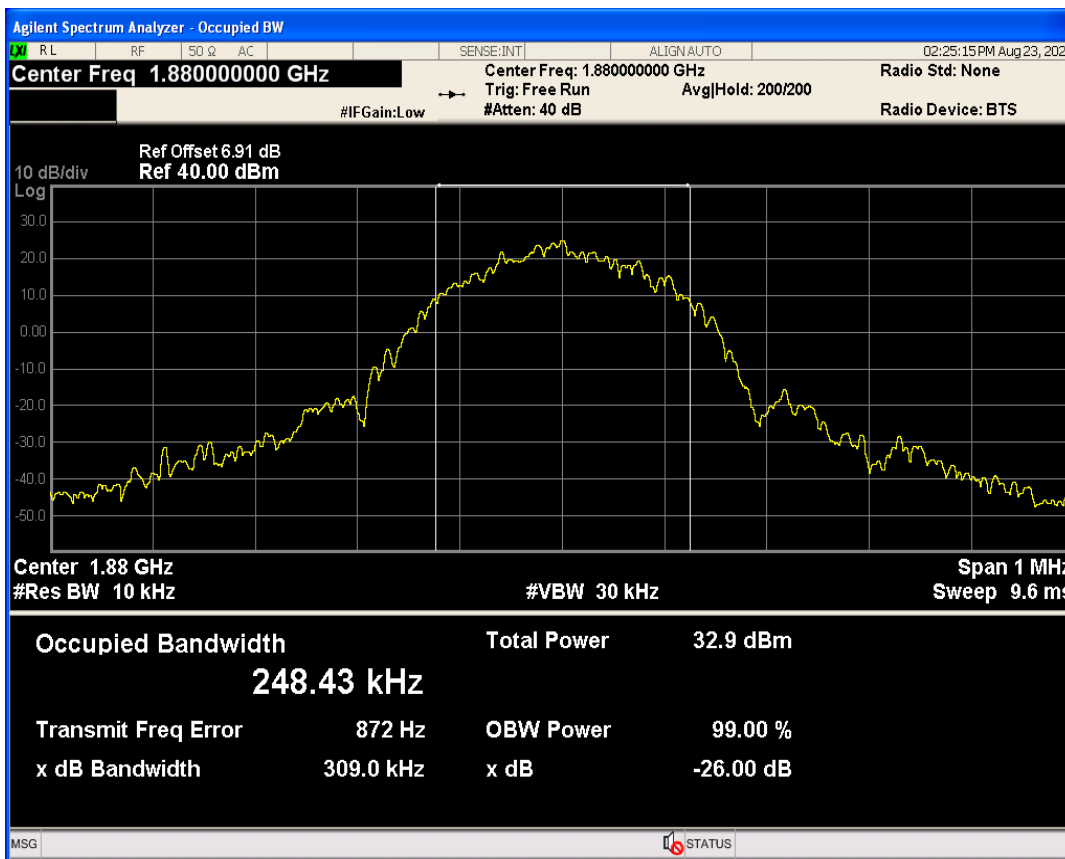


EGPRS1900 Channel=810

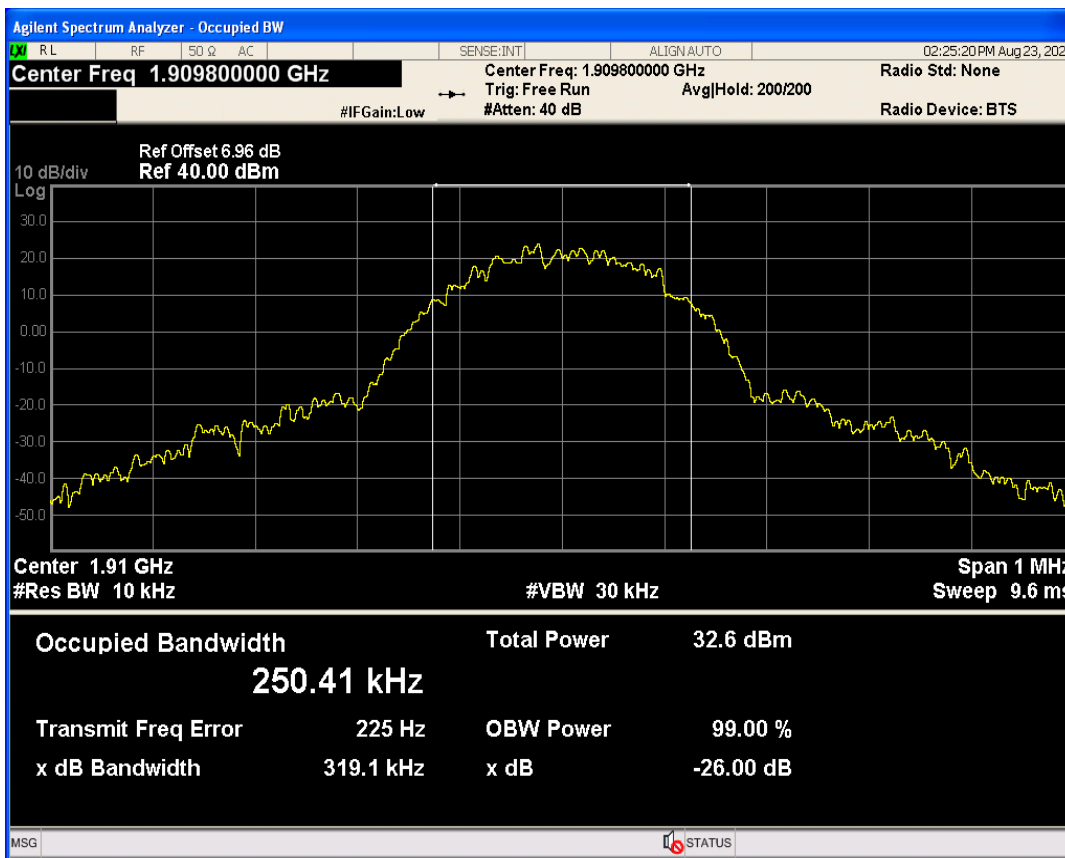


EGPRS850 Channel=128

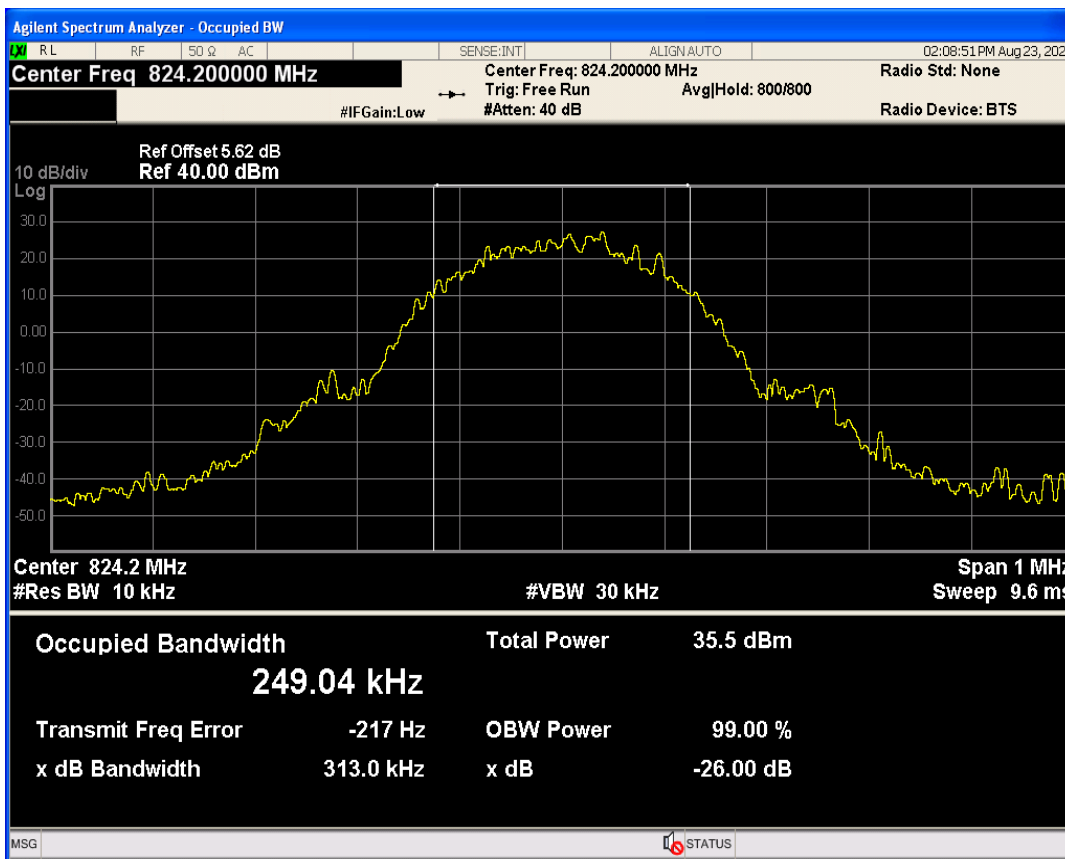

EGPRS850 Channel=189

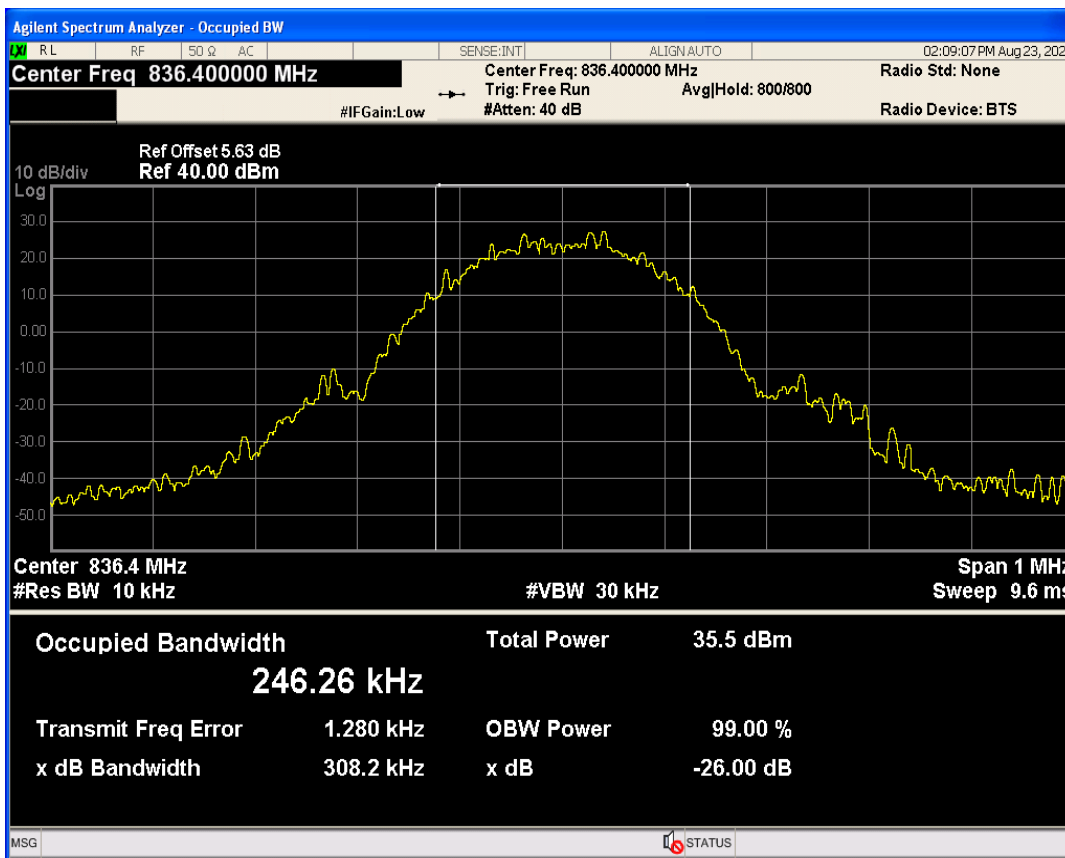


EGPRS850 Channel=251

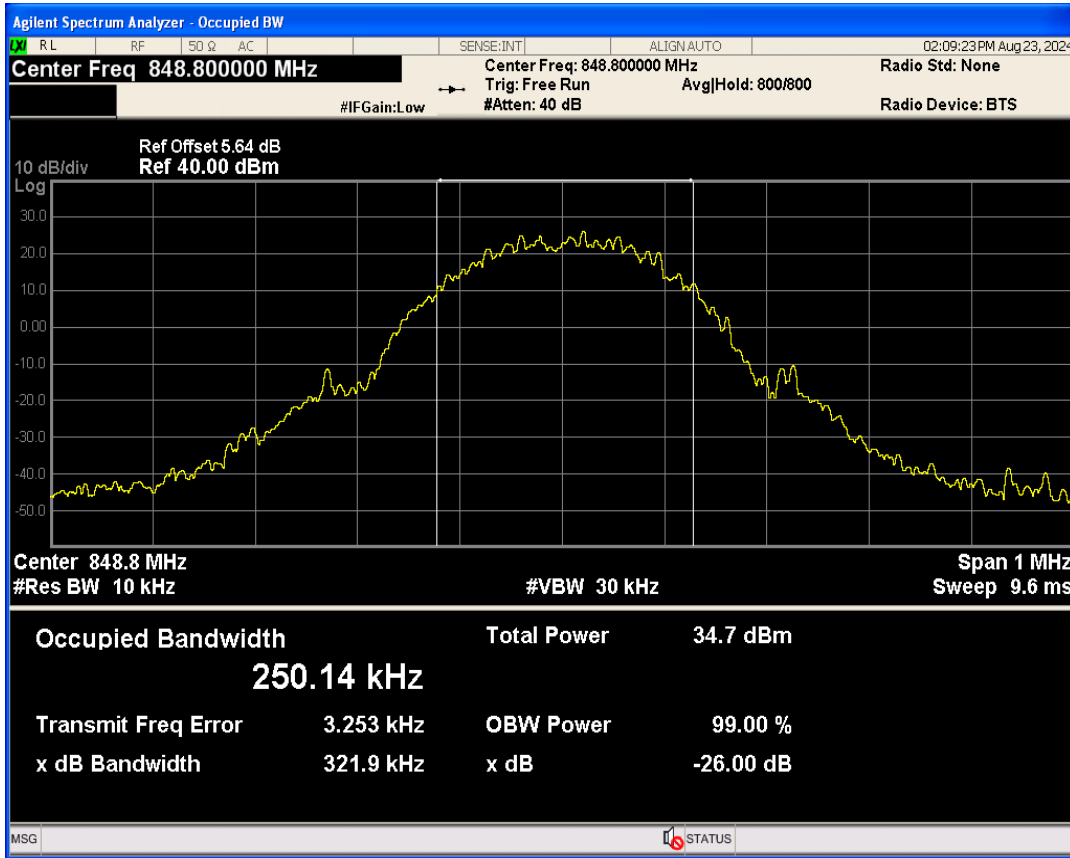


17 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	1849.97	-36.22	-13	PASS
EGPRS1900	810	1909.8	1910.02	-36.25	-13	PASS
EGPRS850	128	824.2	823.98	-35.07	-13	PASS
EGPRS850	251	848.8	849.03	-37.41	-13	PASS


EGPRS1900 Channel=512

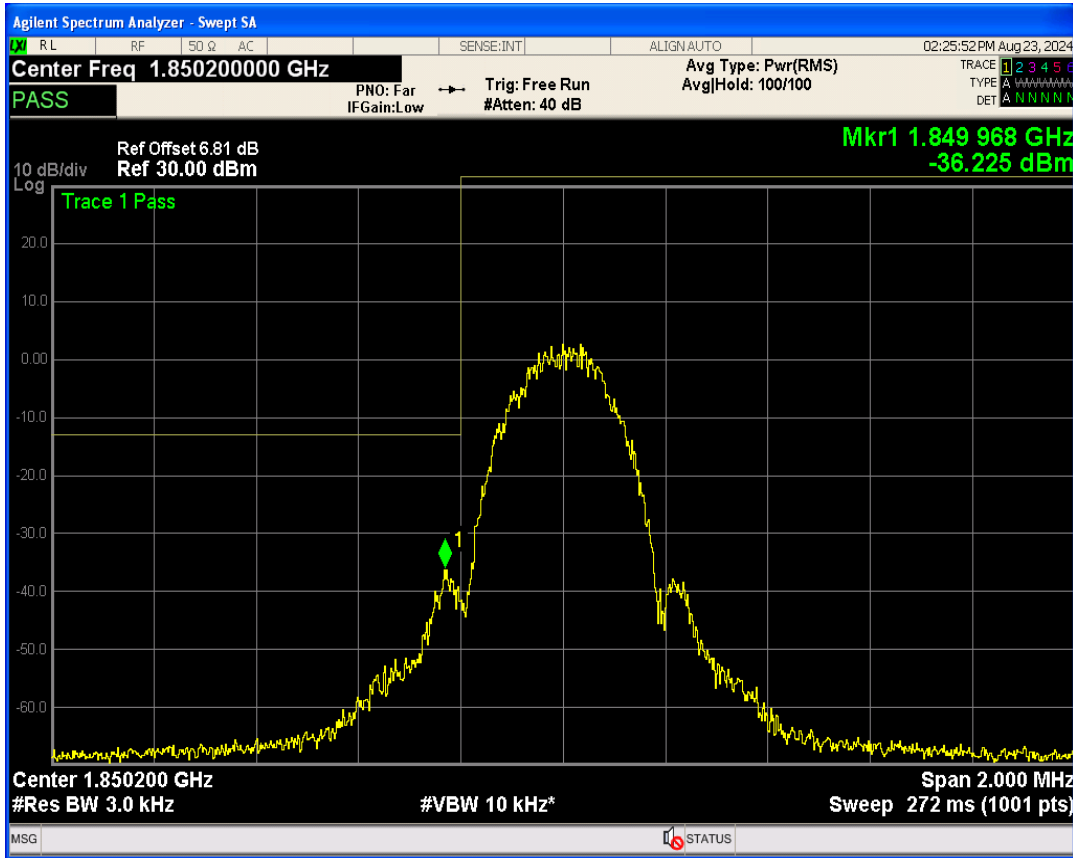


EGPRS1900 Channel=810

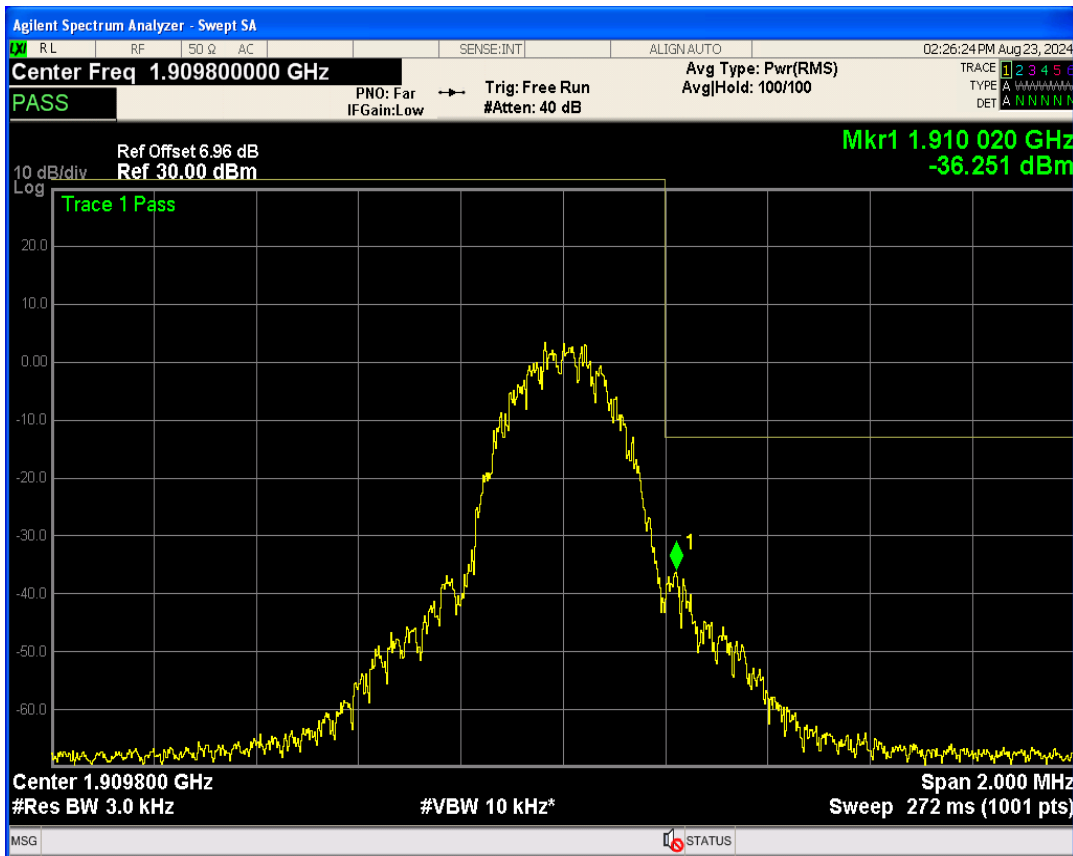

EGPRS850 Channel=128

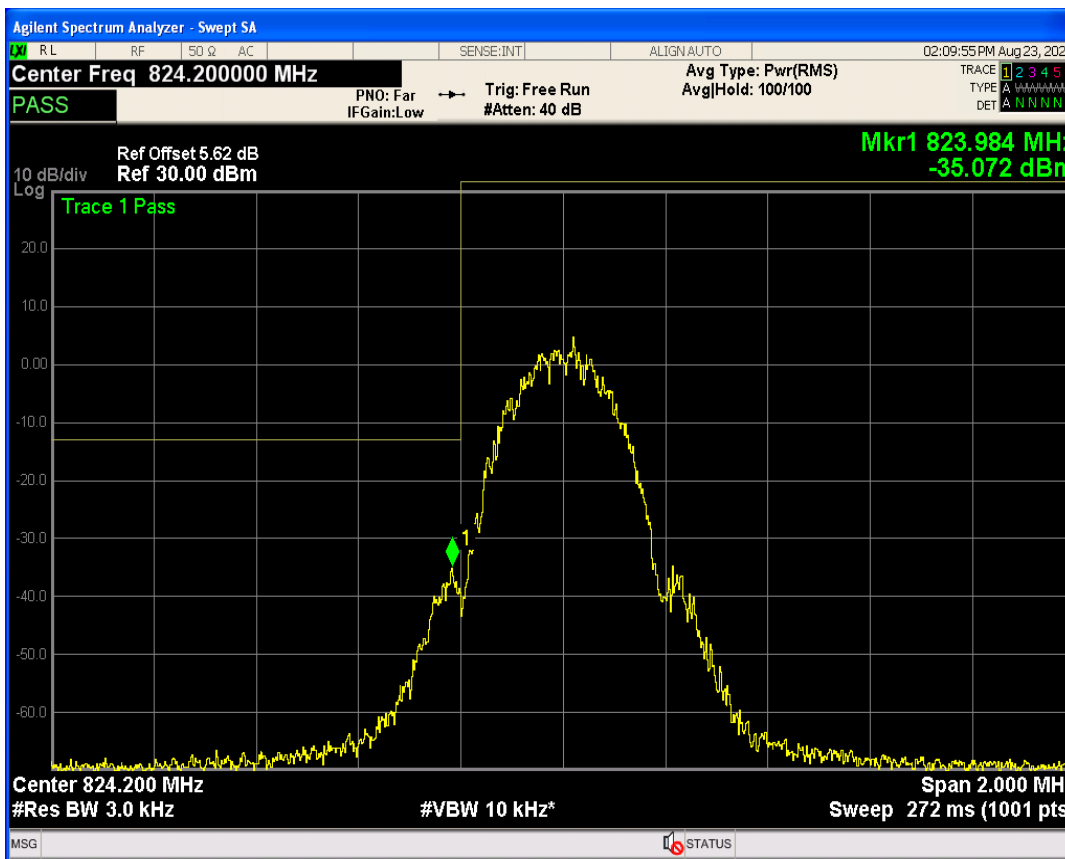


EGPRS850 Channel=251

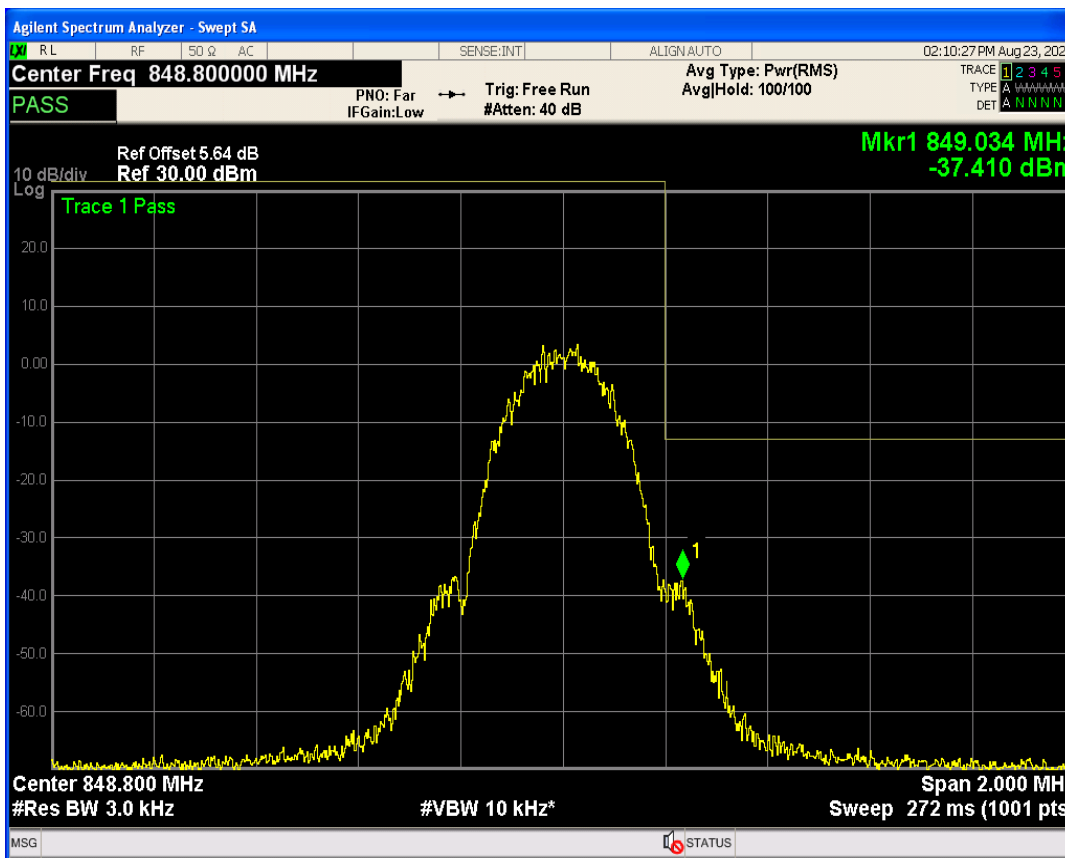


18 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	25889.20	-18.60	-13	PASS
EGPRS1900	661	1880	25891.19	-19.30	-13	PASS
EGPRS1900	810	1909.8	26026.19	-18.81	-13	PASS
EGPRS850	128	824.2	25880.60	-19.92	-13	PASS
EGPRS850	189	836.4	25939.50	-20.36	-13	PASS
EGPRS850	251	848.8	26000.38	-19.75	-13	PASS


EGPRS1900 Channel=512

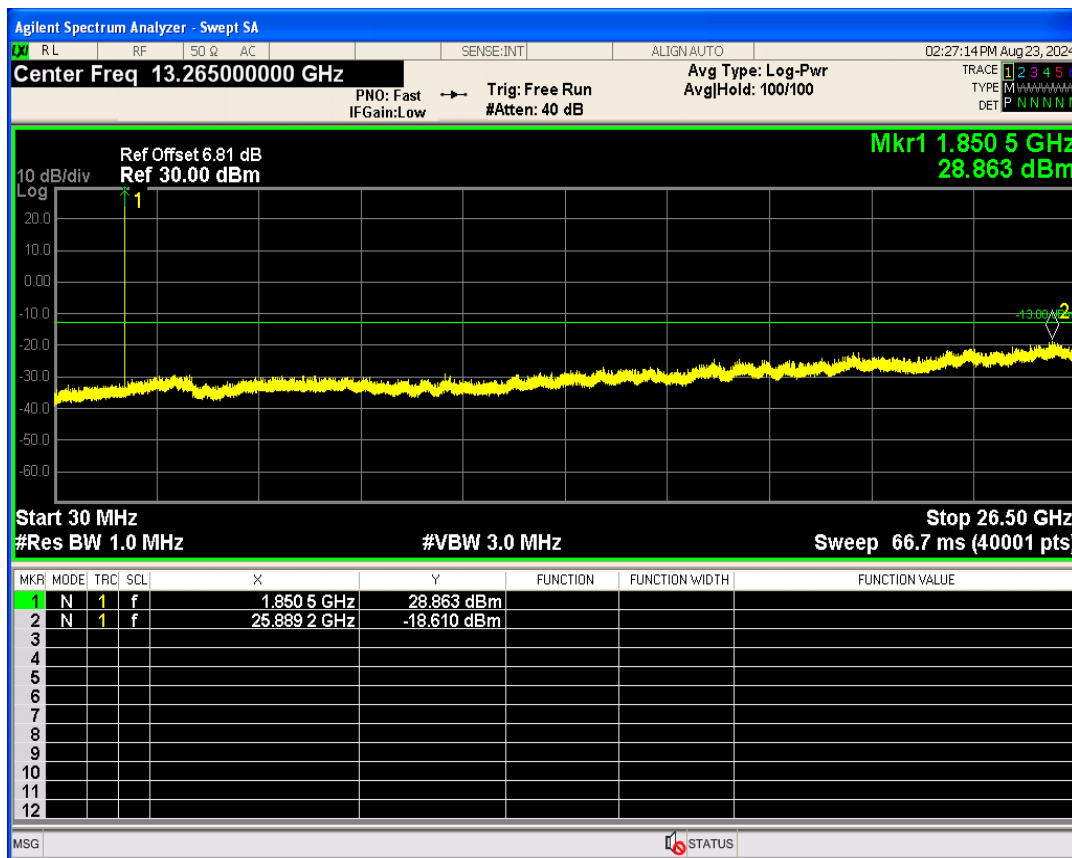


EGPRS1900 Channel=661

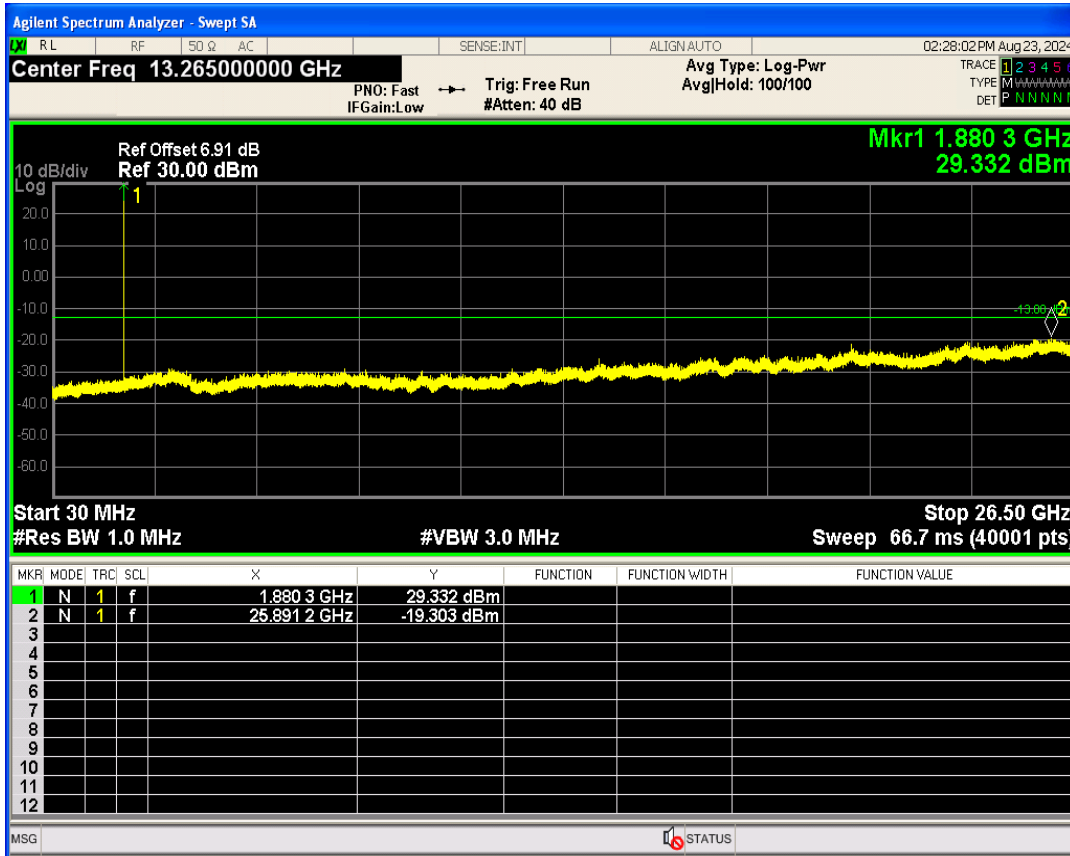


EGPRS1900 Channel=810

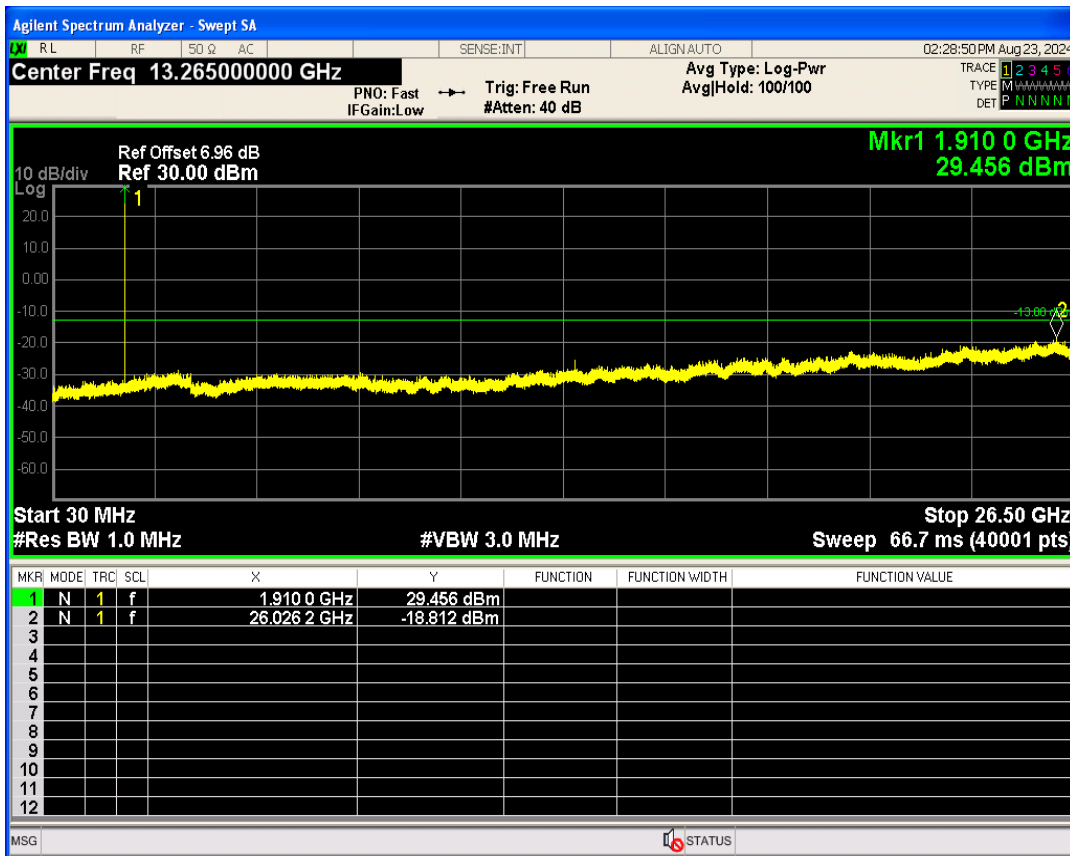


EGPRS850 Channel=128

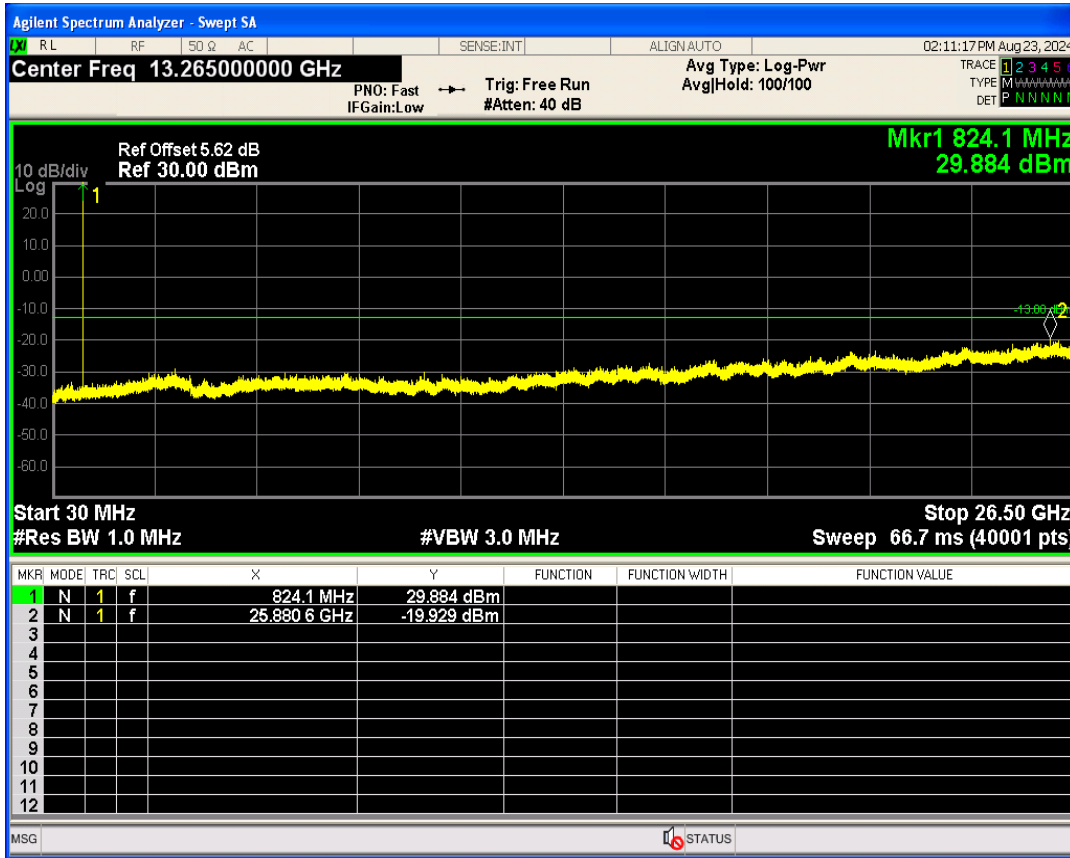

EGPRS850 Channel=189

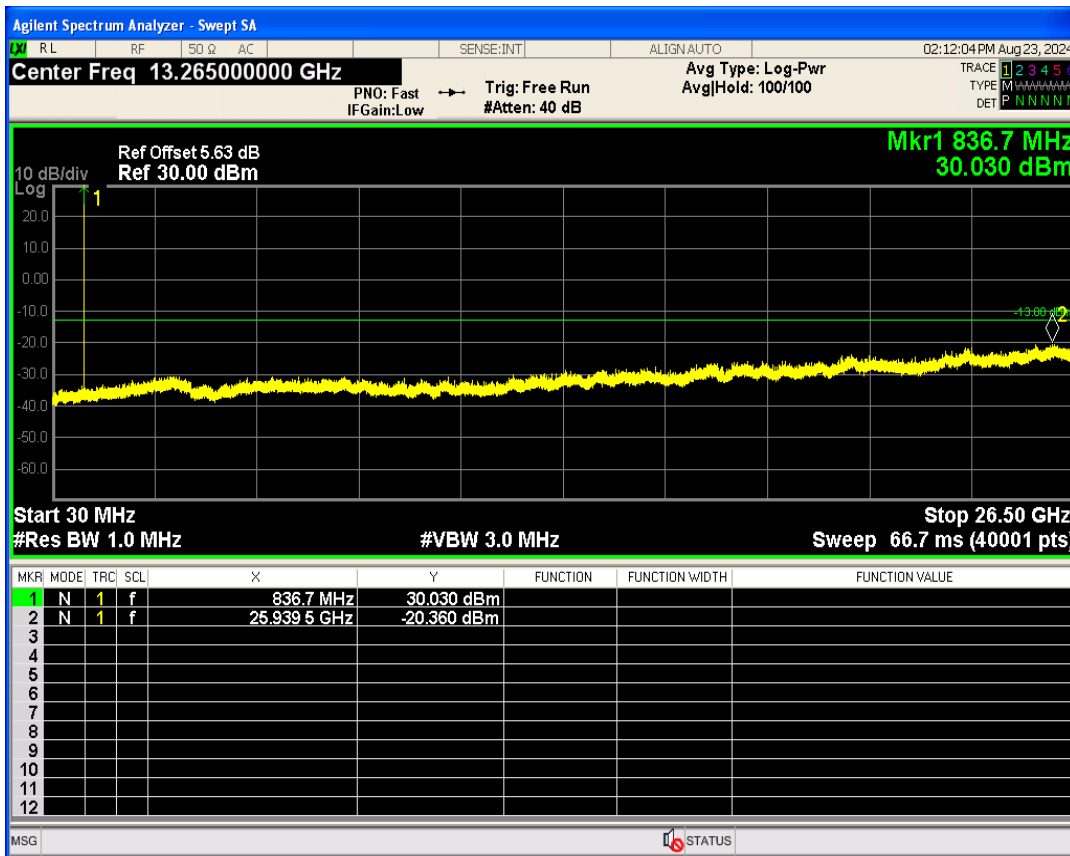


EGPRS850 Channel=251

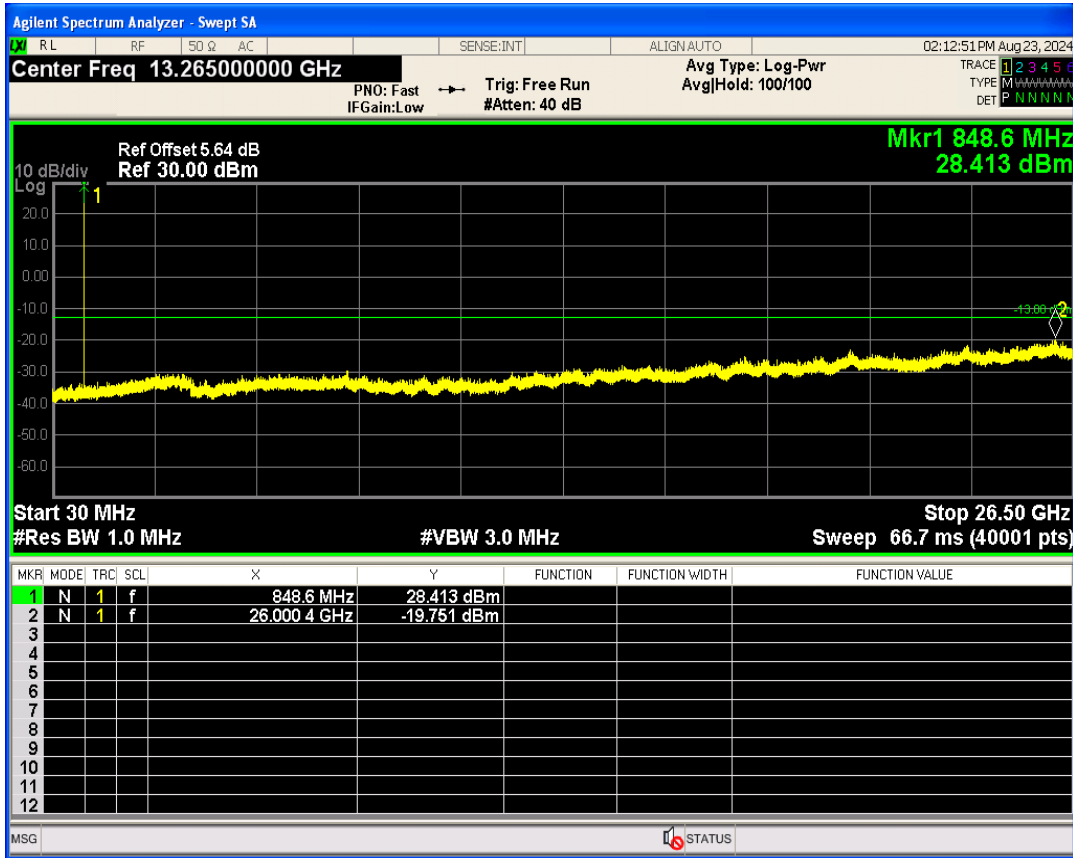


09 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.66	13	PASS
GPRS1900	661	1880	2.67	13	PASS
GPRS1900	810	1909.8	2.66	13	PASS
GPRS850	128	824.2	2.66	13	PASS
GPRS850	189	836.4	2.64	13	PASS
GPRS850	251	848.8	2.66	13	PASS


GPRS1900 Channel=512

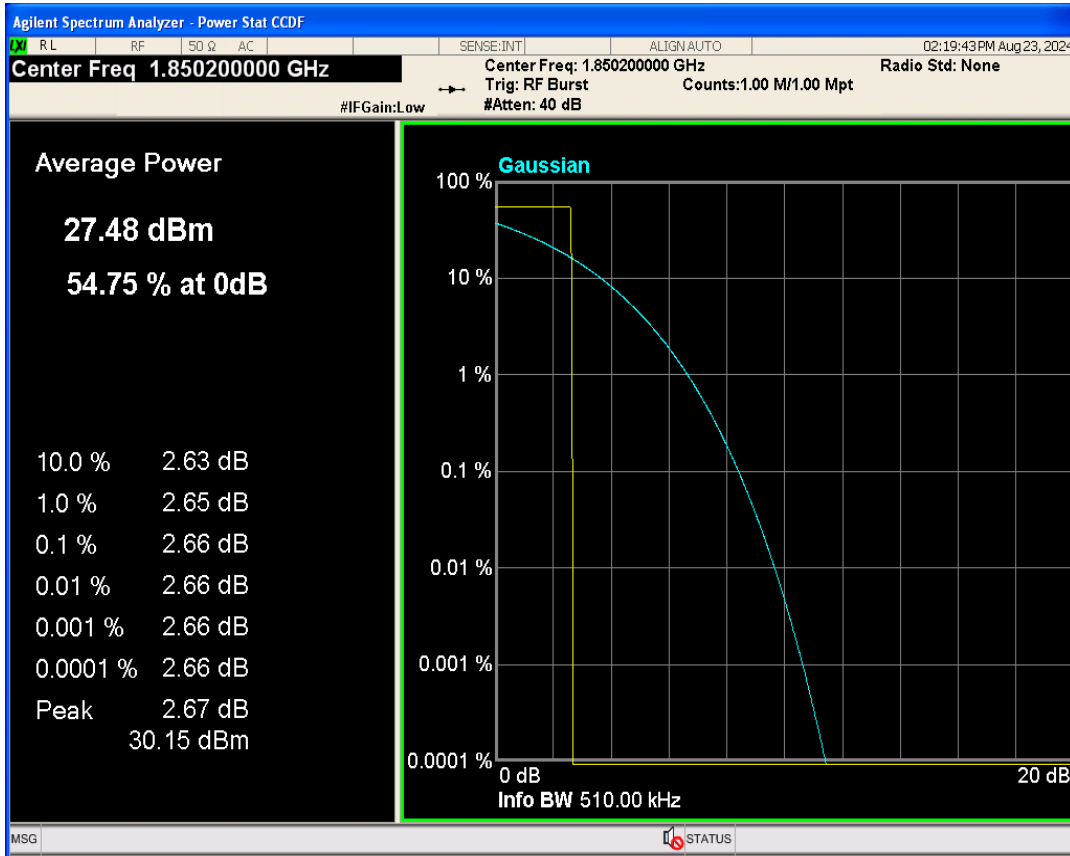


GPRS1900 Channel=661

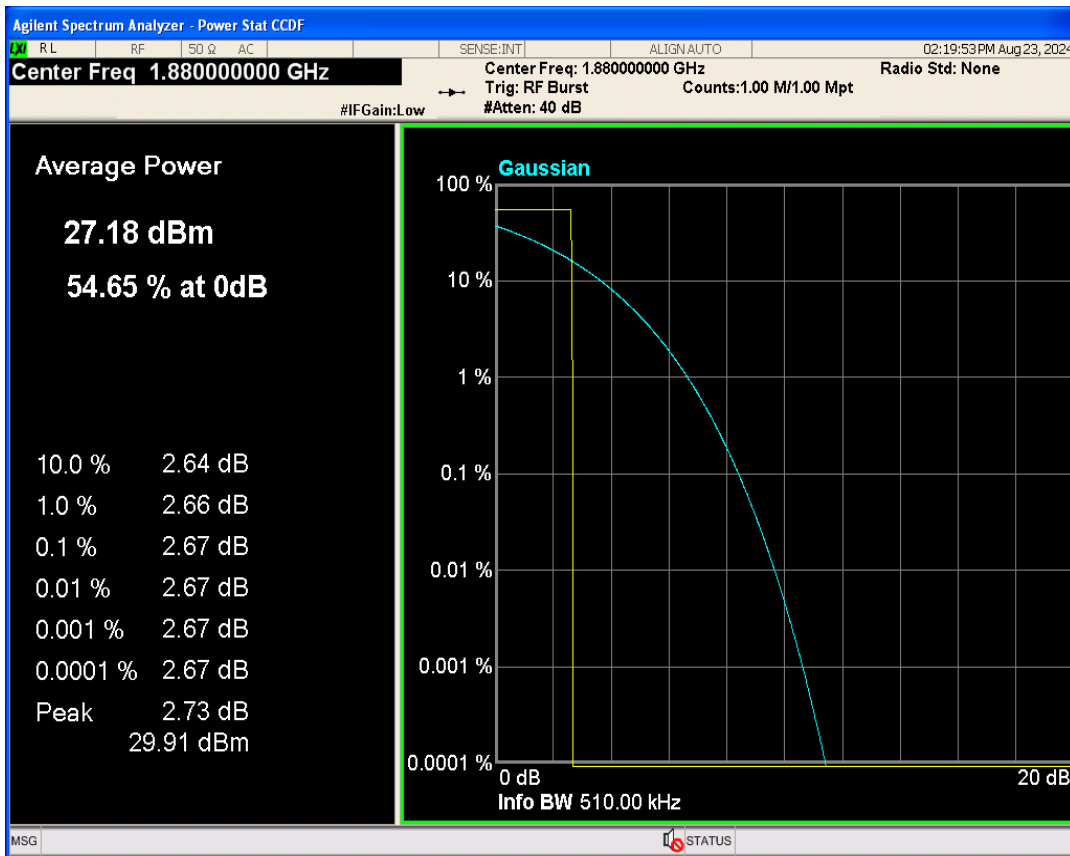



GPRS1900 Channel=810

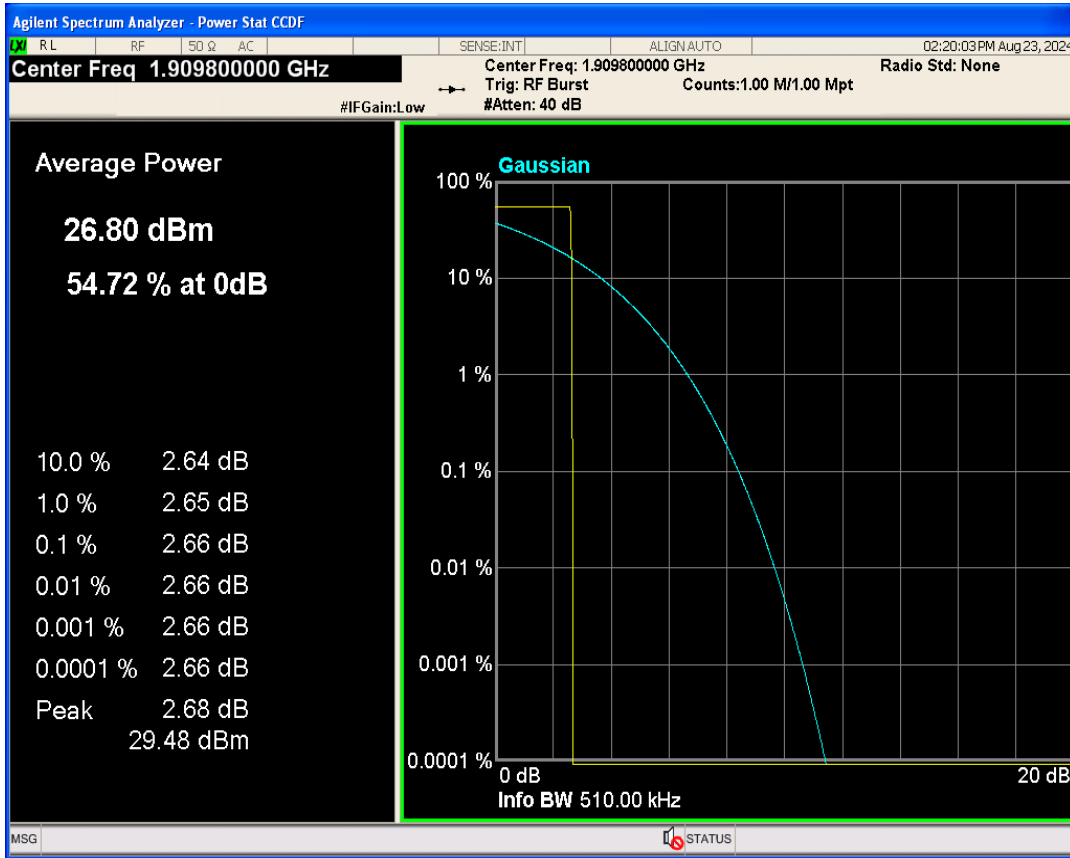

GPRS850 Channel=128

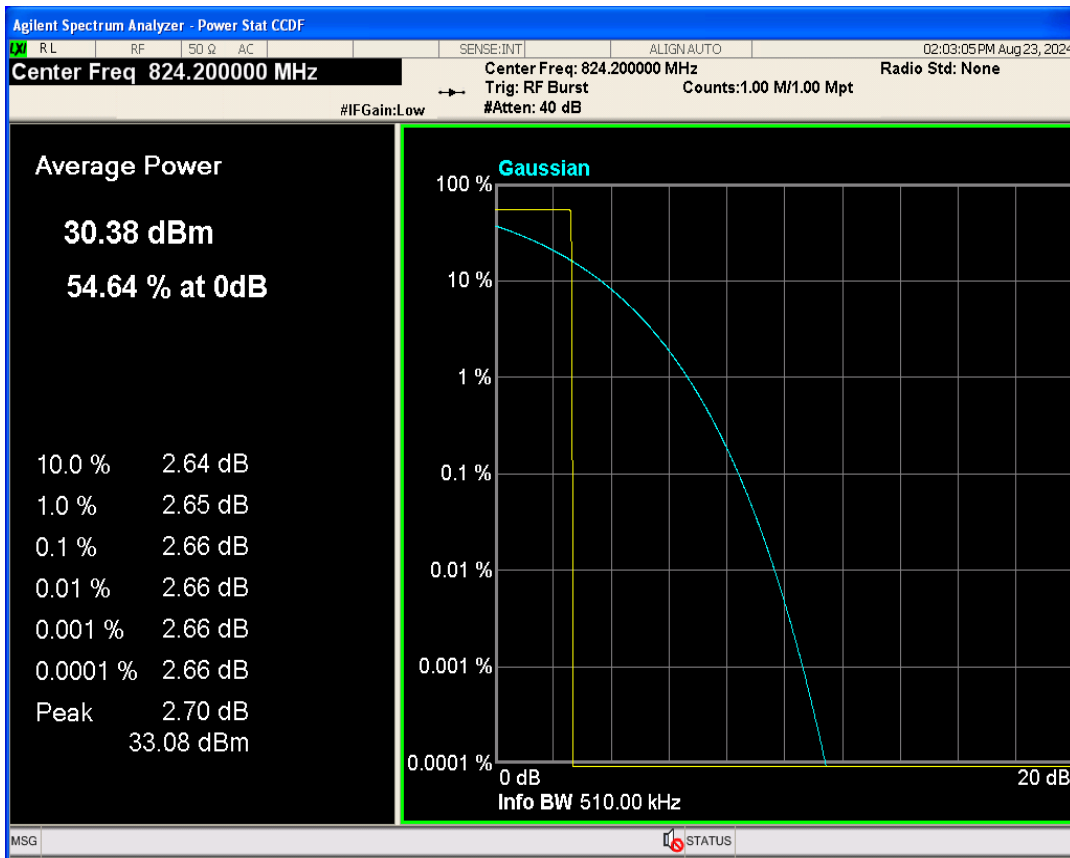


GPRS850 Channel=251

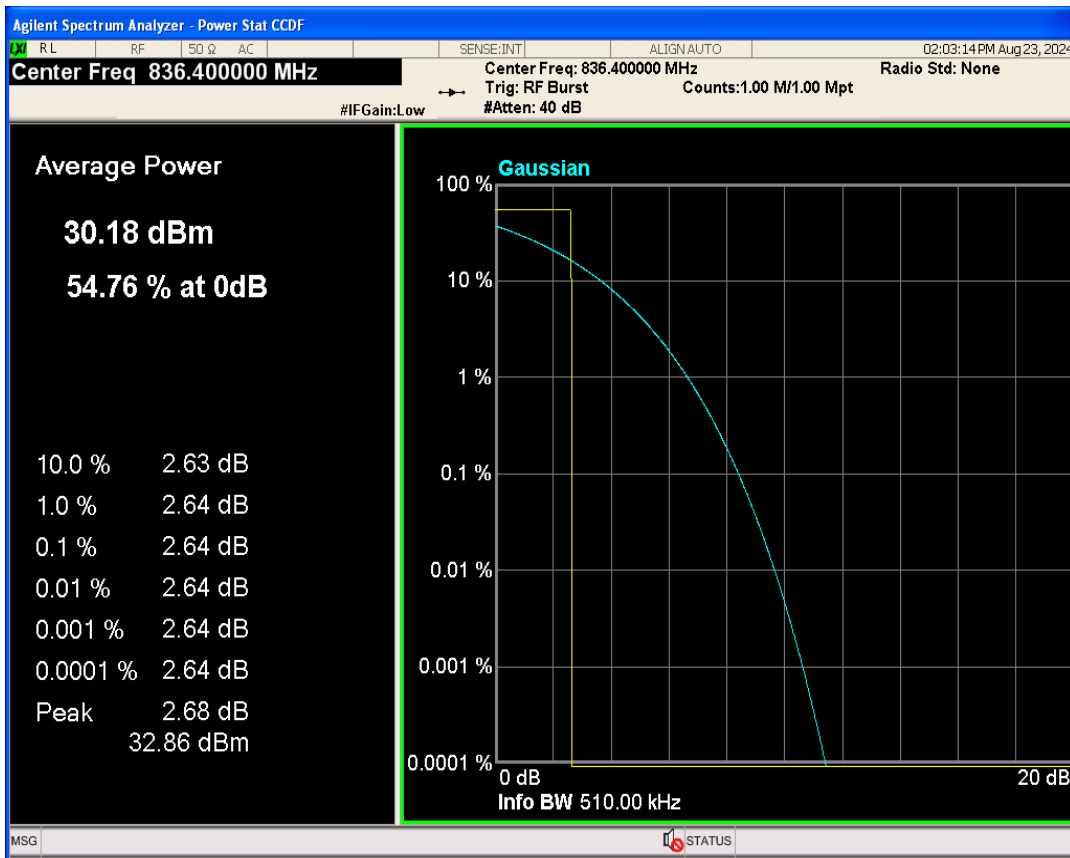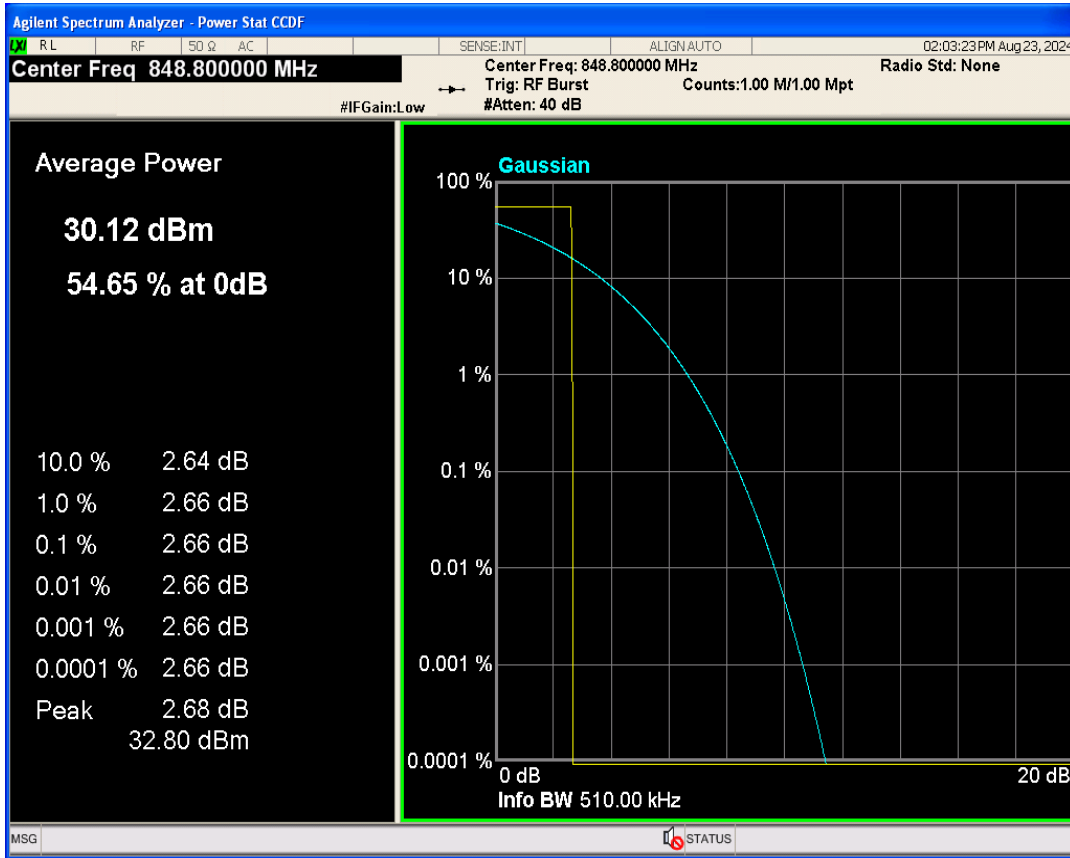


Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	243.377	312.630	PASS
GPRS1900	661	1880	245.439	310.478	PASS
GPRS1900	810	1909.8	241.554	316.616	PASS
GPRS850	128	824.2	249.641	324.414	PASS
GPRS850	189	836.4	242.517	327.225	PASS
GPRS850	251	848.8	245.587	314.665	PASS


GPRS1900 Channel=512

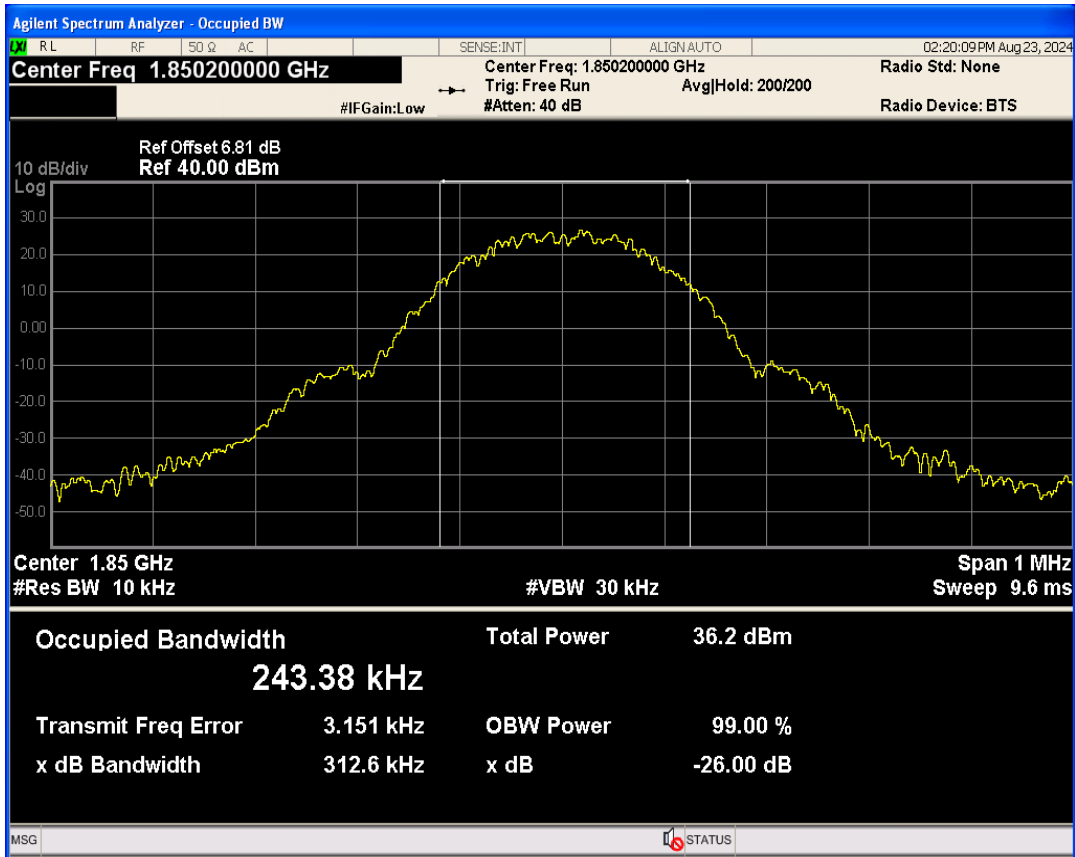


GPRS1900 Channel=810

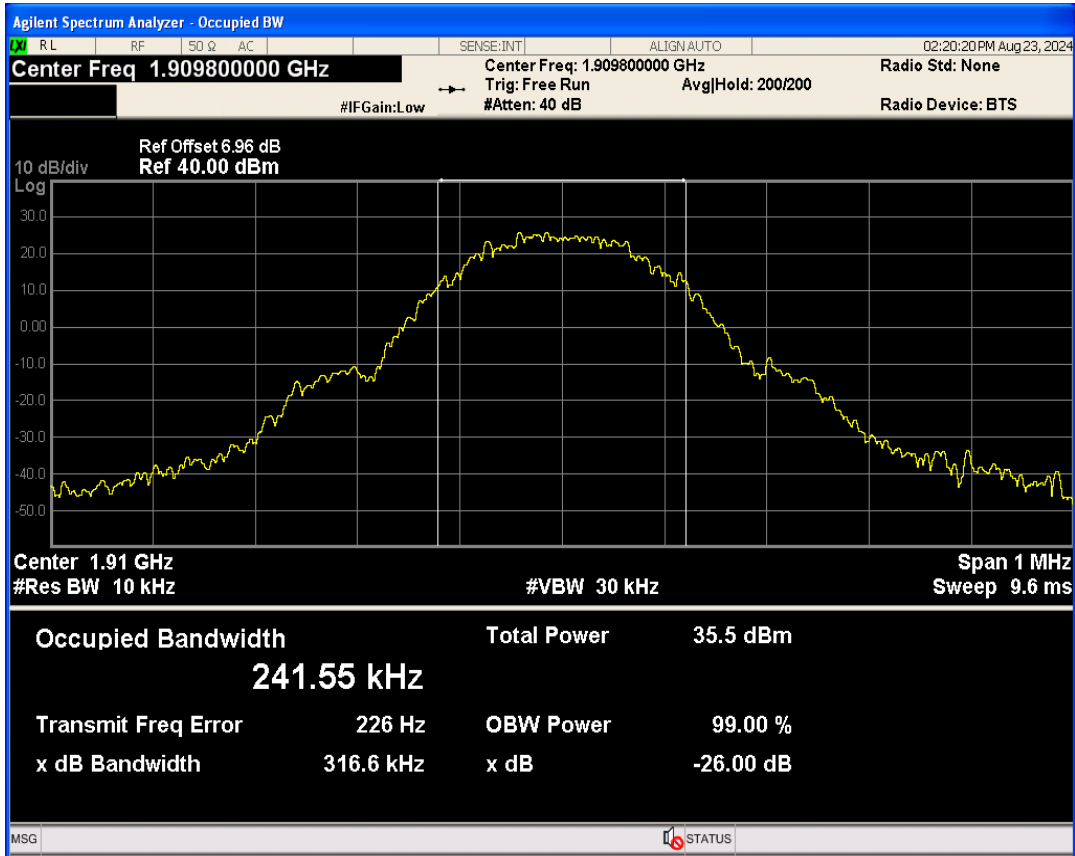


GPRS1900 Channel=661

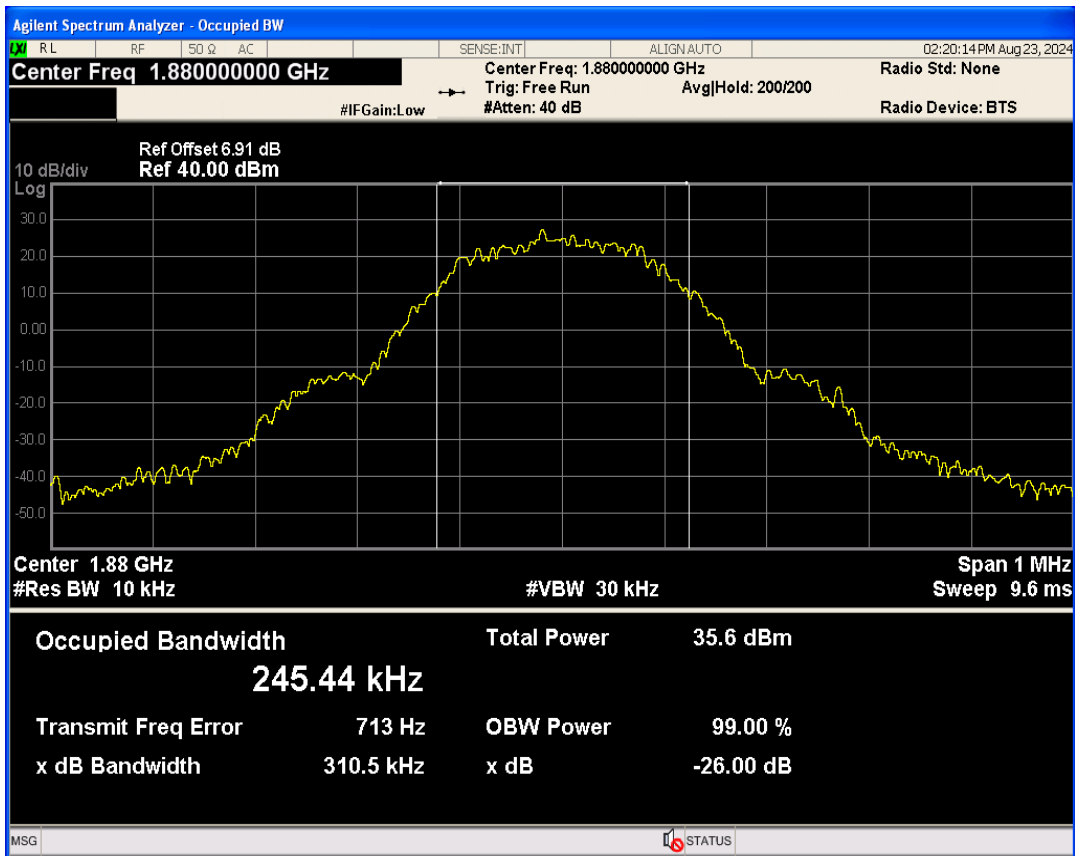


GPRS850 Channel=128

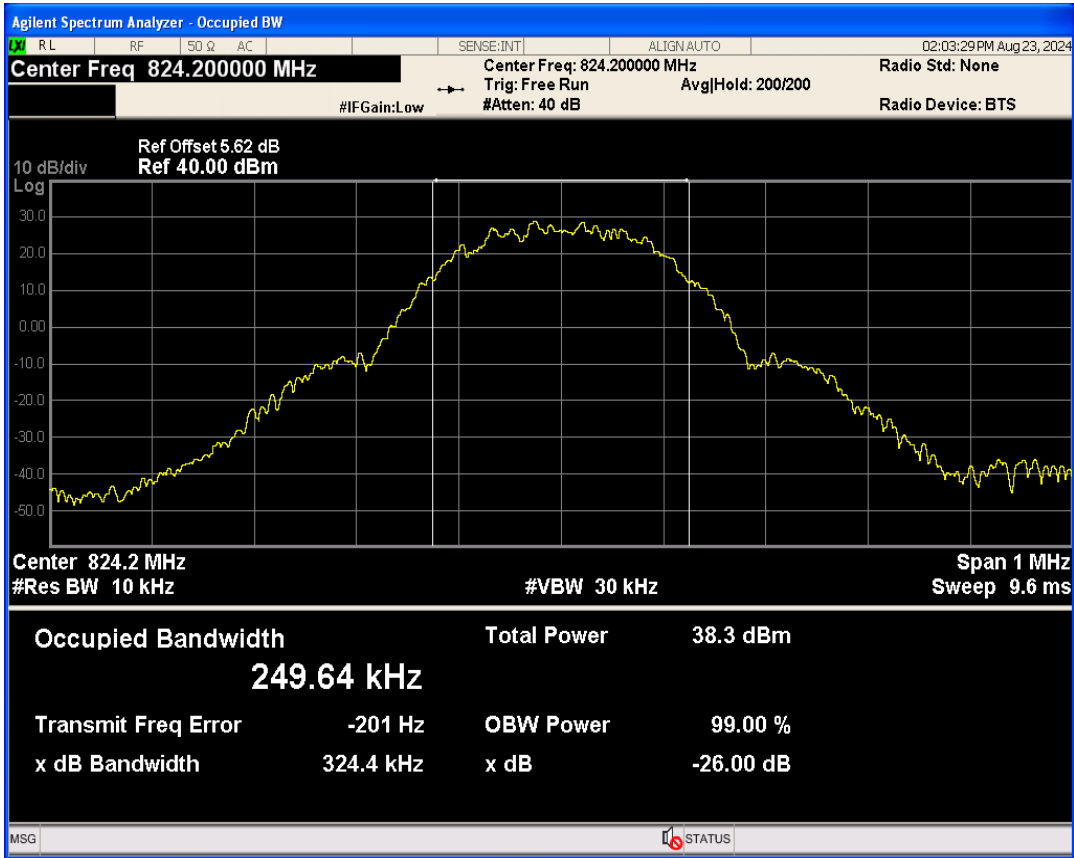

GPRS850 Channel=189

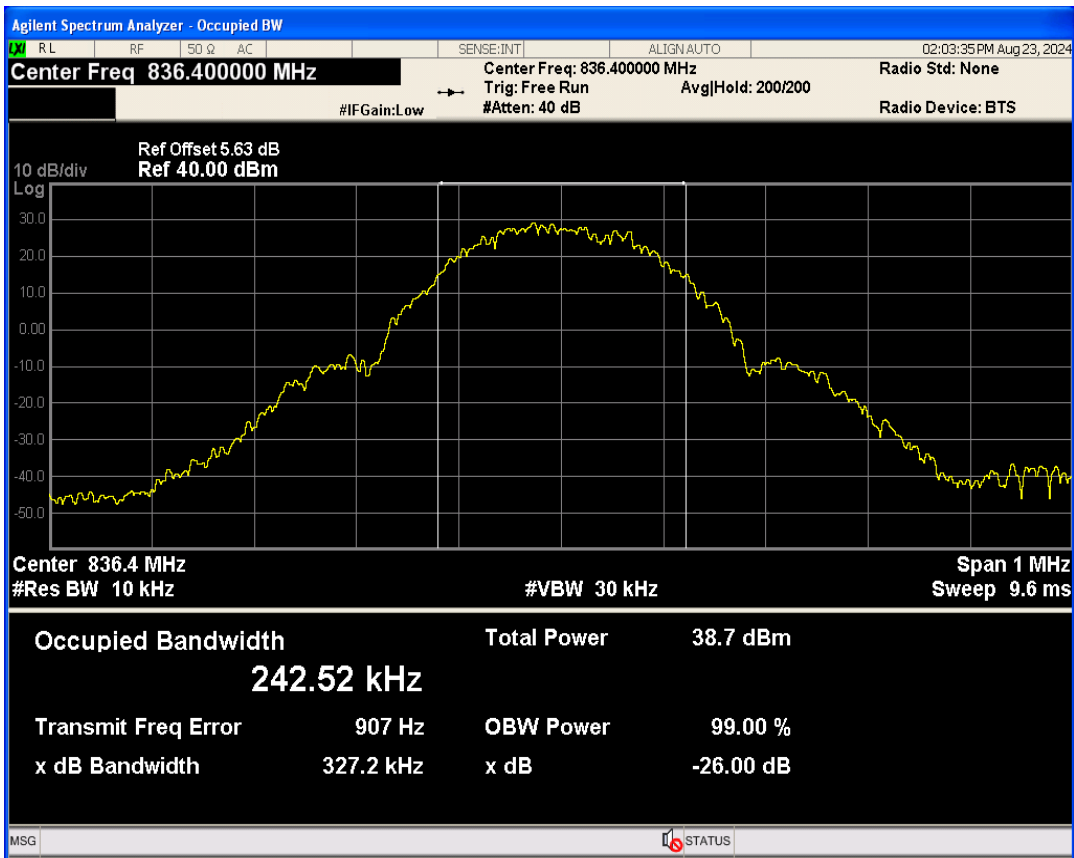


GPRS850 Channel=251

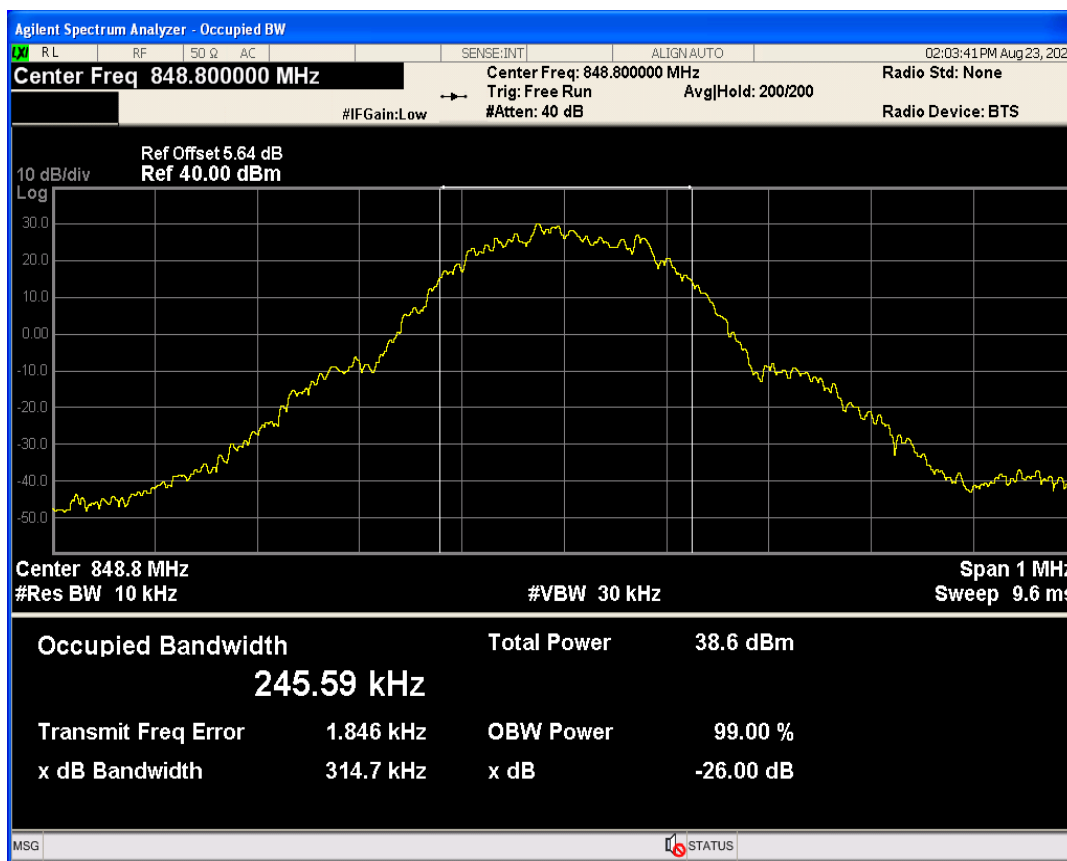


11 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1849.98	-30.13	-13	PASS
GPRS1900	810	1909.8	1910.02	-30.54	-13	PASS
GPRS850	128	824.2	823.97	-27.20	-13	PASS
GPRS850	251	848.8	849.02	-27.69	-13	PASS


GPRS1900 Channel=512

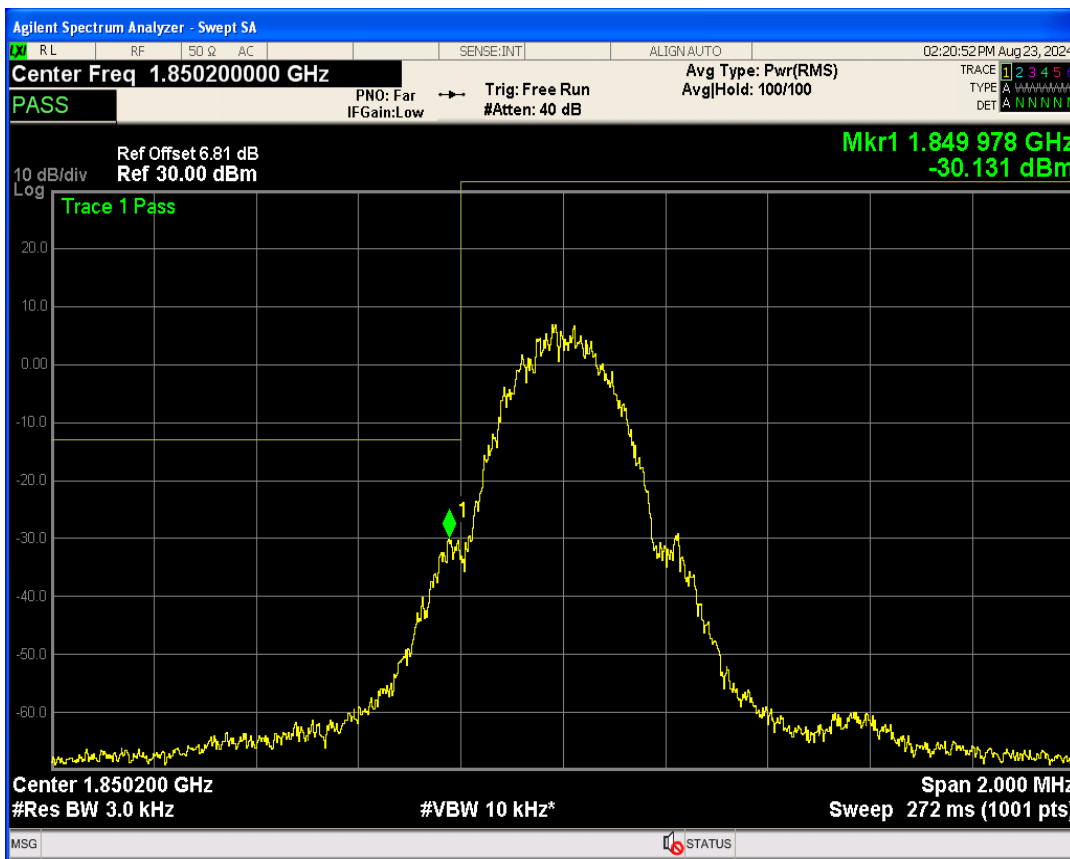


GPRS1900 Channel=810

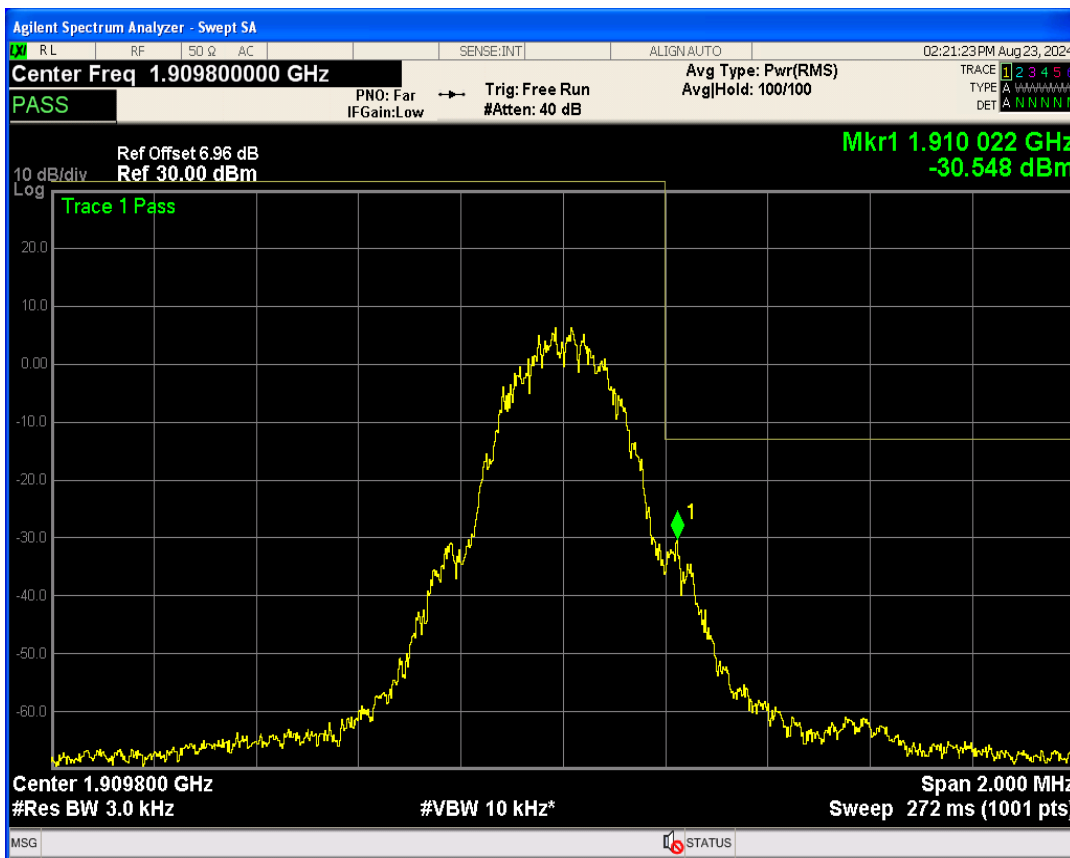

GPRS850 Channel=251

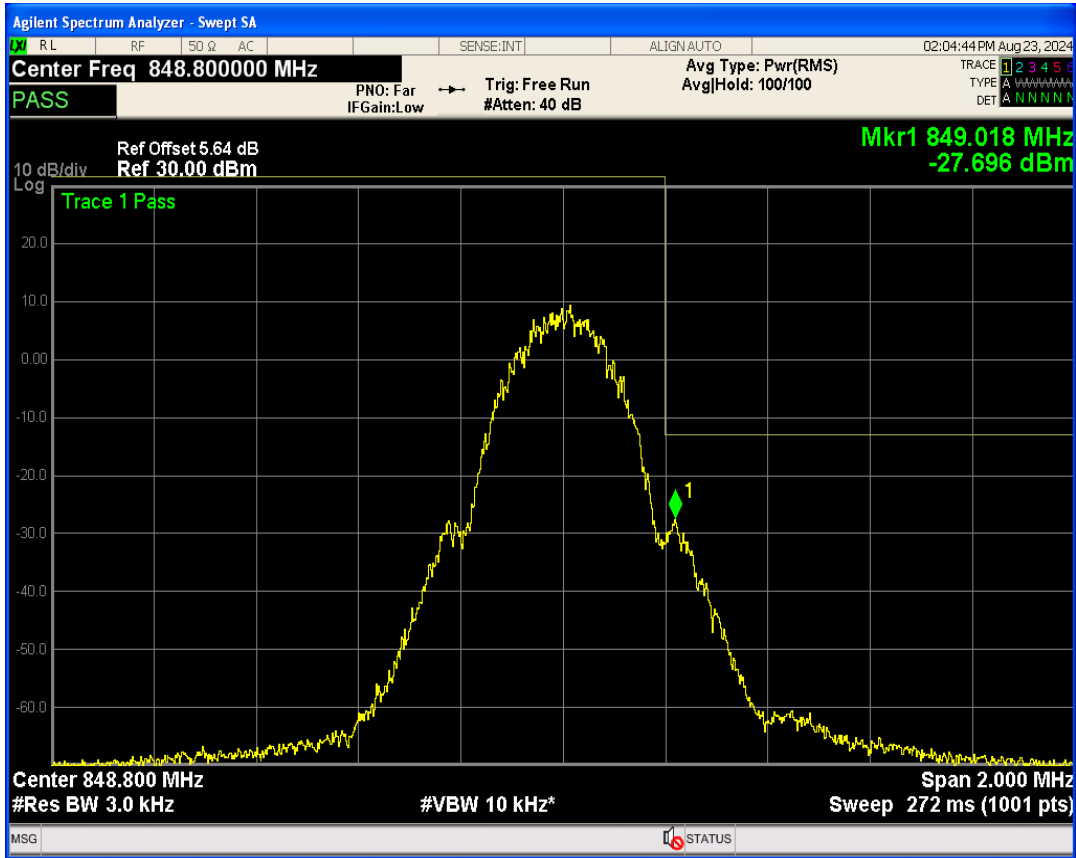


GPRS850 Channel=128

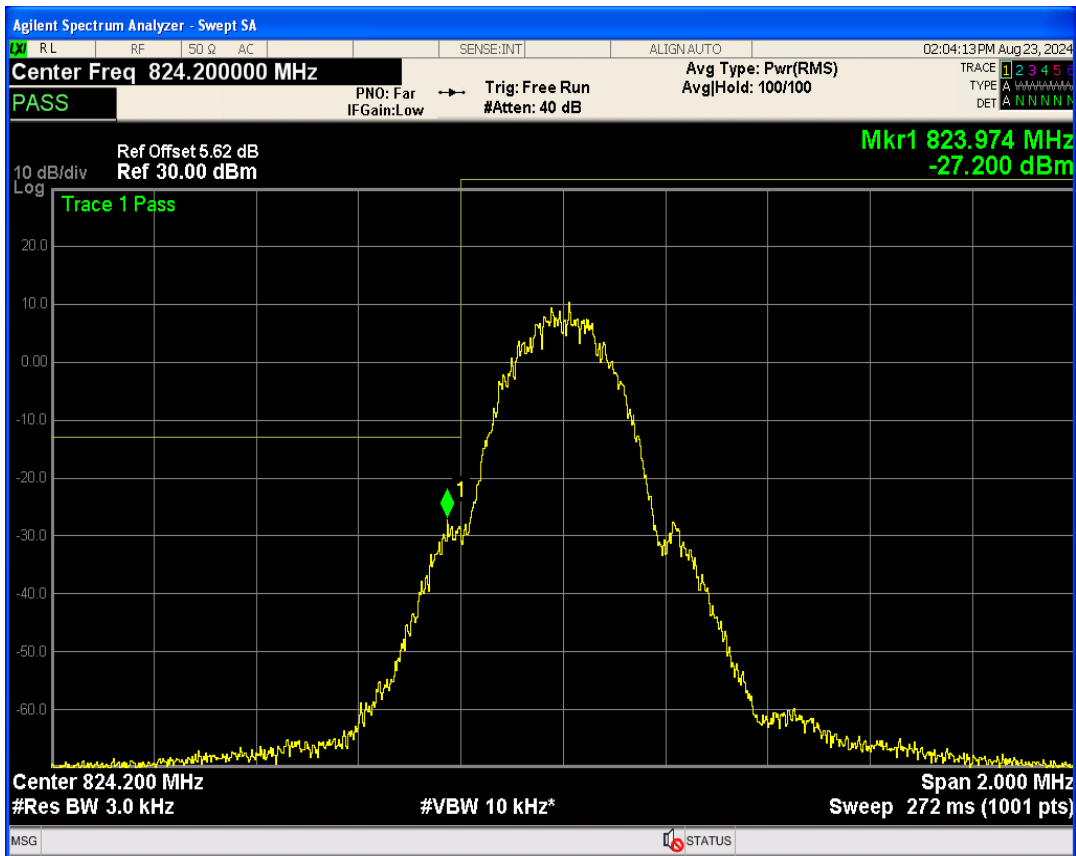


12 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	26059.27	-19.14	-13	PASS
GPRS1900	661	1880	25525.90	-18.99	-13	PASS
GPRS1900	810	1909.8	25492.15	-19.05	-13	PASS
GPRS850	128	824.2	25857.44	-20.24	-13	PASS
GPRS850	189	836.4	25946.78	-19.75	-13	PASS
GPRS850	251	848.8	26019.57	-19.85	-13	PASS


GPRS1900 Channel=512

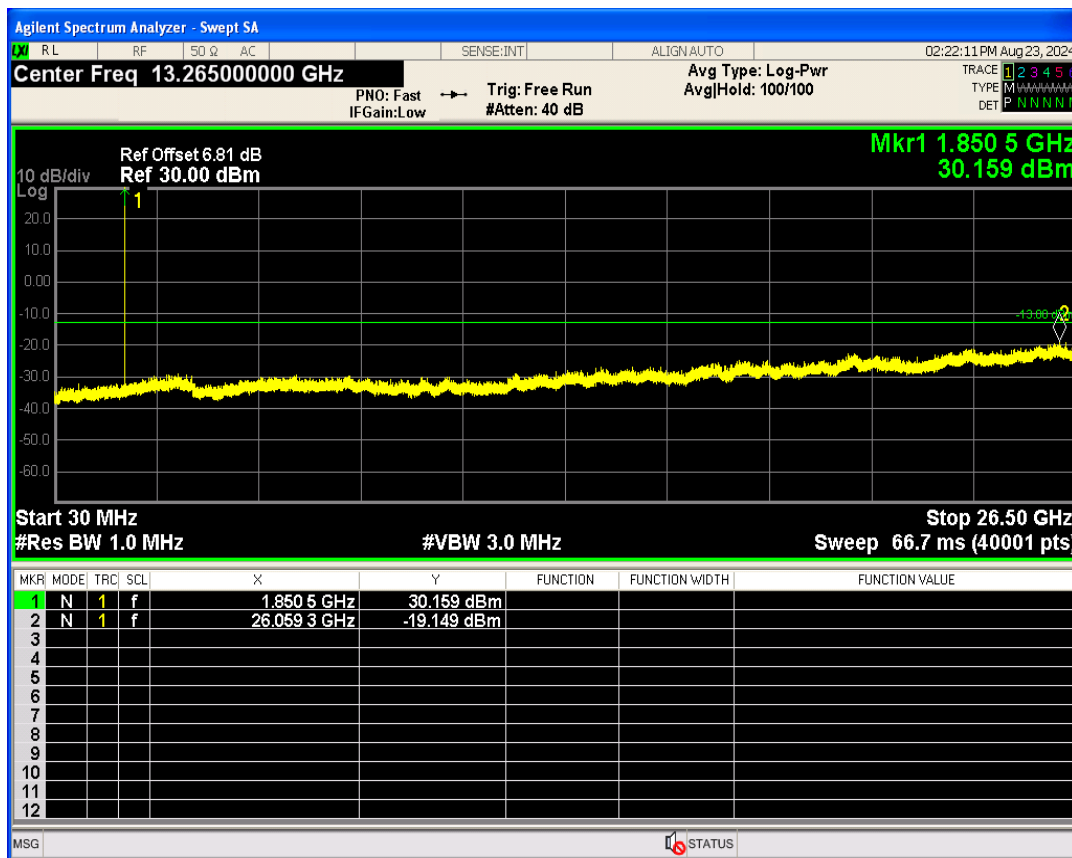


GPRS1900 Channel=661

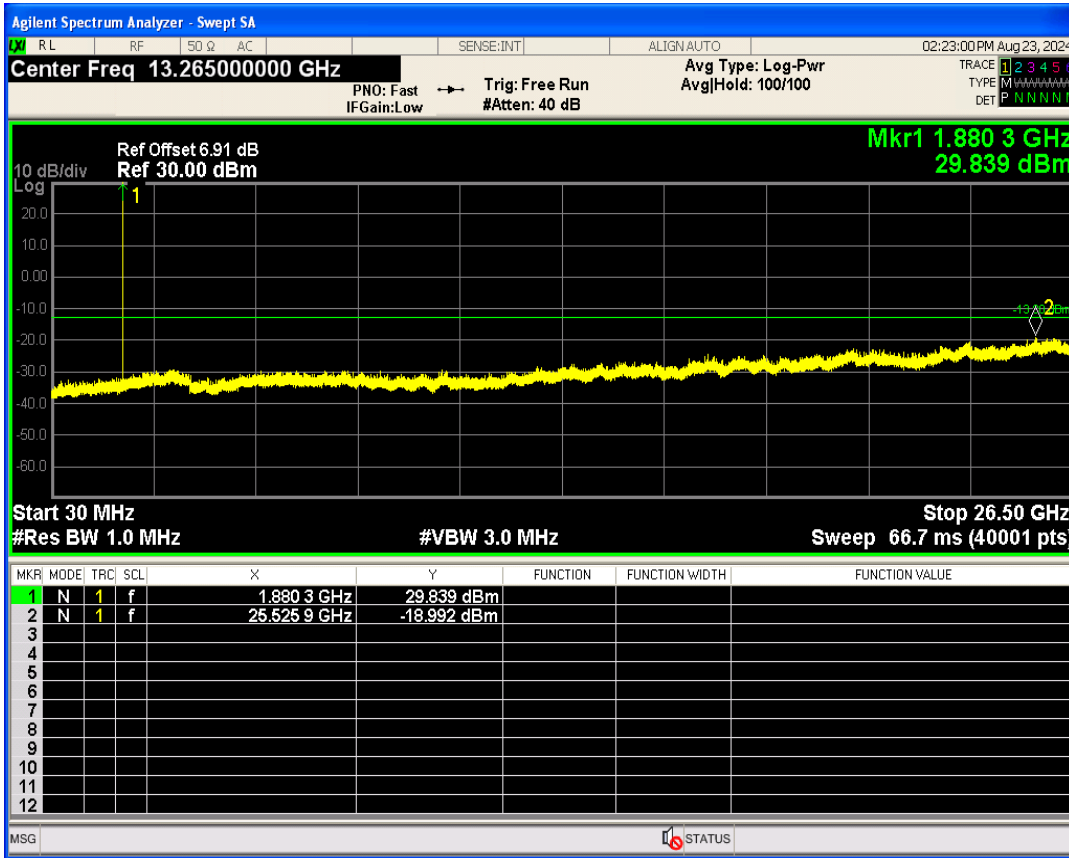


GPRS1900 Channel=810

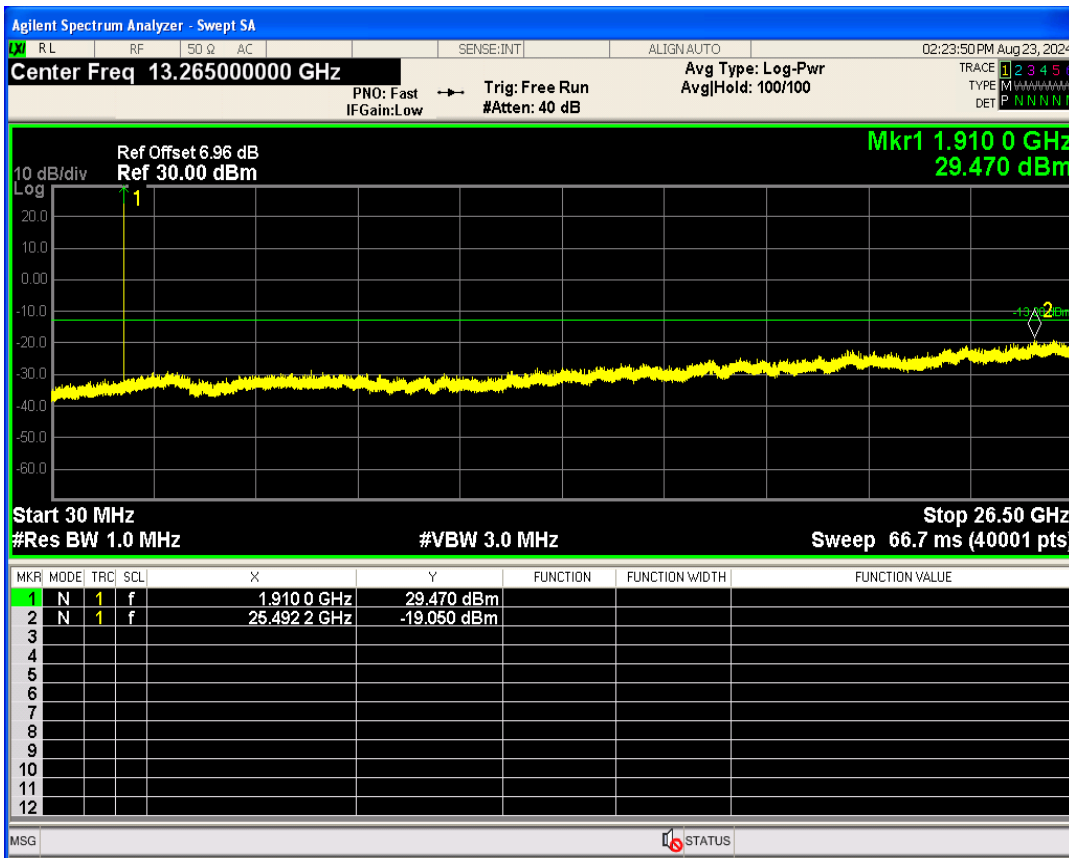


GPRS850 Channel=128

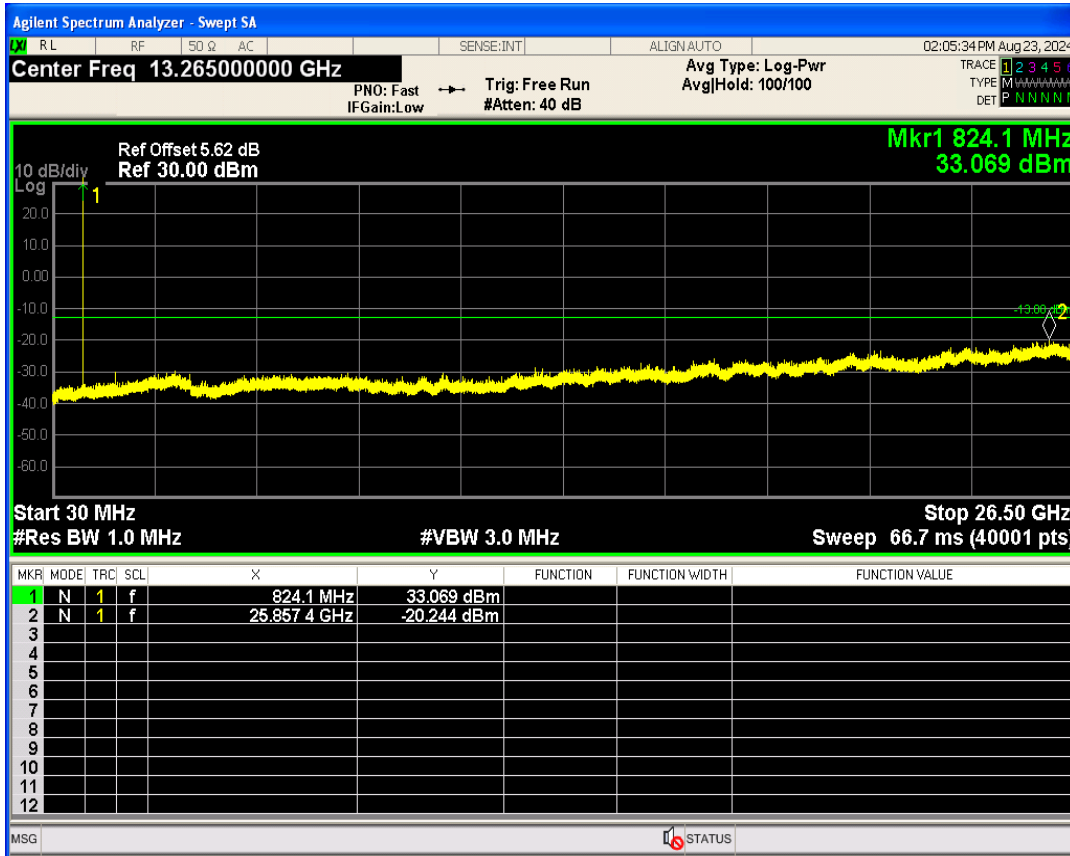

GPRS850 Channel=189

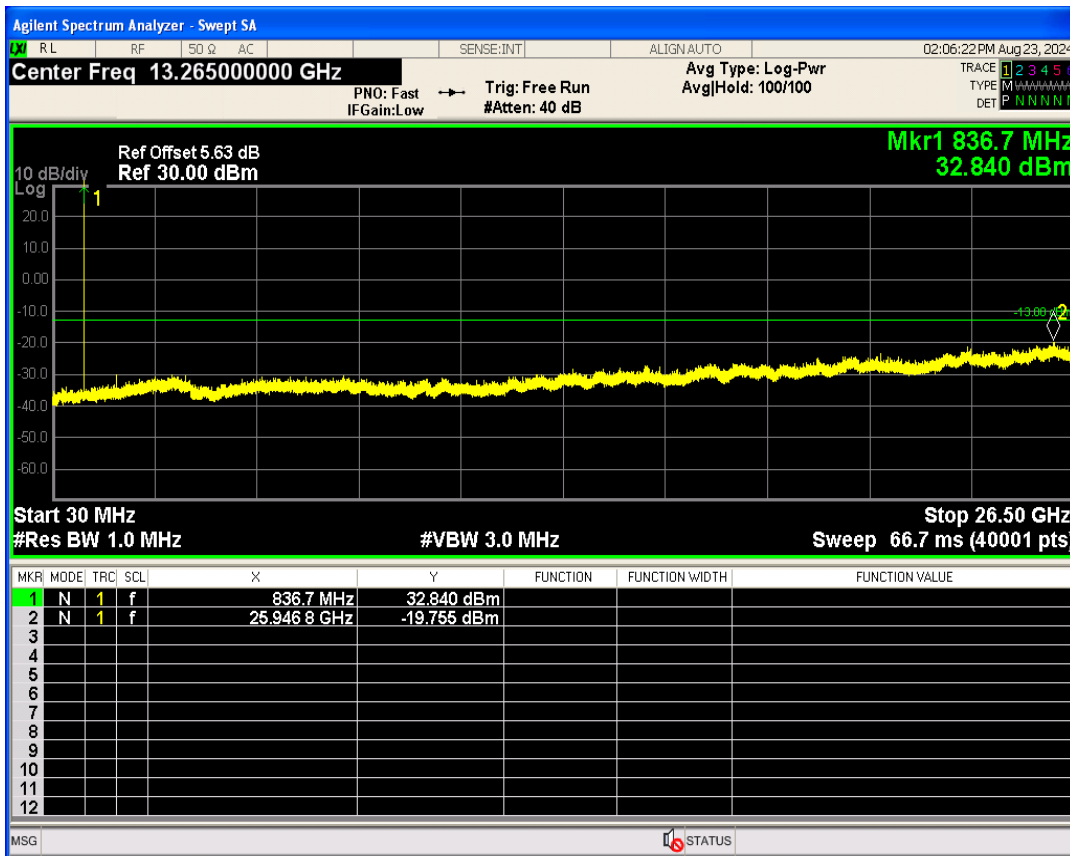


GPRS850 Channel=251

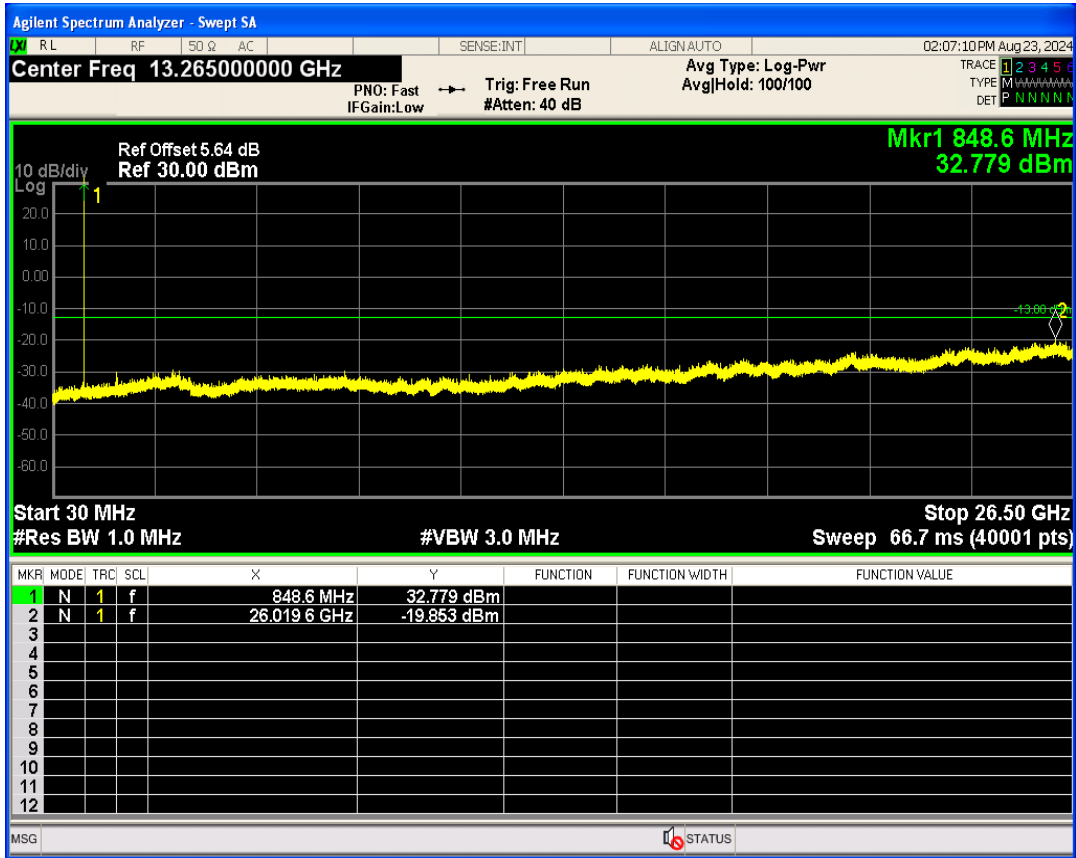


03 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GSM1900	512	1850.2	2.61	13	PASS
GSM1900	661	1880	2.63	13	PASS
GSM1900	810	1909.8	2.61	13	PASS
GSM850	128	824.2	2.62	13	PASS
GSM850	189	836.4	2.62	13	PASS
GSM850	251	848.8	2.62	13	PASS


GSM1900 Channel=512

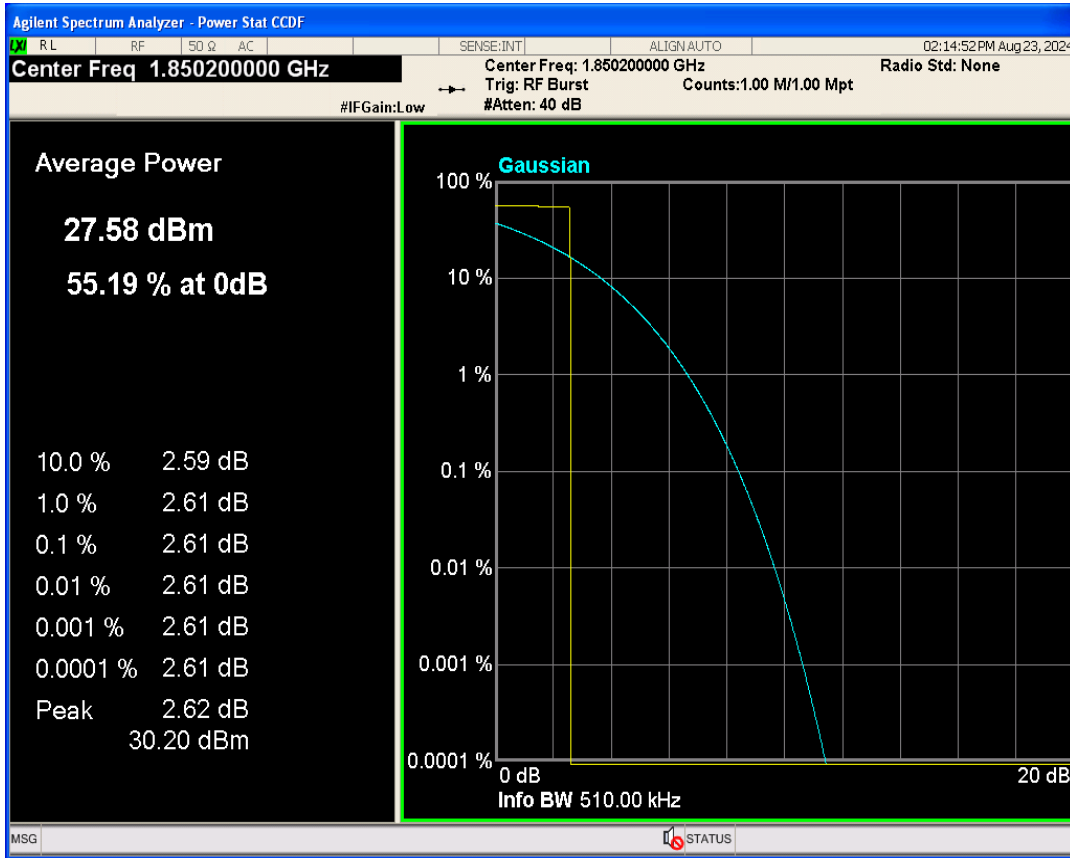


GSM1900 Channel=661

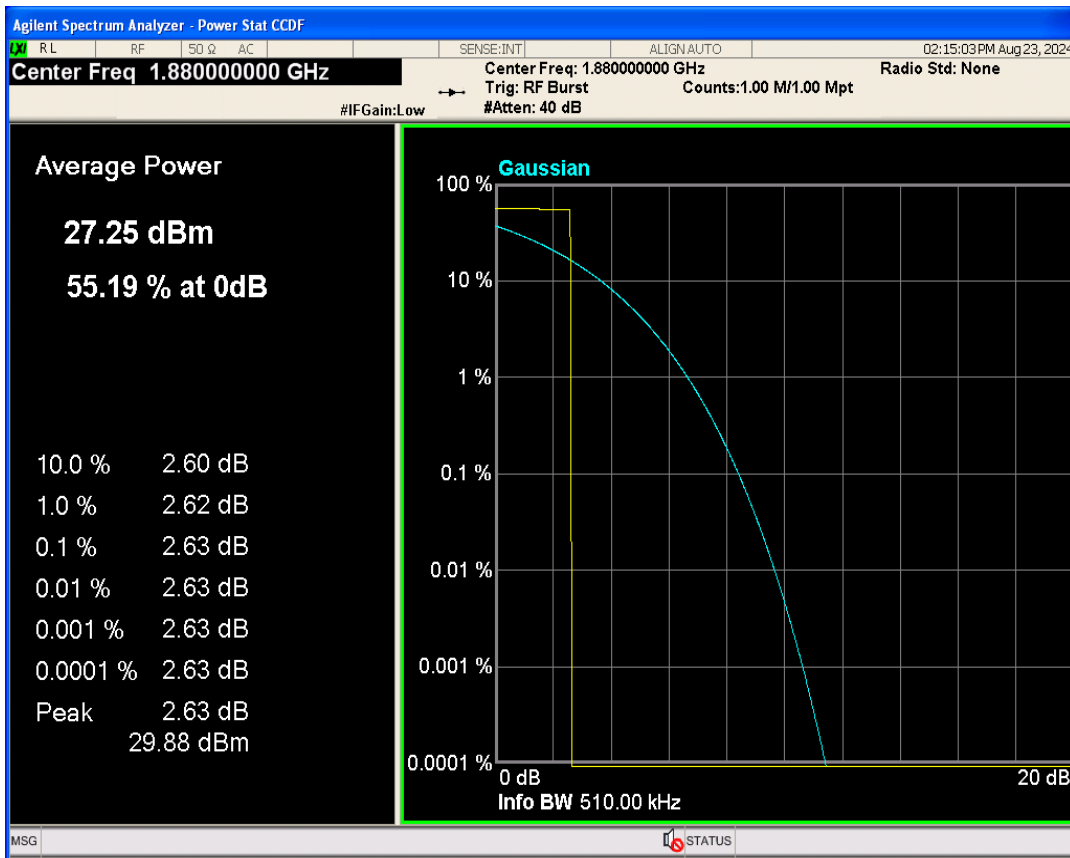


GSM1900 Channel=810

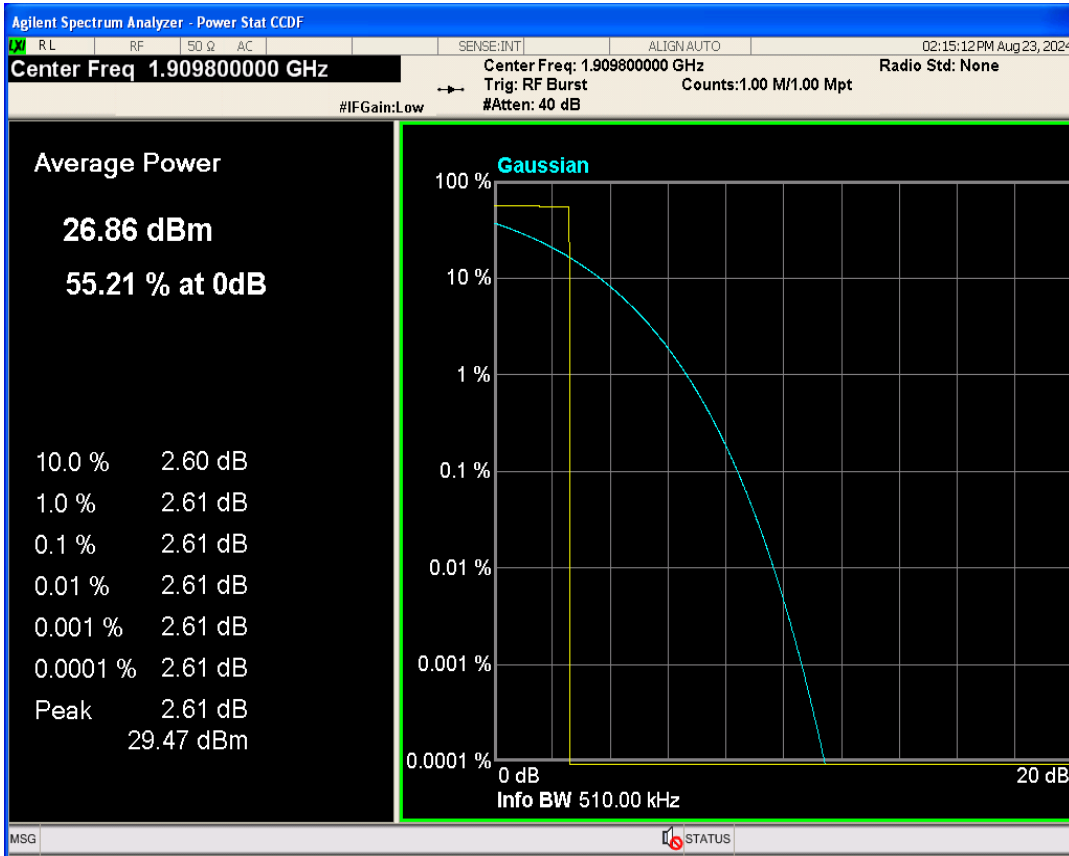


GSM850 Channel=128

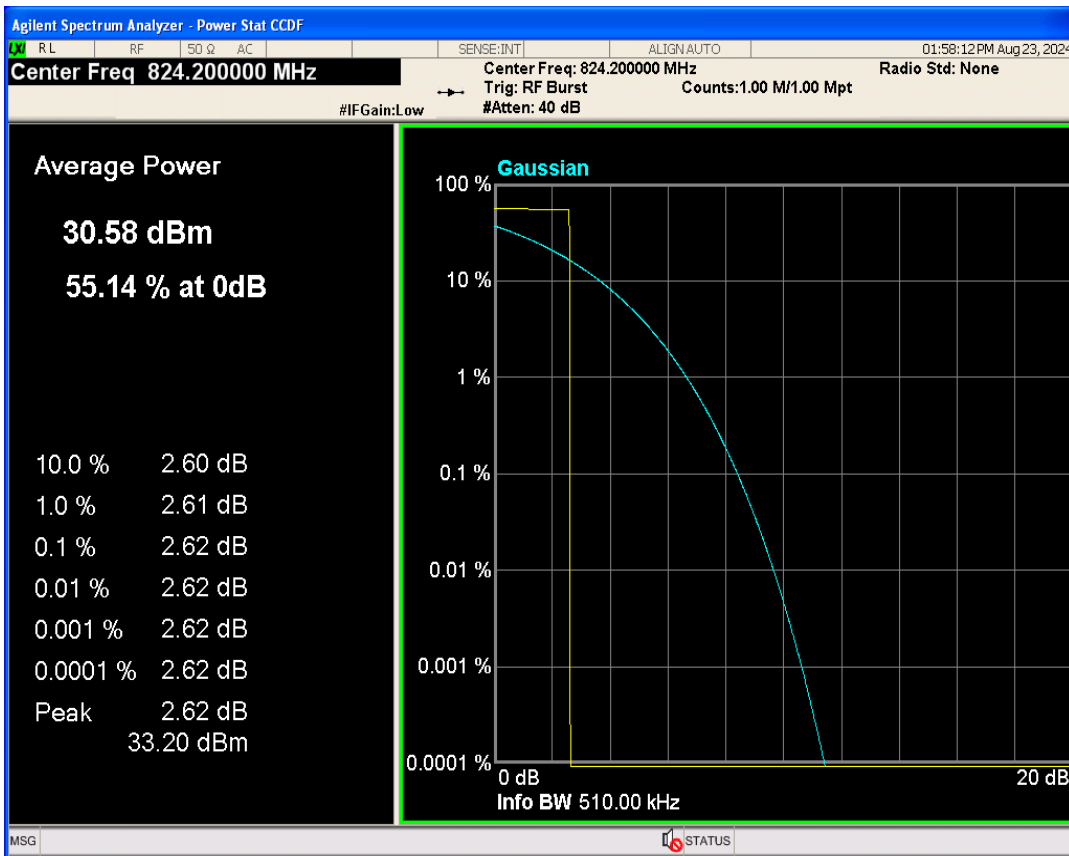

GSM850 Channel=189

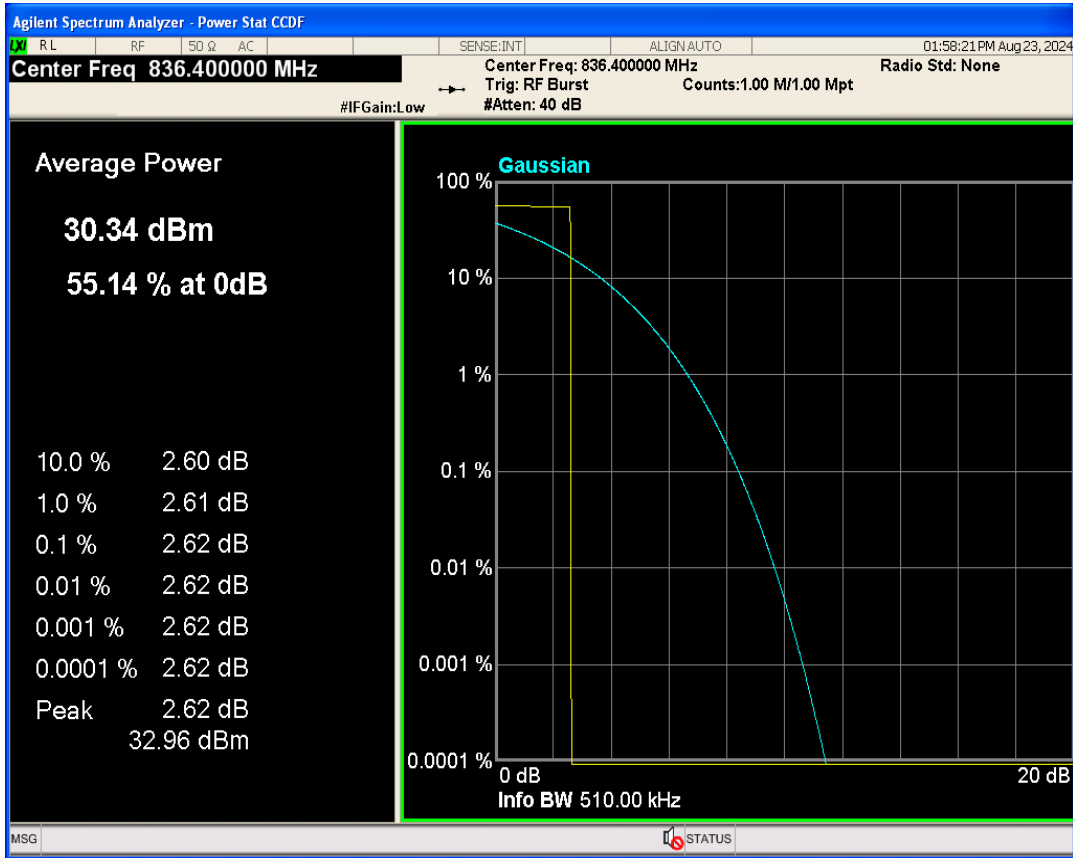


GSM850 Channel=251

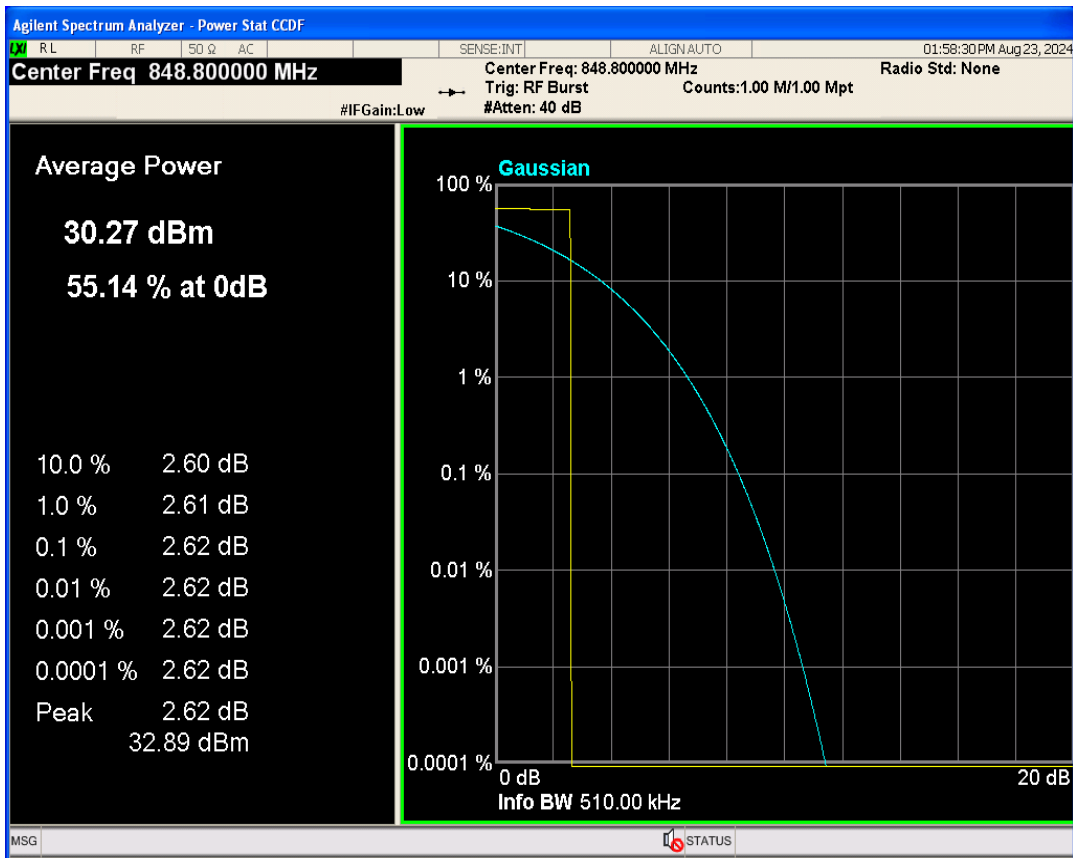


04 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GSM1900	512	1850.2	250.109	320.846	PASS
GSM1900	661	1880	246.172	311.382	PASS
GSM1900	810	1909.8	248.859	309.784	PASS
GSM850	128	824.2	248.098	317.210	PASS
GSM850	189	836.4	243.784	315.159	PASS
GSM850	251	848.8	247.394	311.611	PASS


GSM1900 Channel=512

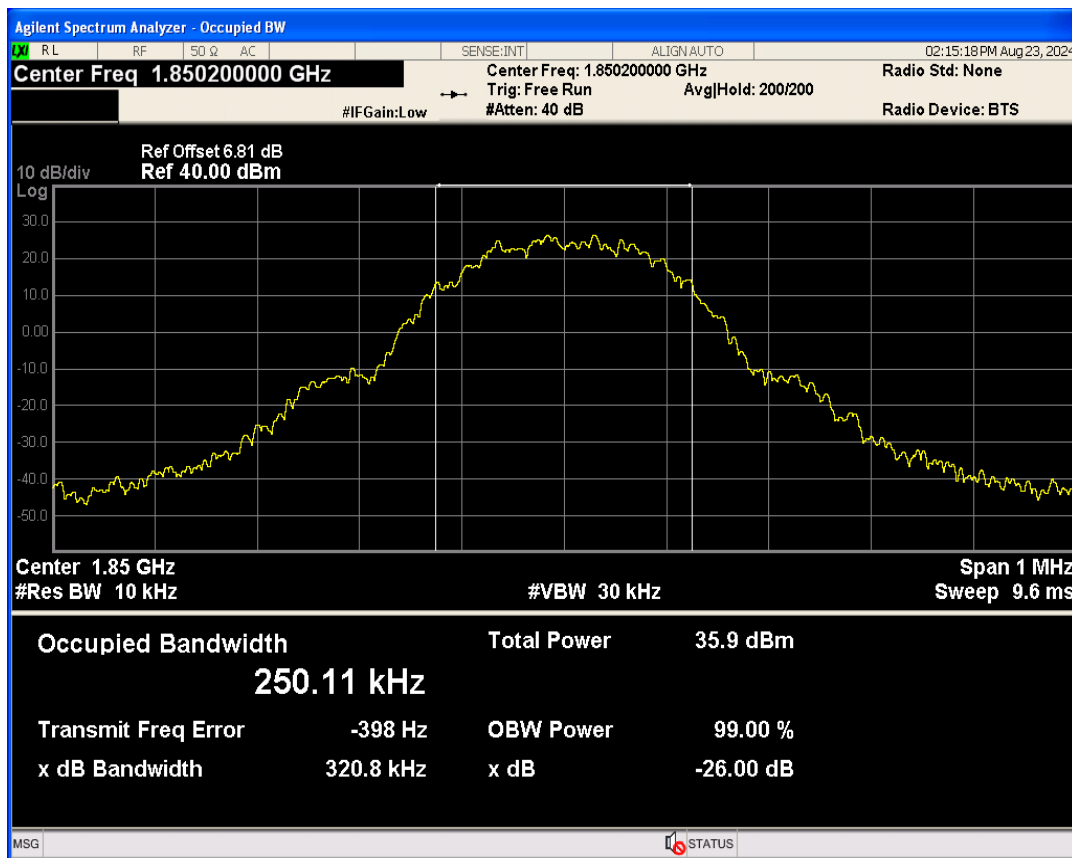


GSM1900 Channel=810

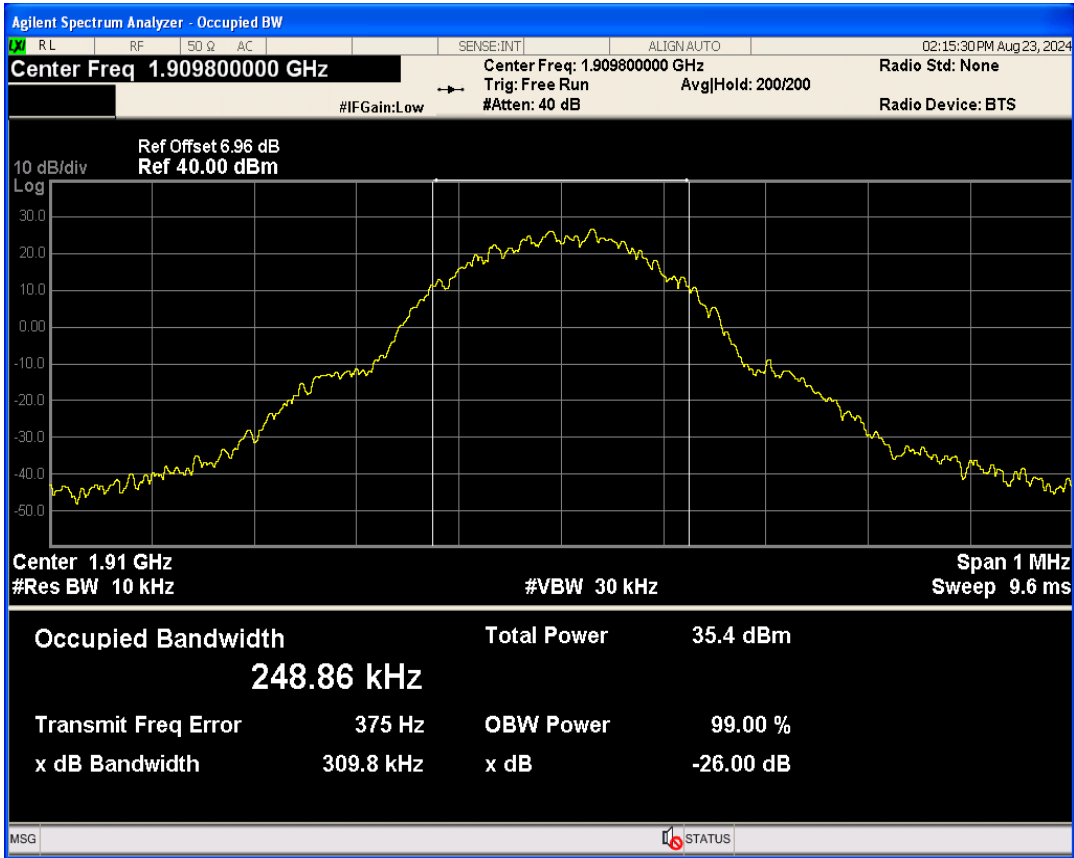


GSM1900 Channel=661

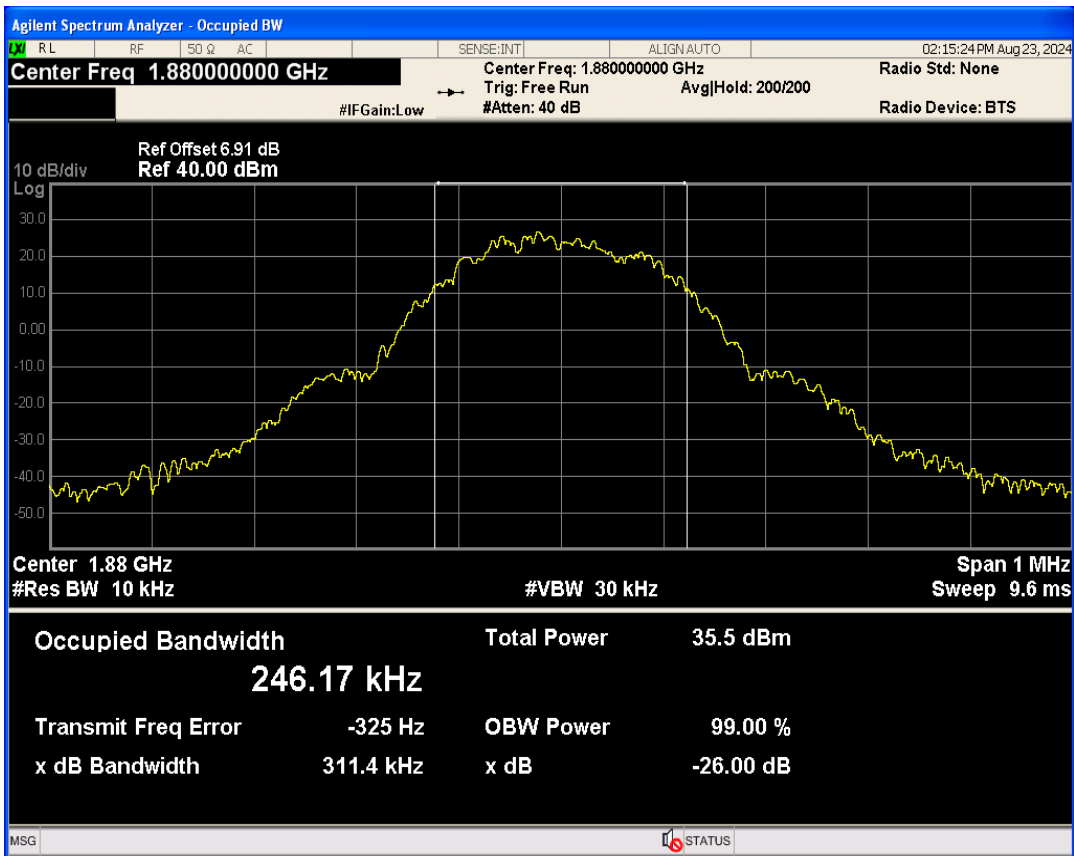


GSM850 Channel=128

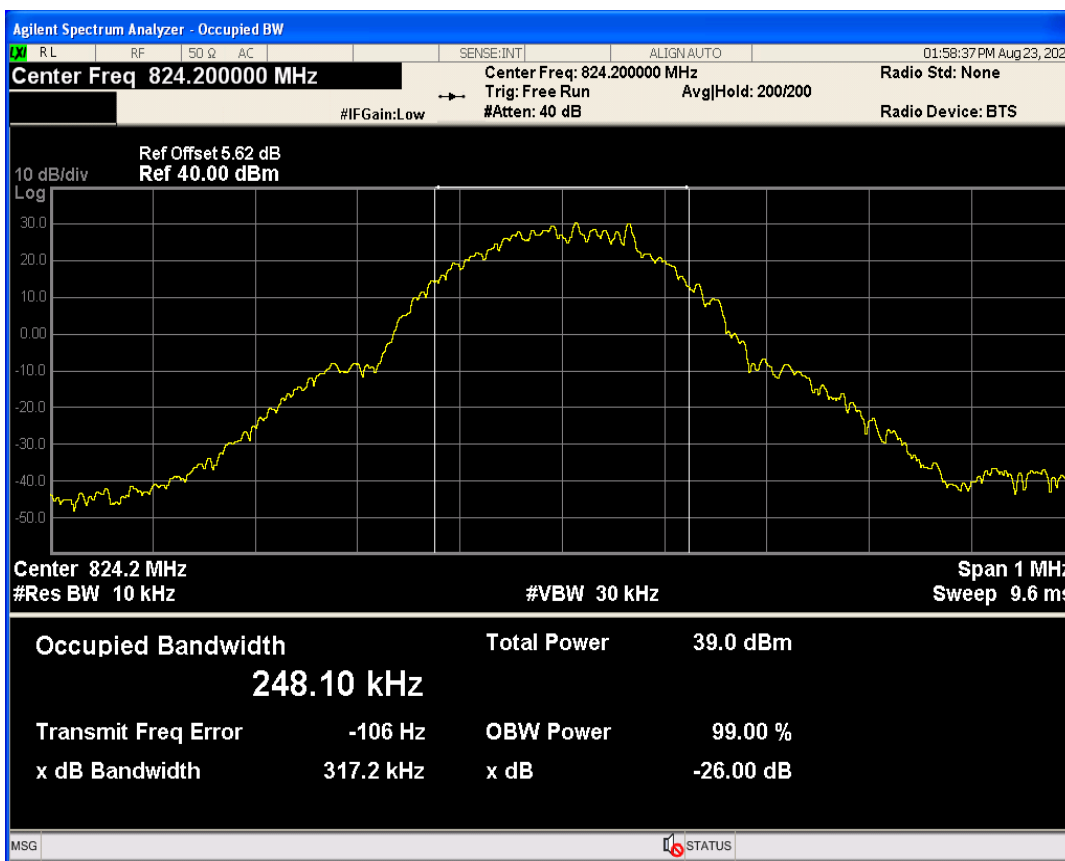

GSM850 Channel=189

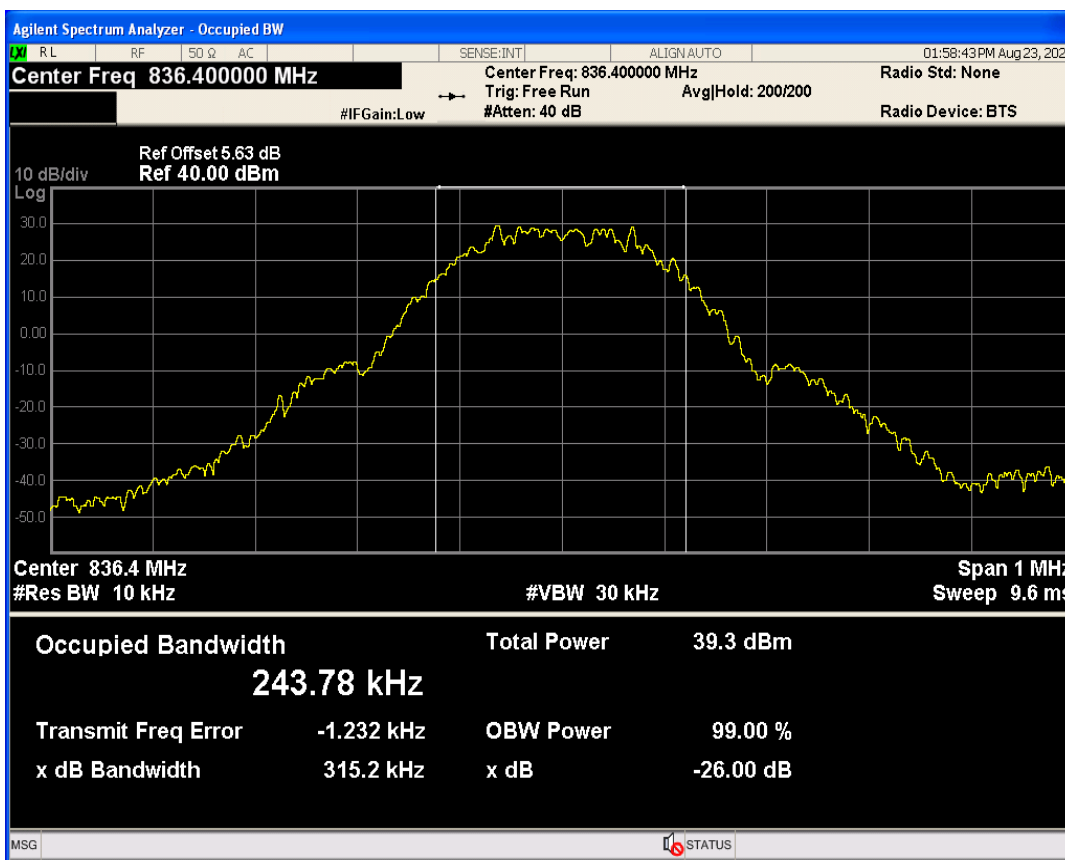


GSM850 Channel=251

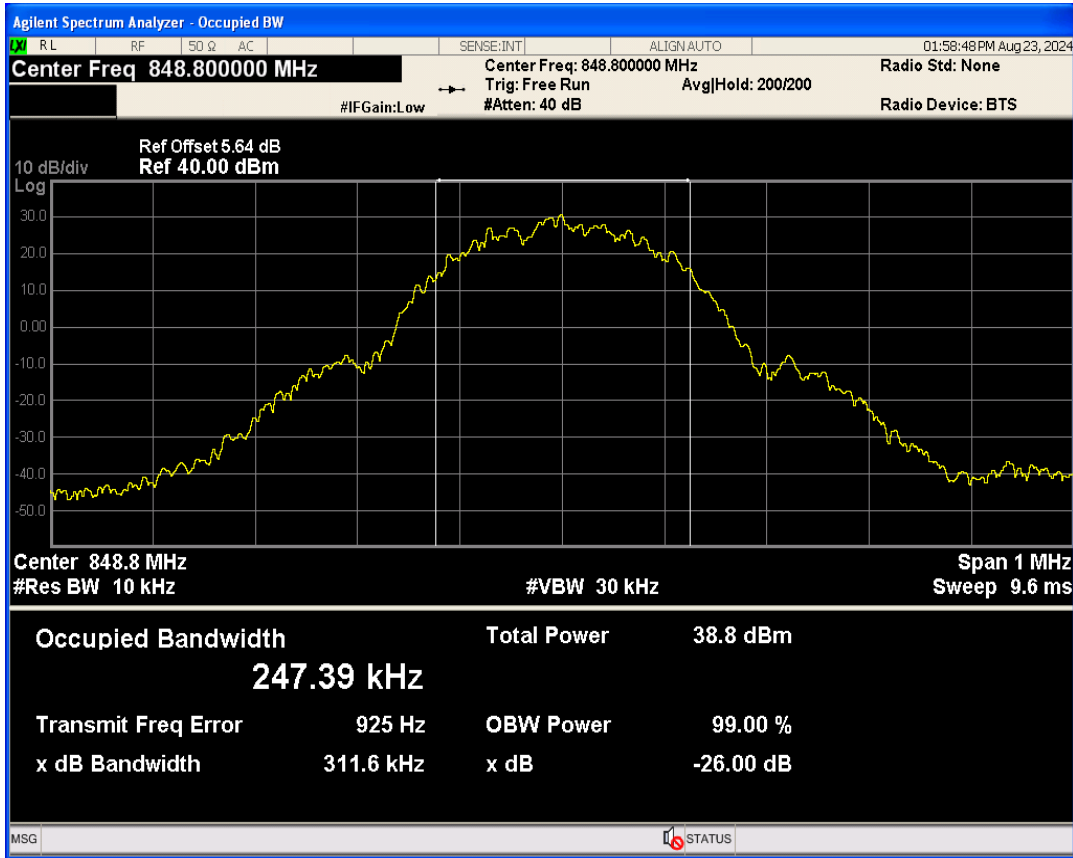


05 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	1849.98	-30.43	-13	PASS
GSM1900	810	1909.8	1910.02	-29.73	-13	PASS
GSM850	128	824.2	823.97	-26.56	-13	PASS
GSM850	251	848.8	849.02	-27.61	-13	PASS


GSM1900 Channel=512

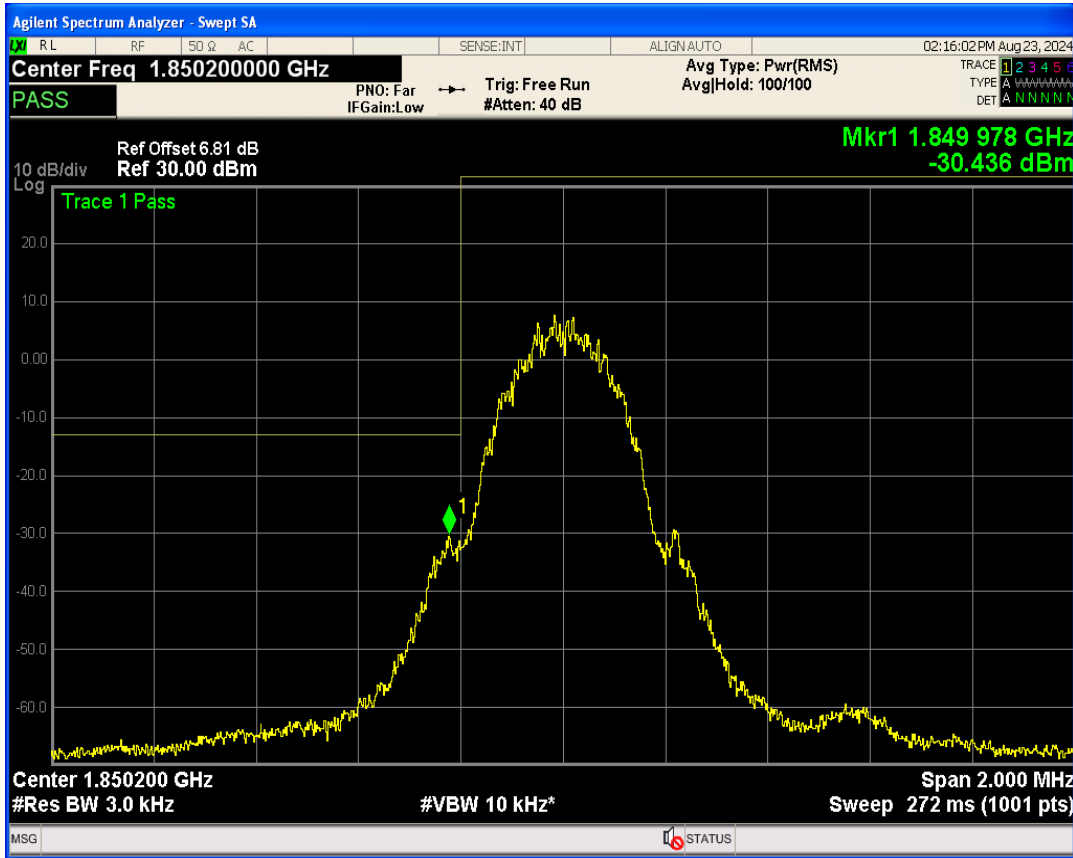


GSM1900 Channel=810

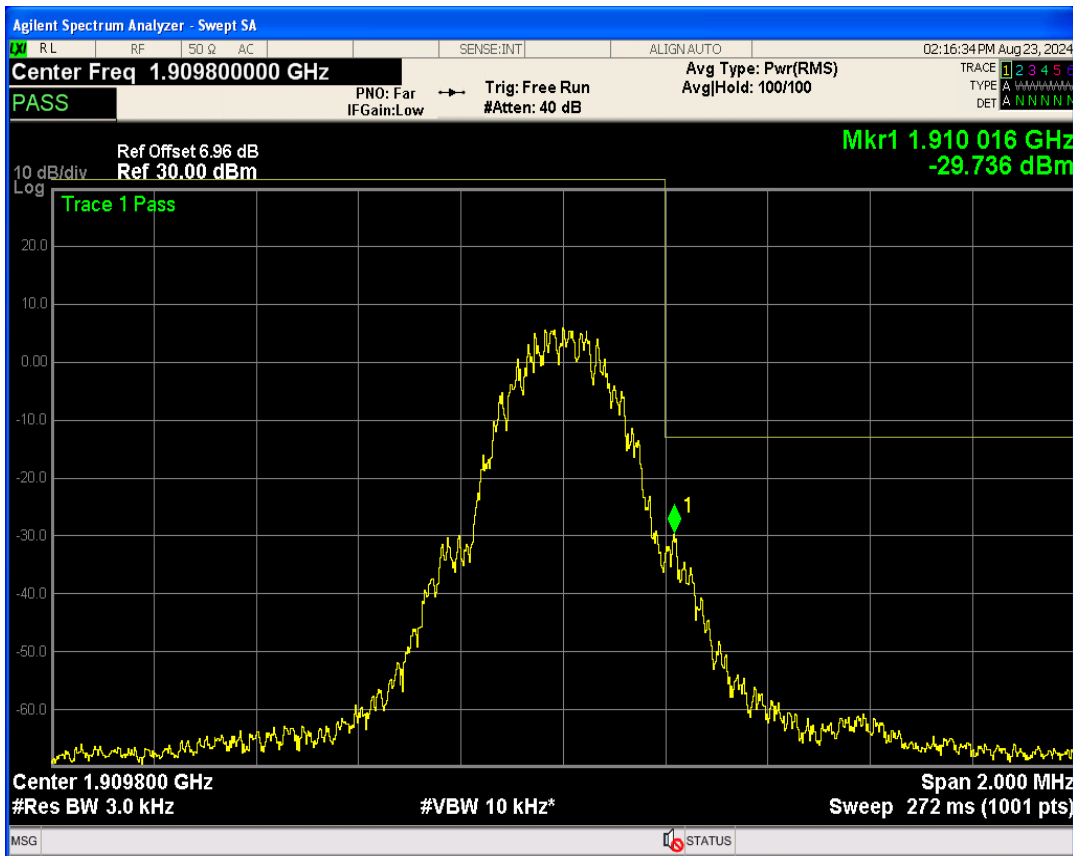

GSM850 Channel=128

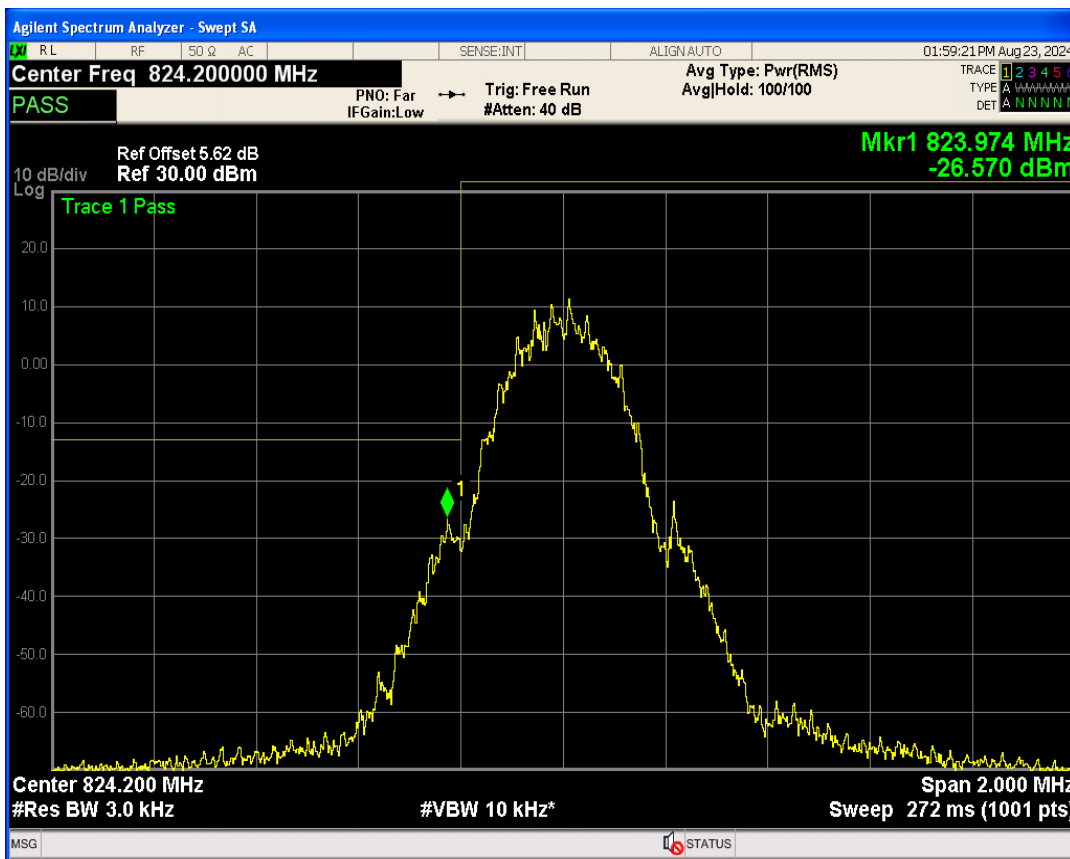


GSM850 Channel=251

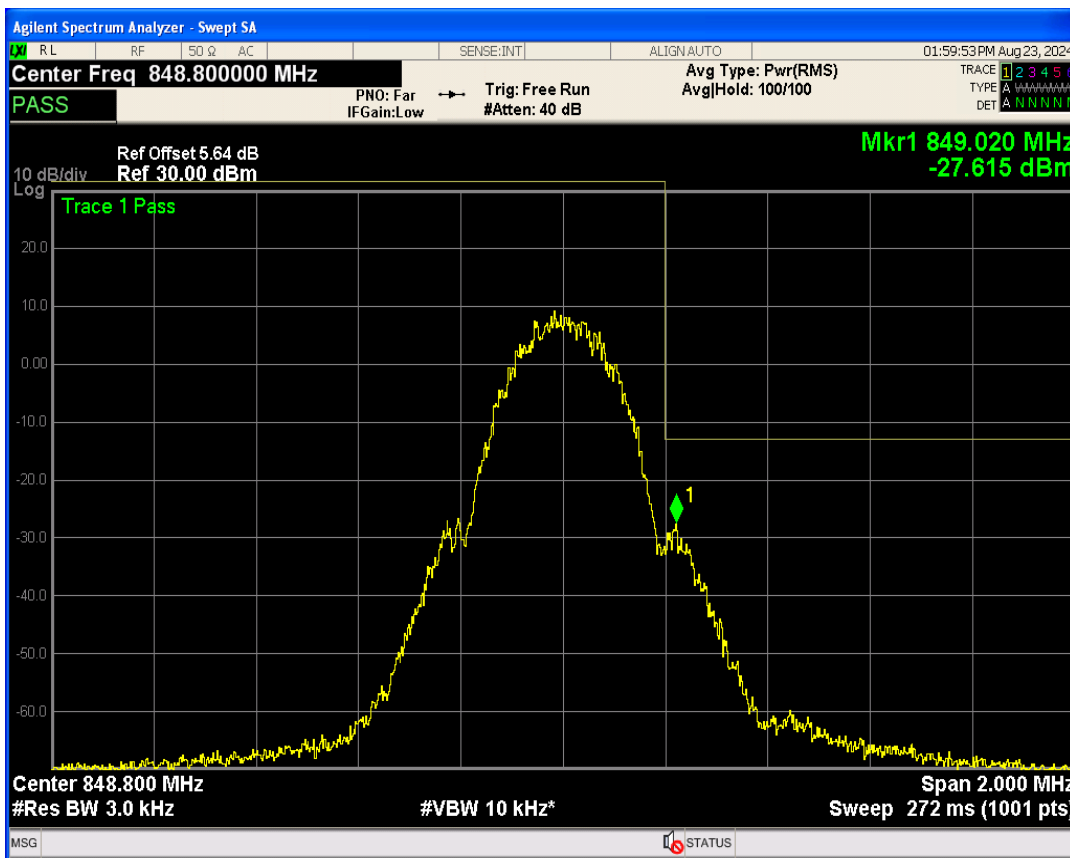


06 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	26168.46	-19.24	-13	PASS
GSM1900	661	1880	25959.35	-18.86	-13	PASS
GSM1900	810	1909.8	26142.66	-18.44	-13	PASS
GSM850	128	824.2	25926.26	-19.74	-13	PASS
GSM850	189	836.4	25976.56	-20.29	-13	PASS
GSM850	251	848.8	25960.01	-20.28	-13	PASS


GSM1900 Channel=512

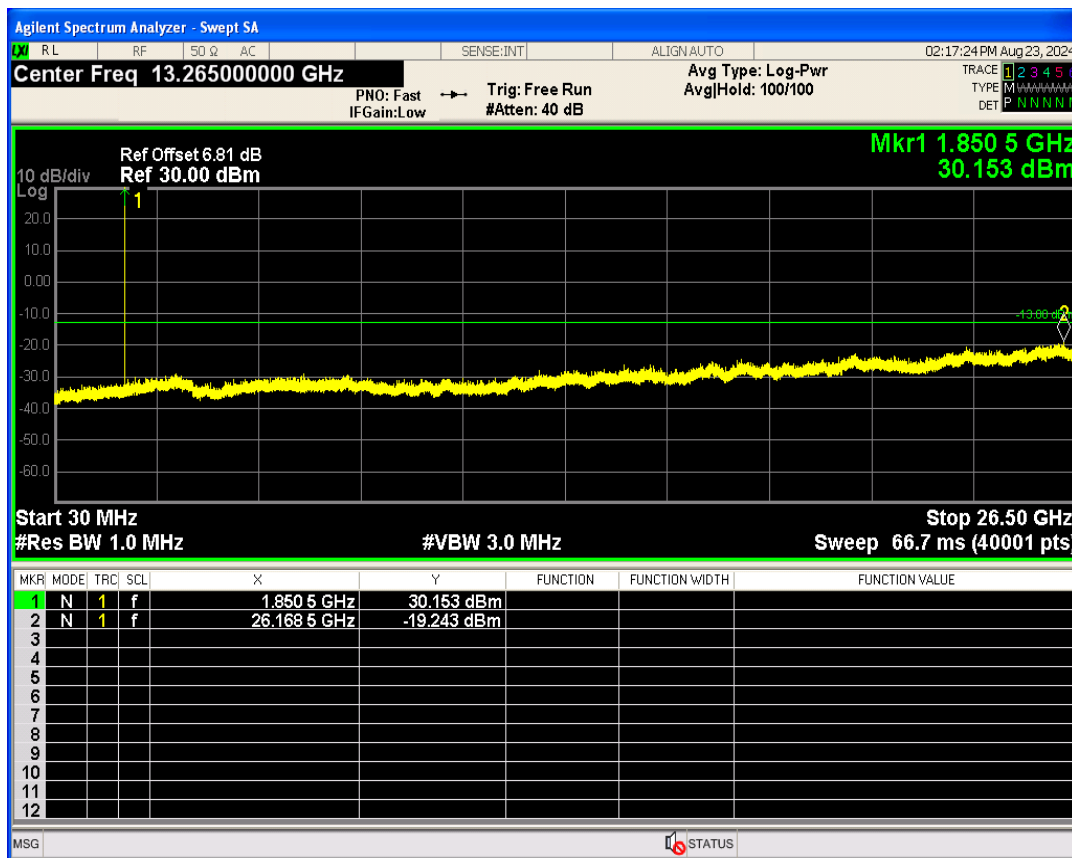


GSM1900 Channel=661

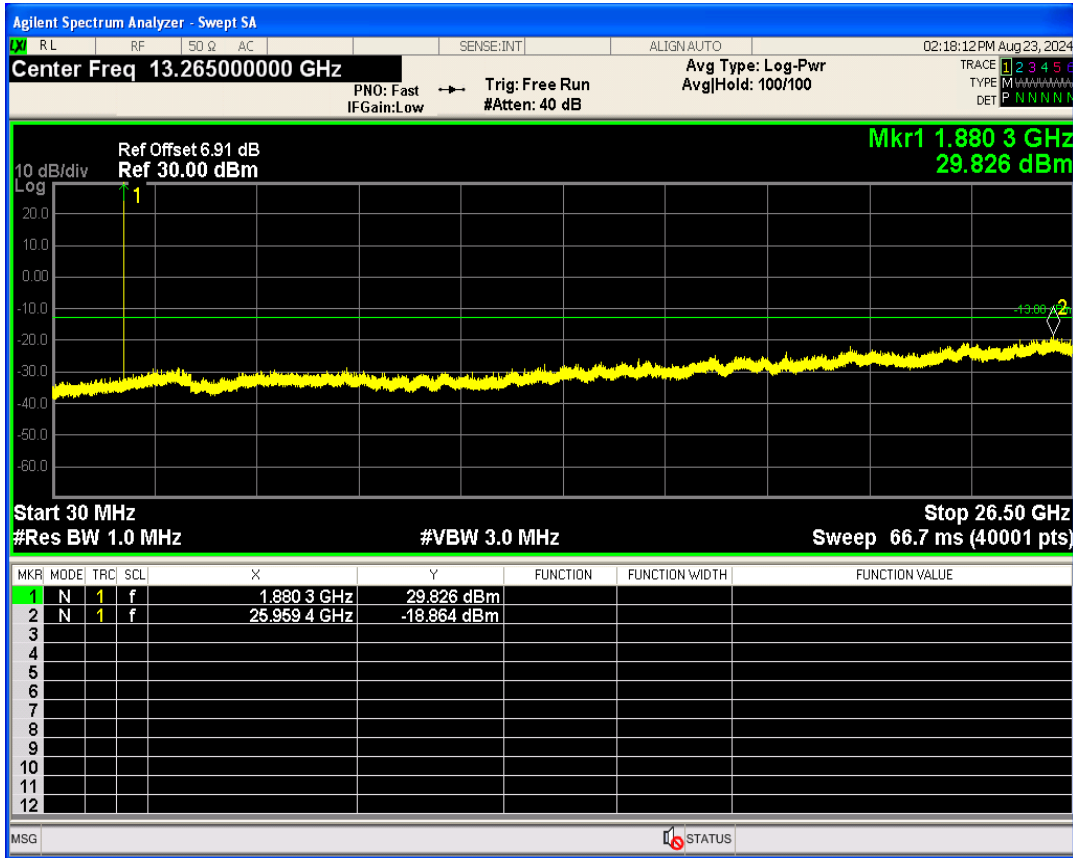


GSM1900 Channel=810

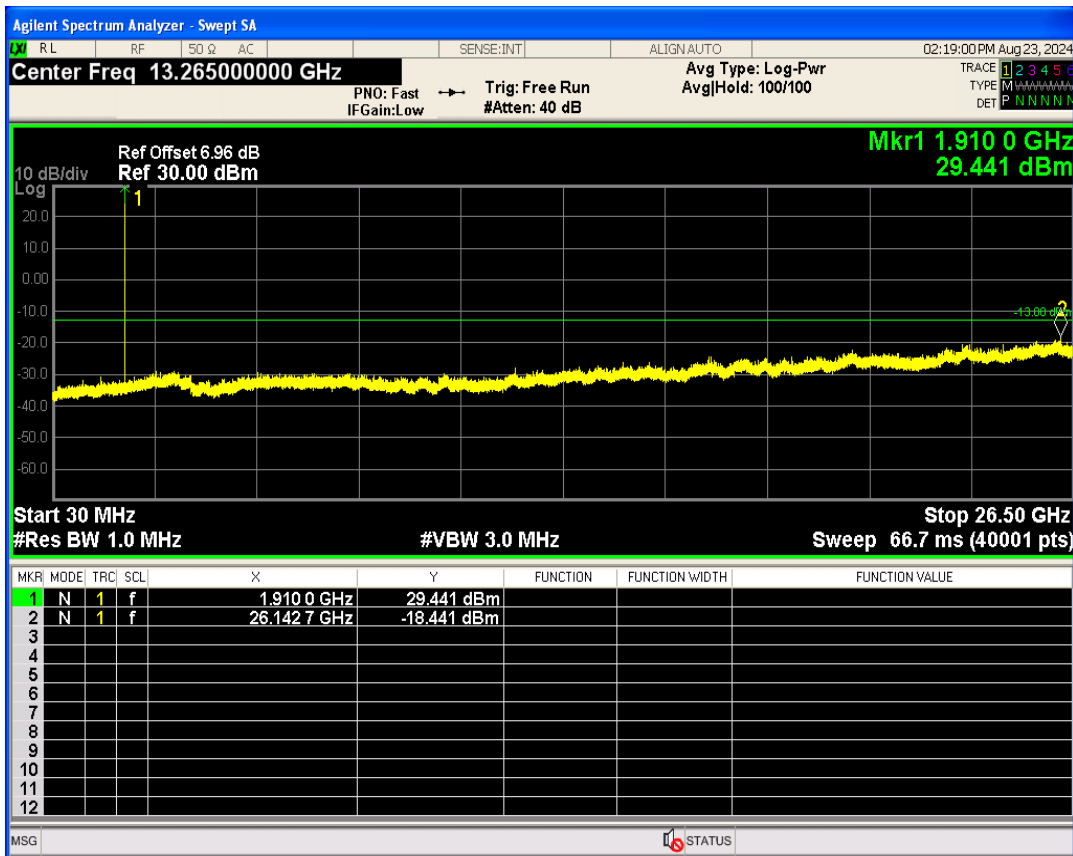

GSM850 Channel=128

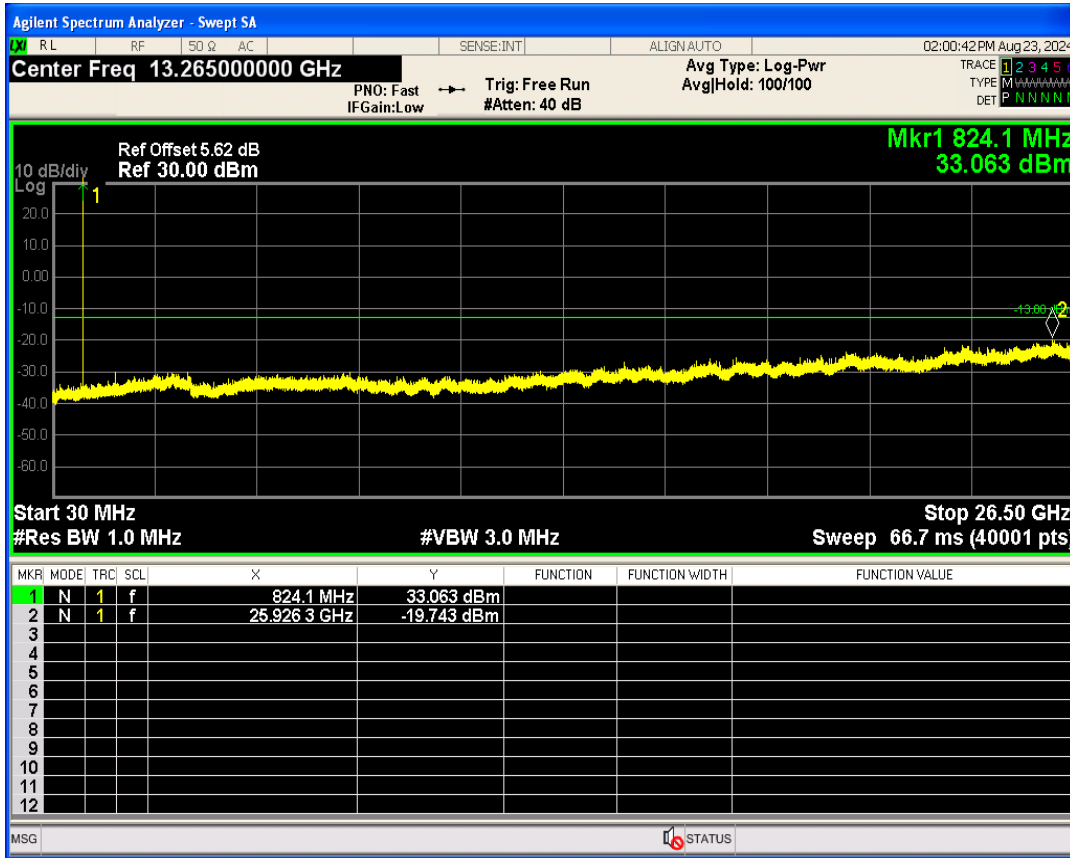

GSM850 Channel=189

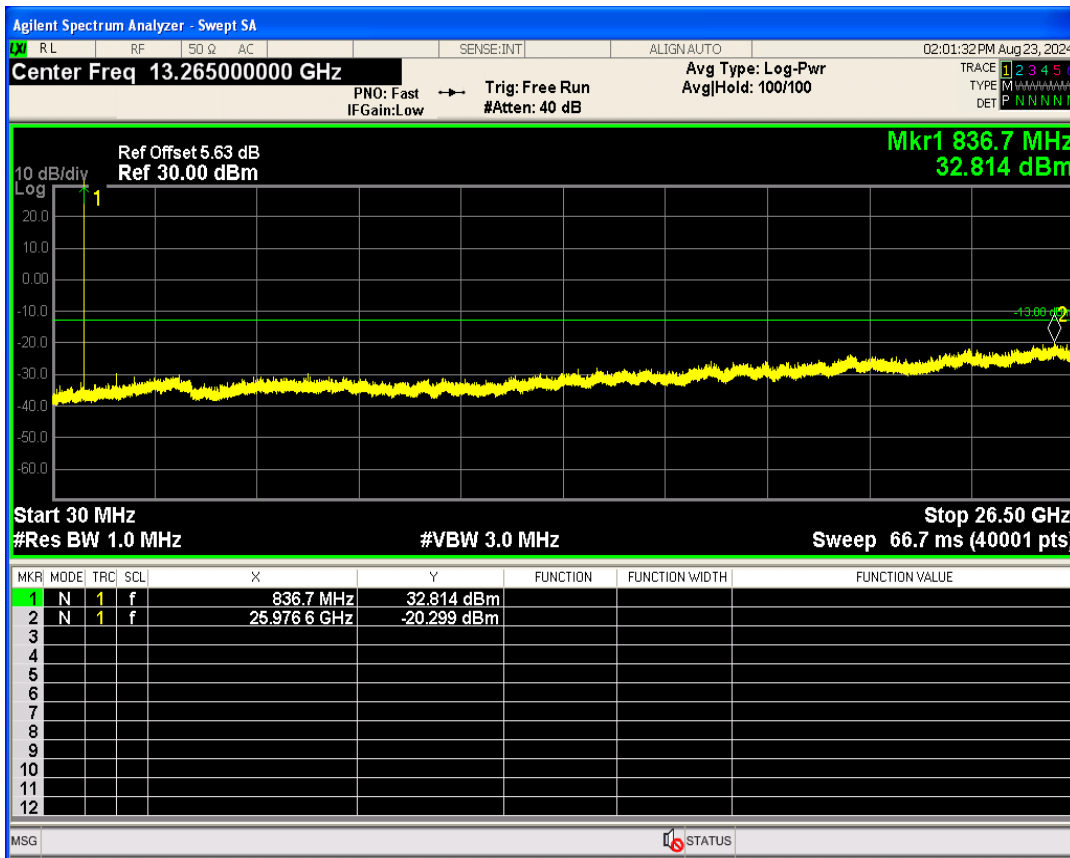

GSM850 Channel=251

