



Full Spectrum

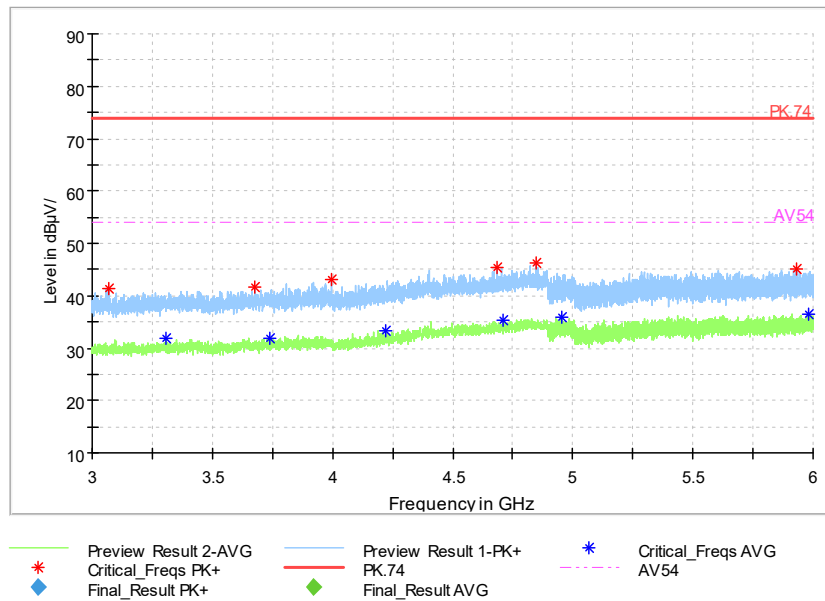


Frequency Range: 3GHz-6GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

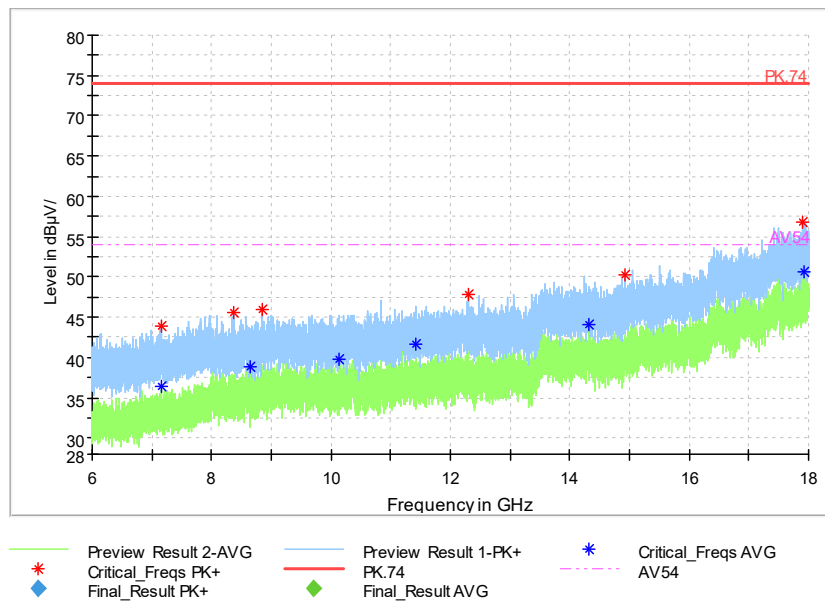

Frequency Range: 6GHz-18GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

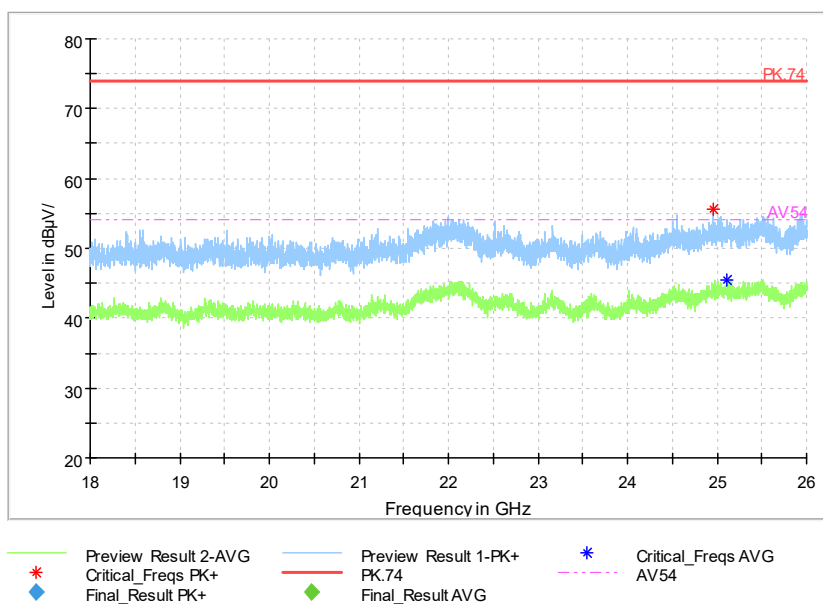

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK


AC Power line Conducted Emission

A "reference path loss" Corr.(dB) is established and the $L_{\text{cable}} + \text{ATT} + \text{VDF}$ is the attenuation of "reference path loss", and including the cable loss, the attenuation of the attenuator, the voltage division factor of AMN.

The measurement results are obtained as described below:

$$P_{\text{result}} = P_{\text{mea}} + \text{Corr. (dB)}$$

Sample calculation: $(41.79 \text{ dB}\mu\text{V}) = (12.09 \text{ dB}\mu\text{V}) + (29.7 \text{ dB})$, the corresponding frequency is 0.226757MHz.

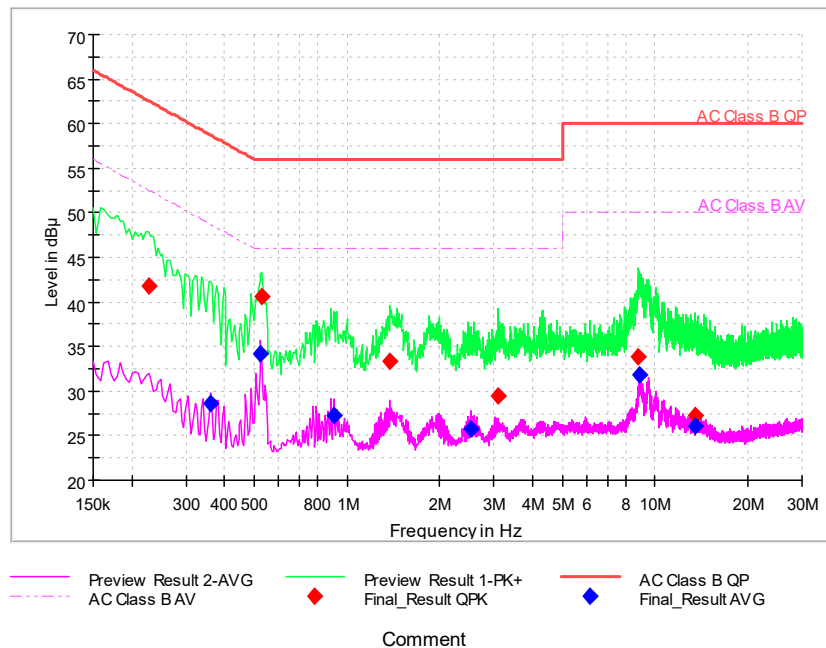

L+N Line

MEASUREMENT RESULT:

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)	Pmea QuasiPeak (dBμV)	Pmea Average (dBμV)
0.226757	41.79	---	62.57	20.78	N	29.7	12.09	---
0.35895	---	28.65	48.75	20.1	N	29.7	---	-1.05
0.525257	---	34.13	46	11.87	N	29.7	---	4.43
0.529521	40.59	---	56	15.41	N	29.7	10.89	---
0.904779	---	27.27	46	18.73	N	29.7	---	-2.43
1.378114	33.37	---	56	22.63	N	29.8	3.57	---
2.516679	---	25.72	46	20.28	N	29.8	---	-4.08
3.083829	29.5	---	56	26.5	N	29.8	-0.3	---
8.849143	33.9	---	60	26.1	L1	29.9	4	---
8.934429	---	31.83	50	18.17	N	29.9	---	1.93
13.437514	---	26.01	50	23.99	N	29.9	---	-3.89
13.454571	27.27	---	60	32.73	N	29.9	-2.63	---

---End of Test Report---