



RF Conducted Spurious Emissions

Antenna 0


IEEE 802.11n HT20

Channel 1 / 2412 MHz

Antenna 0



IEEE 802.11n HT40

Channel 3 / 2422 MHz

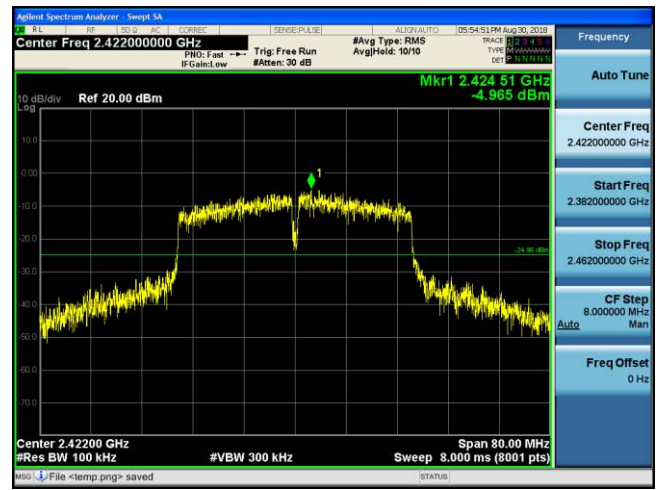



2392 MHz – 2432 MHz

2382 MHz – 2462 MHz

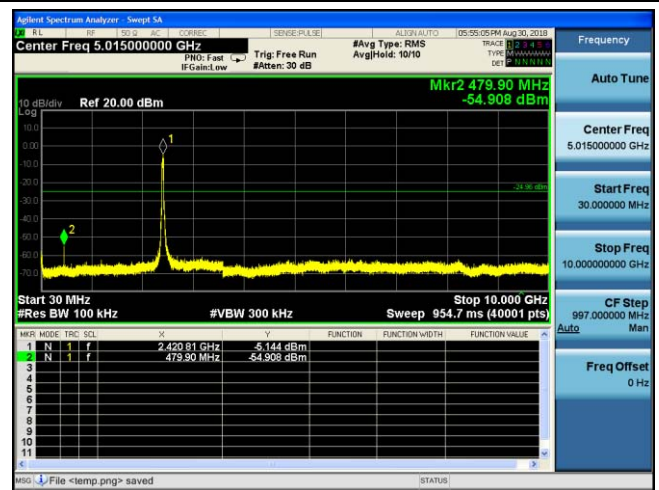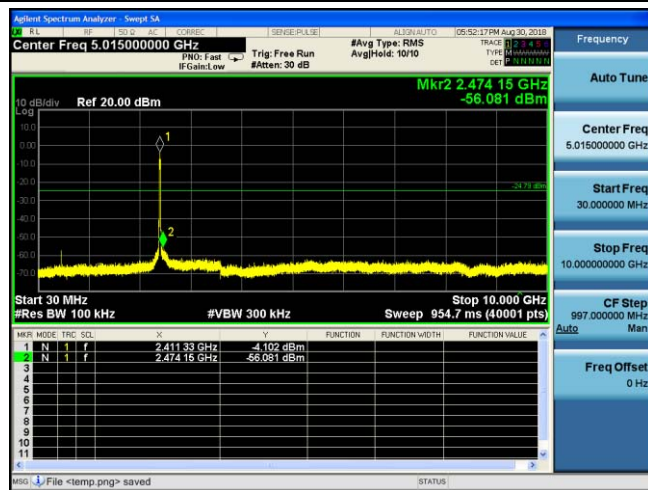

30 MHz – 10 GHz

30 MHz – 10 GHz

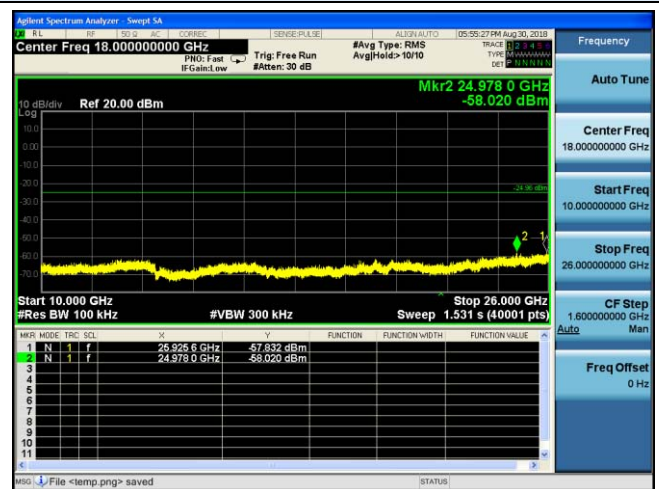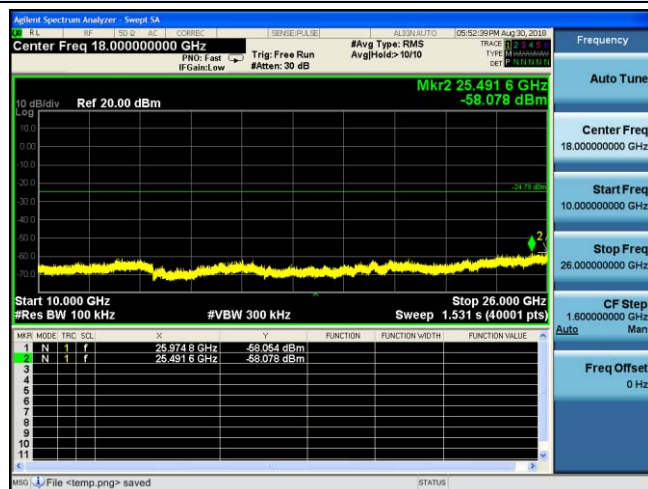

10 GHz – 26 GHz

10 GHz – 26 GHz



RF Conducted Spurious Emissions

Antenna 0


IEEE 802.11n HT20

Channel 6 / 2437 MHz

Antenna 0



IEEE 802.11n HT40

Channel 6 / 2437 MHz

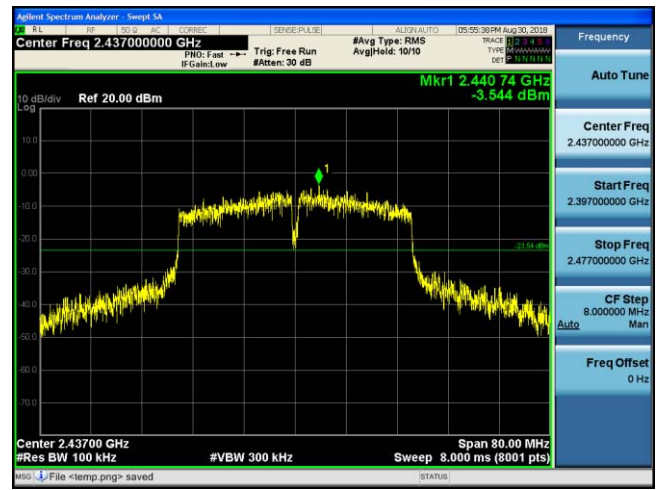



2417 MHz – 2457 MHz

2397 MHz – 2477 MHz

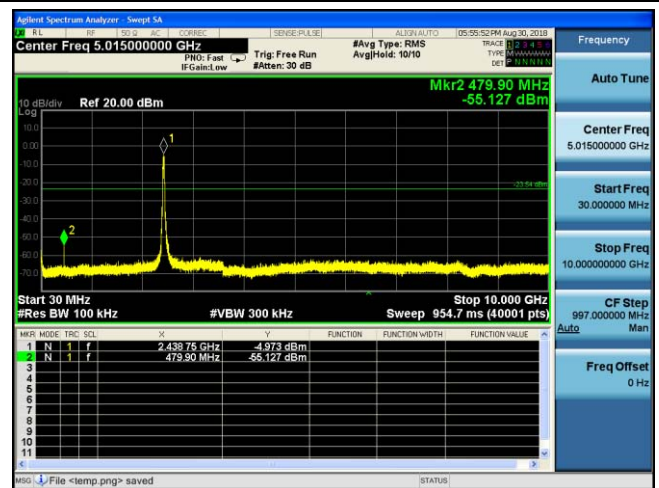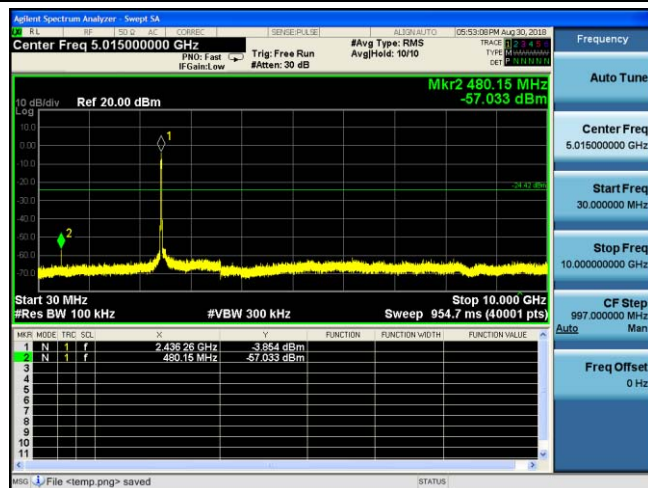

30 MHz – 10 GHz

30 MHz – 10 GHz

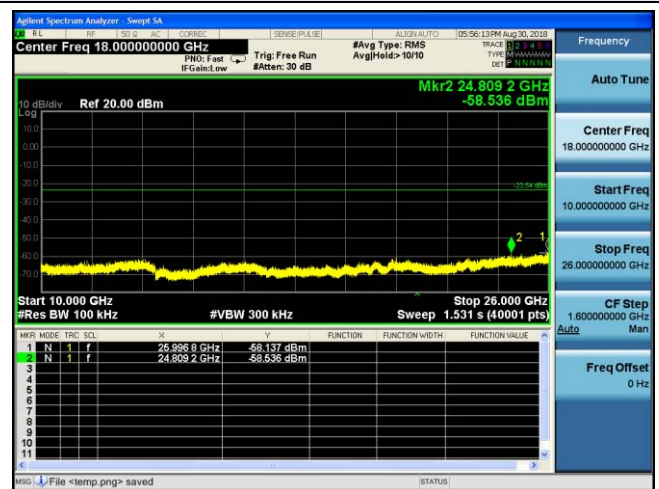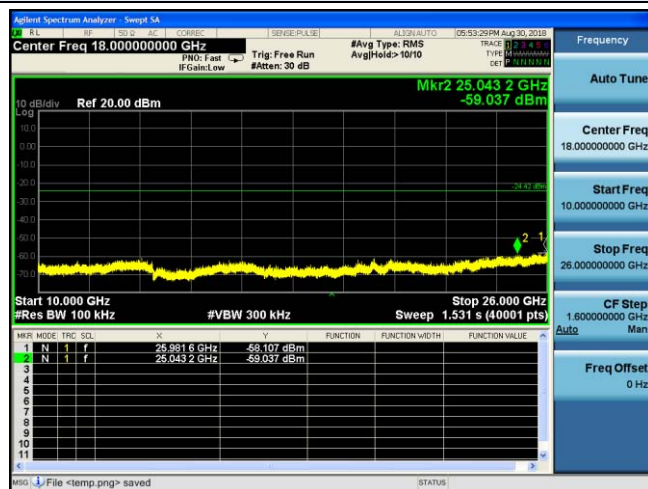

10 GHz – 26 GHz

10 GHz – 26 GHz



RF Conducted Spurious Emissions

Antenna 0

IEEE 802.11n HT20

Channel 11 / 2462 MHz

Antenna 0



IEEE 802.11n HT40

Channel 9 / 2452 MHz





2442 MHz – 2482 MHz

2412 MHz – 2492 MHz

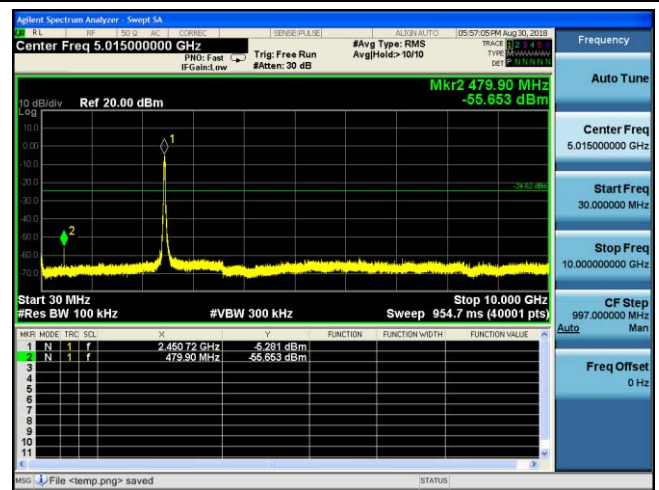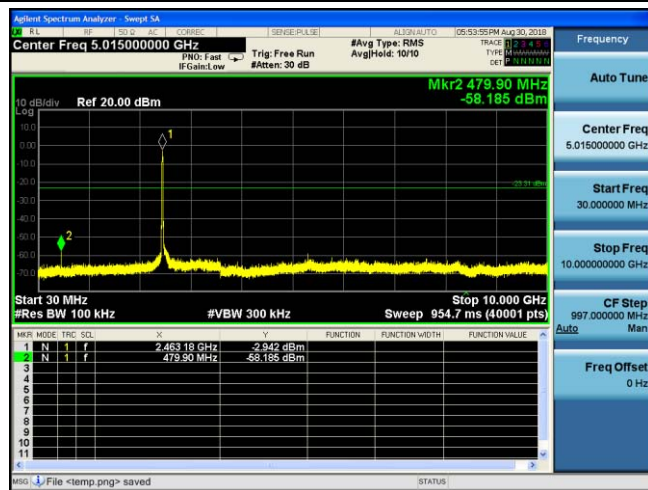

30 MHz – 10 GHz

30 MHz – 10 GHz

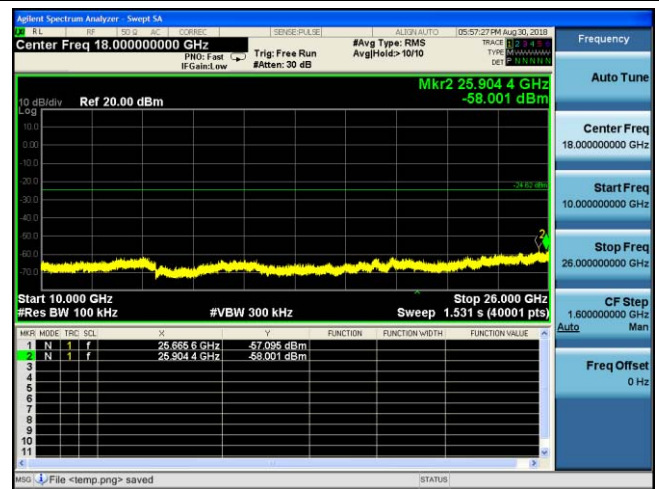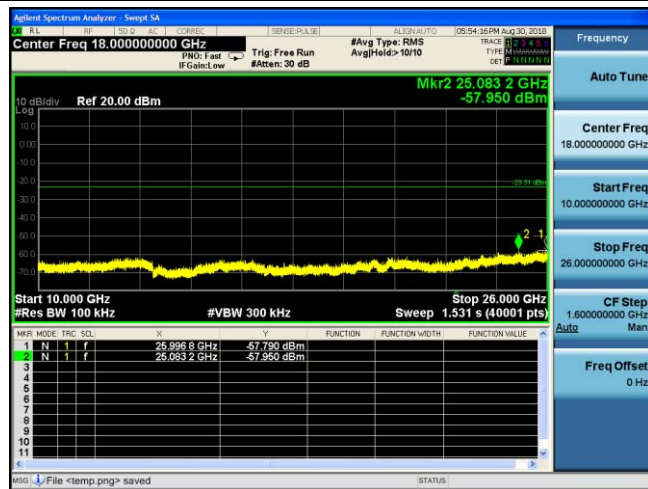

10 GHz – 26 GHz

10 GHz – 26 GHz



RF Conducted Spurious Emissions

Antenna 1


IEEE 802.11b

Channel 1 / 2412 MHz

Antenna 1



IEEE 802.11g

Channel 1 / 2412 MHz

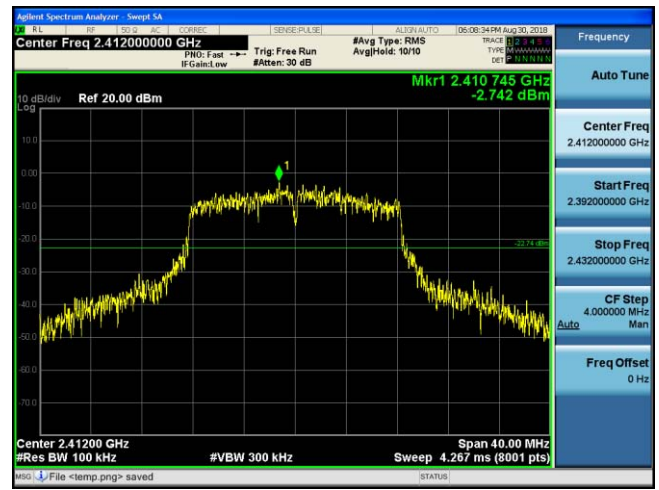



2392 MHz – 2432 MHz

2392 MHz – 2432 MHz

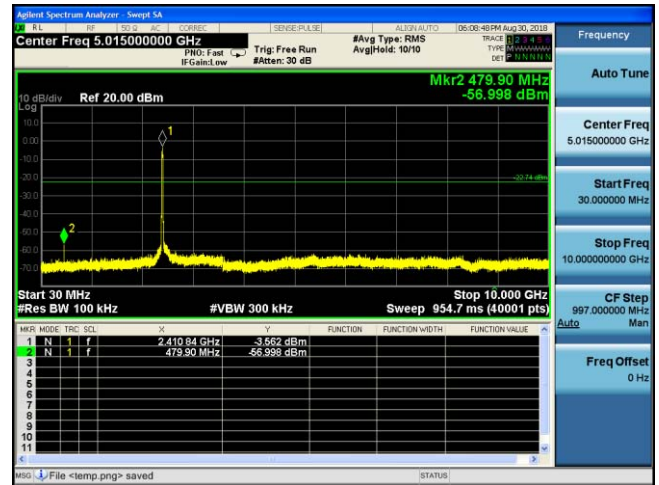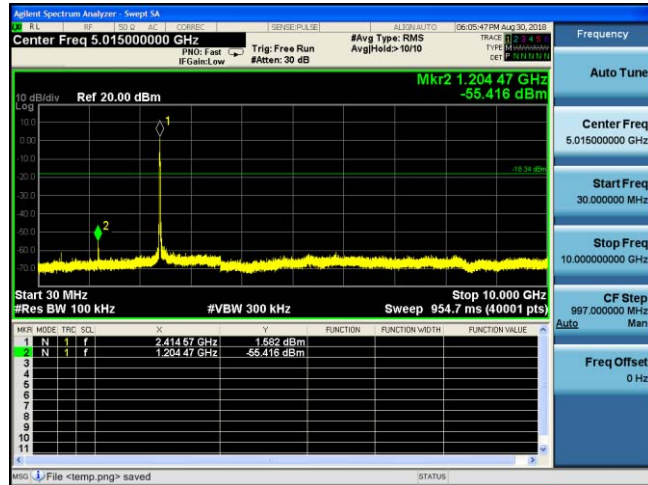

30 MHz – 10 GHz

30 MHz – 10 GHz

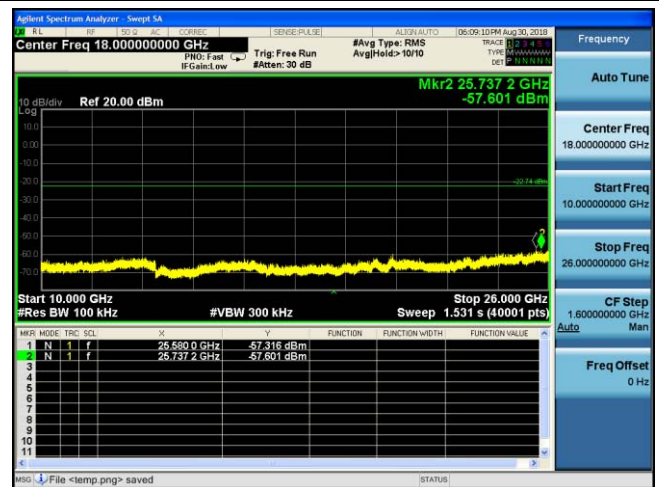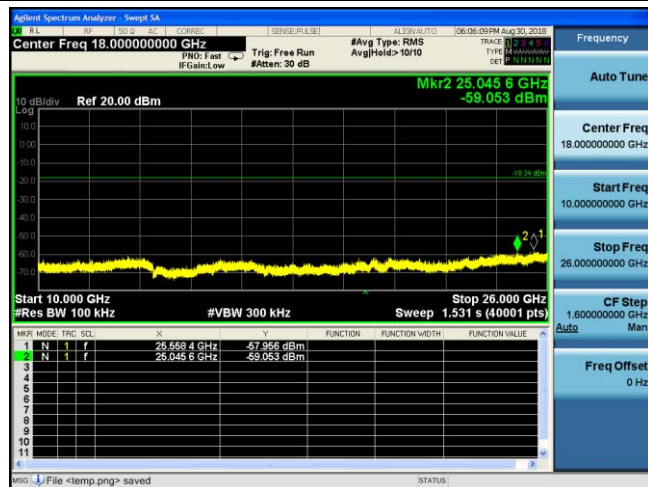

10 GHz – 26 GHz

10 GHz – 26 GHz




RF Conducted Spurious Emissions

| <p style="text-align: center;">Antenna 1 IEEE 802.11b Channel 6 / 2437 MHz</p> | <p style="text-align: center;">Antenna 1 IEEE 802.11g Channel 6 / 2437 MHz</p> |
|---|---|
| | |
| 2417 MHz – 2457 MHz | |
| | |
| 30 MHz – 10 GHz | |
| | |
| 10 GHz – 26 GHz | |



RF Conducted Spurious Emissions

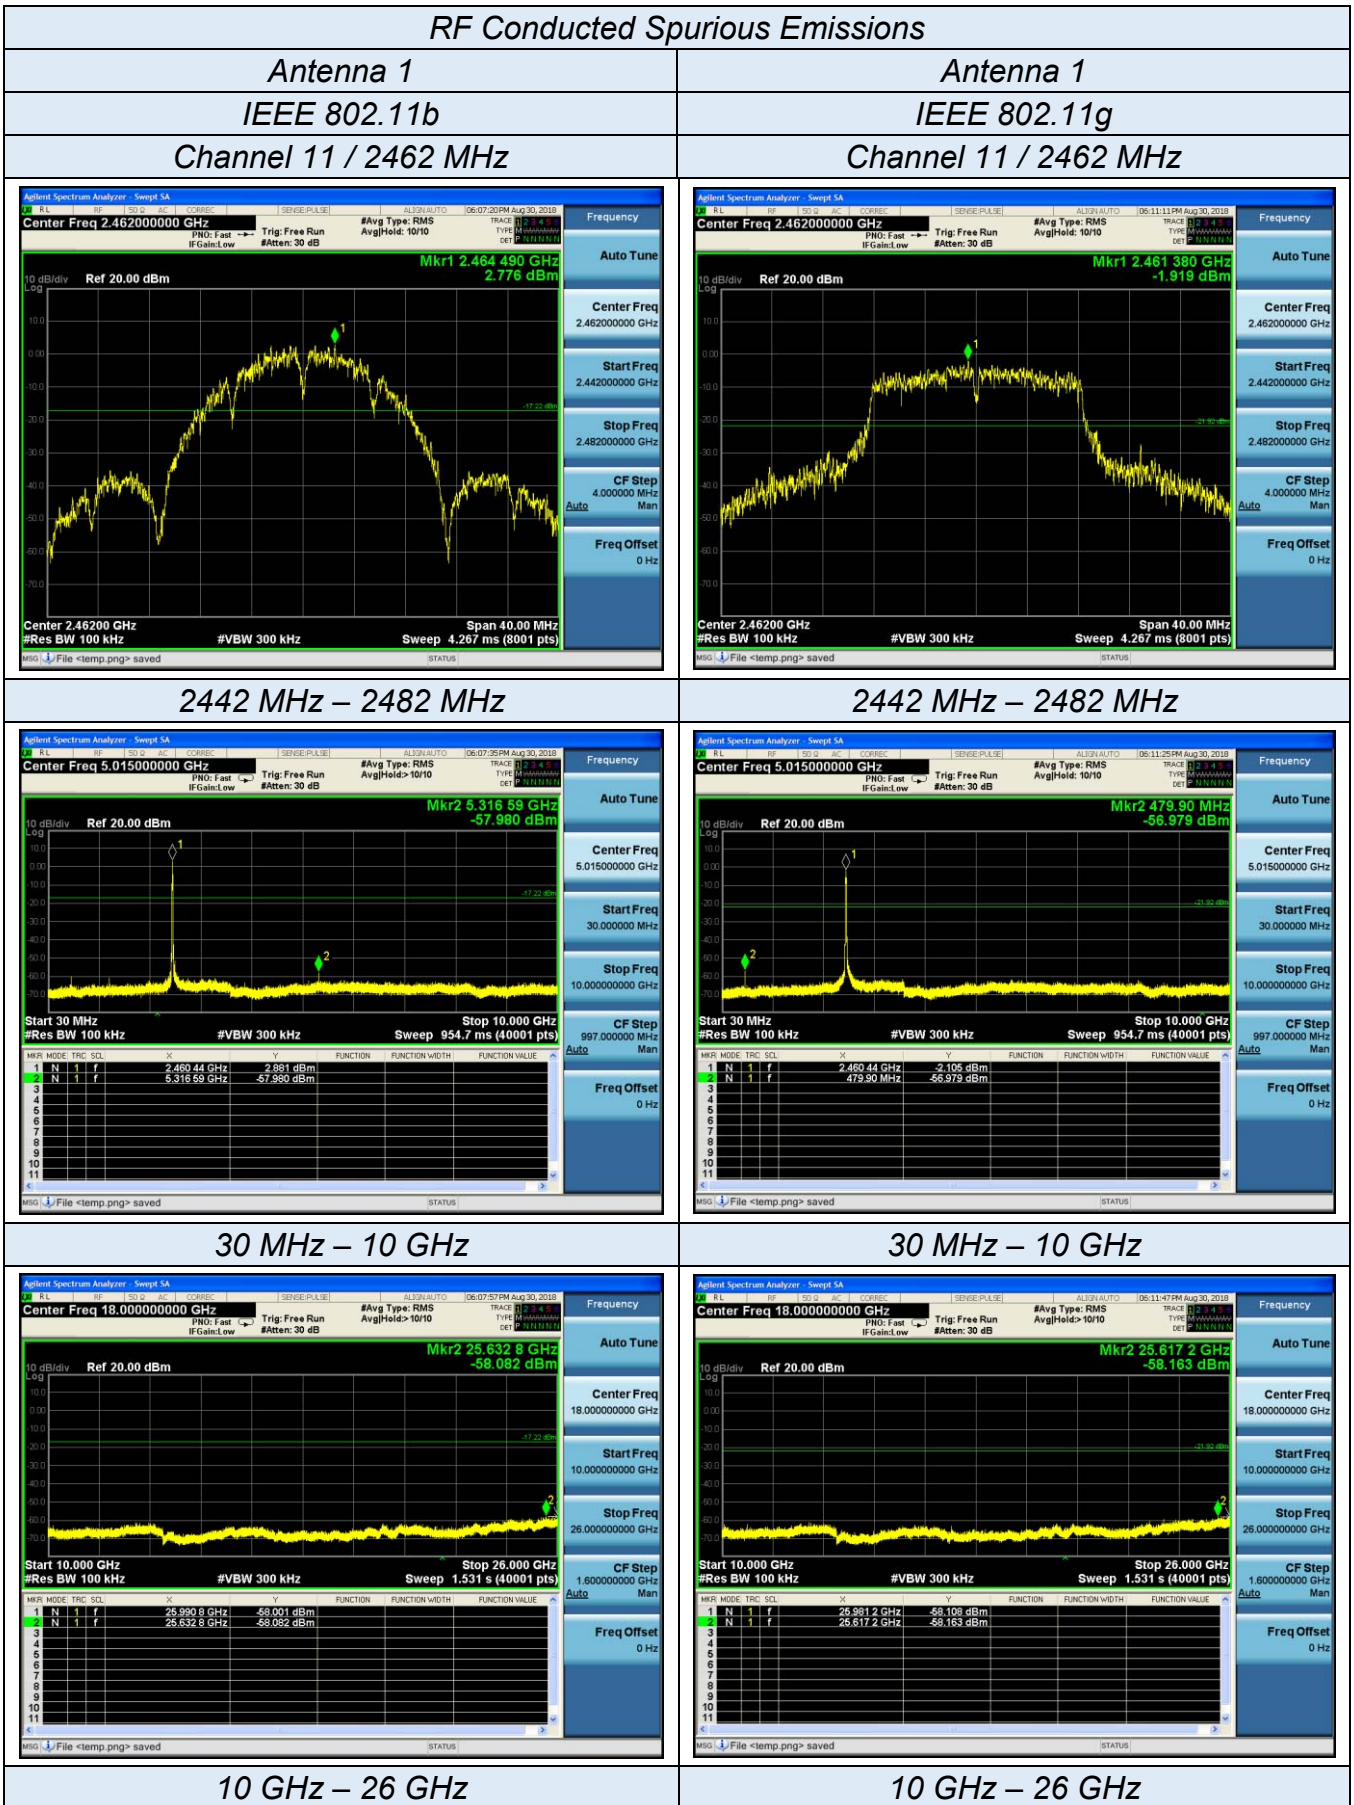



RF Conducted Spurious Emissions

| Antenna 1 IEEE 802.11n HT20 Channel 1 / 2412 MHz | Antenna 1 IEEE 802.11n HT40 Channel 3 / 2422 MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|------|-----|-------------|-------------|----------|----------------|----------------|----------------|---|---|---|---|-------------|-------------|--|--|--|---|---|---|---|-------------|-------------|--|--|--|---|-----|------|-----|-----|---|---|----------|----------------|----------------|---|---|---|---|-------------|-------------|--|--|--|---|---|---|---|-------------|-------------|--|--|--|
| <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Mkr1 2.414520 GHz -5.397 dBm Center Freq 2.41200000 GHz Start Freq 2.392000000 GHz Stop Freq 2.432000000 GHz CF Step 4.000000 MHz Sweep 4.267 ms (8001 pts)</p> | <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Mkr1 2.42639 GHz -4.315 dBm Center Freq 2.42200000 GHz Start Freq 2.382000000 GHz Stop Freq 2.462000000 GHz CF Step 8.000000 MHz Sweep 8.000 ms (8001 pts)</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2392 MHz – 2432 MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 5.01500000 GHz Mkr2 2.48312 GHz -55.545 dBm Start 30 MHz Stop 10.000 GHz Sweep 954.7 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.41133 GHz</td> <td>-4.629 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.48312 GHz</td> <td>-55.545 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.41133 GHz | -4.629 dBm | | | | 2 | N | 1 | f | 2.48312 GHz | -55.545 dBm | | | | <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 5.01500000 GHz Mkr2 479.90 MHz -64.902 dBm Start 30 MHz Stop 10.000 GHz Sweep 954.7 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.42330 GHz</td> <td>-4.701 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>479.90 MHz</td> <td>-64.902 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.42330 GHz | -4.701 dBm | | | | 2 | N | 1 | f | 479.90 MHz | -64.902 dBm | | | |
| MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 2.41133 GHz | -4.629 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 2.48312 GHz | -55.545 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 2.42330 GHz | -4.701 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 479.90 MHz | -64.902 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30 MHz – 10 GHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 18.00000000 GHz Mkr2 25.7700 GHz -57.374 dBm Start 10.000 GHz Stop 26.000 GHz Sweep 1.531 s (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>25.1084 GHz</td> <td>-56.790 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.7700 GHz</td> <td>-57.374 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 25.1084 GHz | -56.790 dBm | | | | 2 | N | 1 | f | 25.7700 GHz | -57.374 dBm | | | | <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 18.00000000 GHz Mkr2 25.1252 GHz -58.989 dBm Start 10.000 GHz Stop 26.000 GHz Sweep 1.531 s (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>25.9944 GHz</td> <td>-57.881 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.1252 GHz</td> <td>-58.989 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 25.9944 GHz | -57.881 dBm | | | | 2 | N | 1 | f | 25.1252 GHz | -58.989 dBm | | | |
| MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 25.1084 GHz | -56.790 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 25.7700 GHz | -57.374 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 25.9944 GHz | -57.881 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 25.1252 GHz | -58.989 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 GHz – 26 GHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



RF Conducted Spurious Emissions

Antenna 1



IEEE 802.11n HT20

Channel 6 / 2437 MHz

Antenna 1



IEEE 802.11n HT40

Channel 6 / 2437 MHz

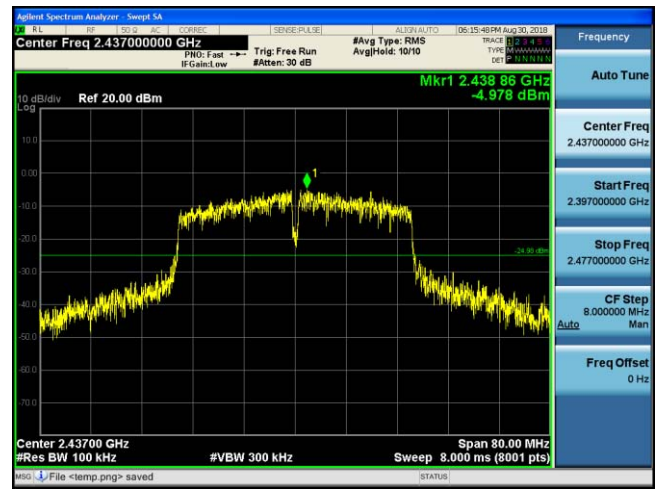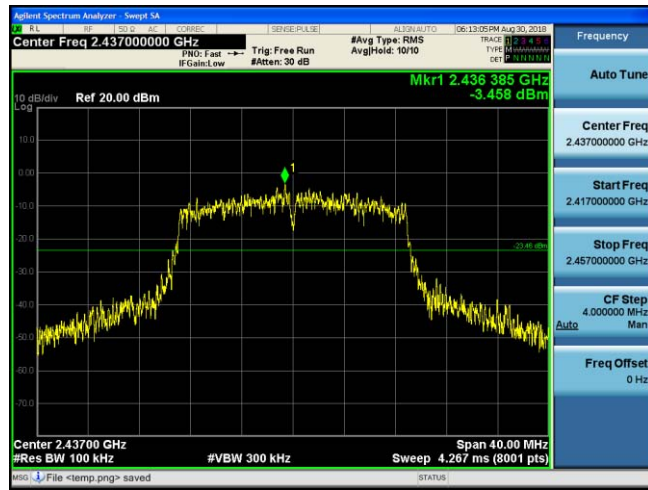



2417 MHz – 2457 MHz

2397 MHz – 2477 MHz

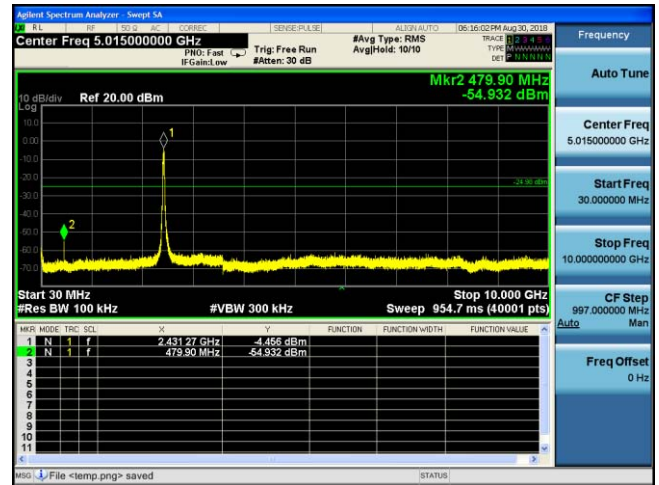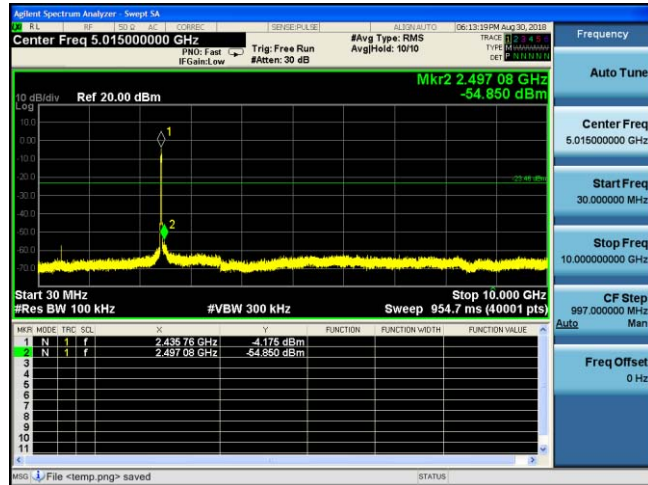

30 MHz – 10 GHz

30 MHz – 10 GHz

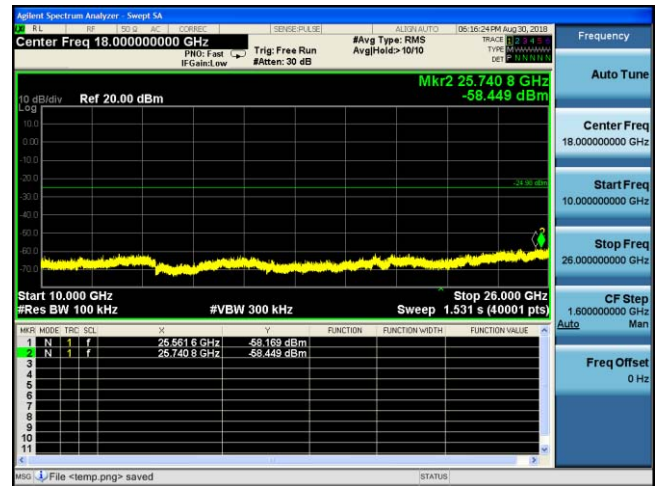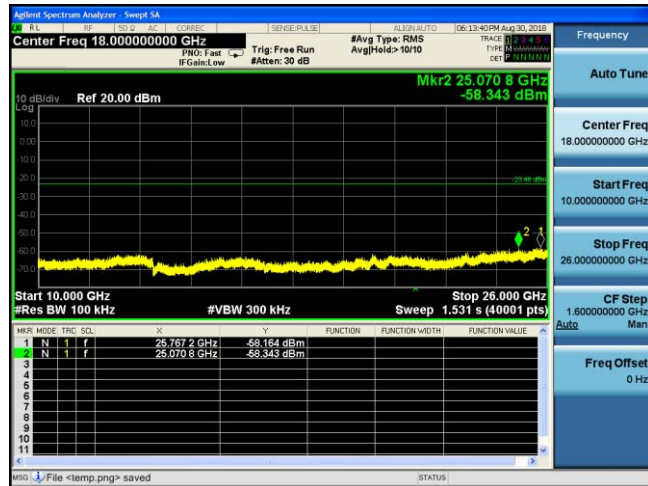

10 GHz – 26 GHz

10 GHz – 26 GHz



RF Conducted Spurious Emissions

Antenna 1



IEEE 802.11n HT20

Channel 11 / 2462 MHz

Antenna 1



IEEE 802.11n HT40

Channel 9 / 2452 MHz

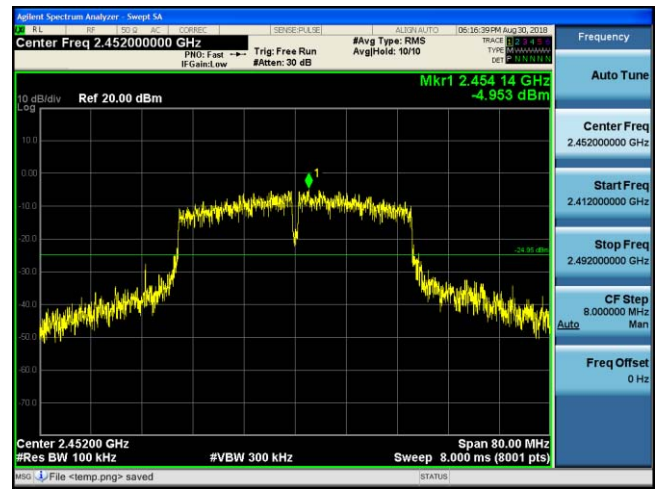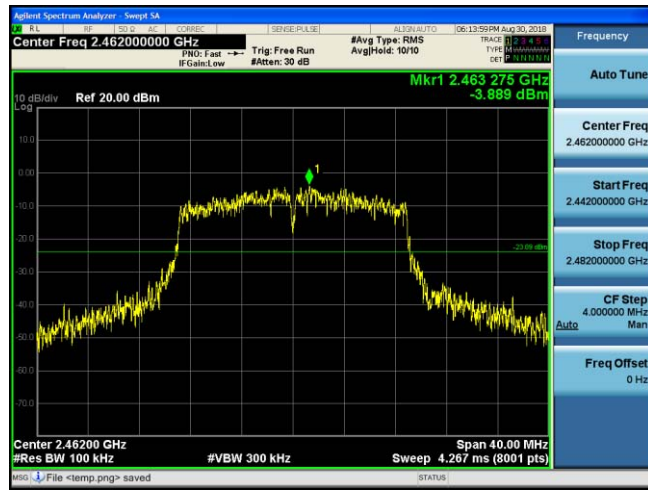



2442 MHz – 2482 MHz

2412 MHz – 2492 MHz

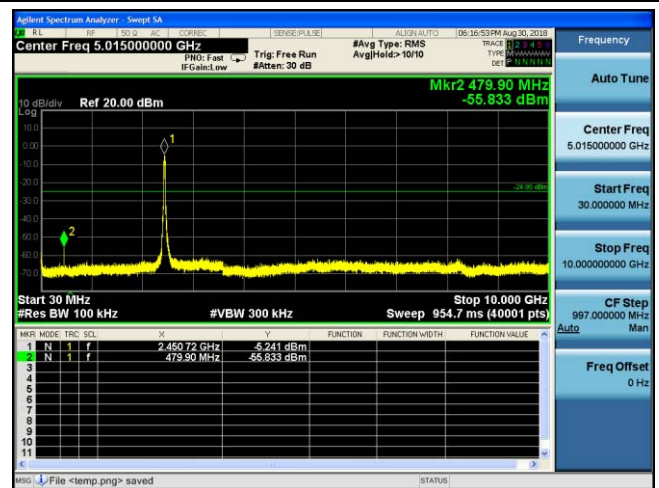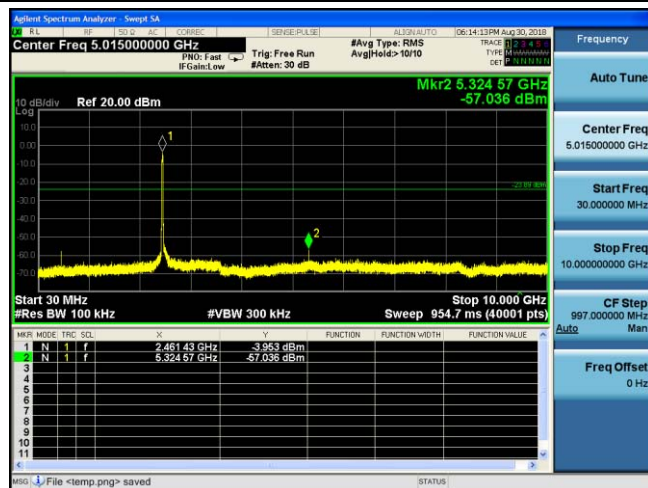

30 MHz – 10 GHz

30 MHz – 10 GHz

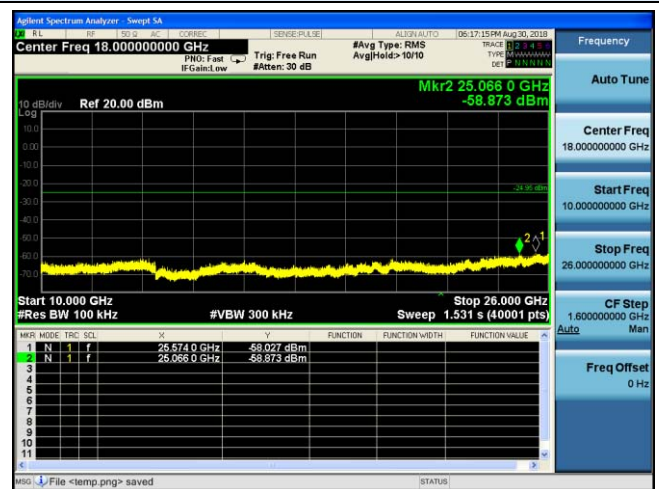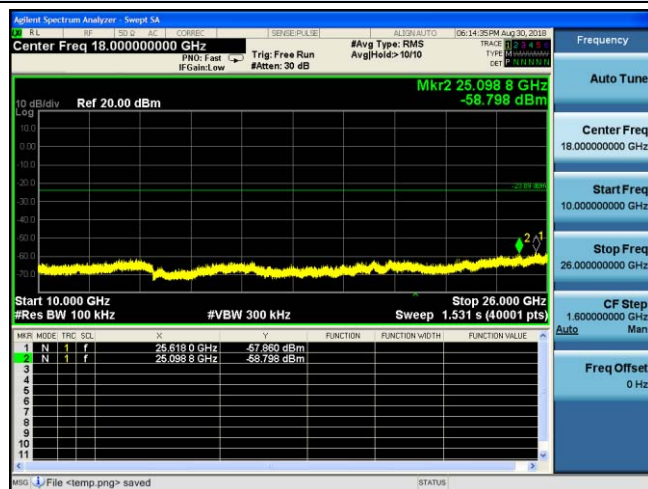

10 GHz – 26 GHz



10 GHz – 26 GHz



Band-edge Measurements for Conducted Emissions


Antenna 0
IEEE 802.11b

Antenna 0
IEEE 802.11g

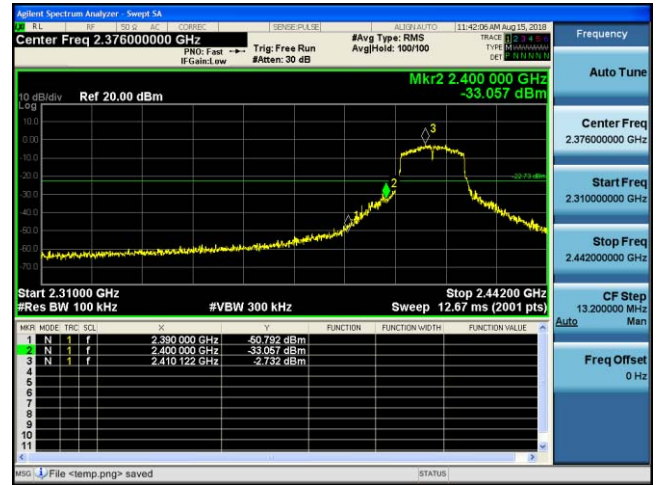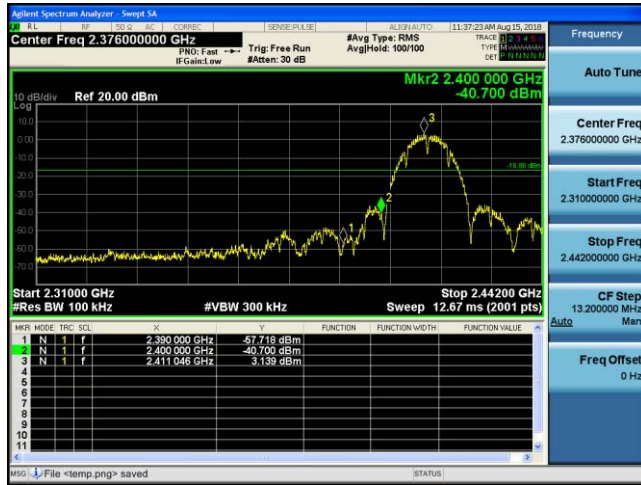

Channel 1 / 2412 MHz

Channel 1 / 2412 MHz

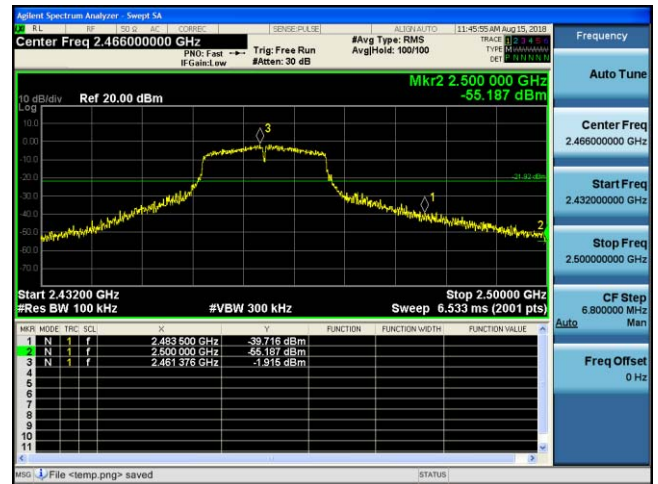

Channel 11 / 2462 MHz



Channel 11 / 2462 MHz



Band-edge Measurements for Conducted Emissions

Antenna 1
IEEE 802.11b

Antenna 1
IEEE 802.11g

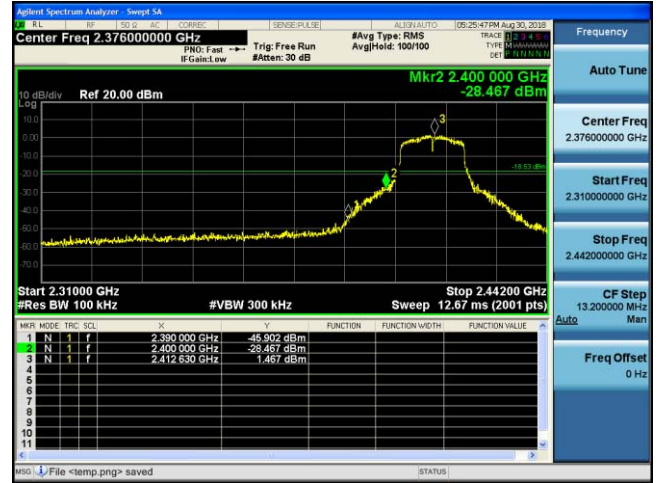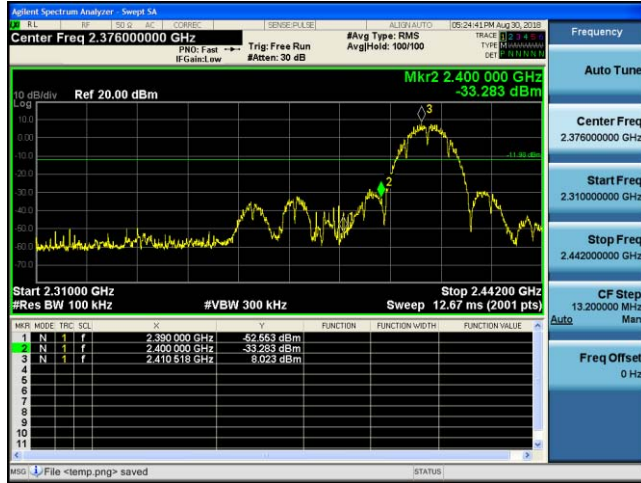

Channel 1 / 2412 MHz

Channel 1 / 2412 MHz




Channel 11 / 2462 MHz

Channel 11 / 2462 MHz



Band-edge Measurements for Conducted Emissions Combine Antenna 0 and Antenna 1


IEEE 802.11n HT20

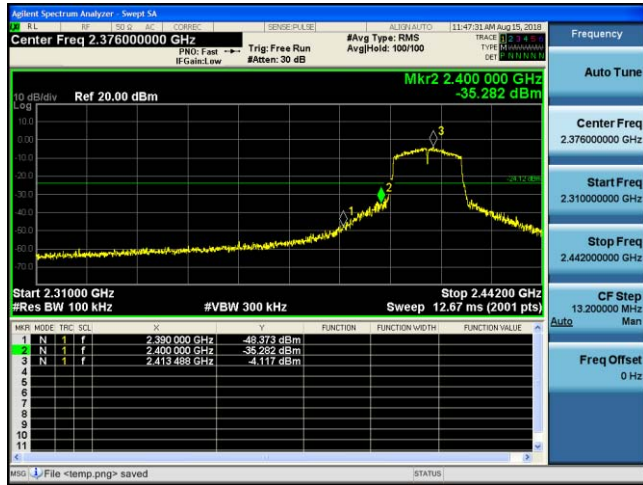

IEEE 802.11n HT40



Channel 1 / 2412 MHz

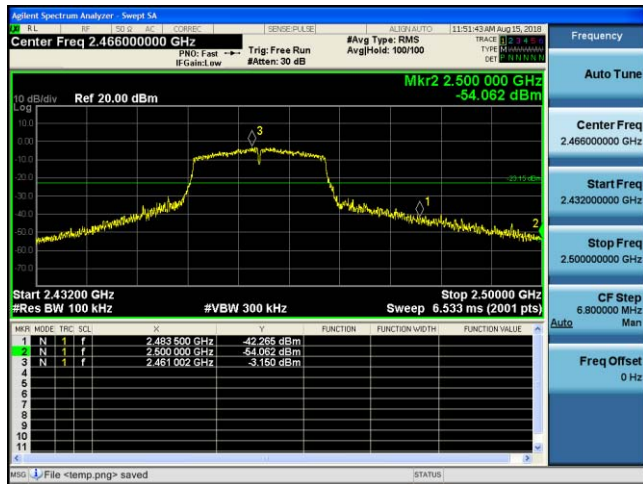

Channel 3 / 2422 MHz



Channel 11 / 2462 MHz

Channel 9 / 2452 MHz

5.7. Power line conducted emissions


5.7.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

| Frequency Range (MHz) | Limits (dBµV) | |
|-----------------------|---------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

* Decreasing linearly with the logarithm of the frequency

5.7.2 Block Diagram of Test Setup

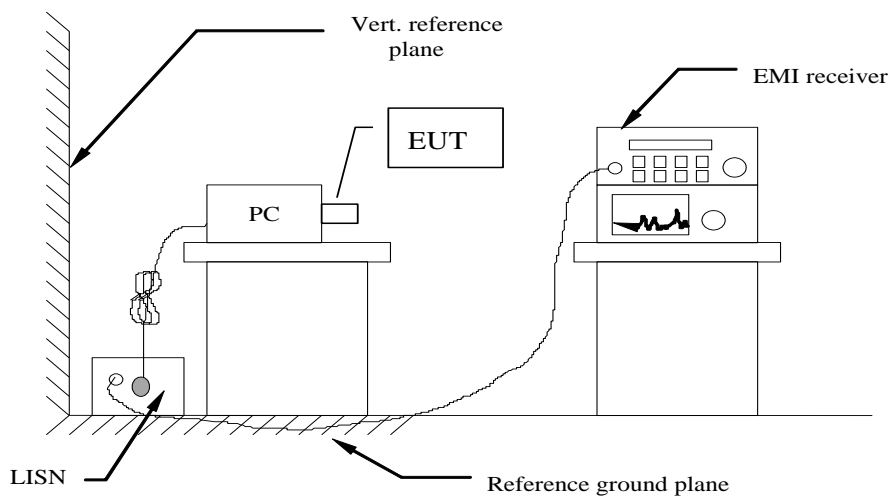

5.7.3 Test Results


| | | | |
|---------------|-----------------|----------------|---|
| Temperature | 24.5°C | Humidity | 56.2% |
| Test Engineer | Gary Qian | Configurations | 802.11n HT40 Low Channel, Chain 0+Chain 1 |
| Test Date | August 15, 2018 | | |

The Worst Test result for 802.11n HT40 (Low Channel) @Chain 0+Chain 1



AC Conducted Emission of power adapter @ AC 120V/60Hz @ IEEE 802.11n HT40 (worst case)


Line

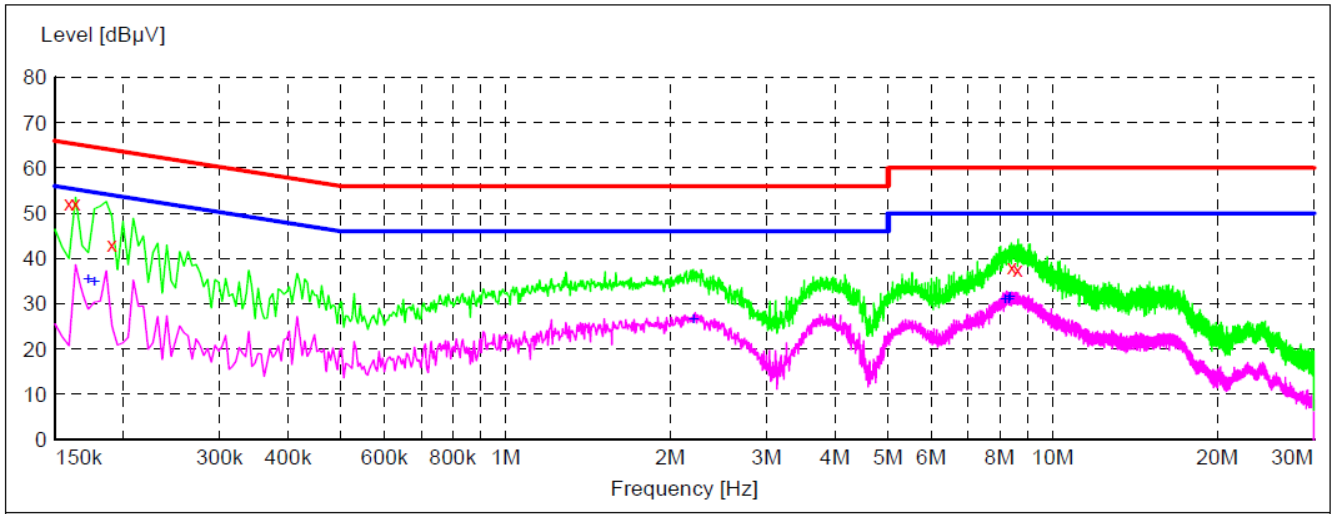

| Frequency MHz | Level dBµV | Transd dB | Limit dBµV | Margin dB | Detector | Line | PE |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.159000 | 52.30 | 10.0 | 66 | 13.2 | QP | L1 | GND |
| 0.163500 | 52.20 | 10.1 | 65 | 13.1 | QP | L1 | GND |
| 0.190500 | 43.00 | 10.5 | 64 | 21.0 | QP | L1 | GND |
| 8.416500 | 38.10 | 9.9 | 60 | 21.9 | QP | L1 | GND |
| 8.628000 | 37.70 | 9.9 | 60 | 22.3 | QP | L1 | GND |
| Frequency MHz | Level dBµV | Transd dB | Limit dBµV | Margin dB | Detector | Line | PE |
| 0.172500 | 35.40 | 10.2 | 55 | 19.4 | AV | L1 | GND |
| 0.177000 | 34.90 | 10.3 | 55 | 19.7 | AV | L1 | GND |
| 2.202000 | 26.60 | 9.8 | 46 | 19.4 | AV | L1 | GND |
| 8.182500 | 30.90 | 9.9 | 50 | 19.1 | AV | L1 | GND |
| 8.304000 | 31.00 | 9.9 | 50 | 19.0 | AV | L1 | GND |
| 8.340000 | 31.50 | 9.9 | 50 | 18.5 | AV | L1 | GND |



Neutral

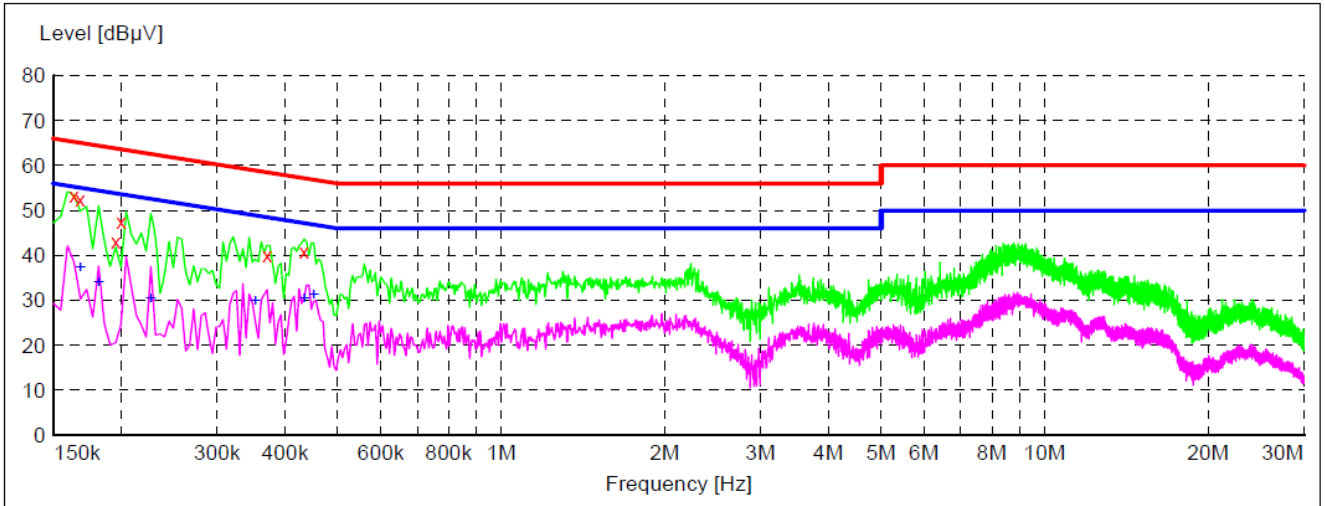

| Frequency MHz | Level dBµV | Transd dB | Limit dBµV | Margin dB | Detector | Line | PE |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.163500 | 53.20 | 10.1 | 65 | 12.1 | QP | N | GND |
| 0.168000 | 52.40 | 10.2 | 65 | 12.7 | QP | N | GND |
| 0.195000 | 43.20 | 10.6 | 64 | 20.6 | QP | N | GND |
| 0.199500 | 47.40 | 10.7 | 64 | 16.2 | QP | N | GND |
| 0.370500 | 40.20 | 10.1 | 59 | 18.3 | QP | N | GND |
| 0.433500 | 40.90 | 10.1 | 57 | 16.3 | QP | N | GND |
| Frequency MHz | Level dBµV | Transd dB | Limit dBµV | Margin dB | Detector | Line | PE |
| 0.168000 | 37.40 | 10.2 | 55 | 17.7 | AV | N | GND |
| 0.181500 | 34.10 | 10.4 | 54 | 20.3 | AV | N | GND |
| 0.226500 | 30.40 | 10.6 | 53 | 22.2 | AV | N | GND |
| 0.352500 | 29.90 | 10.2 | 49 | 19.0 | AV | N | GND |
| 0.433500 | 30.40 | 10.1 | 47 | 16.8 | AV | N | GND |
| 0.451500 | 31.10 | 10.0 | 47 | 15.7 | AV | N | GND |

***Note: Pre-scan all modes and recorded the worst case results in this report (IEEE 802.11n HT40).


5.8. Band-edge measurements for radiated emissions

5.8.1 Standard Applicable


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or radiated power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.8.2 Test Setup Layout

For Radiated

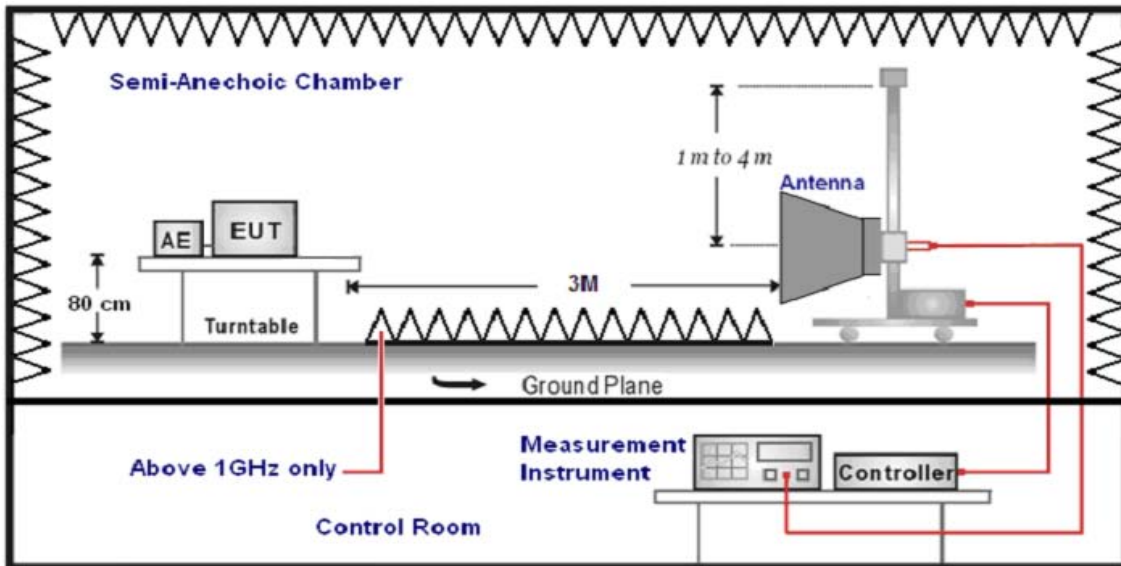

For Conducted

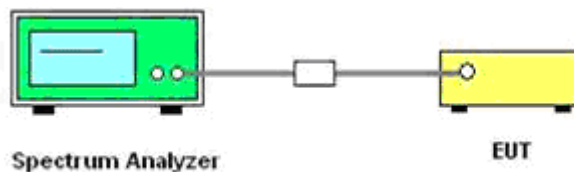

5.8.3. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of Spectrum Analyzer.

5.8.4. Test Procedures

Radiated Method:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.



3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. The distance between test antenna and EUT was 3 meter:
6. Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting | Detector |
|----------------------|---|----------|
| 1GHz-40GHz | Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto | Peak |

Conducted Method:

According to KDB 558074 D01 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to an EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=1/B for AV detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the result ant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.77 = \text{EIRP} + 95.23$$

Where:

E = electric field strength in dBμV/m,
 EIRP = equivalent isotropic radiated power in dBm
 D = specified measurement distance in meters.

11. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
12. Per KDB662911 D01 section b) In cases where a combination of conducted measurements and cabinet radiated measurements are permitted to demonstrate compliance with absolute radiated out-of-band and spurious limits (e.g., KDB Publications 558074 for DTS and 789033 for U-NII), the conducted measurements must be combined with directional gain to compute the radiated levels of the out-of-band and spurious emissions as described in this section.
13. Compare the resultant electric field strength level to the applicable regulatory limit.
14. Perform radiated spurious emission test duress until all measured frequencies were complete.



5.8.5 Test Results

Antenna 0

| IEEE 802.11b | | | | | | | | | | |
|---------------------|------------|-------------------|-----------------------|-----------------|-----------------|-----------------------|---------------------|-----------------|-------------------|--------------|
| Item (Mark) | Freq (MHz) | Read Level (dBµV) | Antenna Factor (dB/m) | PRM Factor (dB) | Cable Loss (dB) | Result Level (dBµV/m) | Limit Line (dBµV/m) | Over Limit (dB) | Detector | Polarization |
| 1 | 2390.00 | 54.70 | 29.99 | 30.21 | 8.35 | 62.83 | 74 | -11.17 | Peak | Horizontal |
| 1 | 2390.00 | 36.78 | 29.99 | 30.21 | 8.35 | 44.91 | 54 | -9.09 | AV ^[1] | Horizontal |
| 2 | 2390.00 | 57.14 | 29.99 | 30.21 | 8.35 | 65.27 | 74 | -8.73 | Peak | Vertical |
| 2 | 2390.00 | 36.72 | 29.99 | 30.21 | 8.35 | 44.85 | 54 | -9.15 | AV ^[1] | Vertical |
| 3 | 2483.50 | 53.58 | 30.25 | 30.25 | 8.5 | 62.08 | 74 | -11.92 | Peak | Horizontal |
| 3 | 2483.50 | 24.92 | 30.25 | 30.25 | 8.5 | 33.42 | 54 | -20.58 | AV ^[1] | Horizontal |
| 4 | 2483.50 | 49.04 | 30.25 | 30.25 | 8.5 | 57.54 | 74 | -16.46 | Peak | Vertical |
| 4 | 2483.50 | 26.05 | 30.25 | 30.25 | 8.5 | 34.55 | 54 | -19.45 | AV ^[1] | Vertical |
| 5 | 2489.38 | 57.74 | 30.25 | 30.25 | 8.5 | 66.24 | 74 | -7.76 | Peak | Horizontal |
| 5 | 2487.44 | 36.95 | 30.25 | 30.25 | 8.5 | 45.45 | 54 | -8.55 | AV ^[1] | Horizontal |
| 6 | 2498.34 | 49.45 | 30.25 | 30.25 | 8.5 | 57.95 | 74 | -16.05 | Peak | Vertical |
| 6 | 2498.17 | 36.58 | 30.25 | 30.25 | 8.5 | 45.08 | 54 | -8.92 | AV ^[1] | Vertical |

| IEEE 802.11g | | | | | | | | | | |
|---------------------|------------|-------------------|-----------------------|-----------------|-----------------|-----------------------|---------------------|-----------------|-------------------|--------------|
| Item (Mark) | Freq (MHz) | Read Level (dBµV) | Antenna Factor (dB/m) | PRM Factor (dB) | Cable Loss (dB) | Result Level (dBµV/m) | Limit Line (dBµV/m) | Over Limit (dB) | Detector | Polarization |
| 1 | 2390.00 | 54.21 | 29.99 | 30.21 | 8.35 | 62.34 | 74 | -11.66 | Peak | Horizontal |
| 1 | 2390.00 | 36.47 | 29.99 | 30.21 | 8.35 | 44.60 | 54 | -9.40 | AV ^[1] | Horizontal |
| 2 | 2390.00 | 57.46 | 29.99 | 30.21 | 8.35 | 65.59 | 74 | -8.41 | Peak | Vertical |
| 2 | 2390.00 | 38.53 | 29.99 | 30.21 | 8.35 | 46.66 | 54 | -7.34 | AV ^[1] | Vertical |
| 3 | 2483.50 | 56.28 | 30.25 | 30.25 | 8.5 | 64.78 | 74 | -9.22 | Peak | Horizontal |
| 3 | 2483.50 | 26.12 | 30.25 | 30.25 | 8.5 | 34.62 | 54 | -19.38 | AV ^[1] | Horizontal |
| 4 | 2483.50 | 51.92 | 30.25 | 30.25 | 8.5 | 60.42 | 74 | -13.58 | Peak | Vertical |
| 4 | 2483.50 | 28.73 | 30.25 | 30.25 | 8.5 | 37.23 | 54 | -16.77 | AV ^[1] | Vertical |
| 5 | 2486.39 | 55.70 | 30.25 | 30.25 | 8.5 | 64.20 | 74 | -9.80 | Peak | Horizontal |
| 5 | 2485.46 | 35.00 | 30.25 | 30.25 | 8.5 | 43.50 | 54 | -10.50 | AV ^[1] | Horizontal |
| 6 | 2498.22 | 48.03 | 30.25 | 30.25 | 8.5 | 56.53 | 74 | -17.47 | Peak | Vertical |
| 6 | 2497.49 | 37.69 | 30.25 | 30.25 | 8.5 | 46.19 | 54 | -7.81 | AV ^[1] | Vertical |



Antenna 1

| IEEE 802.11b | | | | | | | | | | |
|---------------------|------------|-------------------------|-----------------------|-----------------|-----------------|-----------------------------|---------------------------|-----------------|-------------------|--------------|
| Item (Mark) | Freq (MHz) | Read Level (dB μ V) | Antenna Factor (dB/m) | PRM Factor (dB) | Cable Loss (dB) | Result Level (dB μ V/m) | Limit Line (dB μ V/m) | Over Limit (dB) | Detector | Polarization |
| 1 | 2390.00 | 54.80 | 29.99 | 30.21 | 8.35 | 62.93 | 74 | -11.07 | Peak | Horizontal |
| 1 | 2390.00 | 38.90 | 29.99 | 30.21 | 8.35 | 47.03 | 54 | -6.97 | AV ^[1] | Horizontal |
| 2 | 2390.00 | 57.22 | 29.99 | 30.21 | 8.35 | 65.35 | 74 | -8.65 | Peak | Vertical |
| 2 | 2390.00 | 38.61 | 29.99 | 30.21 | 8.35 | 46.74 | 54 | -7.26 | AV ^[1] | Vertical |
| 3 | 2483.50 | 53.33 | 30.25 | 30.25 | 8.5 | 61.83 | 74 | -12.17 | Peak | Horizontal |
| 3 | 2483.50 | 29.61 | 30.25 | 30.25 | 8.5 | 38.11 | 54 | -15.89 | AV ^[1] | Horizontal |
| 4 | 2483.50 | 49.44 | 30.25 | 30.25 | 8.5 | 57.94 | 74 | -16.06 | Peak | Vertical |
| 4 | 2483.50 | 26.68 | 30.25 | 30.25 | 8.5 | 35.18 | 54 | -18.82 | AV ^[1] | Vertical |
| 5 | 2488.56 | 56.77 | 30.25 | 30.25 | 8.5 | 65.27 | 74 | -8.73 | Peak | Horizontal |
| 5 | 2490.86 | 37.47 | 30.25 | 30.25 | 8.5 | 45.97 | 54 | -8.03 | AV ^[1] | Horizontal |
| 6 | 2498.45 | 48.97 | 30.25 | 30.25 | 8.5 | 57.47 | 74 | -16.53 | Peak | Vertical |
| 6 | 2498.41 | 38.38 | 30.25 | 30.25 | 8.5 | 46.88 | 54 | -7.12 | AV ^[1] | Vertical |

| IEEE 802.11g | | | | | | | | | | |
|---------------------|------------|-------------------------|-----------------------|-----------------|-----------------|-----------------------------|---------------------------|-----------------|-------------------|--------------|
| Item (Mark) | Freq (MHz) | Read Level (dB μ V) | Antenna Factor (dB/m) | PRM Factor (dB) | Cable Loss (dB) | Result Level (dB μ V/m) | Limit Line (dB μ V/m) | Over Limit (dB) | Detector | Polarization |
| 1 | 2390.00 | 56.64 | 29.99 | 30.21 | 8.35 | 64.77 | 74 | -9.23 | Peak | Horizontal |
| 1 | 2390.00 | 37.54 | 29.99 | 30.21 | 8.35 | 45.67 | 54 | -8.33 | AV ^[1] | Horizontal |
| 2 | 2390.00 | 59.28 | 29.99 | 30.21 | 8.35 | 67.41 | 74 | -6.59 | Peak | Vertical |
| 2 | 2390.00 | 38.58 | 29.99 | 30.21 | 8.35 | 46.71 | 54 | -7.29 | AV ^[1] | Vertical |
| 3 | 2483.50 | 55.45 | 30.25 | 30.25 | 8.5 | 63.95 | 74 | -10.05 | Peak | Horizontal |
| 3 | 2483.50 | 28.23 | 30.25 | 30.25 | 8.5 | 36.73 | 54 | -17.27 | AV ^[1] | Horizontal |
| 4 | 2483.50 | 49.90 | 30.25 | 30.25 | 8.5 | 58.40 | 74 | -15.60 | Peak | Vertical |
| 4 | 2483.50 | 25.91 | 30.25 | 30.25 | 8.5 | 34.41 | 54 | -19.59 | AV ^[1] | Vertical |
| 5 | 2488.82 | 58.90 | 30.25 | 30.25 | 8.5 | 67.40 | 74 | -6.60 | Peak | Horizontal |
| 5 | 2487.78 | 36.07 | 30.25 | 30.25 | 8.5 | 44.57 | 54 | -9.43 | AV ^[1] | Horizontal |
| 6 | 2497.33 | 47.26 | 30.25 | 30.25 | 8.5 | 55.76 | 74 | -18.24 | Peak | Vertical |
| 6 | 2498.81 | 37.84 | 30.25 | 30.25 | 8.5 | 46.34 | 54 | -7.66 | AV ^[1] | Vertical |



Antenna 0 and 1

| IEEE 802.11n HT20 | | | | | | | | | | |
|-------------------|------------|-------------------|-----------------------|-----------------|-----------------|-----------------------|---------------------|-----------------|-------------------|--------------|
| Item (Mark) | Freq (MHz) | Read Level (dBμV) | Antenna Factor (dB/m) | PRM Factor (dB) | Cable Loss (dB) | Result Level (dBμV/m) | Limit Line (dBμV/m) | Over Limit (dB) | Detector | Polarization |
| 1 | 2390.00 | 59.20 | 29.99 | 30.21 | 8.35 | 67.33 | 74 | -6.67 | Peak | Horizontal |
| 1 | 2390.00 | 38.38 | 29.99 | 30.21 | 8.35 | 46.51 | 54 | -7.49 | AV ^[1] | Horizontal |
| 2 | 2390.00 | 57.98 | 29.99 | 30.21 | 8.35 | 66.11 | 74 | -7.89 | Peak | Vertical |
| 2 | 2390.00 | 42.42 | 29.99 | 30.21 | 8.35 | 50.55 | 54 | -3.45 | AV ^[1] | Vertical |
| 3 | 2483.50 | 59.45 | 30.25 | 30.25 | 8.5 | 67.95 | 74 | -6.05 | Peak | Horizontal |
| 3 | 2483.50 | 29.62 | 30.25 | 30.25 | 8.5 | 38.12 | 54 | -15.88 | AV ^[1] | Horizontal |
| 4 | 2483.50 | 52.70 | 30.25 | 30.25 | 8.5 | 61.20 | 74 | -12.80 | Peak | Vertical |
| 4 | 2483.50 | 30.20 | 30.25 | 30.25 | 8.5 | 38.70 | 54 | -15.30 | AV ^[1] | Vertical |
| 5 | 2484.54 | 58.92 | 30.25 | 30.25 | 8.5 | 67.42 | 74 | -6.58 | Peak | Horizontal |
| 5 | 2484.08 | 36.85 | 30.25 | 30.25 | 8.5 | 45.35 | 54 | -8.65 | AV ^[1] | Horizontal |
| 6 | 2498.10 | 49.88 | 30.25 | 30.25 | 8.5 | 58.38 | 74 | -15.62 | Peak | Vertical |
| 6 | 2499.88 | 38.56 | 30.25 | 30.25 | 8.5 | 47.06 | 54 | -6.94 | AV ^[1] | Vertical |

| IEEE 802.11n HT40 | | | | | | | | | | |
|-------------------|------------|-------------------|-----------------------|-----------------|-----------------|-----------------------|---------------------|-----------------|-------------------|--------------|
| Item (Mark) | Freq (MHz) | Read Level (dBμV) | Antenna Factor (dB/m) | PRM Factor (dB) | Cable Loss (dB) | Result Level (dBμV/m) | Limit Line (dBμV/m) | Over Limit (dB) | Detector | Polarization |
| 1 | 2390.00 | 58.94 | 29.99 | 30.21 | 8.35 | 67.07 | 74 | -6.93 | Peak | Horizontal |
| 1 | 2390.00 | 39.58 | 29.99 | 30.21 | 8.35 | 47.71 | 54 | -6.29 | AV ^[1] | Horizontal |
| 2 | 2390.00 | 59.76 | 29.99 | 30.21 | 8.35 | 67.89 | 74 | -6.11 | Peak | Vertical |
| 2 | 2390.00 | 38.45 | 29.99 | 30.21 | 8.35 | 46.58 | 54 | -7.42 | AV ^[1] | Vertical |
| 3 | 2483.50 | 58.61 | 30.25 | 30.25 | 8.5 | 67.11 | 74 | -6.89 | Peak | Horizontal |
| 3 | 2483.50 | 30.54 | 30.25 | 30.25 | 8.5 | 39.04 | 54 | -14.96 | AV ^[1] | Horizontal |
| 4 | 2483.50 | 50.60 | 30.25 | 30.25 | 8.5 | 59.10 | 74 | -14.90 | Peak | Vertical |
| 4 | 2483.50 | 30.77 | 30.25 | 30.25 | 8.5 | 39.27 | 54 | -14.73 | AV ^[1] | Vertical |
| 5 | 2488.71 | 58.16 | 30.25 | 30.25 | 8.5 | 66.66 | 74 | -7.34 | Peak | Horizontal |
| 5 | 2490.51 | 36.52 | 30.25 | 30.25 | 8.5 | 45.02 | 54 | -8.98 | AV ^[1] | Horizontal |
| 6 | 2496.58 | 51.90 | 30.25 | 30.25 | 8.5 | 60.40 | 74 | -13.60 | Peak | Vertical |
| 6 | 2497.92 | 37.02 | 30.25 | 30.25 | 8.5 | 45.52 | 54 | -8.48 | AV ^[1] | Vertical |

REMARKS:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. The other emission levels were very low against the limit.
3. Over Limit=Emission Level - Limit.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=10Hz/Sweep time=Auto/Detector=Peak;



5.9. Antenna Requirements

5.9.1. Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

5.9.2. Antenna Connected Construction

5.9.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.9.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is 3.81dBi, and the antenna is a Internal antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

5.9.2.3. Results: Compliance.

Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

Conducted power refers ANSI C63.10:2013 Output power test procedure for DTS devices.

Radiated power refers to ANSI C63.10:2013 Radiated emissions tests.

Measurement parameters

| Measurement parameter | |
|-----------------------|----------|
| Detector: | Peak |
| Sweep Time: | Auto |
| Resolution bandwidth: | 1MHz |
| Video bandwidth: | 3MHz |
| Trace-Mode: | Max hold |

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the IEEE 802.11b mode is used.

**Limits**

| | |
|--------------|------|
| FCC | ISED |
| Antenna Gain | |
| 6 dBi | |

Antenna 0

| T _{nom} | V _{nom} | Lowest Channel 2412 MHz | Middle Channel 2437 MHz | Highest Channel 2462 MHz |
|---|------------------|----------------------------|------------------------------------|-----------------------------|
| Conducted power [dBm] Measured with DSSS modulation | | 19.57 | 20.4 | 20.89 |
| Radiated power [dBm] Measured with DSSS modulation | | 22.28 | 22.93 | 24.06 |
| Gain [dBi] Calculated | | 2.71 | 2.53 | 3.17 |
| Measurement uncertainty | | | ± 1.6 dB (cond.) / ± 3.8 dB (rad.) | |

Antenna 1

| T _{nom} | V _{nom} | Lowest Channel 2412 MHz | Middle Channel 2437 MHz | Highest Channel 2462 MHz |
|---|------------------|----------------------------|------------------------------------|-----------------------------|
| Conducted power [dBm] Measured with DSSS modulation | | 19.59 | 19.8 | 20.69 |
| Radiated power [dBm] Measured with DSSS modulation | | 22.23 | 22.63 | 23.64 |
| Gain [dBi] Calculated | | 2.64 | 2.83 | 2.95 |
| Measurement uncertainty | | | ± 1.6 dB (cond.) / ± 3.8 dB (rad.) | |



6. LIST OF MEASURING EQUIPMENTS

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|---|-----------------|-----------------|------------|---------------|---------------|
| 1. | L.I.S.N. Artificial Mains Network | R&S | ENV216 | HKE-002 | Dec. 28, 2017 | 1 Year |
| 2. | Receiver | R&S | ESCI 7 | HKE-010 | Dec. 28, 2017 | 1 Year |
| 3. | RF automatic control unit | Tonscend | JS0806-2 | HKE-060 | Dec. 28, 2017 | 1 Year |
| 4. | Spectrum analyzer | R&S | FSP40 | HKE-025 | Dec. 28, 2017 | 1 Year |
| 5. | Spectrum analyzer | Agilent | N9020A | HKE-048 | Dec. 28, 2017 | 1 Year |
| 6. | Preamplifier | Schwarzbeck | BBV 9743 | HKE-006 | Dec. 28, 2017 | 1 Year |
| 7. | EMI Test Receiver | Rohde & Schwarz | ESCI 7 | HKE-010 | Dec. 28, 2017 | 1 Year |
| 8. | Bilog Broadband Antenna | Schwarzbeck | VULB9163 | HKE-012 | Dec. 28, 2017 | 1 Year |
| 9. | Loop Antenna | Schwarzbeck | FMZB 1519 B | HKE-014 | Dec. 28, 2017 | 1 Year |
| 10. | Horn Antenna | Schwarzbeck | 9120D | HKE-013 | Dec. 28, 2017 | 1 Year |
| 11. | Broadband Horn Antenna | Schwarzbeck | BBHA 9170 | HKE-017 | Dec. 28, 2017 | 1 Year |
| 12. | Pre-amplifier | EMCI | EMC051845 SE | HKE-015 | Dec. 28, 2017 | 1 Year |
| 13. | Pre-amplifier | Agilent | 83051A | HKE-016 | Dec. 28, 2017 | 1 Year |
| 14. | EMI Test Software EZ-EMC | Tonscend | JS1120-B | HKE-083 | Dec. 28, 2017 | N/A |
| 15. | Power Sensor | Agilent | E9300A | HKE-086 | Dec. 28, 2017 | 1 Year |
| 16. | Spectrum analyzer | Agilent | N9020A | HKE-048 | Dec. 28, 2017 | 1 Year |
| 17. | Signal generator | Agilent | N5182A | HKE-029 | Dec. 28, 2017 | 1 Year |
| 18. | Signal Generator | Agilent | 83630A | HKE-028 | Dec. 28, 2017 | 1 Year |
| 19. | Shielded room | Shiel Hong | 4*3*3 | HKE-039 | Dec. 28, 2017 | 3 Year |
| 20. | RF Cable(below 1GHz) | HUBER+SUHNER | RG214 | HKE-055 | Dec. 28, 2017 | 1 Year |
| 21. | RF Cable(above 1GHz) | HUBER+SUHNER | RG214 | HKE-056 | Dec. 28, 2017 | 1 Year |



7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----