Hearing Aid Compatibility (HAC) TEST REPORT

<For RF-Emission Measurement>

Model No.(EUT):	TW801
Trade Mark	Treswave
Company Name	Treswave LLC
Company Address	Treswave LLC, 12775 CRAWFORD DR, TUSTIN, CA 92782
FCC ID	2AP6Q-TW801
Date of receive	May. 20, 2018
Date of test	May. 23, 2018 ~ May. 24, 2018
Date of Issue	Jul. 18, 2018

Standards:

ANSI C63.19-2011

FCC RULE PART(S): 47 CFR PART 20.19(B)
HAC CATEGORY: M3 (M Category)

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronics & Communication Laboratory or testing done by SGS Taiwan Electronics & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronics & Communication Laboratory in writing.

Signed on behalf of SGS

Sr. Engineer

Matt Kuo

Matt Kuo

Date: Jul. 18, 2018

Asst. Manager

John Yeh

John Yeh

Date: Jul. 18, 2018

Revision History

Report Number	Revision	Description	Issue Date
E5/2018/60015	Rev.00	Initial creation of document	Jul. 18, 2018

Table of Contents

1. Introduction

The purpose of the Hearing Aid Compatibility is to enable measurements of the near electric fields generated by wireless communication devices in the region controlled for use by a hearing aid in accordance with ANSI-C63.19-2011

The purpose of this standard is to establish categories for hearing aids and for WD (wireless communications devices) that can indicate to health care practitioners and hearing aid users which hearing aids are compatible with which WD, and to provide tests that can be used to assess the electromagnetic characteristics of hearing aids and WD and assign them to these categories. The various parameters required, in order to demonstrate compatibility and accessibility are measured. The design of the standard is such that when a hearing aid and WD achieve one of the categories specified, as measured by the methodology of this standard, the indicated performance is realized.

In order to provide for the usability of a hearing aid with a WD, several factors must be coordinated:
a) Radio frequency (RF) measurements of the near-field electric fields emitted by a WD to categorize these emissions for correlation with the RF immunity of a hearing aid.

Hence, the following are measurements made for the WD:
RF E-Field emissions

The measurement plane is parallel to, and 1.5cm in front of, the reference plane.

Applications for certification of equipment operation under part 20, that a manufacturer is seeking to certify as hearing aid compatible, as set forth in §20.19 of that part, shall include a statement indication compliance with the test requirements of §20.19 and indicating the appropriate U-rating for the equipment. The manufacturer of the equipment shall be responsible for maintaining the test results.

2. Testing Laboratory

Company Name	SGS Taiwan Ltd. Electronics & Communication Laboratory
Company address	No.2, Keji 1st Rd., Guishan Township, Taoyuan County 333, Taiwan (R.O.C.)
Telephone	+886-2-2299-3279
Fax	+886-2-2298-0488
Website	http://www.tw.sgs.com/

3. Details of Applicant

Applicant Name	Treswave LLC
Applicant Address	Treswave LLC, 12775 CRAWFORD DR, TUSTIN, CA 92782

4. Description of EUT

Model No.	TW801			
Trade Mark	Treswave			
FCC ID	2AP6Q-TW801			
Mode of Operation	☒CDMA 1xRTT ☒CDMA EVDO ☒LTE FDD ☒ LTE TDD ☒WLAN802.11b/g/n/(20M) ☒Bluetooth			
Duty Cycle	CDMA	1		
	LTE FDD	1		
	LTE TDD	0.633		
	WLAN802.11b/g/n(20M)	1		
	Bluetooth	1		
TX Frequency Range (MHz)	CDMA BC 0	824	—	849
	CDMA BC 1	1850	—	1910
	CDMA BC 10	815	—	826
	LTE FDD Band 13	777	—	787
	LTE FDD Band 25	1850	—	1915
	LTE FDD Band 26	814	—	849
	LTE FDD Band 41	2496	—	2690
	WLAN802.11 b/g/n(20M)	2412	—	2462
	Bluetooth	2402	—	2480
Channel Number (ARFCN)	CDMA BC 0	1013	—	777
	CDMA BC 1	25	—	1175
	CDMA BC 10	476	—	684
	LTE FDD Band 13	23205	—	23255
	LTE FDD Band 25	26047	—	26683
	LTE FDD Band 26	26697	—	27033
	LTE TDD Band 41	39675	—	41565
	WLAN802.11 b/g/n(20M)	1	—	11
	Bluetooth	0	—	78

5. Air Interfaces and Bands

Air-Interface	Band (MHZ)	Type	ANSI C63.19 Tested	Simultaneous Transmitter	Name of Voice Service	Power Reduction
CDMA	BC0	VO	Yes	BT or Wi-Fi	*	NA
	BC1					
	BC10					
	EVDO	DT	NA		NA	
LTE FDD	13	DT	NA	BT or Wi-Fi	NA	NA
	25					
	26					
LTE TDD	41	DT	NA	BT or Wi-Fi	NA	NA
Wi-Fi	2450	DT	NA	WWAN	NA	NA
BT	2450	DT	NA	WWAN	NA	NA

VO: Legacy Cellular Voice Service from Table 7.1 in 7.4.2.1 of ANSI C63.19-2011

DT: Digital Transport (no voice)

VD: IP Voice Service over Digital Transport

Note

1. *: Ref Lev in accordance with 7.4.2.1 of ANSI C63.19-2011 and the July 2012 VoLTE interpretation

6. Test Environment

Ambient Temperature	21.7° C
Relative Humidity	<80 %

7. Description of test system

7.1 Measurement system Diagram for SPEAG Robotic

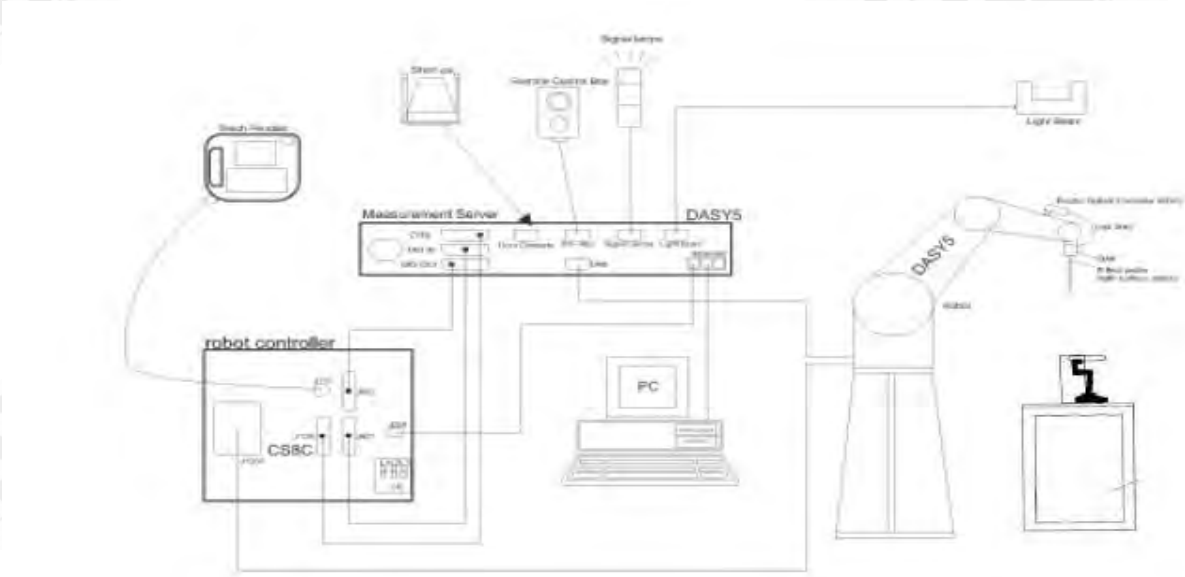

Fig.1 The SPEAG Robotic Diagram

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- E Field probe.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.

- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The Test Arch phantom.
- The device holder for handheld mobile phones.
- Validation dipole kits allowing to validate the proper functioning of the system.

7.2 E Field Probe

Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges PEEK enclosure material	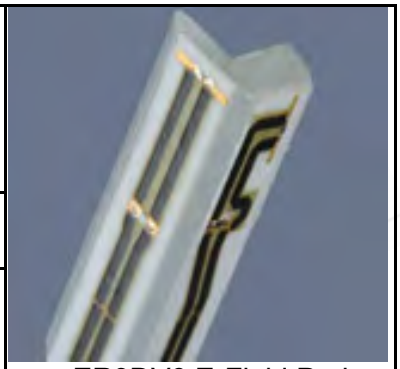 ER3DV6 E-Field Probe
Calibration	In air from 100 MHz to 3.0 GHz (absolute accuracy ±6.0%, k=2)	
Frequency	(extended to 20 MHz for MRI), Linearity: ± 0.2 dB (100 MHz to 3 GHz)	
Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)	
Dynamic Range	2 V/m to > 1000 V/m; Linearity: ± 0.2 dB	
Dimensions	Tip diameter: 8 mm Distance from probe tip to dipole centers: 2.5 mm	

7.3 Test Arch

Description	Enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot.	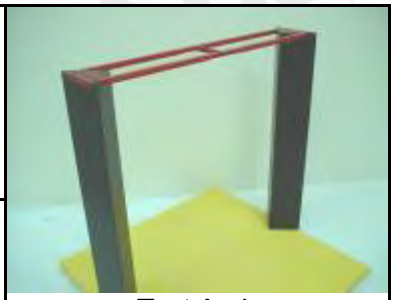 Test Arch
Dimensions	length: 370 mm width: 370 mm height: 370 mm	

7.4 Phone Holder

Description	Supports accurate and reliable positioning of any phone Effect on near field <+/- 0.5 dB	 Phone Holder

8. Test Procedure

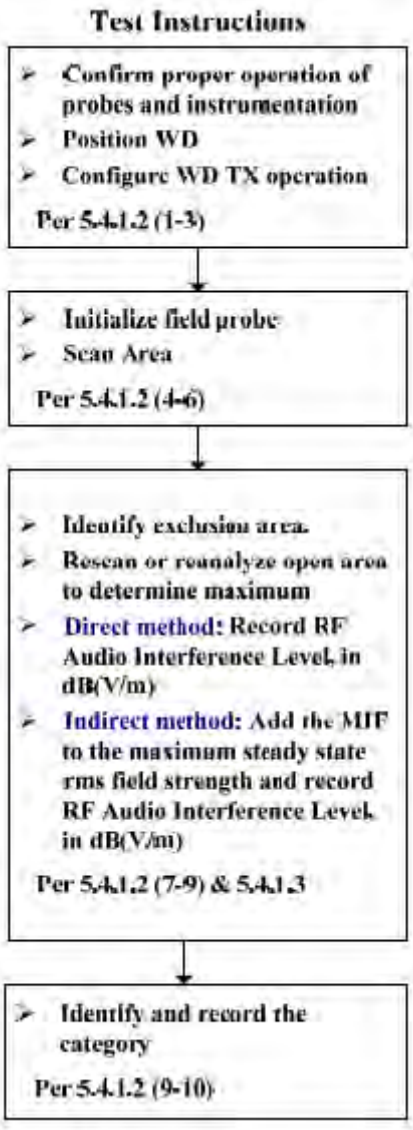

Fig.2 RF emission flow chart

The following illustrate a typical RF emissions test scan over a wireless communications device (Indirect method):

1. Proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed.
2. WD is positioned in its intended test position, acoustic output point of the device perpendicular to the field probe.
3. The WD operation for maximum rated RF output power was configured and confirmed with the base station simulator, at the test channel and other normal operating parameters as intended for the test. The battery was ensured to be fully charged before each test.
4. The center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The WD audio output was positioned tangent (as physically possible) to the measurement plane.
5. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the HAC Phantom.
6. The measurement system measured the field strength at the reference location.
7. Measurements at 5mm increments in the 5 × 5 cm region were performed and recorded. A 360◦ rotation about the azimuth axis at the maximum interpolated position was measured. For the worst-case condition, the peak reading from this rotation was used in re-evaluating the HAC category.
8. The system performed a drift evaluation by measuring the field at the reference location.

Note.

Per KDB 285076 D01 v05 2.c) 1), handsets that have the ability to support concurrent connections using simultaneous transmissions shall be independently tested for each air interface/band given in ANSI C63.19-2011. At the present time ANSI C63.19 does not provide simultaneous transmission test procedures.

.

9. System Verification

A dipole antenna meeting the requirements given in ANSI C63.19-2011 was placed in the position normally occupied by the WD.

The length of the dipole was scanned by E-field probes and the maximum values for each were recorded.

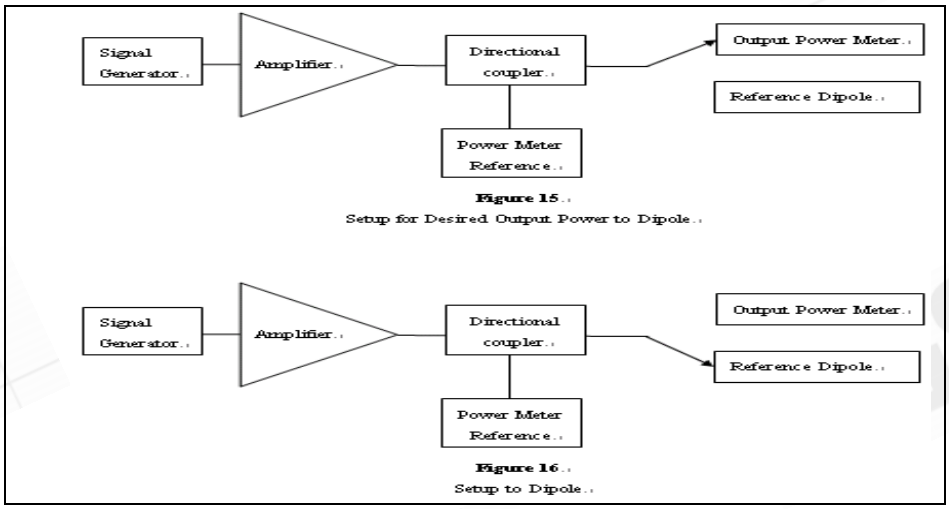

Fig.3 System verification

For E-Field Scan

Mode	Frequency (MHz)	Input Power(dBm)	E-Field 1 (V/m)	E-Field 2(V/m)	Target Value(V/m)	Deviation	Measured Date
CW	835	20	108.5	115.8	110.3	1.68%	May.23, 2018
CW	1880	20	79.38	87.33	88.8	-6.13%	May.24, 2018

Note:

For E-Field, the deviation is [(E-Field 1 + E-Field 2) / 2 – Target value] / Target value x 100%

10. Modulation Interference Factor

For any specific fixed and repeatable modulated signal, a modulation interference factor (MIF, expressed in dB) may be developed that relates its interference potential to its steady-state rms signal level or average power level. This factor is a function only of the audio-frequency amplitude modulation characteristics of the signal and is the same for field-strength and conducted power measurements. It is important to emphasize that the MIF is valid only for a specific repeatable audio-frequency amplitude modulation characteristic. Any change in modulation characteristic requires determination and application of a new MIF

The MIF may be determined using a radiated RF field or a conducted RF signal,

b) Using RF illumination or conducted coupling, apply the specific modulated signal in question to the measurement system at a level within its confirmed operating dynamic range.
c) Measure the steady-state rms level at the output of the fast probe or sensor.
d) Measure the steady-state average level at the weighting output.
e) Without changing the square-law detector or weighting system, and using RF illumination or conducted coupling, substitute for the specific modulated signal a 1 kHz, 80% amplitude modulated carrier at the same frequency and adjust its strength until the level at the weighting output equals the step d) measurement.
f) Without changing the carrier level from step e), remove the 1 kHz modulation and again measure the steady-state rms level indicated at the output of the fast probe or sensor.
g) The MIF for the specific modulation characteristic is provided by the ratio of the step f) measurement to the step c) measurement, expressed in dB (20 × log(step f))/step c)).

Based on the KDB285076D01v05, the handset can also use the MIF values predetermined by the test equipment manufacturer, and the following table lists the MIF values evaluated by DASY manufacturer (SPEAG), and the test result will be calculated with the MIF parameter automatically.

SPEAG UID	UID version	Communication system	MIF(dB)
10293	AAB (12.05.2017)	CDMA2000, RC3, SO3, Full Rate	-19.43
10295	AAB (12.05.2017)	CDMA2000, RC1, SO3, 1/8th Rate 25 rf	3.26

11. Maximum Average Antenna input power

Band	Channel	Maximum Tune-up limit power (dBm)
CDMA BC0	1013	25
	384	25
	777	25
CDMA BC1	25	21.5
	600	21.5
	1175	21.5
CDMA BC10	476	25
	580	25
	684	25

12. Justification of held to ear modes tested

I. Analysis of RF air interface technologies

a. The device doesn't support VoLTE/VoWLAN, so HAC test for them is not required.

b. Based on ANSI. C63.19-2011. An RF air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is ≤17 dBm for any of its operating modes. If a device supports multiple RF air interfaces, each RF air interface shall be evaluated individually.

c. There is no OTT voice service pre-installed (installed and delivered) by the manufacturer.

d. There is no OTT voice service pre-installed (installed and delivered) by the manufacturer for the operating system manufacturer's software partner.

e. There is no OTT voice service installed and delivered by the manufacturer at the direction of the service provider.

The MIF plus the worst case average power for all modes are investigated below to determine the testing requirements for this device.

II. Low power exemption

Air interference	Maximum Average Antenna input power (dBm)	Worst case MIF (dB)	Maximum Average Antenna input power + MIF (dBm)	Low power exemption
CDMA BC0 (RC3, SO3, Full Rate)	25	-19.43	5.57	Yes
CDMA BC0 (RC1,SO3,1/8th Rate 25 fr)	25	3.26	28.26	No
CDMA BC1 (RC3, SO3, Full Rate)	21.5	-19.43	2.07	Yes
CDMA BC1 (RC1,SO3,1/8th Rate 25 fr)	21.5	3.26	24.76	No
CDMA BC10 (RC3, SO3, Full Rate)	25	-19.43	5.57	Yes
CDMA BC10 (RC1,SO3,1/8th Rate 25 fr)	25	3.26	28.26	No

We used the predetermined MIF to evaluate the low power exemption.

Based on ANSI C63.19-2011, RF emission testing for CDMA (RC1, SO3, full rate) is exempted.

Based on ANSI C63.19-2011, CDMA (RC1, SO3, full rate) that is exempted from testing shall be rated as M4.

13. ANSI C63.19-2011 performance and categories

The measurements were performed to ensure compliance to the ANSI C63.19-2011 standard,

Category	E-Field Emissions dB(V/m) < 960MHz
M1	50-55
M2	45-50
M3	40-45
M4	<40

Category	E-Field Emissions dB(V/m) > 960MHz
M1	40-45
M2	35-40
M3	30-35
M4	<30

WD RF audio interference level categories in logarithmic units

14. Instruments List

Manufacturer	Device	Type	Serial number	Date of last calibration	Date of next calibration
Schmid & Partner Engineering AG	E-Field Probe	ER3DV6	2306	Mar.22,2018	Mar.21,2019
Schmid & Partner Engineering AG	System Validation Dipole	CD835V3	1052	Mar.14,2018	Mar.13,2019
		CD1880V3	1044	Mar.14,2018	Mar.13,2019
Schmid & Partner Engineering AG	Data acquisition Electronics	DAE4	1336	Mar.21,2018	Mar.20,2019
Schmid & Partner Engineering AG	Software	DASY52 52.8.8	N/A	Calibration not required	Calibration not required
Agilent	Dual-directional coupler	778D	MY48220468	Aug.28,2017	Aug.27,2018
Agilent	RF Signal Generator	N5181A	MY50144143	Mar.15,2018	Mar.14,2019
Schmid & Partner Engineering AG	Test Arch SD HAC	P01	1047	Calibration not required	Calibration not required
Agilent	Power Meter	E4417A	MY52240003	Dec.21,2017	Dec.20,2018
Agilent	Power Sensor	E9301H	MY52200003	Dec.21,2017	Dec.20,2018
R&S	Radio Communication Tester	CMU200	113505	Dec.20,2017	Dec.19,2018

15. Summary of Results

E-Field

E-Field Emission	Channel	Modulation Interference Factor	Power Drift(dB)	Audio Interference Level dB(V/m)	RESULT	Excl Blocks per 4.3.1.2.2
CDMA BC0	1013	3.26	0.02	36.93	M4	689
	384	3.26	-0.01	37.22	M4	689
	777	3.26	0.06	35.70	M4	689
E-Field Emission	**Channel**	**Modulation Interference Factor**	**Power Drift(dB)**	**Audio Interference Level dB(V/m)**	**RESULT**	**Excl Blocks per 4.3.1.2.2**
CDMA BC1	25	3.26	0.01	33.37	M3	689
	600	3.26	0.06	29.73	M4	689
	1175	3.26	0.09	29.23	M4	123
E-Field Emission	**Channel**	**Modulation Interference Factor**	**Power Drift(dB)**	**Audio Interference Level dB(V/m)**	**RESULT**	**Excl Blocks per 4.3.1.2.2**
CDMA BC10	476	3.26	-0.02	37.01	M4	689
	560	3.26	0.06	37.12	M4	689
	684	3.26	0.09	36.80	M4	689

16. Measurement Data

Date: 2018/5/23

HAC- RF Emission_CDMA Cellular (BC0)_CH 1013

Communication System: UID 10295 - AAB, CDMA2000, ; Frequency: 824.7 MHz
Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m^3
Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2306; ConvF(1, 1, 1); Calibrated: 2018/3/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/3/21
- Phantom: HAC Test Arch; ;
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 56.60 V/m; Power Drift = 0.02 dB
Applied MIF = 3.26 dB
RF audio interference level = 36.93 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **34.49 dBV/m**	Grid 2 **M4** **36.9 dBV/m**	Grid 3 **M4** **36.91 dBV/m**
Grid 4 **M4** **35.34 dBV/m**	Grid 5 **M4** **36.93 dBV/m**	Grid 6 **M4** **36.91 dBV/m**
Grid 7 **M4** **36.28 dBV/m**	Grid 8 **M4** **37.36 dBV/m**	Grid 9 **M4** **37.33 dBV/m**

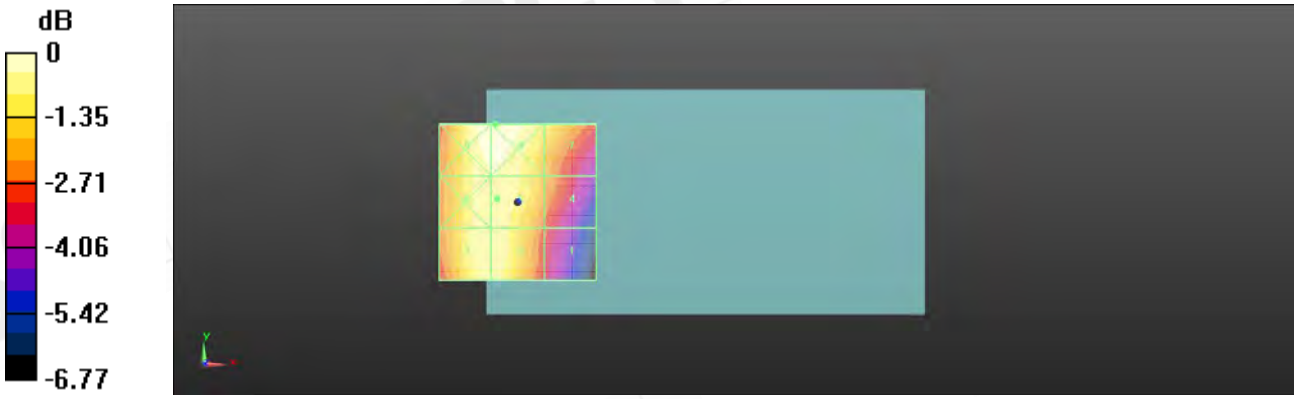

0 dB = 73.80 V/m = 37.36 dBV/m

Date: 2018/5/23

HAC-RF Emission_CDMA Cellular (BC0)_CH 384

Communication System: UID 10295 - AAB, CDMA2000, ; Frequency: 836.52 MHz
Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m^3
Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2306; ConvF(1, 1, 1); Calibrated: 2018/3/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/3/21
- Phantom: HAC Test Arch; ;
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 57.60 V/m; Power Drift = -0.01 dB
Applied MIF = 3.26 dB
RF audio interference level = 37.22 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **34.43 dBV/m**	Grid 2 **M4** **37.19 dBV/m**	Grid 3 **M4** **37.22 dBV/m**
Grid 4 **M4** **35.32 dBV/m**	Grid 5 **M4** **37.11 dBV/m**	Grid 6 **M4** **37.13 dBV/m**
Grid 7 **M4** **36.18 dBV/m**	Grid 8 **M4** **37.44 dBV/m**	Grid 9 **M4** **37.42 dBV/m**

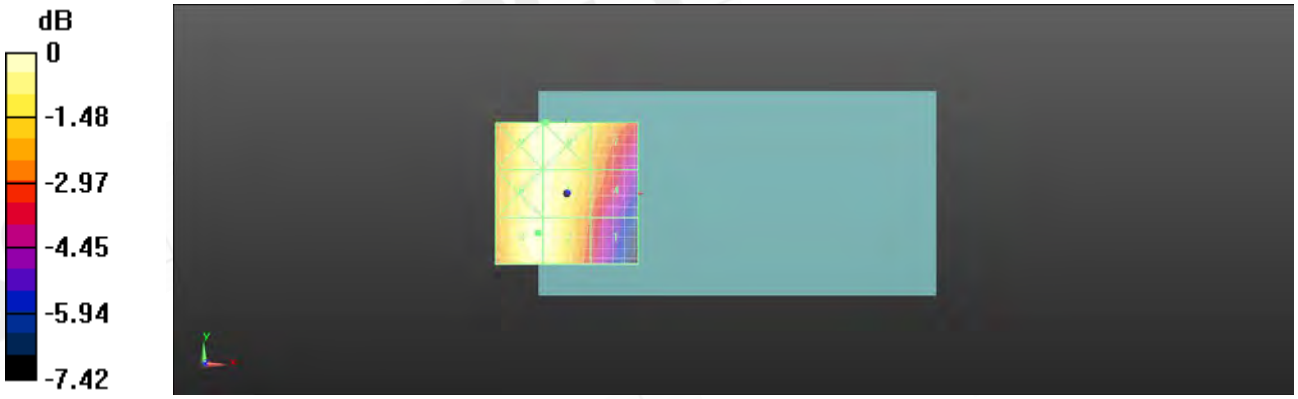

0 dB = 74.46 V/m = 37.44 dBV/m

Date: 2018/5/23

HAC- RF Emission_CDMA Cellular (BC0)_CH 777

Communication System: UID 10295 - AAB, CDMA2000, ; Frequency: 848.31 MHz
Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m^3
Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2306; ConvF(1, 1, 1); Calibrated: 2018/3/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/3/21
- Phantom: HAC Test Arch; ;
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 46.07 V/m; Power Drift = 0.06 dB
Applied MIF = 3.26 dB
RF audio interference level = 35.70 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **32.48 dBV/m**	Grid 2 **M4** **35.65 dBV/m**	Grid 3 **M4** **35.7 dBV/m**
Grid 4 **M4** **33.54 dBV/m**	Grid 5 **M4** **35.56 dBV/m**	Grid 6 **M4** **35.61 dBV/m**
Grid 7 **M4** **34.58 dBV/m**	Grid 8 **M4** **36.03 dBV/m**	Grid 9 **M4** **36.02 dBV/m**

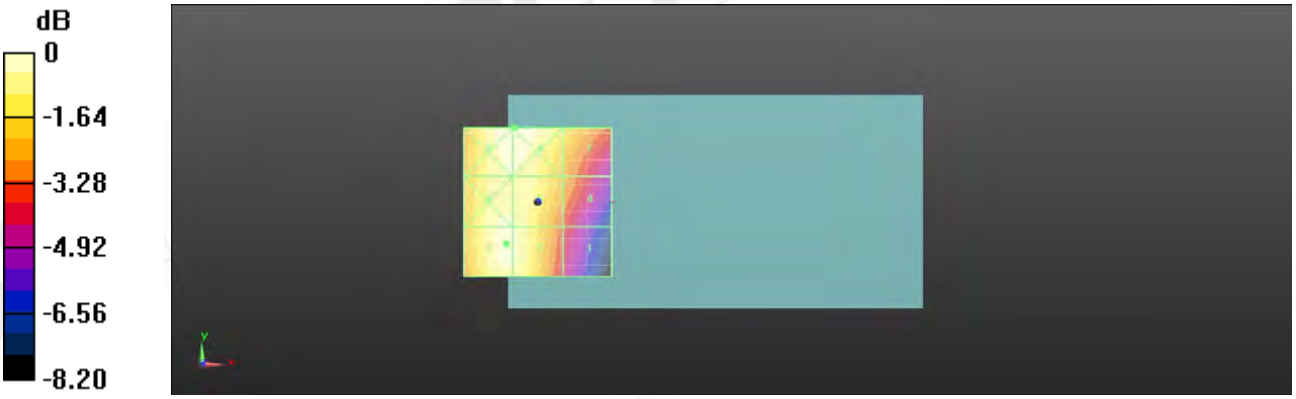

0 dB = 63.29 V/m = 36.03 dBV/m

Date: 2018/5/24

HAC- RF Emission_CDMA PCS (BC1)_CH 25

Communication System: UID 10295 - AAB, CDMA2000,
; Frequency: 1851.25 MHz
Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m^3
Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2306; ConvF(1, 1, 1); Calibrated: 2018/3/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/3/21
- Phantom: HAC Test Arch; ;
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 28.14 V/m; Power Drift = 0.01 dB
Applied MIF = 3.26 dB
RF audio interference level = 33.37 dBV/m
Emission category: M3

MIF scaled E-field

Grid 1 **M3** **32.69 dBV/m**	Grid 2 **M3** **31.08 dBV/m**	Grid 3 **M3** **30.17 dBV/m**
Grid 4 **M4** **29.01 dBV/m**	Grid 5 **M3** **33.37 dBV/m**	Grid 6 **M3** **33.38 dBV/m**
Grid 7 **M3** **32.06 dBV/m**	Grid 8 **M3** **34.46 dBV/m**	Grid 9 **M3** **34.37 dBV/m**

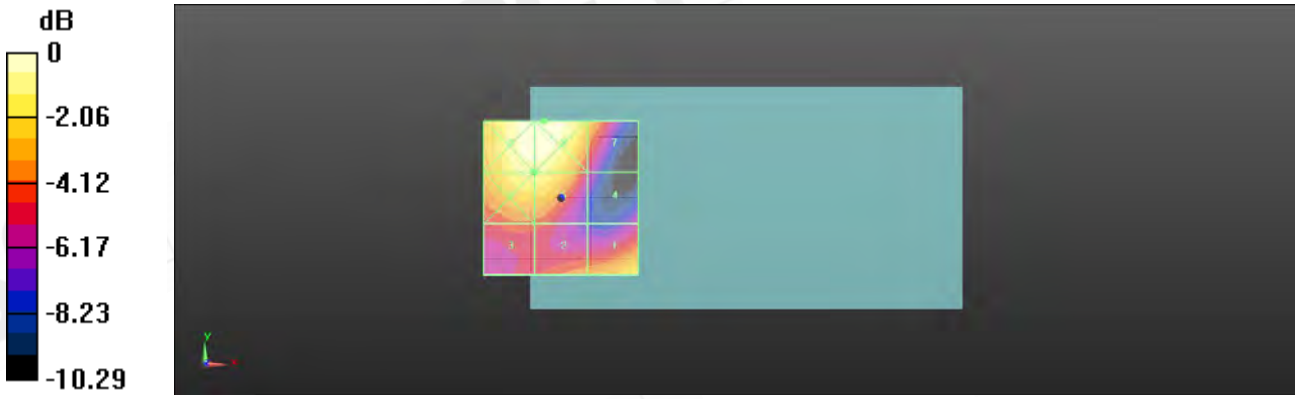

0 dB = 52.83 V/m = 34.46 dBV/m

Date: 2018/5/24

HAC- RF Emission_CDMA PCS (BC1)_CH 600

Communication System: UID 10295 - AAB, CDMA2000, ; Frequency: 1880 MHz
Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m^3
Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2306; ConvF(1, 1, 1); Calibrated: 2018/3/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/3/21
- Phantom: HAC Test Arch; ;
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 16.11 V/m; Power Drift = 0.06 dB
Applied MIF = 3.26 dB
RF audio interference level = 29.73 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **29.36 dBV/m**	Grid 2 **M4** **29.15 dBV/m**	Grid 3 **M4** **28.01 dBV/m**
Grid 4 **M4** **25.51 dBV/m**	Grid 5 **M4** **29.73 dBV/m**	Grid 6 **M4** **29.73 dBV/m**
Grid 7 **M4** **29.67 dBV/m**	Grid 8 **M3** **32.05 dBV/m**	Grid 9 **M3** **32 dBV/m**

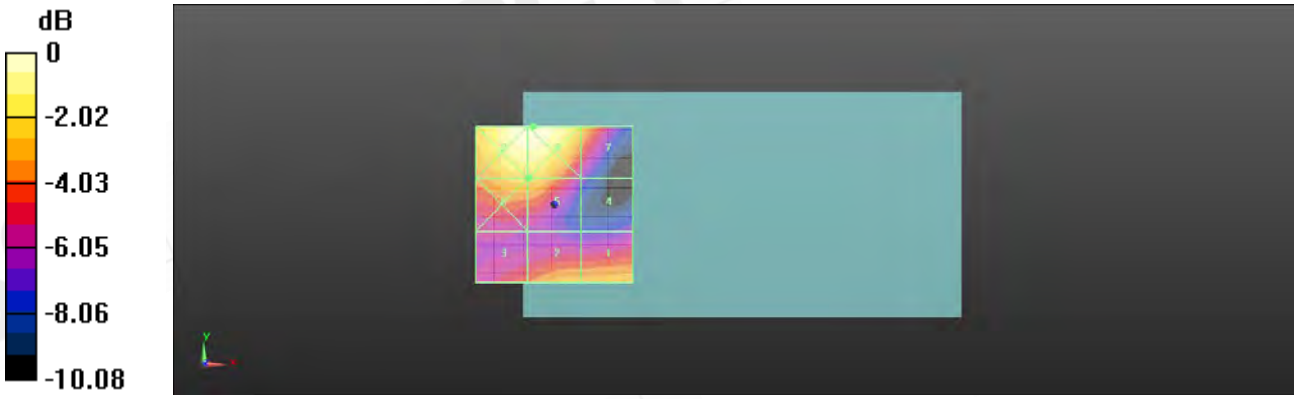

0 dB = 40.02 V/m = 32.05 dBV/m

Date: 2018/5/24

HAC- RF Emission_CDMA PCS (BC1)_CH 1175

Communication System: UID 10295 - AAB, CDMA2000, ; Frequency: 1902.75 MHz
Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m^3
Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2306; ConvF(1, 1, 1); Calibrated: 2018/3/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/3/21
- Phantom: HAC Test Arch; ;
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 11.03 V/m; Power Drift = 0.09 dB
Applied MIF = 3.26 dB
RF audio interference level = 29.23 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **29.69 dBV/m**	Grid 2 **M3** **30.5 dBV/m**	Grid 3 **M3** **30.3 dBV/m**
Grid 4 **M4** **24.56 dBV/m**	Grid 5 **M4** **25.86 dBV/m**	Grid 6 **M4** **25.86 dBV/m**
Grid 7 **M4** **26.74 dBV/m**	Grid 8 **M4** **29.23 dBV/m**	Grid 9 **M4** **29.1 dBV/m**

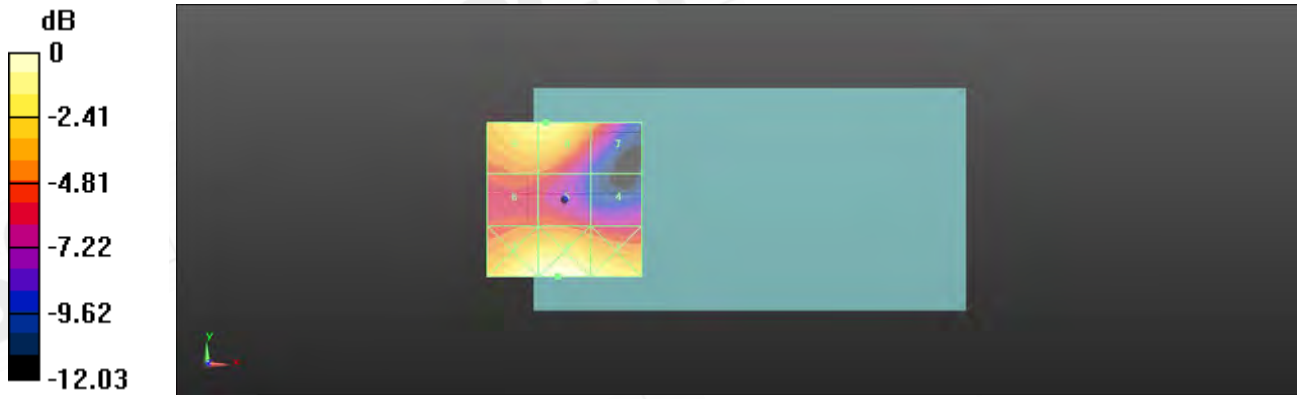

0 dB = 33.51 V/m = 30.50 dBV/m

Date: 2018/5/23

HAC- RF Emission_CDMA Secondary (BC10)_CH 476

Communication System: UID 10295 - AAB, CDMA2000, ; Frequency: 817.9 MHz
Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m^3
Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2306; ConvF(1, 1, 1); Calibrated: 2018/3/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/3/21
- Phantom: HAC Test Arch; ;
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 57.08 V/m; Power Drift = -0.02 dB
Applied MIF = 3.26 dB
RF audio interference level = 37.01 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **34.35 dBV/m**	Grid 2 **M4** **36.83 dBV/m**	Grid 3 **M4** **36.85 dBV/m**
Grid 4 **M4** **35.3 dBV/m**	Grid 5 **M4** **37.01 dBV/m**	Grid 6 **M4** **37.01 dBV/m**
Grid 7 **M4** **36.21 dBV/m**	Grid 8 **M4** **37.39 dBV/m**	Grid 9 **M4** **37.39 dBV/m**

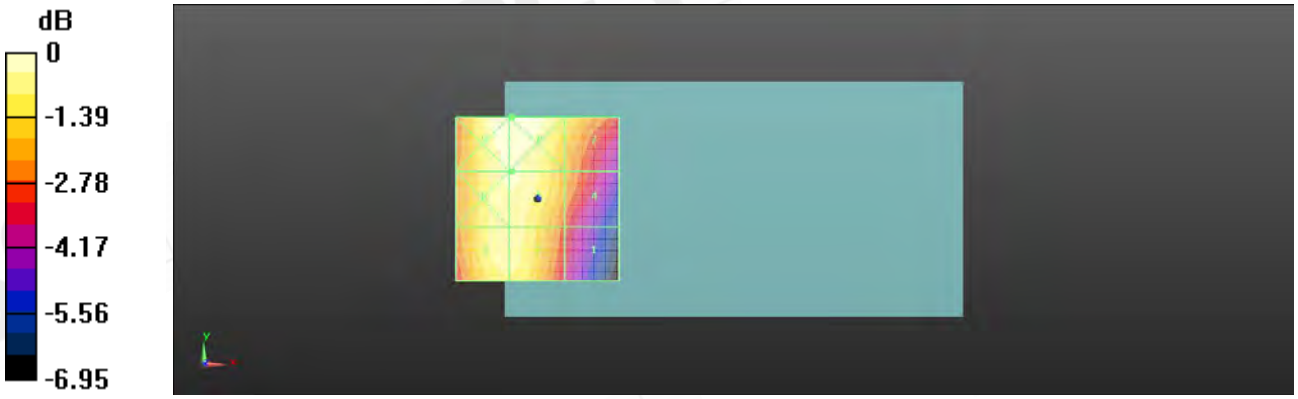

0 dB = 74.06 V/m = 37.39 dBV/m

Date: 2018/5/23

HAC- RF Emission_CDMA Secondary (BC10)_CH 560

Communication System: UID 10295 - AAB, CDMA2000, ; Frequency: 820 MHz
Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m^3
Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2306; ConvF(1, 1, 1); Calibrated: 2018/3/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/3/21
- Phantom: HAC Test Arch; ;
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 57.74 V/m; Power Drift = 0.06 dB
Applied MIF = 3.26 dB
RF audio interference level = 37.12 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **34.61 dBV/m**	Grid 2 **M4** **37.01 dBV/m**	Grid 3 **M4** **37.02 dBV/m**
Grid 4 **M4** **35.53 dBV/m**	Grid 5 **M4** **37.12 dBV/m**	Grid 6 **M4** **37.1 dBV/m**
Grid 7 **M4** **36.33 dBV/m**	Grid 8 **M4** **37.61 dBV/m**	Grid 9 **M4** **37.57 dBV/m**

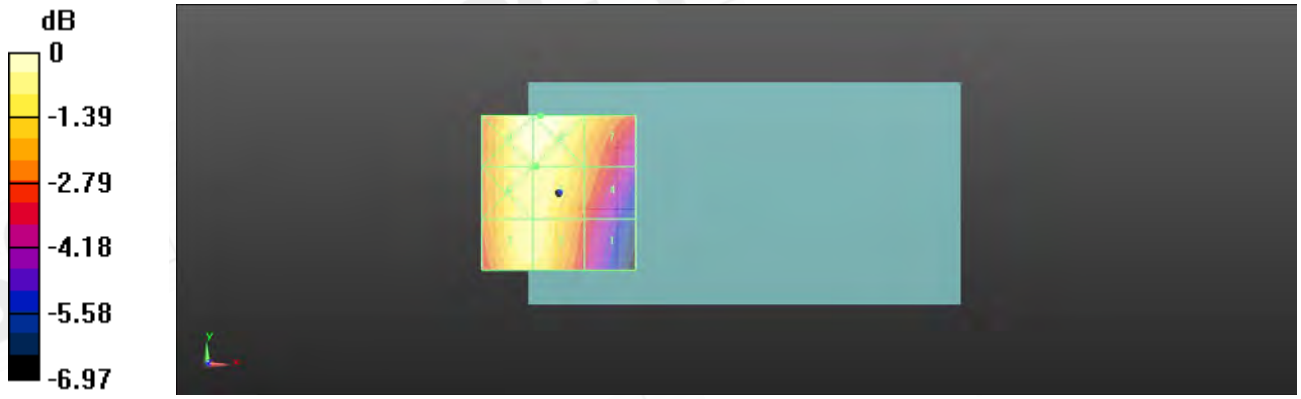

0 dB = 75.93 V/m = 37.61 dBV/m

Date: 2018/5/23

HAC- RF Emission_CDMA Secondary (BC10)_CH 684

Communication System: UID 10295 - AAB, CDMA2000, ; Frequency: 823.1 MHz
Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m^3
Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2306; ConvF(1, 1, 1); Calibrated: 2018/3/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/3/21
- Phantom: HAC Test Arch; ;
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 56.00 V/m; Power Drift = 0.09 dB
Applied MIF = 3.26 dB
RF audio interference level = 36.80 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 **M4** **34.34 dBV/m**	Grid 2 **M4** **36.76 dBV/m**	Grid 3 **M4** **36.76 dBV/m**
Grid 4 **M4** **35.24 dBV/m**	Grid 5 **M4** **36.8 dBV/m**	Grid 6 **M4** **36.8 dBV/m**
Grid 7 **M4** **36.05 dBV/m**	Grid 8 **M4** **37.18 dBV/m**	Grid 9 **M4** **37.17 dBV/m**

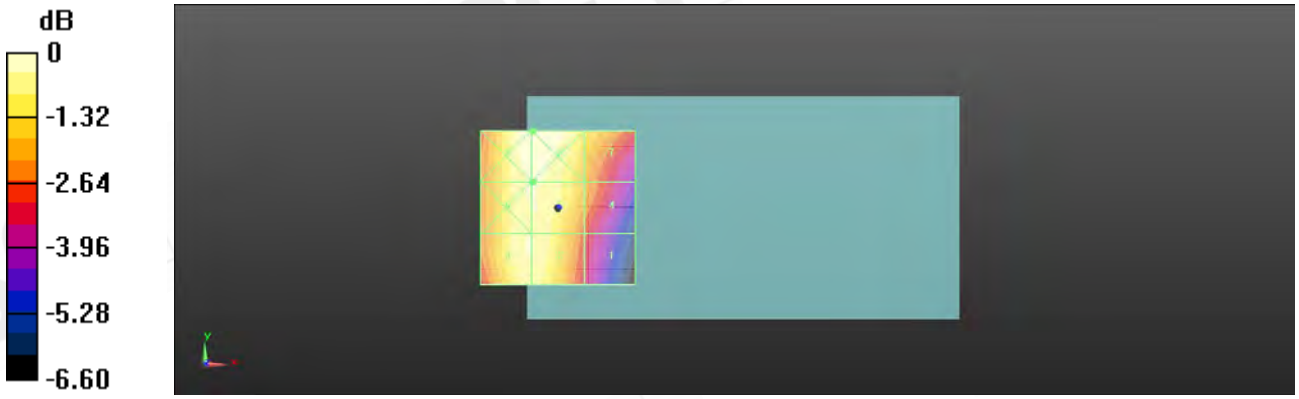

0 dB = 72.28 V/m = 37.18 dBV/m

17. System Verification

Date: 2018/5/23

Dipole CD835_SN_1052

Communication System: CW; Frequency: 835 MHz
Medium parameters used: σ = 0 S/m, ε_r = 1; ρ = 1000 kg/m^3
Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2306; ConvF(1, 1, 1); Calibrated: 2018/3/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/3/21
- Phantom: HAC Test Arch;
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Dipole E-Field measurement: Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 112.5 V/m; Power Drift = -0.02 dB
PMR not calibrated. PMF = 1.000 is applied.
E-field emissions = 108.5 V/m
Near-field category: M4 (AWF 0 dB)

PMF scaled E-field

Grid 1 **M4** **107.3 V/m**	Grid 2 **M4** **108.5 V/m**	Grid 3 **M4** **105.4 V/m**
Grid 4 **M4** **65.16 V/m**	Grid 5 **M4** **65.30 V/m**	Grid 6 **M4** **63.11 V/m**
Grid 7 **M4** **115.7 V/m**	Grid 8 **M4** **115.8 V/m**	Grid 9 **M4** **109.0 V/m**

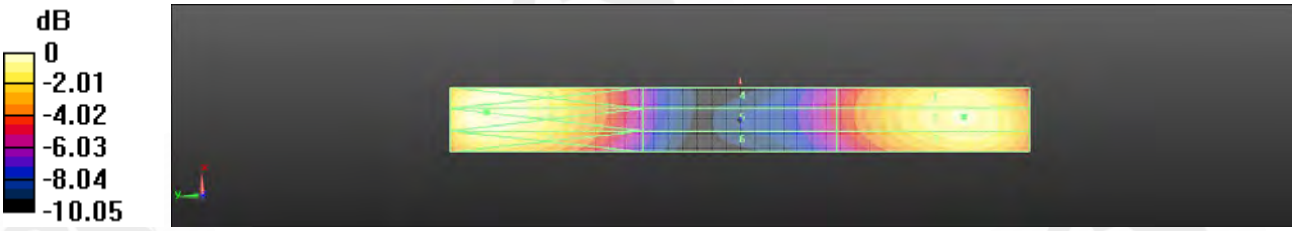

0 dB = 115.8 V/m = 41.27 dBV/m

Date: 2018/5/24

Dipole CD1880_SN_1044

Communication System: CW; Frequency: 1880 MHz
Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m^3
Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2306; ConvF(1, 1, 1); Calibrated: 2018/3/22;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1336; Calibrated: 2018/3/21
- Phantom: HAC Test Arch;
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Dipole E-Field measurement: Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 151.73 V/m; Power Drift = 0.04 dB
PMR not calibrated. PMF = 1.000 is applied.
E-field emissions = 84.85 V/m
Near-field category: M3 (AWF 0 dB)

PMF scaled E-field

Grid 1 **M3** **79.33 V/m**	Grid 2 **M3** **79.38 V/m**	Grid 3 **M3** **74.74 V/m**
Grid 4 **M3** **82.25 V/m**	Grid 5 **M3** **84.85 V/m**	Grid 6 **M3** **80.59 V/m**
Grid 7 **M3** **83.32 V/m**	Grid 8 **M3** **83.53 V/m**	Grid 9 **M3** **87.33 V/m**

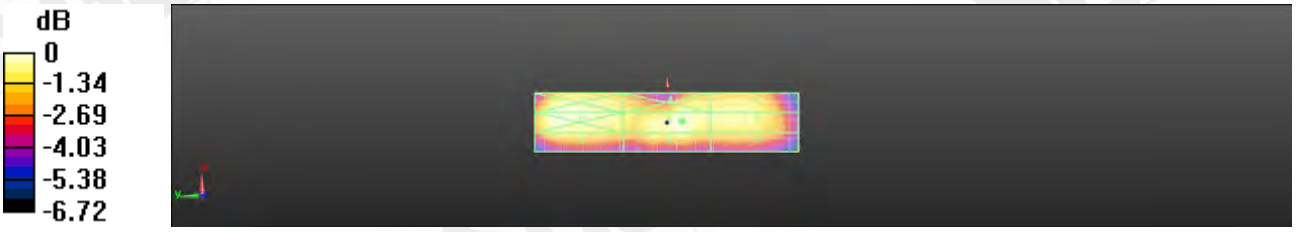

0 dB = 84.85 V/m = 38.57 dBV/m

18. DAE & Probe Calibration Certificate

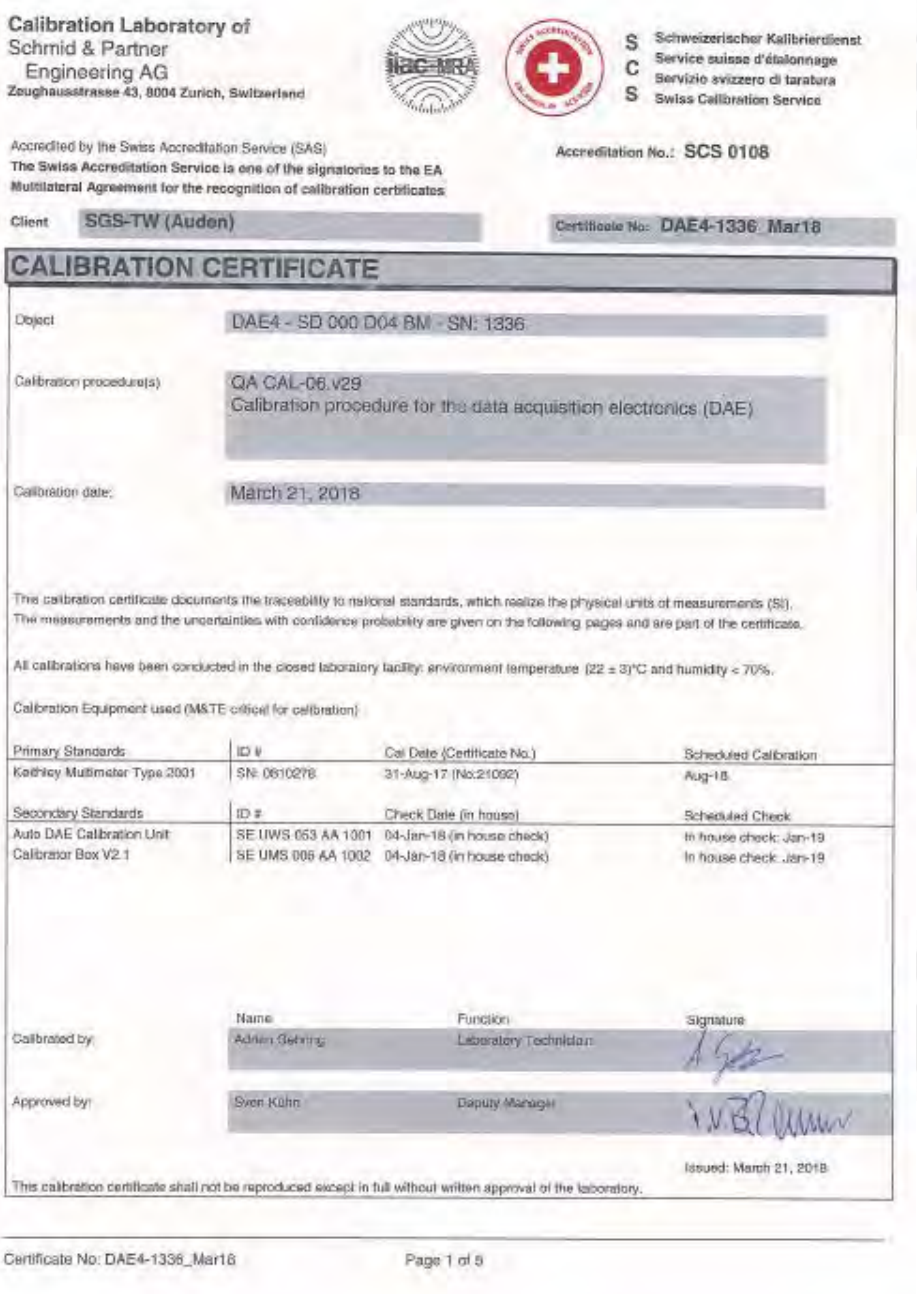

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client SGS-TW (Auden)

Certificate No: DAE4-1336_Mar18

CALIBRATION CERTIFICATE

Object DAE4 - SD 000 D04 BM - SN: 1336

Calibration procedure(s) QA CAL-06.v29
Calibration procedure for the data acquisition electronics (DAE)

Calibration date: March 21, 2018

The calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	31-Aug-17 (No:21092)	Aug-18
Secondary Standards	**ID #**	**Check Date (in house)**	**Scheduled Check**
Auto DAE Calibration Unit	SE UWS 053 AA 1001	04-Jan-18 (in house check)	In house check: Jan-19
Calibrator Box V2.1	SE UMS 006 AA 1002	04-Jan-18 (in house check)	In house check: Jan-19

	Name	Function	Signature
Calibrated by:	Adrian Gehring	Laboratory Technician	
Approved by:	Sven Kühn	Deputy Manager	

Issued: March 21, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: DAE4-1336_Mar18 Page 1 of 9

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary

DAE	data acquisition electronics
Connector angle	information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle*: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - *DC Voltage Measurement Linearity:* Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - *Common mode sensitivity:* Influence of a positive or negative common mode voltage on the differential measurement.
  - *Channel separation:* Influence of a voltage on the neighbor channels not subject to an input voltage.
  - *AD Converter Values with inputs shorted:* Values on the internal AD converter corresponding to zero input voltage
  - *Input Offset Measurement*: Output voltage and statistical results over a large number of zero voltage measurements.
  - *Input Offset Current*: Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - *Input resistance:* Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - *Low Battery Alarm Voltage:* Typical value for information. Below this voltage, a battery alarm signal is generated.
  - *Power consumption:* Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range:	1LSB =	6.1μV ,	full range =	-100 ... +300 mV
Low Range:	1LSB =	61nV ,	full range =	-1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	403.362 ± 0.02% (k=2)	403.664 ± 0.02% (k=2)	403.144 ± 0.02% (k=2)
Low Range	3.95106 ± 1.50% (k=2)	3.98716 ± 1.50% (k=2)	3.99791 ± 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	122.0 ° ± 1 °

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range		Reading (μV)	Difference (μV)	Error (%)
Channel X	+ Input	200032.51	0.12	0.00
Channel X	+ Input	20006.40	1.23	0.01
Channel X	- Input	-20003.02	1.97	-0.01
Channel Y	+ Input	200031.85	-0.59	-0.00
Channel Y	+ Input	20004.04	-0.97	-0.00
Channel Y	- Input	-20005.95	-0.92	0.00
Channel Z	+ Input	200033.31	0.61	0.00
Channel Z	+ Input	20003.33	-1.61	-0.01
Channel Z	- Input	-20007.20	-2.06	0.01

Low Range		Reading (μV)	Difference (μV)	Error (%)
Channel X	+ Input	2001.00	-0.33	-0.02
Channel X	+ Input	201.62	0.25	0.12
Channel X	- Input	-198.41	0.24	-0.12
Channel Y	+ Input	2001.15	-0.05	-0.00
Channel Y	+ Input	200.95	-0.35	-0.17
Channel Y	- Input	-199.53	-0.77	0.39
Channel Z	+ Input	2001.57	0.47	0.02
Channel Z	+ Input	199.98	-1.22	-0.61
Channel Z	- Input	-200.14	-1.28	0.65

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	6.48	4.38
	-200	-3.75	-4.83
Channel Y	200	-4.18	-3.84
	-200	1.89	2.38
Channel Z	200	20.84	21.26
	-200	-23.99	-24.35

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	5.48	-1.63
Channel Y	200	8.85	-	6.35
Channel Z	200	8.27	6.90	-

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15667	16592
Channel Y	15909	15806
Channel Z	15857	15707

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec
Input 10MΩ

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (μV)
Channel X	0.56	-0.27	1.89	0.40
Channel Y	-0.08	-0.95	0.75	0.36
Channel Z	-1.39	-2.93	-0.50	0.41

6. Input Offset Current

Nominal input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client SGS-TW (Auden) Certificate No: ER3-2306_Mar18

CALIBRATION CERTIFICATE

Object ER3DV6 - SN:2306

Calibration procedure(s) QA CAL-02.v8, QA CAL-25.v6
Calibration procedure for E-field probes optimized for close near field evaluations in air

Calibration date: March 22, 2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02525)	Apr-18
Reference 20 dB Attenuator	SN: S5277 (20x)	07-Apr-17 (No. 217-02528)	Apr-18
Reference Probe ER3DV6	SN: 2328	10-Oct-17 (No. ER3-2328_Oct17)	Oct-18
DAE4	SN: 789	2-Aug-17 (No. DAE4-789_Aug17)	Aug-18
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: March 22, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary:

NORMx,y,z	sensitivity in free space
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., ϑ = 0 is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

a) IEEE Std 1309-2005, " IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005
b) CTIA Test Plan for Hearing Aid Compatibility, Rev 3.0, November 2013

Methods Applied and Interpretation of Parameters:

- *NORMx,y,z*: Assessed for E-field polarization ϑ = 0 for XY sensors and ϑ = 90 for Z sensor (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide).
- *NORM(f)x,y,z = NORMx,y,z * frequency_response* (see Frequency Response Chart).
- *DCPx,y,z*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- *PAR*: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- *Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z*: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. *VR* is the maximum calibration range expressed in RMS voltage across the diode.
- *Spherical Isotropy (3D deviation from Isotropy)*: In a locally homogeneous field realized using an open waveguide setup.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the *NORMx* (no uncertainty required).

Probe ER3DV6

SN:2306

Manufactured: December 17, 2002
Calibrated: March 22, 2018

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ER3DV6 - SN:2306

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu V/(V/m)^2$)	1.06	1.10	1.21	± 10.1 %
DCP (mV)[B]	103.2	101.7	105.2	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB√μV	C	D dB	VR mV	Unc[E] (k=2)
0	CW	X	0.0	0.0	1.0	0.00	209.1	±3.0 %
		Y	0.0	0.0	1.0		166.9	
		Z	0.0	0.0	1.0		212.3	
10010-CAA	SAR Validation (Square, 100ms, 10ms)	X	0.43	50.9	4.8	10.00	36.5	±1.4 %
		Y	0.40	50.0	2.9		37.7	
		Z	0.48	51.5	4.8		36.2	
10021-DAC	GSM-FDD (TDMA, GMSK)	X	3.16	72.2	16.8	9.39	149.3	±1.9 %
		Y	2.31	68.9	14.6		123.3	
		Z	4.08	75.8	18.1		136.1	
10061-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	3.40	72.3	21.2	3.60	146.7	±1.4 %
		Y	2.69	67.9	19.2		114.8	
		Z	4.55	78.2	23.7		148.8	
10077-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	9.60	69.3	24.4	11.00	122.3	±3.0 %
		Y	9.64	69.7	24.9		131.0	
		Z	9.66	69.7	24.6		122.4	
10173-CAD	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	5.99	71.3	25.0	9.48	112.5	±3.0 %
		Y	5.94	71.6	25.4		119.7	
		Z	6.19	71.6	24.7		115.0	
10226-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	5.98	71.3	25.0	9.49	112.3	±3.0 %
		Y	5.94	71.5	25.3		120.0	
		Z	6.18	71.4	24.6		114.9	
10229-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	5.99	71.3	25.0	9.48	112.4	±3.0 %
		Y	5.97	71.8	25.5		119.8	
		Z	6.19	71.5	24.7		114.9	
10232-CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	5.90	71.3	25.0	9.48	112.2	±3.0 %
		Y	5.96	71.8	25.5		119.9	
		Z	6.17	71.4	24.6		115.0	
10235-CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	5.98	71.3	25.0	9.48	112.0	±3.0 %
		Y	5.95	71.6	25.4		119.9	
		Z	6.19	71.5	24.7		115.2	

ER3DV6 – SN:2306 March 22, 2018

10238-CAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	5.96	71.3	25.0	9.46	112.2	±3.0 %
		Y	5.94	71.6	25.4		119.2	
		Z	6.20	71.6	24.7		114.9	
10295-AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr	X	5.71	71.0	27.1	12.49	78.3	±1.9 %
		Y	5.39	70.0	26.9		82.0	
		Z	5.74	70.7	26.4		78.4	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

[S] Numerical linearization parameter: uncertainty not required.
[F] Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

ER3DV6 – SN:2306 March 22, 2018

Frequency Response of E-Field
(TEM-Cell:ifi110 EXX, Waveguide: R22)

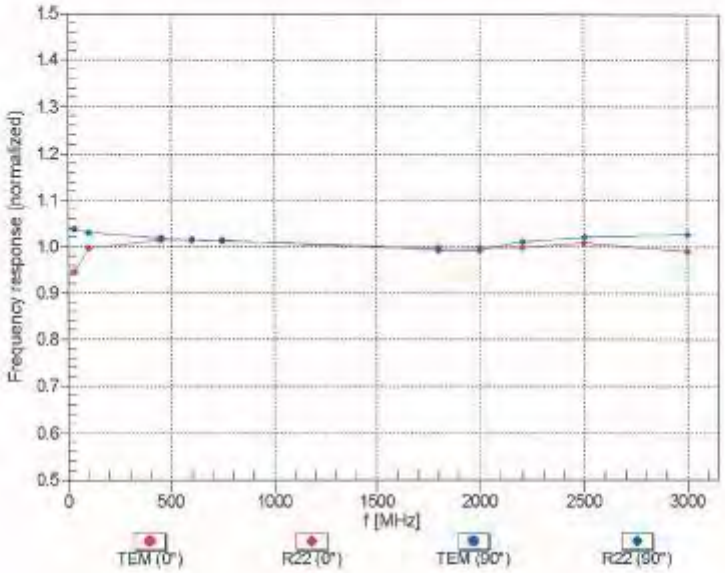

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Receiving Pattern (ϕ), ϑ = 0°

f=600 MHz,TEM,0°

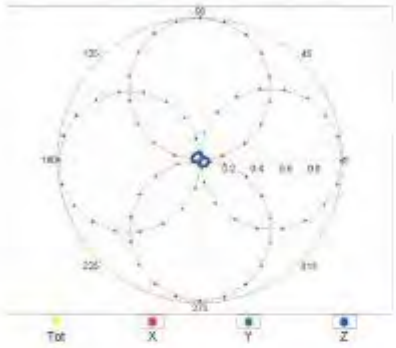

f=2500 MHz,R22,0°

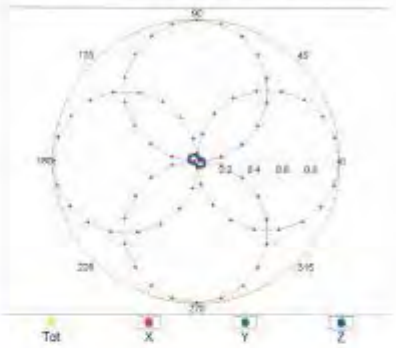

Receiving Pattern (ϕ), ϑ = 90°

f=600 MHz,TEM,90°

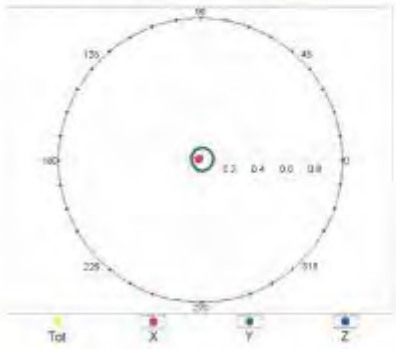

f=2500 MHz,R22,90°

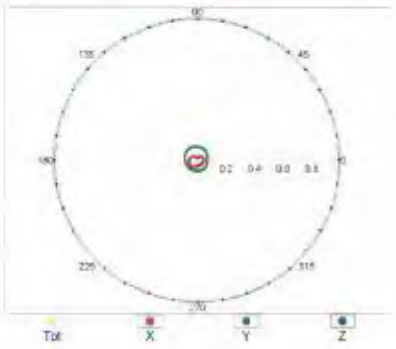

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

ER3DV6 – SN:2306 March 22, 2018

Receiving Pattern (ϕ), ϑ = 0°

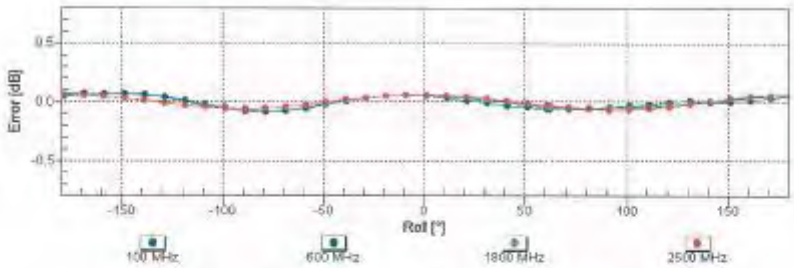

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

Receiving Pattern (ϕ), ϑ = 90°

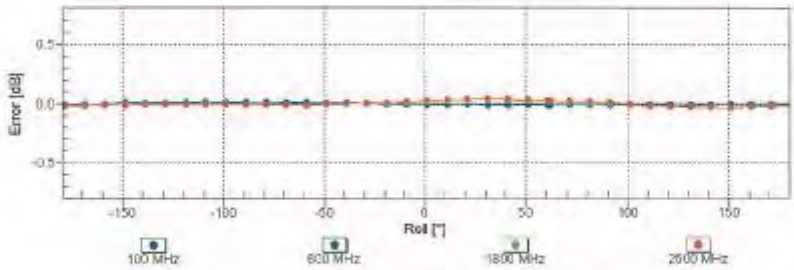

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

Dynamic Range f(E-field)
(TEM cell , f = 900 MHz)

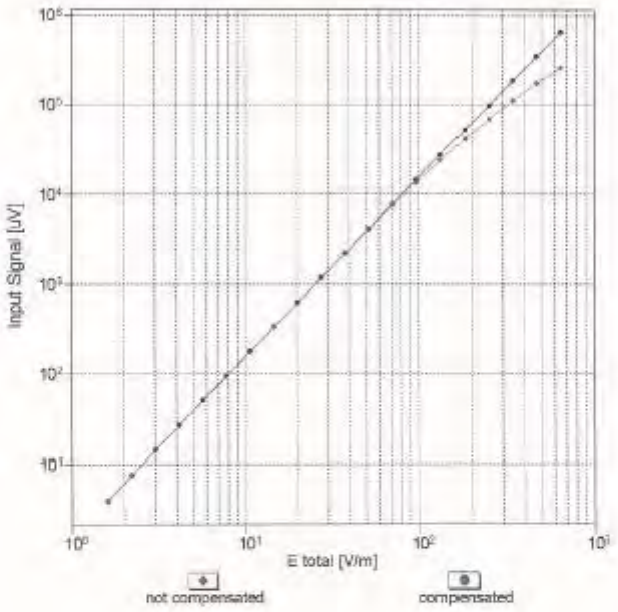

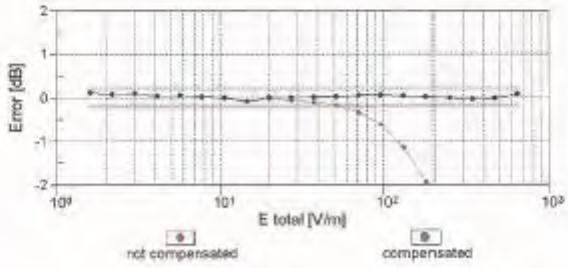

Uncertainty of Linearity Assessment: ± 0.6% (k=2)

ER3DV6 – SN:2306 March 22, 2018

Deviation from Isotropy in Air

Error (ϕ, ϑ), f = 900 MHz

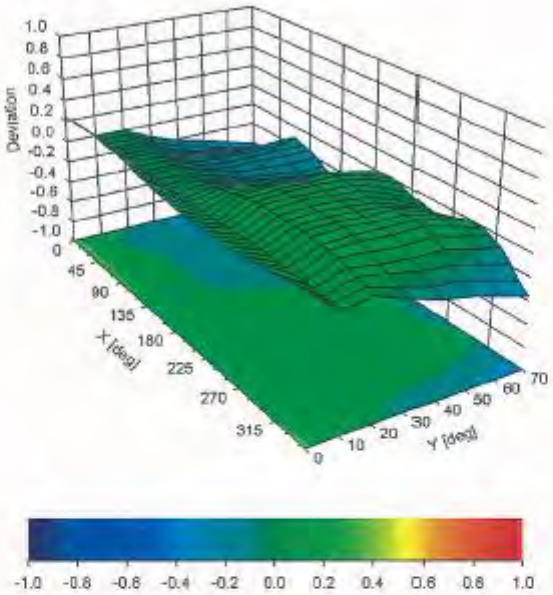

Uncertainty of Spherical Isotropy Assessment: ± 2.6% (k=2)

DASY/EASY - Parameters of Probe: ER3DV6 - SN:2306

Other Probe Parameters

Sensor Arrangement	Rectangular
Connector Angle (°)	131.1
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	8 mm
Probe Tip to Sensor X Calibration Point	2.5 mm
Probe Tip to Sensor Y Calibration Point	2.5 mm
Probe Tip to Sensor Z Calibration Point	2.5 mm

19. Uncertainty Budget

HAC Uncertainty Budget
According to ANSI C63.19 [1], [2]

Error Description	Uncert. value	Prob. Dist.	Div.	(c_i) E	(c_i) H	Std. Unc. E	Std. Unc. H
Measurement System							
Probe Calibration	±5.1%	N	1	1	1	±5.1%	±5.1%
Axial Isotropy	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
Sensor Displacement	±16.5%	R	$\sqrt{3}$	1	0.145	±9.5%	±1.4%
Boundary Effects	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%
Phantom Boundary Effect	±7.2%	R	$\sqrt{3}$	1	0	±4.1%	±0.0%
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
Scaling with PMR calibration	±10.0%	R	$\sqrt{3}$	1	1	±5.8%	±5.8%
System Detection Limit	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%
RF Ambient Conditions	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
RF Reflections	±12.0%	R	$\sqrt{3}$	1	1	±6.9%	±6.9%
Probe Positioner	±1.2%	R	$\sqrt{3}$	1	0.67	±0.7%	±0.5%
Probe Positioning	±4.7%	R	$\sqrt{3}$	1	0.67	±2.7%	±1.8%
Extrap. and Interpolation	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Test Sample Related							
Device Positioning Vertical	±4.7%	R	$\sqrt{3}$	1	0.67	±2.7%	±1.8%
Device Positioning Lateral	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Device Holder and Phantom	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%
Phantom and Setup Related							
Phantom Thickness	±2.4%	R	$\sqrt{3}$	1	0.67	±1.4%	±0.9%
Combined Std. Uncertainty						±16.3%	±12.3%
Expanded Std. Uncertainty on Power						**±32.6%**	**±24.6%**
Expanded Std. Uncertainty on Field						**±16.3%**	**±12.3%**

20. System Validation from Original Equipment Supplier

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client SGS-TW (Auden)

Certificate No: CD835V3-1052_Mar18

CALIBRATION CERTIFICATE

Object: CD835V3 - SN: 1052

Calibration procedure(s): QA CAL-20.v6
Calibration procedure for dipoles in air

Calibration date: March 14, 2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02526)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 08327	07-Apr-17 (No. 217-02529)	Apr-18
Probe EF3DV3	SN: 4013	05-Mar-18 (No. EF3-4013_Mar18)	Mar-19
DAE4	SN: 781	17-Jan-18 (No. DAE4-781_Jan18)	Jan-19

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter Agilent 4419B	SN: GB42420191	09-Oct-09 (in house check Oct-17)	In house check: Oct-20
Power sensor HP E4412A	SN: US38485102	05-Jan-10 (in house check Oct-17)	In house check: Oct-20
Power sensor HP 8482A	SN: US37295597	09-Oct-09 (in house check Oct-17)	In house check: Oct-20
RF generator R&S SMT-06	SN: 832283/011	27-Aug-12 (in house check Oct-17)	In house check: Oct-20
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

	Name	Function	Signature
Calibrated by:	Leif Klysner	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: March 15, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: CD835V3-1052_Mar18 Page 1 of 5

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

References

[1] ANSI-C63.19-2011
American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- *Coordinate System:* y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- *Measurement Conditions:* Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- *Antenna Positioning:* The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections.
  It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- *Feed Point Impedance and Return Loss:* These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- *E-field distribution:* E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	15 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	835 MHz ± 1 MHz	
Input power drift	< 0.05 dB	

Maximum Field values at 835 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	110.6 V/m = 40.87 dBV/m
Maximum measured above low end	100 mW input power	109.9 V/m = 40.82 dBV/m
Averaged maximum above arm	100 mW input power	**110.3 V/m ± 12.8 % (k=2)**

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters

Frequency	Return Loss	Impedance
800 MHz	15.8 dB	41.1 Ω - 11.9 jΩ
835 MHz	29.3 dB	52.6 Ω + 2.4 jΩ
880 MHz	17.1 dB	61.2 Ω - 10.7 jΩ
900 MHz	17.4 dB	52.4 Ω - 13.7 jΩ
945 MHz	22.6 dB	46.7 Ω + 6.4 jΩ

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.
The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.
Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

Impedance Measurement Plot

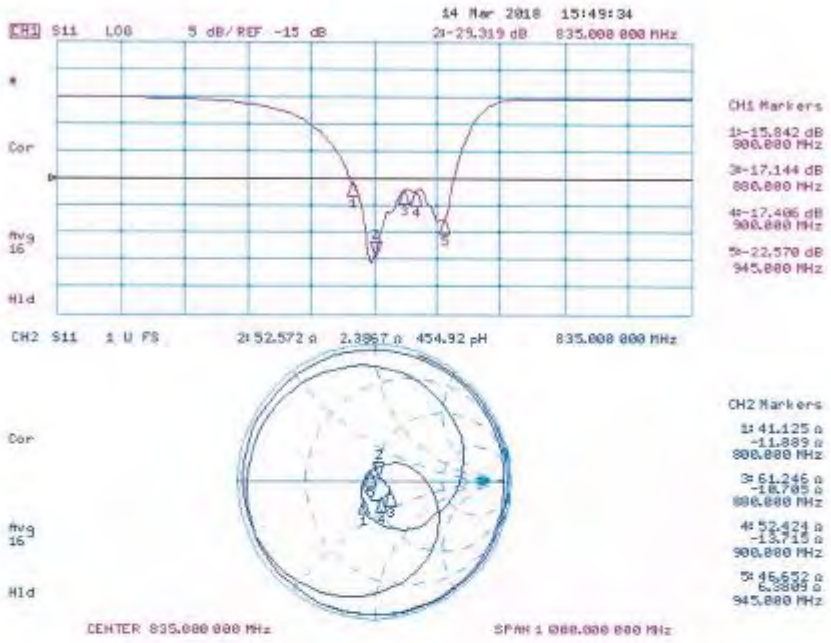

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

DASY5 E-field Result

Date: 14.03.2018

Test Laboratory: SPEAG Lab2

DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: CD835V3 - SN: 1052

Communication System: UID 0 - CW ; Frequency: 835 MHz
Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m^3
Phantom section: RF Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EF3DV3 - SN4013; ConvF(1, 1, 1); Calibrated: 05.03.2018;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 17.01.2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole E-Field measurement @ 835MHz/E-Scan - 835MHz d=15mm/Hearing Aid Compatibility Test (41x361x1):
Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 129.8 V/m; Power Drift = -0.00 dB
Applied MIF = 0.00 dB
RF audio interference level = 40.87 dBV/m
Emission category: M3

MIF scaled E-field

Grid 1 M3 40.3 dBV/m	Grid 2 M3 40.87 dBV/m	Grid 3 M3 40.85 dBV/m
Grid 4 M4 35.56 dBV/m	Grid 5 M4 36.05 dBV/m	Grid 6 M4 36.05 dBV/m
Grid 7 M3 40.29 dBV/m	Grid 8 M3 40.82 dBV/m	Grid 9 M3 40.81 dBV/m

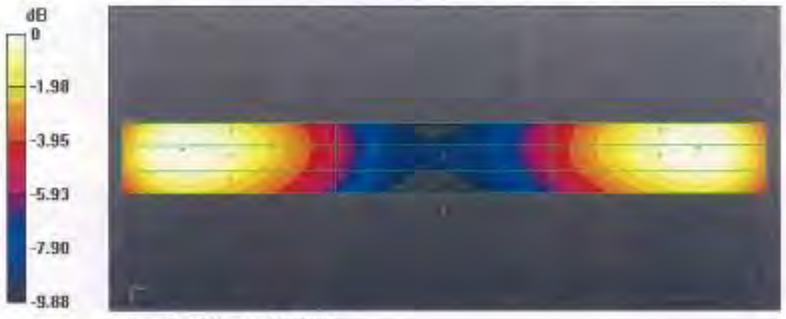

0 dB = 110.6 V/m = 40.88 dBV/m

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S C S Schweizerischer Kalibrierdienst
Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client SGS-TW (Auden)

Certificate No: CD1880V3-1044_Mar18

CALIBRATION CERTIFICATE

Object CD1880V3 - SN: 1044

Calibration procedure(s) QA CAL-20.v6
Calibration procedure for dipoles in air

Calibration date: March 14, 2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Probe EF3DV3	SN: 4013	05-Mar-18 (No. EF3-4013_Mar18)	Mar-19
DAE4	SN: 781	17-Jan-18 (No. DAE4-781_Jan18)	Jan-19

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter Agilent 4419B	SN: GB42420191	09-Oct-09 (in house check Oct-17)	In house check: Oct-20
Power sensor HP E4412A	SN: US38485102	05-Jan-10 (in house check Oct-17)	In house check: Oct-20
Power sensor HP 8482A	SN: US37295597	09-Oct-09 (in house check Oct-17)	In house check: Oct-20
RF generator R&S SMT-06	SN: 832283/011	27-Aug-12 (in house check Oct-17)	In house check: Oct-20
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

	Name	Function	Signature
Calibrated by:	Leif Klysner	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: March 15, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

References

(1) ANSI-C63.19-2011
American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- *Coordinate System:* y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- *Measurement Conditions:* Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- *Antenna Positioning:* The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections.
  It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- *Feed Point Impedance and Return Loss:* These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- *E-field distribution:* E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY6	V52.10.0
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	15 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	1880 MHz ± 1 MHz	
Input power drift	< 0.05 dB	

Maximum Field values at 1880 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	88.9 V/m = 38.98 dBV/m
Maximum measured above low end	100 mW input power	88.6 V/m = 38.95 dBV/m
Averaged maximum above arm	100 mW input power	85.8 V/m ± 12.8 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters

Frequency	Return Loss	Impedance
1730 MHz	23.4 dB	53.7 Ω + 5.9 jΩ
1880 MHz	20.1 dB	58.7 Ω + 8.4 jΩ
1900 MHz	20.6 dB	59.4 Ω + 8.3 jΩ
1950 MHz	27.9 dB	53.4 Ω - 2.4 jΩ
2000 MHz	21.4 dB	46.2 Ω + 7.3 jΩ

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.
The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.
Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Impedance Measurement Plot

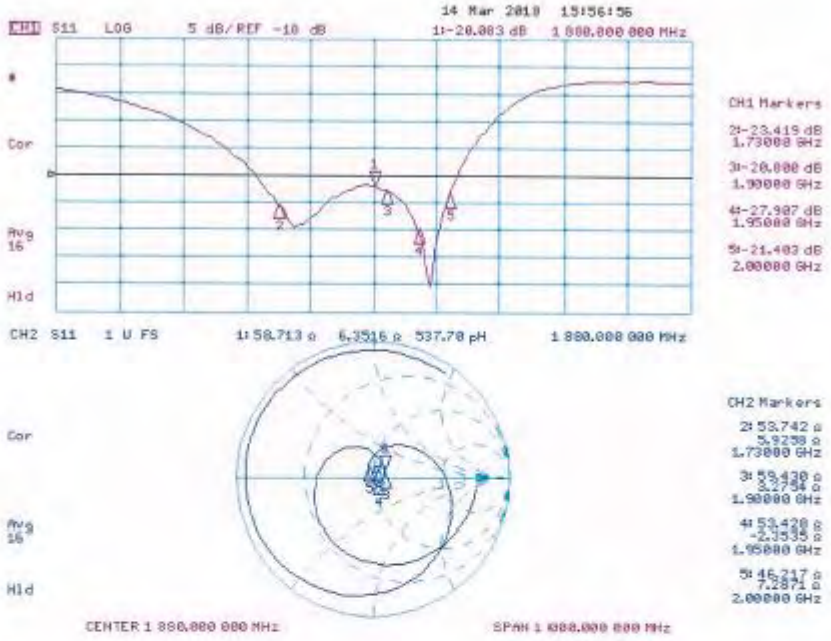

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

DASY5 E-field Result

Date: 14.03.2018

Test Laboratory: SPEAG Lab2

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: CD1880V3 - SN: 1044

Communication System: UID 0 - CW ; Frequency: 1880 MHz
Medium parameters used: $\sigma = 0$ S/m, $\varepsilon_r = 1$; $\rho = 1000$ kg/m^3
Phantom section: RF Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EF3DV3 - SN4013; ConvF(1, 1, 1); Calibrated: 05.03.2018;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 17.01.2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole E-Field measurement @ 1880MHz/E-Scan - 1880MHz d=15mm/Hearing Aid Compatibility Test (41x181x1):
Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 160.7 V/m; Power Drift = 0.00 dB
Applied MIF = 0.00 dB
RF audio interference level = 38.98 dBV/m
Emission category: M2

MIF scaled E-field

Grid 1 M2 38.41 dBV/m	Grid 2 M2 38.95 dBV/m	Grid 3 M2 38.93 dBV/m
Grid 4 M2 35.89 dBV/m	Grid 5 M2 36.09 dBV/m	Grid 6 M2 36.07 dBV/m
Grid 7 M2 38.67 dBV/m	Grid 8 M2 38.98 dBV/m	Grid 9 M2 38.91 dBV/m

0 dB = 88.87 V/m = 38.98 dBV/m

End of report